

FCC Test Report

FCC ID: QISRIO-L02

Project No. : 1506C158
Equipment : Smart Phone
Model Name : HUAWEI RIO-L02, RIO-L02
Applicant : HUAWEI Technologies Co., Ltd
Address : Huawei Industrial Base, Bantian Longgang, Shenzhen
518129, P.R China

Date of Receipt : Jun. 16, 2015
Date of Test : Jun. 16, 2015 ~ Jun. 26, 2015
Issued Date : Jun. 29, 2015
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
5.1.5 EUT OPERATING CONDITIONS	13
5.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
5.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
5.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTO	19
ATTACHMENT A - CONDUCTED EMISSION	22
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	49
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	78

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1506C158	Original Issue.	Jun. 29, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI RIO-L02, RIO-L02
Applicant : HUAWEI Technologies Co., Ltd
Manufacturer : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China
Address : HUAWEI Technologies Co., Ltd
Factory : Huawei Industrial Base,Bantian Longgang,Shenzhen 518129, P.R China
Address : HUAWEI Technologies Co., Ltd
Date of Test : Jun. 16, 2015 ~ Jun. 26, 2015
Standard(s) : FCC Part 15, Subpart B:2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1506C158) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
		18,000MHz ~ 40,000MHz	H	4.01	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI RIO-L02, RIO-L02
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: Huawei Technologies Co., Ltd. Model: HW-050100U01 (US) Model: HW-050100E01 (EU) Model: HW-050100B01 (UK) Model: HW-050100A01 (AU) #2 Supplied from battery. Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB396481EBC
Power Rating	#1 I/P: ~100-240V 50/60Hz ,0.5A O/P: 5V  1A #2 DC 3.8V 3000mAh
Earphone	#1 Manufacturer: JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD. Model: MEMD1632B580A00 #2 Manufacturer: QUANCHENG ELECTRONIC CO.,LTD Model: 1311-3291-3.5MM-178

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The maximum operating frequency is 4GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 7	USB Copy(EUT with PC) +Earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	Playing+idle+speaker
Mode 7	USB Copy(EUT with PC) +Earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

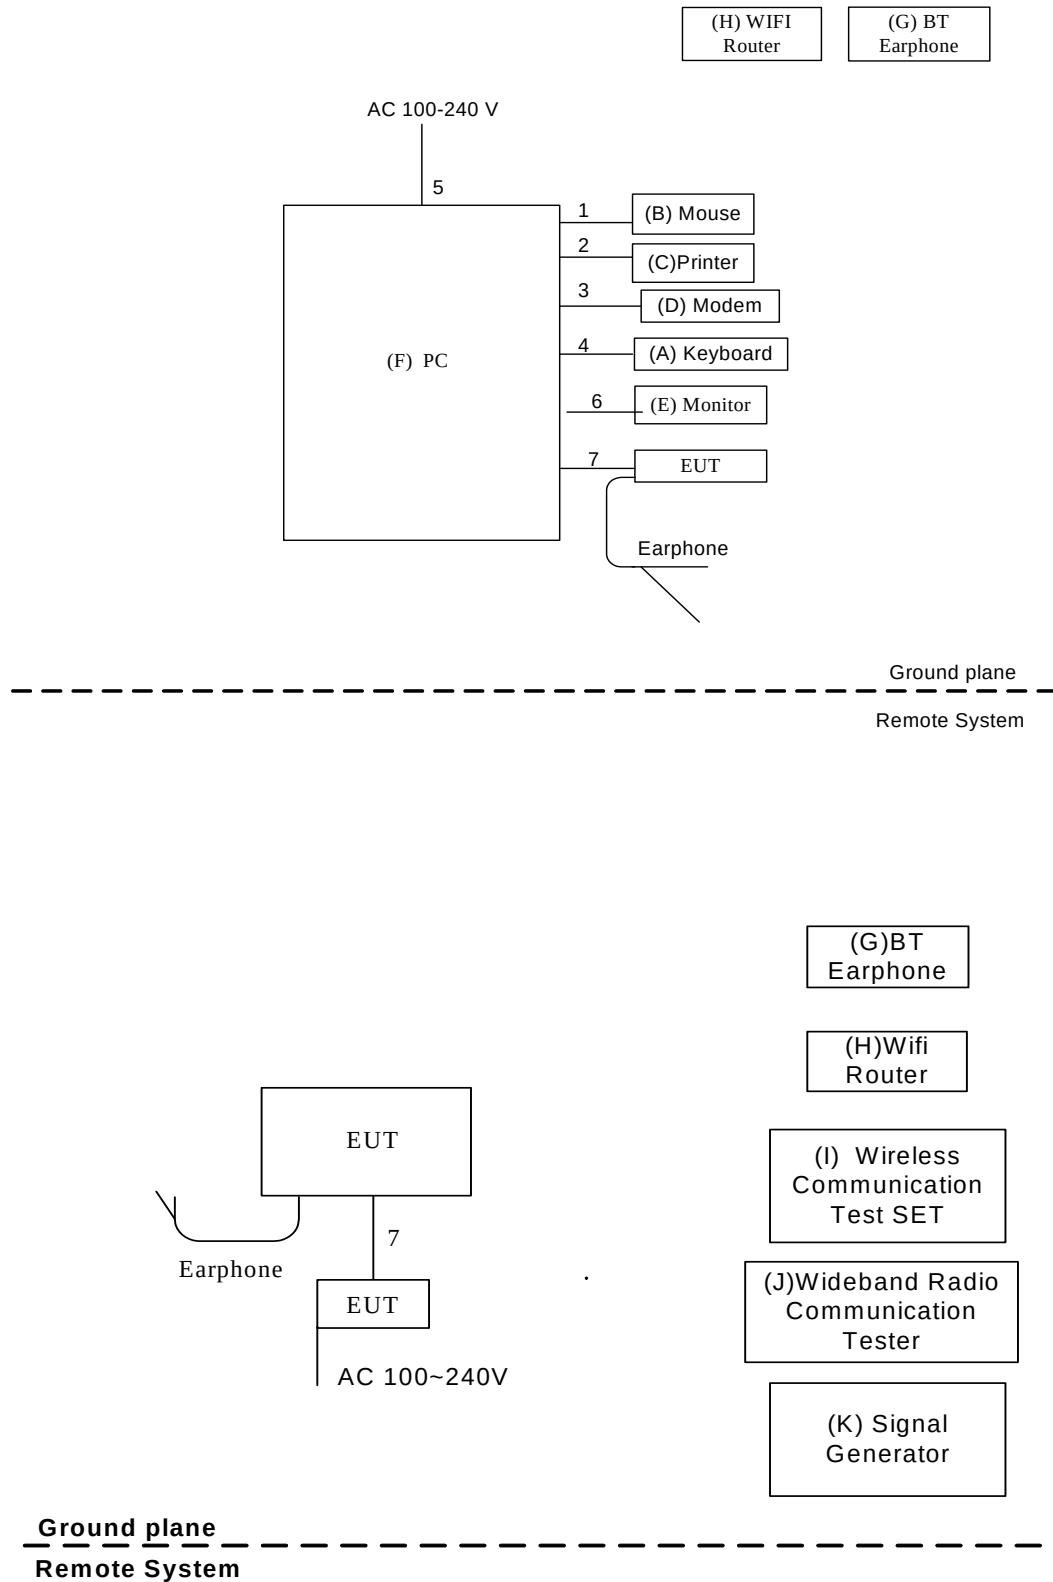

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-6418 0-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	
G	Router	TP-LINK	TL-WR1041N	N/A	N/A	
H	BT Earphone	N/A	N/A	N/A	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

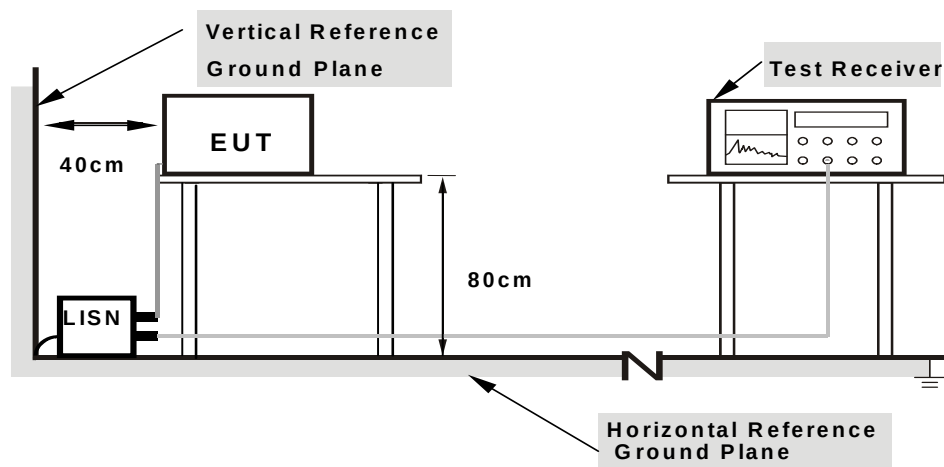

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

5.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014;.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

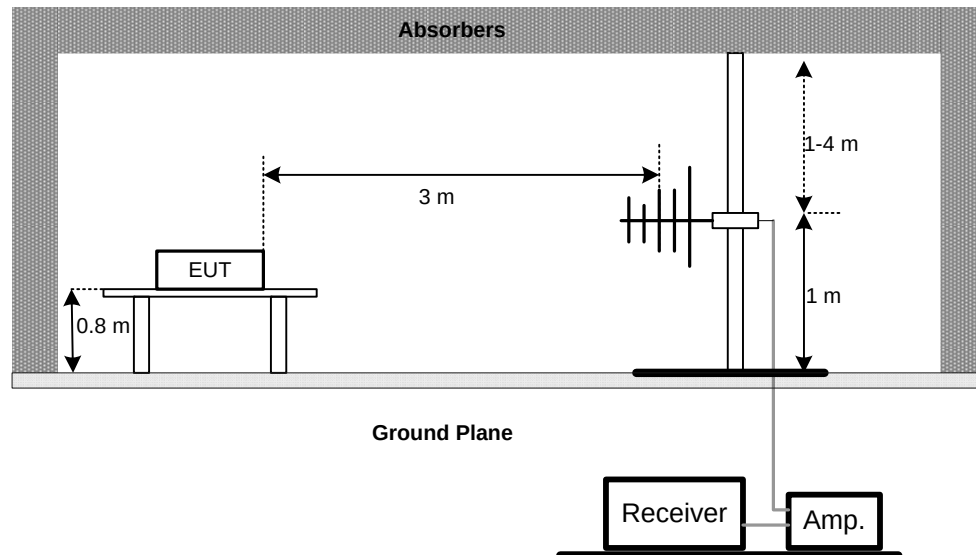

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

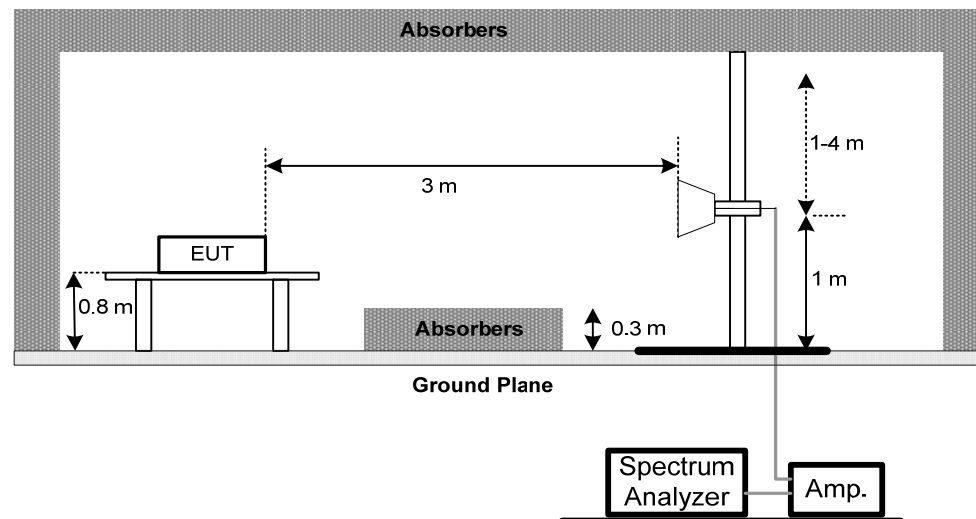

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW=120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

5.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 28°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Line

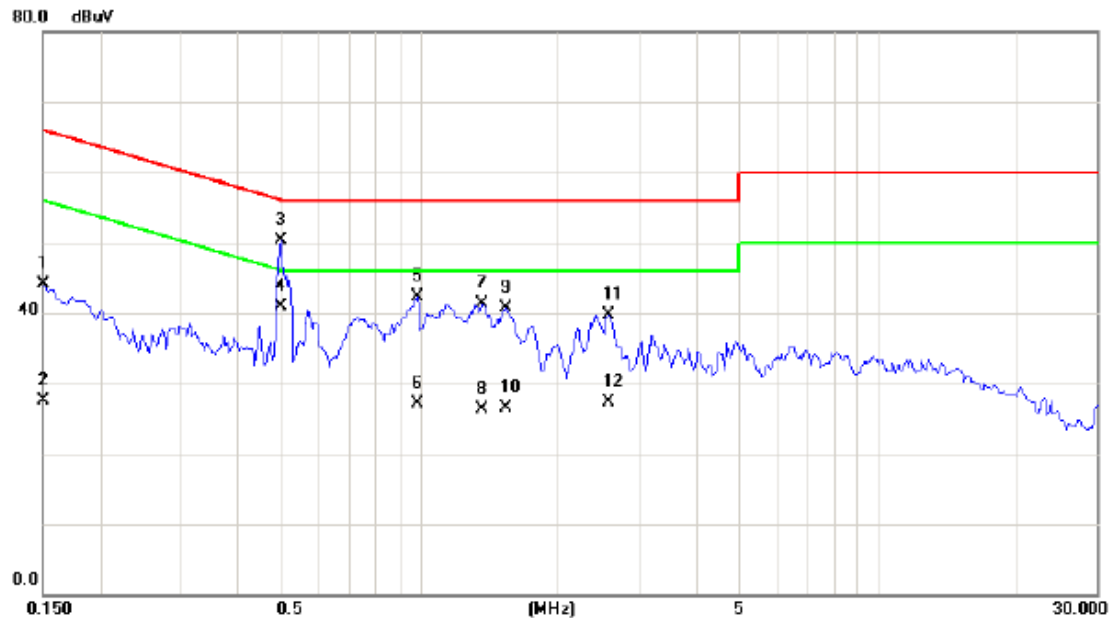

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	34.52	9.68	44.20	66.00	-21.80	QP	
2		0.1500	17.90	9.68	27.58	56.00	-28.42	AVG	
3		0.4976	40.39	9.82	50.21	56.04	-5.83	QP	
4	*	0.4976	31.10	9.82	40.92	46.04	-5.12	AVG	
5		0.9860	32.31	9.98	42.29	56.00	-13.71	QP	
6		0.9860	17.20	9.98	27.18	46.00	-18.82	AVG	
7		1.3648	31.37	9.97	41.34	56.00	-14.66	QP	
8		1.3648	16.40	9.97	26.37	46.00	-19.63	AVG	
9		1.5367	30.79	9.91	40.70	56.00	-15.30	QP	
10		1.5367	16.50	9.91	26.41	46.00	-19.59	AVG	
11		2.5758	29.81	9.93	39.74	56.00	-16.26	QP	
12		2.5758	17.30	9.93	27.23	46.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Neutral

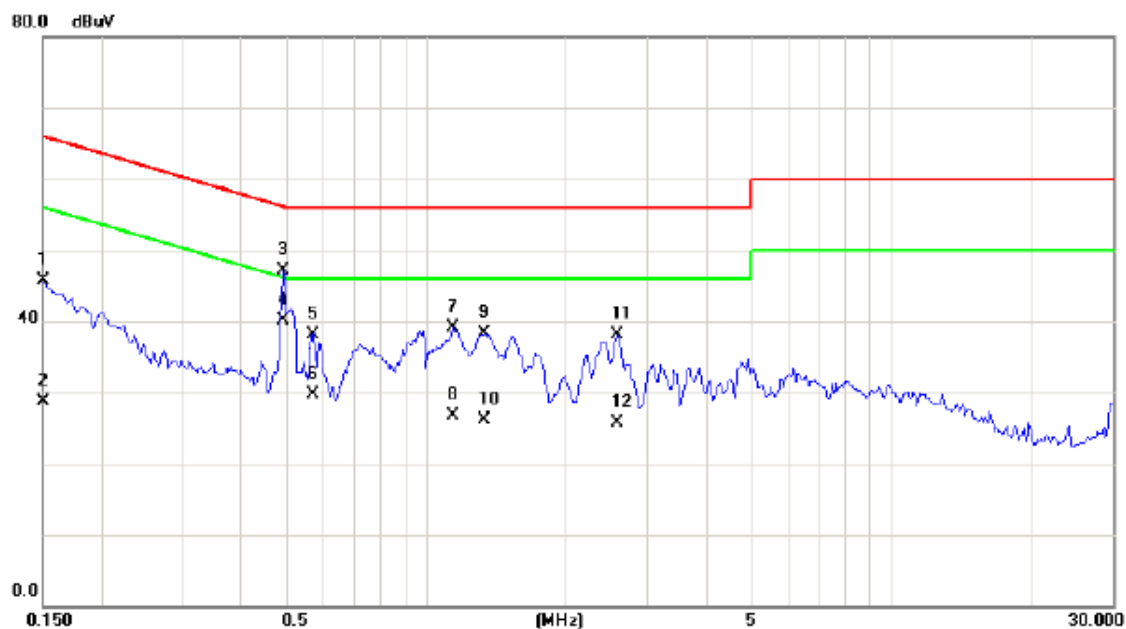

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	36.02	9.60	45.62	66.00	-20.38	QP	
2		0.1500	19.20	9.60	28.80	56.00	-27.20	AVG	
3		0.4938	37.44	9.65	47.09	56.10	-9.01	QP	
4	*	0.4938	30.40	9.65	40.05	46.10	-6.05	AVG	
5		0.5720	28.53	9.67	38.20	56.00	-17.80	QP	
6		0.5720	20.00	9.67	29.67	46.00	-16.33	AVG	
7		1.1422	29.25	9.80	39.05	56.00	-16.95	QP	
8		1.1422	16.90	9.80	26.70	46.00	-19.30	AVG	
9		1.3375	28.46	9.81	38.27	56.00	-17.73	QP	
10		1.3375	16.30	9.81	26.11	46.00	-19.89	AVG	
11		2.5836	28.18	9.85	38.03	56.00	-17.97	QP	
12		2.5836	15.80	9.85	25.65	46.00	-20.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Line

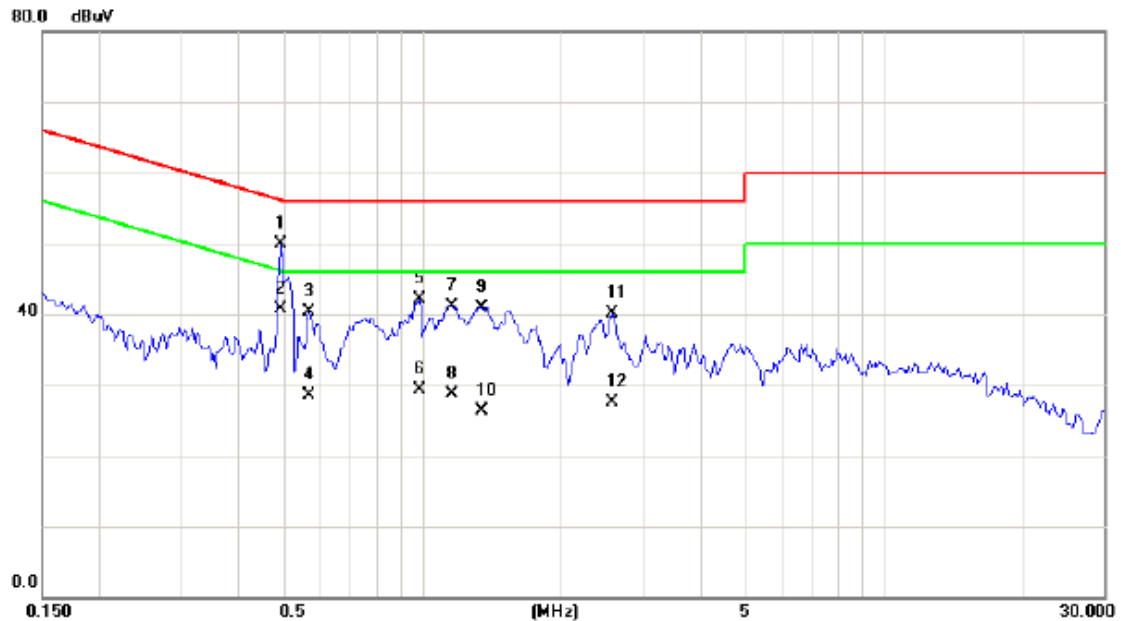

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4938	40.12	9.82	49.94	56.10	-6.16	QP	
2	*	0.4938	30.80	9.82	40.62	46.10	-5.48	AVG	
3		0.5680	30.55	9.84	40.39	56.00	-15.61	QP	
4		0.5680	18.60	9.84	28.44	46.00	-17.56	AVG	
5		0.9860	32.15	9.98	42.13	56.00	-13.87	QP	
6		0.9860	19.30	9.98	29.28	46.00	-16.72	AVG	
7		1.1617	31.06	10.01	41.07	56.00	-14.93	QP	
8		1.1617	18.70	10.01	28.71	46.00	-17.29	AVG	
9		1.3453	30.98	9.98	40.96	56.00	-15.04	QP	
10		1.3453	16.40	9.98	26.38	46.00	-19.62	AVG	
11		2.5720	30.15	9.93	40.08	56.00	-15.92	QP	
12		2.5720	17.50	9.93	27.43	46.00	-18.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Neutral

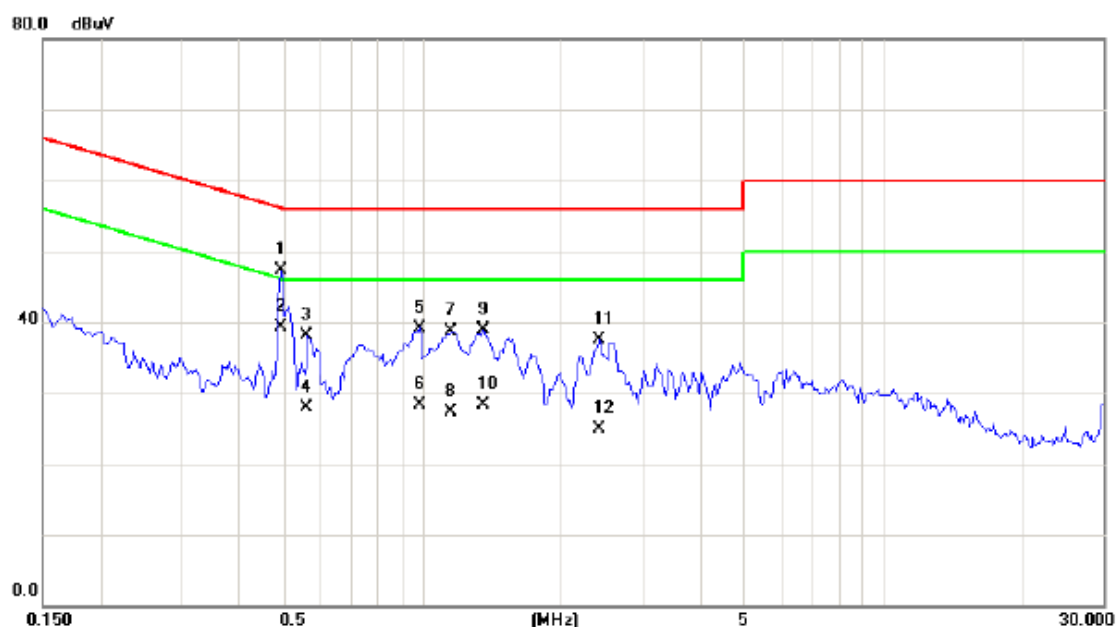

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.4938	37.74	9.65	47.39	56.10	-8.71	QP	
2	*	0.4938	29.60	9.65	39.25	46.10	-6.85	AVG	
3		0.5641	28.43	9.67	38.10	56.00	-17.90	QP	
4		0.5641	18.30	9.67	27.97	46.00	-18.03	AVG	
5		0.9860	29.41	9.79	39.20	56.00	-16.80	QP	
6		0.9860	18.50	9.79	28.29	46.00	-17.71	AVG	
7		1.1540	28.94	9.80	38.74	56.00	-17.26	QP	
8		1.1540	17.60	9.80	27.40	46.00	-18.60	AVG	
9		1.3531	29.03	9.82	38.85	56.00	-17.15	QP	
10		1.3531	18.50	9.82	28.32	46.00	-17.68	AVG	
11		2.4312	27.64	9.87	37.51	56.00	-18.49	QP	
12		2.4312	15.10	9.87	24.97	46.00	-21.03	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Line

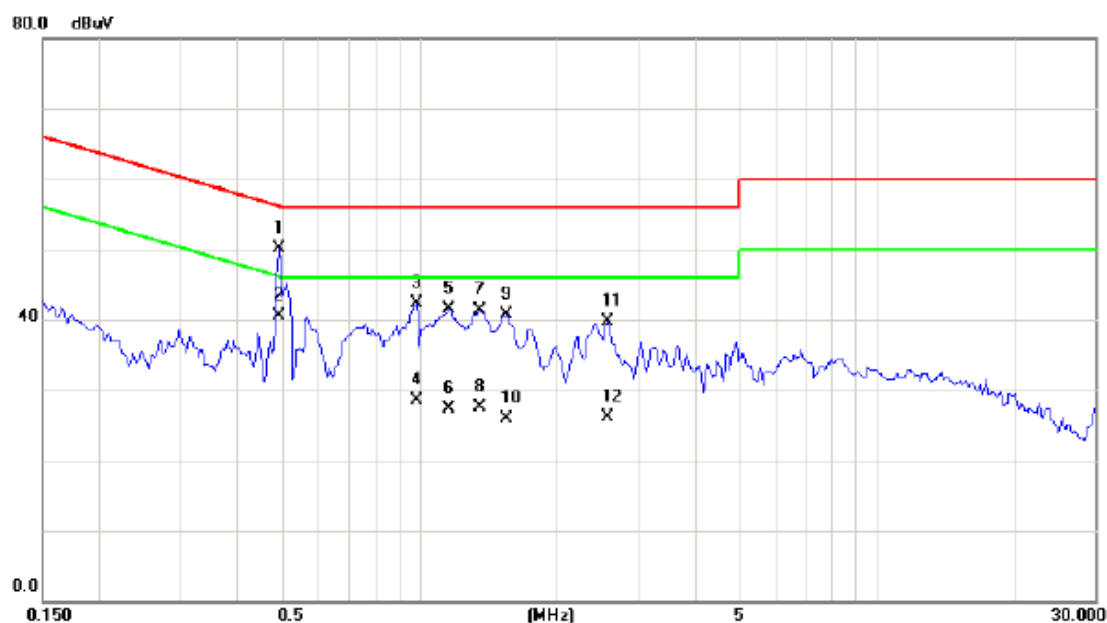

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4938	40.24	9.82	50.06	56.10	-6.04	QP	
2 *	0.4938	30.60	9.82	40.42	46.10	-5.68	AVG	
3	0.9860	32.29	9.98	42.27	56.00	-13.73	QP	
4	0.9860	18.60	9.98	28.58	46.00	-17.42	AVG	
5	1.1617	31.44	10.01	41.45	56.00	-14.55	QP	
6	1.1617	17.30	10.01	27.31	46.00	-18.69	AVG	
7	1.3570	31.27	9.97	41.24	56.00	-14.76	QP	
8	1.3570	17.50	9.97	27.47	46.00	-18.53	AVG	
9	1.5562	30.79	9.91	40.70	56.00	-15.30	QP	
10	1.5562	15.90	9.91	25.81	46.00	-20.19	AVG	
11	2.5720	29.87	9.93	39.80	56.00	-16.20	QP	
12	2.5720	16.10	9.93	26.03	46.00	-19.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Neutral

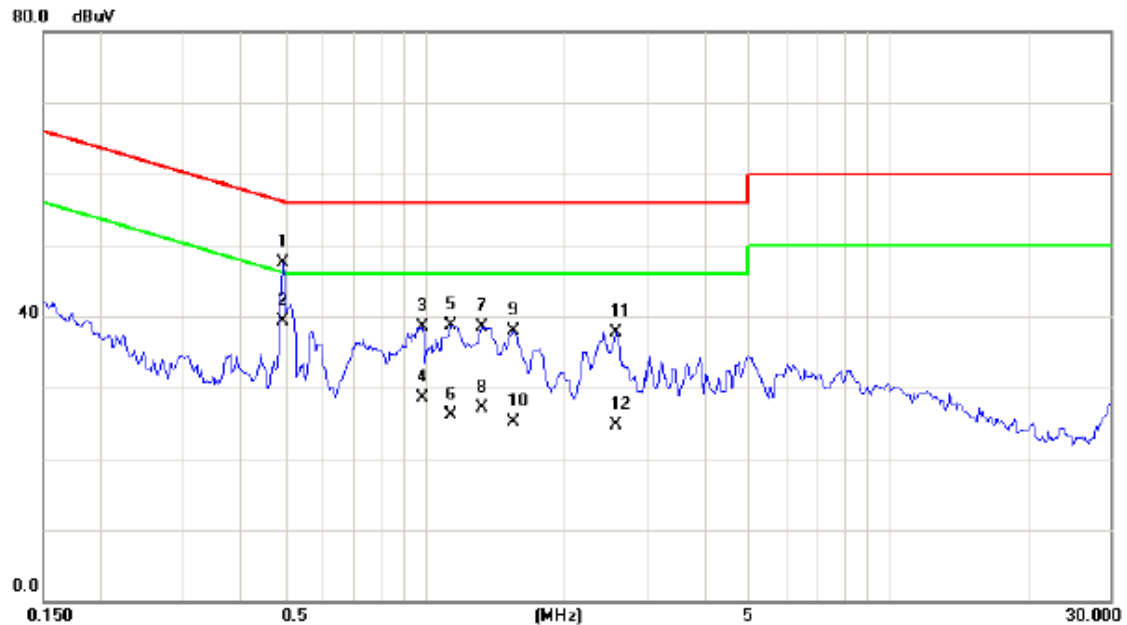

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4938	37.76	9.65	47.41	56.10	-8.69	QP	
2	*	0.4938	29.70	9.65	39.35	46.10	-6.75	AVG	
3		0.9860	28.67	9.79	38.46	56.00	-17.54	QP	
4		0.9860	18.70	9.79	28.49	46.00	-17.51	AVG	
5		1.1383	28.97	9.80	38.77	56.00	-17.23	QP	
6		1.1383	16.40	9.80	26.20	46.00	-19.80	AVG	
7		1.3297	28.64	9.81	38.45	56.00	-17.55	QP	
8		1.3297	17.30	9.81	27.11	46.00	-18.89	AVG	
9		1.5444	27.98	9.83	37.81	56.00	-18.19	QP	
10		1.5444	15.20	9.83	25.03	46.00	-20.97	AVG	
11		2.5680	27.81	9.86	37.67	56.00	-18.33	QP	
12		2.5680	14.90	9.86	24.76	46.00	-21.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Line

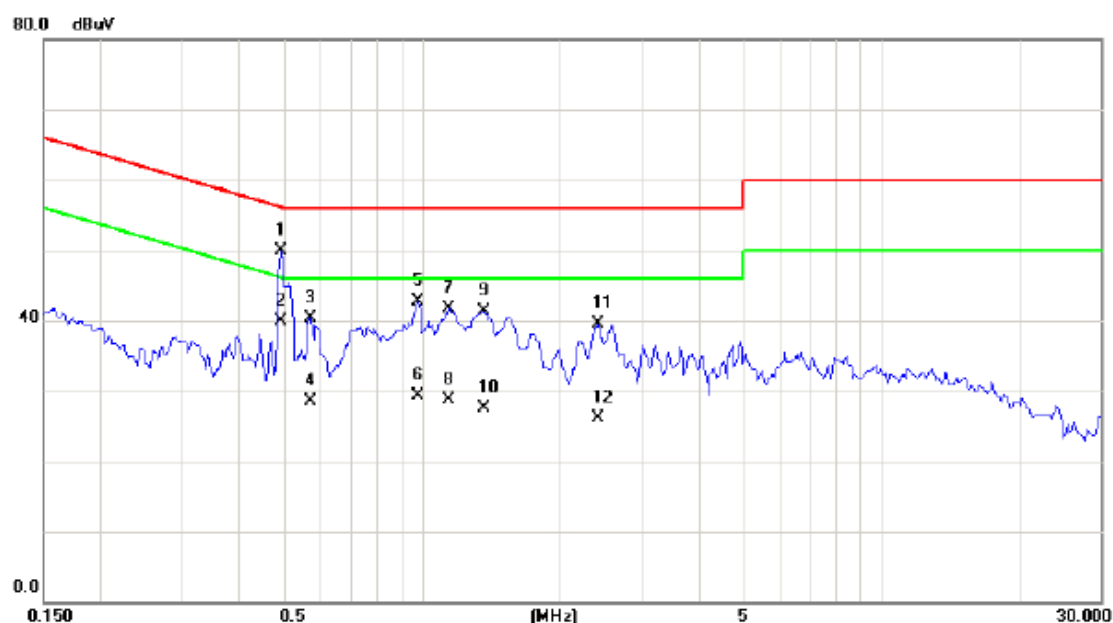

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4937	40.00	9.82	49.82	56.11	-6.29	QP	
2	*	0.4937	30.10	9.82	39.92	46.11	-6.19	AVG	
3		0.5718	30.55	9.84	40.39	56.00	-15.61	QP	
4		0.5718	18.70	9.84	28.54	46.00	-17.46	AVG	
5		0.9820	32.81	9.98	42.79	56.00	-13.21	QP	
6		0.9820	19.40	9.98	29.38	46.00	-16.62	AVG	
7		1.1460	31.69	10.01	41.70	56.00	-14.30	QP	
8		1.1460	18.60	10.01	28.61	46.00	-17.39	AVG	
9		1.3648	31.31	9.97	41.28	56.00	-14.72	QP	
10		1.3648	17.50	9.97	27.47	46.00	-18.53	AVG	
11		2.4195	29.49	9.93	39.42	56.00	-16.58	QP	
12		2.4195	16.10	9.93	26.03	46.00	-19.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Neutral

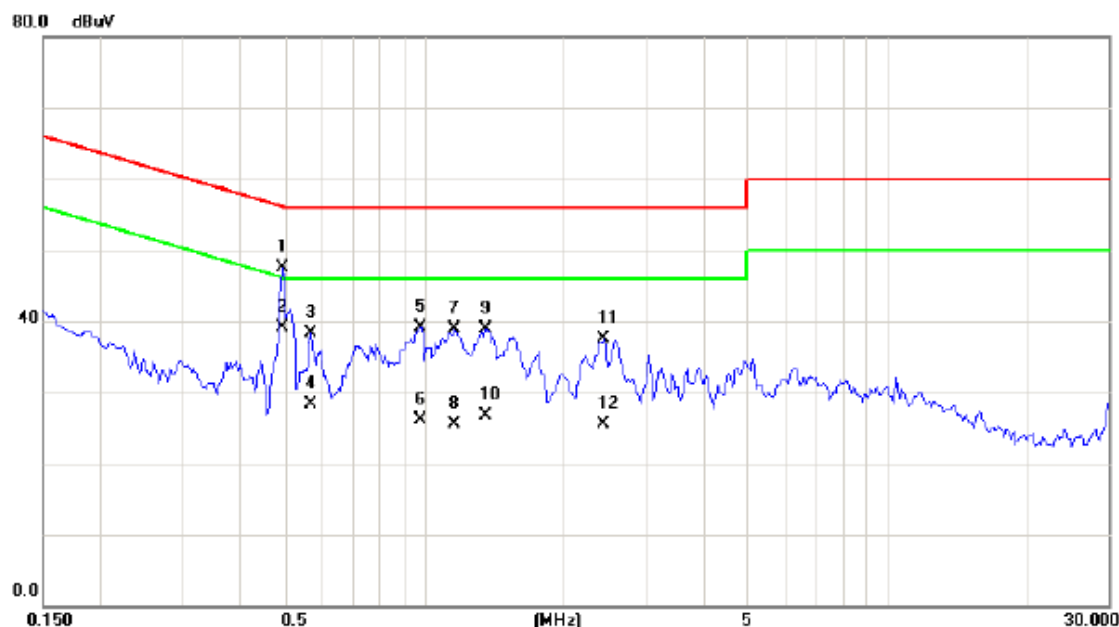

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.4938	37.80	9.65	47.45	56.10	-8.65	QP	
2	*	0.4938	29.40	9.65	39.05	46.10	-7.05	AVG	
3		0.5680	28.61	9.67	38.28	56.00	-17.72	QP	
4		0.5680	18.70	9.67	28.37	46.00	-17.63	AVG	
5		0.9820	29.39	9.79	39.18	56.00	-16.82	QP	
6		0.9820	16.40	9.79	26.19	46.00	-19.81	AVG	
7		1.1617	29.08	9.80	38.88	56.00	-17.12	QP	
8		1.1617	15.80	9.80	25.60	46.00	-20.40	AVG	
9		1.3570	29.17	9.82	38.99	56.00	-17.01	QP	
10		1.3570	16.90	9.82	26.72	46.00	-19.28	AVG	
11		2.4470	27.54	9.88	37.42	56.00	-18.58	QP	
12		2.4470	15.70	9.88	25.58	46.00	-20.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Line

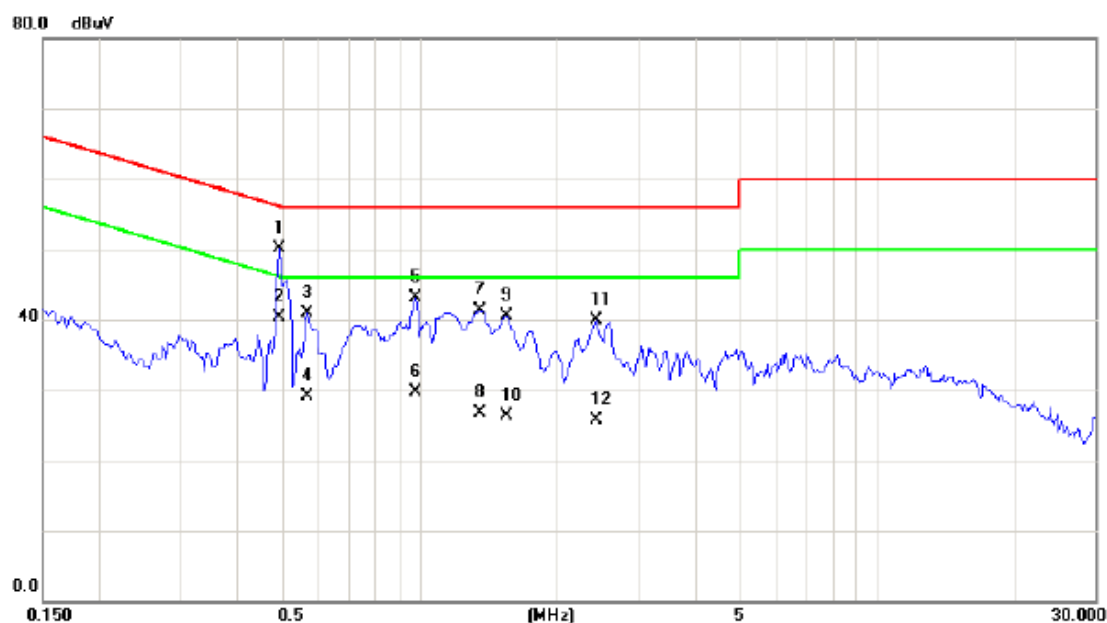

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.4938	40.28	9.82	50.10	56.10	-6.00	QP	
2	*	0.4938	30.50	9.82	40.32	46.10	-5.78	AVG	
3		0.5680	31.07	9.84	40.91	56.00	-15.09	QP	
4		0.5680	19.30	9.84	29.14	46.00	-16.86	AVG	
5		0.9820	33.11	9.98	43.09	56.00	-12.91	QP	
6		0.9820	19.70	9.98	29.68	46.00	-16.32	AVG	
7		1.3531	31.43	9.97	41.40	56.00	-14.60	QP	
8		1.3531	16.70	9.97	26.67	46.00	-19.33	AVG	
9		1.5562	30.51	9.91	40.42	56.00	-15.58	QP	
10		1.5562	16.40	9.91	26.31	46.00	-19.69	AVG	
11		2.4430	29.92	9.94	39.86	56.00	-16.14	QP	
12		2.4430	15.80	9.94	25.74	46.00	-20.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Neutral

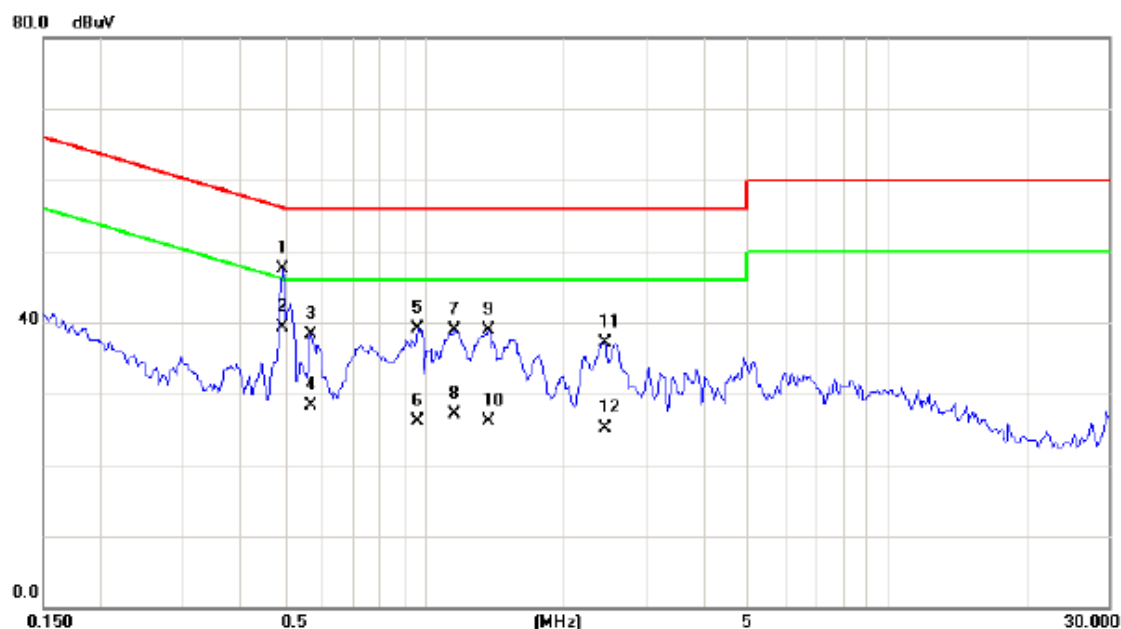

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.4937	37.90	9.65	47.55	56.11	-8.56	QP	
2	*	0.4937	29.70	9.65	39.35	46.11	-6.76	AVG	
3		0.5680	28.57	9.67	38.24	56.00	-17.76	QP	
4		0.5680	18.70	9.67	28.37	46.00	-17.63	AVG	
5		0.9664	29.39	9.77	39.16	56.00	-16.84	QP	
6		0.9664	16.40	9.77	26.17	46.00	-19.83	AVG	
7		1.1617	29.12	9.80	38.92	56.00	-17.08	QP	
8		1.1617	17.30	9.80	27.10	46.00	-18.90	AVG	
9		1.3804	29.05	9.82	38.87	56.00	-17.13	QP	
10		1.3804	16.20	9.82	26.02	46.00	-19.98	AVG	
11		2.4546	27.28	9.88	37.16	56.00	-18.84	QP	
12		2.4546	15.30	9.88	25.18	46.00	-20.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Line

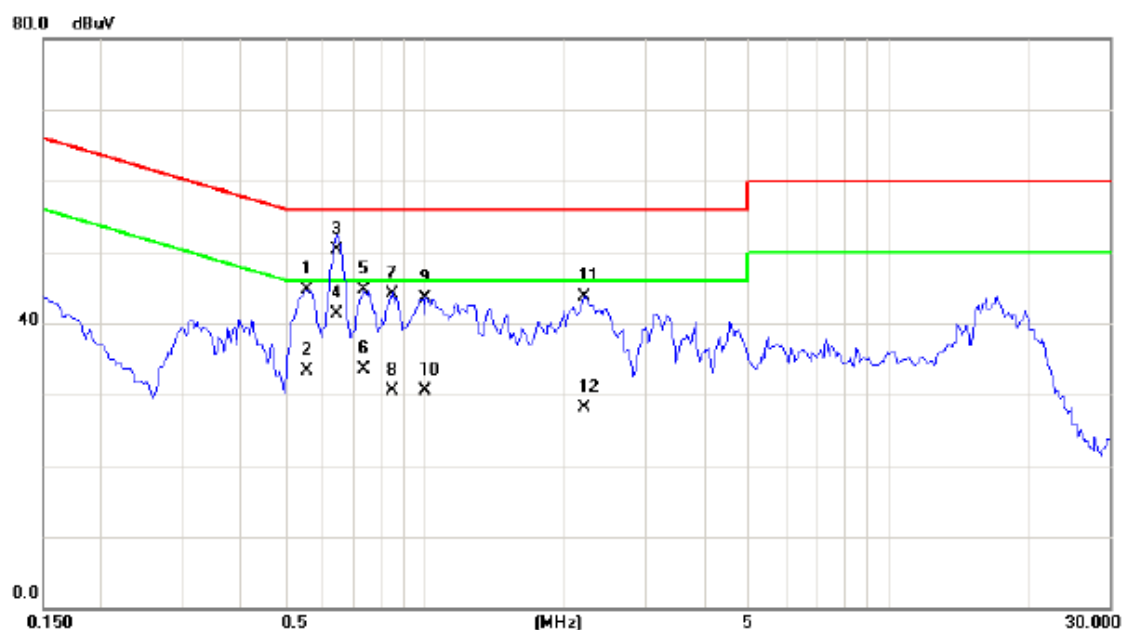

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.5563	34.87	9.84	44.71	56.00	-11.29	QP	
2		0.5563	23.40	9.84	33.24	46.00	-12.76	AVG	
3		0.6461	40.40	9.87	50.27	56.00	-5.73	QP	
4	*	0.6461	31.40	9.87	41.27	46.00	-4.73	AVG	
5		0.7360	34.75	9.91	44.66	56.00	-11.34	QP	
6		0.7360	23.60	9.91	33.51	46.00	-12.49	AVG	
7		0.8492	34.26	9.94	44.20	56.00	-11.80	QP	
8		0.8492	20.60	9.94	30.54	46.00	-15.46	AVG	
9		1.0016	33.62	9.98	43.60	56.00	-12.40	QP	
10		1.0016	20.50	9.98	30.48	46.00	-15.52	AVG	
11		2.2125	33.79	9.90	43.69	56.00	-12.31	QP	
12		2.2125	18.30	9.90	28.20	46.00	-17.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Neutral

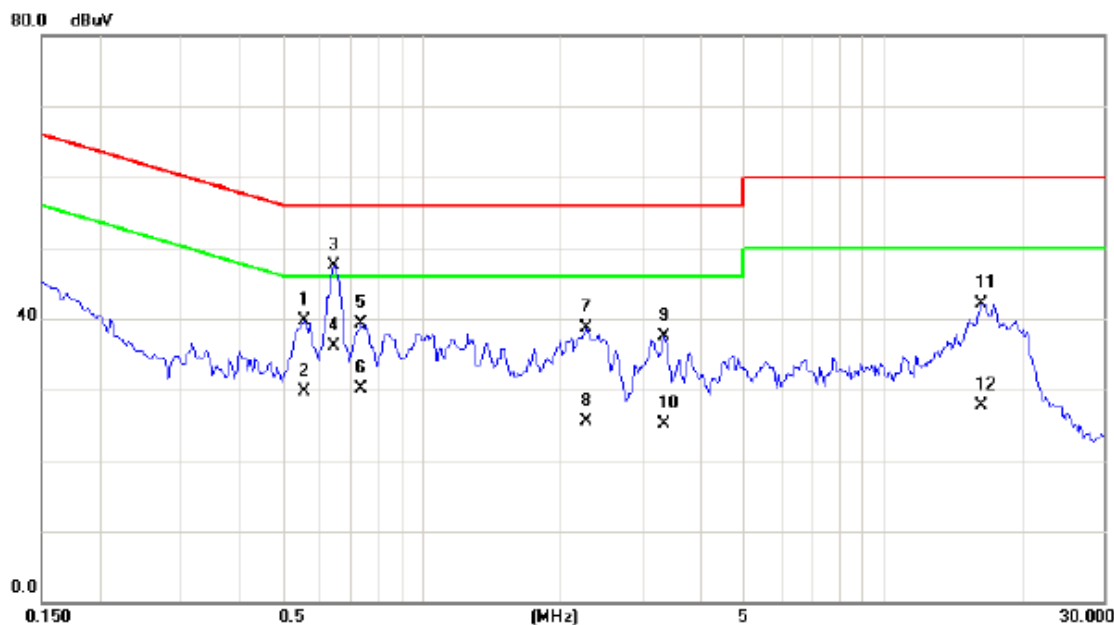

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5563	29.97	9.67	39.64	56.00	-16.36	QP	
2		0.5563	20.10	9.67	29.77	46.00	-16.23	AVG	
3	*	0.6461	37.88	9.68	47.56	56.00	-8.44	QP	
4		0.6461	26.40	9.68	36.08	46.00	-9.92	AVG	
5		0.7360	29.69	9.71	39.40	56.00	-16.60	QP	
6		0.7360	20.30	9.71	30.01	46.00	-15.99	AVG	
7		2.2711	28.84	9.90	38.74	56.00	-17.26	QP	
8		2.2711	15.60	9.90	25.50	46.00	-20.50	AVG	
9		3.3516	27.61	9.86	37.47	56.00	-18.53	QP	
10		3.3516	15.30	9.86	25.16	46.00	-20.84	AVG	
11		16.3750	31.92	10.27	42.19	60.00	-17.81	QP	
12		16.3750	17.50	10.27	27.77	50.00	-22.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Line

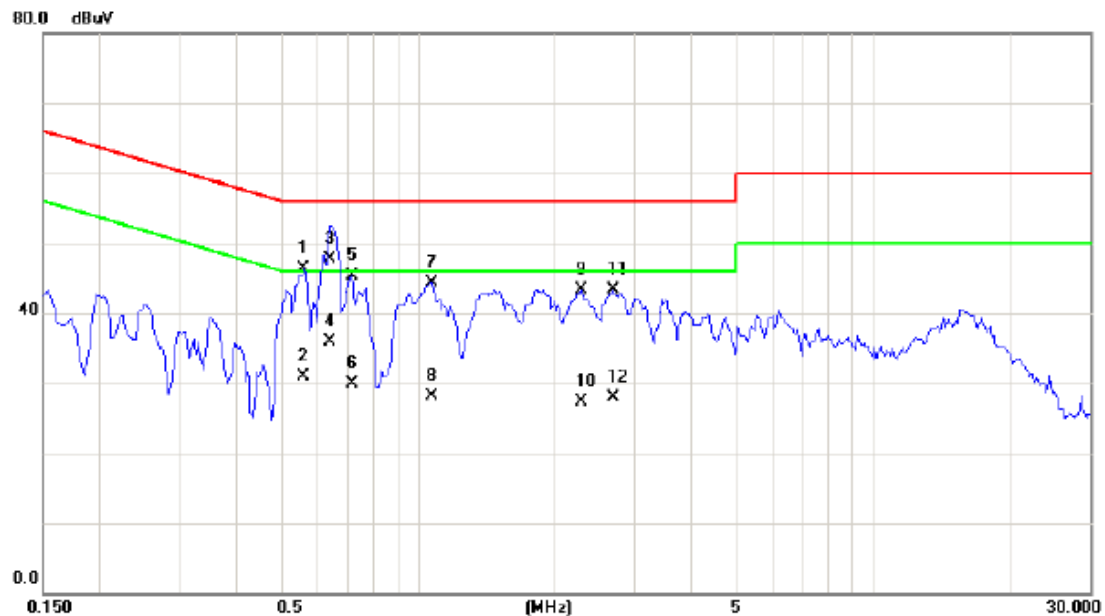

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.5641	36.37	9.84	46.21	56.00	-9.79	QP	
2		0.5641	21.10	9.84	30.94	46.00	-15.06	AVG	
3	*	0.6422	37.90	9.87	47.77	56.00	-8.23	QP	
4		0.6422	26.10	9.87	35.97	46.00	-10.03	AVG	
5		0.7164	35.45	9.91	45.36	56.00	-10.64	QP	
6		0.7164	19.90	9.91	29.81	46.00	-16.19	AVG	
7		1.0720	34.35	9.99	44.34	56.00	-11.66	QP	
8		1.0720	18.10	9.99	28.09	46.00	-17.91	AVG	
9		2.2945	33.46	9.92	43.38	56.00	-12.62	QP	
10		2.2945	17.30	9.92	27.22	46.00	-18.78	AVG	
11		2.6852	33.50	9.90	43.40	56.00	-12.60	QP	
12		2.6852	18.10	9.90	28.00	46.00	-18.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Neutral

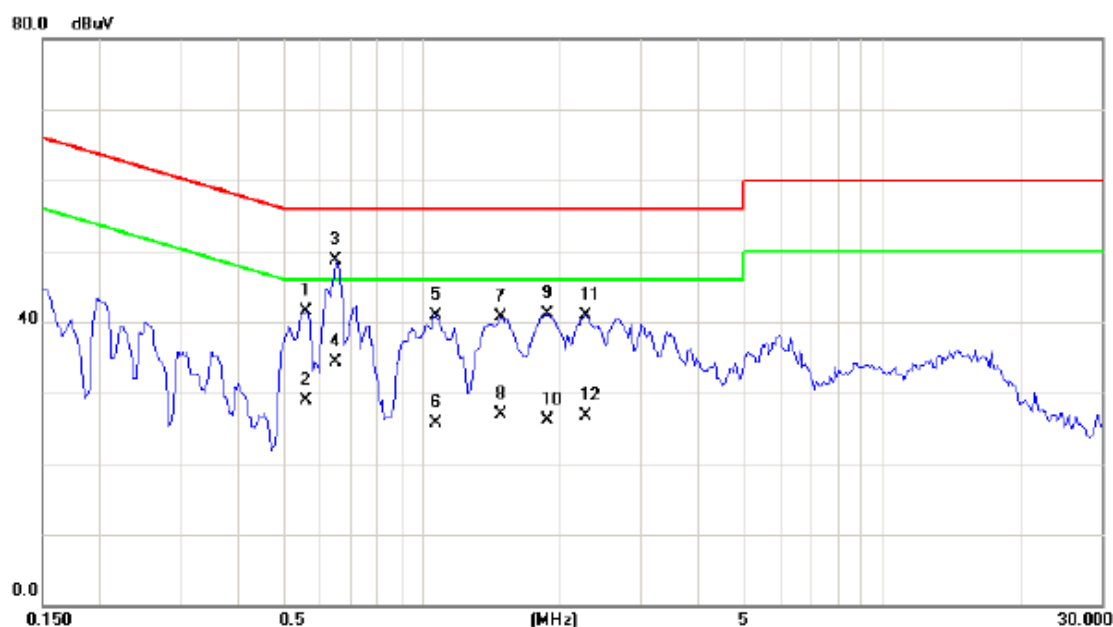

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.5602	31.87	9.67	41.54	56.00	-14.46	QP	
2		0.5602	19.30	9.67	28.97	46.00	-17.03	AVG	
3	*	0.6500	38.99	9.69	48.68	56.00	-7.32	QP	
4		0.6500	24.60	9.69	34.29	46.00	-11.71	AVG	
5		1.0720	31.21	9.79	41.00	56.00	-15.00	QP	
6		1.0720	15.90	9.79	25.69	46.00	-20.31	AVG	
7		1.4937	30.82	9.82	40.64	56.00	-15.36	QP	
8		1.4937	17.10	9.82	26.92	46.00	-19.08	AVG	
9		1.8805	31.10	9.91	41.01	56.00	-14.99	QP	
10		1.8805	16.20	9.91	26.11	46.00	-19.89	AVG	
11		2.2672	30.98	9.90	40.88	56.00	-15.12	QP	
12		2.2672	16.90	9.90	26.80	46.00	-19.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Line

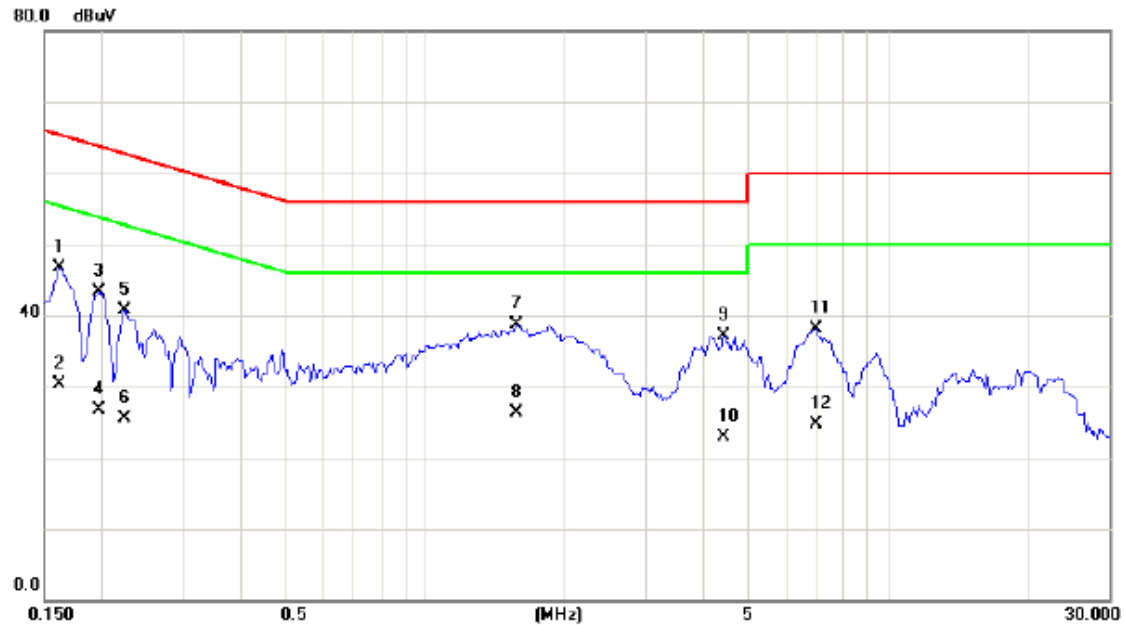

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1617	36.96	9.68	46.64	65.38	-18.74	QP	
2		0.1617	20.70	9.68	30.38	55.38	-25.00	AVG	
3		0.1970	33.64	9.71	43.35	63.74	-20.39	QP	
4		0.1970	16.90	9.71	26.61	53.74	-27.13	AVG	
5		0.2242	31.06	9.72	40.78	62.66	-21.88	QP	
6		0.2242	15.80	9.72	25.52	52.66	-27.14	AVG	
7	*	1.5758	28.82	9.91	38.73	56.00	-17.27	QP	
8		1.5758	16.40	9.91	26.31	46.00	-19.69	AVG	
9		4.4220	27.66	9.48	37.14	56.00	-18.86	QP	
10		4.4220	13.50	9.48	22.98	46.00	-23.02	AVG	
11		6.9531	28.13	9.95	38.08	60.00	-21.92	QP	
12		6.9531	14.70	9.95	24.65	50.00	-25.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Neutral

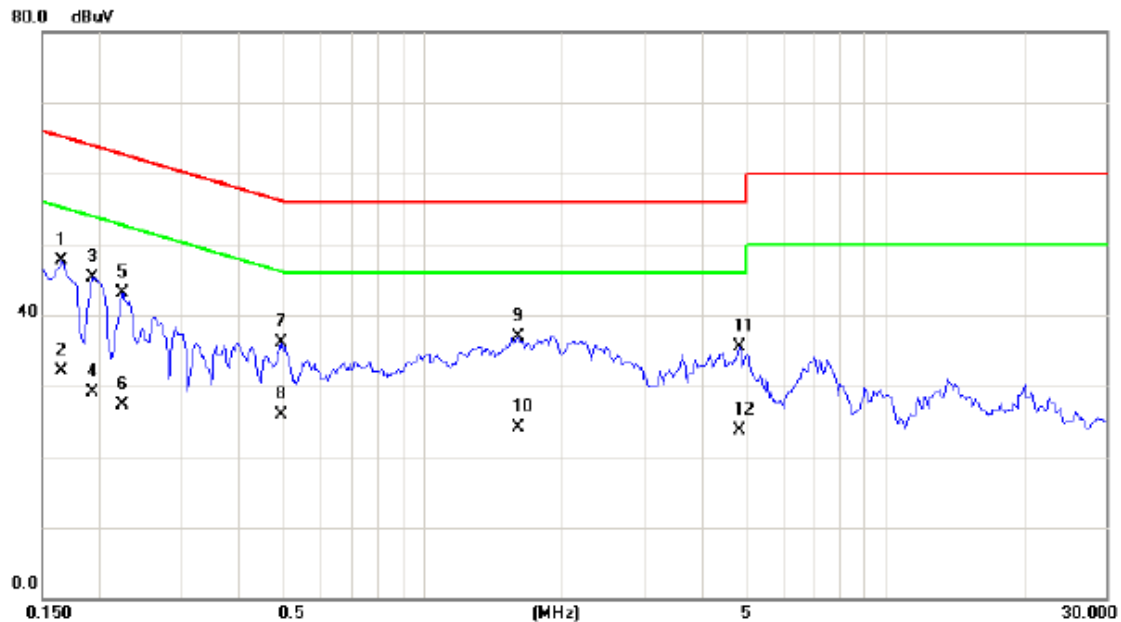

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1655	38.04	9.60	47.64	65.18	-17.54	QP	
2		0.1655	22.60	9.60	32.20	55.18	-22.98	AVG	
3		0.1930	35.66	9.61	45.27	63.91	-18.64	QP	
4		0.1930	19.40	9.61	29.01	53.91	-24.90	AVG	
5		0.2242	33.48	9.61	43.09	62.66	-19.57	QP	
6		0.2242	17.60	9.61	27.21	52.66	-25.45	AVG	
7		0.4938	26.46	9.65	36.11	56.10	-19.99	QP	
8		0.4938	16.20	9.65	25.85	46.10	-20.25	AVG	
9		1.6031	27.16	9.84	37.00	56.00	-19.00	QP	
10		1.6031	14.20	9.84	24.04	46.00	-21.96	AVG	
11		4.8358	25.50	10.08	35.58	56.00	-20.42	QP	
12		4.8358	13.70	10.08	23.78	46.00	-22.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Line

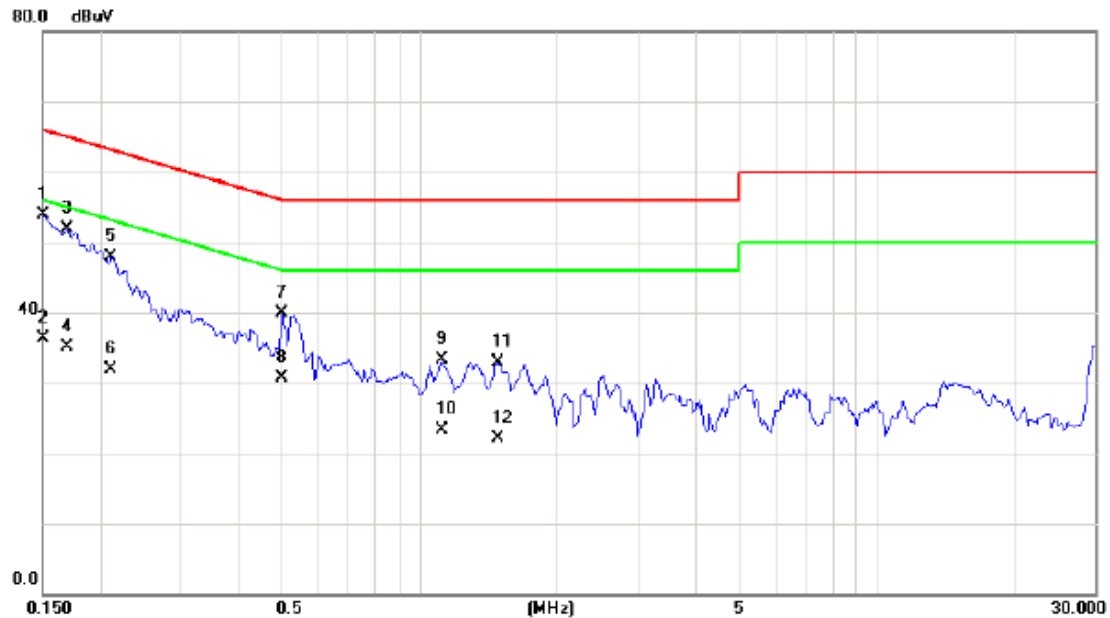

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	44.29	9.68	53.97	66.00	-12.03	QP	
2		0.1500	26.70	9.68	36.38	56.00	-19.62	AVG	
3		0.1695	42.16	9.69	51.85	64.98	-13.13	QP	
4		0.1695	25.40	9.69	35.09	54.98	-19.89	AVG	
5		0.2125	38.10	9.71	47.81	63.11	-15.30	QP	
6		0.2125	22.10	9.71	31.81	53.11	-21.30	AVG	
7		0.5016	30.03	9.82	39.85	56.00	-16.15	QP	
8		0.5016	20.90	9.82	30.72	46.00	-15.28	AVG	
9		1.1187	23.39	10.00	33.39	56.00	-22.61	QP	
10		1.1187	13.40	10.00	23.40	46.00	-22.60	AVG	
11		1.4898	22.98	9.92	32.90	56.00	-23.10	QP	
12		1.4898	12.10	9.92	22.02	46.00	-23.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Neutral

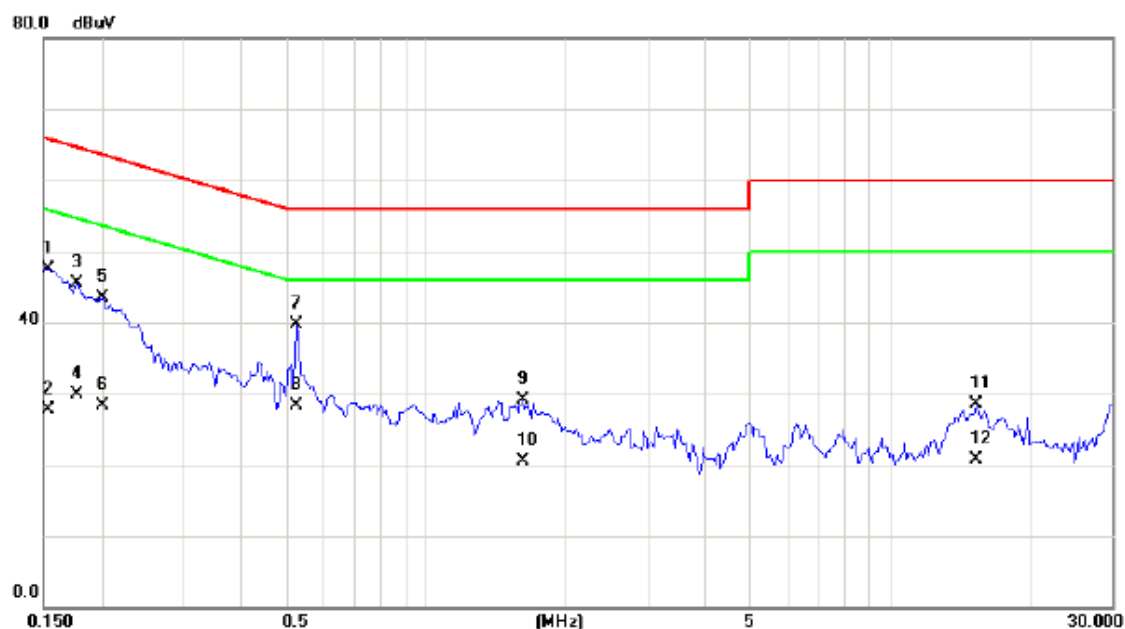

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	37.98	9.59	47.57	65.78	-18.21	QP	
2		0.1540	18.10	9.59	27.69	55.78	-28.09	AVG	
3		0.1773	35.82	9.60	45.42	64.61	-19.19	QP	
4		0.1773	20.30	9.60	29.90	54.61	-24.71	AVG	
5		0.2008	33.92	9.61	43.53	63.58	-20.05	QP	
6		0.2008	18.70	9.61	28.31	53.58	-25.27	AVG	
7	*	0.5250	30.05	9.65	39.70	56.00	-16.30	QP	
8		0.5250	18.70	9.65	28.35	46.00	-17.65	AVG	
9		1.6227	19.17	9.84	29.01	56.00	-26.99	QP	
10		1.6227	10.60	9.84	20.44	46.00	-25.56	AVG	
11		15.2695	18.32	10.27	28.59	60.00	-31.41	QP	
12		15.2695	10.50	10.27	20.77	50.00	-29.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Line

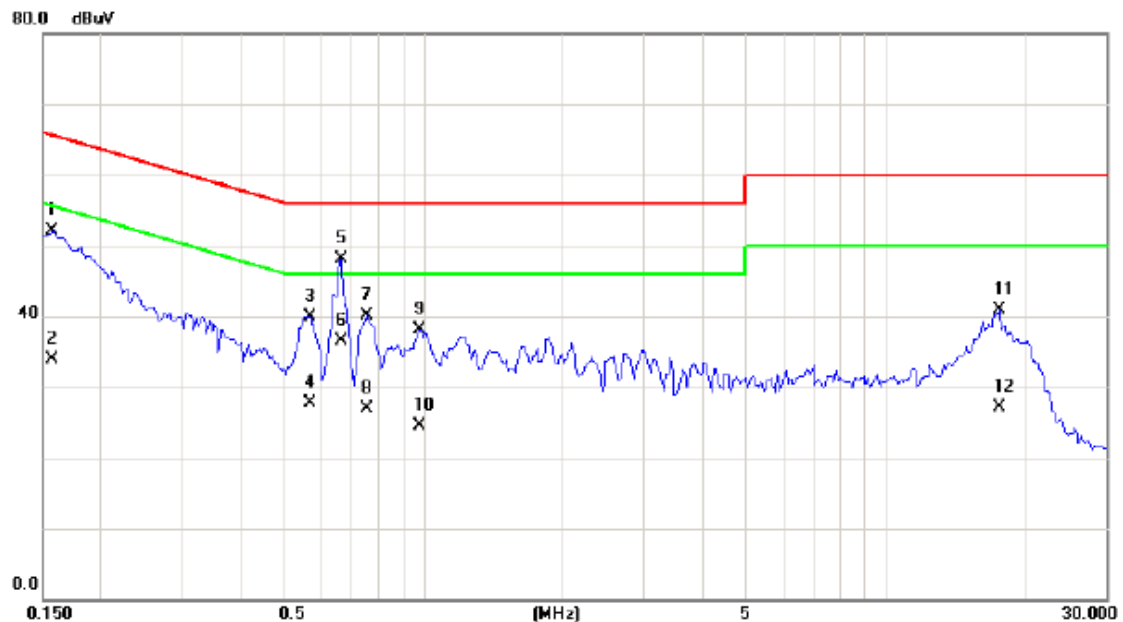

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1578	42.44	9.68	52.12	65.58	-13.46	QP	
2		0.1578	24.30	9.68	33.98	55.58	-21.60	AVG	
3		0.5680	30.13	9.84	39.97	56.00	-16.03	QP	
4		0.5680	17.80	9.84	27.64	46.00	-18.36	AVG	
5	*	0.6617	38.30	9.89	48.19	56.00	-7.81	QP	
6		0.6617	26.70	9.89	36.59	46.00	-9.41	AVG	
7		0.7516	30.23	9.92	40.15	56.00	-15.85	QP	
8		0.7516	16.90	9.92	26.82	46.00	-19.18	AVG	
9		0.9820	28.10	9.98	38.08	56.00	-17.92	QP	
10		0.9820	14.60	9.98	24.58	46.00	-21.42	AVG	
11		17.6445	30.65	10.33	40.98	60.00	-19.02	QP	
12		17.6445	16.70	10.33	27.03	50.00	-22.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Neutral

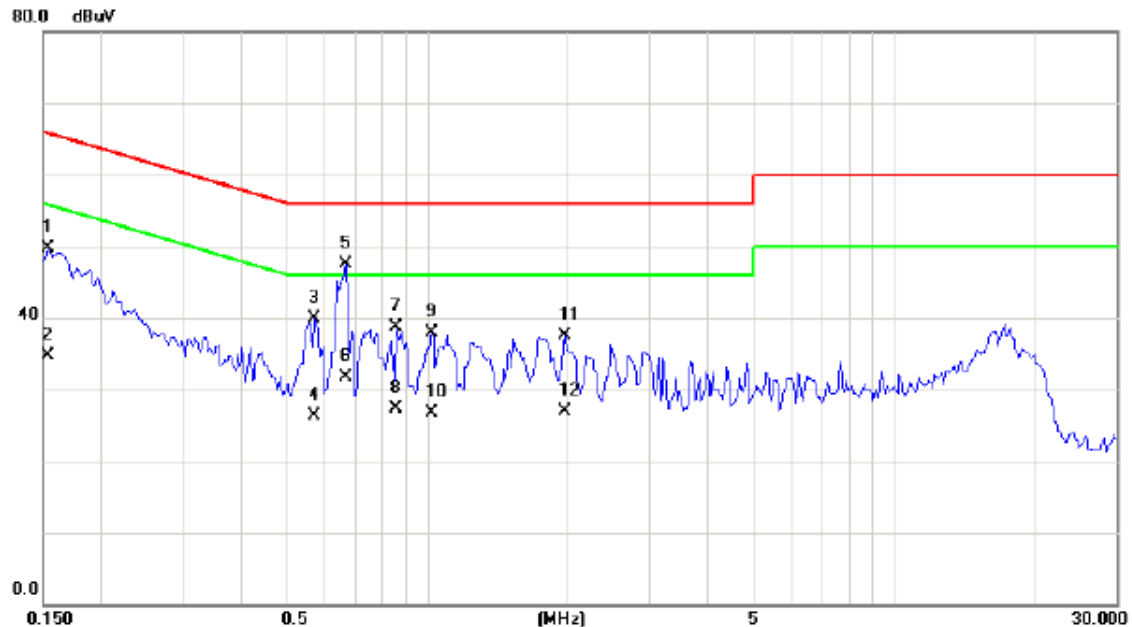

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	40.04	9.59	49.63	65.78	-16.15	QP	
2		0.1540	25.10	9.59	34.69	55.78	-21.09	AVG	
3		0.5720	30.33	9.67	40.00	56.00	-16.00	QP	
4		0.5720	16.70	9.67	26.37	46.00	-19.63	AVG	
5	*	0.6695	37.74	9.69	47.43	56.00	-8.57	QP	
6		0.6695	22.10	9.69	31.79	46.00	-14.21	AVG	
7		0.8570	28.90	9.74	38.64	56.00	-17.36	QP	
8		0.8570	17.60	9.74	27.34	46.00	-18.66	AVG	
9		1.0211	28.11	9.79	37.90	56.00	-18.10	QP	
10		1.0211	16.90	9.79	26.69	46.00	-19.31	AVG	
11		1.9742	27.57	9.92	37.49	56.00	-18.51	QP	
12		1.9742	16.90	9.92	26.82	46.00	-19.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Line

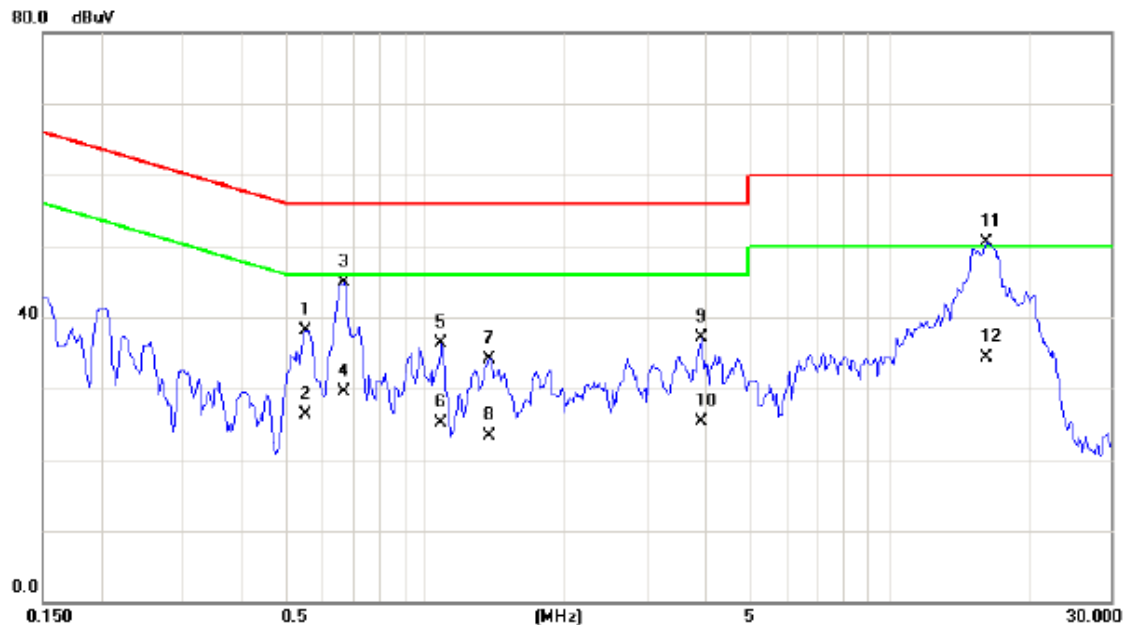

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5523	28.25	9.84	38.09	56.00	-17.91	QP	
2		0.5523	16.40	9.84	26.24	46.00	-19.76	AVG	
3		0.6695	34.92	9.89	44.81	56.00	-11.19	QP	
4		0.6695	19.70	9.89	29.59	46.00	-16.41	AVG	
5		1.0836	26.40	10.00	36.40	56.00	-19.60	QP	
6		1.0836	15.10	10.00	25.10	46.00	-20.90	AVG	
7		1.3805	24.16	9.96	34.12	56.00	-21.88	QP	
8		1.3805	13.40	9.96	23.36	46.00	-22.64	AVG	
9		3.9375	27.20	9.87	37.07	56.00	-18.93	QP	
10		3.9375	15.40	9.87	25.27	46.00	-20.73	AVG	
11	*	16.2030	40.24	10.31	50.55	60.00	-9.45	QP	
12		16.2030	23.90	10.31	34.21	50.00	-15.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Neutral

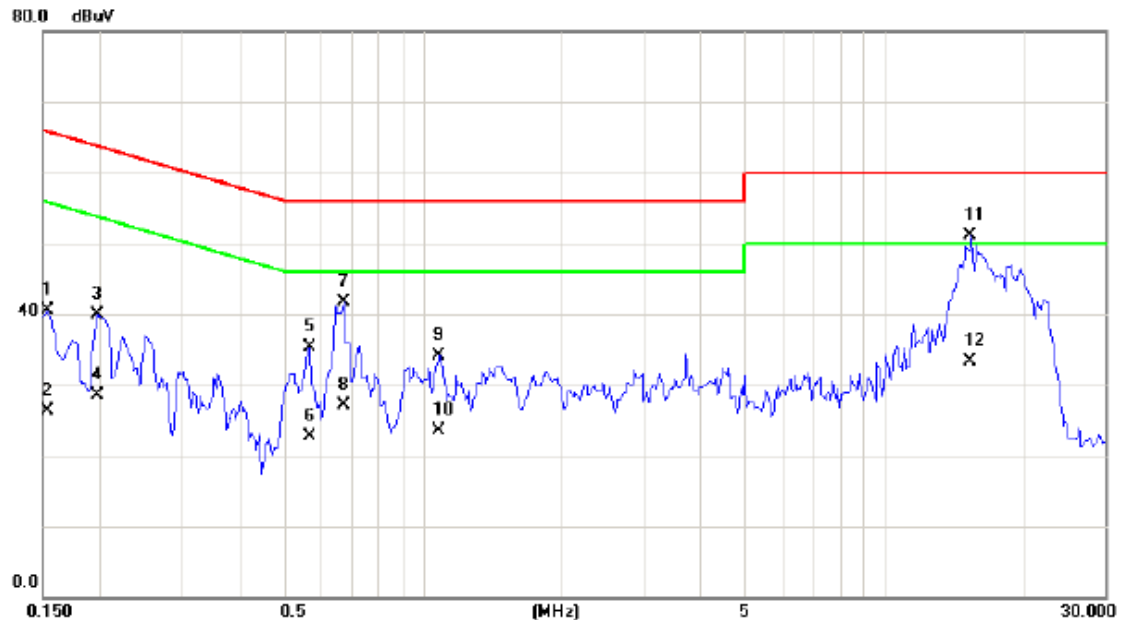

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1540	30.98	9.59	40.57	65.78	-25.21	QP	
2		0.1540	16.70	9.59	26.29	55.78	-29.49	AVG	
3		0.1970	30.32	9.61	39.93	63.74	-23.81	QP	
4		0.1970	18.90	9.61	28.51	53.74	-25.23	AVG	
5		0.5680	25.54	9.67	35.21	56.00	-20.79	QP	
6		0.5680	13.10	9.67	22.77	46.00	-23.23	AVG	
7		0.6734	31.96	9.69	41.65	56.00	-14.35	QP	
8		0.6734	17.50	9.69	27.19	46.00	-18.81	AVG	
9		1.0875	24.36	9.79	34.15	56.00	-21.85	QP	
10		1.0875	13.70	9.79	23.49	46.00	-22.51	AVG	
11	*	15.3633	40.88	10.27	51.15	60.00	-8.85	QP	
12		15.3633	23.10	10.27	33.37	50.00	-16.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)

Line

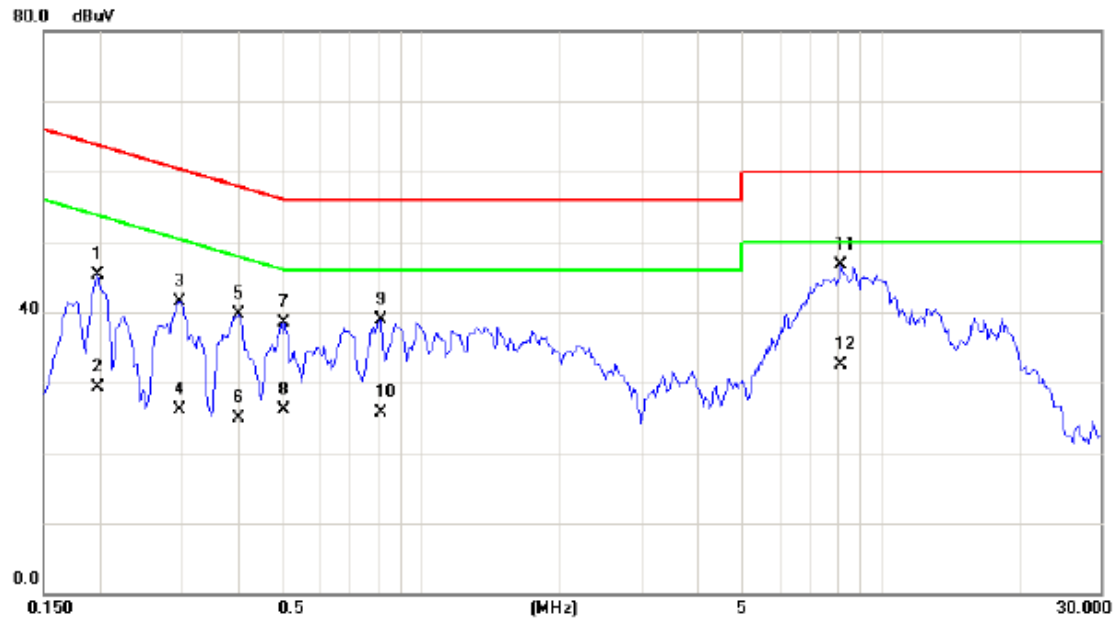

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1970	35.66	9.71	45.37	63.74	-18.37	QP	
2		0.1970	19.60	9.71	29.31	53.74	-24.43	AVG	
3		0.2983	31.82	9.76	41.58	60.29	-18.71	QP	
4		0.2983	16.40	9.76	26.16	50.29	-24.13	AVG	
5		0.4000	29.88	9.81	39.69	57.85	-18.16	QP	
6		0.4000	15.10	9.81	24.91	47.85	-22.94	AVG	
7		0.5016	28.59	9.82	38.41	56.00	-17.59	QP	
8		0.5016	16.30	9.82	26.12	46.00	-19.88	AVG	
9		0.8141	28.98	9.93	38.91	56.00	-17.09	QP	
10		0.8141	15.70	9.93	25.63	46.00	-20.37	AVG	
11	*	8.1522	36.75	10.00	46.75	60.00	-13.25	QP	
12		8.1522	22.60	10.00	32.60	50.00	-17.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Neutral



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1930	35.54	9.61	45.15	63.91	-18.76	QP	
2		0.1930	19.60	9.61	29.21	53.91	-24.70	AVG	
3		0.2945	32.44	9.63	42.07	60.40	-18.33	QP	
4		0.2945	16.40	9.63	26.03	50.40	-24.37	AVG	
5		0.4040	30.68	9.63	40.31	57.77	-17.46	QP	
6		0.4040	15.80	9.63	25.43	47.77	-22.34	AVG	
7	*	0.6852	30.92	9.69	40.61	56.00	-15.39	QP	
8		0.6852	16.30	9.69	25.99	46.00	-20.01	AVG	
9		1.1578	30.28	9.80	40.08	56.00	-15.92	QP	
10		1.1578	16.90	9.80	26.70	46.00	-19.30	AVG	
11		9.4141	34.44	10.07	44.51	60.00	-15.49	QP	
12		9.4141	20.10	10.07	30.17	50.00	-19.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Line

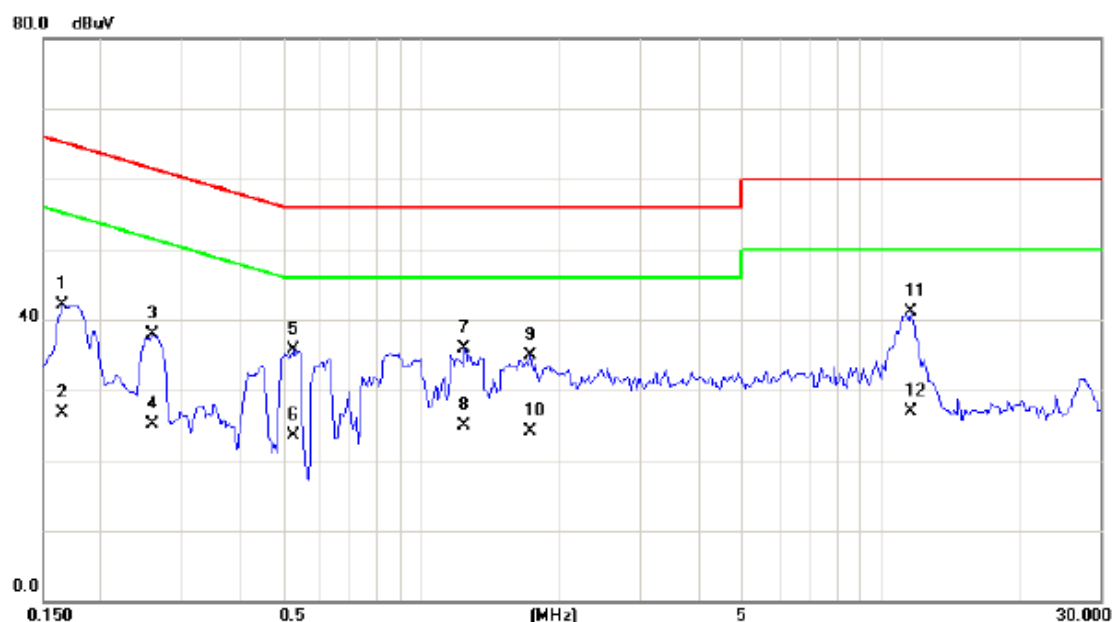

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1655	32.44	9.69	42.13	65.18	-23.05	QP	
2		0.1655	17.10	9.69	26.79	55.18	-28.39	AVG	
3		0.2593	28.16	9.74	37.90	61.45	-23.55	QP	
4		0.2593	15.40	9.74	25.14	51.45	-26.31	AVG	
5		0.5250	25.90	9.83	35.73	56.00	-20.27	QP	
6		0.5250	13.60	9.83	23.43	46.00	-22.57	AVG	
7		1.2398	25.95	10.01	35.96	56.00	-20.04	QP	
8		1.2398	14.80	10.01	24.81	46.00	-21.19	AVG	
9		1.7242	25.06	9.89	34.95	56.00	-21.05	QP	
10		1.7242	14.20	9.89	24.09	46.00	-21.91	AVG	
11	*	11.5897	30.93	10.12	41.05	60.00	-18.95	QP	
12		11.5897	16.70	10.12	26.82	50.00	-23.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Neutral

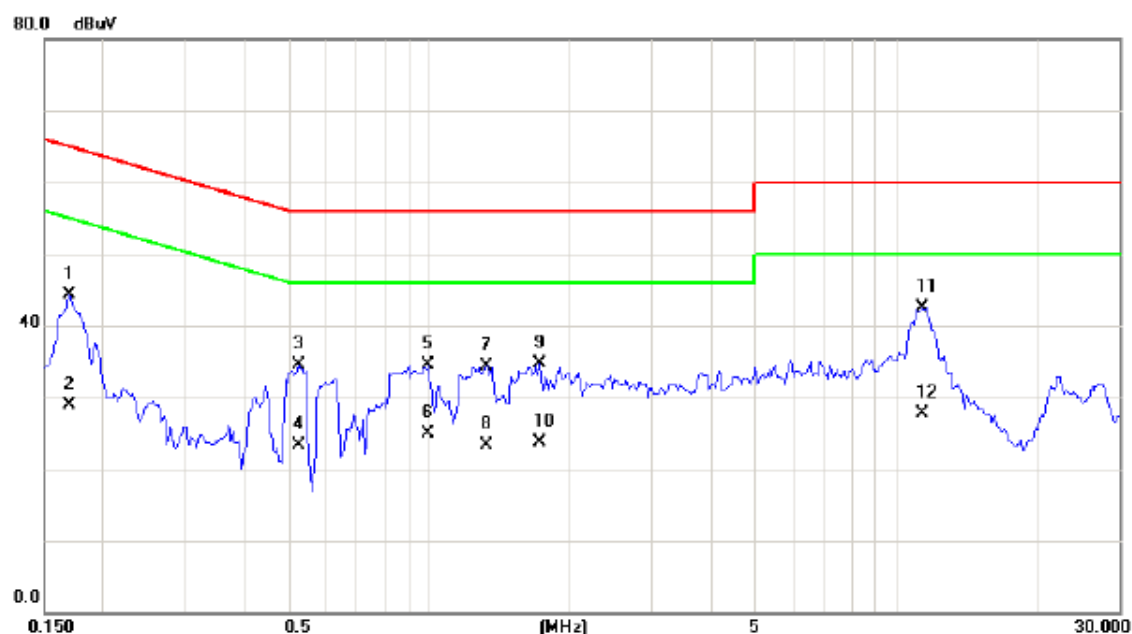


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1695	34.78	9.60	44.38	64.98	-20.60	QP	
2		0.1695	19.40	9.60	29.00	54.98	-25.98	AVG	
3		0.5250	24.79	9.65	34.44	56.00	-21.56	QP	
4		0.5250	13.60	9.65	23.25	46.00	-22.75	AVG	
5		0.9976	24.79	9.79	34.58	56.00	-21.42	QP	
6		0.9976	15.10	9.79	24.89	46.00	-21.11	AVG	
7		1.3296	24.54	9.81	34.35	56.00	-21.65	QP	
8		1.3296	13.40	9.81	23.21	46.00	-22.79	AVG	
9		1.7242	24.90	9.86	34.76	56.00	-21.24	QP	
10		1.7242	13.80	9.86	23.66	46.00	-22.34	AVG	
11	*	11.3281	32.38	10.10	42.48	60.00	-17.52	QP	
12		11.3281	17.60	10.10	27.70	50.00	-22.30	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD

Vertical

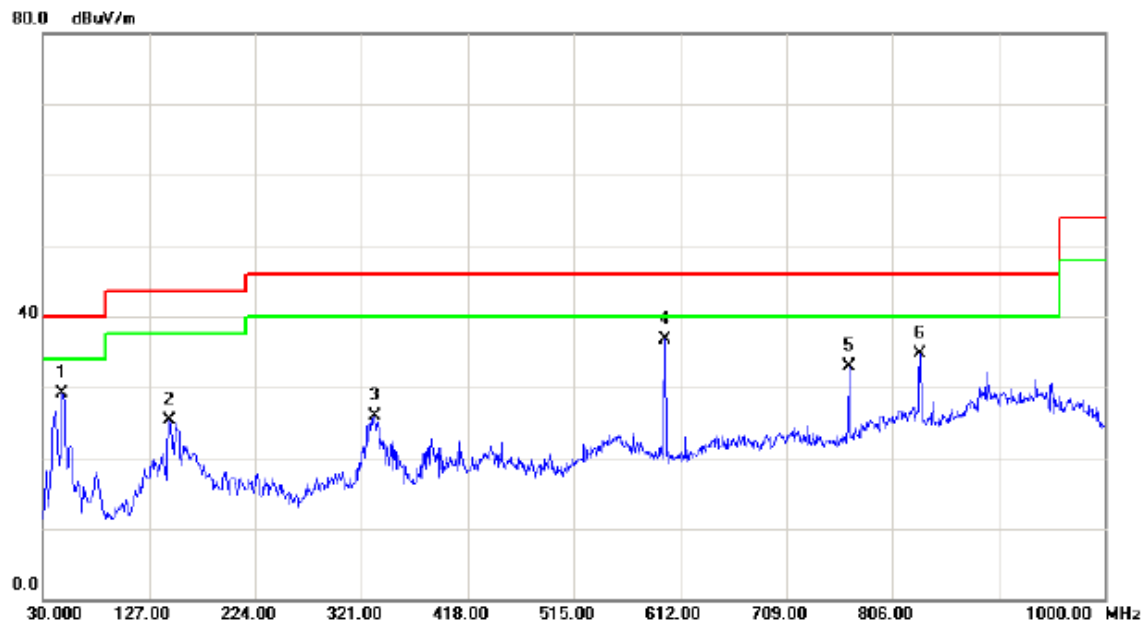

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		47.4600	42.76	-13.69	29.07	40.00	-10.93	QP	
2		145.4300	39.49	-14.22	25.27	43.50	-18.23	QP	
3		332.6400	38.45	-12.64	25.81	46.00	-20.19	QP	
4	*	598.4200	44.21	-7.48	36.73	46.00	-9.27	QP	
5		766.2300	37.87	-4.93	32.94	46.00	-13.06	QP	
6		831.2200	38.81	-4.18	34.63	46.00	-11.37	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	35.90	-13.69	22.21	40.00	-17.79	QP	
2		168.7100	37.74	-14.36	23.38	43.50	-20.12	QP	
3		241.4600	40.10	-15.24	24.86	46.00	-21.14	QP	
4		330.7000	44.12	-12.68	31.44	46.00	-14.56	QP	
5		552.8300	35.95	-7.95	28.00	46.00	-18.00	QP	
6	*	767.2000	36.50	-4.91	31.59	46.00	-14.41	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Vertical

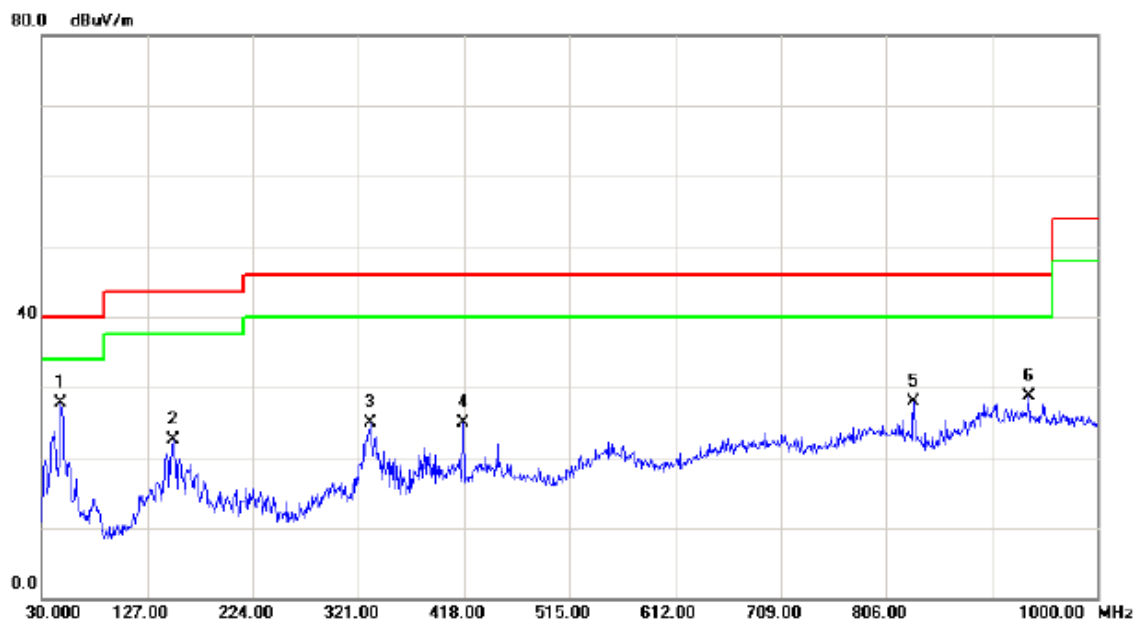

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	41.41	-13.69	27.72	40.00	-12.28	QP	
2		150.2800	36.61	-14.04	22.57	43.50	-20.93	QP	
3		331.6700	37.59	-12.65	24.94	46.00	-21.06	QP	
4		417.0300	35.53	-10.61	24.92	46.00	-21.08	QP	
5		831.2200	32.18	-4.18	28.00	46.00	-18.00	QP	
6		936.9500	30.75	-2.03	28.72	46.00	-17.28	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Horizontal

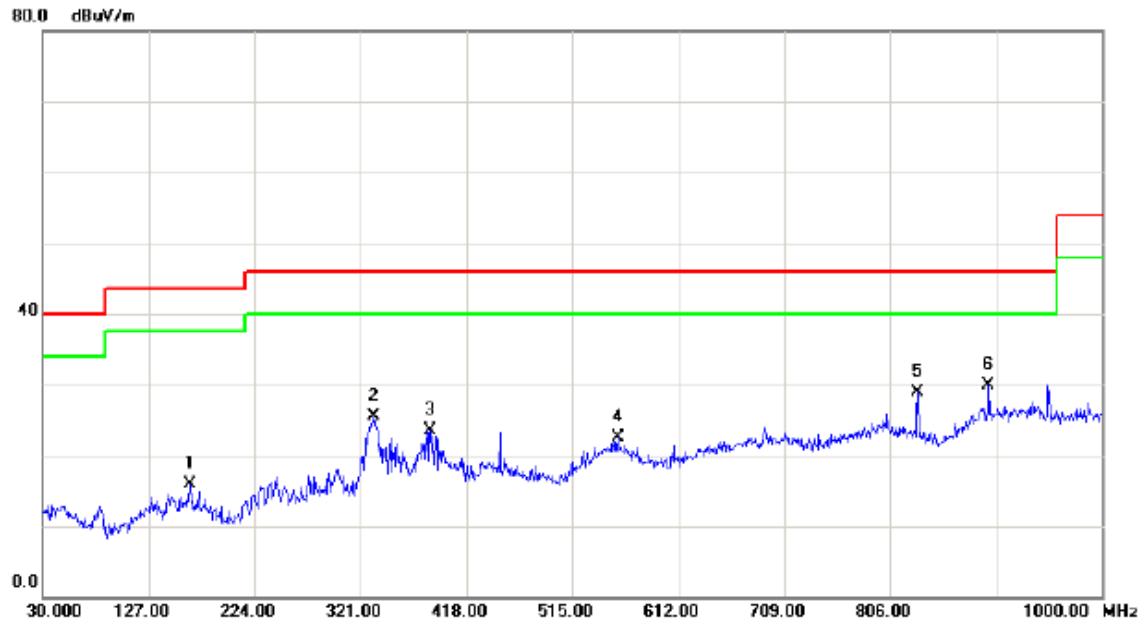

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.8300	30.05	-14.16	15.89	43.50	-27.61	QP	
2		333.6100	38.14	-12.62	25.52	46.00	-20.48	QP	
3		385.0200	35.04	-11.47	23.57	46.00	-22.43	QP	
4		556.7100	30.51	-7.91	22.60	46.00	-23.40	QP	
5		831.2200	33.14	-4.18	28.96	46.00	-17.04	QP	
6	*	896.2100	32.88	-2.90	29.98	46.00	-16.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD

Vertical

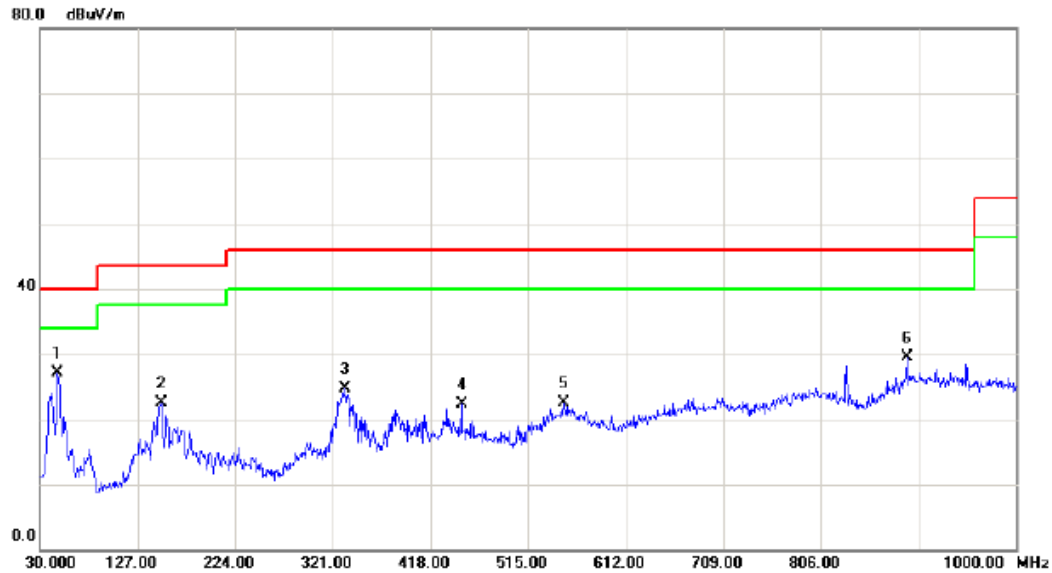

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	40.88	-13.69	27.19	40.00	-12.81	QP	
2		150.2800	36.56	-14.04	22.52	43.50	-20.98	QP	
3		333.6100	37.33	-12.62	24.71	46.00	-21.29	QP	
4		449.0400	32.00	-9.68	22.32	46.00	-23.68	QP	
5		549.9200	30.44	-7.98	22.46	46.00	-23.54	QP	
6		891.3600	32.47	-3.00	29.47	46.00	-16.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	31.88	-13.69	18.19	40.00	-21.81	QP	
2		227.8800	45.29	-15.99	29.30	46.00	-16.70	QP	
3		330.7000	37.86	-12.68	25.18	46.00	-20.82	QP	
4		546.0400	35.91	-8.08	27.83	46.00	-18.17	QP	
5		785.6300	30.41	-4.82	25.59	46.00	-20.41	QP	
6	*	906.8800	32.70	-2.67	30.03	46.00	-15.97	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD

Vertical

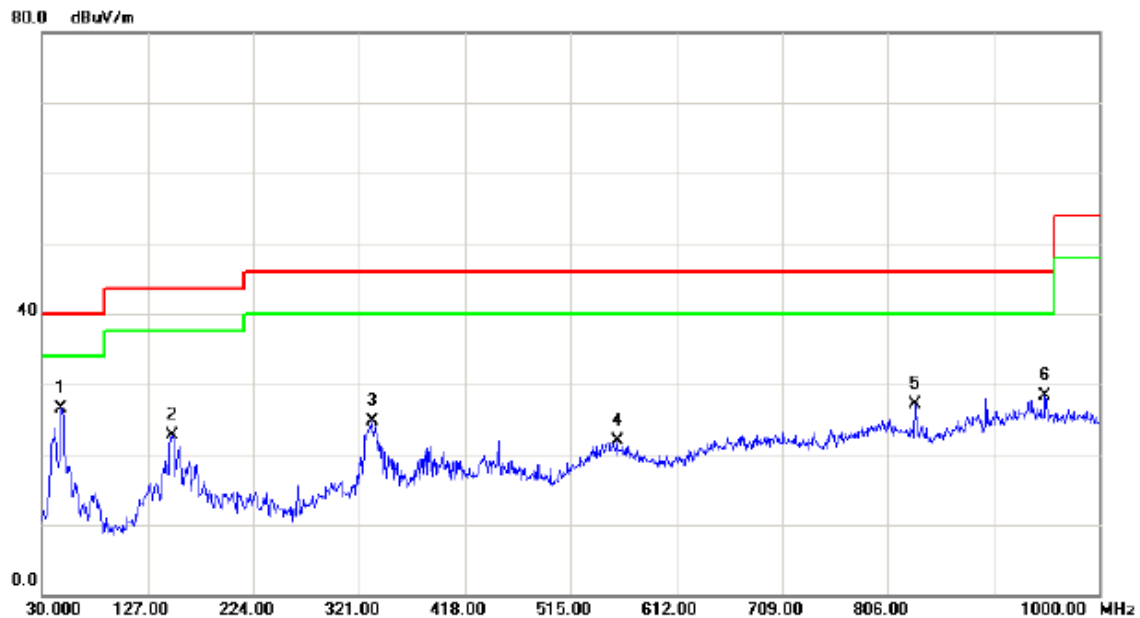

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	40.21	-13.69	26.52	40.00	-13.48	QP	
2		149.3100	36.78	-14.07	22.71	43.50	-20.79	QP	
3		332.6400	37.37	-12.64	24.73	46.00	-21.27	QP	
4		557.6800	29.75	-7.90	21.85	46.00	-24.15	QP	
5		831.2200	31.32	-4.18	27.14	46.00	-18.86	QP	
6		950.5300	30.06	-1.75	28.31	46.00	-17.69	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		162.8900	29.79	-14.06	15.73	43.50	-27.77	QP	
2		332.6400	37.24	-12.64	24.60	46.00	-21.40	QP	
3		449.0400	32.94	-9.68	23.26	46.00	-22.74	QP	
4		558.6500	30.19	-7.89	22.30	46.00	-23.70	QP	
5		831.2200	30.36	-4.18	26.18	46.00	-19.82	QP	
6	*	896.2100	30.99	-2.90	28.09	46.00	-17.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Vertical

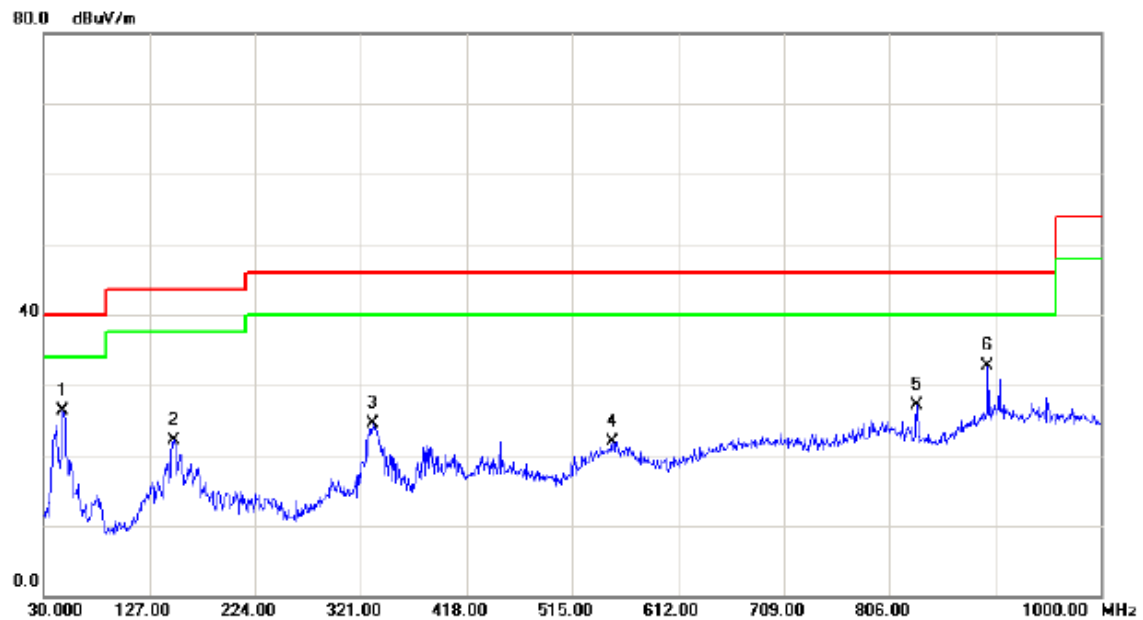

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		47.4600	39.91	-13.69	26.22	40.00	-13.78	QP	
2		149.3100	36.23	-14.07	22.16	43.50	-21.34	QP	
3		331.6700	37.08	-12.65	24.43	46.00	-21.57	QP	
4		551.8600	29.81	-7.96	21.85	46.00	-24.15	QP	
5		831.2200	31.25	-4.18	27.07	46.00	-18.93	QP	
6	*	896.2100	35.51	-2.90	32.61	46.00	-13.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal

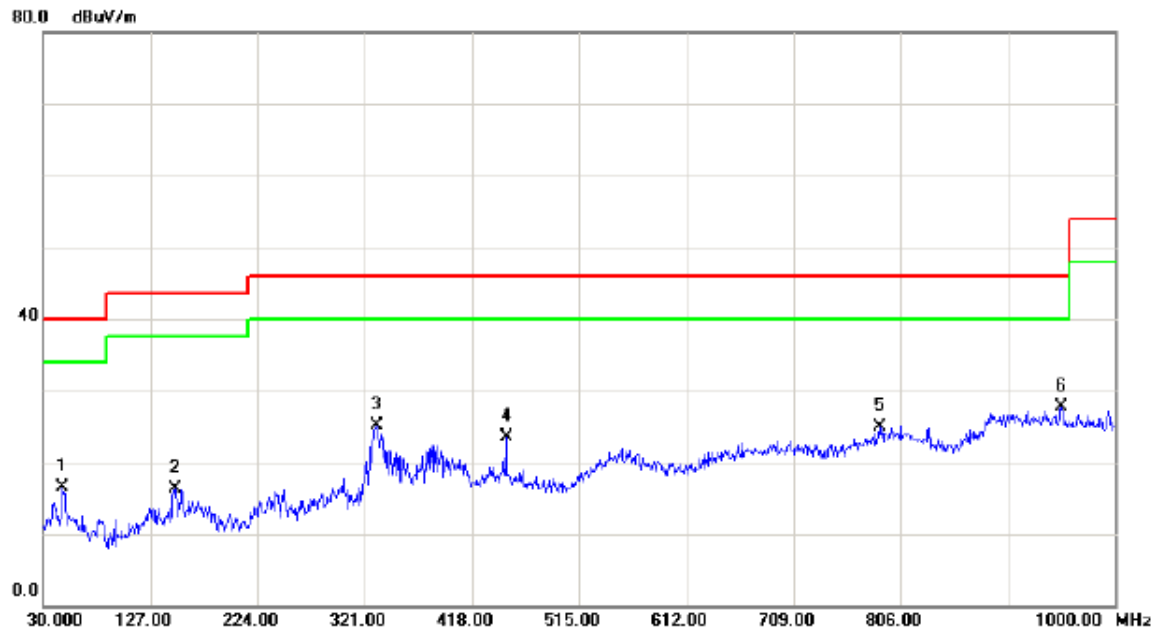

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		47.4600	30.15	-13.69	16.46	40.00	-23.54	QP	
2		149.3100	30.42	-14.07	16.35	43.50	-27.15	QP	
3		331.6700	37.85	-12.65	25.20	46.00	-20.80	QP	
4		449.0400	33.13	-9.68	23.45	46.00	-22.55	QP	
5		786.6000	29.67	-4.81	24.86	46.00	-21.14	QP	
6	*	951.5000	29.48	-1.74	27.74	46.00	-18.26	QP	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Vertical

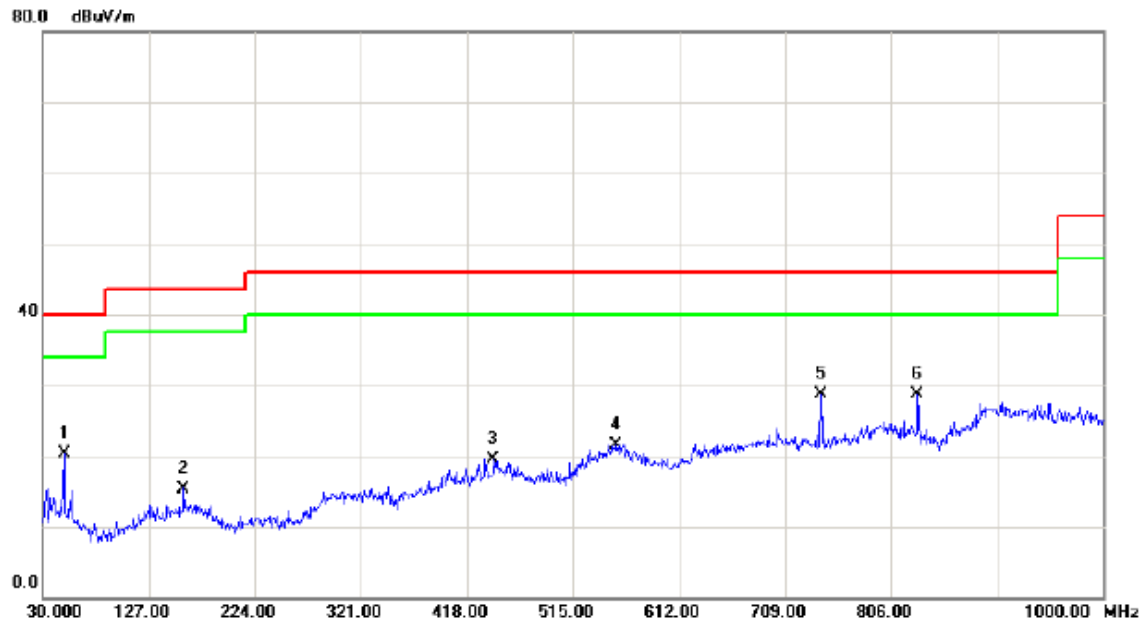

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.4000	33.92	-13.69	20.23	40.00	-19.77	QP	
2		159.0100	29.33	-13.93	15.40	43.50	-28.10	QP	
3		442.2500	29.38	-9.88	19.50	46.00	-26.50	QP	
4		554.7700	29.48	-7.93	21.55	46.00	-24.45	QP	
5	*	741.9800	33.74	-5.07	28.67	46.00	-17.33	QP	
6		830.2500	32.84	-4.20	28.64	46.00	-17.36	QP	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Horizontal

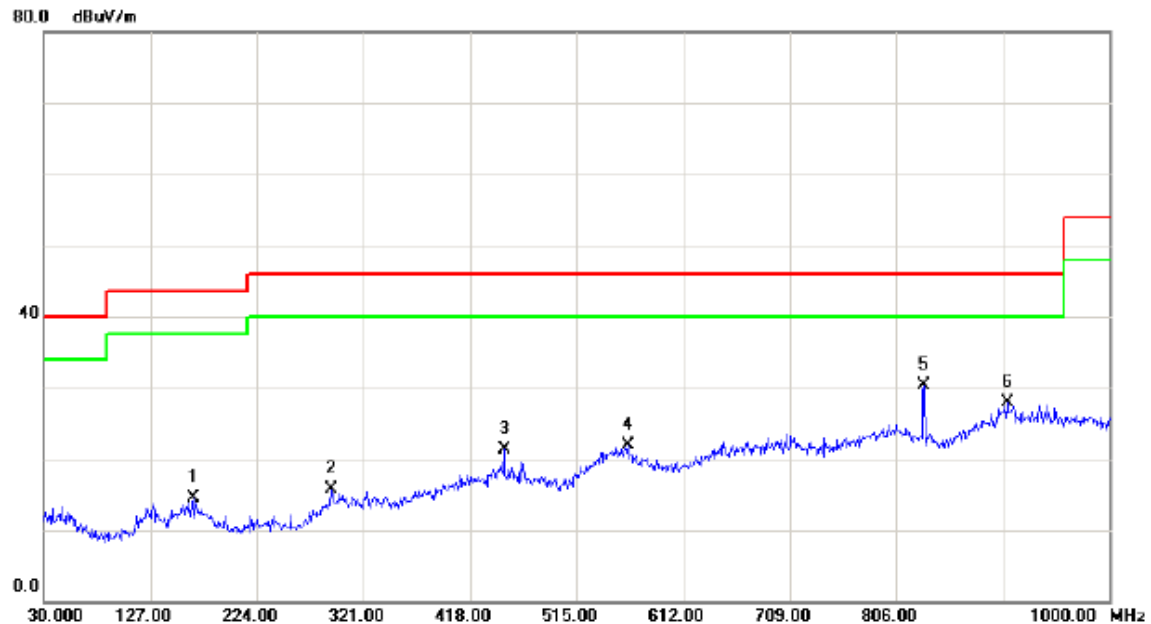

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.8000	28.74	-14.21	14.53	43.50	-28.97	QP	
2		291.9000	29.33	-13.65	15.68	46.00	-30.32	QP	
3		449.0400	31.03	-9.68	21.35	46.00	-24.65	QP	
4		561.5600	29.67	-7.86	21.81	46.00	-24.19	QP	
5	*	831.2200	34.58	-4.18	30.40	46.00	-15.60	QP	
6		906.8800	30.65	-2.67	27.98	46.00	-18.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

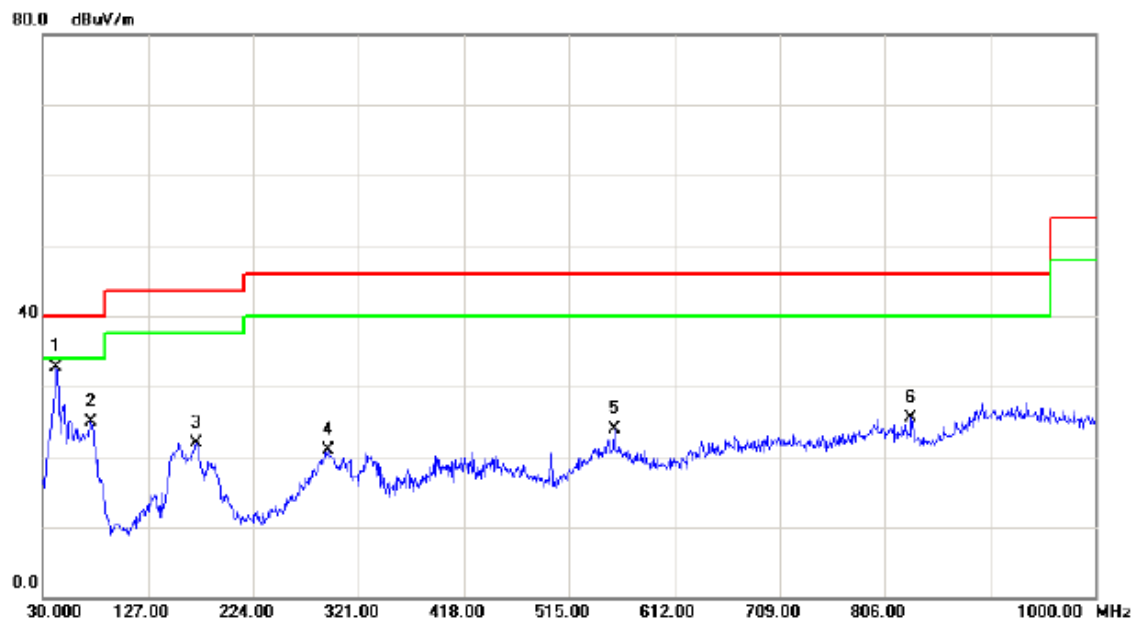

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	46.54	-13.92	32.62	40.00	-7.38	QP	
2		74.6200	42.02	-17.11	24.91	40.00	-15.09	QP	
3		171.6200	36.43	-14.57	21.86	43.50	-21.64	QP	
4		292.8700	34.60	-13.64	20.96	46.00	-25.04	QP	
5		556.7100	31.91	-7.91	24.00	46.00	-22.00	QP	
6		830.2500	29.67	-4.20	25.47	46.00	-20.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

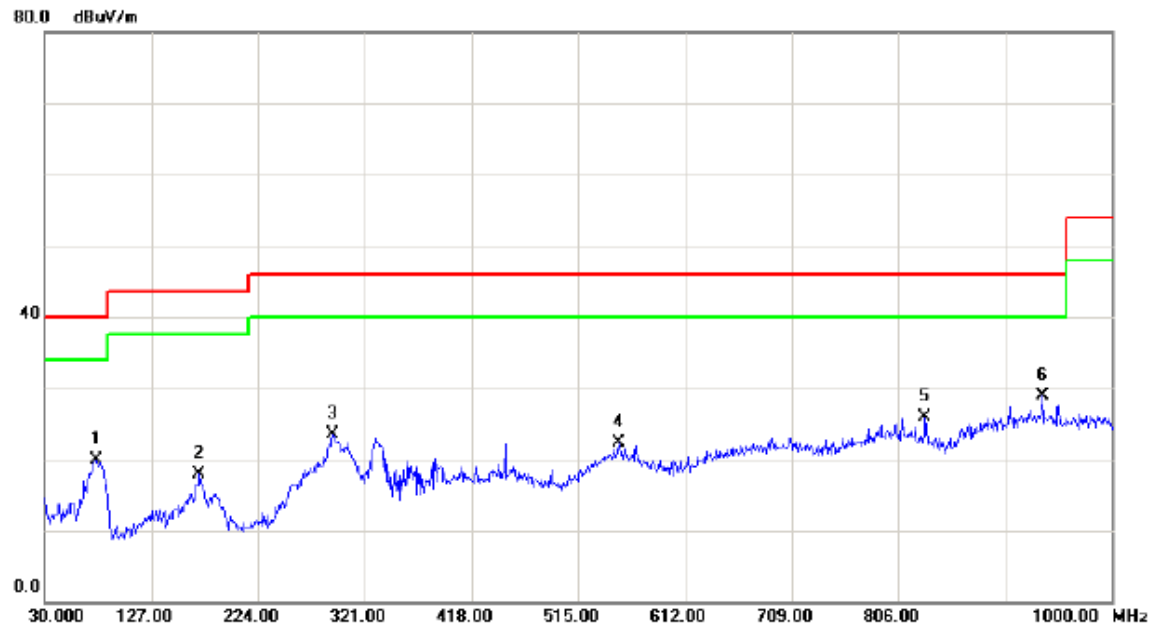

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		76.5600	37.40	-17.48	19.92	40.00	-20.08	QP	
2		170.6500	32.34	-14.49	17.85	43.50	-25.65	QP	
3		291.9000	37.14	-13.65	23.49	46.00	-22.51	QP	
4		551.8600	30.23	-7.96	22.27	46.00	-23.73	QP	
5		830.2500	30.15	-4.20	25.95	46.00	-20.05	QP	
6	*	936.9500	30.86	-2.03	28.83	46.00	-17.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

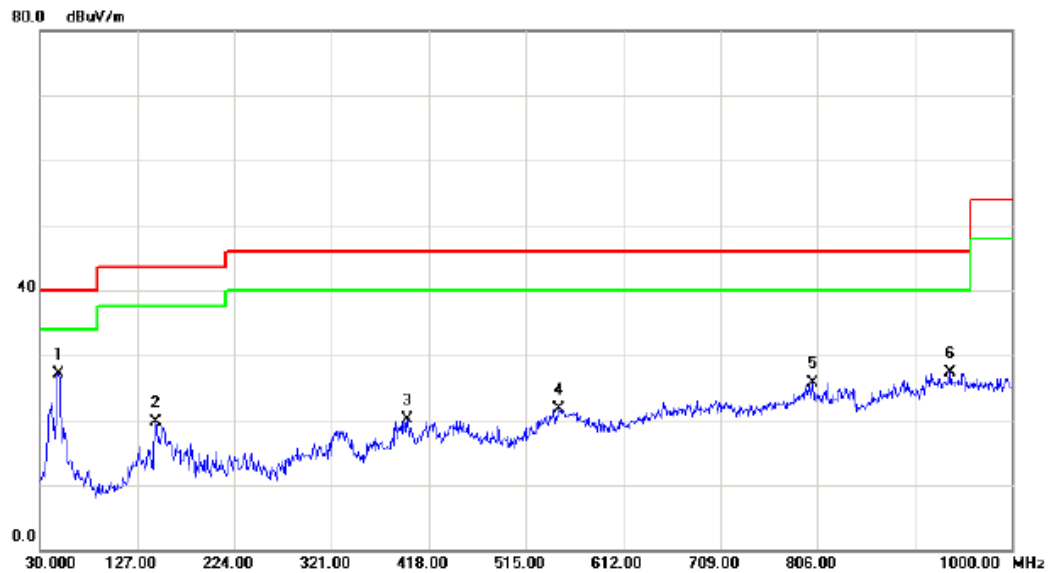

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	48.4300	40.78	-13.69	27.09	40.00	-12.91	QP	
2		145.4300	33.83	-14.22	19.61	43.50	-23.89	QP	
3		396.6600	31.33	-11.17	20.16	46.00	-25.84	QP	
4		547.9800	29.78	-8.04	21.74	46.00	-24.26	QP	
5		801.1500	30.48	-4.72	25.76	46.00	-20.24	QP	
6		938.8900	29.23	-2.00	27.23	46.00	-18.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

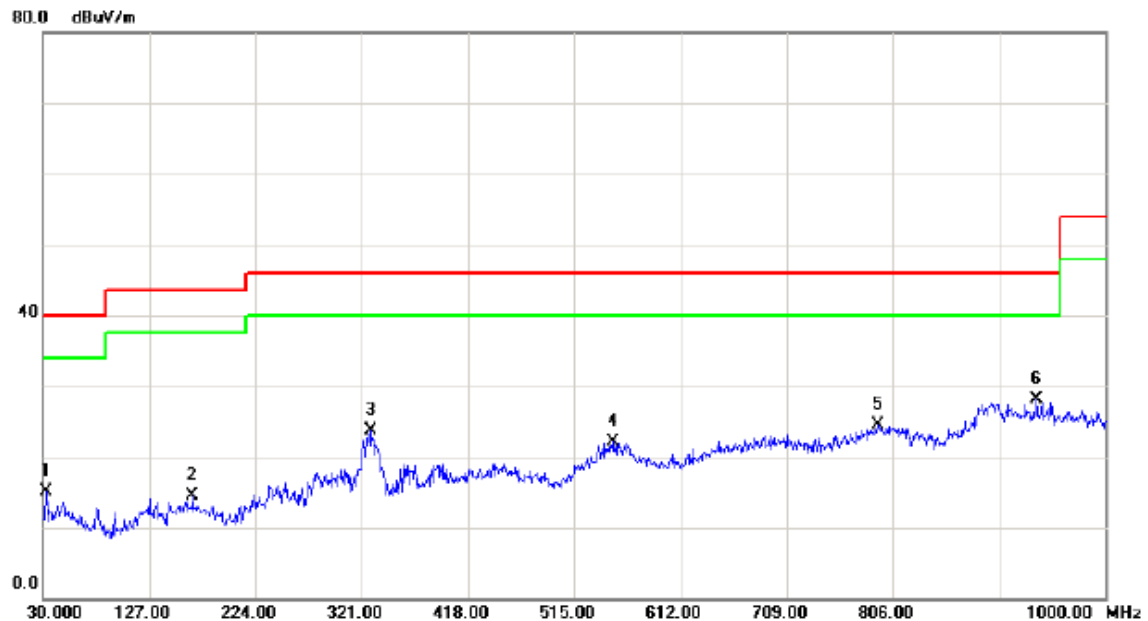

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		32.9100	30.14	-15.12	15.02	40.00	-24.98	QP	
2		166.7700	28.82	-14.26	14.56	43.50	-28.94	QP	
3		328.7600	36.53	-12.74	23.79	46.00	-22.21	QP	
4		550.8900	30.08	-7.97	22.11	46.00	-23.89	QP	
5		792.4200	29.27	-4.78	24.49	46.00	-21.51	QP	
6	*	936.9500	30.12	-2.03	28.09	46.00	-17.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

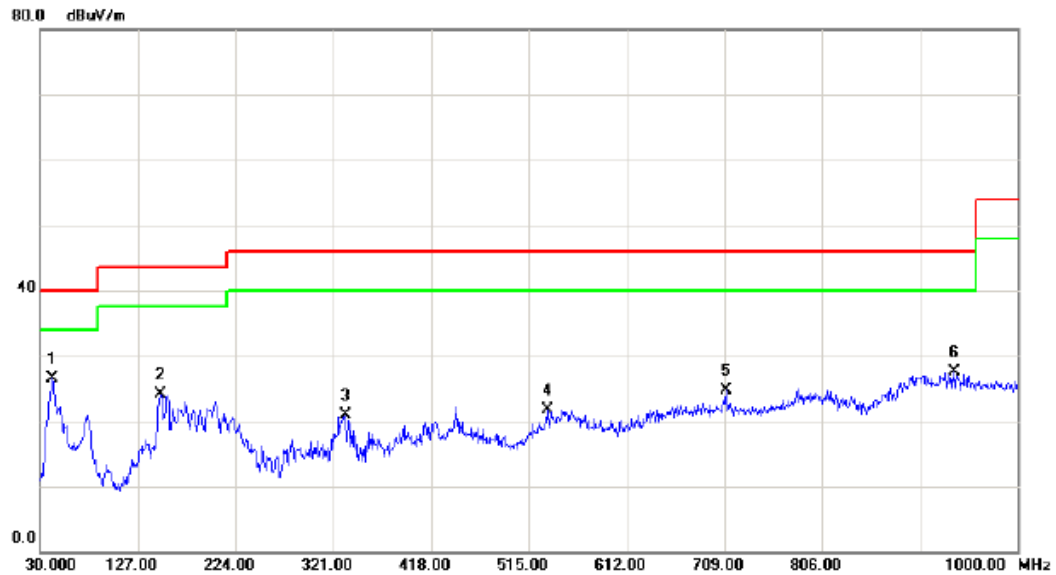

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	42.6100	40.52	-13.92	26.60	40.00	-13.40	QP	
2		149.3100	38.16	-14.07	24.09	43.50	-19.41	QP	
3		332.6400	33.59	-12.64	20.95	46.00	-25.05	QP	
4		533.4300	30.16	-8.43	21.73	46.00	-24.27	QP	
5		710.9400	29.97	-5.33	24.64	46.00	-21.36	QP	
6		936.9500	29.61	-2.03	27.58	46.00	-18.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG

Horizontal

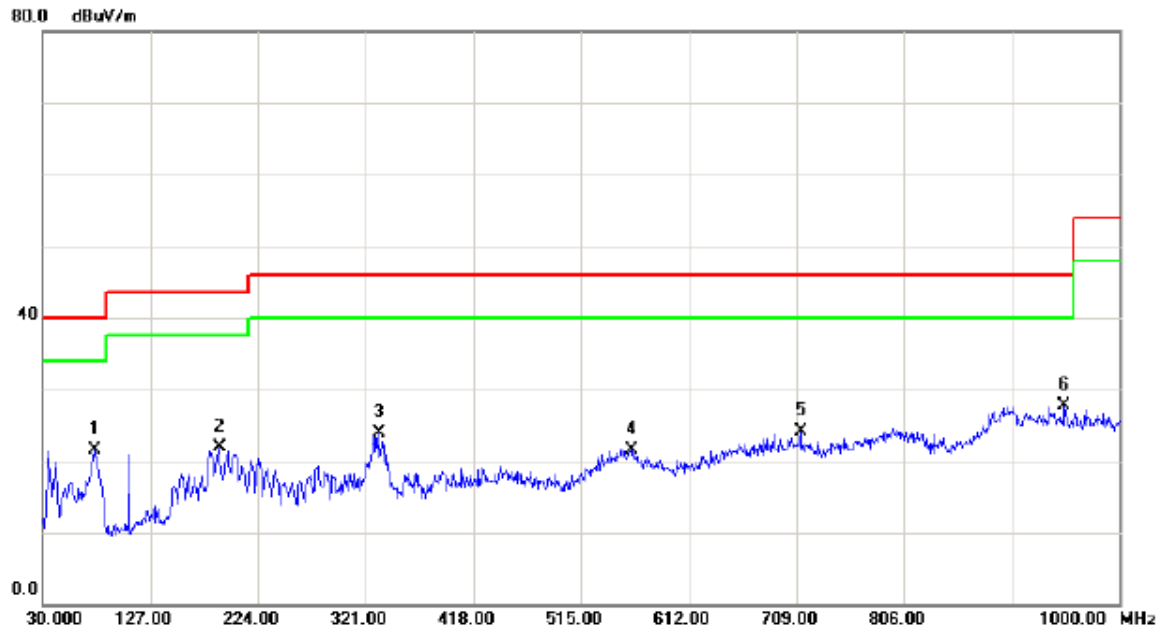

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		76.5600	39.05	-17.48	21.57	40.00	-18.43	QP	
2		189.0800	38.48	-16.56	21.92	43.50	-21.58	QP	
3		332.6400	36.54	-12.64	23.90	46.00	-22.10	QP	
4		560.5900	29.40	-7.87	21.53	46.00	-24.47	QP	
5		712.8800	29.49	-5.32	24.17	46.00	-21.83	QP	
6	*	950.5300	29.38	-1.75	27.63	46.00	-18.37	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD (EU Plug)


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	47.96	-14.13	33.83	40.00	-6.17	QP	
2		47.4600	45.30	-13.69	31.61	40.00	-8.39	QP	
3		200.7200	40.23	-16.71	23.52	43.50	-19.98	QP	
4		551.8600	30.19	-7.96	22.23	46.00	-23.77	QP	
5		830.2500	31.28	-4.20	27.08	46.00	-18.92	QP	
6		940.8300	29.87	-1.95	27.92	46.00	-18.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD (EU Plug)


Horizontal

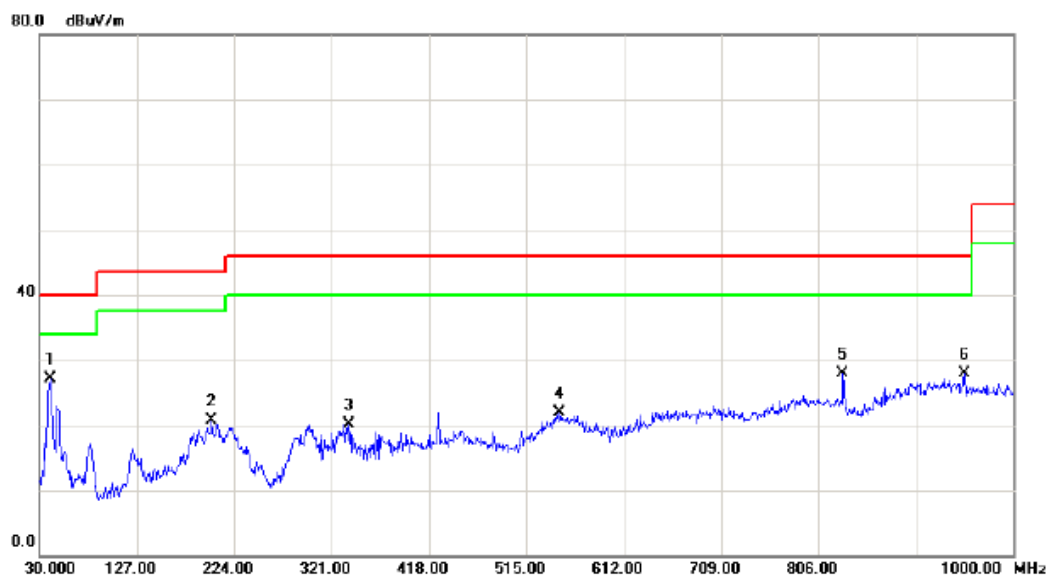

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	41.23	-14.13	27.10	40.00	-12.90	QP	
2		201.6900	37.46	-16.70	20.76	43.50	-22.74	QP	
3		338.4600	32.62	-12.49	20.13	46.00	-25.87	QP	
4		547.9800	29.96	-8.04	21.92	46.00	-24.08	QP	
5		830.2500	32.12	-4.20	27.92	46.00	-18.08	QP	
6		951.5000	29.56	-1.74	27.82	46.00	-18.18	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU (EU Plug)


Vertical

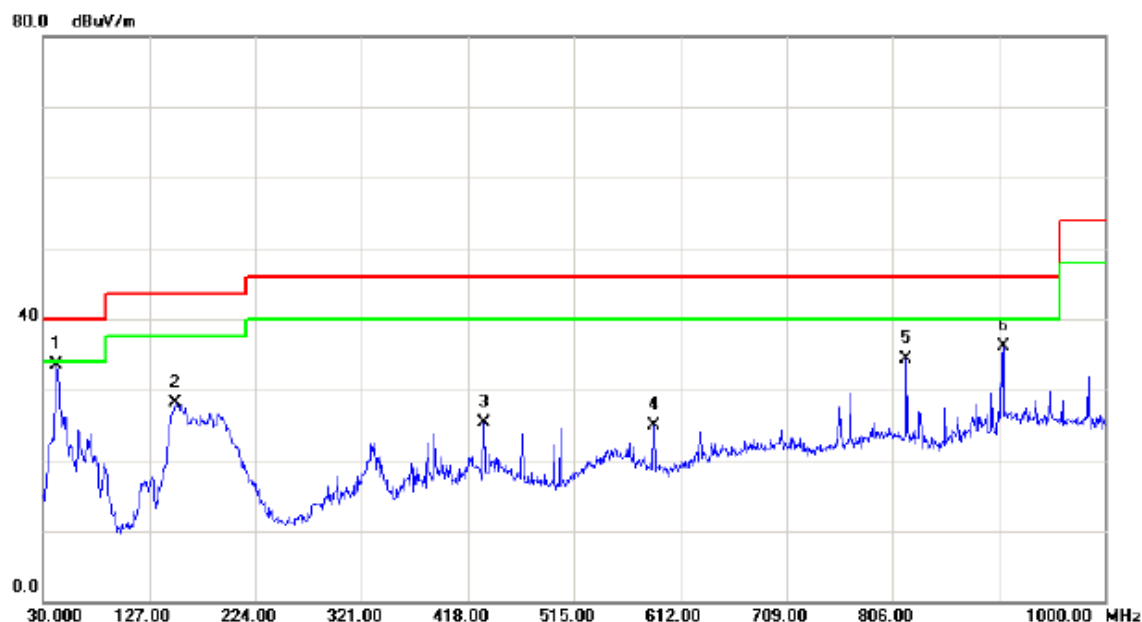

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	42.6100	47.41	-13.92	33.49	40.00	-6.51	QP	
2		151.2500	42.13	-14.04	28.09	43.50	-15.41	QP	
3		432.5500	35.51	-10.16	25.35	46.00	-20.65	QP	
4		587.7500	32.48	-7.59	24.89	46.00	-21.11	QP	
5		818.6100	38.67	-4.40	34.27	46.00	-11.73	QP	
6		906.8800	38.78	-2.67	36.11	46.00	-9.89	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU (EU Plug)


Horizontal

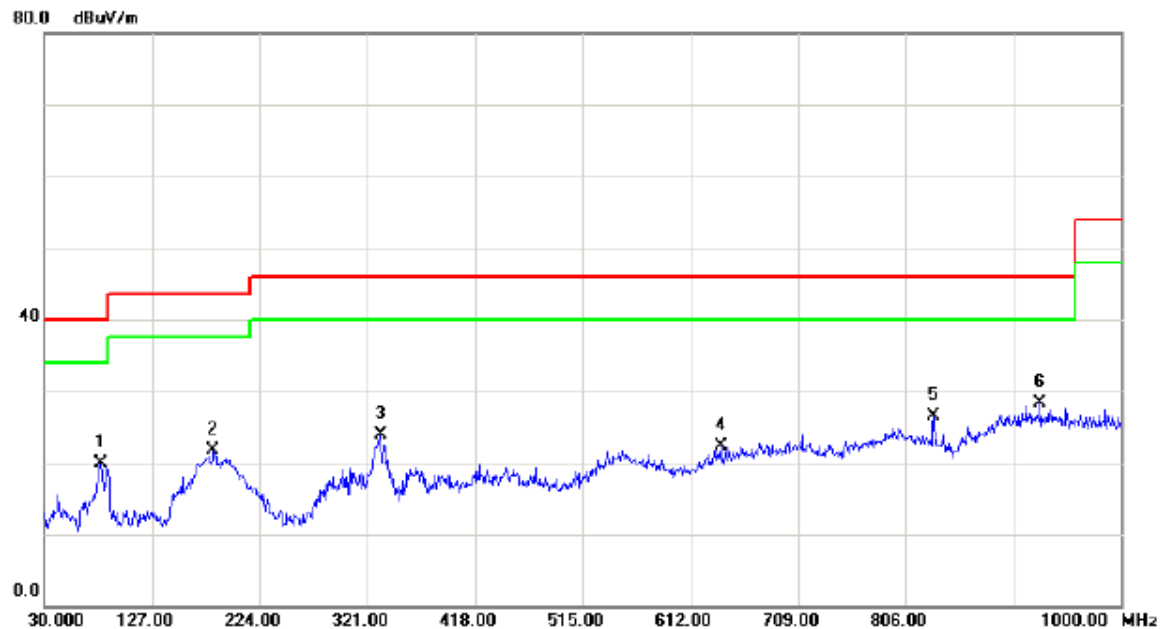

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		80.4400	38.06	-18.21	19.85	40.00	-20.15	QP	
2		182.2900	37.43	-15.70	21.73	43.50	-21.77	QP	
3		332.6400	36.47	-12.64	23.83	46.00	-22.17	QP	
4		639.1600	29.34	-7.03	22.31	46.00	-23.69	QP	
5		831.2200	30.61	-4.18	26.43	46.00	-19.57	QP	
6	*	927.2500	30.47	-2.25	28.22	46.00	-17.78	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK (EU Plug)


Vertical

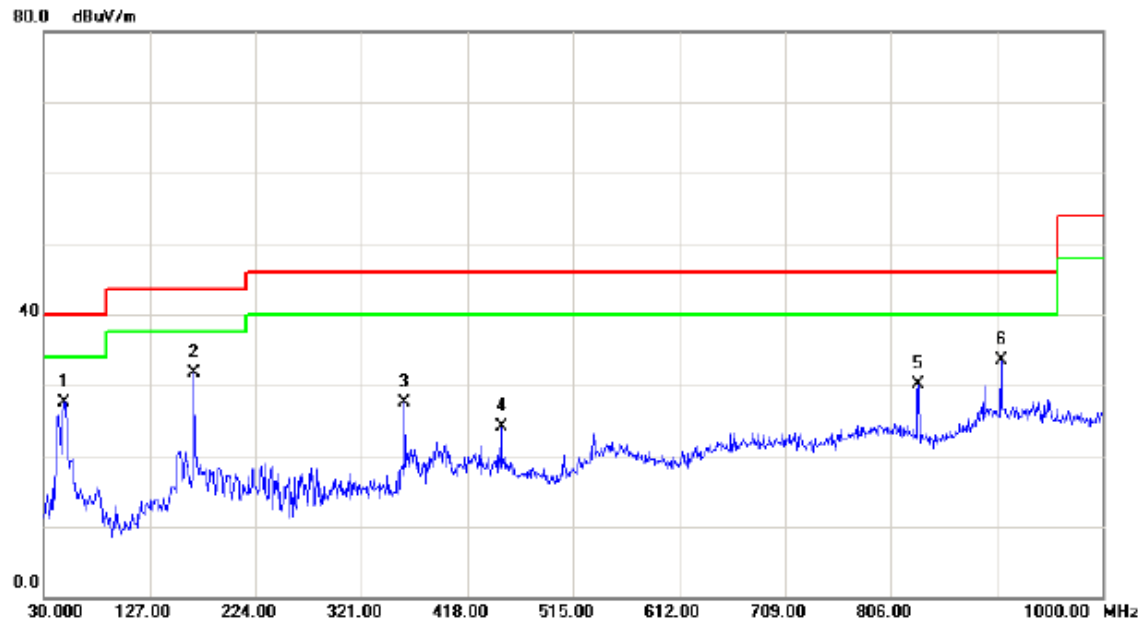

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	41.29	-13.69	27.60	40.00	-12.40	QP	
2	*	167.7400	45.96	-14.31	31.65	43.50	-11.85	QP	
3		360.7700	39.49	-12.06	27.43	46.00	-18.57	QP	
4		449.0400	33.83	-9.68	24.15	46.00	-21.85	QP	
5		831.2200	34.28	-4.18	30.10	46.00	-15.90	QP	
6		906.8800	36.20	-2.67	33.53	46.00	-12.47	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK (EU Plug)


Horizontal

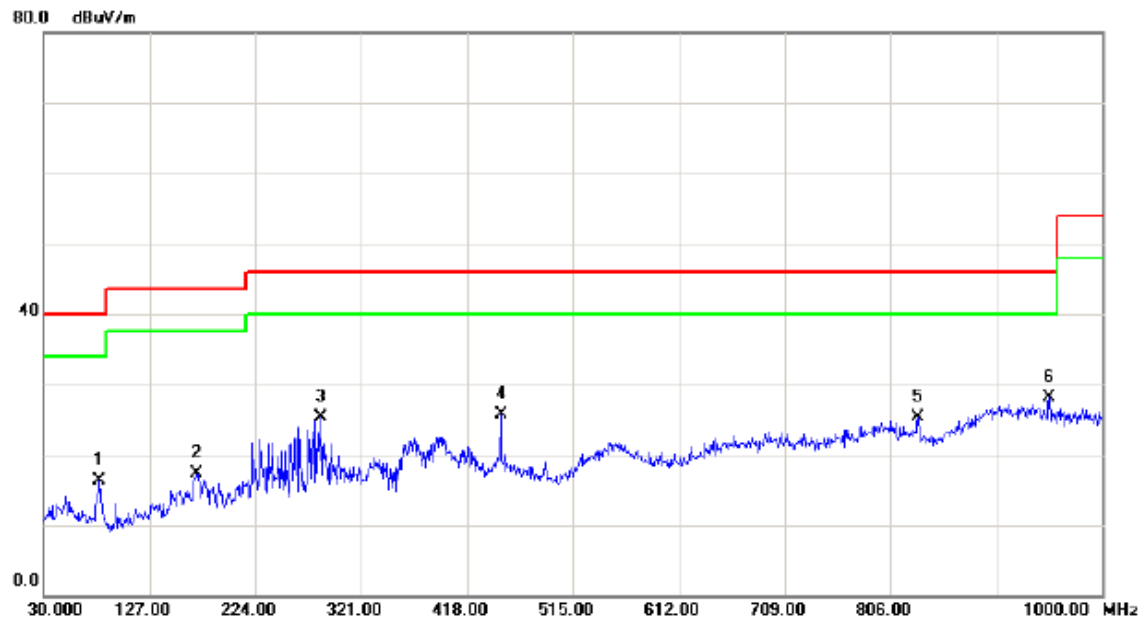

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	34.66	-18.42	16.24	40.00	-23.76	QP	
2		170.6500	31.71	-14.49	17.22	43.50	-26.28	QP	
3		284.1400	39.14	-13.85	25.29	46.00	-20.71	QP	
4		449.0400	35.41	-9.68	25.73	46.00	-20.27	QP	
5		831.2200	29.56	-4.18	25.38	46.00	-20.62	QP	
6	*	951.5000	29.83	-1.74	28.09	46.00	-17.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)

Vertical

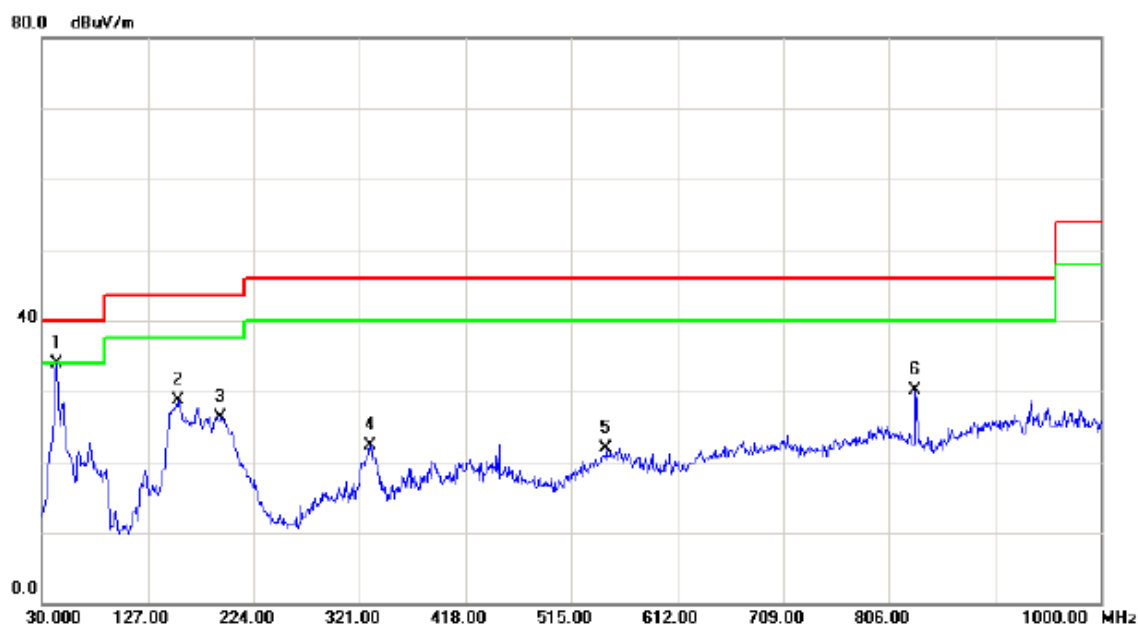

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	47.67	-13.82	33.85	40.00	-6.15	QP	
2		155.1300	42.69	-13.99	28.70	43.50	-14.80	QP	
3		193.9300	43.08	-16.70	26.38	43.50	-17.12	QP	
4		330.7000	34.97	-12.68	22.29	46.00	-23.71	QP	
5		547.0100	30.03	-8.06	21.97	46.00	-24.03	QP	
6		830.2500	34.26	-4.20	30.06	46.00	-15.94	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	42.6100	37.69	-13.92	23.77	40.00	-16.23	QP	
2		81.4100	39.33	-18.42	20.91	40.00	-19.09	QP	
3		195.8700	40.43	-16.71	23.72	43.50	-19.78	QP	
4		330.7000	37.60	-12.68	24.92	46.00	-21.08	QP	
5		830.2500	31.81	-4.20	27.61	46.00	-18.39	QP	
6		891.3600	31.54	-3.00	28.54	46.00	-17.46	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Vertical

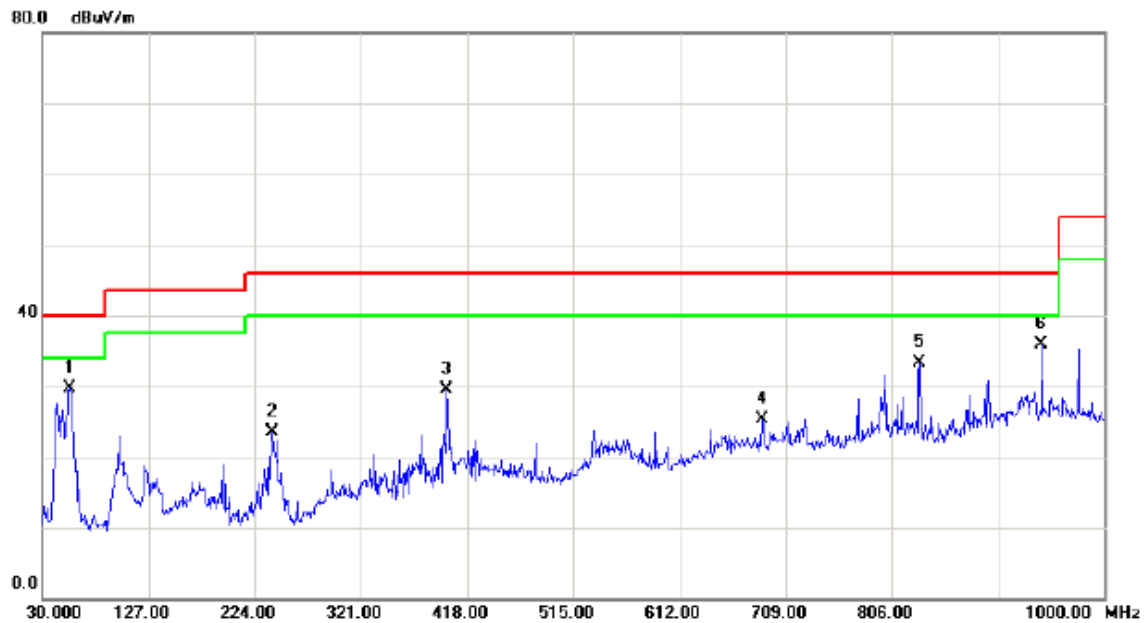

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.2200	43.99	-14.24	29.75	40.00	-10.25	QP	
2		240.4900	38.77	-15.25	23.52	46.00	-22.48	QP	
3		399.5700	40.67	-11.10	29.57	46.00	-16.43	QP	
4		687.6600	31.13	-5.79	25.34	46.00	-20.66	QP	
5		831.2200	37.42	-4.18	33.24	46.00	-12.76	QP	
6	*	942.7700	37.81	-1.92	35.89	46.00	-10.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Horizontal

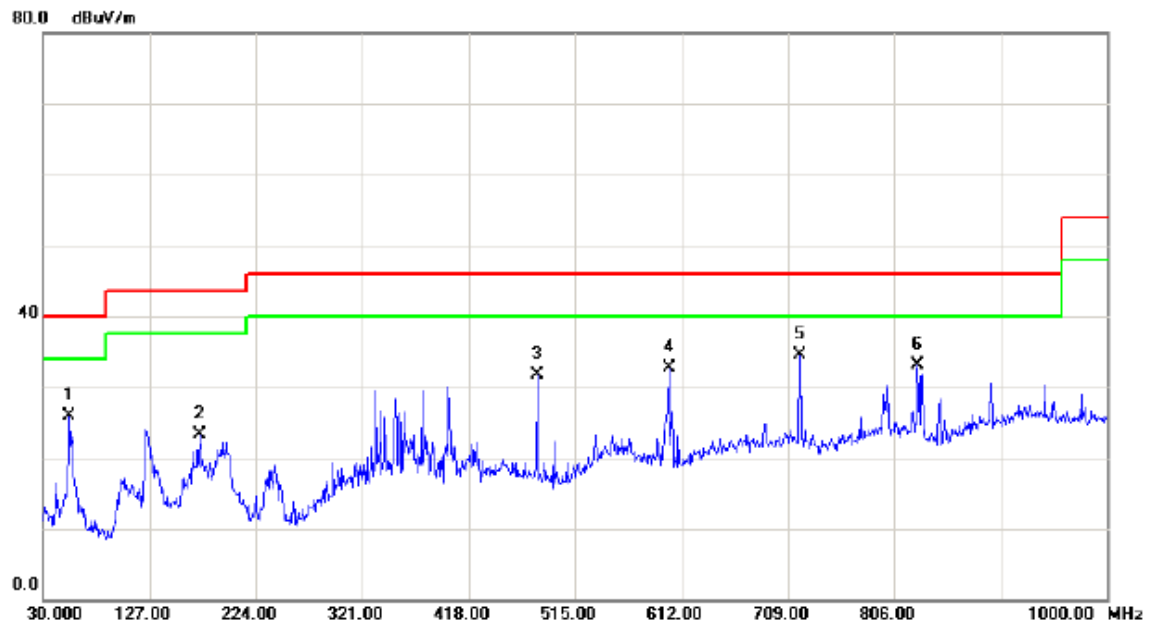


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		54.2500	40.08	-14.14	25.94	40.00	-14.06	QP	
2		172.5900	37.97	-14.68	23.29	43.50	-20.21	QP	
3		480.0800	41.06	-9.45	31.61	46.00	-14.39	QP	
4		600.3600	40.10	-7.46	32.64	46.00	-13.36	QP	
5	*	719.6700	39.85	-5.26	34.59	46.00	-11.41	QP	
6		827.3400	37.33	-4.25	33.08	46.00	-12.92	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Vertical

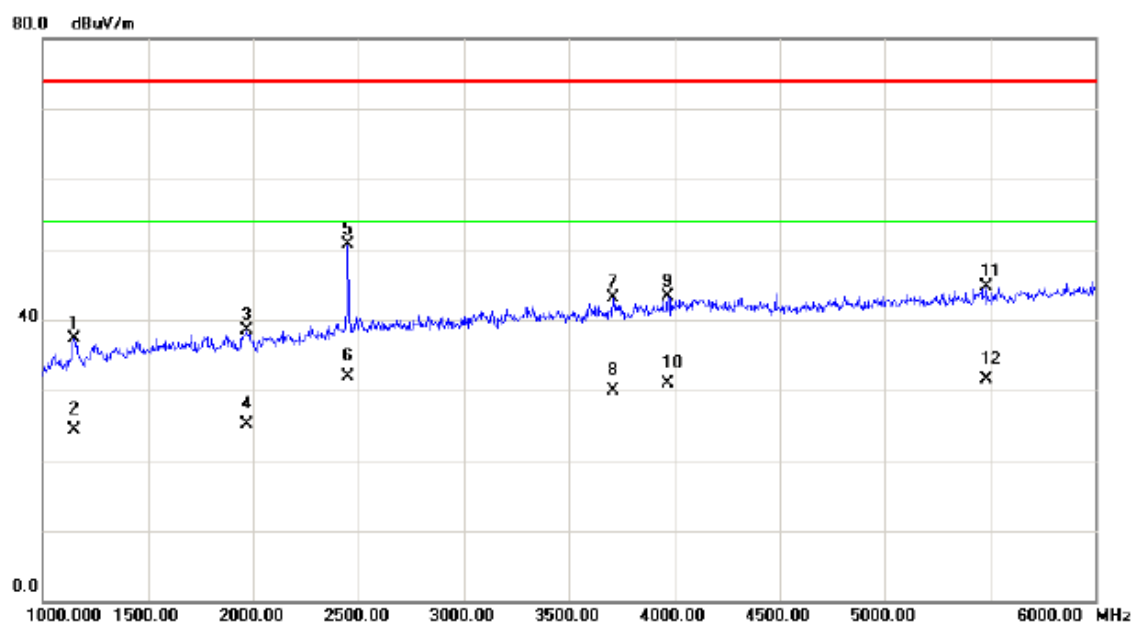

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1150.000	42.47	-5.09	37.38	74.00	-36.62	peak	
2		1150.000	29.31	-5.09	24.22	54.00	-29.78	AVG	
3		1970.000	40.59	-2.01	38.58	74.00	-35.42	peak	
4		1970.000	27.10	-2.01	25.09	54.00	-28.91	AVG	
5		2450.000	50.79	-0.11	50.68	74.00	-23.32	peak	
6	*	2450.000	32.10	-0.11	31.99	54.00	-22.01	AVG	
7		3710.000	38.55	4.52	43.07	74.00	-30.93	peak	
8		3710.000	25.29	4.52	29.81	54.00	-24.19	AVG	
9		3970.000	36.94	6.40	43.34	74.00	-30.66	peak	
10		3970.000	24.51	6.40	30.91	54.00	-23.09	AVG	
11		5480.000	35.58	9.09	44.67	74.00	-29.33	peak	
12		5480.000	22.37	9.09	31.46	54.00	-22.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal

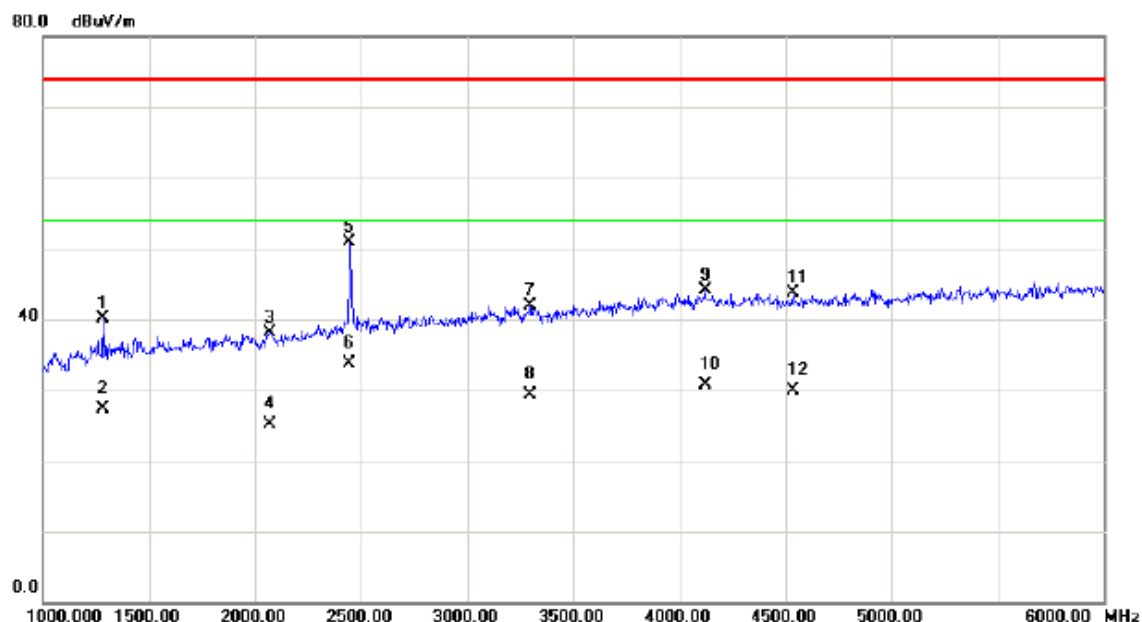

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		1280.000	44.87	-4.72	40.15	74.00	-33.85	peak	
2		1280.000	32.08	-4.72	27.36	54.00	-26.64	AVG	
3		2070.000	39.67	-1.60	38.07	74.00	-35.93	peak	
4		2070.000	26.77	-1.60	25.17	54.00	-28.83	AVG	
5		2445.000	51.06	-0.14	50.92	74.00	-23.08	peak	
6	*	2445.000	33.93	-0.14	33.79	54.00	-20.21	AVG	
7		3295.000	39.36	2.52	41.88	74.00	-32.12	peak	
8		3295.000	26.70	2.52	29.22	54.00	-24.78	AVG	
9		4120.000	37.41	6.69	44.10	74.00	-29.90	peak	
10		4120.000	24.06	6.69	30.75	54.00	-23.25	AVG	
11		4535.000	36.63	6.98	43.61	74.00	-30.39	peak	
12		4535.000	22.84	6.98	29.82	54.00	-24.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Vertical

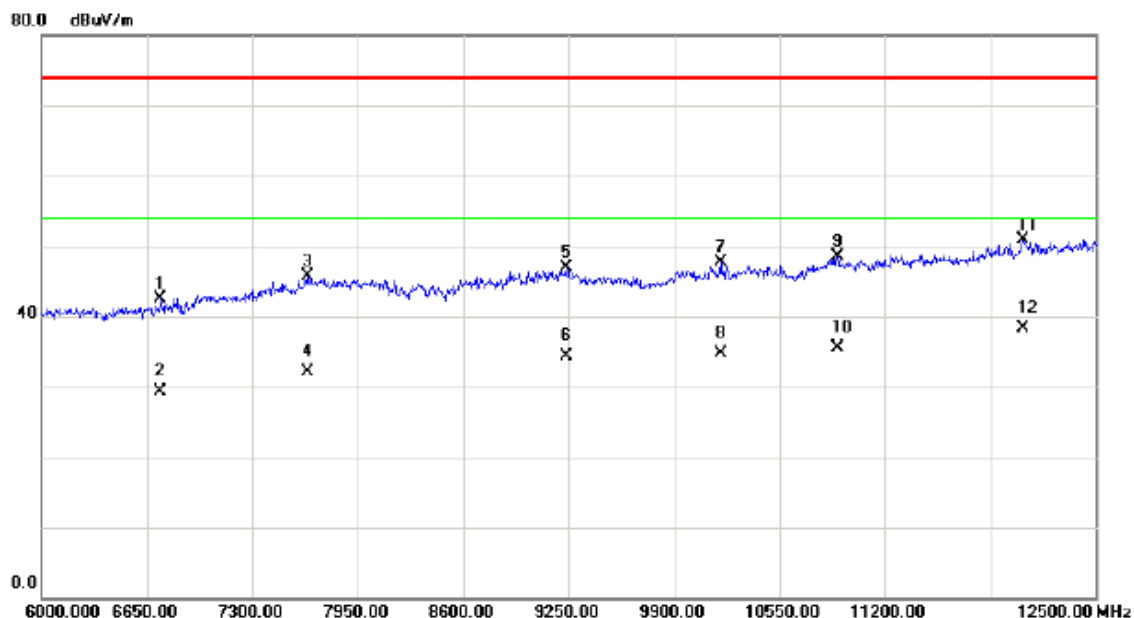

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6734.500	29.77	12.83	42.60	74.00	-31.40	peak	
2		6734.500	16.56	12.83	29.39	54.00	-24.61	AVG	
3		7638.000	29.77	16.01	45.78	74.00	-28.22	peak	
4		7638.000	16.14	16.01	32.15	54.00	-21.85	AVG	
5		9237.000	31.28	15.70	46.98	74.00	-27.02	peak	
6		9237.000	18.56	15.70	34.26	54.00	-19.74	AVG	
7		10186.000	32.45	15.29	47.74	74.00	-26.26	peak	
8		10186.000	19.47	15.29	34.76	54.00	-19.24	AVG	
9		10907.500	29.37	19.21	48.58	74.00	-25.42	peak	
10		10907.500	16.32	19.21	35.53	54.00	-18.47	AVG	
11		12051.500	28.21	22.74	50.95	74.00	-23.05	peak	
12	*	12051.500	15.64	22.74	38.38	54.00	-15.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD


Horizontal

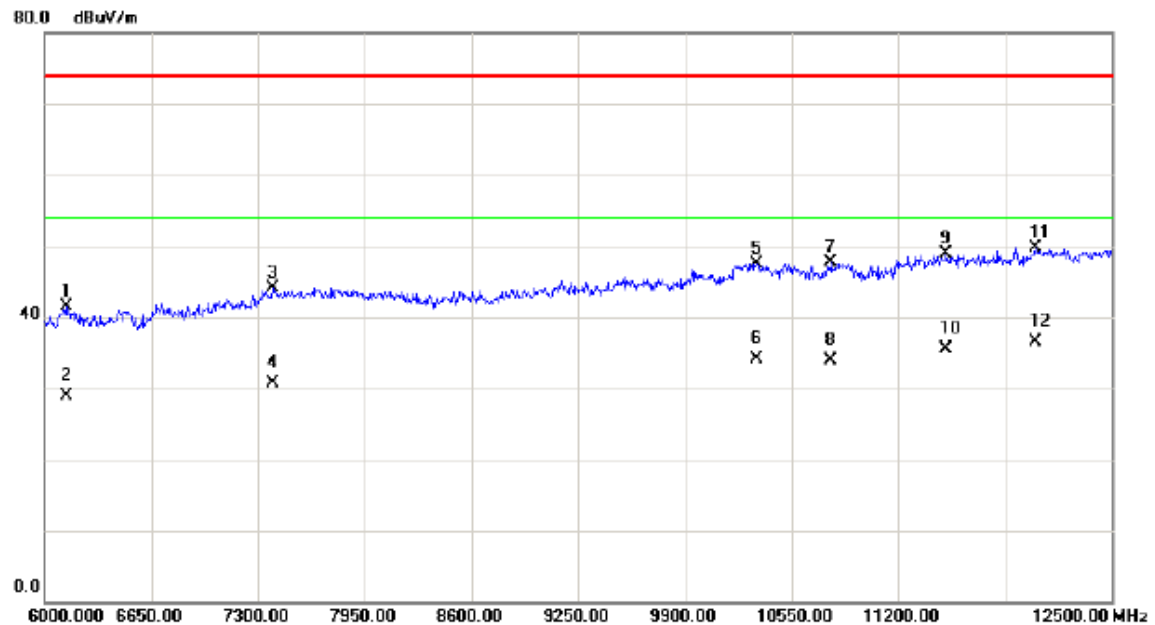

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6130.000	31.20	10.31	41.51	74.00	-32.49	peak	
2		6130.000	18.56	10.31	28.87	54.00	-25.13	AVG	
3		7391.000	28.52	15.52	44.04	74.00	-29.96	peak	
4		7391.000	15.23	15.52	30.75	54.00	-23.25	AVG	
5		10335.50	32.83	14.67	47.50	74.00	-26.50	peak	
6		10335.50	19.42	14.67	34.09	54.00	-19.91	AVG	
7		10790.50	29.95	17.70	47.65	74.00	-26.35	peak	
8		10790.50	16.30	17.70	34.00	54.00	-20.00	AVG	
9		11492.50	28.71	20.14	48.85	74.00	-25.15	peak	
10		11492.50	15.37	20.14	35.51	54.00	-18.49	AVG	
11		12032.00	26.80	22.96	49.76	74.00	-24.24	peak	
12	*	12032.00	13.49	22.96	36.45	54.00	-17.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Vertical

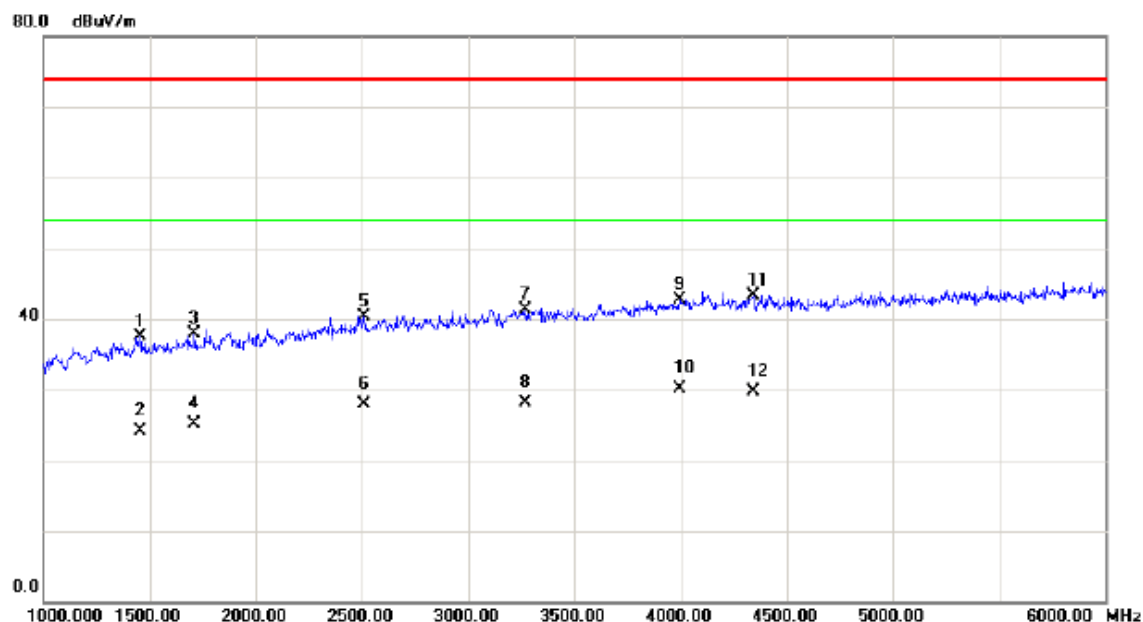

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1455.000	41.66	-4.19	37.47	74.00	-36.53	peak	
2		1455.000	28.39	-4.19	24.20	54.00	-29.80	AVG	
3		1710.000	41.14	-3.15	37.99	74.00	-36.01	peak	
4		1710.000	28.29	-3.15	25.14	54.00	-28.86	AVG	
5		2510.000	40.21	0.12	40.33	74.00	-33.67	peak	
6		2510.000	27.88	0.12	28.00	54.00	-26.00	AVG	
7		3270.000	38.92	2.47	41.39	74.00	-32.61	peak	
8		3270.000	25.67	2.47	28.14	54.00	-25.86	AVG	
9		3995.000	36.18	6.59	42.77	74.00	-31.23	peak	
10	*	3995.000	23.57	6.59	30.16	54.00	-23.84	AVG	
11		4340.000	36.55	6.83	43.38	74.00	-30.62	peak	
12		4340.000	22.96	6.83	29.79	54.00	-24.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD


Horizontal

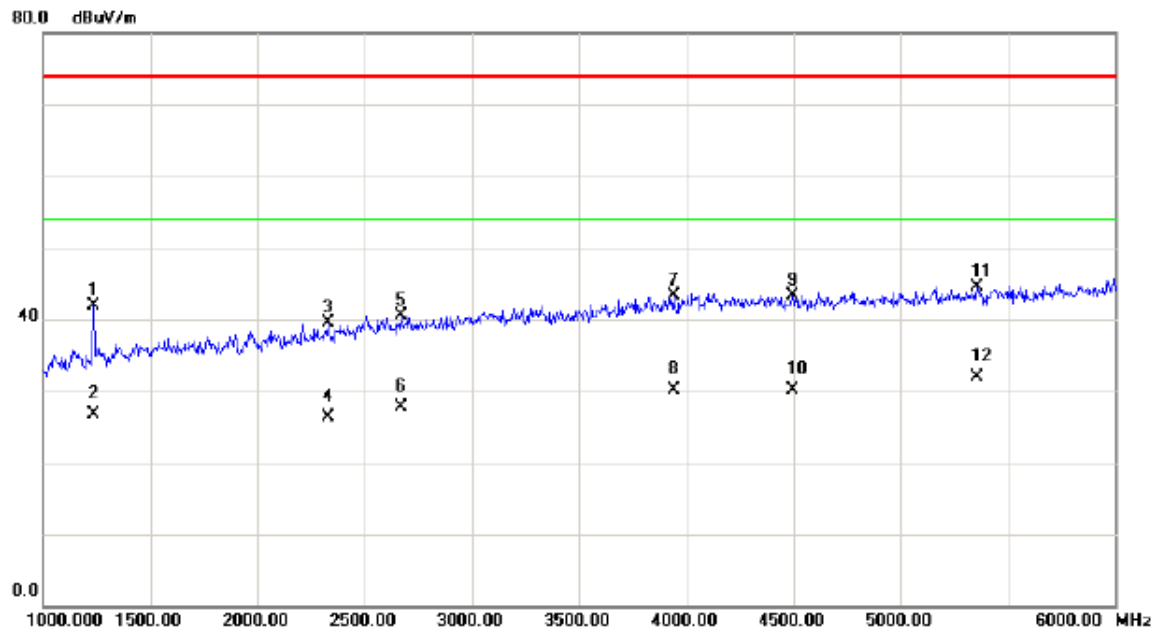

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1235.000	46.69	-4.84	41.85	74.00	-32.15	peak	
2		1235.000	31.55	-4.84	26.71	54.00	-27.29	AVG	
3		2330.000	40.14	-0.59	39.55	74.00	-34.45	peak	
4		2330.000	26.87	-0.59	26.28	54.00	-27.72	AVG	
5		2670.000	39.91	0.68	40.59	74.00	-33.41	peak	
6		2670.000	27.02	0.68	27.70	54.00	-26.30	AVG	
7		3940.000	37.15	6.19	43.34	74.00	-30.66	peak	
8		3940.000	23.84	6.19	30.03	54.00	-23.97	AVG	
9		4495.000	36.38	6.92	43.30	74.00	-30.70	peak	
10		4495.000	23.14	6.92	30.06	54.00	-23.94	AVG	
11		5355.000	35.83	8.71	44.54	74.00	-29.46	peak	
12	*	5355.000	23.16	8.71	31.87	54.00	-22.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Vertical

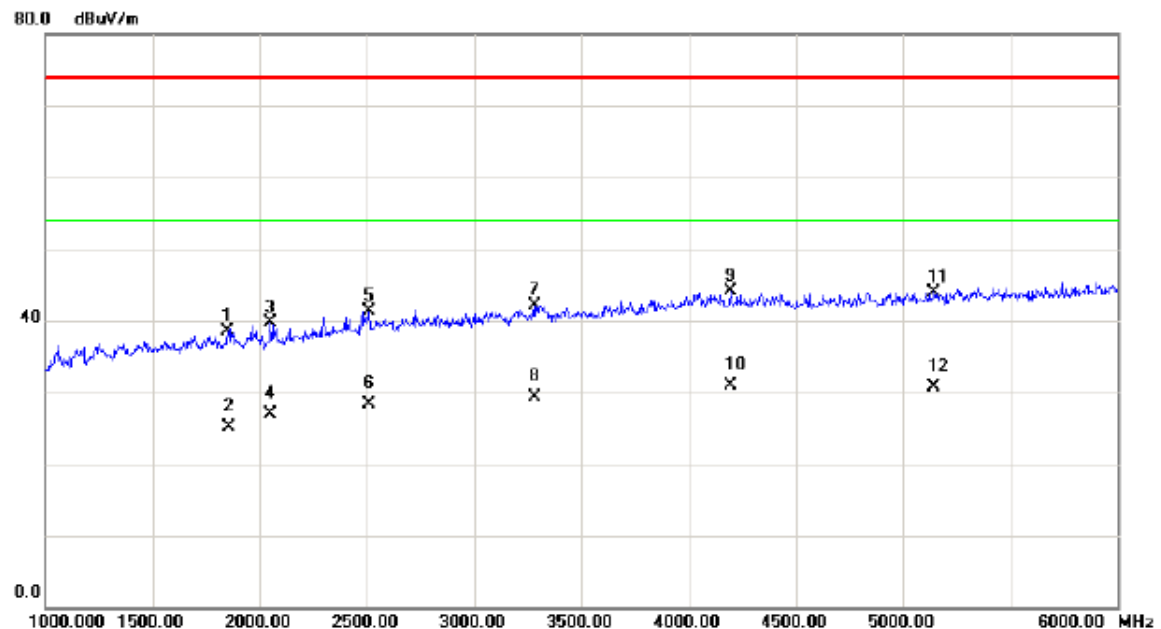

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1850.000	40.96	-2.54	38.42	74.00	-35.58	peak	
2		1850.000	27.58	-2.54	25.04	54.00	-28.96	AVG	
3		2050.000	41.33	-1.69	39.64	74.00	-34.36	peak	
4		2050.000	28.69	-1.69	27.00	54.00	-27.00	AVG	
5		2510.000	41.21	0.12	41.33	74.00	-32.67	peak	
6		2510.000	28.14	0.12	28.26	54.00	-25.74	AVG	
7		3280.000	39.60	2.49	42.09	74.00	-31.91	peak	
8		3280.000	26.82	2.49	29.31	54.00	-24.69	AVG	
9		4195.000	37.44	6.74	44.18	74.00	-29.82	peak	
10	*	4195.000	24.17	6.74	30.91	54.00	-23.09	AVG	
11		5145.000	35.93	8.07	44.00	74.00	-30.00	peak	
12		5145.000	22.70	8.07	30.77	54.00	-23.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD


Horizontal

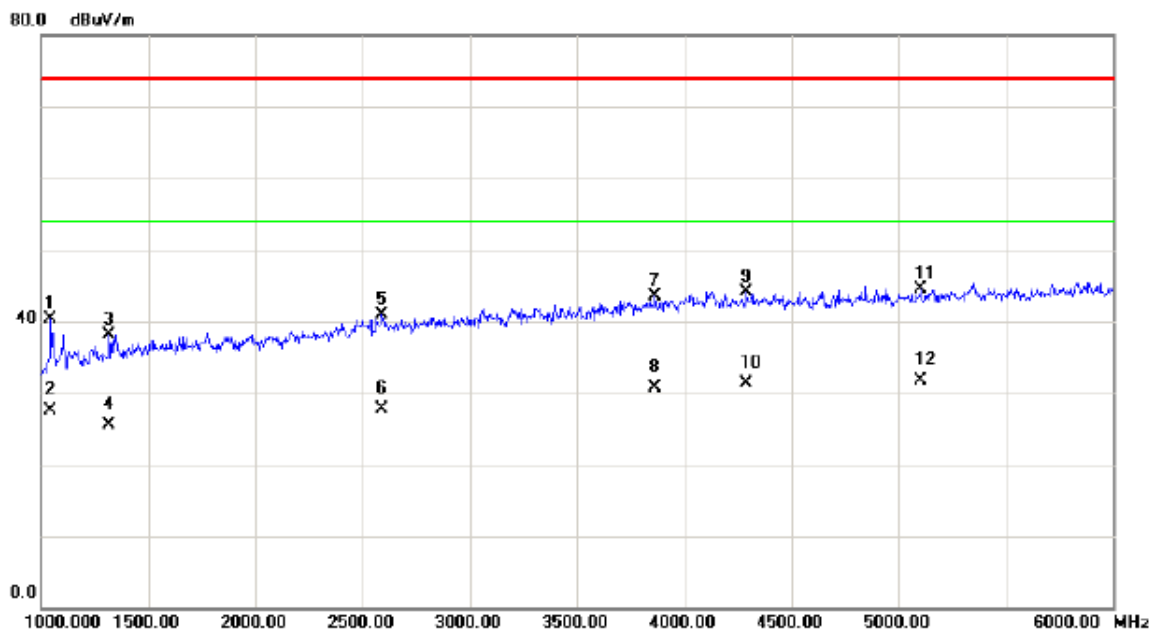

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1045.000	45.77	-5.41	40.36	74.00	-33.64	peak	
2		1045.000	32.99	-5.41	27.58	54.00	-26.42	AVG	
3		1315.000	42.81	-4.61	38.20	74.00	-35.80	peak	
4		1315.000	30.06	-4.61	25.45	54.00	-28.55	AVG	
5		2590.000	40.56	0.40	40.96	74.00	-33.04	peak	
6		2590.000	27.26	0.40	27.66	54.00	-26.34	AVG	
7		3865.000	37.84	5.64	43.48	74.00	-30.52	peak	
8		3865.000	24.97	5.64	30.61	54.00	-23.39	AVG	
9		4290.000	37.28	6.80	44.08	74.00	-29.92	peak	
10		4290.000	24.43	6.80	31.23	54.00	-22.77	AVG	
11		5105.000	36.53	7.96	44.49	74.00	-29.51	peak	
12	*	5105.000	23.71	7.96	31.67	54.00	-22.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Vertical

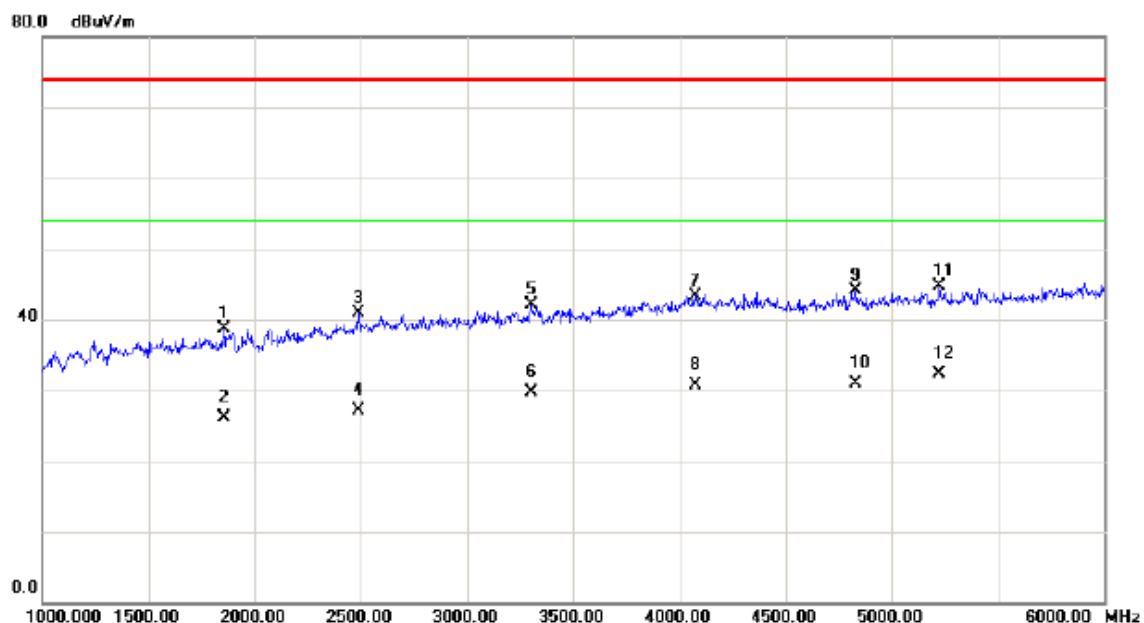

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1855.000	41.29	-2.51	38.78	74.00	-35.22	peak	
2		1855.000	28.61	-2.51	26.10	54.00	-27.90	AVG	
3		2490.000	40.83	0.05	40.88	74.00	-33.12	peak	
4		2490.000	27.06	0.05	27.11	54.00	-26.89	AVG	
5		3305.000	39.48	2.54	42.02	74.00	-31.98	peak	
6		3305.000	27.15	2.54	29.69	54.00	-24.31	AVG	
7		4075.000	36.74	6.66	43.40	74.00	-30.60	peak	
8		4075.000	24.04	6.66	30.70	54.00	-23.30	AVG	
9		4830.000	36.62	7.40	44.02	74.00	-29.98	peak	
10		4830.000	23.57	7.40	30.97	54.00	-23.03	AVG	
11		5225.000	36.45	8.31	44.76	74.00	-29.24	peak	
12	*	5225.000	24.07	8.31	32.38	54.00	-21.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD


Horizontal

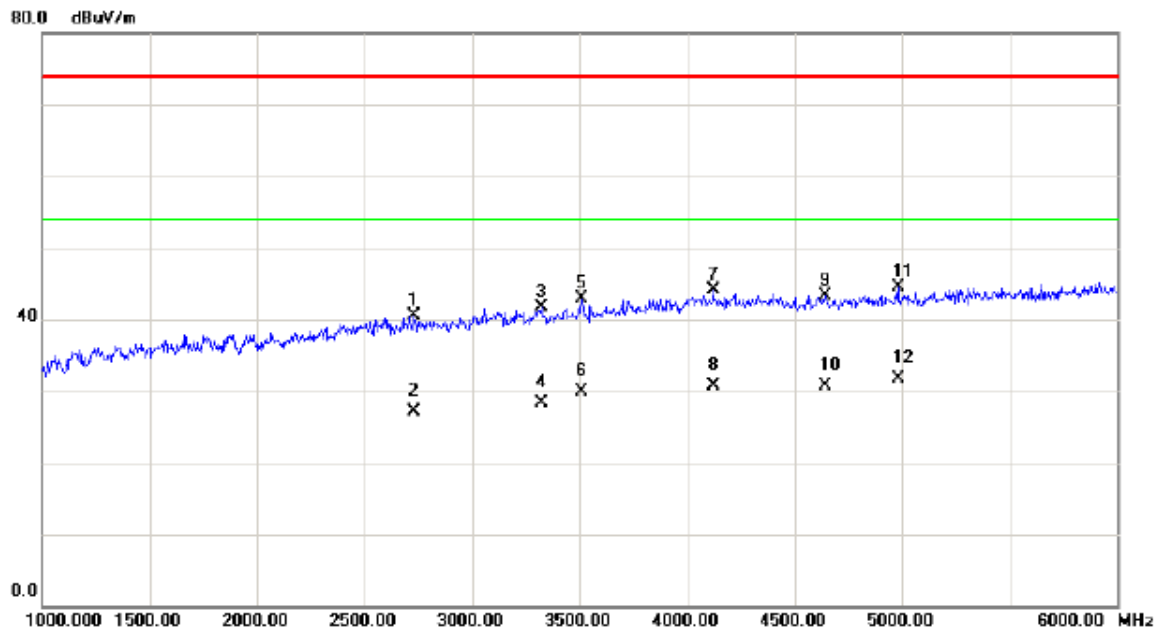

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2730.000	39.63	0.90	40.53	74.00	-33.47	peak	
2		2730.000	26.25	0.90	27.15	54.00	-26.85	AVG	
3		3320.000	39.19	2.58	41.77	74.00	-32.23	peak	
4		3320.000	25.70	2.58	28.28	54.00	-25.72	AVG	
5		3510.000	39.74	3.08	42.82	74.00	-31.18	peak	
6		3510.000	26.90	3.08	29.98	54.00	-24.02	AVG	
7		4120.000	37.37	6.69	44.06	74.00	-29.94	peak	
8		4120.000	24.06	6.69	30.75	54.00	-23.25	AVG	
9		4640.000	36.21	7.11	43.32	74.00	-30.68	peak	
10		4640.000	23.54	7.11	30.65	54.00	-23.35	AVG	
11		4980.000	36.83	7.61	44.44	74.00	-29.56	peak	
12	*	4980.000	24.17	7.61	31.78	54.00	-22.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Vertical

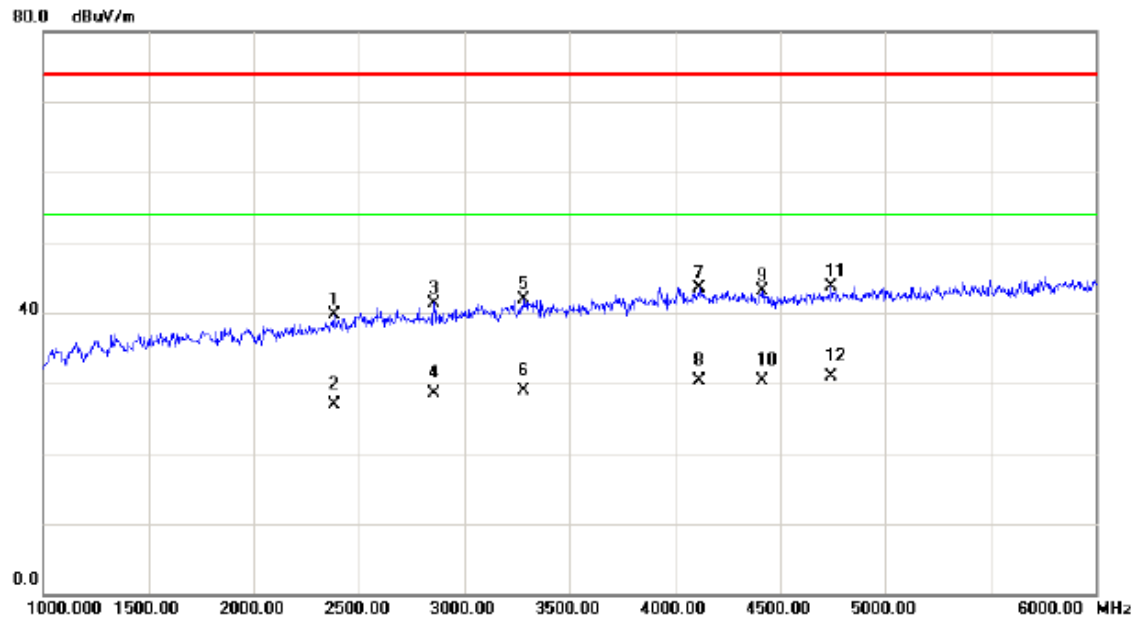

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2380.000	40.02	-0.39	39.63	74.00	-34.37	peak	
2		2380.000	27.36	-0.39	26.97	54.00	-27.03	AVG	
3		2855.000	40.07	1.33	41.40	74.00	-32.60	peak	
4		2855.000	27.19	1.33	28.52	54.00	-25.48	AVG	
5		3285.000	39.42	2.50	41.92	74.00	-32.08	peak	
6		3285.000	26.43	2.50	28.93	54.00	-25.07	AVG	
7		4115.000	36.82	6.69	43.51	74.00	-30.49	peak	
8		4115.000	23.61	6.69	30.30	54.00	-23.70	AVG	
9		4415.000	36.33	6.86	43.19	74.00	-30.81	peak	
10		4415.000	23.46	6.86	30.32	54.00	-23.68	AVG	
11		4745.000	36.48	7.27	43.75	74.00	-30.25	peak	
12	*	4745.000	23.72	7.27	30.99	54.00	-23.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal

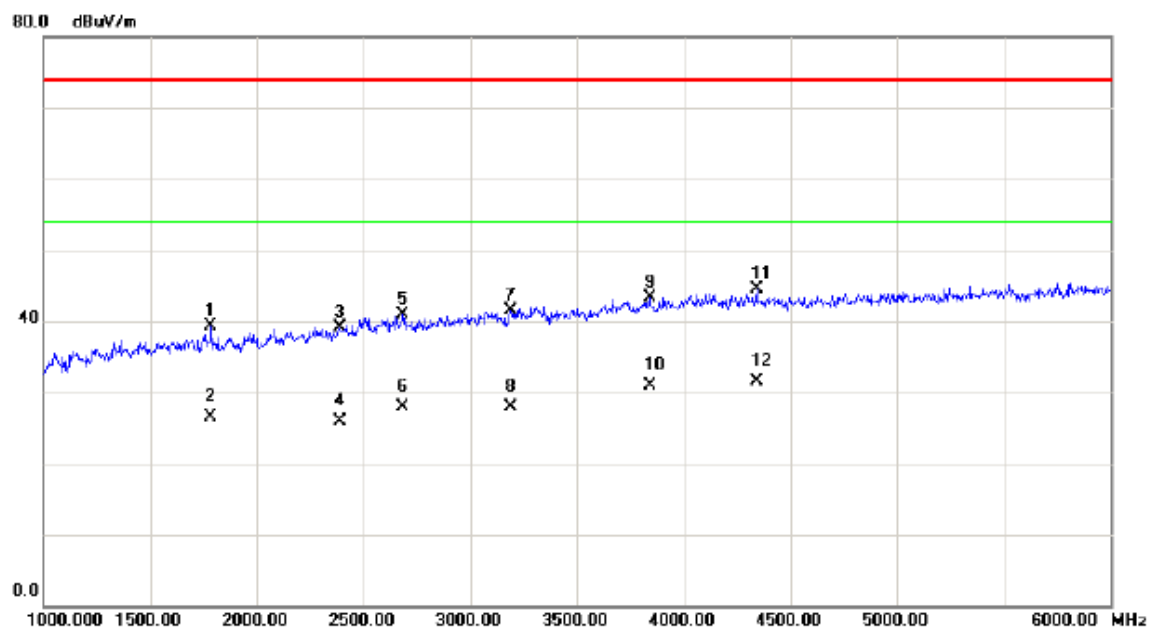

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		1785.000	42.06	-2.82	39.24	74.00	-34.76	peak	
2		1785.000	29.26	-2.82	26.44	54.00	-27.56	AVG	
3		2390.000	39.48	-0.35	39.13	74.00	-34.87	peak	
4		2390.000	26.20	-0.35	25.85	54.00	-28.15	AVG	
5		2685.000	40.15	0.73	40.88	74.00	-33.12	peak	
6		2685.000	27.15	0.73	27.88	54.00	-26.12	AVG	
7		3190.000	39.14	2.28	41.42	74.00	-32.58	peak	
8		3190.000	25.54	2.28	27.82	54.00	-26.18	AVG	
9		3840.000	37.86	5.46	43.32	74.00	-30.68	peak	
10		3840.000	25.40	5.46	30.86	54.00	-23.14	AVG	
11		4340.000	37.59	6.83	44.42	74.00	-29.58	peak	
12	*	4340.000	24.63	6.83	31.46	54.00	-22.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Vertical

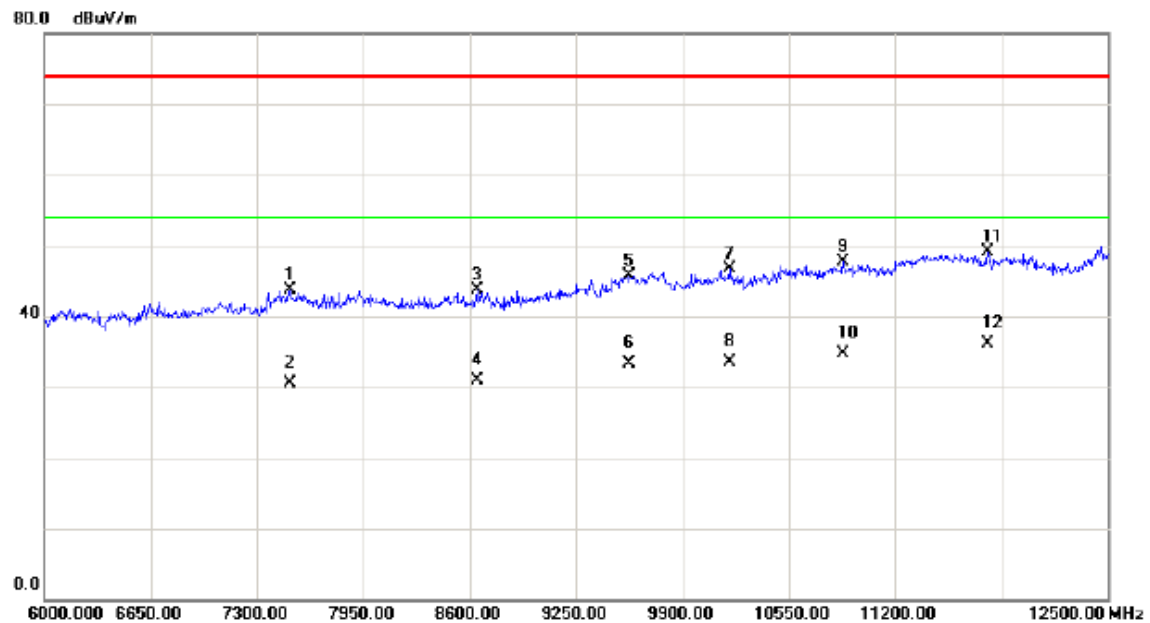

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7501.500	27.64	15.98	43.62	74.00	-30.38	peak	
2		7501.500	14.56	15.98	30.54	54.00	-23.46	AVG	
3		8645.500	28.07	15.62	43.69	74.00	-30.31	peak	
4		8645.500	15.23	15.62	30.85	54.00	-23.15	AVG	
5		9575.000	30.35	15.30	45.65	74.00	-28.35	peak	
6		9575.000	17.91	15.30	33.21	54.00	-20.79	AVG	
7		10186.00	31.36	15.29	46.65	74.00	-27.35	peak	
8		10186.00	18.23	15.29	33.52	54.00	-20.48	AVG	
9		10881.50	28.85	18.87	47.72	74.00	-26.28	peak	
10		10881.50	15.74	18.87	34.61	54.00	-19.39	AVG	
11		11765.50	27.19	21.83	49.02	74.00	-24.98	peak	
12	*	11765.50	14.23	21.83	36.06	54.00	-17.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD


Horizontal

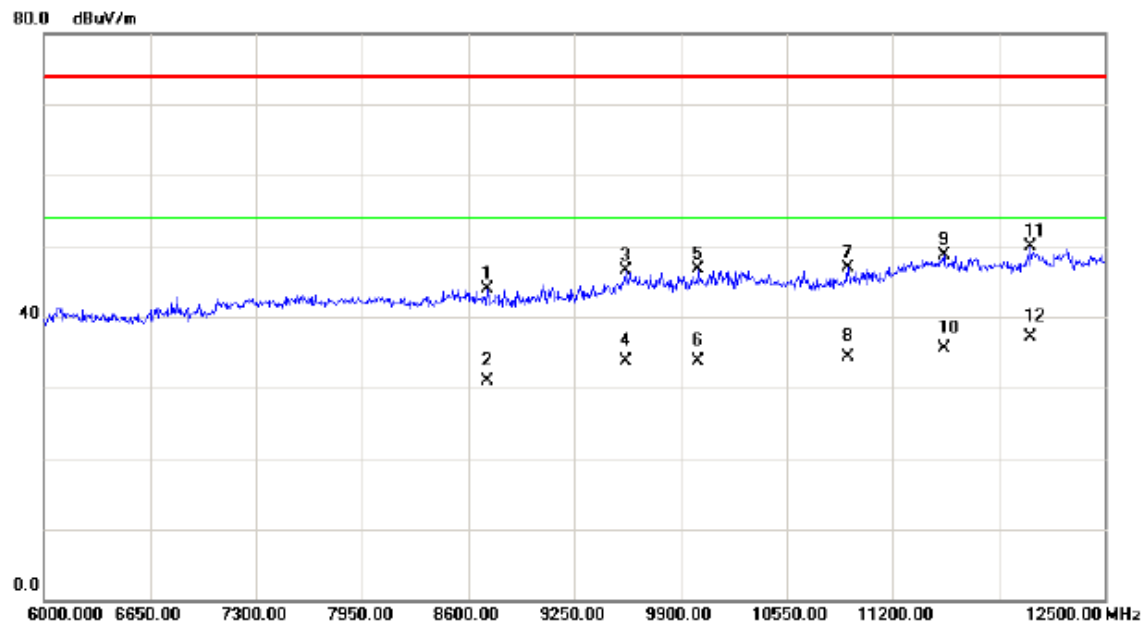

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8717.000	28.19	15.73	43.92	74.00	-30.08	peak	
2		8717.000	15.26	15.73	30.99	54.00	-23.01	AVG	
3		9568.500	31.28	15.30	46.58	74.00	-27.42	peak	
4		9568.500	18.47	15.30	33.77	54.00	-20.23	AVG	
5		10010.50	30.67	16.02	46.69	74.00	-27.31	peak	
6		10010.50	17.62	16.02	33.64	54.00	-20.36	AVG	
7		10927.00	27.45	19.45	46.90	74.00	-27.10	peak	
8		10927.00	14.92	19.45	34.37	54.00	-19.63	AVG	
9		11512.00	28.58	20.22	48.80	74.00	-25.20	peak	
10		11512.00	15.32	20.22	35.54	54.00	-18.46	AVG	
11		12045.00	27.07	22.81	49.88	74.00	-24.12	peak	
12	*	12045.00	14.22	22.81	37.03	54.00	-16.97	AVG	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Vertical

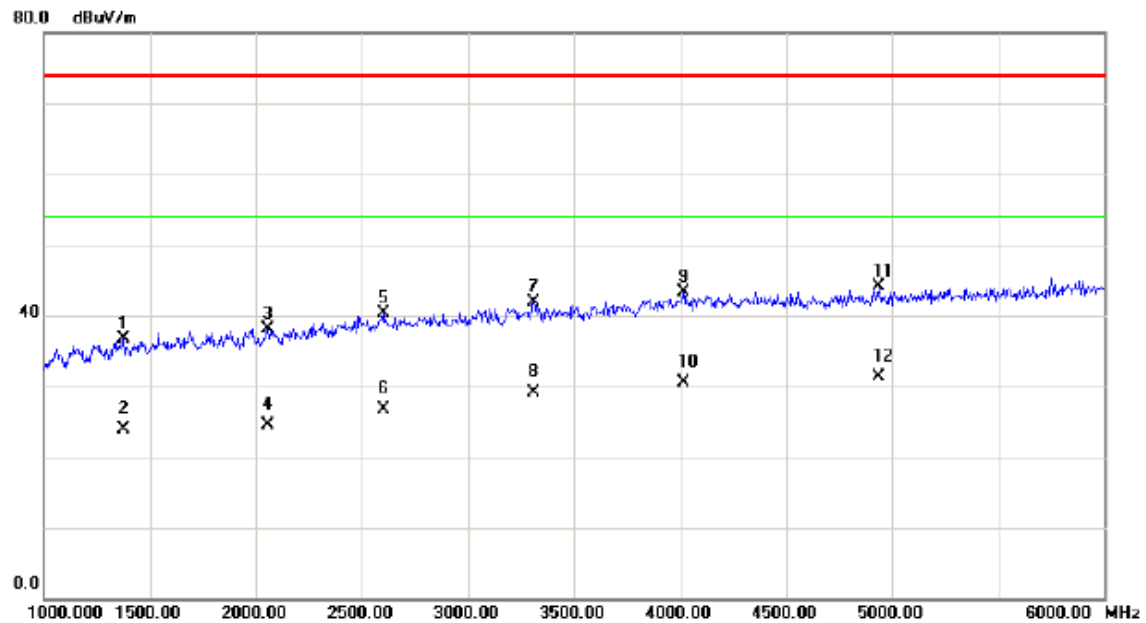

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1375.000	41.09	-4.44	36.65	74.00	-37.35	peak	
2		1375.000	28.37	-4.44	23.93	54.00	-30.07	AVG	
3		2055.000	39.83	-1.66	38.17	74.00	-35.83	peak	
4		2055.000	26.21	-1.66	24.55	54.00	-29.45	AVG	
5		2600.000	39.79	0.43	40.22	74.00	-33.78	peak	
6		2600.000	26.26	0.43	26.69	54.00	-27.31	AVG	
7		3310.000	39.25	2.56	41.81	74.00	-32.19	peak	
8		3310.000	26.51	2.56	29.07	54.00	-24.93	AVG	
9		4015.000	36.67	6.63	43.30	74.00	-30.70	peak	
10		4015.000	23.96	6.63	30.59	54.00	-23.41	AVG	
11		4935.000	36.52	7.55	44.07	74.00	-29.93	peak	
12	*	4935.000	23.84	7.55	31.39	54.00	-22.61	AVG	

Test Voltage:	DC 3.7V
Test Mode:	Playing+idle+speaker


Horizontal

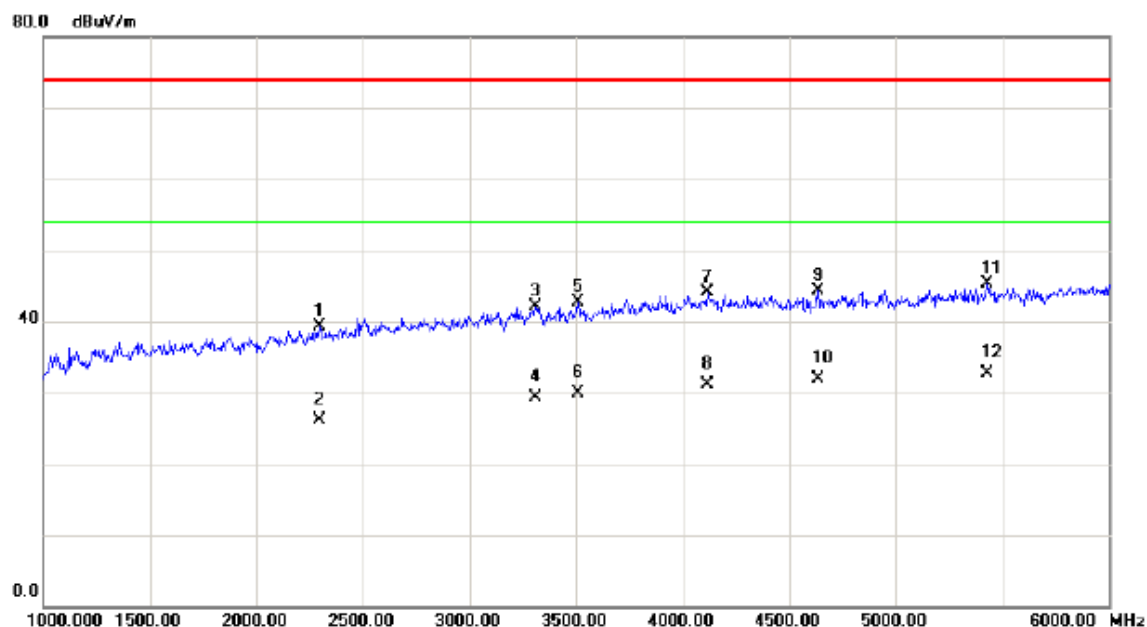

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2295.000	40.11	-0.73	39.38	74.00	-34.62	peak	
2		2295.000	26.87	-0.73	26.14	54.00	-27.86	AVG	
3		3310.000	39.53	2.56	42.09	74.00	-31.91	peak	
4		3310.000	26.79	2.56	29.35	54.00	-24.65	AVG	
5		3510.000	39.66	3.08	42.74	74.00	-31.26	peak	
6		3510.000	26.91	3.08	29.99	54.00	-24.01	AVG	
7		4115.000	37.44	6.69	44.13	74.00	-29.87	peak	
8		4115.000	24.51	6.69	31.20	54.00	-22.80	AVG	
9		4635.000	37.17	7.11	44.28	74.00	-29.72	peak	
10		4635.000	24.72	7.11	31.83	54.00	-22.17	AVG	
11		5430.000	36.35	8.94	45.29	74.00	-28.71	peak	
12	*	5430.000	23.84	8.94	32.78	54.00	-21.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

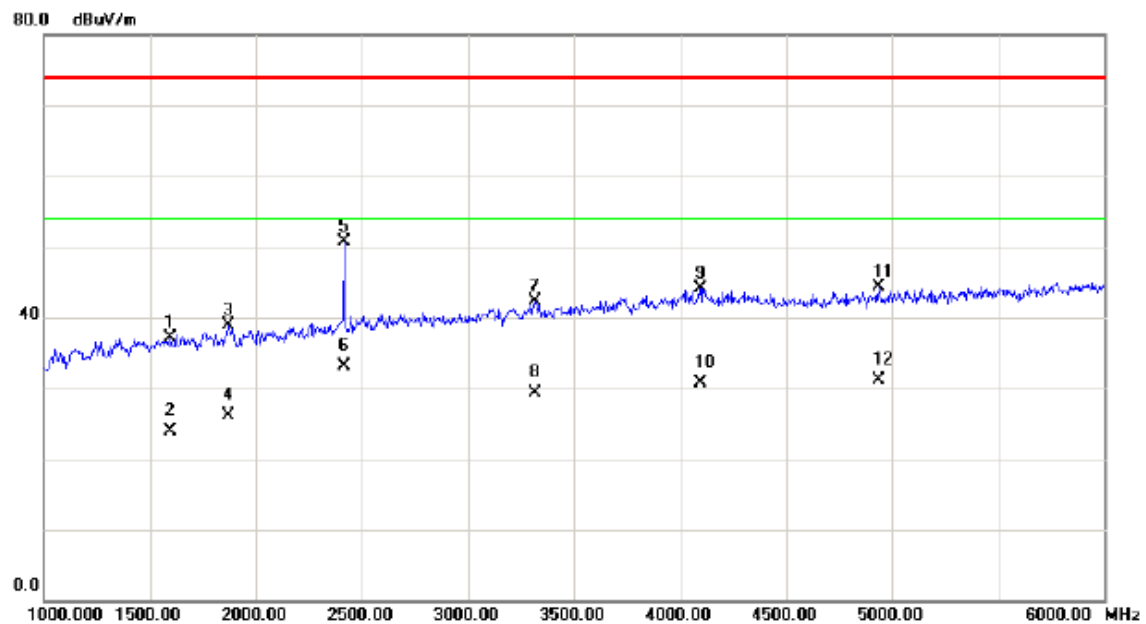

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1595.000	40.74	-3.65	37.09	74.00	-36.91	peak	
2		1595.000	27.61	-3.65	23.96	54.00	-30.04	AVG	
3		1870.000	41.29	-2.45	38.84	74.00	-35.16	peak	
4		1870.000	28.47	-2.45	26.02	54.00	-27.98	AVG	
5		2415.000	50.98	-0.25	50.73	74.00	-23.27	peak	
6	*	2415.000	33.42	-0.25	33.17	54.00	-20.83	AVG	
7		3315.000	39.71	2.57	42.28	74.00	-31.72	peak	
8		3315.000	26.68	2.57	29.25	54.00	-24.75	AVG	
9		4095.000	37.42	6.68	44.10	74.00	-29.90	peak	
10		4095.000	24.03	6.68	30.71	54.00	-23.29	AVG	
11		4935.000	36.73	7.55	44.28	74.00	-29.72	peak	
12		4935.000	23.49	7.55	31.04	54.00	-22.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

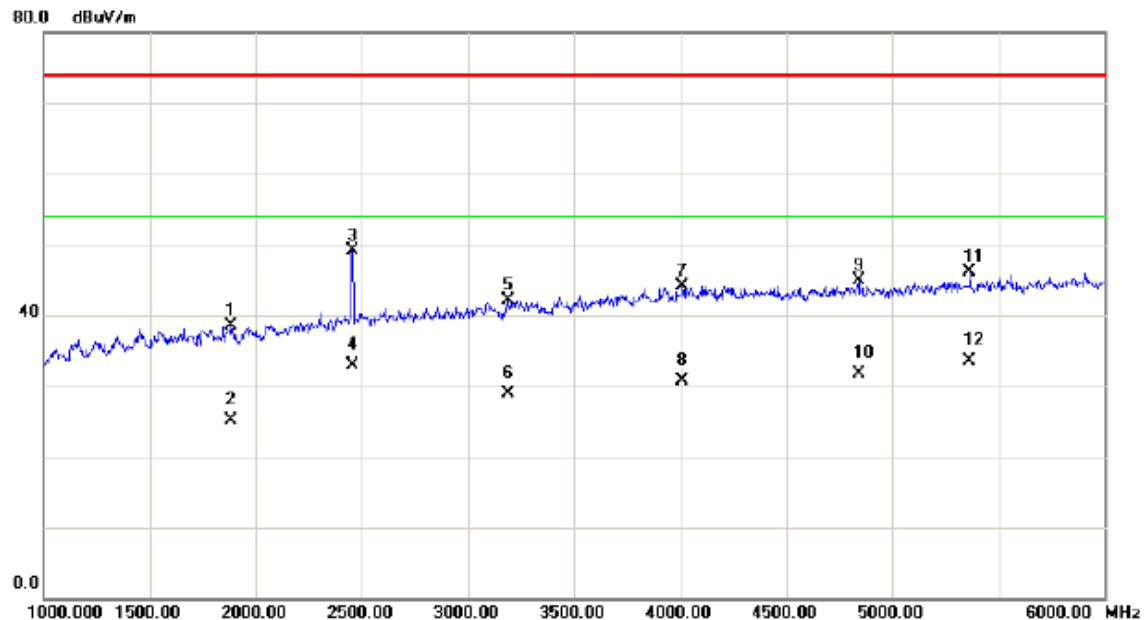

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1880.000	40.95	-2.40	38.55	74.00	-35.45	peak	
2		1880.000	27.54	-2.40	25.14	54.00	-28.86	AVG	
3		2455.000	49.24	-0.09	49.15	74.00	-24.85	peak	
4		2455.000	33.02	-0.09	32.93	54.00	-21.07	AVG	
5		3190.000	39.91	2.28	42.19	74.00	-31.81	peak	
6		3190.000	26.63	2.28	28.91	54.00	-25.09	AVG	
7		4010.000	37.41	6.62	44.03	74.00	-29.97	peak	
8		4010.000	24.02	6.62	30.64	54.00	-23.36	AVG	
9		4840.000	37.52	7.41	44.93	74.00	-29.07	peak	
10		4840.000	24.35	7.41	31.76	54.00	-22.24	AVG	
11		5365.000	37.28	8.74	46.02	74.00	-27.98	peak	
12	*	5365.000	24.77	8.74	33.51	54.00	-20.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Vertical

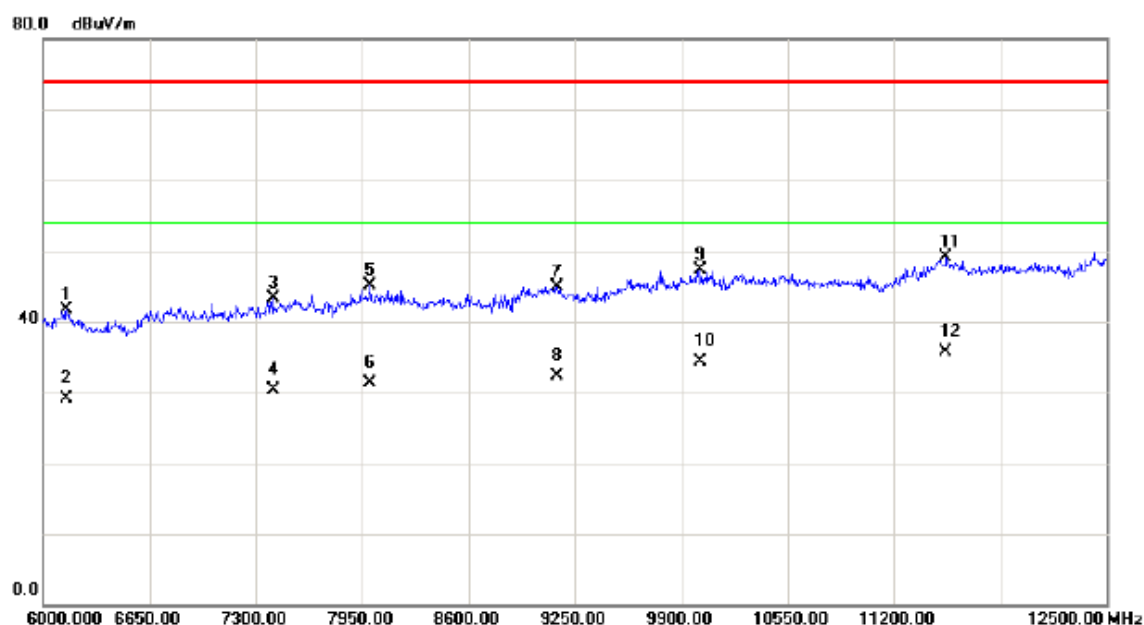

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		6143.000	31.26	10.37	41.63	74.00	-32.37	peak	
2		6143.000	18.65	10.37	29.02	54.00	-24.98	AVG	
3		7404.000	27.68	15.58	43.26	74.00	-30.74	peak	
4		7404.000	14.75	15.58	30.33	54.00	-23.67	AVG	
5		7995.500	28.99	16.09	45.08	74.00	-28.92	peak	
6		7995.500	15.24	16.09	31.33	54.00	-22.67	AVG	
7		9139.500	29.10	15.88	44.98	74.00	-29.02	peak	
8		9139.500	16.48	15.88	32.36	54.00	-21.64	AVG	
9		10017.000	31.25	15.99	47.24	74.00	-26.76	peak	
10		10017.000	18.23	15.99	34.22	54.00	-19.78	AVG	
11		11518.500	28.77	20.26	49.03	74.00	-24.97	peak	
12	*	11518.500	15.35	20.26	35.61	54.00	-18.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU


Horizontal

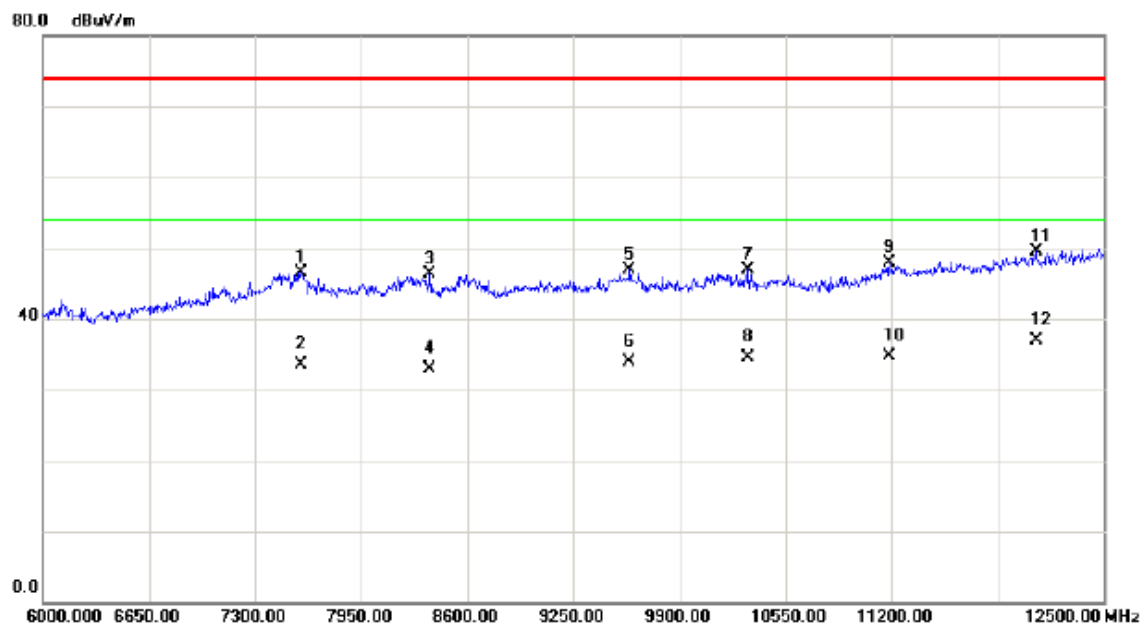

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7579.500	30.60	16.00	46.60	74.00	-27.40	peak	
2		7579.500	17.49	16.00	33.49	54.00	-20.51	AVG	
3		8372.500	30.64	15.57	46.21	74.00	-27.79	peak	
4		8372.500	17.35	15.57	32.92	54.00	-21.08	AVG	
5		9594.500	31.48	15.34	46.82	74.00	-27.18	peak	
6		9594.500	18.64	15.34	33.98	54.00	-20.02	AVG	
7		10322.50	32.27	14.73	47.00	74.00	-27.00	peak	
8		10322.50	19.74	14.73	34.47	54.00	-19.53	AVG	
9		11187.00	27.54	20.30	47.84	74.00	-26.16	peak	
10		11187.00	14.33	20.30	34.63	54.00	-19.37	AVG	
11		12084.00	27.20	22.37	49.57	74.00	-24.43	peak	
12	*	12084.00	14.59	22.37	36.96	54.00	-17.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

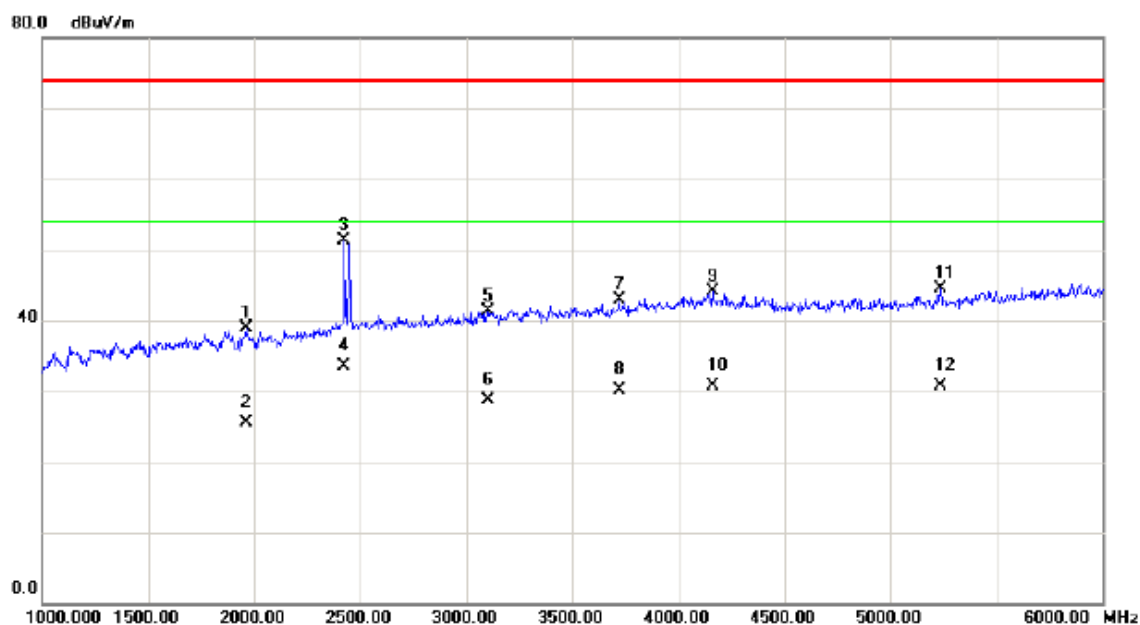

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1960.000	40.90	-2.06	38.84	74.00	-35.16	peak	
2		1960.000	27.62	-2.06	25.56	54.00	-28.44	AVG	
3		2420.000	51.49	-0.23	51.26	74.00	-22.74	peak	
4	*	2420.000	33.80	-0.23	33.57	54.00	-20.43	AVG	
5		3105.000	39.27	2.08	41.35	74.00	-32.65	peak	
6		3105.000	26.57	2.08	28.65	54.00	-25.35	AVG	
7		3720.000	38.26	4.60	42.86	74.00	-31.14	peak	
8		3720.000	25.59	4.60	30.19	54.00	-23.81	AVG	
9		4160.000	37.41	6.71	44.12	74.00	-29.88	peak	
10		4160.000	24.08	6.71	30.79	54.00	-23.21	AVG	
11		5235.000	36.10	8.34	44.44	74.00	-29.56	peak	
12		5235.000	22.33	8.34	30.67	54.00	-23.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

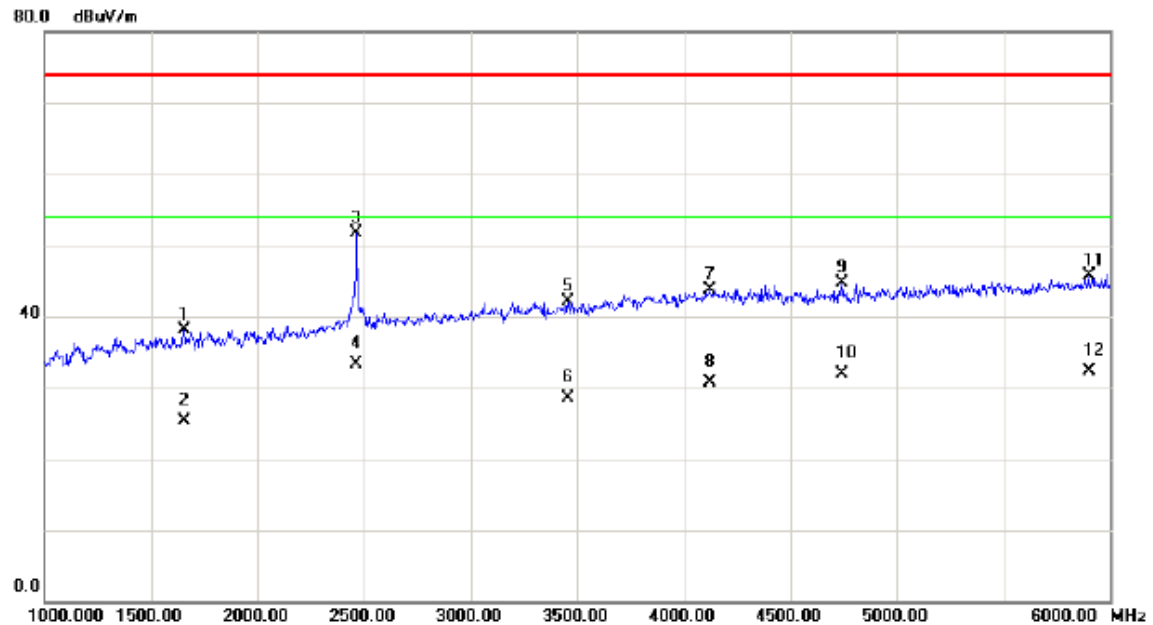

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1655.000	41.55	-3.39	38.16	74.00	-35.84	peak	
2		1655.000	28.65	-3.39	25.26	54.00	-28.74	AVG	
3		2465.000	51.78	-0.06	51.72	74.00	-22.28	peak	
4	*	2465.000	33.35	-0.06	33.29	54.00	-20.71	AVG	
5		3455.000	39.16	2.89	42.05	74.00	-31.95	peak	
6		3455.000	25.64	2.89	28.53	54.00	-25.47	AVG	
7		4125.000	37.06	6.71	43.77	74.00	-30.23	peak	
8		4125.000	24.03	6.71	30.74	54.00	-23.26	AVG	
9		4745.000	37.47	7.27	44.74	74.00	-29.26	peak	
10		4745.000	24.68	7.27	31.95	54.00	-22.05	AVG	
11		5900.000	36.02	9.63	45.65	74.00	-28.35	peak	
12		5900.000	22.73	9.63	32.36	54.00	-21.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Vertical

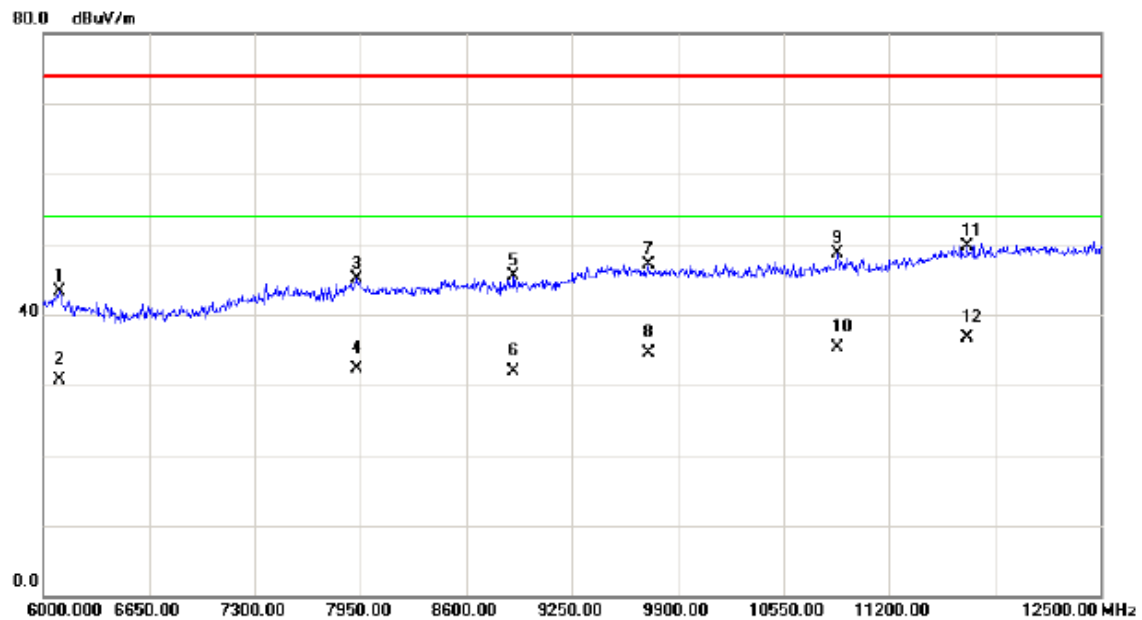

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6097.500	33.04	10.17	43.21	74.00	-30.79	peak	
2		6097.500	20.54	10.17	30.71	54.00	-23.29	AVG	
3		7924.000	28.95	16.07	45.02	74.00	-28.98	peak	
4		7924.000	16.26	16.07	32.33	54.00	-21.67	AVG	
5		8892.500	29.49	16.00	45.49	74.00	-28.51	peak	
6		8892.500	15.96	16.00	31.96	54.00	-22.04	AVG	
7		9718.000	31.61	15.56	47.17	74.00	-26.83	peak	
8		9718.000	18.91	15.56	34.47	54.00	-19.53	AVG	
9		10881.500	29.85	18.87	48.72	74.00	-25.28	peak	
10		10881.500	16.41	18.87	35.28	54.00	-18.72	AVG	
11		11681.000	28.46	21.29	49.75	74.00	-24.25	peak	
12	*	11681.000	15.39	21.29	36.68	54.00	-17.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK


Horizontal

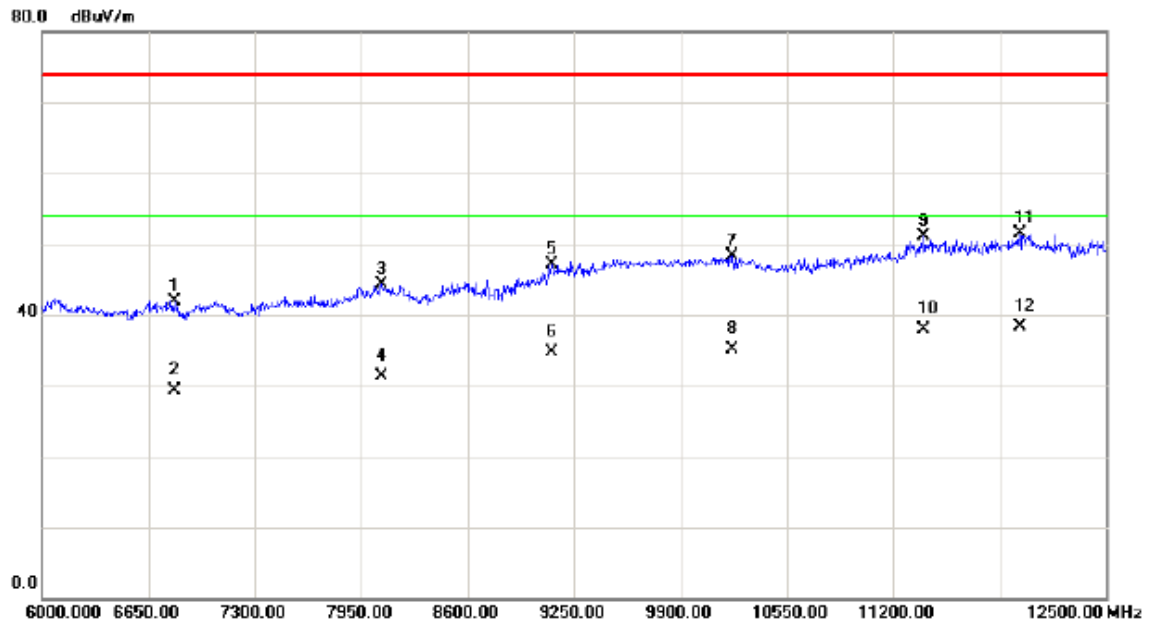

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6812.500	28.78	13.13	41.91	74.00	-32.09	peak	
2		6812.500	16.27	13.13	29.40	54.00	-24.60	AVG	
3		8073.500	28.27	15.99	44.26	74.00	-29.74	peak	
4		8073.500	15.34	15.99	31.33	54.00	-22.67	AVG	
5		9113.500	31.23	15.94	47.17	74.00	-26.83	peak	
6		9113.500	18.81	15.94	34.75	54.00	-19.25	AVG	
7		10218.500	33.12	15.16	48.28	74.00	-25.72	peak	
8		10218.500	19.95	15.16	35.11	54.00	-18.89	AVG	
9		11388.500	30.91	20.19	51.10	74.00	-22.90	peak	
10		11388.500	17.81	20.19	38.00	54.00	-16.00	AVG	
11		11973.500	28.28	23.15	51.43	74.00	-22.57	peak	
12	*	11973.500	15.22	23.15	38.37	54.00	-15.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

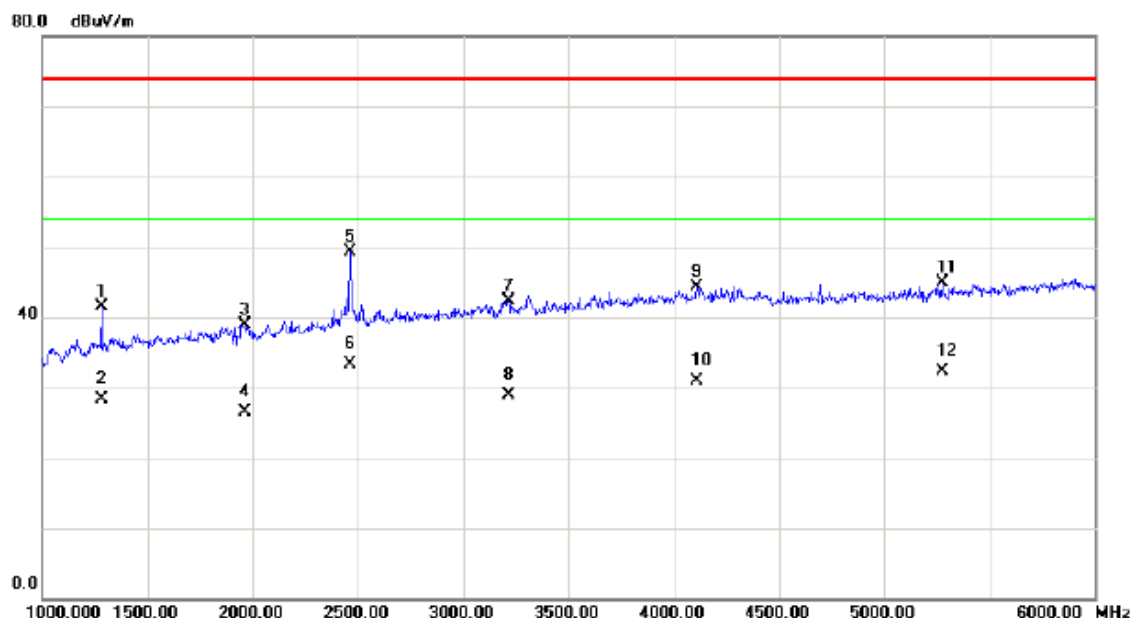

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1280.000	46.28	-4.72	41.56	74.00	-32.44	peak	
2		1280.000	32.97	-4.72	28.25	54.00	-25.75	AVG	
3		1960.000	41.06	-2.06	39.00	74.00	-35.00	peak	
4		1960.000	28.61	-2.06	26.55	54.00	-27.45	AVG	
5		2465.000	49.31	-0.06	49.25	74.00	-24.75	peak	
6	*	2465.000	33.37	-0.06	33.31	54.00	-20.69	AVG	
7		3215.000	40.06	2.34	42.40	74.00	-31.60	peak	
8		3215.000	26.65	2.34	28.99	54.00	-25.01	AVG	
9		4110.000	37.54	6.69	44.23	74.00	-29.77	peak	
10		4110.000	24.23	6.69	30.92	54.00	-23.08	AVG	
11		5275.000	36.41	8.47	44.88	74.00	-29.12	peak	
12		5275.000	23.93	8.47	32.40	54.00	-21.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Horizontal

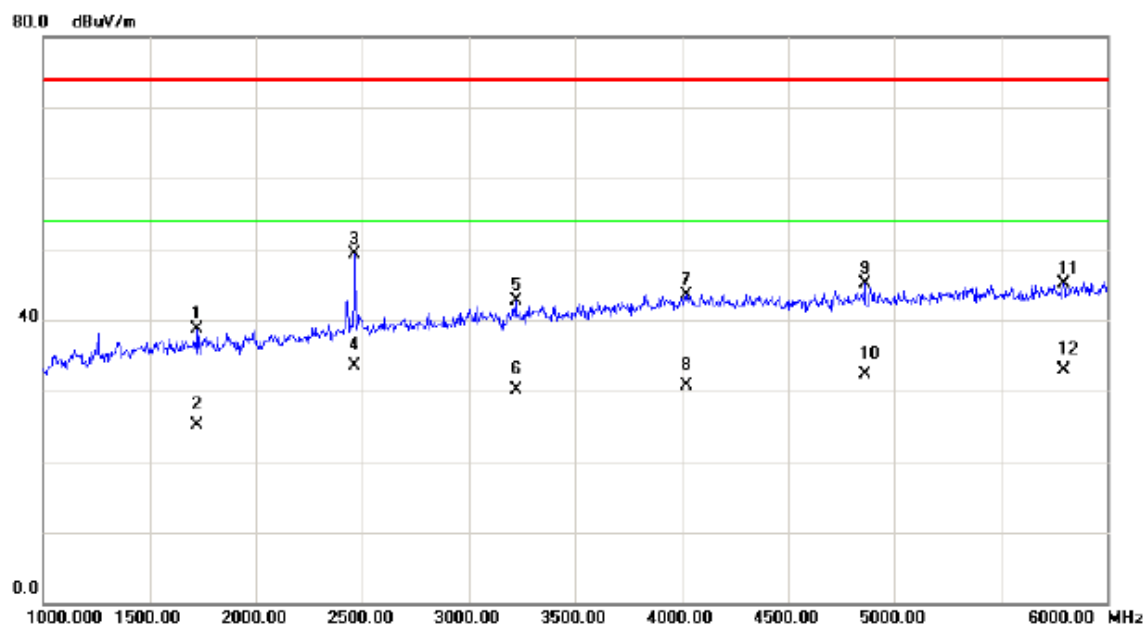

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		1725.000	41.84	-3.07	38.77	74.00	-35.23	peak	
2		1725.000	28.26	-3.07	25.19	54.00	-28.81	AVG	
3		2465.000	49.34	-0.06	49.28	74.00	-24.72	peak	
4	*	2465.000	33.53	-0.06	33.47	54.00	-20.53	AVG	
5		3220.000	40.34	2.35	42.69	74.00	-31.31	peak	
6		3220.000	27.66	2.35	30.01	54.00	-23.99	AVG	
7		4025.000	36.88	6.63	43.51	74.00	-30.49	peak	
8		4025.000	24.03	6.63	30.66	54.00	-23.34	AVG	
9		4860.000	37.58	7.45	45.03	74.00	-28.97	peak	
10		4860.000	24.86	7.45	32.31	54.00	-21.69	AVG	
11		5795.000	35.59	9.50	45.09	74.00	-28.91	peak	
12		5795.000	23.34	9.50	32.84	54.00	-21.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Vertical

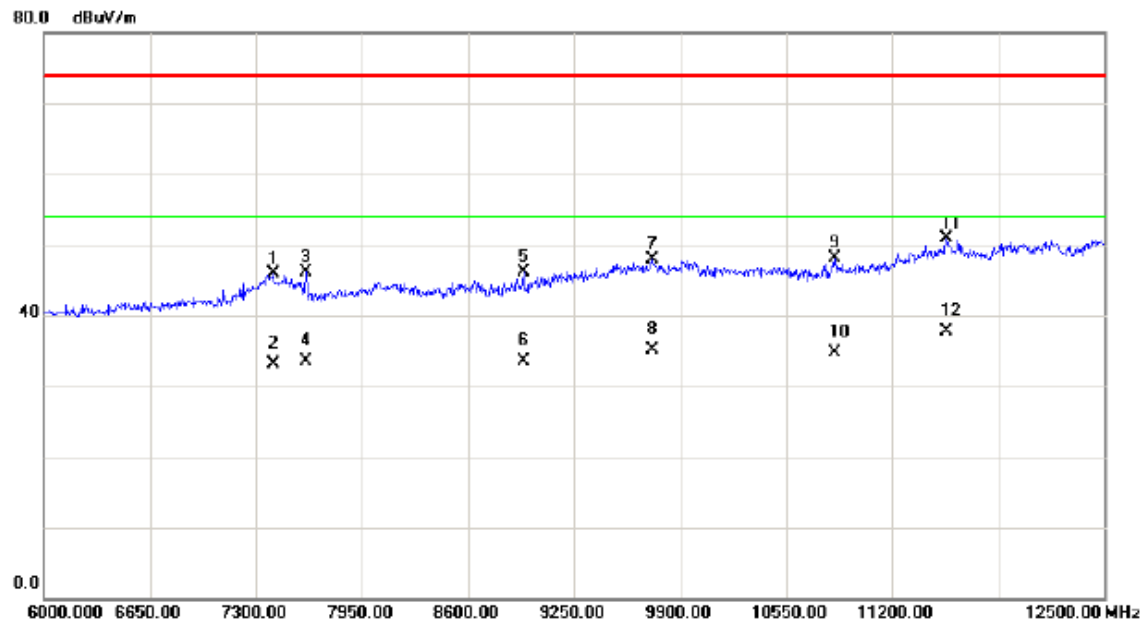

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7404.000	30.30	15.58	45.88	74.00	-28.12	peak	
2		7404.000	17.62	15.58	33.20	54.00	-20.80	AVG	
3		7605.500	30.16	16.01	46.17	74.00	-27.83	peak	
4		7605.500	17.42	16.01	33.43	54.00	-20.57	AVG	
5		8938.000	30.11	16.06	46.17	74.00	-27.83	peak	
6		8938.000	17.35	16.06	33.41	54.00	-20.59	AVG	
7		9731.000	32.28	15.58	47.86	74.00	-26.14	peak	
8		9731.000	19.47	15.58	35.05	54.00	-18.95	AVG	
9		10849.00	29.68	18.45	48.13	74.00	-25.87	peak	
10		10849.00	16.20	18.45	34.65	54.00	-19.35	AVG	
11		11531.50	30.54	20.35	50.89	74.00	-23.11	peak	
12	*	11531.50	17.42	20.35	37.77	54.00	-16.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG


Horizontal

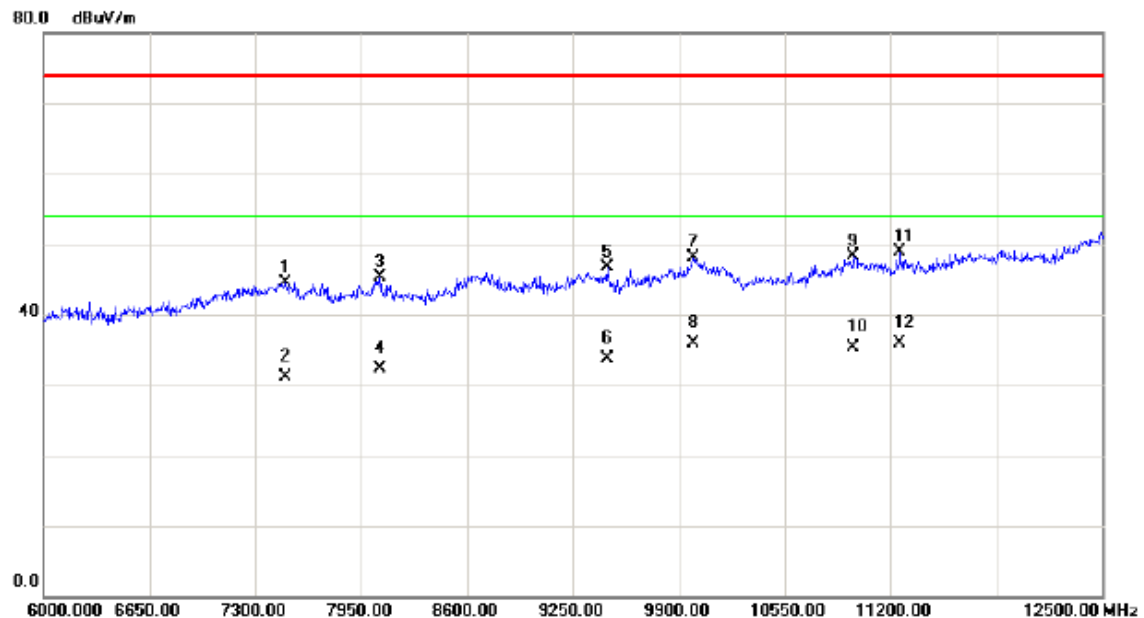

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7482.000	28.65	15.91	44.56	74.00	-29.44	peak	
2		7482.000	15.26	15.91	31.17	54.00	-22.83	AVG	
3		8067.000	29.33	16.00	45.33	74.00	-28.67	peak	
4		8067.000	16.35	16.00	32.35	54.00	-21.65	AVG	
5		9458.000	31.35	15.26	46.61	74.00	-27.39	peak	
6		9458.000	18.37	15.26	33.63	54.00	-20.37	AVG	
7		9991.000	32.09	16.04	48.13	74.00	-25.87	peak	
8	*	9991.000	19.82	16.04	35.86	54.00	-18.14	AVG	
9		10972.50	28.25	20.04	48.29	74.00	-25.71	peak	
10		10972.50	15.27	20.04	35.31	54.00	-18.69	AVG	
11		11258.50	28.59	20.26	48.85	74.00	-25.15	peak	
12		11258.50	15.55	20.26	35.81	54.00	-18.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Vertical

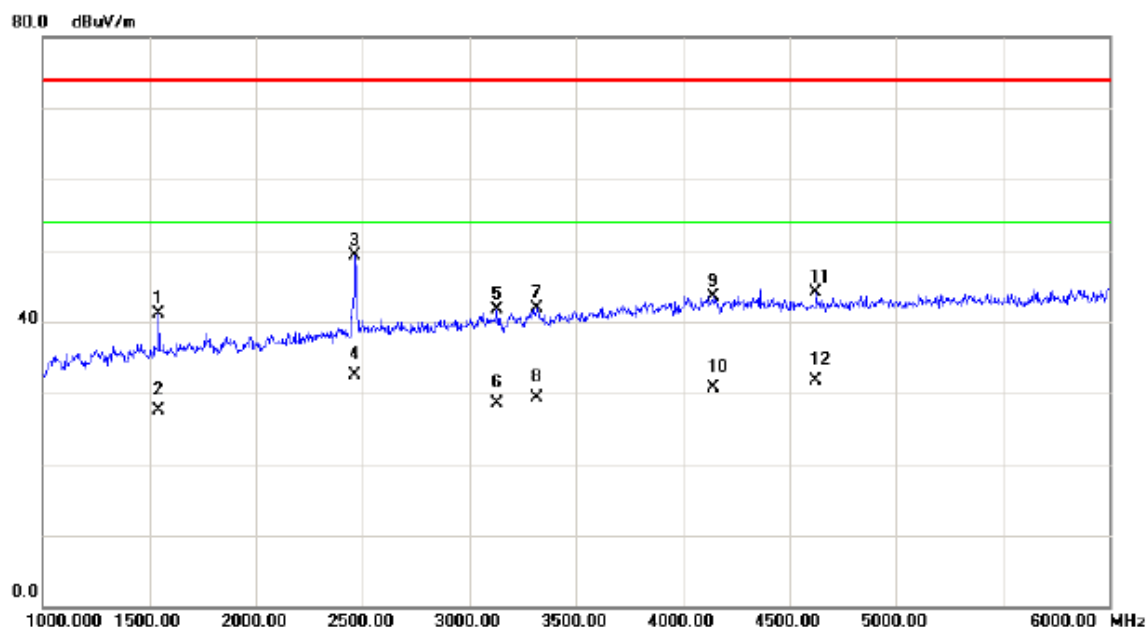

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1545.000	44.97	-3.86	41.11	74.00	-32.89	peak	
2		1545.000	31.32	-3.86	27.46	54.00	-26.54	AVG	
3		2465.000	49.35	-0.06	49.29	74.00	-24.71	peak	
4	*	2465.000	32.47	-0.06	32.41	54.00	-21.59	AVG	
5		3130.000	39.51	2.14	41.65	74.00	-32.35	peak	
6		3130.000	26.30	2.14	28.44	54.00	-25.56	AVG	
7		3315.000	39.31	2.57	41.88	74.00	-32.12	peak	
8		3315.000	26.83	2.57	29.40	54.00	-24.60	AVG	
9		4145.000	36.86	6.70	43.56	74.00	-30.44	peak	
10		4145.000	24.06	6.70	30.76	54.00	-23.24	AVG	
11		4625.000	37.08	7.11	44.19	74.00	-29.81	peak	
12		4625.000	24.50	7.11	31.61	54.00	-22.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Horizontal

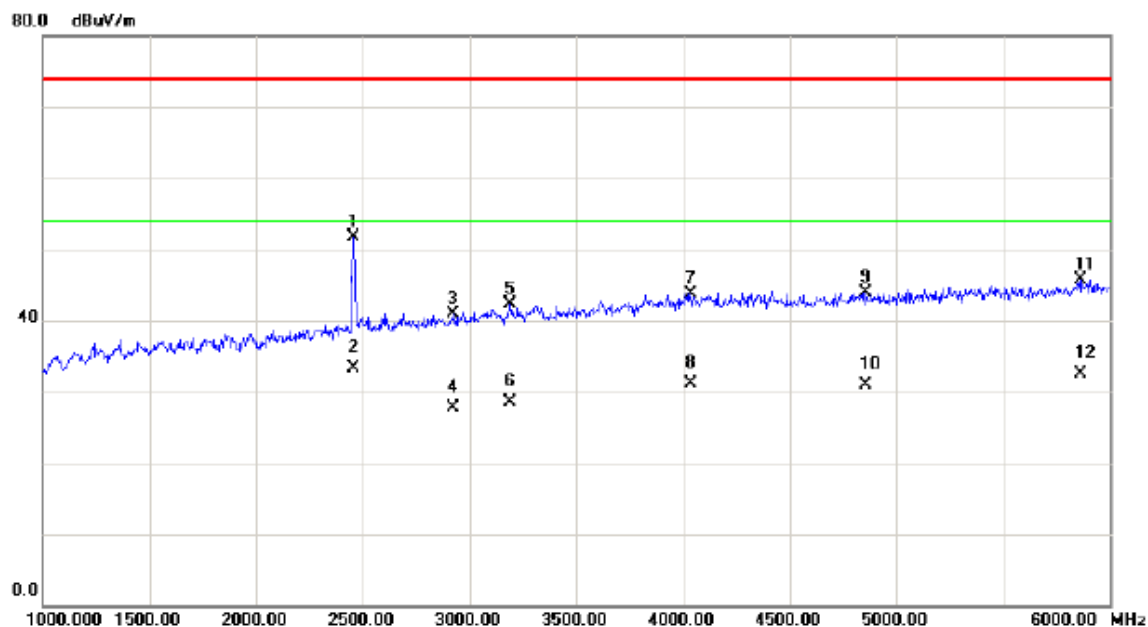

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2455.000	51.76	-0.09	51.67	74.00	-22.33	peak	
2	*	2455.000	33.40	-0.09	33.31	54.00	-20.69	AVG	
3		2925.000	39.39	1.58	40.97	74.00	-33.03	peak	
4		2925.000	26.19	1.58	27.77	54.00	-26.23	AVG	
5		3190.000	39.95	2.28	42.23	74.00	-31.77	peak	
6		3190.000	26.18	2.28	28.46	54.00	-25.54	AVG	
7		4035.000	37.04	6.65	43.69	74.00	-30.31	peak	
8		4035.000	24.48	6.65	31.13	54.00	-22.87	AVG	
9		4855.000	36.56	7.44	44.00	74.00	-30.00	peak	
10		4855.000	23.40	7.44	30.84	54.00	-23.16	AVG	
11		5865.000	36.18	9.59	45.77	74.00	-28.23	peak	
12		5865.000	22.92	9.59	32.51	54.00	-21.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Vertical

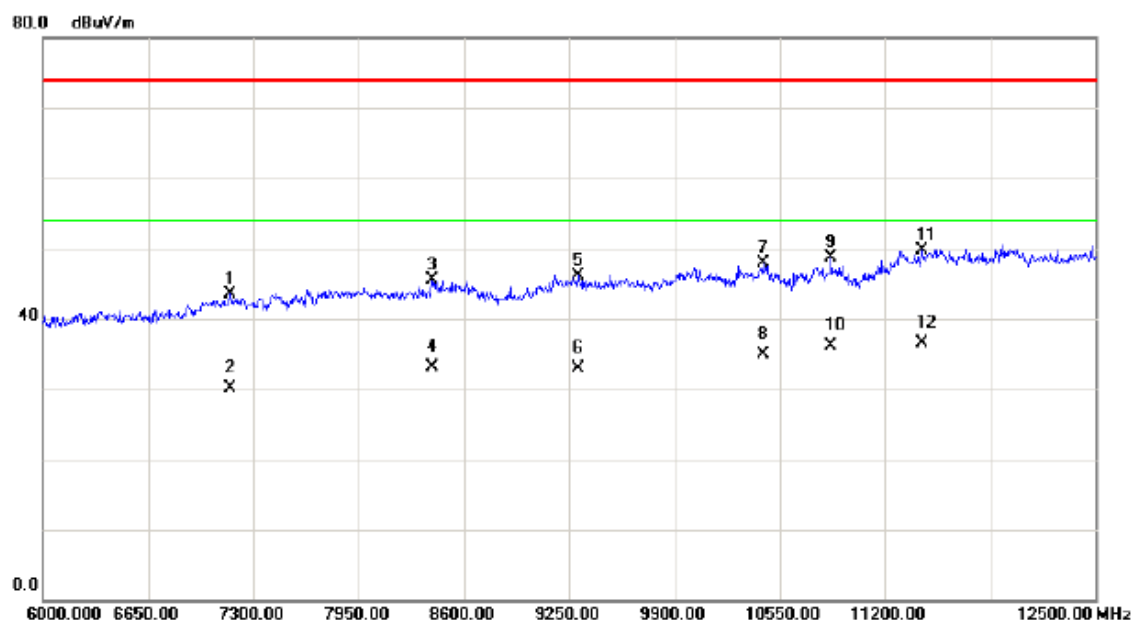

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7157.000	28.90	14.54	43.44	74.00	-30.56	peak	
2		7157.000	15.48	14.54	30.02	54.00	-23.98	AVG	
3		8405.000	30.01	15.52	45.53	74.00	-28.47	peak	
4		8405.000	17.62	15.52	33.14	54.00	-20.86	AVG	
5		9302.000	30.61	15.56	46.17	74.00	-27.83	peak	
6		9302.000	17.35	15.56	32.91	54.00	-21.09	AVG	
7		10446.00	33.60	14.21	47.81	74.00	-26.19	peak	
8		10446.00	20.62	14.21	34.83	54.00	-19.17	AVG	
9		10868.50	30.03	18.71	48.74	74.00	-25.26	peak	
10		10868.50	17.47	18.71	36.18	54.00	-17.82	AVG	
11		11427.50	29.52	20.18	49.70	74.00	-24.30	peak	
12	*	11427.50	16.38	20.18	36.56	54.00	-17.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug)


Horizontal

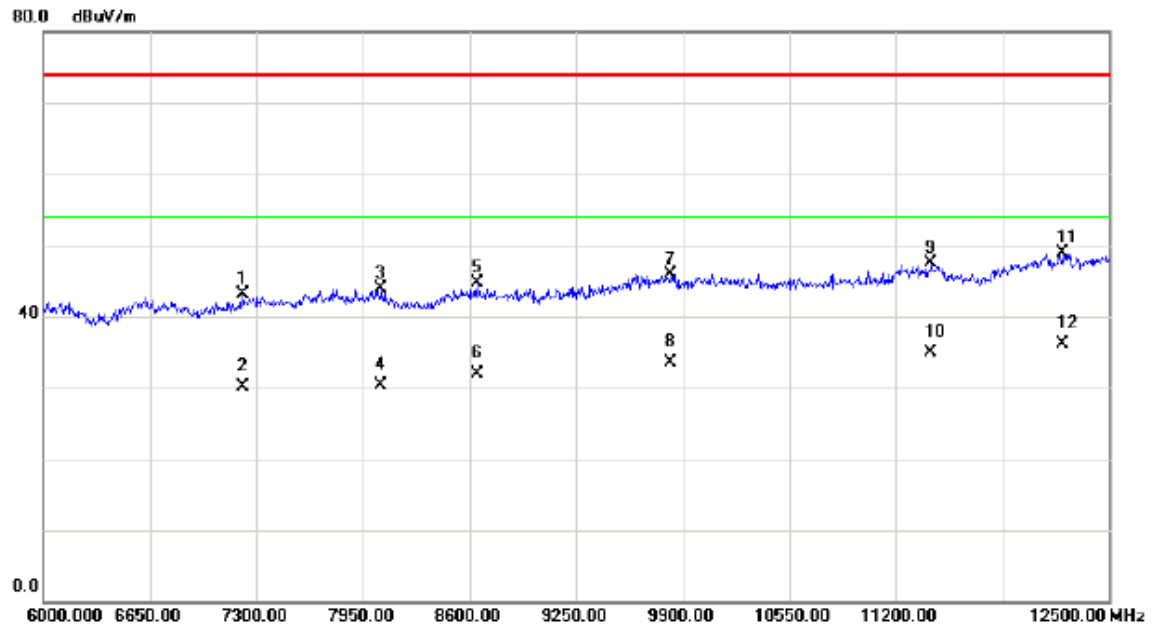

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		7215.500	28.41	14.78	43.19	74.00	-30.81	peak	
2		7215.500	15.26	14.78	30.04	54.00	-23.96	AVG	
3		8060.500	27.96	16.01	43.97	74.00	-30.03	peak	
4		8060.500	14.23	16.01	30.24	54.00	-23.76	AVG	
5		8645.500	29.11	15.62	44.73	74.00	-29.27	peak	
6		8645.500	16.31	15.62	31.93	54.00	-22.07	AVG	
7		9828.500	30.24	15.76	46.00	74.00	-28.00	peak	
8		9828.500	17.84	15.76	33.60	54.00	-20.40	AVG	
9		11414.500	27.30	20.18	47.48	74.00	-26.52	peak	
10		11414.500	14.69	20.18	34.87	54.00	-19.13	AVG	
11		12220.500	28.08	20.83	48.91	74.00	-25.09	peak	
12	*	12220.500	15.22	20.83	36.05	54.00	-17.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Vertical

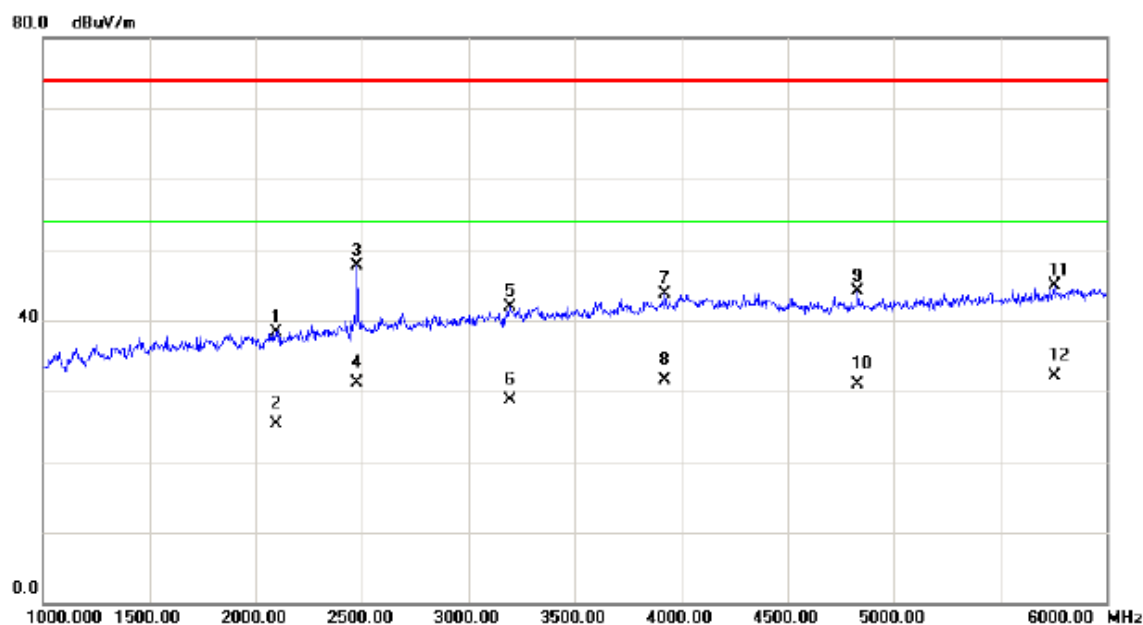

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2095.000	39.78	-1.52	38.26	74.00	-35.74	peak	
2		2095.000	26.74	-1.52	25.22	54.00	-28.78	AVG	
3		2475.000	47.82	-0.02	47.80	74.00	-26.20	peak	
4		2475.000	31.14	-0.02	31.12	54.00	-22.88	AVG	
5		3195.000	39.64	2.30	41.94	74.00	-32.06	peak	
6		3195.000	26.31	2.30	28.61	54.00	-25.39	AVG	
7		3925.000	37.71	6.08	43.79	74.00	-30.21	peak	
8		3925.000	25.47	6.08	31.55	54.00	-22.45	AVG	
9		4830.000	36.78	7.40	44.18	74.00	-29.82	peak	
10		4830.000	23.59	7.40	30.99	54.00	-23.01	AVG	
11		5755.000	35.39	9.45	44.84	74.00	-29.16	peak	
12	*	5755.000	22.66	9.45	32.11	54.00	-21.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Horizontal

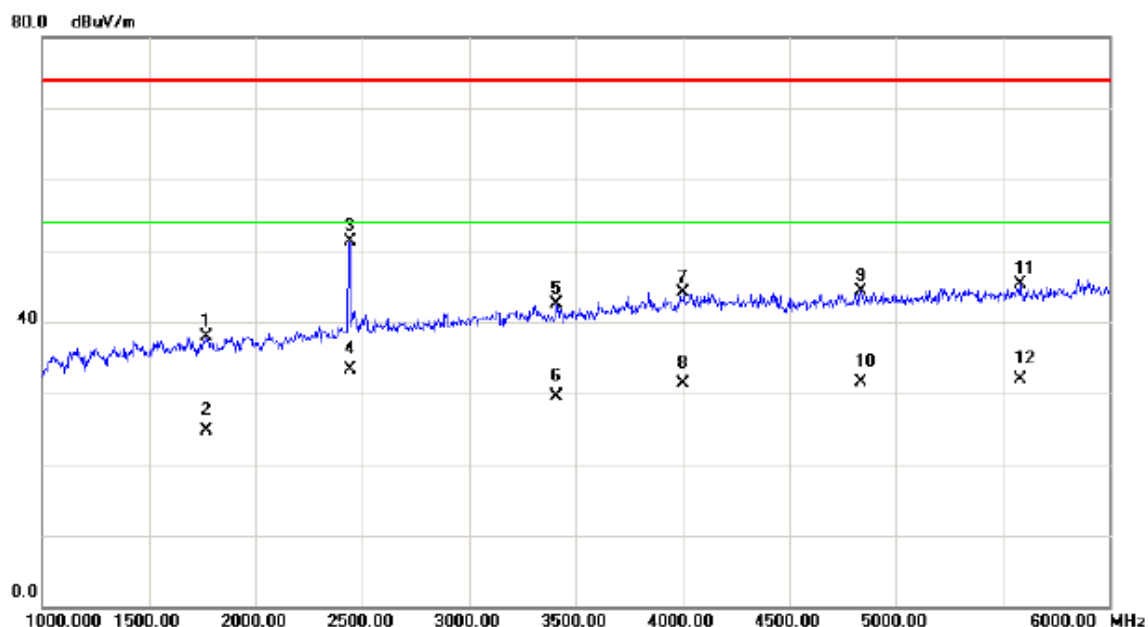

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1770.000	40.86	-2.88	37.98	74.00	-36.02	peak	
2		1770.000	27.59	-2.88	24.71	54.00	-29.29	AVG	
3		2440.000	51.37	-0.16	51.21	74.00	-22.79	peak	
4	*	2440.000	33.48	-0.16	33.32	54.00	-20.68	AVG	
5		3410.000	39.68	2.79	42.47	74.00	-31.53	peak	
6		3410.000	26.72	2.79	29.51	54.00	-24.49	AVG	
7		4005.000	37.55	6.62	44.17	74.00	-29.83	peak	
8		4005.000	24.76	6.62	31.38	54.00	-22.62	AVG	
9		4835.000	36.89	7.41	44.30	74.00	-29.70	peak	
10		4835.000	24.00	7.41	31.41	54.00	-22.59	AVG	
11		5580.000	36.03	9.23	45.26	74.00	-28.74	peak	
12		5580.000	22.69	9.23	31.92	54.00	-22.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Vertical

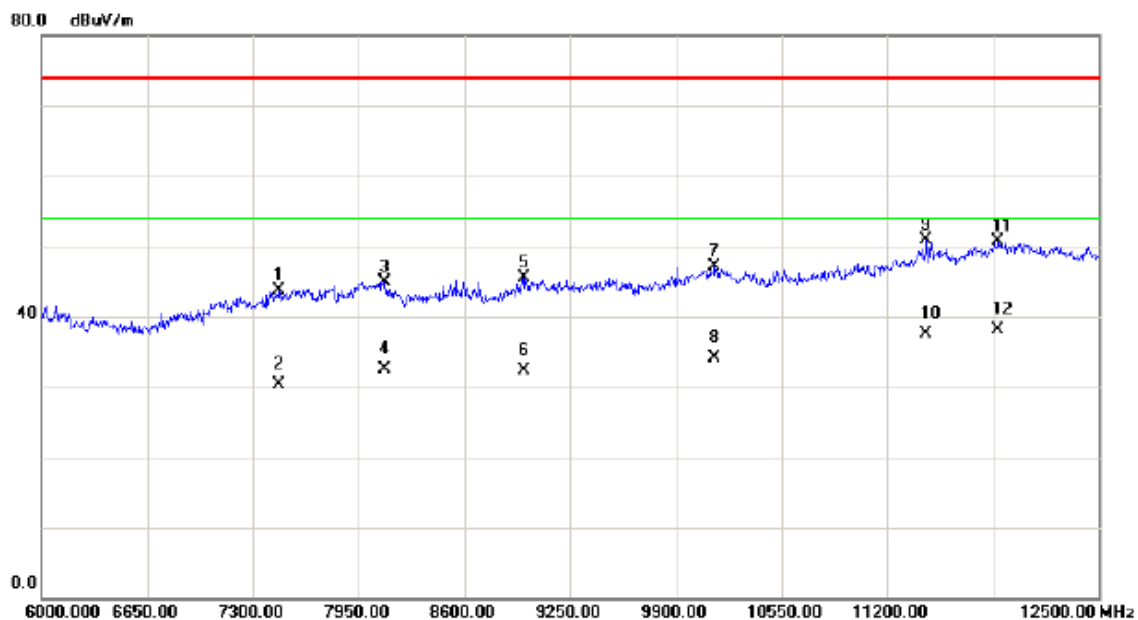

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7462.500	27.93	15.82	43.75	74.00	-30.25	peak	
2		7462.500	14.56	15.82	30.38	54.00	-23.62	AVG	
3		8112.500	29.03	15.93	44.96	74.00	-29.04	peak	
4		8112.500	16.52	15.93	32.45	54.00	-21.55	AVG	
5		8970.500	29.47	16.11	45.58	74.00	-28.42	peak	
6		8970.500	16.23	16.11	32.34	54.00	-21.66	AVG	
7		10140.500	31.63	15.48	47.11	74.00	-26.89	peak	
8		10140.500	18.54	15.48	34.02	54.00	-19.98	AVG	
9		11440.500	30.66	20.17	50.83	74.00	-23.17	peak	
10		11440.500	17.30	20.17	37.47	54.00	-16.53	AVG	
11		11882.500	28.21	22.57	50.78	74.00	-23.22	peak	
12	*	11882.500	15.47	22.57	38.04	54.00	-15.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: YINGJU(EU Plug)


Horizontal

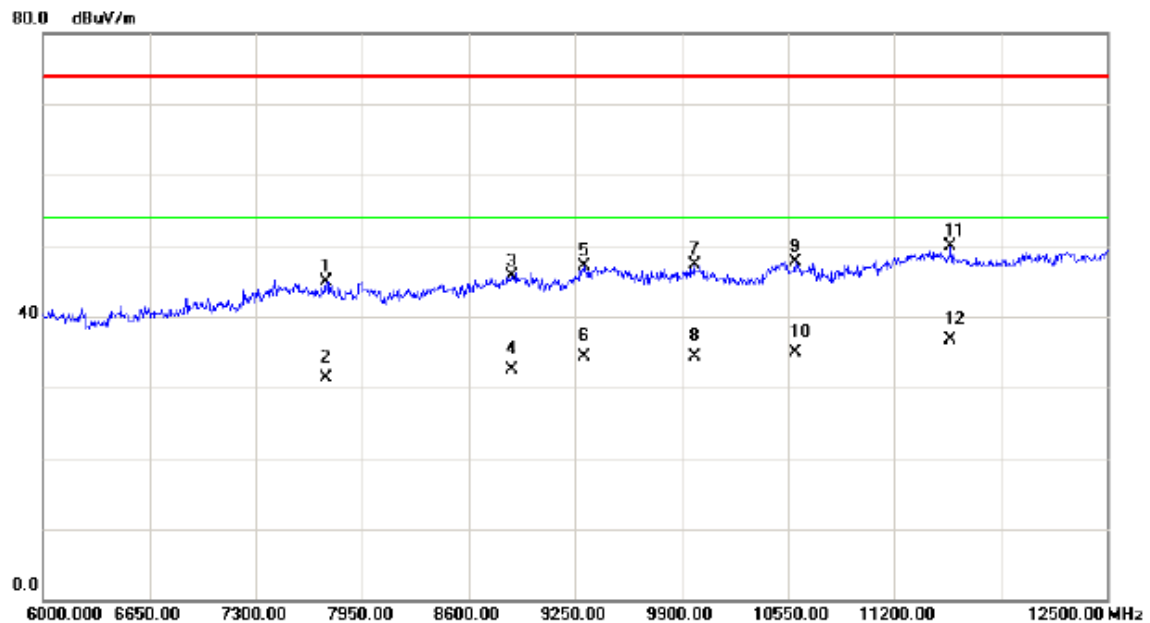

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7729.000	28.88	16.03	44.91	74.00	-29.09	peak	
2		7729.000	15.28	16.03	31.31	54.00	-22.69	AVG	
3		8860.000	29.70	15.95	45.65	74.00	-28.35	peak	
4		8860.000	16.47	15.95	32.42	54.00	-21.58	AVG	
5		9302.000	31.48	15.56	47.04	74.00	-26.96	peak	
6		9302.000	18.67	15.56	34.23	54.00	-19.77	AVG	
7		9978.000	31.28	16.03	47.31	74.00	-26.69	peak	
8		9978.000	18.34	16.03	34.37	54.00	-19.63	AVG	
9		10595.50	32.50	15.21	47.71	74.00	-26.29	peak	
10		10595.50	19.68	15.21	34.89	54.00	-19.11	AVG	
11		11544.50	29.47	20.42	49.89	74.00	-24.11	peak	
12	*	11544.50	16.27	20.42	36.69	54.00	-17.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Vertical

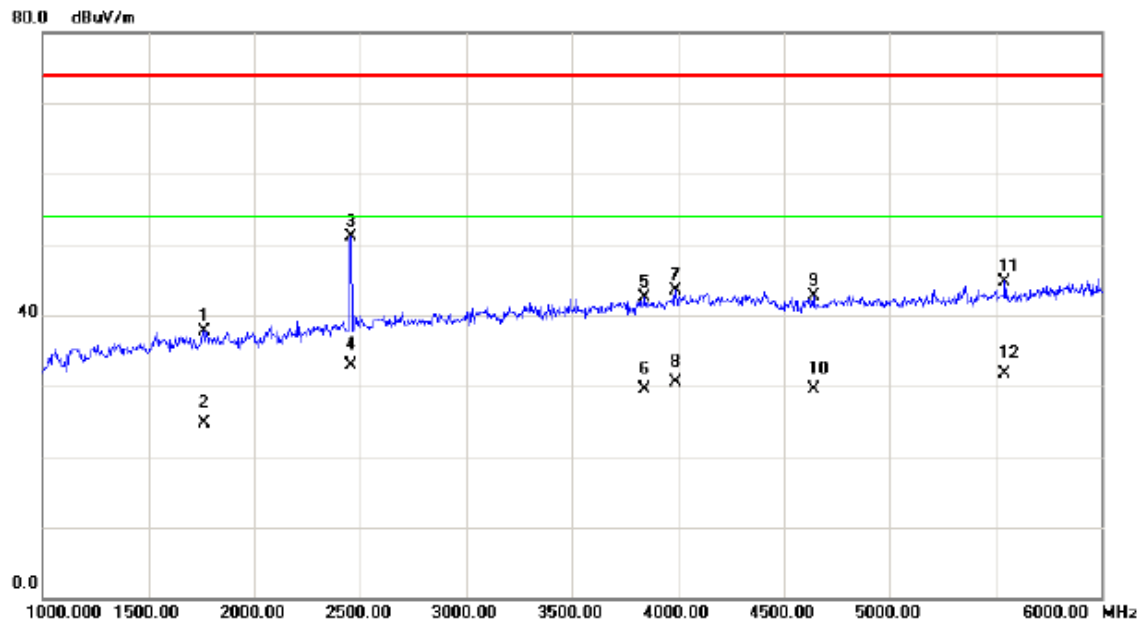

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1765.000	40.66	-2.91	37.75	74.00	-36.25	peak	
2		1765.000	27.60	-2.91	24.69	54.00	-29.31	AVG	
3		2455.000	51.25	-0.09	51.16	74.00	-22.84	peak	
4	*	2455.000	33.01	-0.09	32.92	54.00	-21.08	AVG	
5		3845.000	37.08	5.50	42.58	74.00	-31.42	peak	
6		3845.000	23.91	5.50	29.41	54.00	-24.59	AVG	
7		3990.000	36.87	6.54	43.41	74.00	-30.59	peak	
8		3990.000	23.99	6.54	30.53	54.00	-23.47	AVG	
9		4640.000	35.64	7.11	42.75	74.00	-31.25	peak	
10		4640.000	22.43	7.11	29.54	54.00	-24.46	AVG	
11		5545.000	35.61	9.19	44.80	74.00	-29.20	peak	
12		5545.000	22.52	9.19	31.71	54.00	-22.29	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Horizontal

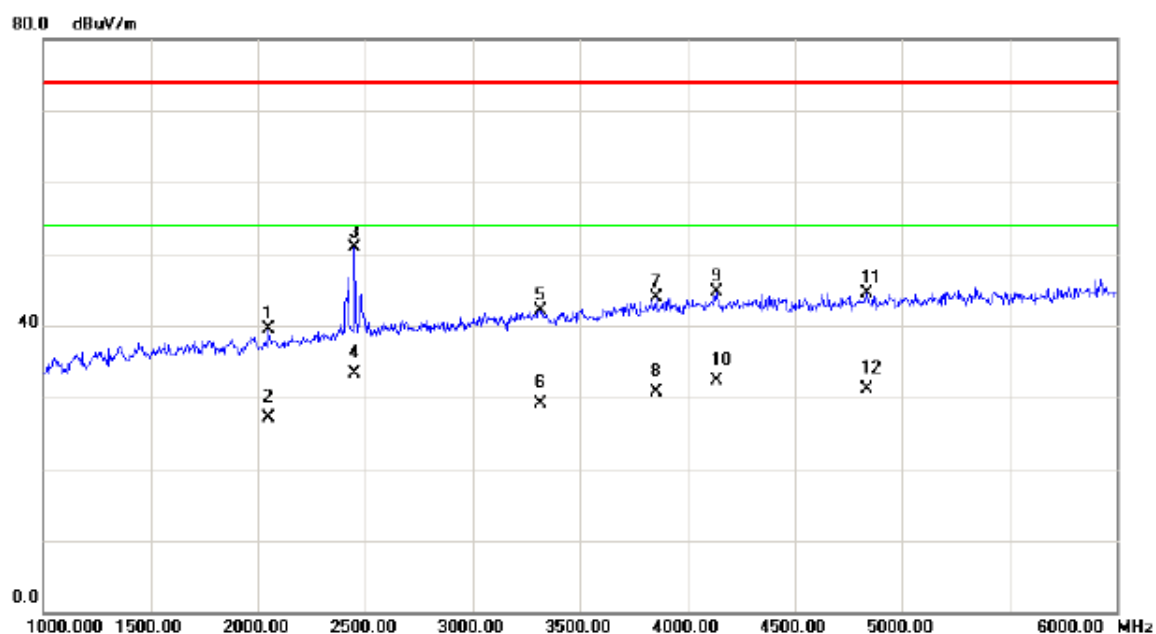

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2050.000	41.20	-1.69	39.51	74.00	-34.49	peak	
2		2050.000	28.71	-1.69	27.02	54.00	-26.98	AVG	
3		2450.000	51.02	-0.11	50.91	74.00	-23.09	peak	
4	*	2450.000	33.47	-0.11	33.36	54.00	-20.64	AVG	
5		3315.000	39.48	2.57	42.05	74.00	-31.95	peak	
6		3315.000	26.57	2.57	29.14	54.00	-24.86	AVG	
7		3855.000	38.39	5.57	43.96	74.00	-30.04	peak	
8		3855.000	25.13	5.57	30.70	54.00	-23.30	AVG	
9		4135.000	38.02	6.70	44.72	74.00	-29.28	peak	
10		4135.000	25.51	6.70	32.21	54.00	-21.79	AVG	
11		4835.000	37.18	7.41	44.59	74.00	-29.41	peak	
12		4835.000	23.66	7.41	31.07	54.00	-22.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Vertical

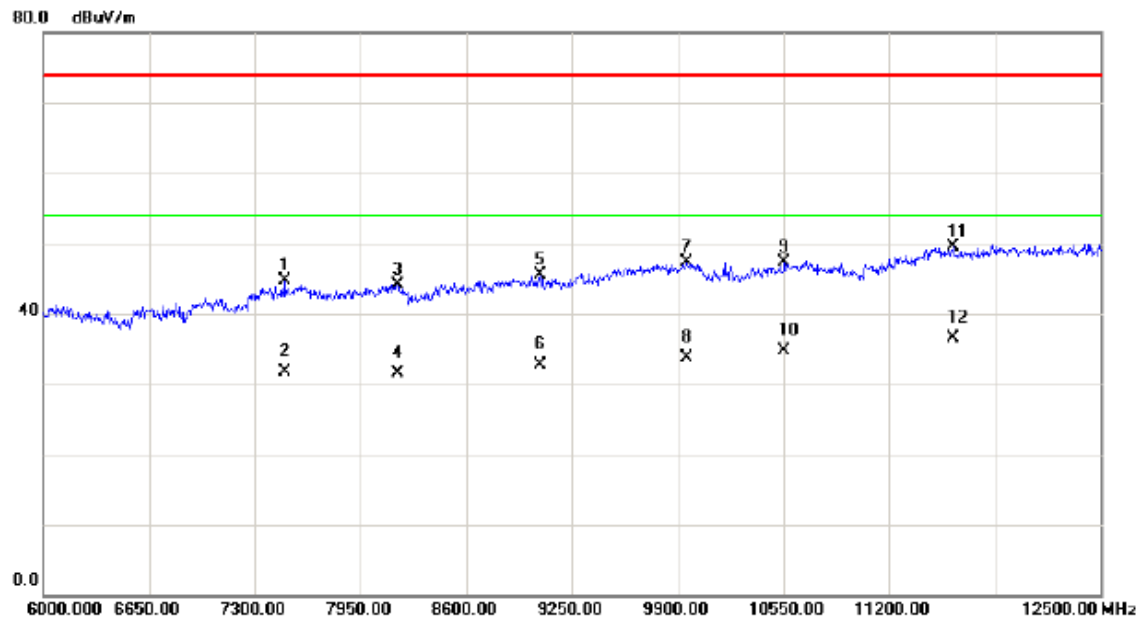

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		7482.000	28.75	15.91	44.66	74.00	-29.34	peak	
2		7482.000	15.89	15.91	31.80	54.00	-22.20	AVG	
3		8177.500	28.34	15.84	44.18	74.00	-29.82	peak	
4		8177.500	15.66	15.84	31.50	54.00	-22.50	AVG	
5		9055.000	29.51	16.05	45.56	74.00	-28.44	peak	
6		9055.000	16.67	16.05	32.72	54.00	-21.28	AVG	
7		9952.000	31.30	15.98	47.28	74.00	-26.72	peak	
8		9952.000	17.69	15.98	33.67	54.00	-20.33	AVG	
9		10556.50	32.62	14.72	47.34	74.00	-26.66	peak	
10		10556.50	19.89	14.72	34.61	54.00	-19.39	AVG	
11		11596.50	28.75	20.76	49.51	74.00	-24.49	peak	
12	*	11596.50	15.73	20.76	36.49	54.00	-17.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug)


Horizontal

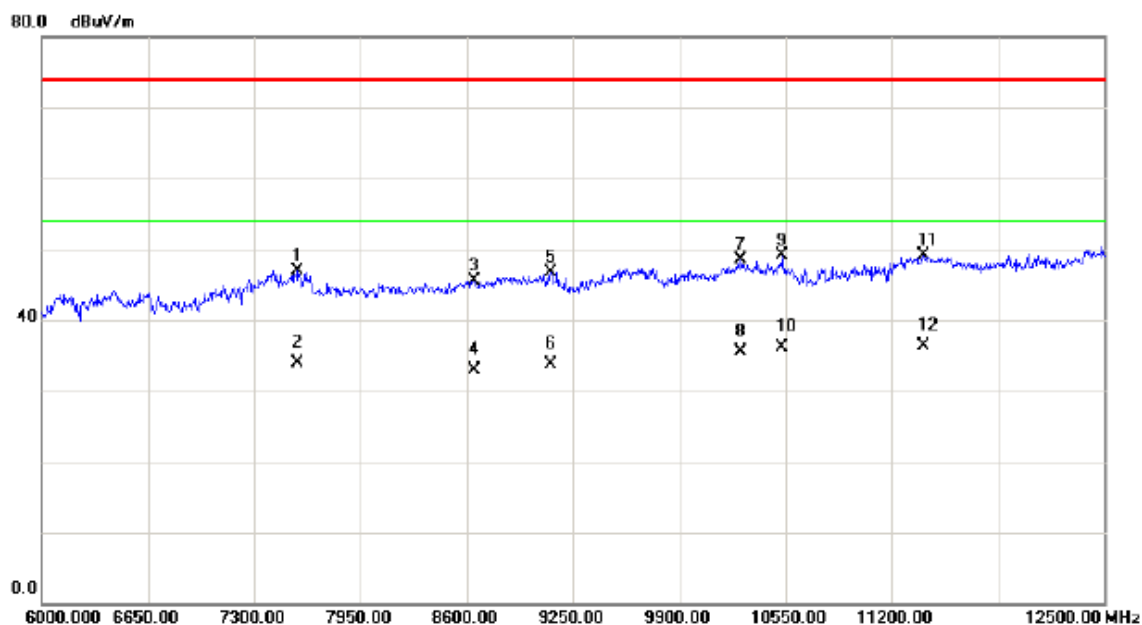

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7566.500	30.95	15.99	46.94	74.00	-27.06	peak	
2		7566.500	18.01	15.99	34.00	54.00	-20.00	AVG	
3		8645.500	29.95	15.62	45.57	74.00	-28.43	peak	
4		8645.500	17.27	15.62	32.89	54.00	-21.11	AVG	
5		9113.500	30.71	15.94	46.65	74.00	-27.35	peak	
6		9113.500	17.72	15.94	33.66	54.00	-20.34	AVG	
7		10277.00	33.57	14.90	48.47	74.00	-25.53	peak	
8		10277.00	20.58	14.90	35.48	54.00	-18.52	AVG	
9		10530.50	34.76	14.38	49.14	74.00	-24.86	peak	
10		10530.50	21.65	14.38	36.03	54.00	-17.97	AVG	
11		11395.00	28.96	20.19	49.15	74.00	-24.85	peak	
12	*	11395.00	16.04	20.19	36.23	54.00	-17.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Vertical

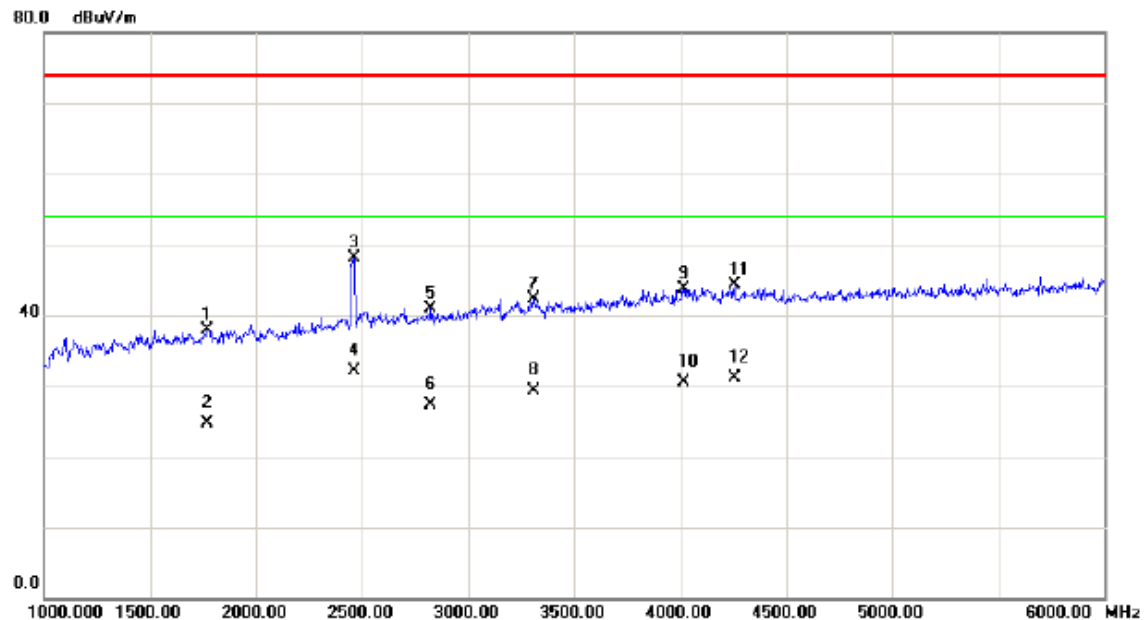

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1770.000	40.88	-2.88	38.00	74.00	-36.00	peak	
2		1770.000	27.54	-2.88	24.66	54.00	-29.34	AVG	
3		2460.000	48.18	-0.08	48.10	74.00	-25.90	peak	
4	*	2460.000	32.14	-0.08	32.06	54.00	-21.94	AVG	
5		2825.000	39.63	1.23	40.86	74.00	-33.14	peak	
6		2825.000	26.14	1.23	27.37	54.00	-26.63	AVG	
7		3310.000	39.67	2.56	42.23	74.00	-31.77	peak	
8		3310.000	26.81	2.56	29.37	54.00	-24.63	AVG	
9		4015.000	37.09	6.63	43.72	74.00	-30.28	peak	
10		4015.000	23.96	6.63	30.59	54.00	-23.41	AVG	
11		4255.000	37.46	6.77	44.23	74.00	-29.77	peak	
12		4255.000	24.42	6.77	31.19	54.00	-22.81	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Horizontal

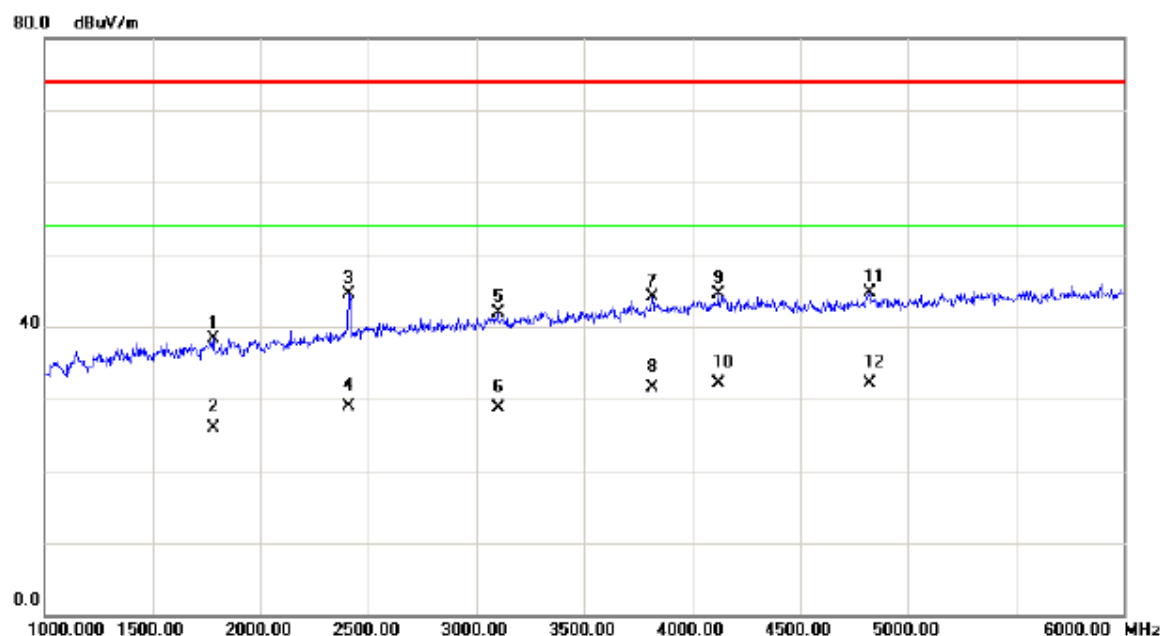

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1780.000	41.11	-2.84	38.27	74.00	-35.73	peak	
2		1780.000	28.65	-2.84	25.81	54.00	-28.19	AVG	
3		2410.000	44.85	-0.28	44.57	74.00	-29.43	peak	
4		2410.000	29.24	-0.28	28.96	54.00	-25.04	AVG	
5		3100.000	39.81	2.07	41.88	74.00	-32.12	peak	
6		3100.000	26.54	2.07	28.61	54.00	-25.39	AVG	
7		3815.000	38.91	5.28	44.19	74.00	-29.81	peak	
8		3815.000	26.17	5.28	31.45	54.00	-22.55	AVG	
9		4120.000	37.75	6.69	44.44	74.00	-29.56	peak	
10	*	4120.000	25.48	6.69	32.17	54.00	-21.83	AVG	
11		4820.000	37.23	7.38	44.61	74.00	-29.39	peak	
12		4820.000	24.65	7.38	32.03	54.00	-21.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG(EU Plug)


Vertical

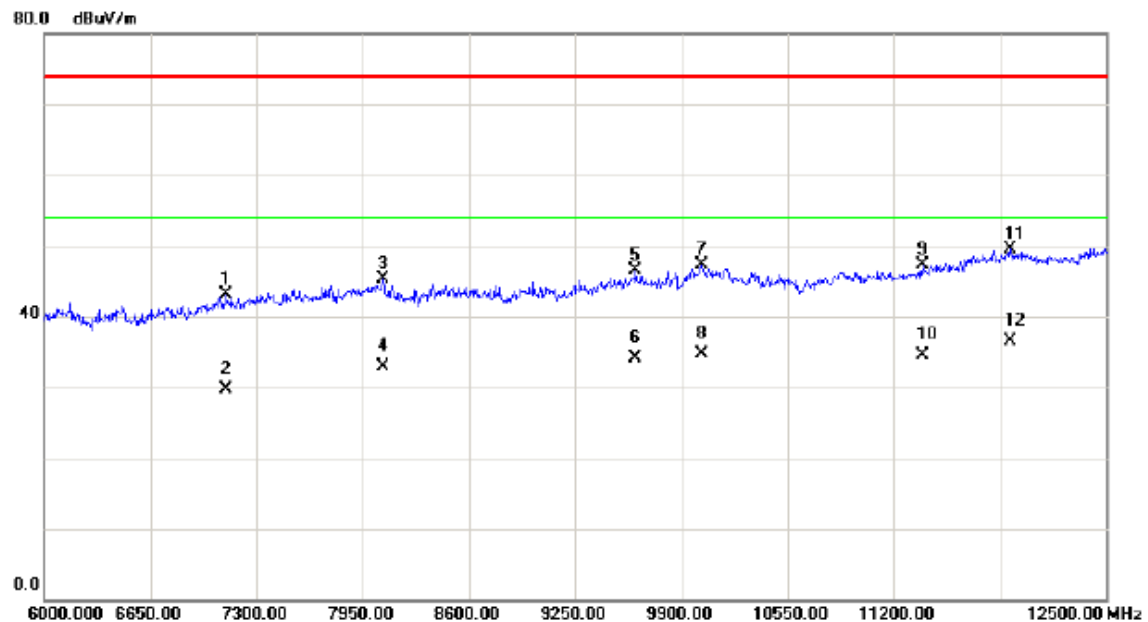

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7111.500	28.69	14.36	43.05	74.00	-30.95	peak	
2		7111.500	15.26	14.36	29.62	54.00	-24.38	AVG	
3		8073.500	29.28	15.99	45.27	74.00	-28.73	peak	
4		8073.500	16.84	15.99	32.83	54.00	-21.17	AVG	
5		9620.500	31.11	15.38	46.49	74.00	-27.51	peak	
6		9620.500	18.65	15.38	34.03	54.00	-19.97	AVG	
7		10023.500	31.31	15.97	47.28	74.00	-26.72	peak	
8		10023.500	18.74	15.97	34.71	54.00	-19.29	AVG	
9		11375.500	27.16	20.20	47.36	74.00	-26.64	peak	
10		11375.500	14.36	20.20	34.56	54.00	-19.44	AVG	
11		11915.000	26.67	22.78	49.45	74.00	-24.55	peak	
12	*	11915.000	13.71	22.78	36.49	54.00	-17.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: DAHONG (EU Plug)


Horizontal

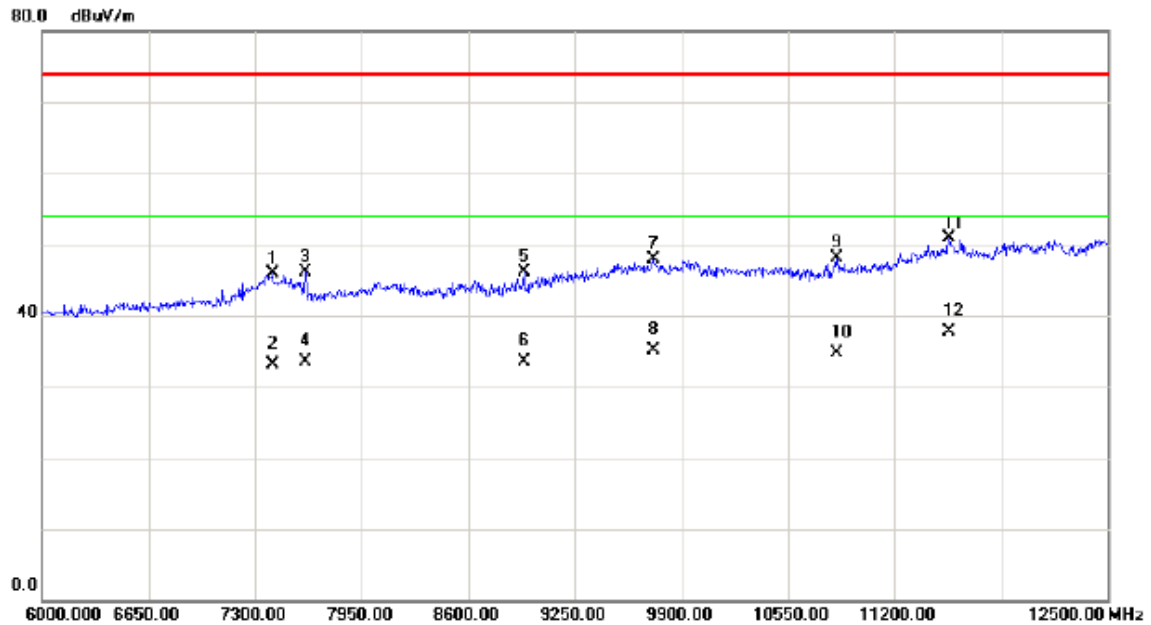

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7404.000	30.30	15.58	45.88	74.00	-28.12	peak	
2		7404.000	17.62	15.58	33.20	54.00	-20.80	AVG	
3		7605.500	30.16	16.01	46.17	74.00	-27.83	peak	
4		7605.500	17.42	16.01	33.43	54.00	-20.57	AVG	
5		8938.000	30.11	16.06	46.17	74.00	-27.83	peak	
6		8938.000	17.35	16.06	33.41	54.00	-20.59	AVG	
7		9731.000	32.28	15.58	47.86	74.00	-26.14	peak	
8		9731.000	19.47	15.58	35.05	54.00	-18.95	AVG	
9		10849.00	29.68	18.45	48.13	74.00	-25.87	peak	
10		10849.00	16.20	18.45	34.65	54.00	-19.35	AVG	
11		11531.50	30.54	20.35	50.89	74.00	-23.11	peak	
12	*	11531.50	17.42	20.35	37.77	54.00	-16.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Vertical

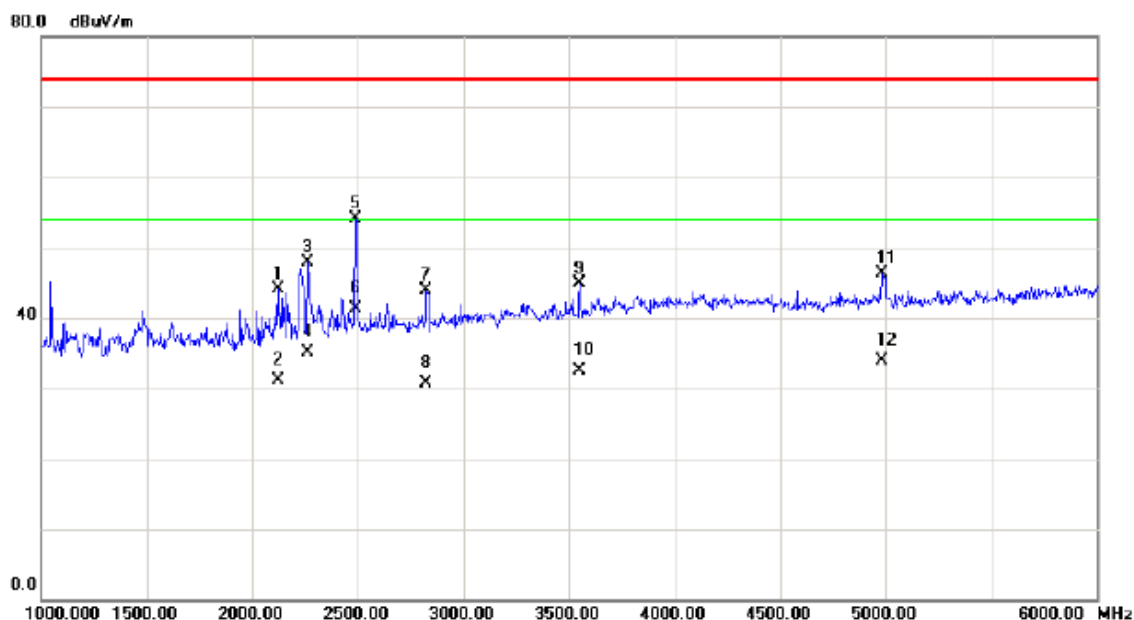

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2120.000	45.42	-1.41	44.01	74.00	-29.99	peak	
2		2120.000	32.46	-1.41	31.05	54.00	-22.95	AVG	
3		2260.000	48.67	-0.86	47.81	74.00	-26.19	peak	
4		2260.000	35.95	-0.86	35.09	54.00	-18.91	AVG	
5		2490.000	54.14	0.05	54.19	74.00	-19.81	peak	
6	*	2490.000	41.22	0.05	41.27	54.00	-12.73	AVG	
7		2825.000	42.65	1.23	43.88	74.00	-30.12	peak	
8		2825.000	29.48	1.23	30.71	54.00	-23.29	AVG	
9		3550.000	41.54	3.36	44.90	74.00	-29.10	peak	
10		3550.000	29.15	3.36	32.51	54.00	-21.49	AVG	
11		4985.000	38.68	7.62	46.30	74.00	-27.70	peak	
12		4985.000	26.27	7.62	33.89	54.00	-20.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle

Horizontal

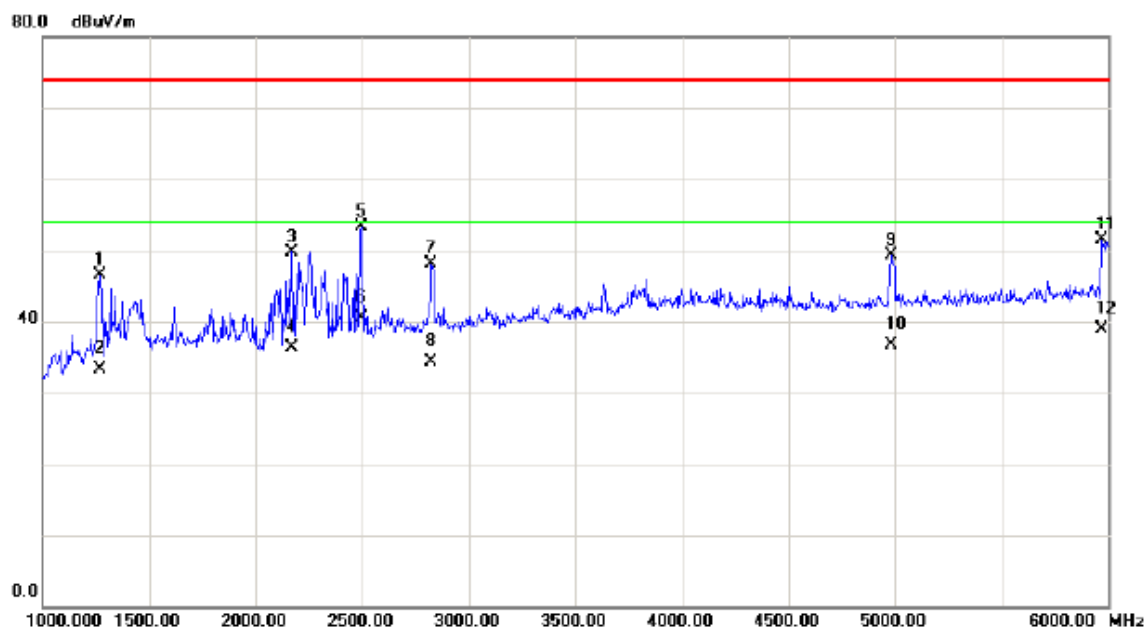

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1270.000	51.25	-4.74	46.51	74.00	-27.49	peak	
2		1270.000	38.03	-4.74	33.29	54.00	-20.71	AVG	
3		2170.000	51.01	-1.21	49.80	74.00	-24.20	peak	
4		2170.000	37.55	-1.21	36.34	54.00	-17.66	AVG	
5		2495.000	53.29	0.05	53.34	74.00	-20.66	peak	
6	*	2495.000	40.53	0.05	40.58	54.00	-13.42	AVG	
7		2825.000	46.93	1.23	48.16	74.00	-25.84	peak	
8		2825.000	33.16	1.23	34.39	54.00	-19.61	AVG	
9		4985.000	41.74	7.62	49.36	74.00	-24.64	peak	
10		4985.000	28.99	7.62	36.61	54.00	-17.39	AVG	
11		5970.000	41.80	9.72	51.52	74.00	-22.48	peak	
12		5970.000	29.16	9.72	38.88	54.00	-15.12	AVG	