

## Broadband over Power Lines (BPL) FCC Emissions Compliance Guidelines

### Access-Underground Emissions testing to FCC Report & Order 04-245 (FCC Method)

Access-Underground BPL component being tested: Repeater

#### Applicable Standards for this test:

| STANDARD          | TITLE                                                                                                                                                               |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4 - 2003 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |

#### EUT CONFIGURATION

|                            |                                             |
|----------------------------|---------------------------------------------|
| Product Type               | BPL medium voltage (MV) Access Gateway      |
| Serial Number              | 7353125931/6401625558/6938020727/6284826266 |
| Model Number               | CXP-MVA-GWY (T3B)                           |
| Marketing Designation      | Corinex NR – MV Gateway                     |
| Chassis Revision Number    | MV-Gateway V1                               |
| Firmware Revision Number   | ac_CXP_GNR_GWY_A2_hv1_0_0_sv3_4_8_2_0_0     |
| ECO Number (if applicable) |                                             |
| ID #                       | QIU-CXP-MVA-GNR                             |
|                            |                                             |

#### EUT OPERATING PARAMETERS

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Modulation type                      | OFDM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Number of carriers                   | 1536                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Carrier spacing                      | Medium Voltage, mode 1, Spacing 6.51 kHz<br>Medium Voltage, mode 2, Spacing 4.56 kHz<br>Medium Voltage, mode 3, Spacing 6.51 kHz<br>Low Voltage, Spacing 18.23 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Channel bandwidth                    | Mode 1:10MHz;<br>Mode 2 :7MHz;<br>Mode 3 :10MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Lowest external frequency used       | 3MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Highest external frequency used      | 32MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Notching depth capability (dB)       | 30dB by default; 40dB maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Carrier On-Off remotely?<br>(yes/no) | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Power Setting mechanism              | Default is power setting mask and notches active.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximum power setting                | 50mW/mode, 150mW total.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Range of duty factors (rep rates)    | 95%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Highest internal frequency           | Crystal: 80MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description of operation             | The Corinex MV Access Gateway has 3 Powerline modules, an Ethernet switch between the modules, a power supply, and an industrial case that acts as a heat sink to the environment. The Gateway is attached to a utility pole via a bracket, typically located 20' or higher on the pole. Two of the 3 outputs of the device used for Medium Voltage communications with one being used for Low Voltage Communications. The MV outputs are connected to an MV Capacitive and Inductive Coupler and then attached to the MV line, the connector on the MV Gateway is an TNC type coaxial connector. The 2 MV outputs allow for connection to additional MV Gateway devices either "before" or "after" the device. The power cord for the device is also used for signal transmission on the Low Voltage lines and is internally coupled. The Ethernet switch within the device allows for inter-module communications. Finally, a grounding lug is |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | provided on the device that is attached to the grounding wire on the pole. The MV Access Gateway uses orthogonal frequency-division multiplexing for modulation, which is a complex modulation technique for transmission based upon the idea of frequency-division multiplexing (FDM) where each frequency channel is modulated with a simpler modulation. We use 1536 carriers in our transmission. In each transmission, its normal operation mode will result in 20-25 pulse per second. Signaling type used is RF signals transmitted on MV powerlines with a frequency of 3-32 MHz. Unlike some MV Access devices, Corinex only uses Frequency Division Duplexing to communicate. The device is IP based and as such any IP packet can be transmitted over the network. Typical applications of the device include broadband internet access and the transmission of utility asset information. |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Rationale for selection of test site:**

This site was chosen as one of three representative installations for this component because the area was free of obstructions, and had low ambient.


**OBJECT**

This test procedure outlines the specific electromagnetic compatibility (EMC) emissions testing requirements applicable to Access BPL Underground installations. This procedure will be used for the testing and comparison of results from various locations and system architectures.

| EUT PASS CRITERIA                                                                                                                                                                                                                                                                                                                                                                                |                    |                   |                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------|--------------------------------------------------|
| Location                                                                                                                                                                                                                                                                                                                                                                                         | Test               | Frequency Range   | Limits                                           |
| “In situ”                                                                                                                                                                                                                                                                                                                                                                                        | Radiated Emissions | 9 kHz – 30 MHz    | 29.5 dB(μV/m) measured at 30 meters <sup>1</sup> |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                    | 30 MHz - 88 MHz   | 39.1 dB(μV/m) measured at 10 meters <sup>1</sup> |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                    | 88 MHz – 216 MHz  | 43.5 dB(μV/m) measured at 10 meters <sup>1</sup> |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                    | 216 MHz – 960 MHz | 56.4 dB(μV/m) measured at 10 meters <sup>1</sup> |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                    | Above 960 MHz     | 49.5 dB(μV/m) measured at 10 meters <sup>1</sup> |
| <b>Note 1:</b> Installations will be measured at <u>slant-range distances</u> other than those listed above. The formulas to find the dB value to subtract from the measured values when data are taken at distances other than those indicated are:<br>40log <sub>10</sub> 30m/d <sub>n</sub> for frequencies below 30MHz<br>20log <sub>10</sub> 10m/d <sub>n</sub> for frequencies above 30MHz |                    |                   |                                                  |

**RADIATED EMISSIONS LIMITS (above 30 MHz)**

FCC Radiated Emissions Limits for CLASS A Equipment

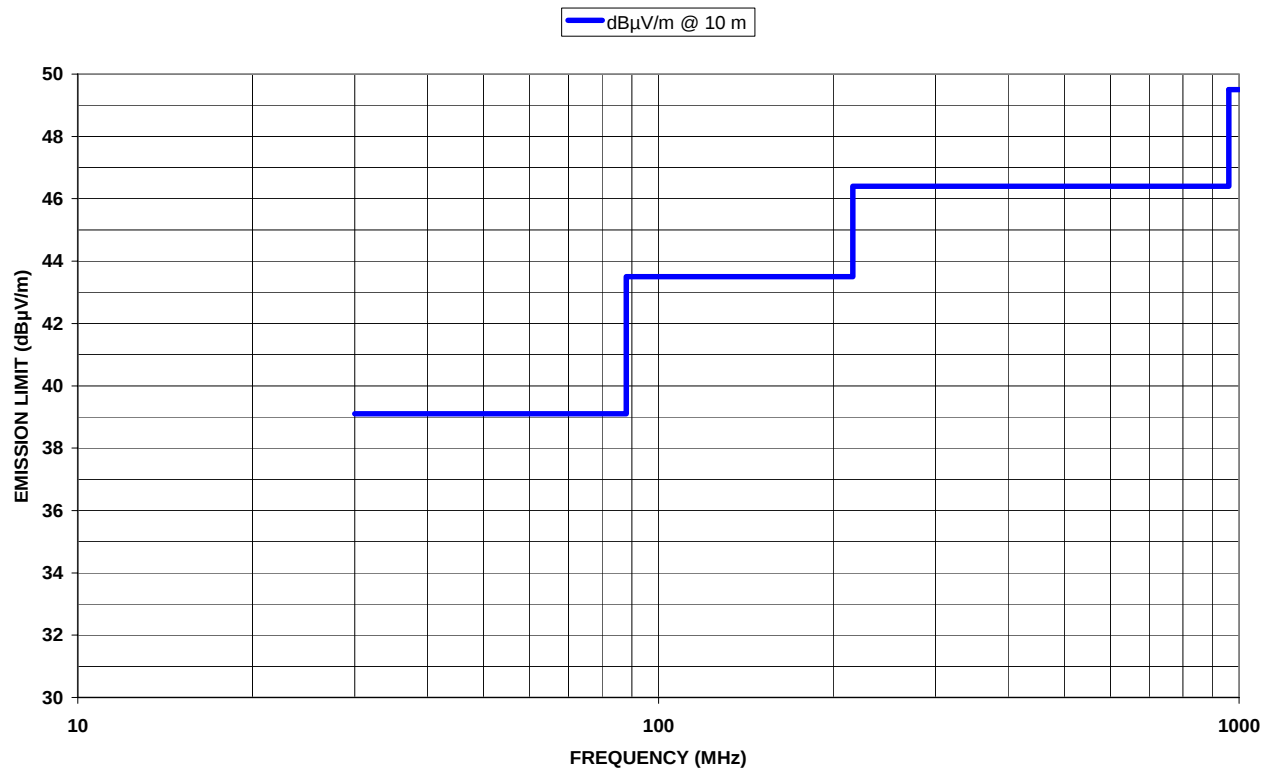

| Unintentional Radiator Upper Frequency Range of Measurement |                                      |
|-------------------------------------------------------------|--------------------------------------|
| Highest frequency used in the device (MHz)                  | Upper Frequency of Measurement (MHz) |
| 1.705-108MHz                                                | 1,000MHz                             |
| 108-500MHz                                                  | 2,000MHz                             |
| 500-1,000MHz                                                | 5,000MHz                             |
| Above 1,000MHz                                              | 5 <sup>th</sup> Harmonic <40GHz      |

The upper frequency of measurement for this test is 1000 MHz.

Antennas are specific to the frequency range being measured, and are summarized in this table.

| Typical antennas for BPL Certification testing |                                                     |
|------------------------------------------------|-----------------------------------------------------|
| Frequency Range                                | Antenna                                             |
| 9kHz-30MHz                                     | Active Loop (corrected to E-field by adding 51.2dB) |
| 30-1000MHz                                     | Bilog                                               |

Enter the correct equipment information into the Equipment List. (Samples are shown below, replace with actual data)

| EQUIPMENT LIST |
|----------------|
|----------------|



## Buried Site 1 Low Voltage


## Professional Testing



| Manufacturer    | Description              | Model Number   | Serial Number | Asset number | Cal Due      |
|-----------------|--------------------------|----------------|---------------|--------------|--------------|
| PTI             | 1.9 MHz High Pass Filter |                |               | 1182         | 15 Aug. 2008 |
| Hewlett Packard | EMC Spectrum Analyzer    | 8591EM         | 3322A09711    | 0410         | 7 Dec. 2007  |
| Hewlett Packard | Preamplifier             | 8447A          | 2439A09711    | 1260         | 9 April 2008 |
| Miteq           | Preamplifier             | 4888           |               | 1453         | 1 May 2008   |
| Tektronix       | Preselector              | 2706           | B010106       | 0746         | 29 Nov. 07   |
| ETS             | Passive loop antenna     | 6512           | Prototype     | 0351         | 22 Dec. 2007 |
| AH Systems      | Bilog Antenna            | SAS-521-2 2662 | 436           |              | 15 Aug. 2008 |
| ETS             | Non-metallic tripod      | 4-TR           | N/A           | 0944         | N/A          |
| Pasternak       | RG-214, 150 ft.          |                |               |              | 28 Oct. 2008 |
| Lufkin          | Tape measure             | 30'            | N/A           |              | N/A          |

Attach supporting equipment documentation to the test report as indicated below.

| SUPPORTING EQUIPMENT DOCUMENTATION CHECKLIST                          |  |                         | ✓ |
|-----------------------------------------------------------------------|--|-------------------------|---|
| Preamplifier gain VS frequency curve                                  |  | Attached to test report | ✓ |
| Type N Cable insertion loss VS frequency curve                        |  | Attached to test report | ✓ |
| Antenna factor VS frequency curves for all antennas used in this test |  | Attached to test report | ✓ |

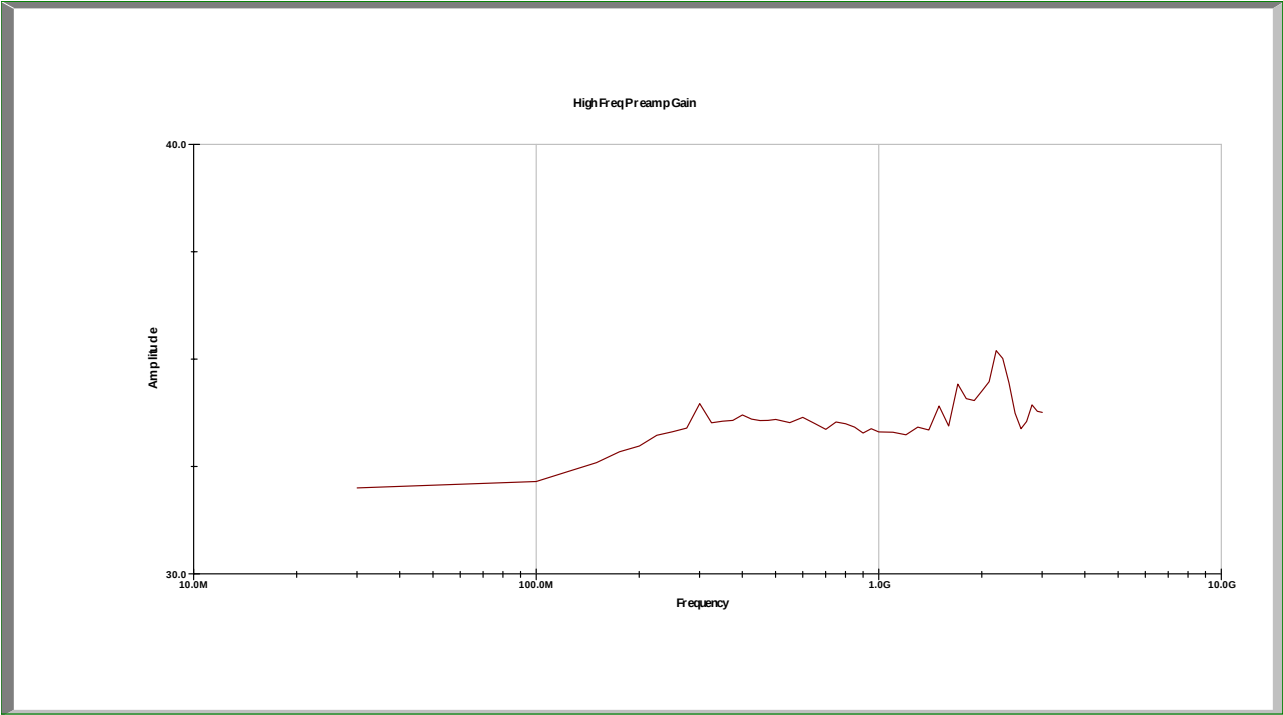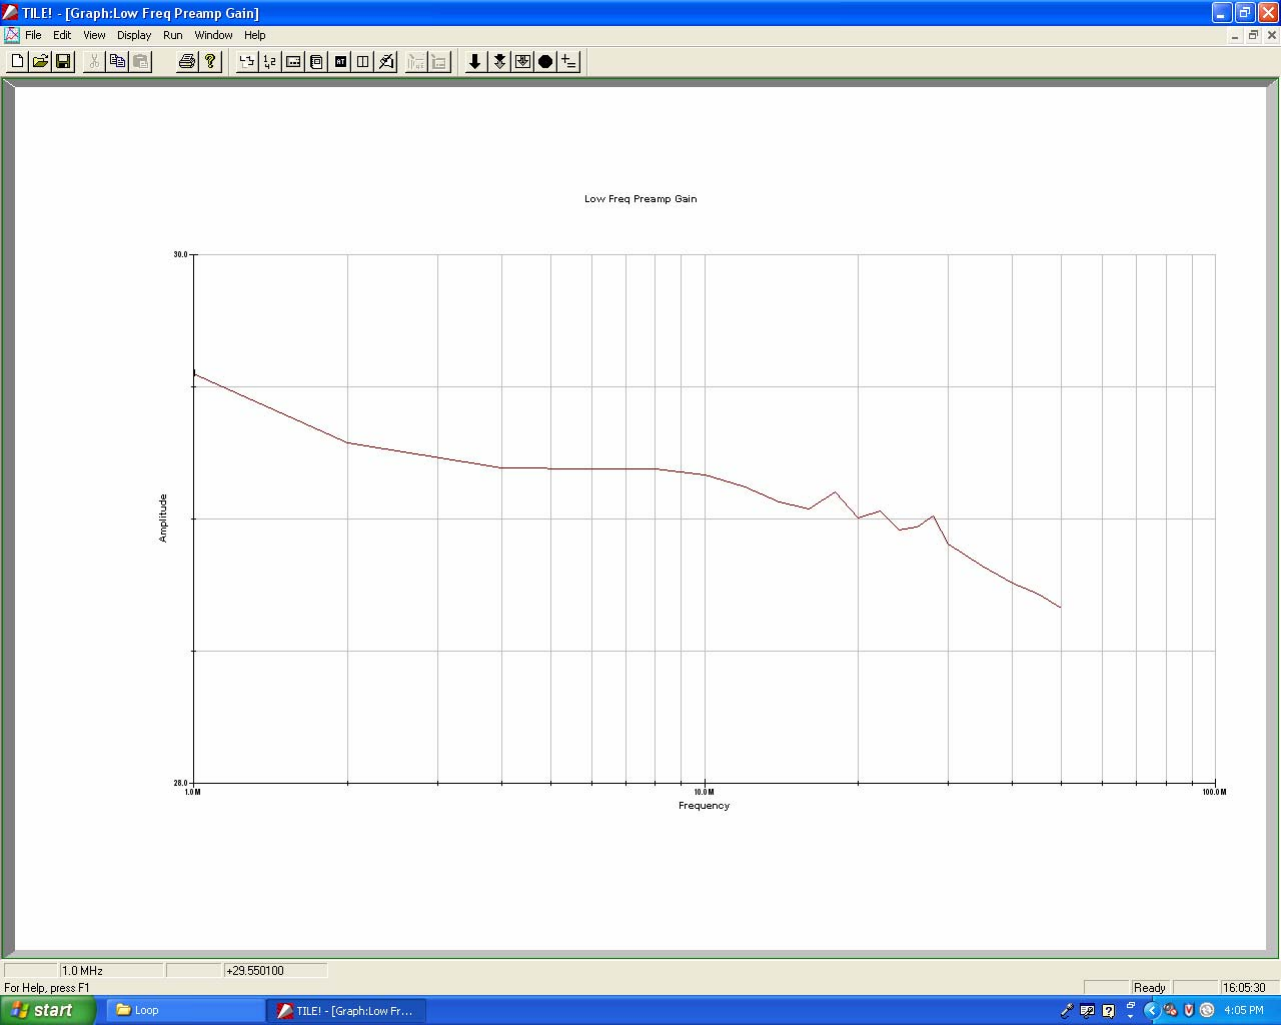

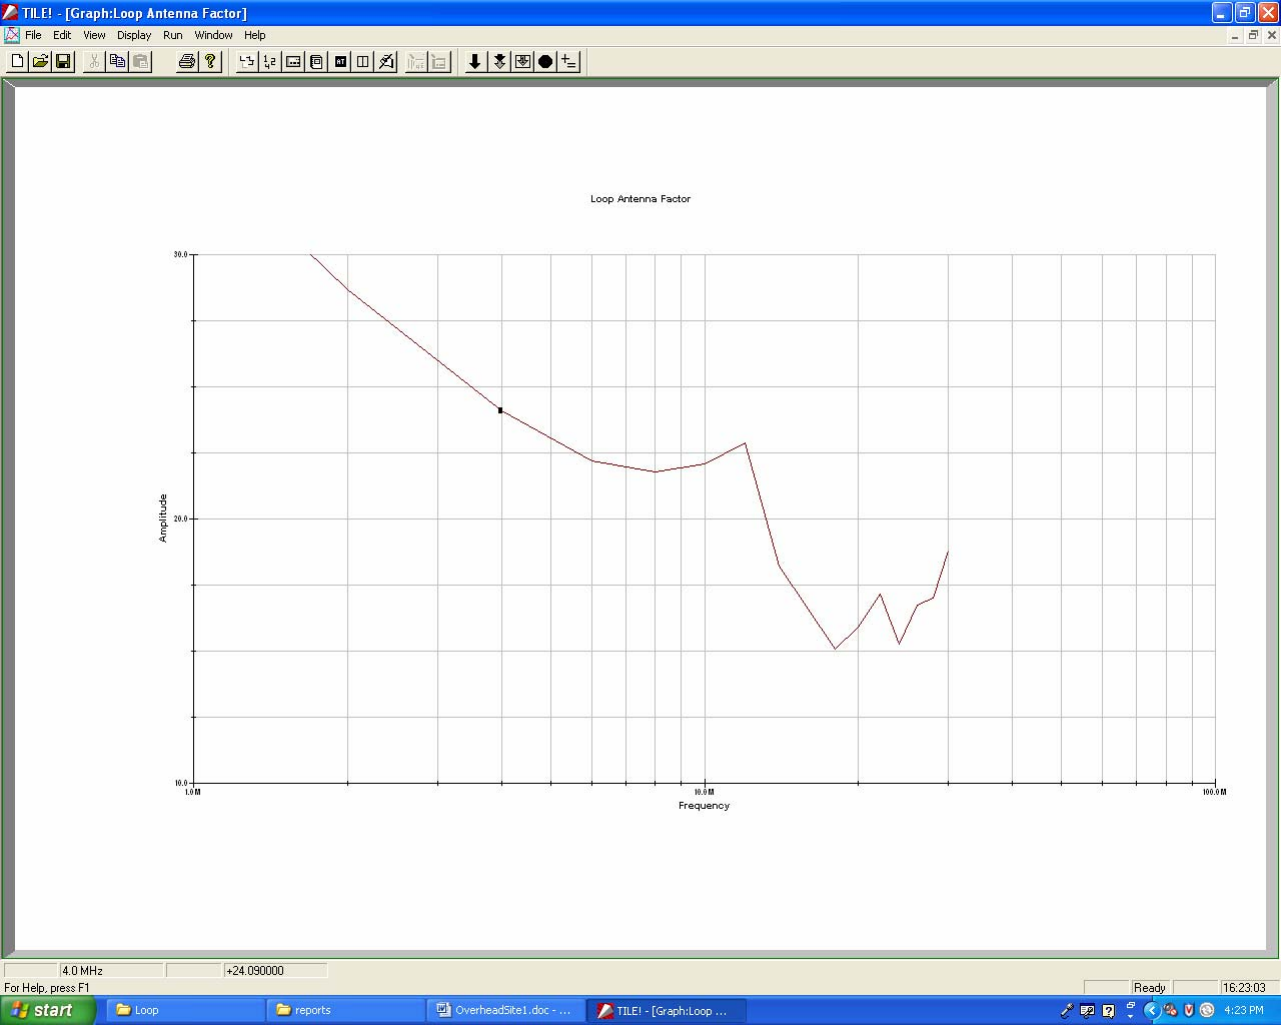

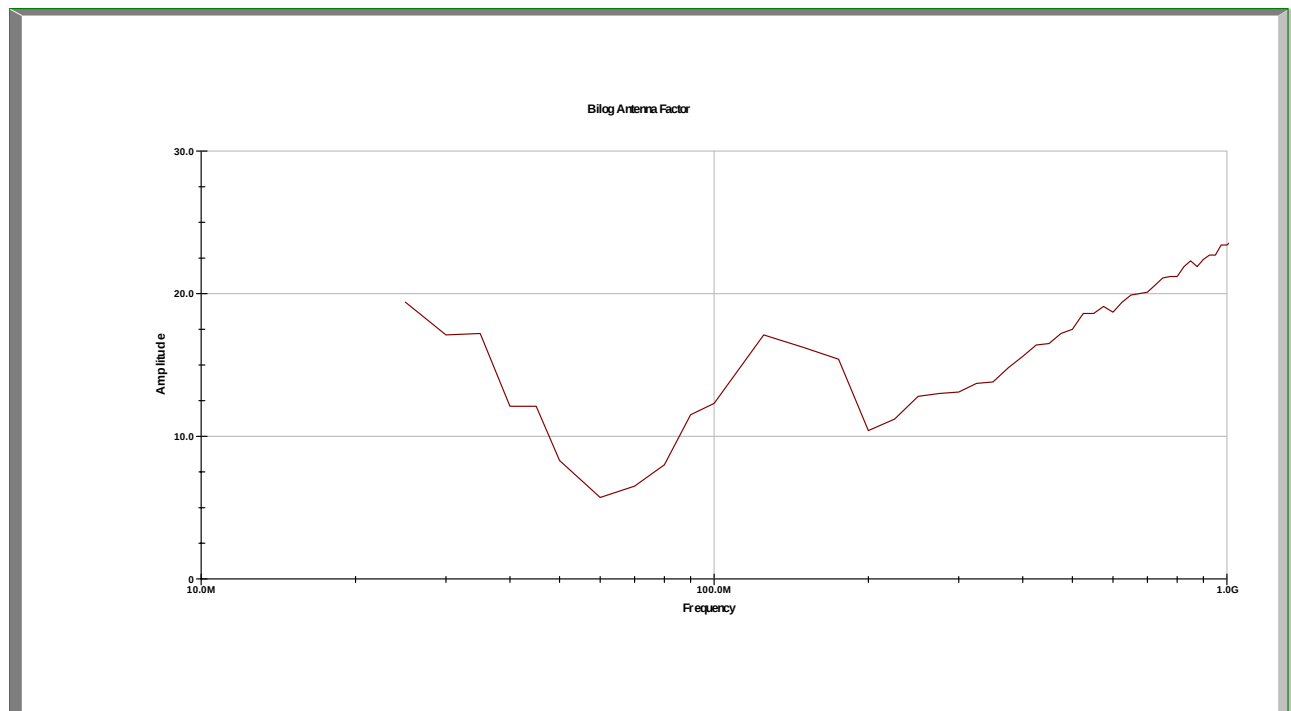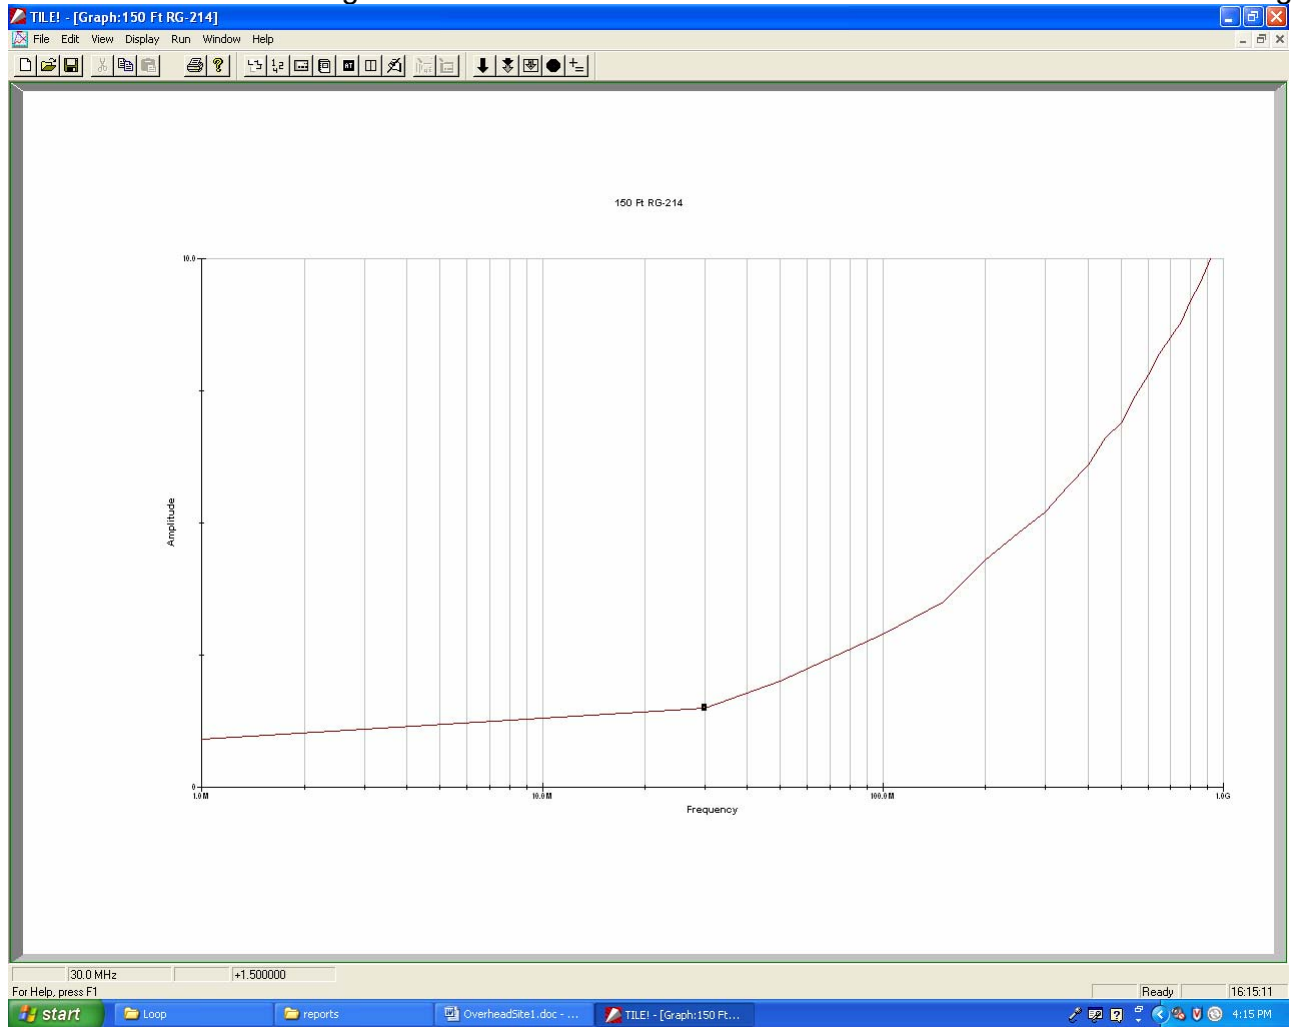



**MEASUREMENT POSITIONS**

Underground line installations are those in which the BPL device is mounted on a pad-mounted transformer housing or junction box and couples only onto underground cables. Access BPL Underground installations require measuring radiated fields along 16 radials at 10 meters distance from the edge of the above ground transformer where the Access BPL equipment is located to find the maximum emissions. For consistency, set the radials to compass settings so that North is facing towards the top of the page. (12:00 Noon) Number measurement points clockwise from 1 to 16.

If necessary, due to ambient emissions, measurements can be performed at a distance of 3 meters. Slant-range distance corrections are made in accordance with Section 15.31(f) of the Rules. Measurements are made at positions around the perimeter of the in-ground power transformer where the maximum emissions occur. If directional radiation patterns are detected, additional azimuth angles should be investigated.

**Example of Access BPL Underground Measurements**

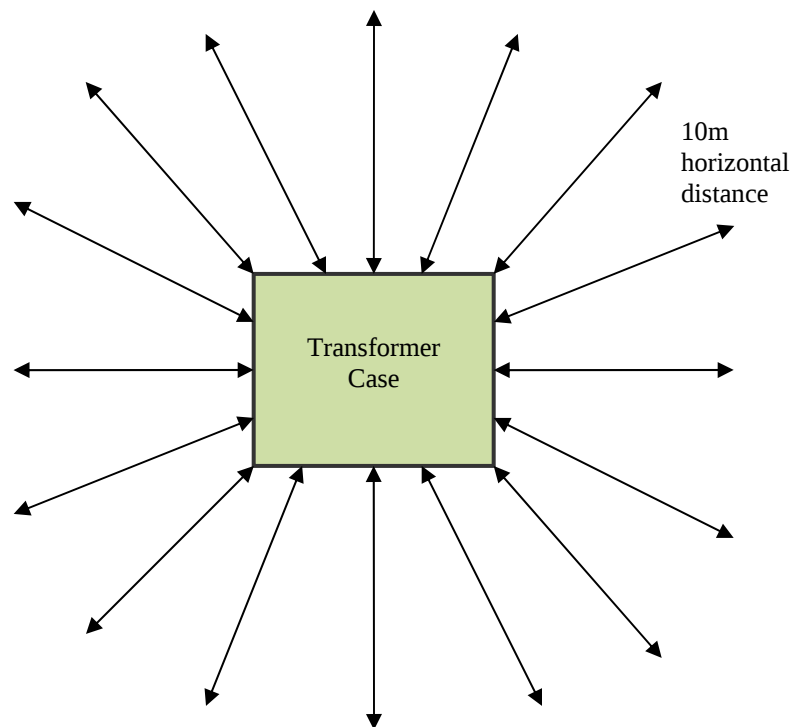

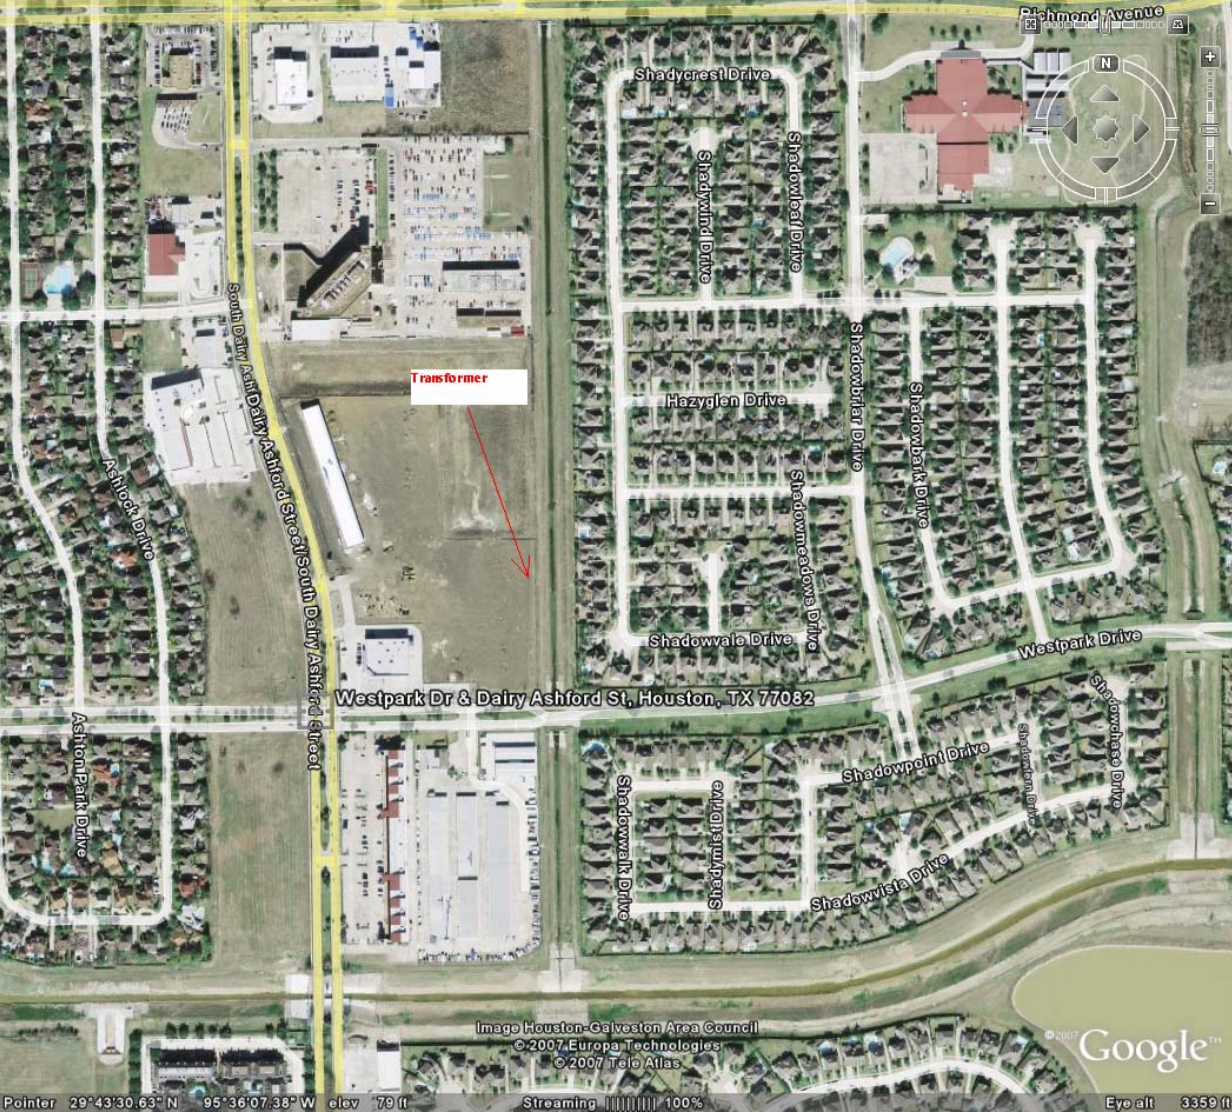







### TESTING BELOW 30 MHz



1.705 MHz (or lowest frequency generated) to 30 MHz

1. Contact the BPL system operator and set the EUT for MAXIMUM power and MAXIMUM burst rate before **Certification** testing. If **Validation** testing is performed there is no need for MAXIMUM power testing and only COMPLIANCE (operating) power is used.
2. Set the EMI Receiver or Spectrum Analyzer to 9 kHz IF bandwidth and PEAK detection. Set the frequency step size for 4.5 kHz (half the IF bandwidth) and scan the spectra from the lowest frequency generated (but never below 1.705 MHz) to 30 MHz for BPL emissions. When using spectrum analyzers, scan smaller sub-ranges to allow at least three pixels on the analyzer's screen to fit within the 9 kHz bandwidth. EXAMPLE: (400 pixels/3) x 9 kHz restricts scan widths to 1.2 MHz (100 kHz/div maximum) Covering 2-30 MHz would require 28 sub-ranges each 1MHz wide. (100 kHz/div x 10 div on-screen)
3. Orient the loop antenna broadside to the transformer. Identify the six highest BPL emissions. (validate these choices by AM demodulating them and listening for voice or music)
4. Rotate the magnetic loop at least 180 degrees about its vertical axis to maximize each of these readings prior to measurement.
5. Validate that the OVERLOAD indicator on the active loop antenna is not illuminated and that the Spectrum Analyzer does not use a pre-amplifier and is not being overloaded. Increase the analyzer's input



- attenuation to verify that the instrument is not in amplitude compression by making sure all signals move in 10dB increments with the attenuator setting.
6. Ensure that the data repetition rate is at least 20 Hz by demodulating the audio on each of the six signals. If so, use Quasi-Peak detection on just those six loudest BPL signals and enter the receiver voltages (dB $\mu$ V) into the worksheet below. If the burst rate is less than 20 Hz enter the Peak voltages into the worksheet below and indicate which detector was used. (P or QP)
  7. If voice, non-BPL data or music is demodulated that candidate emission is eliminated and the Receiver is tuned to the next loudest emission for demodulation and identification to find the six highest BPL emissions.
  8. Validate that the calculations employed are the same as shown in the worksheet if software is used for this measurement.
  9. Capture a complete spectrum of this frequency range for inclusion into the Test Report. (from more than one scan)
  10. For **Certification** testing, contact the BPL system operator and set the EUT down to its COMPLIANCE power setting. Tell the operator how many dB the system needs to be attenuated for compliance with the FCC limits on field strengths (or below them).

## Field Strengths (location 1) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.915           | 33.6                  | 29.2                | 27.2                  | 0.3             | 19.1              | 12.8                     | 29.5           | -16.7       | P                 |
| 3.71            | 34.5                  | 29.2                | 26.7                  | 0.3             | 19.1              | 13.2                     | 29.5           | -16.3       | P                 |
| 5.537           | 34                    | 29.2                | 23.6                  | 0.3             | 19.1              | 9.6                      | 29.5           | -19.9       | P                 |
| 9.386           | 36.1                  | 29.2                | 21.0                  | 0.3             | 19.1              | 9.1                      | 29.5           | -20.4       | P                 |
| 15.804          | 40.8                  | 29.2                | 17.5                  | 0.4             | 19.1              | 10.4                     | 29.5           | -19.1       | P                 |
| 26.442          | 40.2                  | 28.9                | 16.9                  | 0.5             | 19.1              | 9.7                      | 29.5           | -19.8       | P                 |

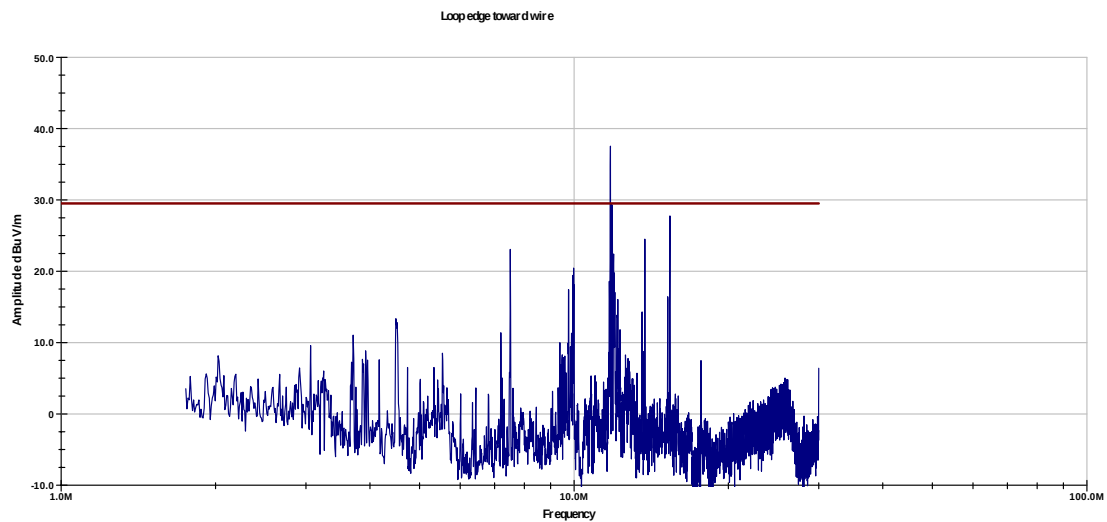
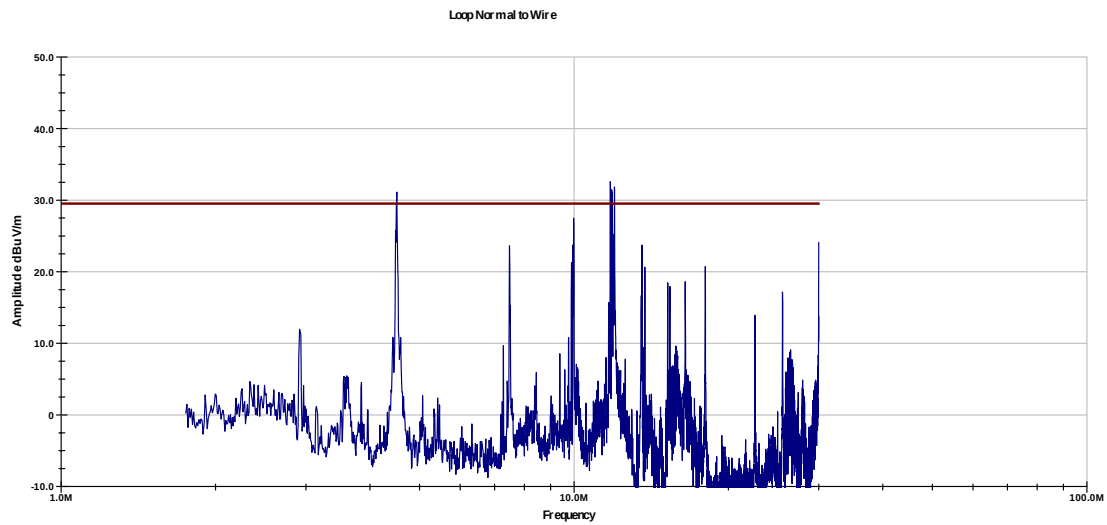


| Field Strengths (location 2) 1.705 MHz– 30 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 2.024                                          | 28.3                  | 29.2                | 28.6                  | 0.3             | 19.1              | 8.9                      | 29.5           | -20.6       | P                 |
| 2.915                                          | 29.9                  | 29.2                | 27.2                  | 0.3             | 19.1              | 9.1                      | 29.5           | -20.4       | P                 |
| 3.657                                          | 36.7                  | 29.2                | 26.8                  | 0.3             | 19.1              | 15.5                     | 29.5           | -14.0       | P                 |
| 5.343                                          | 38.7                  | 29.2                | 23.6                  | 0.3             | 19.1              | 14.4                     | 29.5           | -15.1       | P                 |
| 12.768                                         | 41                    | 29.2                | 21.1                  | 0.4             | 19.1              | 14.2                     | 29.5           | -15.3       | P                 |
| 25.789                                         | 36.7                  | 28.9                | 16.3                  | 0.5             | 19.1              | 5.5                      | 29.5           | -24.0       | P                 |

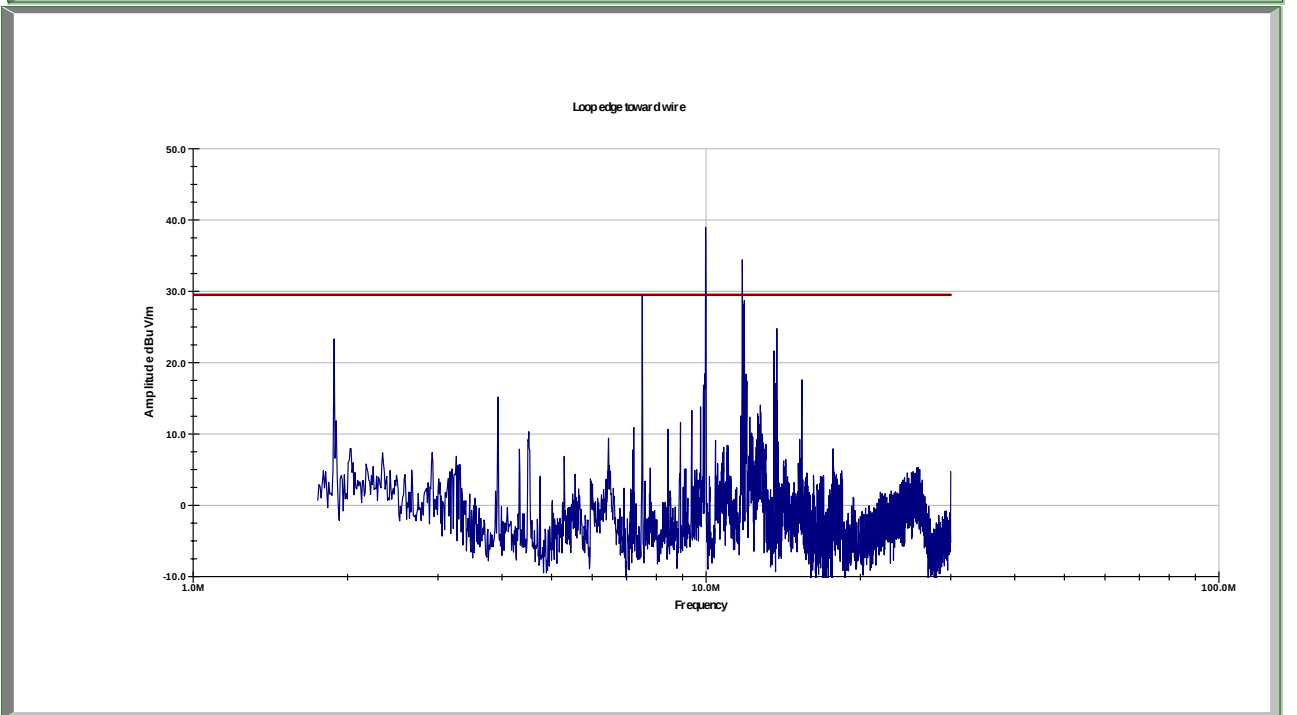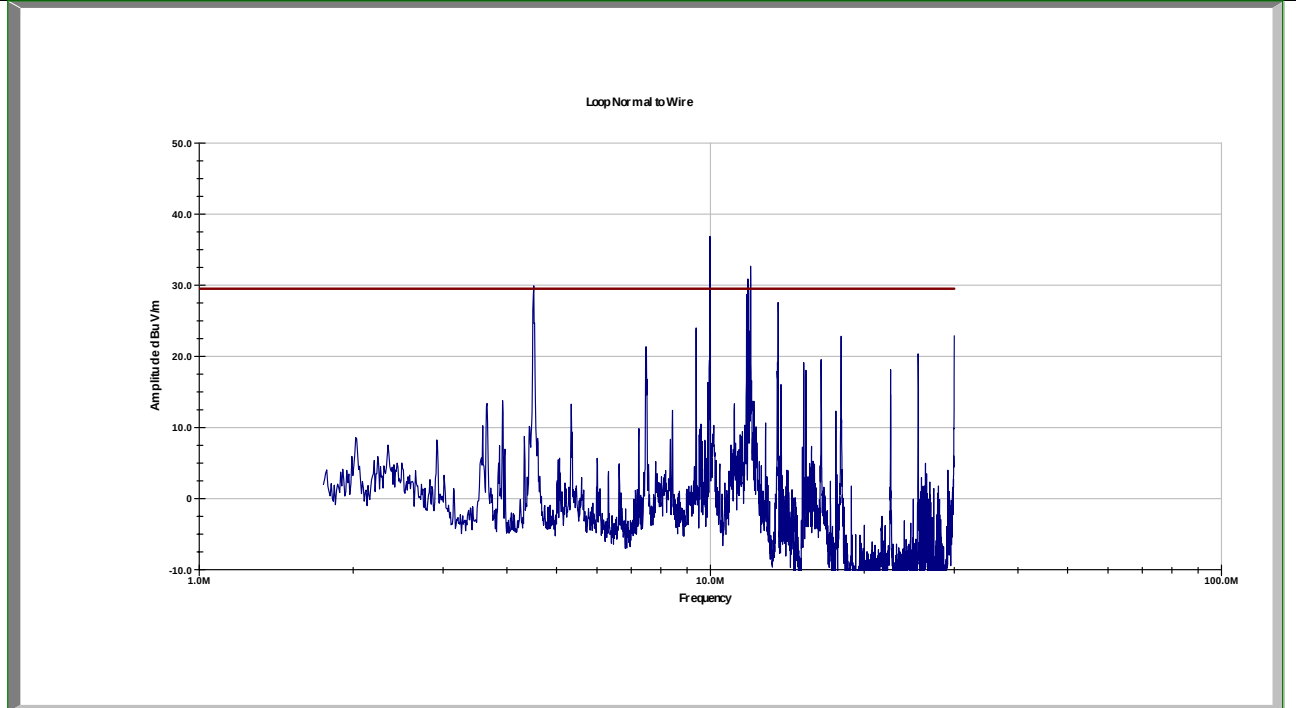



Field Strengths (location 3) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.341           | 32.1                  | 29.2                | 28.1                  | 0.3             | 19.1              | 12.2                     | 29.5           | -17.3       | P                 |
| 5.343           | 34.9                  | 29.2                | 23.6                  | 0.3             | 19.1              | 10.6                     | 29.5           | -18.9       | P                 |
| 7.762           | 38.4                  | 29.2                | 22.4                  | 0.3             | 19.1              | 12.8                     | 29.5           | -16.7       | P                 |
| 10.922          | 35.3                  | 29.2                | 21.2                  | 0.4             | 19.1              | 8.6                      | 29.5           | -20.9       | P                 |
| 17.464          | 38.9                  | 29.2                | 17.8                  | 0.4             | 19.1              | 8.8                      | 29.5           | -20.7       | P                 |
| 24.693          | 37.8                  | 28.9                | 15.6                  | 0.5             | 19.1              | 5.8                      | 29.5           | -23.7       | P                 |

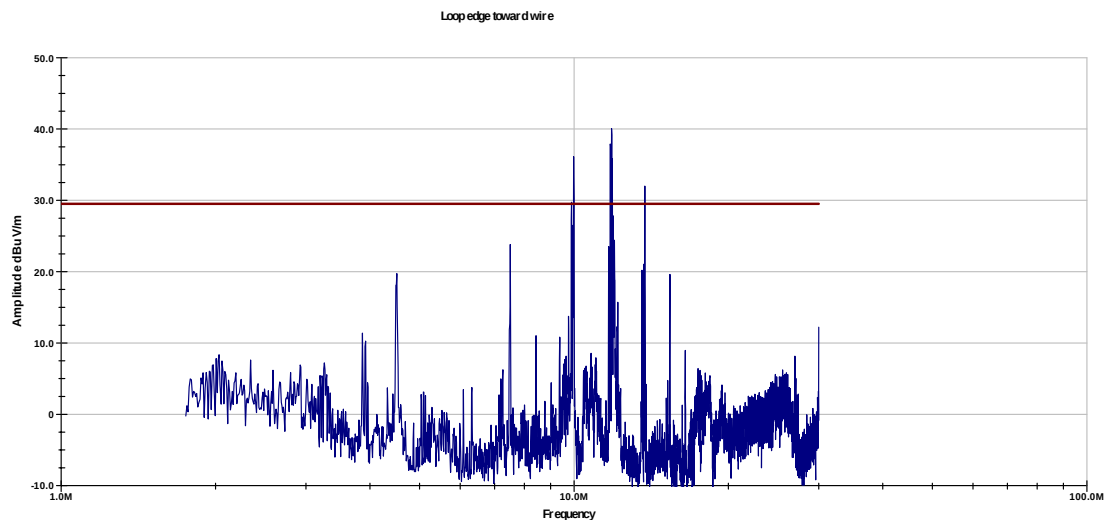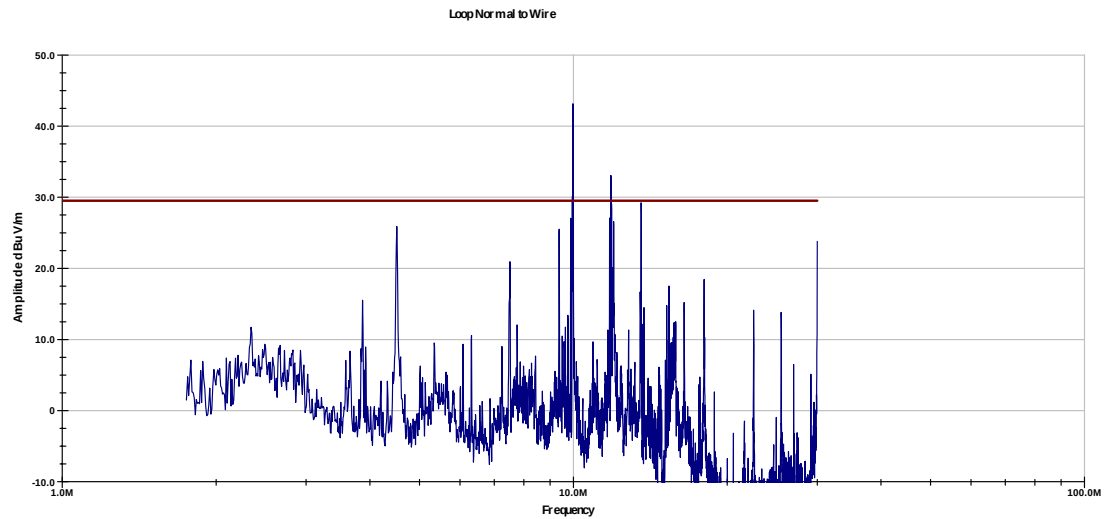



## Field Strengths (location 4) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.562           | 32.6                  | 29.2                | 27.8                  | 0.3             | 19.1              | 12.4                     | 29.5           | -17.1       | P                 |
| 2.924           | 36.9                  | 29.2                | 27.2                  | 0.3             | 19.1              | 16.1                     | 29.5           | -13.4       | P                 |
| 5.352           | 33.43                 | 29.2                | 23.6                  | 0.3             | 19.1              | 9.1                      | 29.5           | -20.4       | P                 |
| 19.389          | 42.8                  | 29.2                | 15.1                  | 0.4             | 19.1              | 10.1                     | 29.5           | -19.4       | P                 |
| 20.783          | 44.7                  | 29.2                | 15.8                  | 0.4             | 19.1              | 12.6                     | 29.5           | -16.9       | P                 |
| 24.685          | 46.2                  | 28.9                | 15.5                  | 0.5             | 19.1              | 14.2                     | 29.5           | -15.3       | P                 |

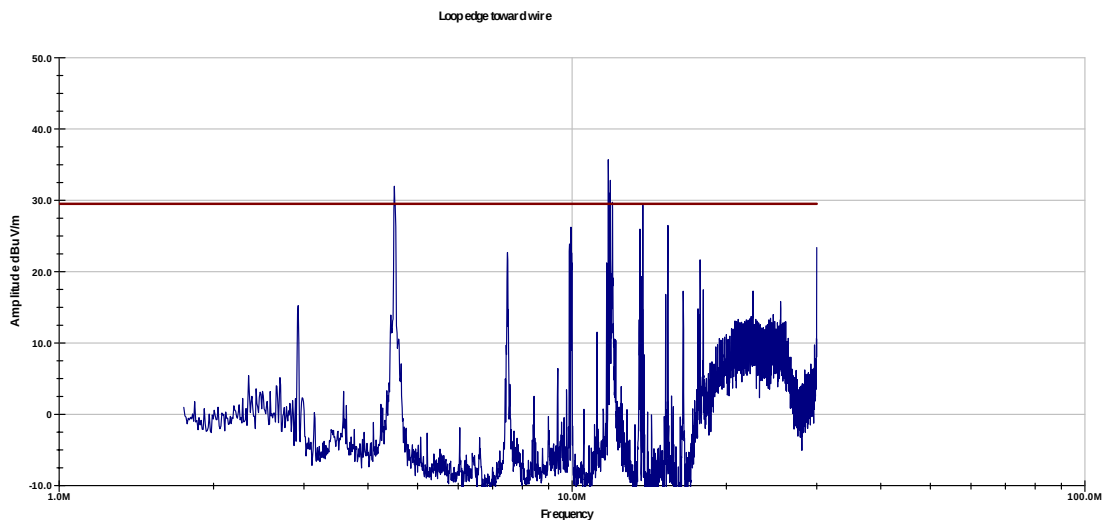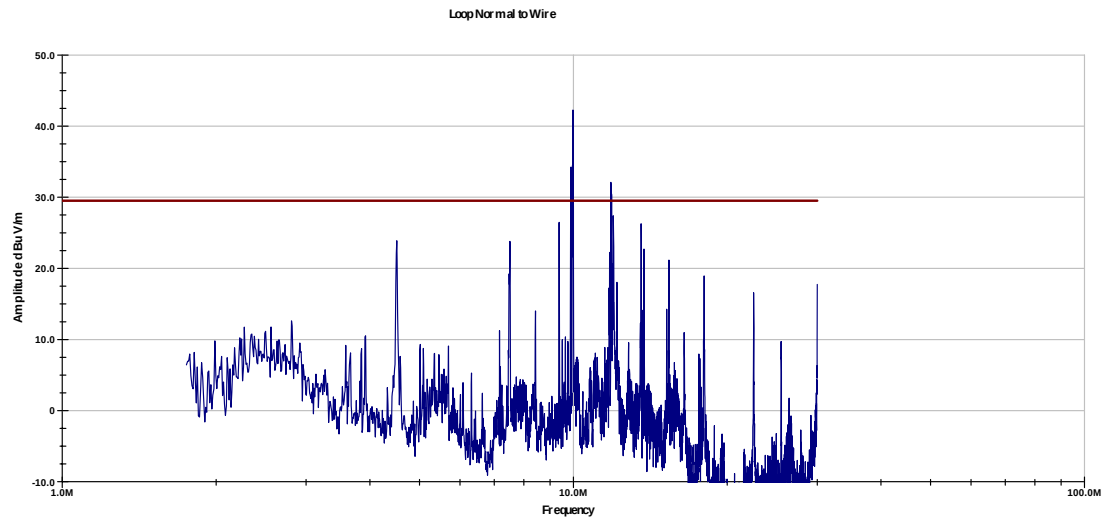



Field Strengths (location 5) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 1.979           | 33.1                  | 29.2                | 30.1                  | 0.3             | 19.1              | 15.2                     | 29.5           | -14.3       | P                 |
| 3.657           | 41.8                  | 29.2                | 26.8                  | 0.3             | 19.1              | 20.6                     | 29.5           | -8.9        | P                 |
| 4.928           | 37.5                  | 29.2                | 23.6                  | 0.3             | 19.1              | 13.1                     | 29.5           | -16.4       | P                 |
| 8.742           | 32.2                  | 29.2                | 22.0                  | 0.3             | 19.1              | 6.2                      | 29.5           | -23.3       | P                 |
| 12.591          | 35.8                  | 29.2                | 21.5                  | 0.4             | 19.1              | 9.4                      | 29.5           | -20.1       | P                 |
| 24.95           | 39.2                  | 28.9                | 15.7                  | 0.5             | 19.1              | 7.3                      | 29.5           | -22.2       | P                 |

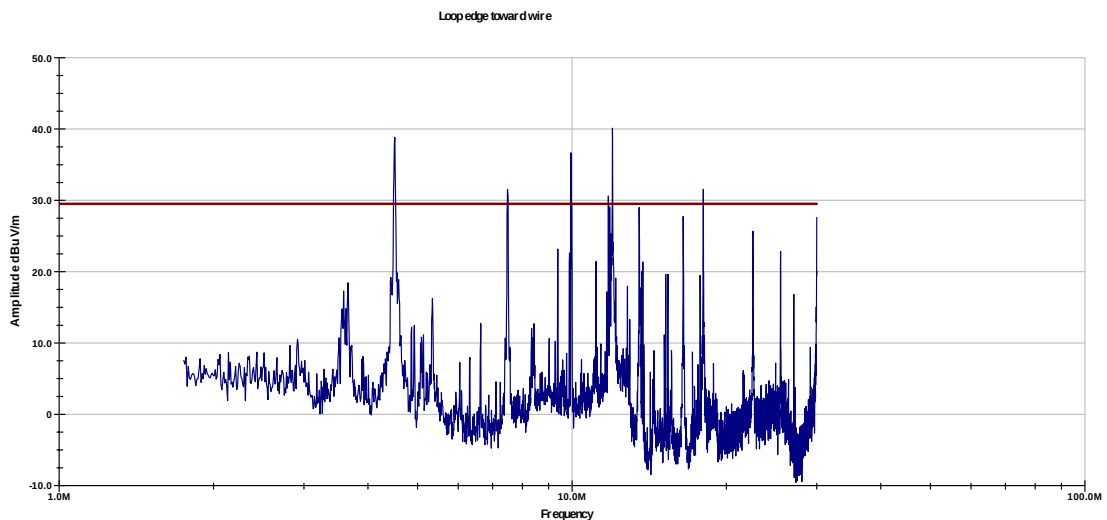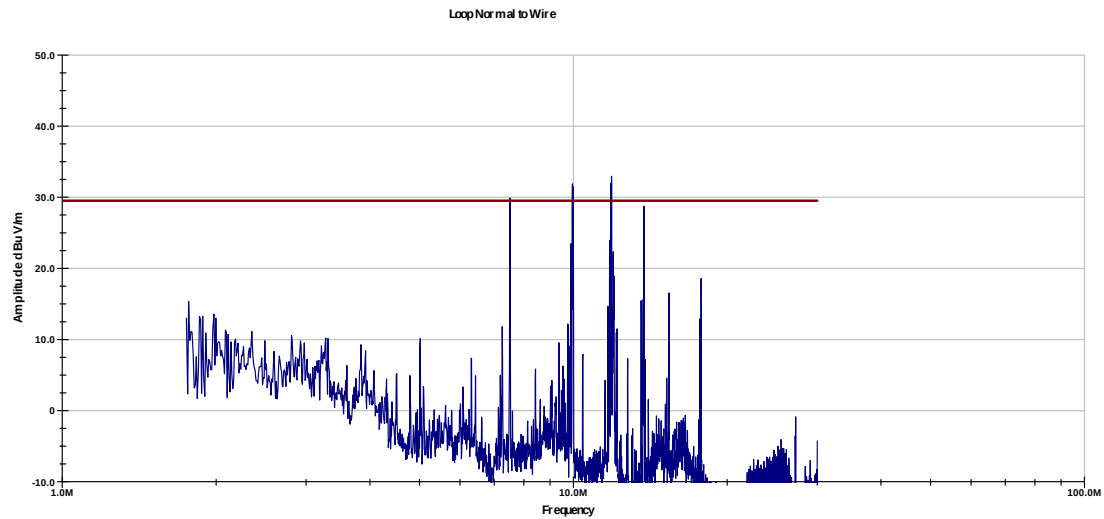



## Field Strengths (location 6) 1.705 MHz – 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 3.277           | 35.8                  | 29.2                | 27.2                  | 0.3             | 19.1              | 15.0                     | 29.5           | -14.5       | P                 |
| 3.657           | 41.6                  | 29.2                | 26.8                  | 0.3             | 19.1              | 20.4                     | 29.5           | -9.1        | P                 |
| 7.232           | 33.2                  | 29.2                | 22.3                  | 0.3             | 19.1              | 7.6                      | 29.5           | -21.9       | P                 |
| 12.832          | 36.1                  | 29.2                | 20.9                  | 0.4             | 19.1              | 9.1                      | 29.5           | -20.4       | P                 |
| 18.877          | 39.2                  | 29.2                | 15.5                  | 0.4             | 19.1              | 6.9                      | 29.5           | -22.6       | P                 |
| 24.685          | 36.2                  | 28.9                | 15.5                  | 0.5             | 19.1              | 4.2                      | 29.5           | -25.3       | P                 |

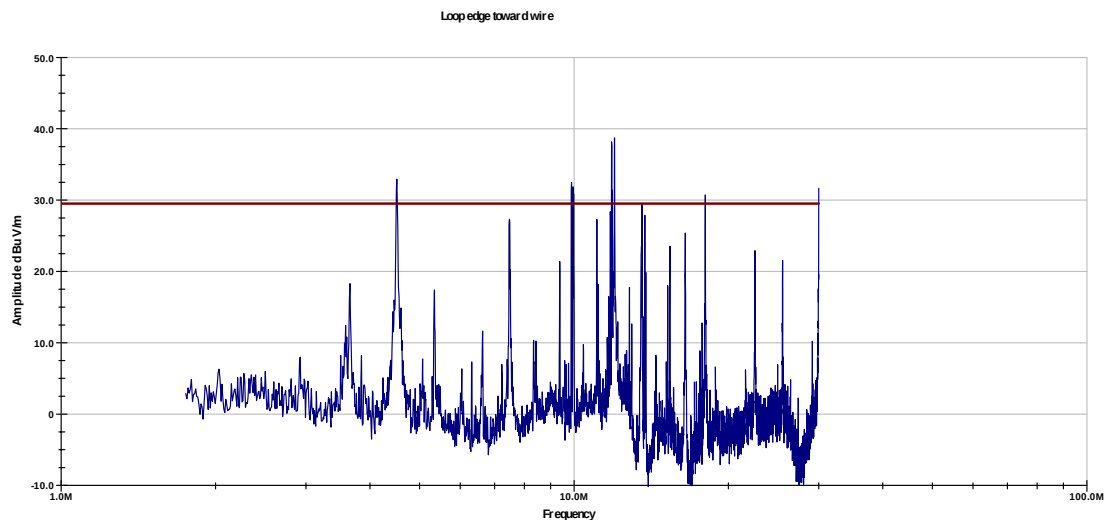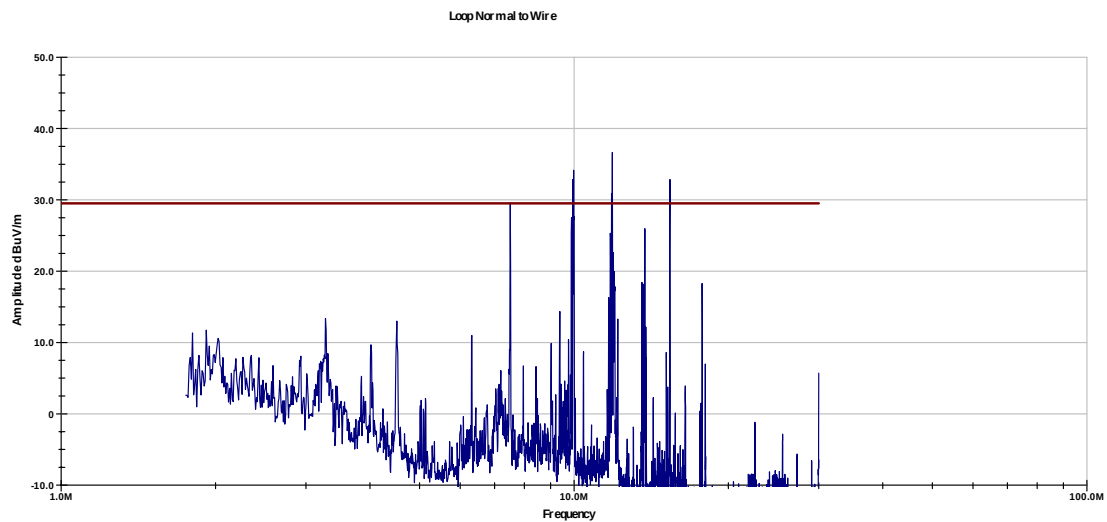



Field Strengths (location 7) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.024           | 31.4                  | 29.2                | 28.6                  | 0.3             | 19.1              | 12.0                     | 29.5           | -17.5       | P                 |
| 2.906           | 29.5                  | 29.2                | 27.2                  | 0.3             | 19.1              | 8.7                      | 29.5           | -20.8       | P                 |
| 6.146           | 37.3                  | 29.2                | 22.2                  | 0.3             | 19.1              | 11.5                     | 29.5           | -18.0       | P                 |
| 12.829          | 37.5                  | 29.2                | 21.0                  | 0.4             | 19.1              | 10.6                     | 29.5           | -18.9       | P                 |
| 15.645          | 32.8                  | 29.2                | 17.6                  | 0.4             | 19.1              | 2.5                      | 29.5           | -27.0       | P                 |
| 24.218          | 34.1                  | 29.0                | 15.3                  | 0.5             | 19.1              | 1.9                      | 29.5           | -27.6       | P                 |

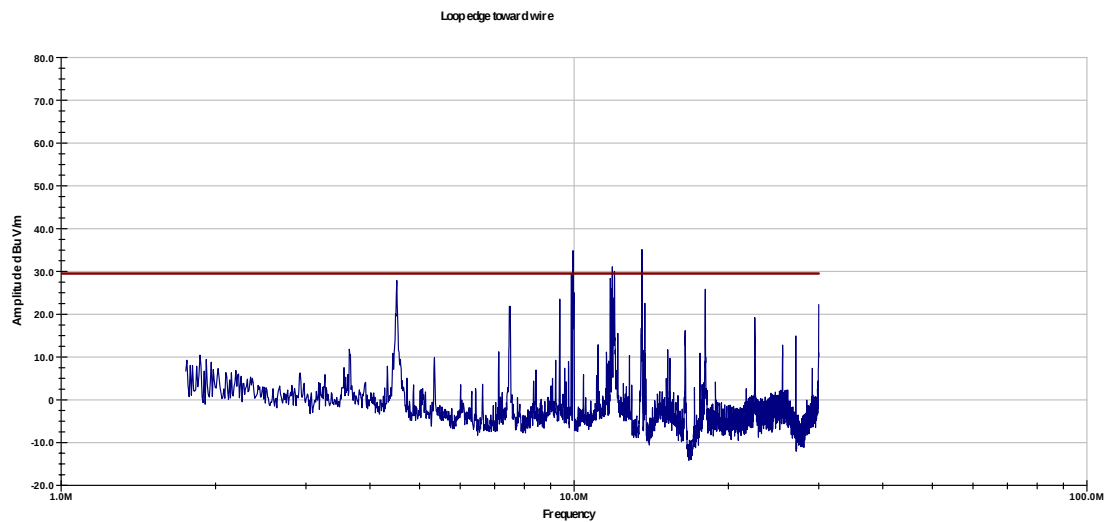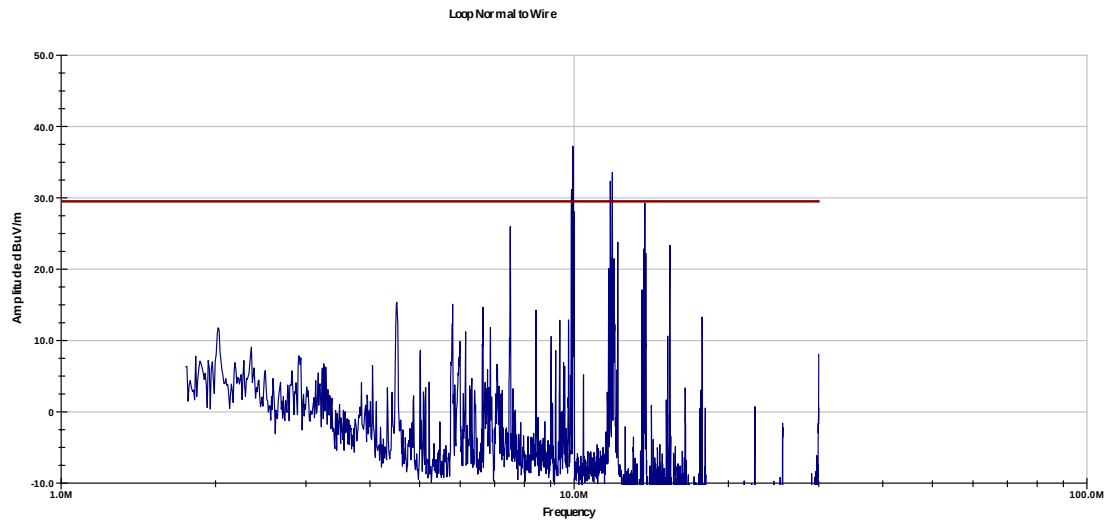



## Field Strengths (location 8) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.023           | 31.3                  | 29.2                | 28.7                  | 0.3             | 19.1              | 12.0                     | 29.5           | -17.5       | P                 |
| 2.341           | 30                    | 29.2                | 28.1                  | 0.3             | 19.1              | 10.1                     | 29.5           | -19.4       | P                 |
| 3.268           | 29.7                  | 29.2                | 27.2                  | 0.3             | 19.1              | 8.9                      | 29.5           | -20.6       | P                 |
| 14.701          | 31.8                  | 29.2                | 17.7                  | 0.4             | 19.1              | 1.6                      | 29.5           | -27.9       | P                 |
| 19.23           | 32.4                  | 29.2                | 15.1                  | 0.4             | 19.1              | -0.3                     | 29.5           | -29.8       | P                 |
| 24.694          | 34.9                  | 28.9                | 15.6                  | 0.5             | 19.1              | 2.9                      | 29.5           | -26.6       | P                 |

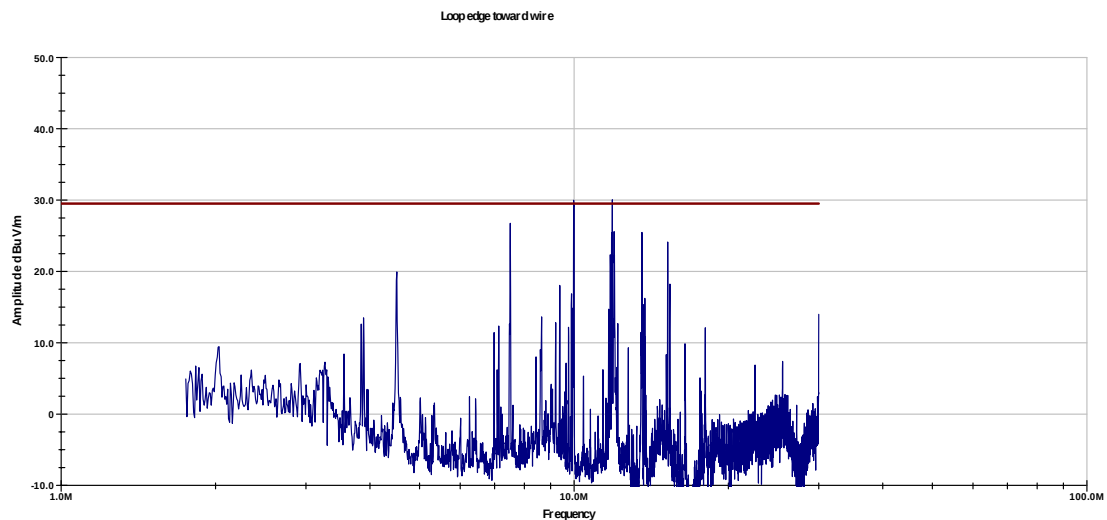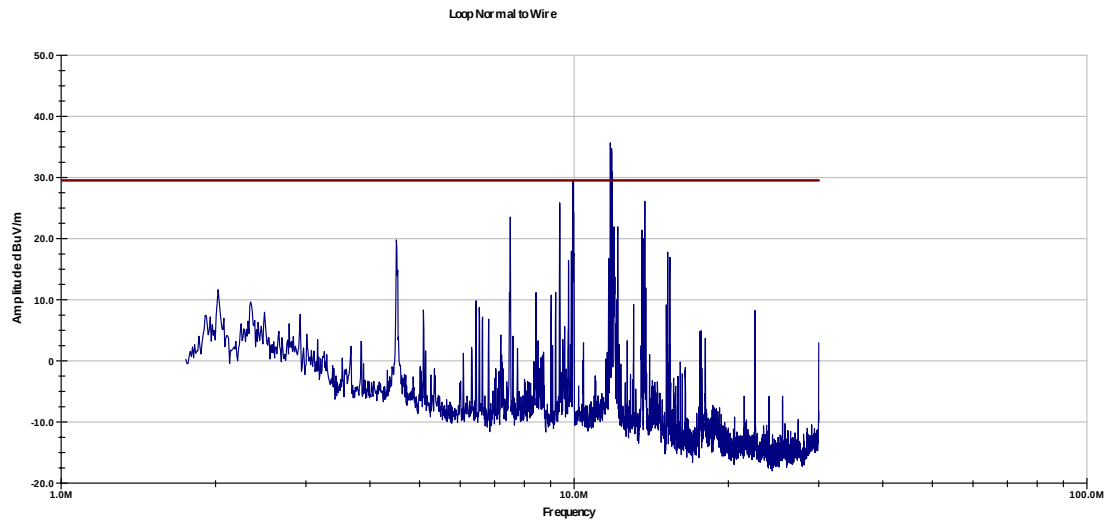



## Field Strengths (location 9) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.015           | 38.2                  | 29.2                | 28.7                  | 0.3             | 19.1              | 18.9                     | 29.5           | -10.6       | P                 |
| 2.333           | 37.7                  | 29.2                | 28.1                  | 0.3             | 19.1              | 17.8                     | 29.5           | -11.7       | P                 |
| 5.334           | 35.8                  | 29.2                | 23.6                  | 0.3             | 19.1              | 11.5                     | 29.5           | -18.0       | P                 |
| 9.024           | 37.6                  | 29.2                | 21.2                  | 0.3             | 19.1              | 10.8                     | 29.5           | -18.7       | P                 |
| 12.759          | 39.2                  | 29.2                | 21.1                  | 0.4             | 19.1              | 12.4                     | 29.5           | -17.1       | P                 |
| 26.469          | 37.5                  | 28.9                | 17.0                  | 0.5             | 19.1              | 7.0                      | 29.5           | -22.5       | P                 |

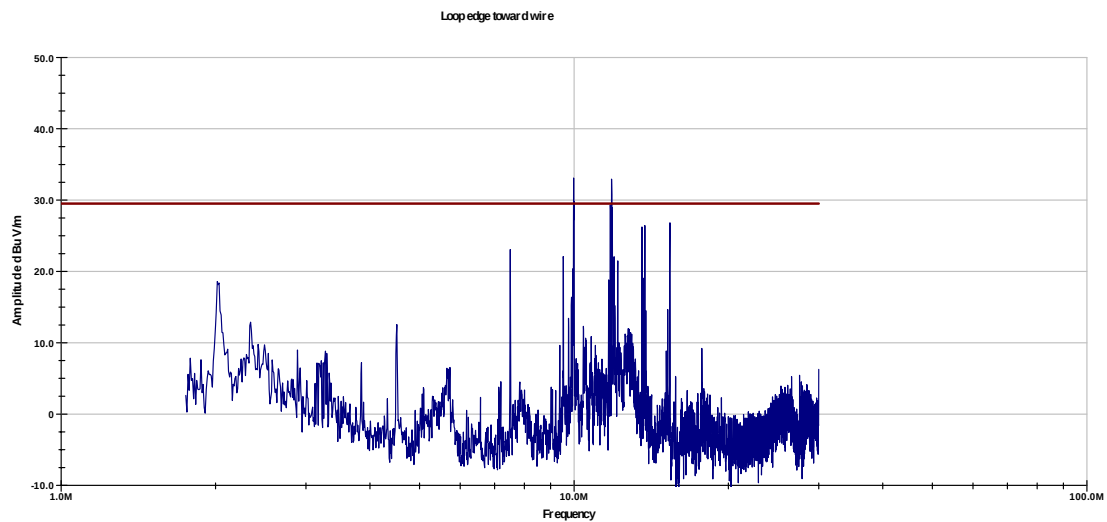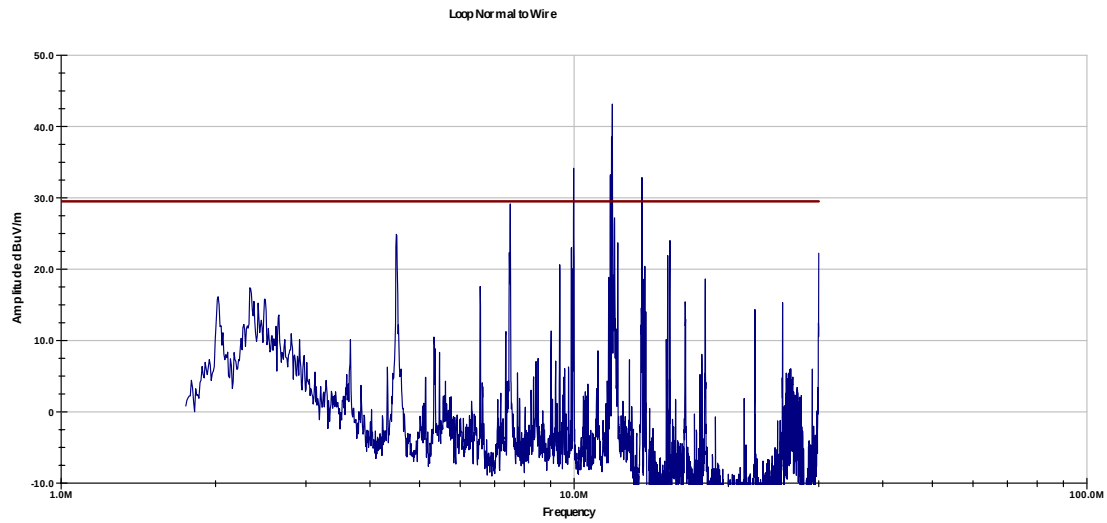



## Field Strengths (location 10) 1.705 MHz – 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.024           | 40.3                  | 29.2                | 28.6                  | 0.3             | 19.1              | 20.9                     | 29.5           | -8.6        | P                 |
| 2.341           | 45.1                  | 29.2                | 28.1                  | 0.3             | 19.1              | 25.2                     | 29.5           | -4.3        | P                 |
| 2.809           | 45.5                  | 29.2                | 27.4                  | 0.3             | 19.1              | 24.9                     | 29.5           | -4.6        | P                 |
| 3.913           | 42.3                  | 29.2                | 26.5                  | 0.3             | 19.1              | 20.8                     | 29.5           | -8.7        | P                 |
| 7.762           | 37.3                  | 29.2                | 22.4                  | 0.3             | 19.1              | 11.7                     | 29.5           | -17.8       | P                 |
| 12.759          | 41.4                  | 29.2                | 21.1                  | 0.4             | 19.1              | 14.6                     | 29.5           | -14.9       | P                 |

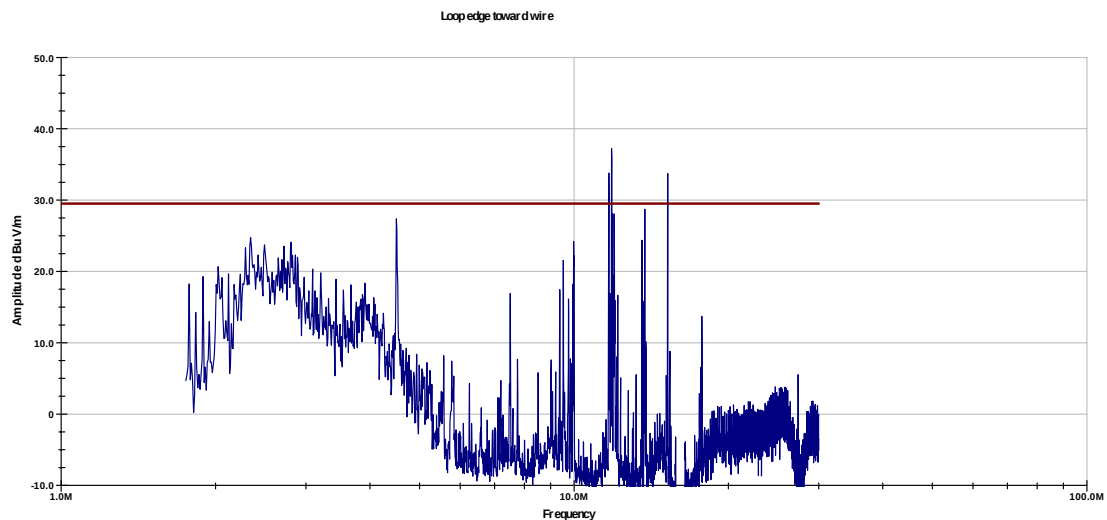
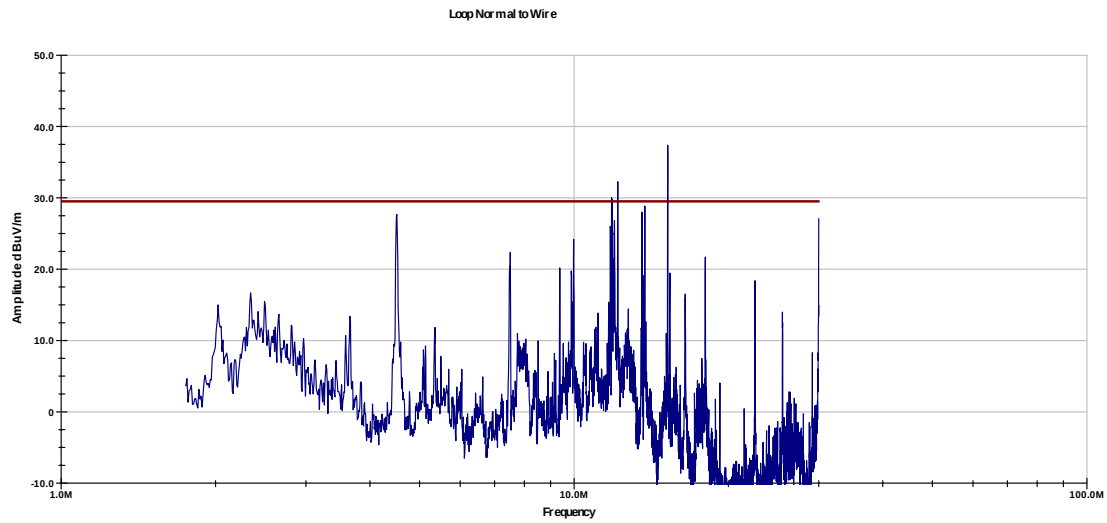


## Field Strengths (location 11) 1.705 MHz – 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.024           | 31.3                  | 29.2                | 28.6                  | 0.3             | 19.1              | 11.9                     | 29.5           | -17.6       | P                 |
| 3.145           | 29.7                  | 29.2                | 27.4                  | 0.3             | 19.1              | 9.1                      | 29.5           | -20.4       | P                 |
| 7.223           | 31.7                  | 29.2                | 22.3                  | 0.3             | 19.1              | 6.1                      | 29.5           | -23.4       | P                 |
| 19.221          | 33.9                  | 29.2                | 15.1                  | 0.4             | 19.1              | 1.2                      | 29.5           | -28.3       | P                 |
| 25.506          | 40.8                  | 28.9                | 16.1                  | 0.5             | 19.1              | 9.4                      | 29.5           | -20.1       | P                 |
| 29.161          | 32.2                  | 28.6                | 18.0                  | 0.5             | 19.1              | 3.0                      | 29.5           | -26.5       | P                 |

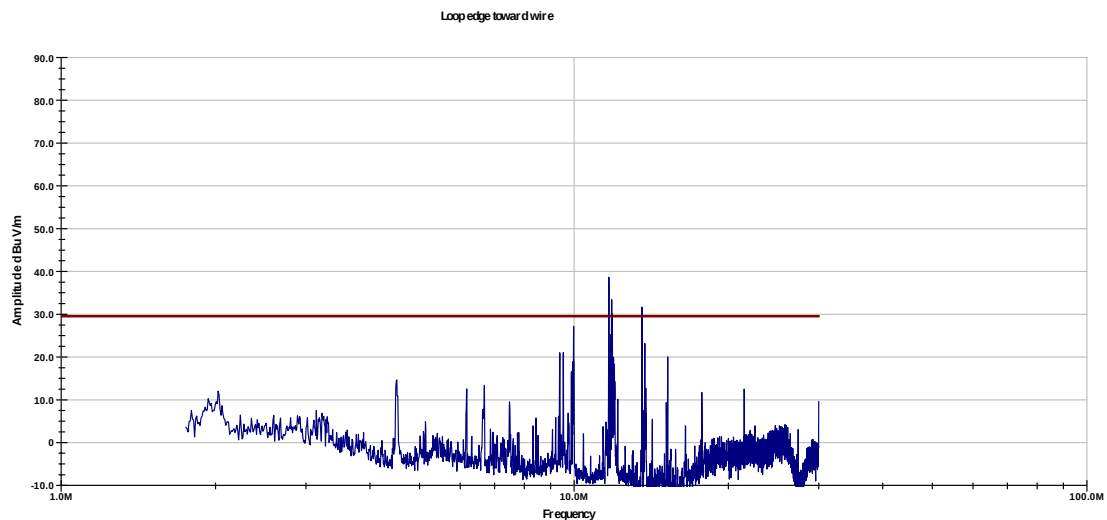
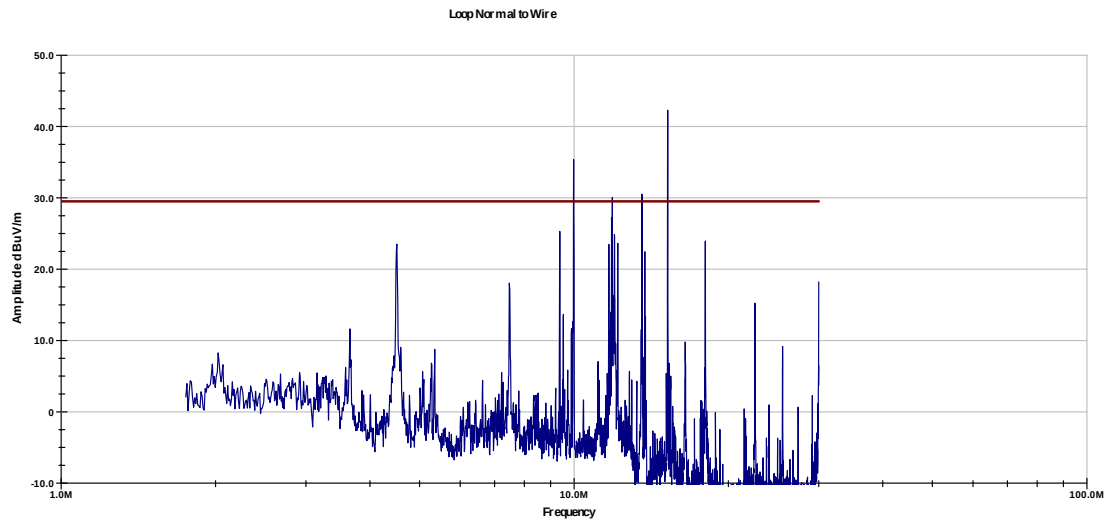


| Field Strengths (location 12) 1.705 MHz– 30 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 1.9                                             | 29                    | 29.2                | 30.2                  | 0.3             | 19.1              | 11.2                     | 29.5           | -18.3       | P                 |
| 2.589                                           | 30.9                  | 29.2                | 27.7                  | 0.3             | 19.1              | 10.6                     | 29.5           | -18.9       | P                 |
| 3.657                                           | 33.9                  | 29.2                | 26.8                  | 0.3             | 19.1              | 12.7                     | 29.5           | -16.8       | P                 |
| 7.038                                           | 33.5                  | 29.2                | 22.3                  | 0.3             | 19.1              | 7.8                      | 29.5           | -21.7       | P                 |
| 19.38                                           | 35.6                  | 29.2                | 15.1                  | 0.4             | 19.1              | 2.9                      | 29.5           | -26.6       | P                 |
| 24.694                                          | 37.5                  | 28.9                | 15.6                  | 0.5             | 19.1              | 5.5                      | 29.5           | -24.0       | P                 |

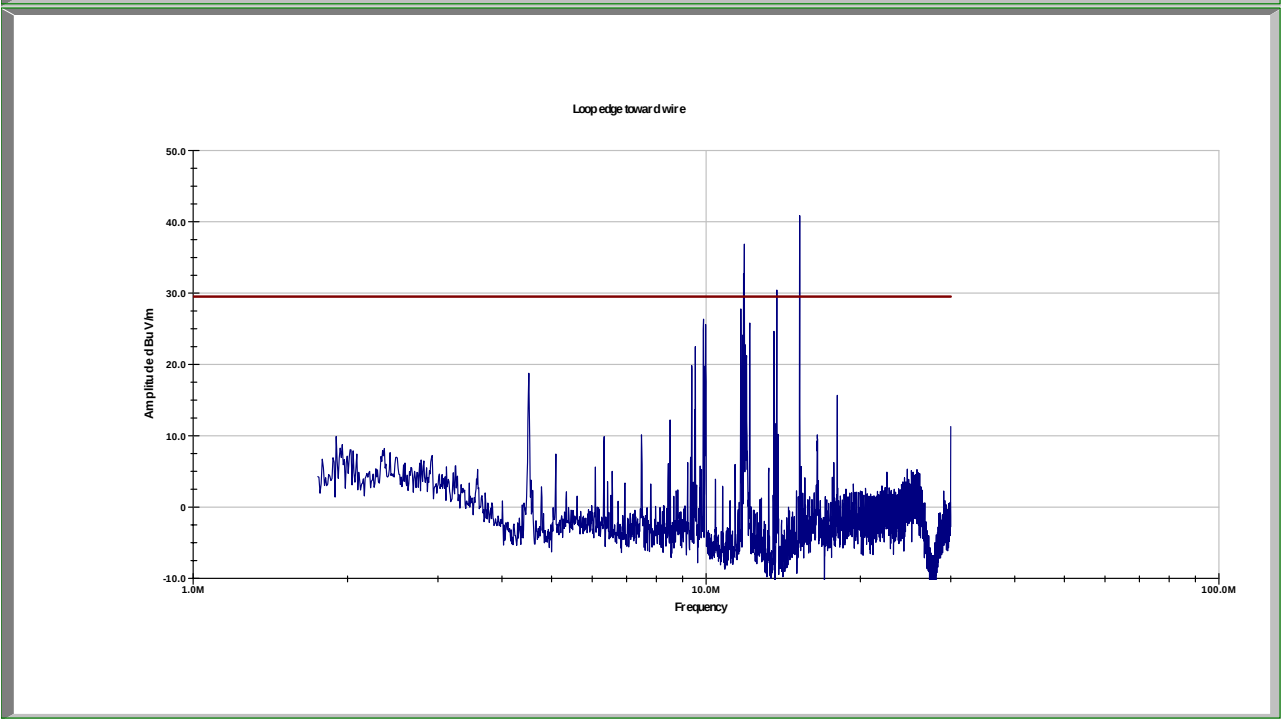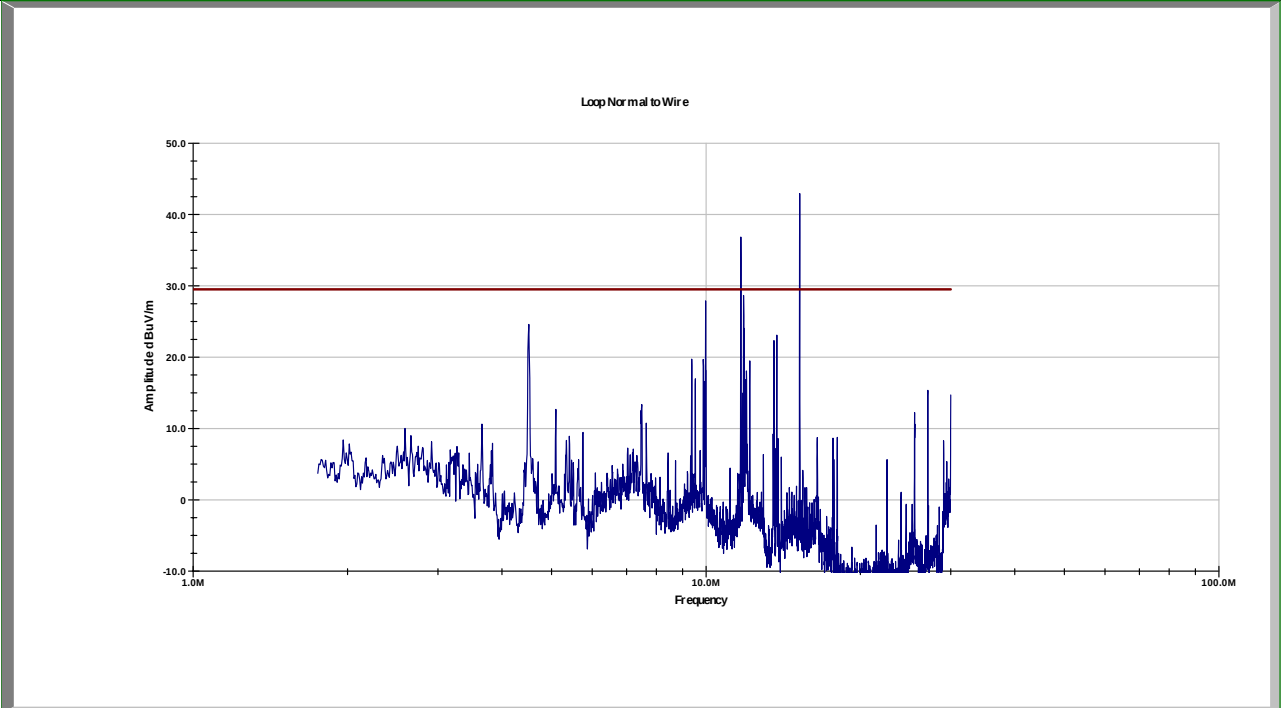



## Field Strengths (location 13) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.015           | 29                    | 29.2                | 28.7                  | 0.3             | 19.1              | 9.7                      | 29.5           | -19.8       | P                 |
| 2.915           | 30                    | 29.2                | 27.2                  | 0.3             | 19.1              | 9.2                      | 29.5           | -20.3       | P                 |
| 3.657           | 30.8                  | 29.2                | 26.8                  | 0.3             | 19.1              | 9.6                      | 29.5           | -19.9       | P                 |
| 6.429           | 31.4                  | 29.2                | 22.2                  | 0.3             | 19.1              | 5.6                      | 29.5           | -23.9       | P                 |
| 16.246          | 35.7                  | 29.2                | 17.3                  | 0.4             | 19.1              | 5.1                      | 29.5           | -24.4       | P                 |
| 27.4            | 40.8                  | 28.8                | 17.4                  | 0.5             | 19.1              | 10.8                     | 29.5           | -18.7       | P                 |

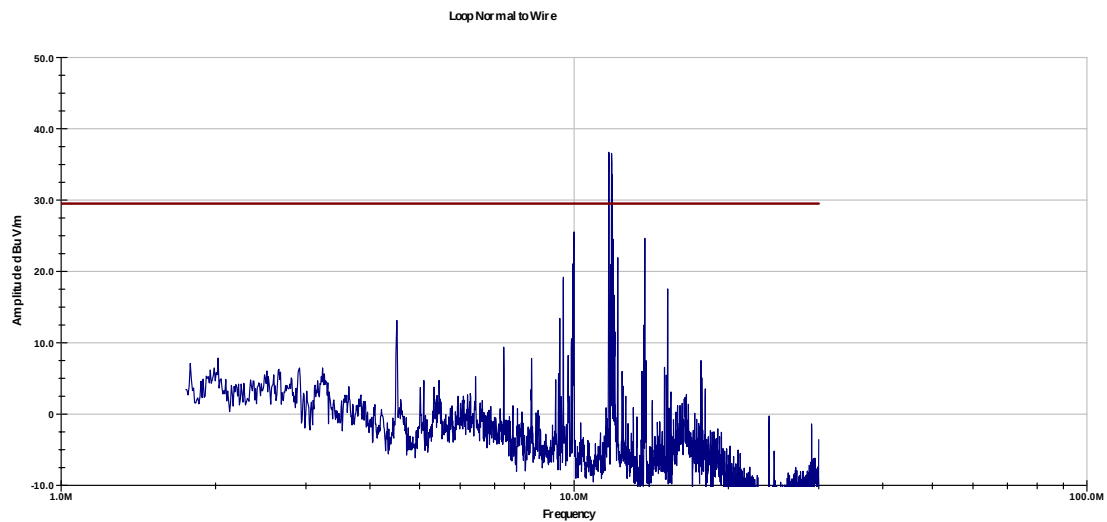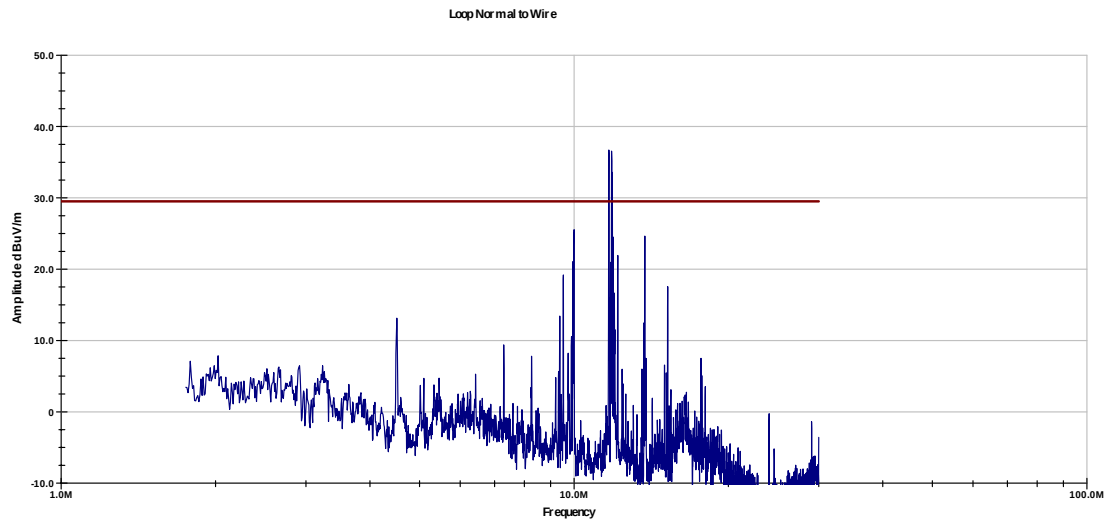



## Field Strengths (location 14) 1.705 MHz– 30 MHz

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.5             | 30.1                  | 29.2                | 27.9                  | 0.3             | 19.1              | 10.0                     | 29.5           | -19.5       | P                 |
| 3.251           | 29.2                  | 29.2                | 27.2                  | 0.3             | 19.1              | 8.4                      | 29.5           | -21.1       | P                 |
| 8.521           | 34.7                  | 29.2                | 21.9                  | 0.3             | 19.1              | 8.6                      | 29.5           | -20.9       | P                 |
| 14.542          | 31.7                  | 29.2                | 17.8                  | 0.4             | 19.1              | 1.6                      | 29.5           | -27.9       | P                 |
| 22.037          | 33.5                  | 29.2                | 17.2                  | 0.5             | 19.1              | 2.9                      | 29.5           | -26.6       | P                 |
| 25.515          | 41.3                  | 28.9                | 16.1                  | 0.5             | 19.1              | 9.9                      | 29.5           | -19.6       | P                 |

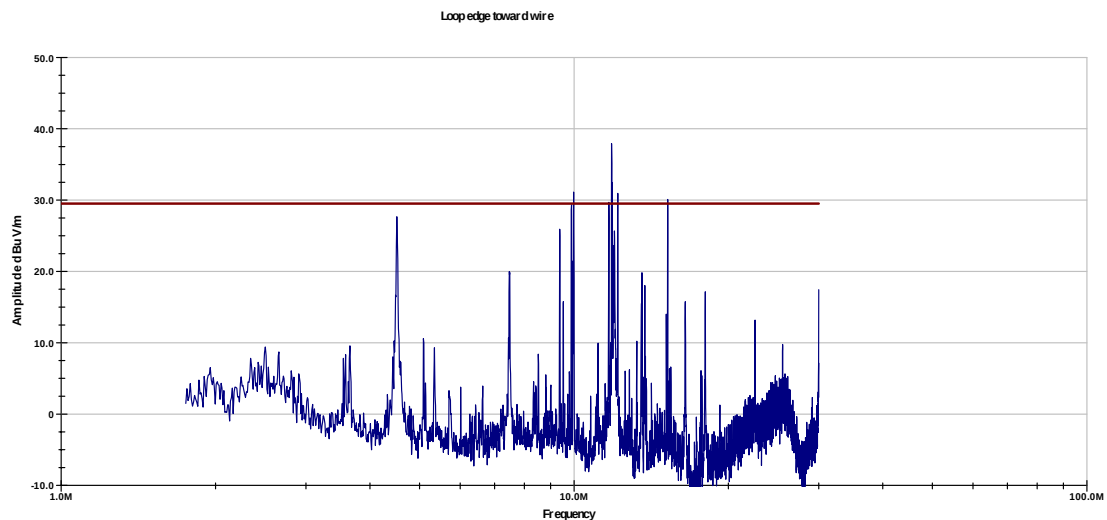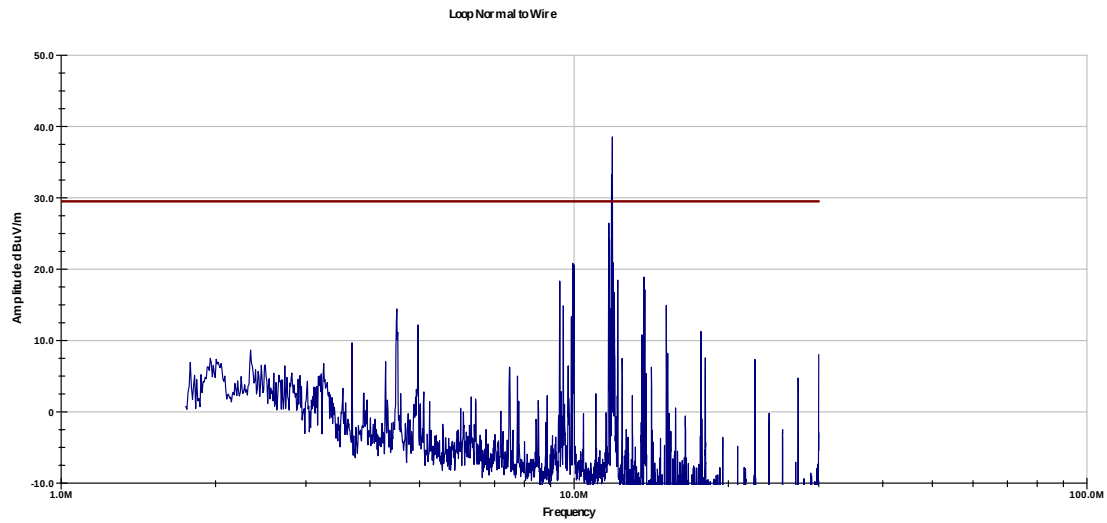


## Field Strengths (location 15) 1.705 MHz– 30 MHz


| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.43            | 27.1                  | 29.2                | 28.0                  | 0.3             | 19.1              | 7.1                      | 29.5           | -22.4       | P                 |
| 2.915           | 32.7                  | 29.2                | 27.2                  | 0.3             | 19.1              | 11.9                     | 29.5           | -17.6       | P                 |
| 3.569           | 28.1                  | 29.2                | 26.9                  | 0.3             | 19.1              | 7.0                      | 29.5           | -22.5       | P                 |
| 20.783          | 44                    | 29.2                | 15.8                  | 0.4             | 19.1              | 11.9                     | 29.5           | -17.6       | P                 |
| 22.531          | 50                    | 29.2                | 17.1                  | 0.5             | 19.1              | 19.3                     | 29.5           | -10.2       | P                 |
| 25.498          | 45.8                  | 28.9                | 16.1                  | 0.5             | 19.1              | 14.4                     | 29.5           | -15.1       | P                 |

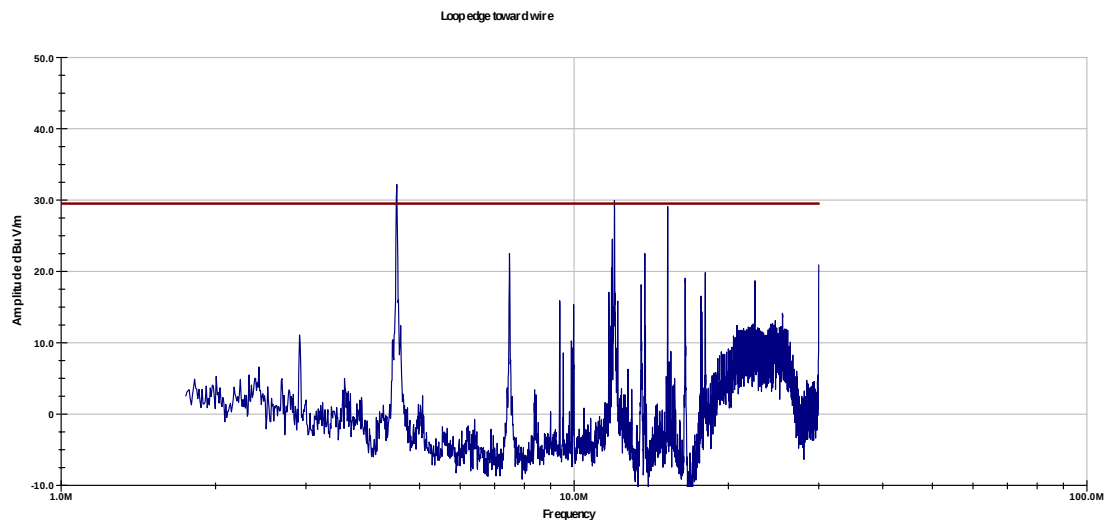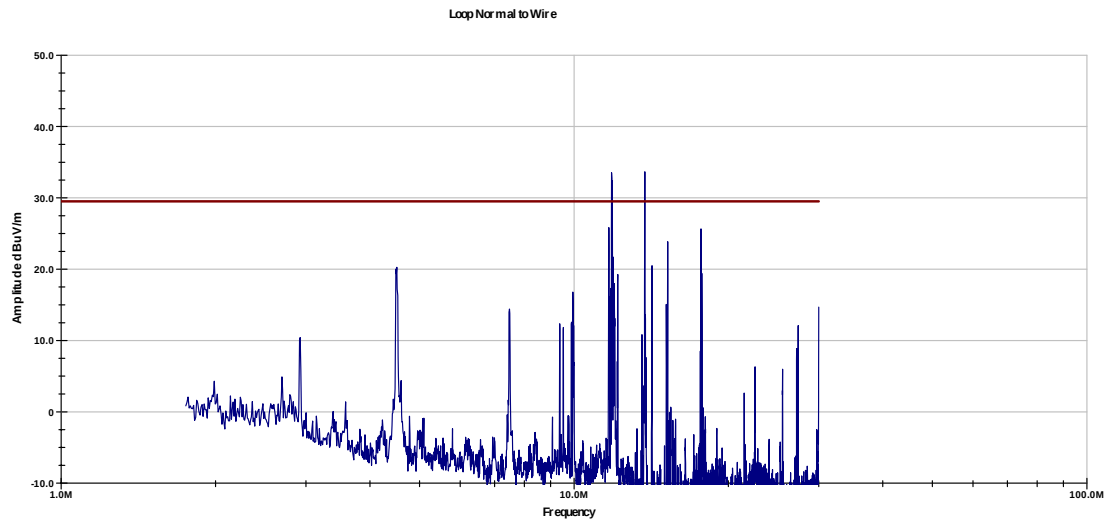

**Field Strengths (location 16) 1.705 MHz– 30 MHz**

| Frequency (MHz) | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
|-----------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| 2.756           | 31.6                  | 29.2                | 27.5                  | 0.3             | 19.1              | 11.1                     | 29.5           | -18.4       | P                 |
| 2.906           | 33.1                  | 29.2                | 27.2                  | 0.3             | 19.1              | 12.3                     | 29.5           | -17.2       | P                 |
| 5.007           | 27.8                  | 29.2                | 23.8                  | 0.3             | 19.1              | 3.6                      | 29.5           | -25.9       | P                 |
| 6.113           | 29.4                  | 29.2                | 22.2                  | 0.3             | 19.1              | 3.6                      | 29.5           | -25.9       | P                 |
| 21.092          | 43.8                  | 29.1                | 16.0                  | 0.4             | 19.1              | 12.0                     | 29.5           | -17.5       | P                 |
| 24.685          | 48                    | 28.9                | 15.5                  | 0.5             | 19.1              | 16.0                     | 29.5           | -13.5       | P                 |

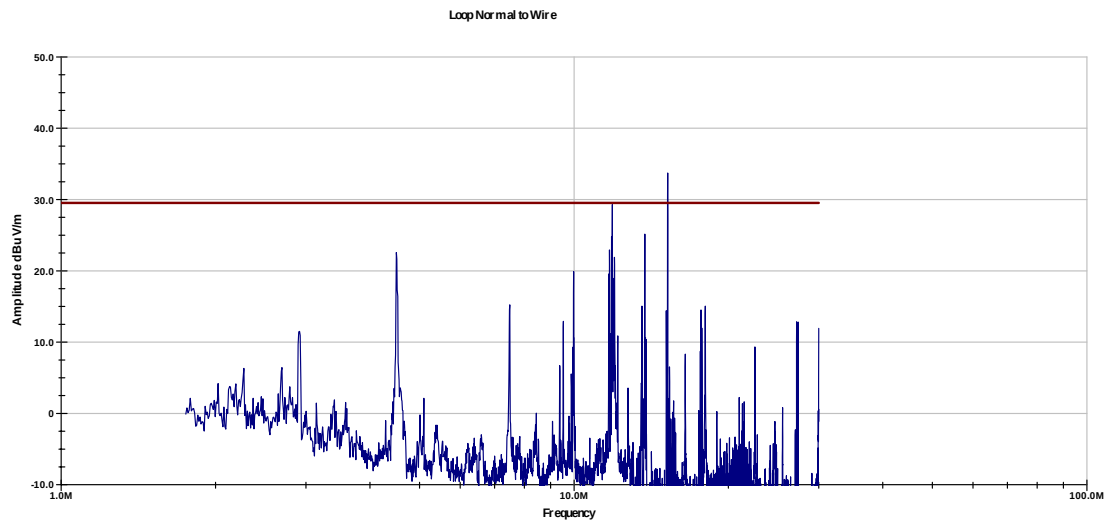

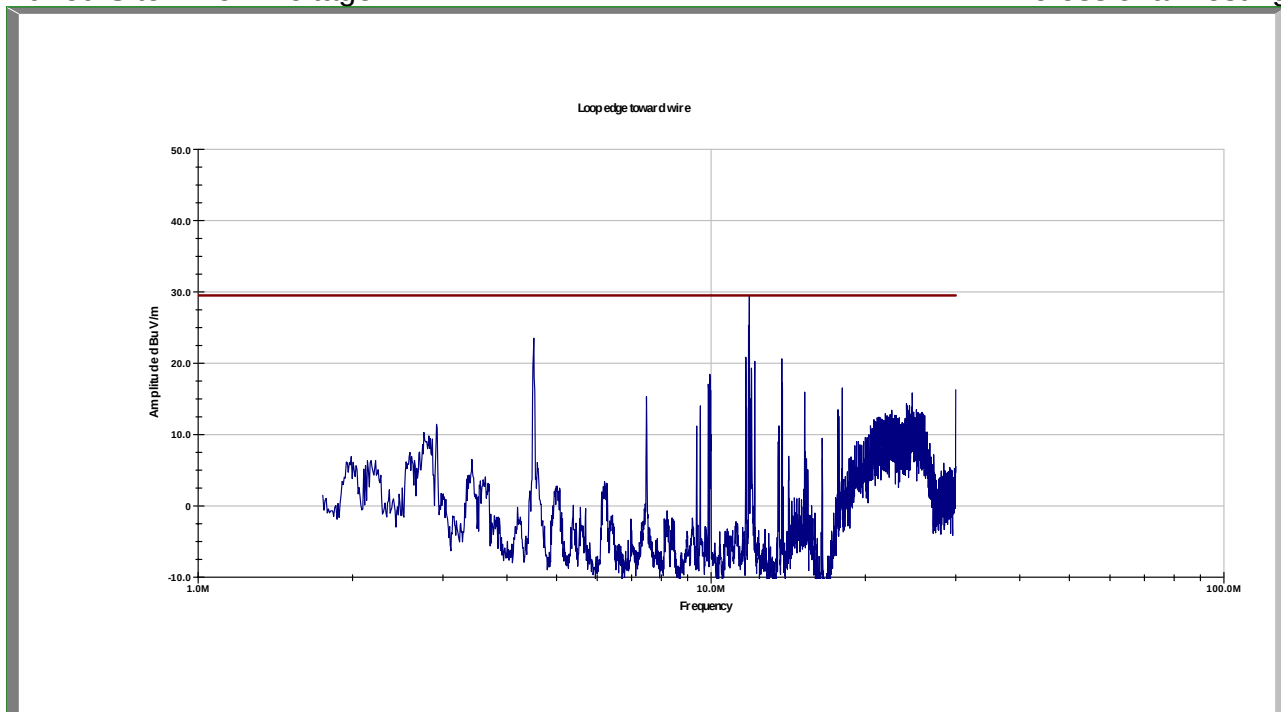



| Field Strengths (all locations) 1.705 MHz– 30 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|---------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                   | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 2.341                                             | 45.1                  | 29.2                | 28.1                  | 0.3             | 19.1              | 25.2                     | 29.5           | -4.3        | P                 |
| 2.809                                             | 45.5                  | 29.2                | 27.4                  | 0.3             | 19.1              | 24.9                     | 29.5           | -4.6        | P                 |
| 2.024                                             | 40.3                  | 29.2                | 28.6                  | 0.3             | 19.1              | 20.9                     | 29.5           | -8.6        | P                 |
| 3.913                                             | 42.3                  | 29.2                | 26.5                  | 0.3             | 19.1              | 20.8                     | 29.5           | -8.7        | P                 |
| 3.657                                             | 41.8                  | 29.2                | 26.8                  | 0.3             | 19.1              | 20.6                     | 29.5           | -8.9        | P                 |
| 3.657                                             | 41.6                  | 29.2                | 26.8                  | 0.3             | 19.1              | 20.4                     | 29.5           | -9.1        | P                 |
| <b>Test Results: PASS</b>                         |                       |                     |                       |                 |                   |                          |                |             |                   |

**TESTING ABOVE 30 MHz**



30 MHz – 1,000 MHz

1. Contact the BPL system operator and set the EUT for MAXIMUM power and MAXIMUM burst rate before **Certification** testing. If **Validation** testing is performed there is no need for MAXIMUM power testing and only COMPLIANCE (operating) power is used.
2. Set the EMI Receiver or Spectrum Analyzer to 120 kHz IF bandwidth and PEAK detection. Set the frequency step size for 60 kHz (half the IF bandwidth) and scan the spectra from 30 MHz – 1,000 MHz for BPL emissions. For spectrum analyzers, scan smaller sub-ranges to allow at least three pixels on the analyzer's screen to fit within the 120 kHz bandwidth. EXAMPLE: (400 pixels/3) x 120 kHz restricts scan widths to 16 MHz (1 MHz/div maximum) Covering 30-1,000 MHz would require 97 sub-ranges each 10 MHz wide. (1 MHz/div x 10 div on-screen)
3. Orient the E-field antenna vertically and then horizontally to record data at both polarizations.
4. Identify the six highest BPL emissions in each polarization. (validate these choices by demodulating them and listening for voice or music)
5. Validate that the Spectrum Analyzer is using a pre-amplifier and it is not being overloaded. Increase the analyzer's input attenuation to verify that the instrument is not in amplitude compression by making sure all signals move in 10dB increments with the attenuator setting. Use the same technique with a fixed 10dB attenuator before the preamplifier to ensure that it is not being compressed
6. Validate that the repetition rate is at least 20 Hz by demodulating the audio on each of the six signals. If so, use Quasi-Peak detection on just those six loudest BPL signals and enter the receiver voltage into the worksheet below. If the burst rate is less than 20 Hz enter the Peak voltage into the worksheet below and indicate which detector was used.
7. If voice, non-BPL data or music is demodulated that candidate emission is eliminated and the Receiver is tuned to the next loudest emission for demodulation and identification to find the six highest BPL emissions.
8. Validate that the calculations employed are the same as shown in the worksheet if software is used for this measurement.
9. Capture a complete spectrum showing both polarizations for inclusion into the Test Report.
10. For **Certification** testing, contact the BPL system operator and set the EUT down to its COMPLIANCE power setting. Tell the operator how many dB the system needs to be attenuated for compliance with the FCC limits on field strengths (or below them).



| Field Strengths (location 1) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.625                                         | 49.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 34.3                     | 39             | -4.7        | QP                |
| 31.95                                          | 51.4                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.0                     | 39             | -3.0        | QP                |

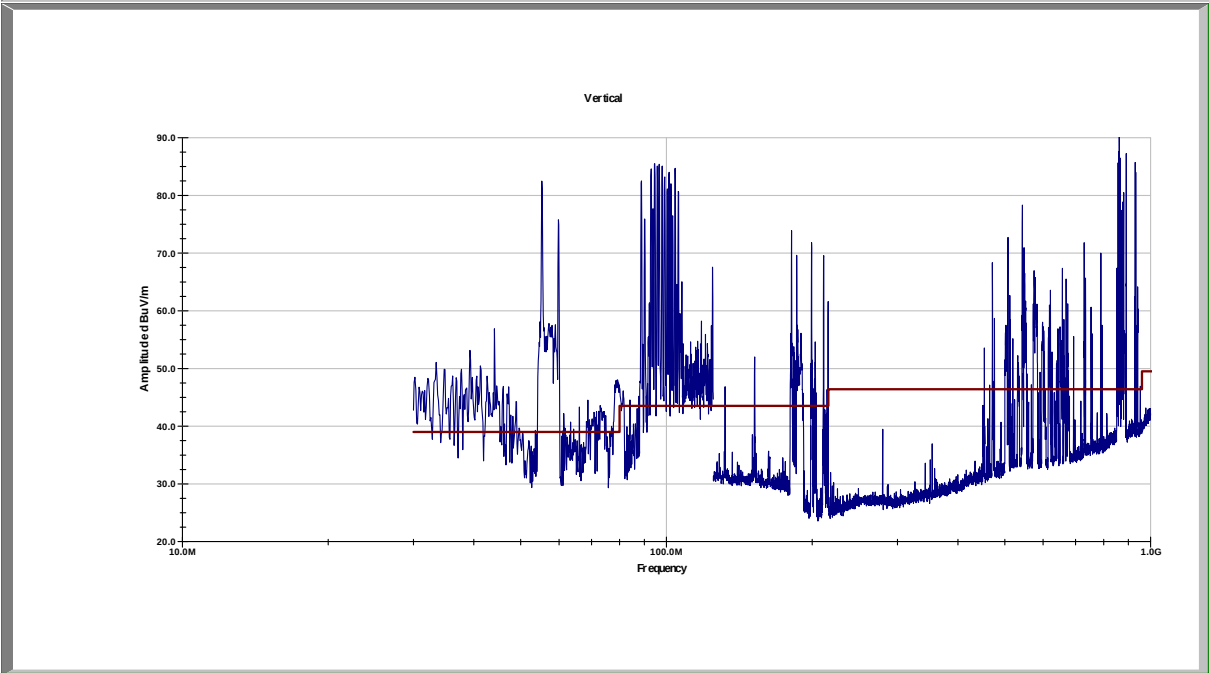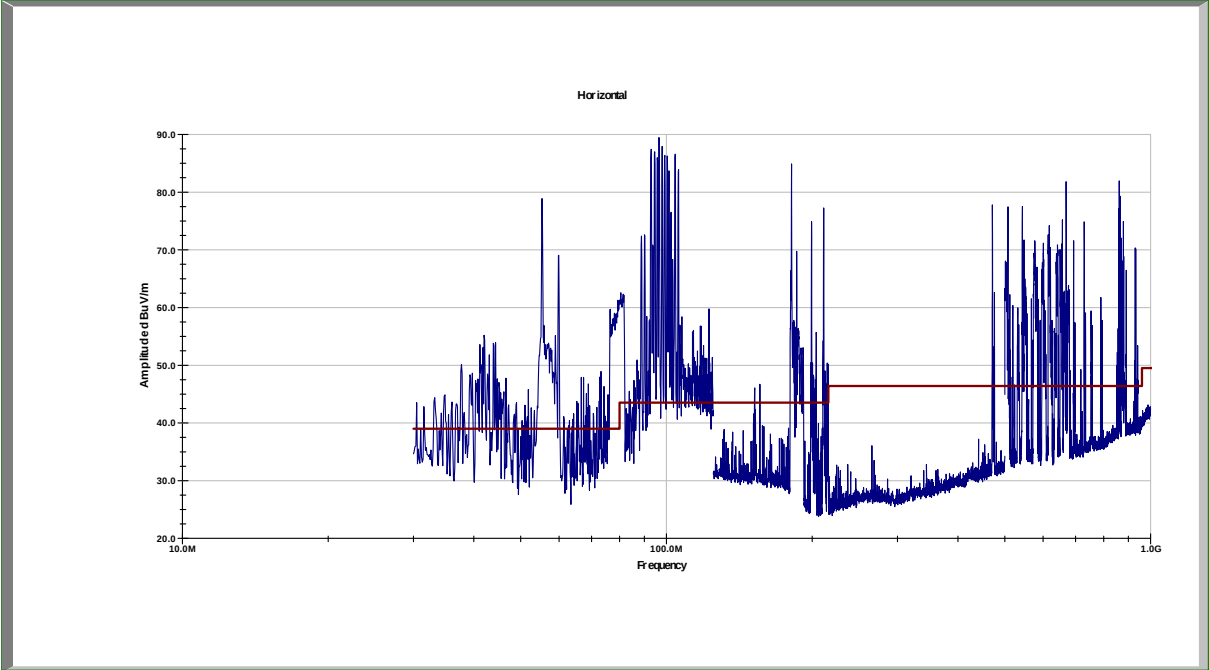



| Field Strengths (location 2) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.915                                         | 50.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 35.3                     | 39             | -3.7        | QP                |
| 30.985                                         | 50.4                  | 33.5                | 17.1                  | 1.0             | 0.0               | 35.0                     | 39             | -4.0        | QP                |

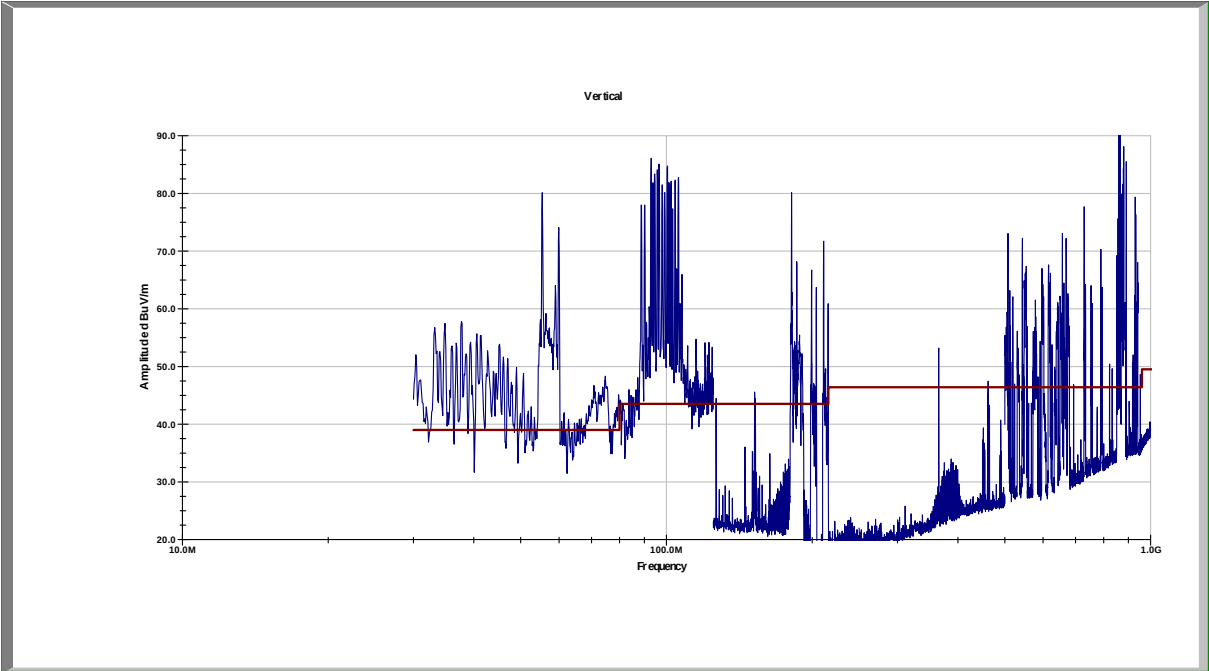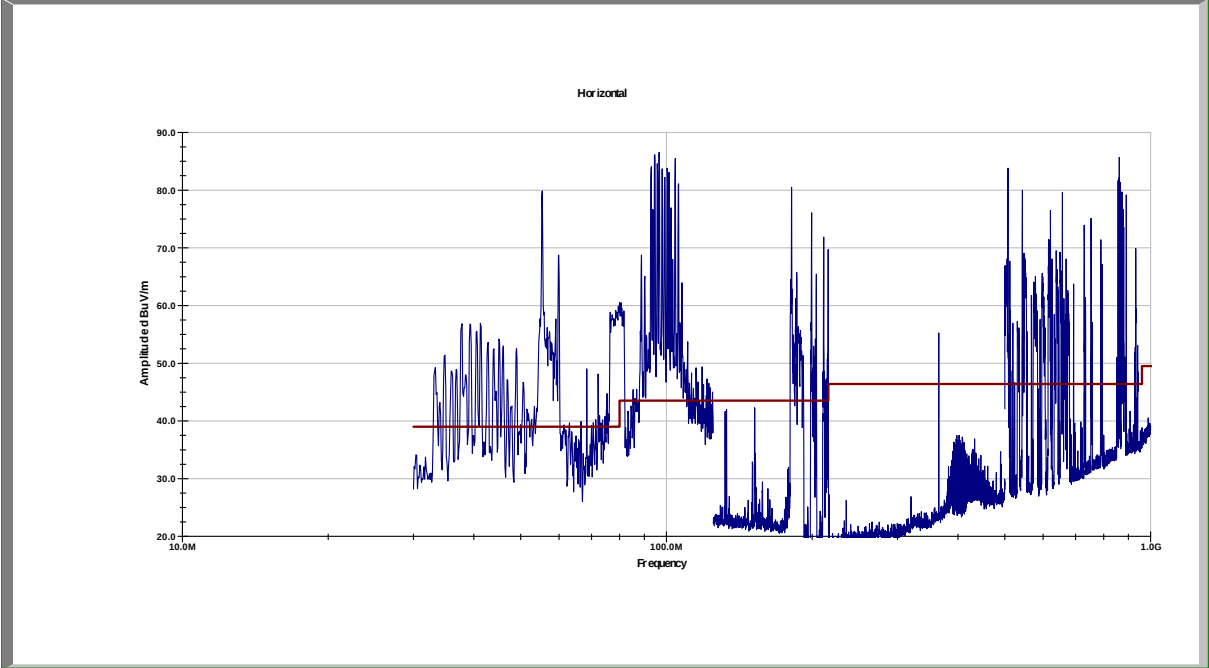



| Field Strengths (location 3) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.098                                         | 46.3                  | 33.5                | 17.1                  | 1.0             | 0.0               | 30.9                     | 39             | -8.1        | QP                |
| 31.943                                         | 51.5                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.1                     | 39             | -2.9        | QP                |

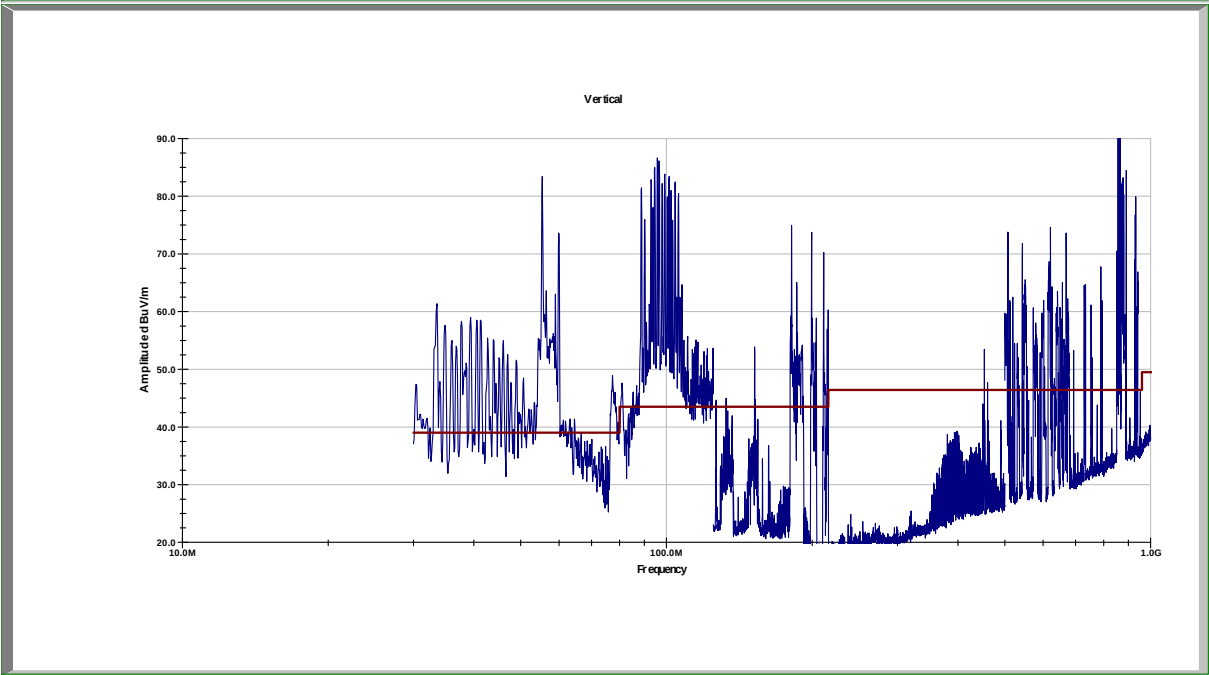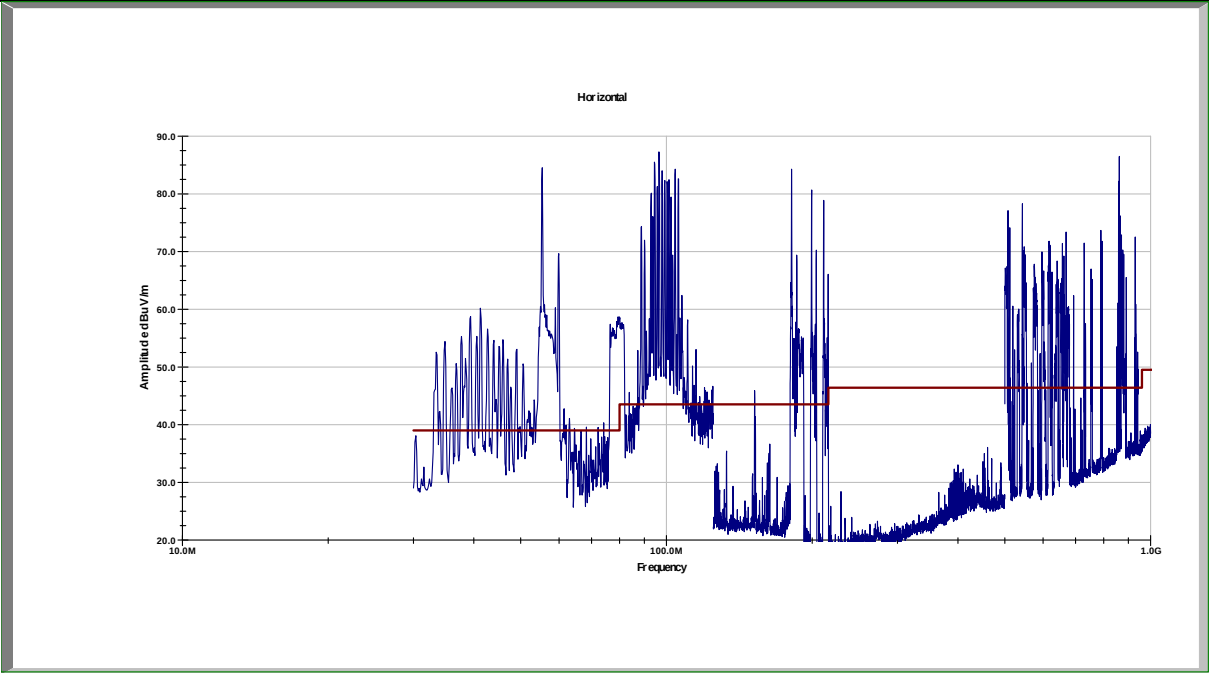



| Field Strengths (location 4) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.975                                         | 52.19                 | 33.5                | 17.1                  | 1.0             | 0.0               | 36.8                     | 39             | -2.2        | QP                |

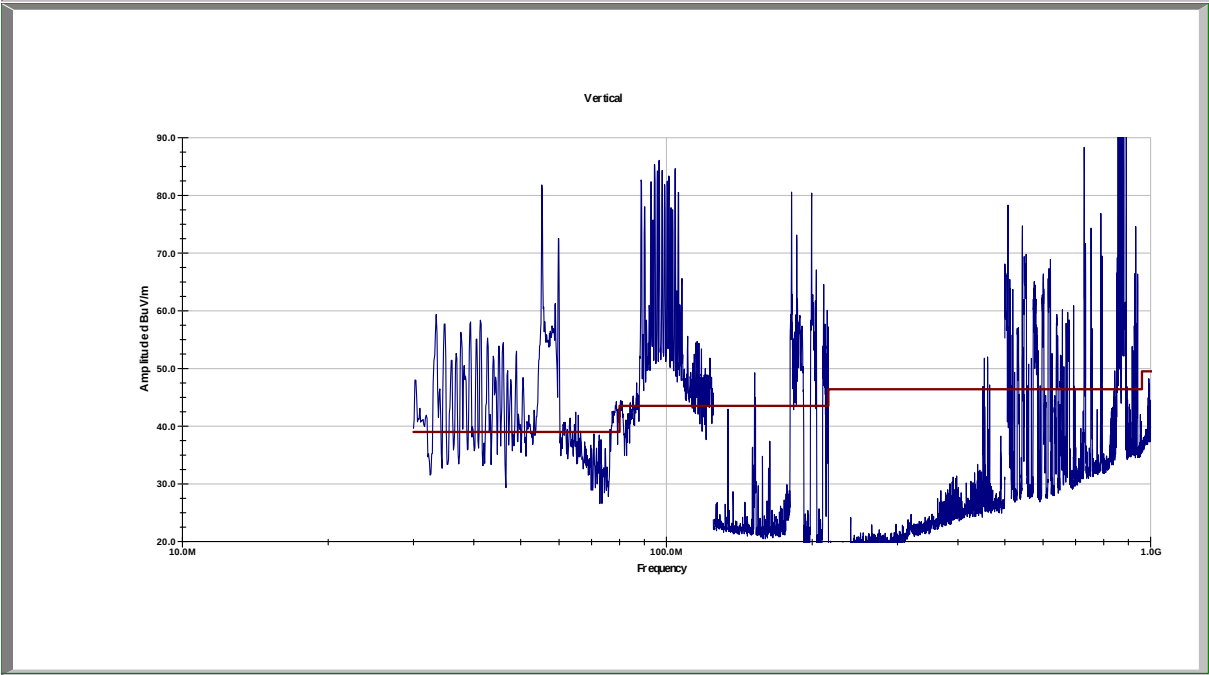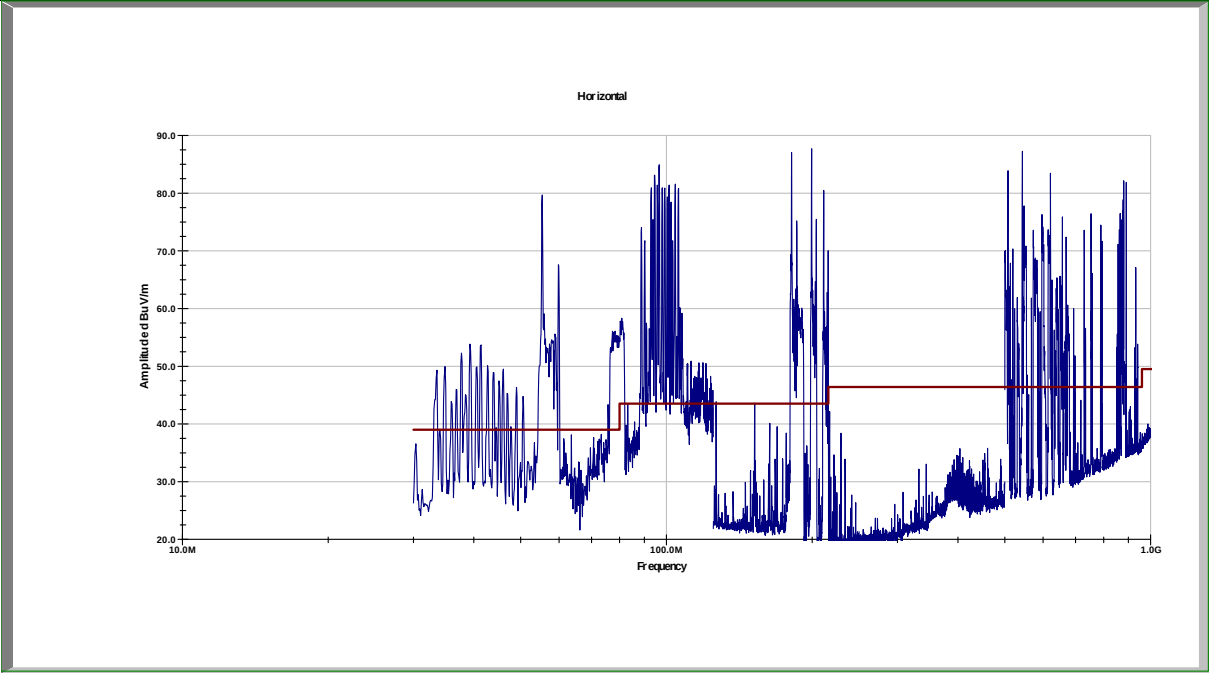



| Field Strengths (location 5) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.945                                         | 52.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 37.3                     | 39             | -1.7        | QP                |

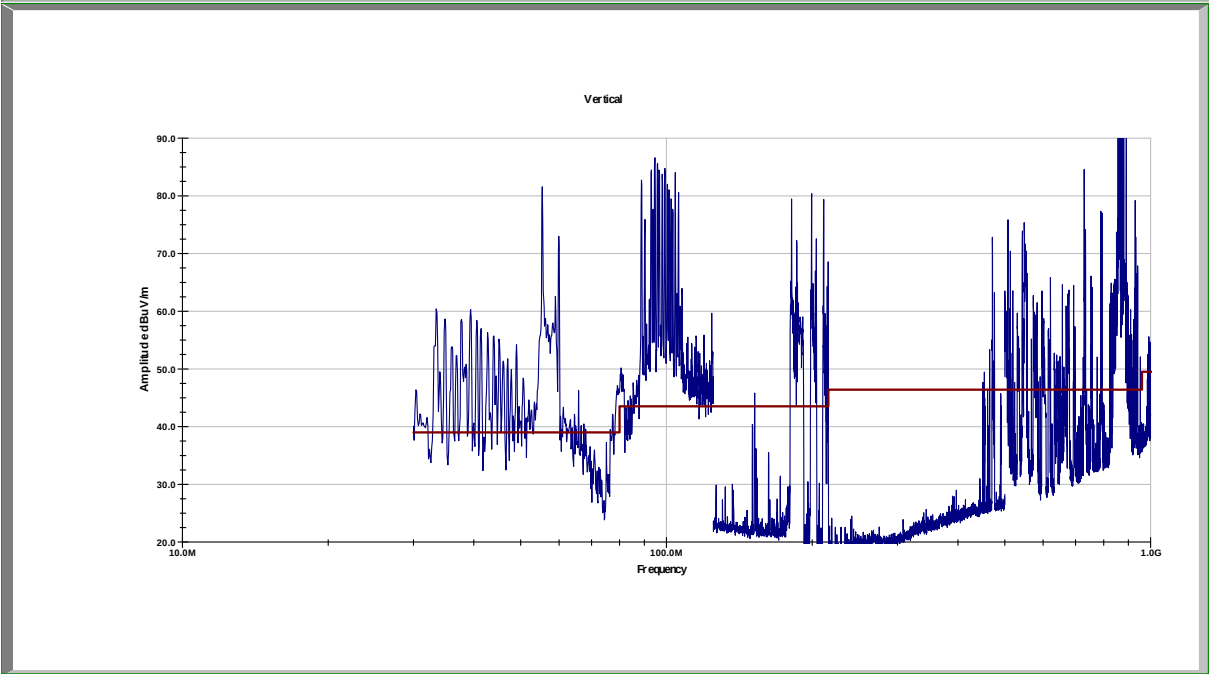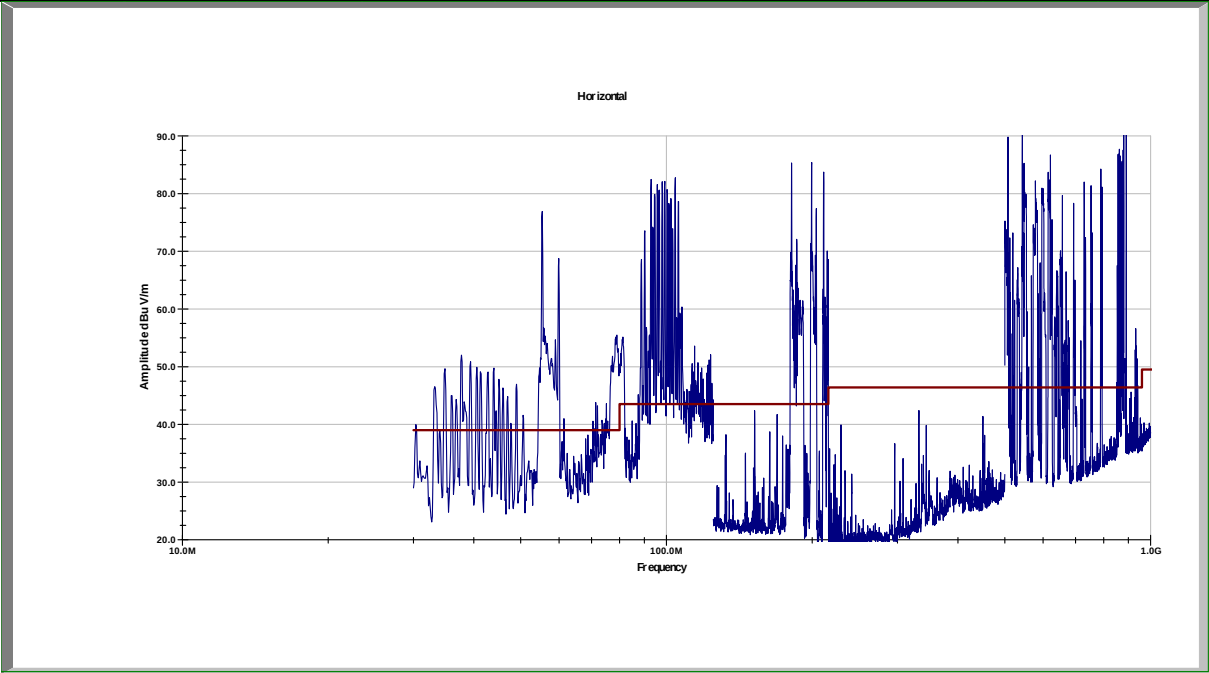



| Field Strengths (location 6) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.945                                         | 52.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 37.3                     | 39             | -1.7        | QP                |

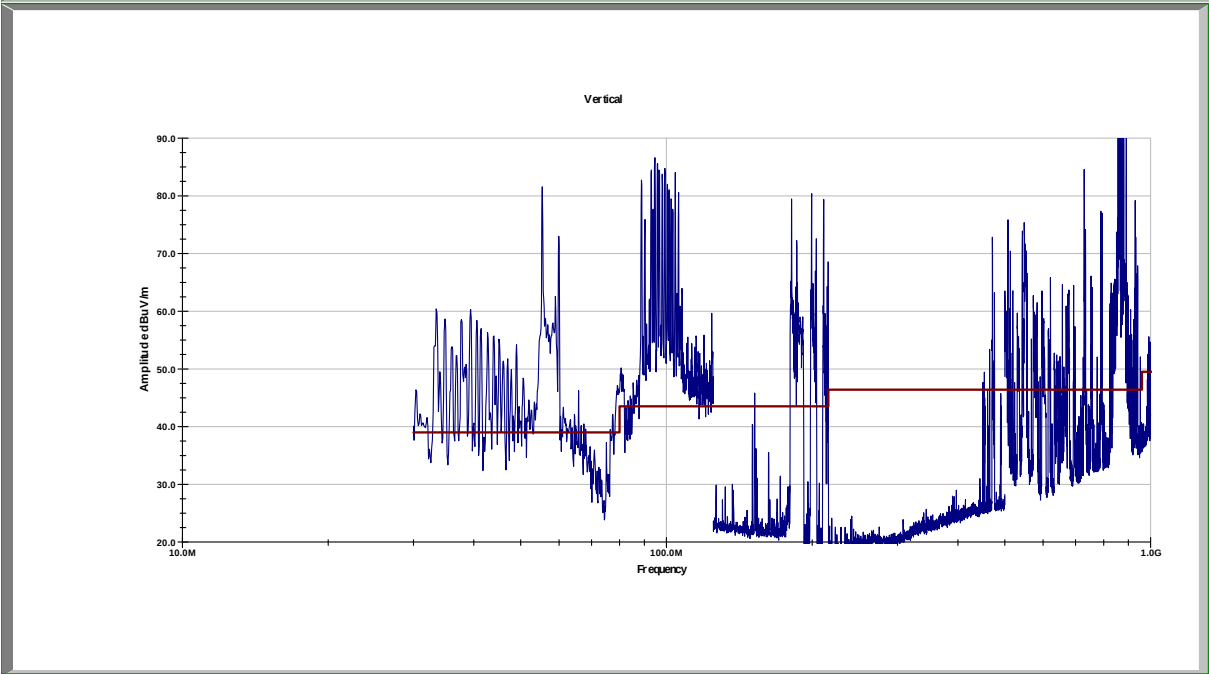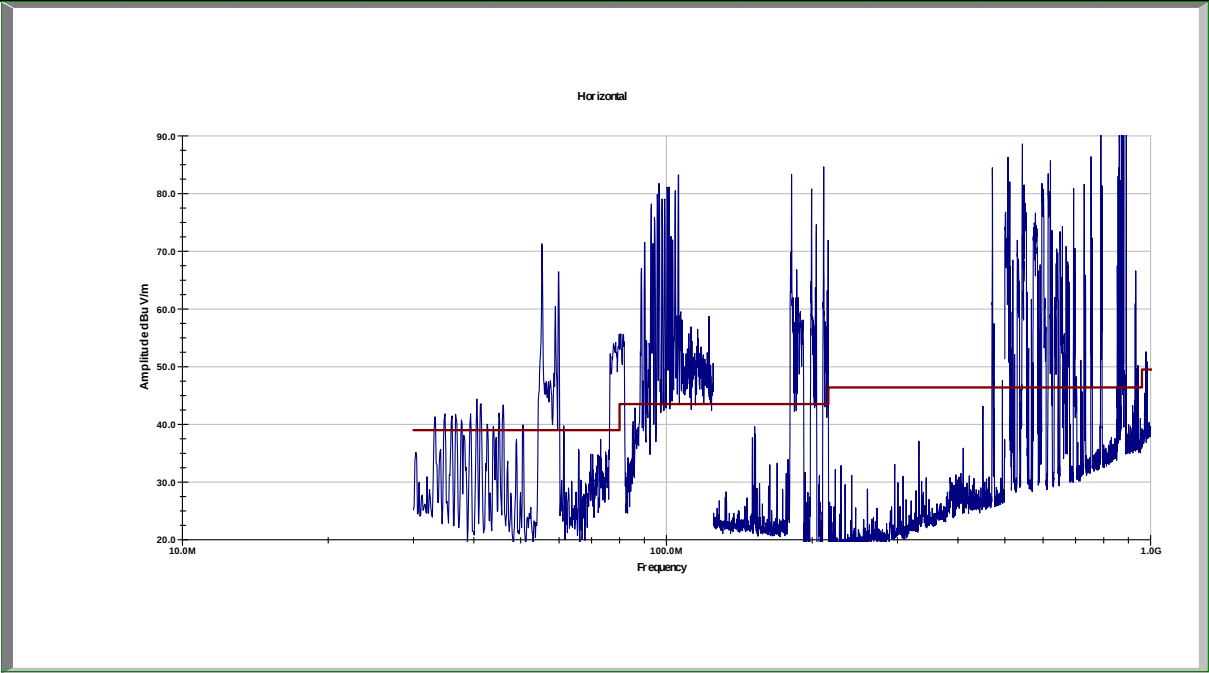



| Field Strengths (location 7) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.17                                          | 47.2                  | 33.5                | 17.1                  | 1.0             | 0.0               | 31.8                     | 39             | -7.2        | QP                |
| 30.99                                          | 49.4                  | 33.5                | 17.1                  | 1.0             | 0.0               | 34.0                     | 39             | -5.0        | QP                |

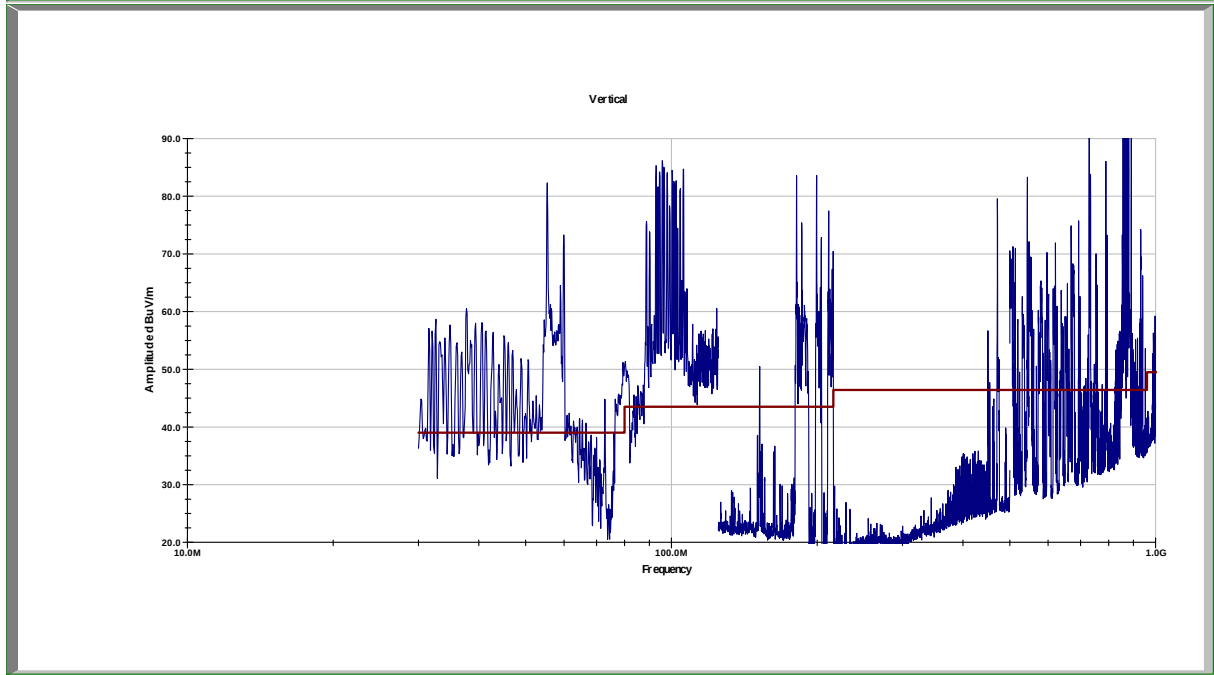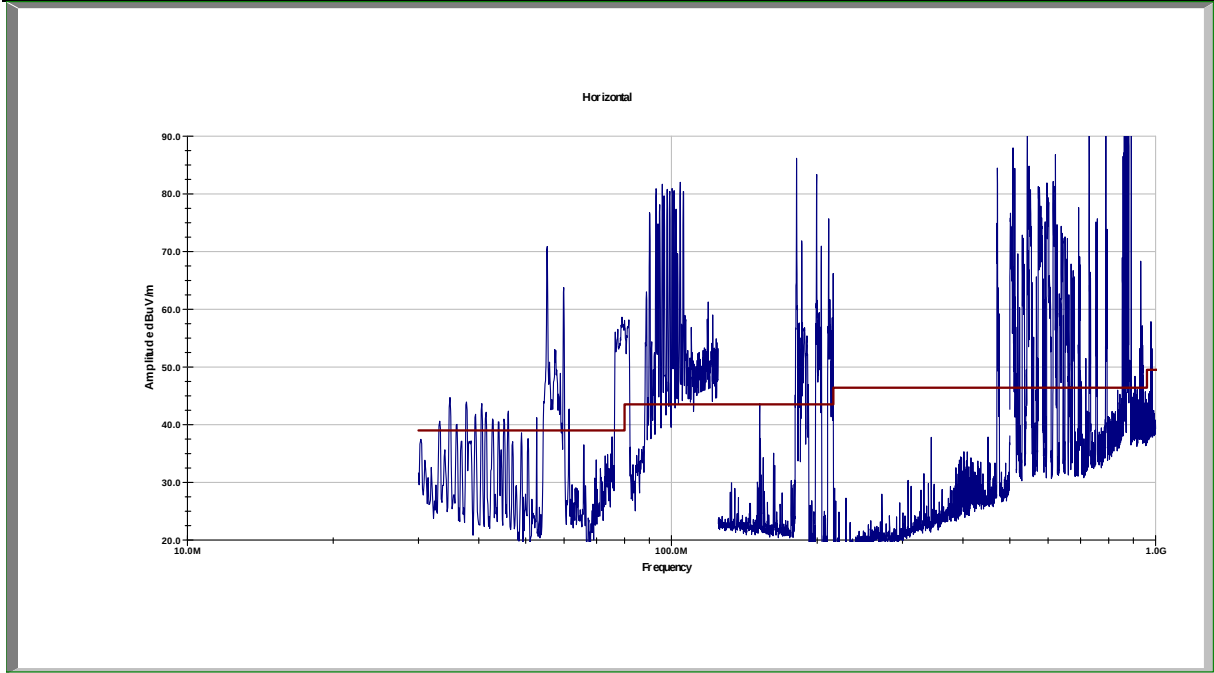



| Field Strengths (location 8) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.975                                         | 48.6                  | 33.5                | 17.1                  | 1.0             | 0.0               | 33.2                     | 39             | -5.8        | QP                |

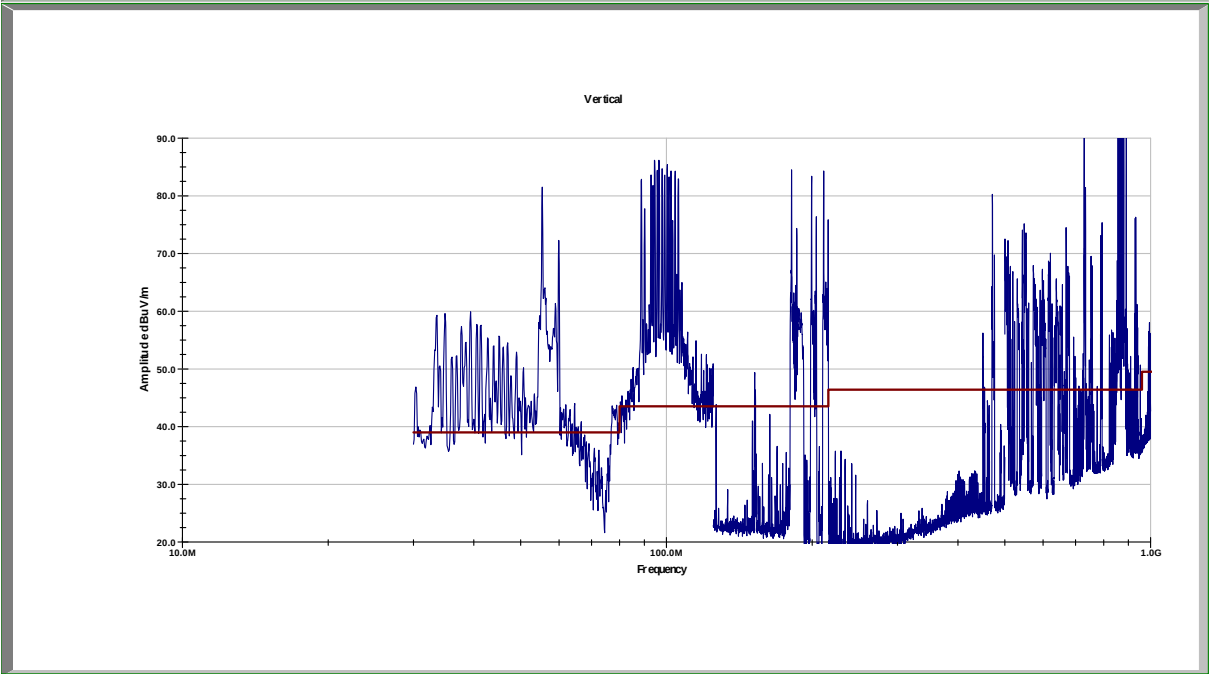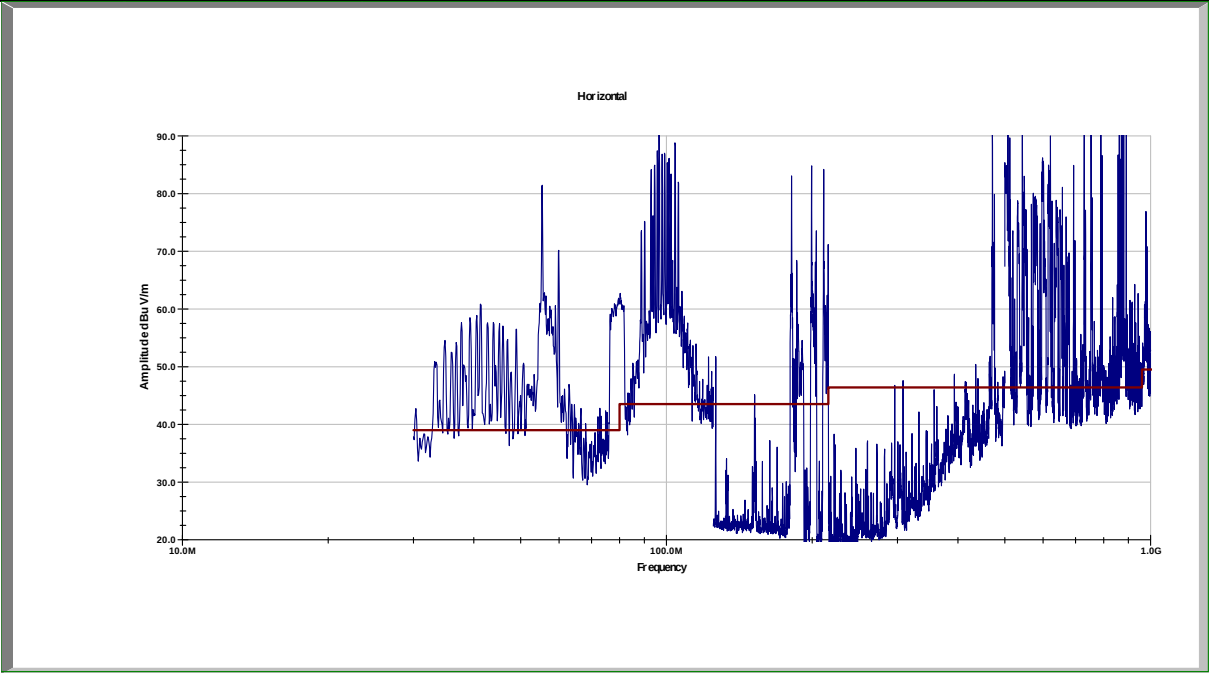



| Field Strengths (location 9) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.005                                         | 48.46                 | 33.5                | 17.1                  | 1.0             | 0.0               | 33.1                     | 39             | -5.9        | QP                |
| 31.955                                         | 48.8                  | 33.5                | 17.1                  | 1.0             | 0.0               | 33.4                     | 39             | -5.6        | QP                |

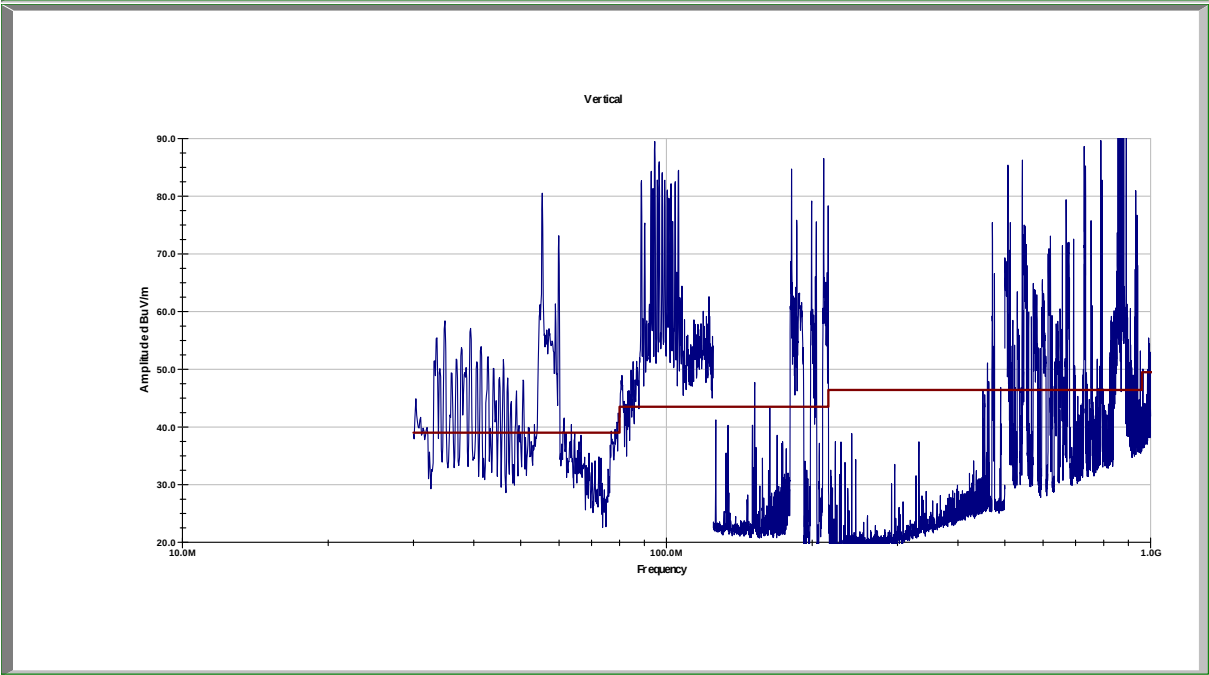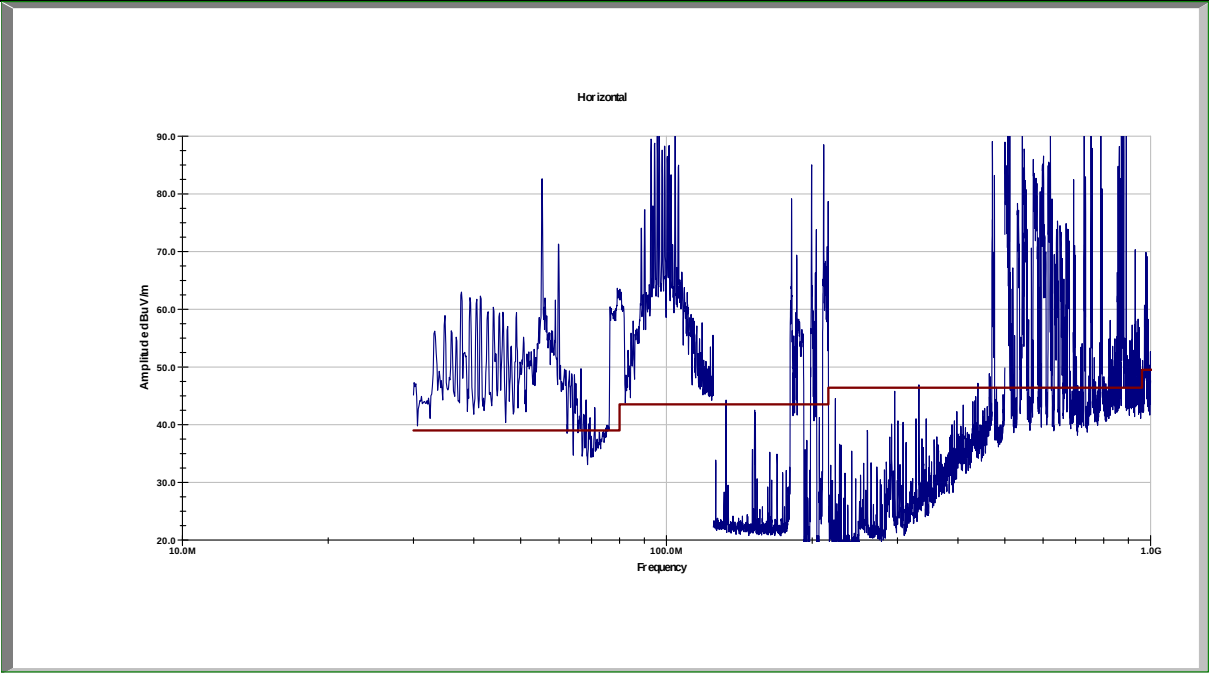



| Field Strengths (location 10) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.423                                          | 49.2                  | 33.5                | 17.1                  | 1.0             | 0.0               | 33.8                     | 39             | -5.2        | QP                |

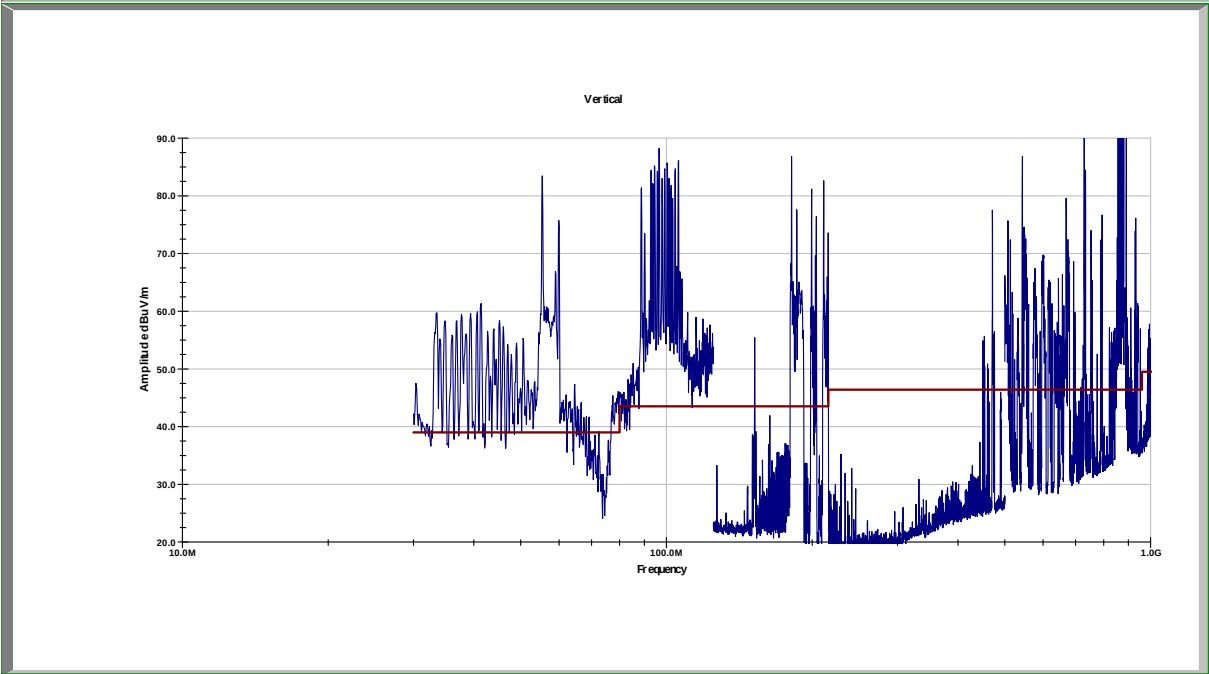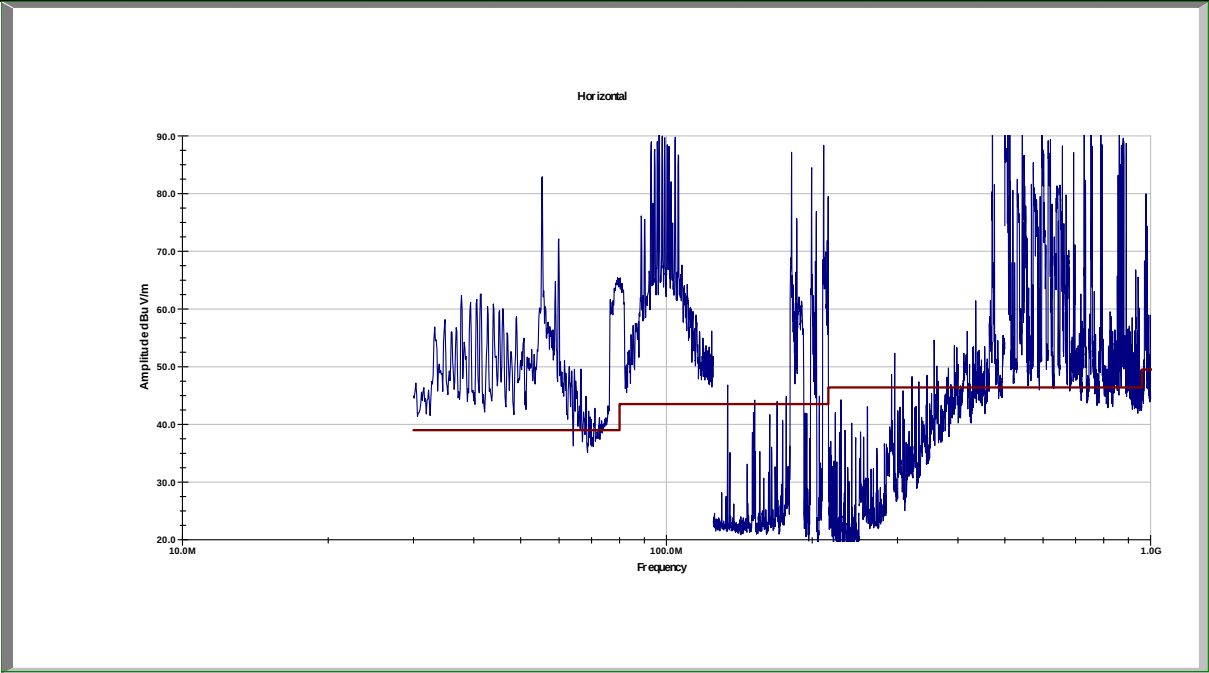



| Field Strengths (location 11) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.825                                          | 50.5                  | 33.5                | 17.1                  | 1.0             | 0.0               | 35.1                     | 39             | -3.9        | QP                |
| 31.973                                          | 51.5                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.1                     | 39             | -2.9        | QP                |

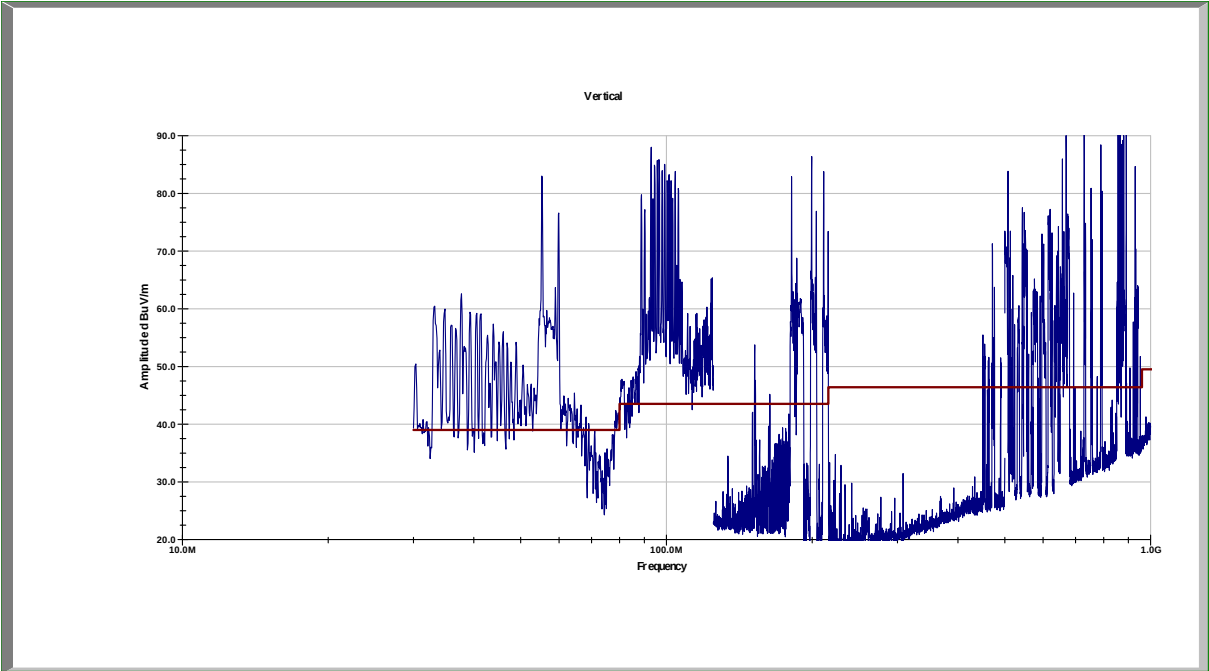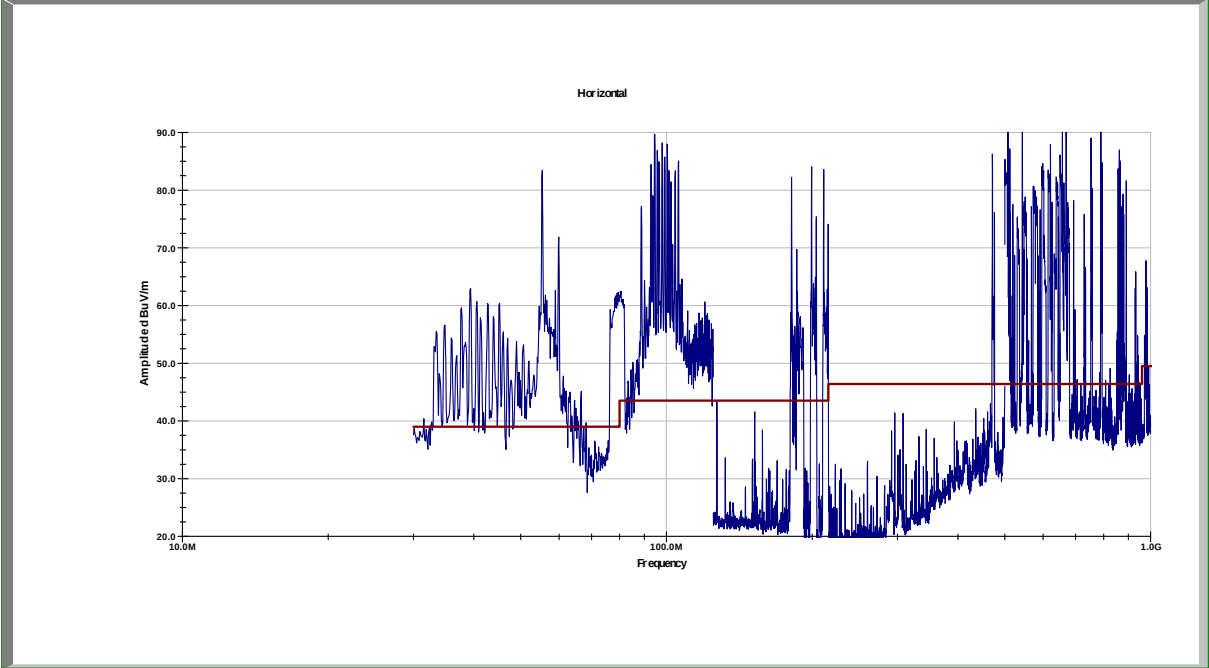



| Field Strengths (location 12) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.825                                          | 50.5                  | 33.5                | 17.1                  | 1.0             | 0.0               | 35.1                     | 39             | -3.9        | QP                |
| 31.973                                          | 51.5                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.1                     | 39             | -2.9        | QP                |

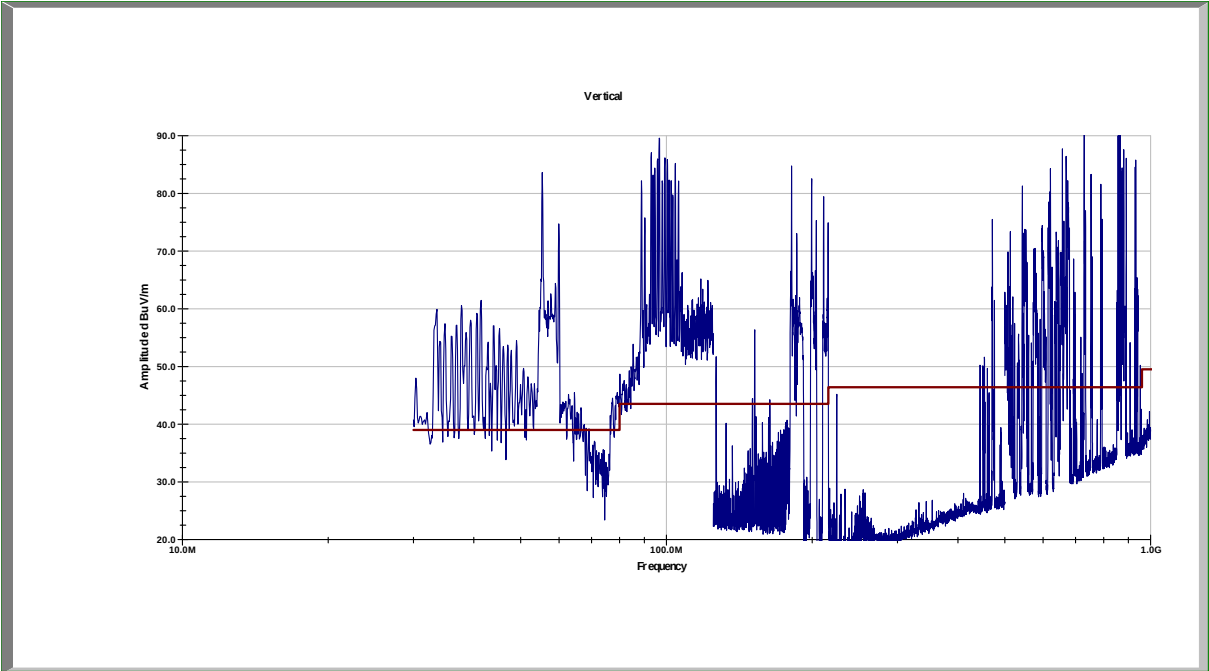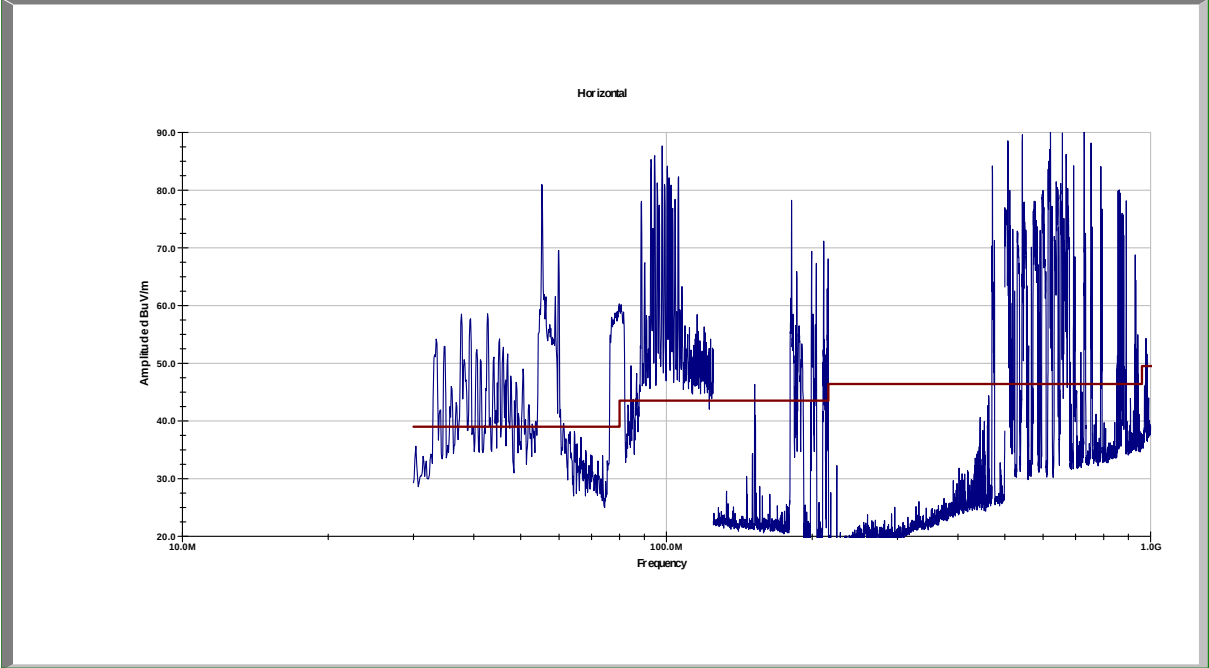



| Field Strengths (location 13) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.93                                           | 51.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.3                     | 39             | -2.7        | QP                |

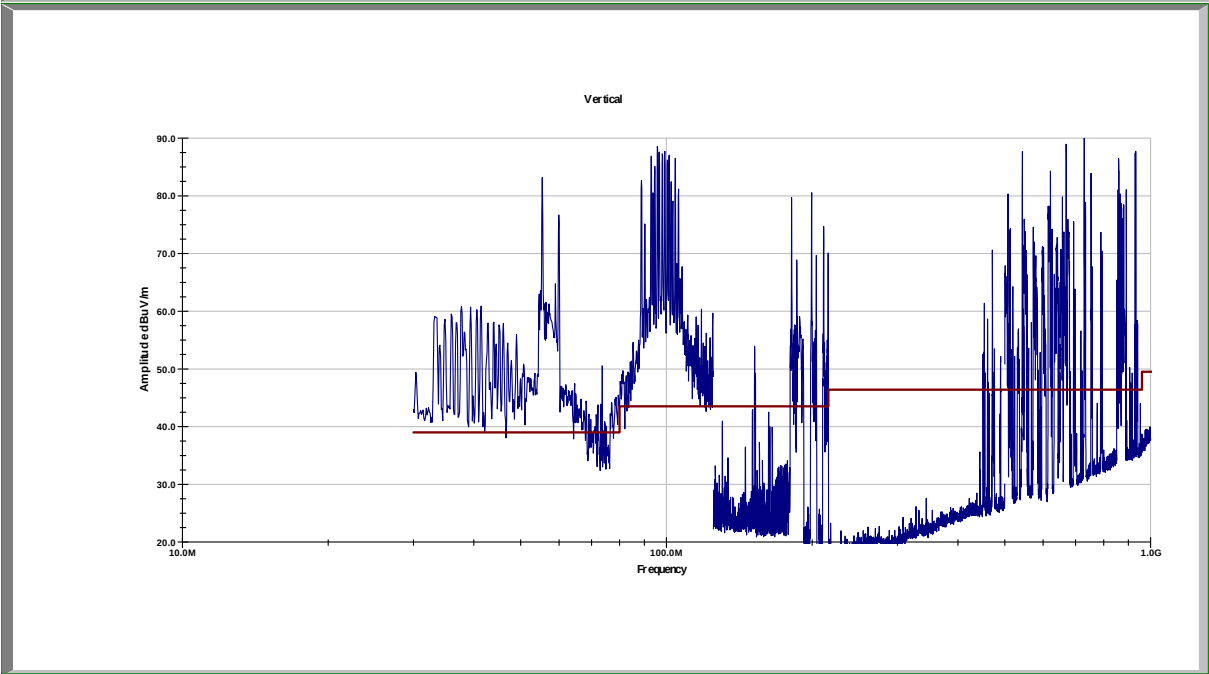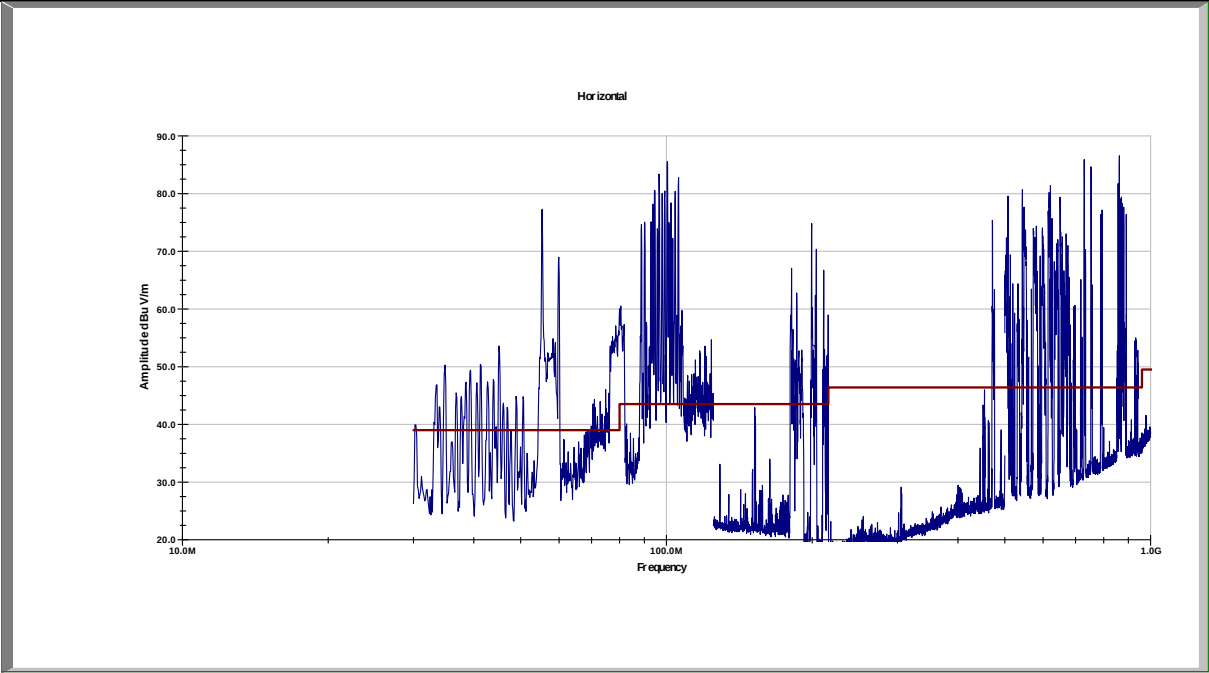



| Field Strengths (location 14) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.958                                          | 51.7                  | 33.5                | 17.1                  | 1.0             | 0.0               | 36.3                     | 39             | -2.7        | QP                |

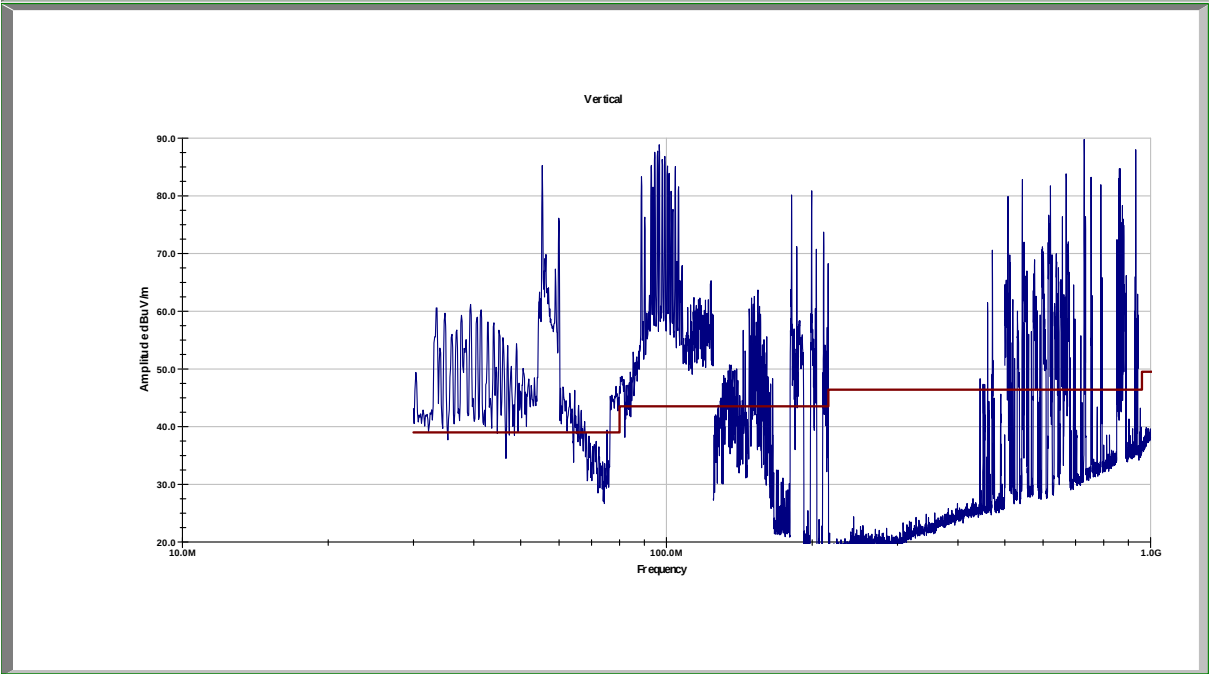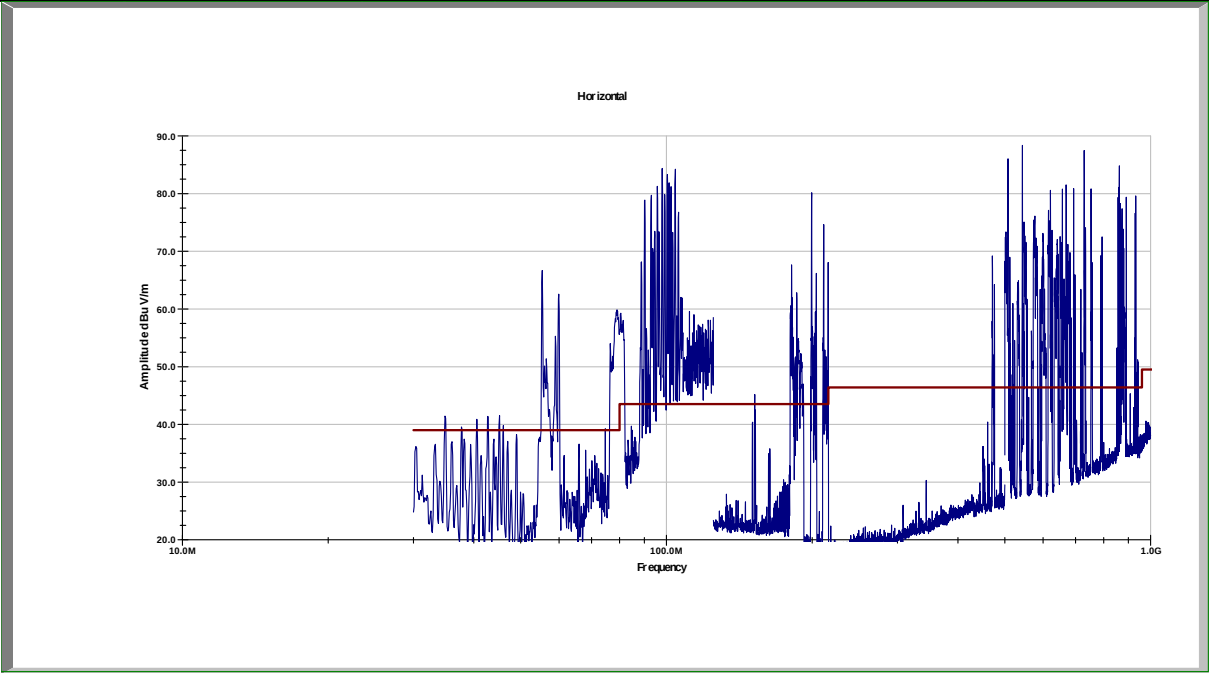


| Field Strengths (location 15) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.933                                          | 52.03                 | 33.5                | 17.1                  | 1.0             | 0.0               | 36.7                     | 39             | -2.3        | QP                |
| 30.973                                          | 50.9                  | 33.5                | 17.1                  | 1.0             | 0.0               | 35.5                     | 39             | -3.5        | QP                |

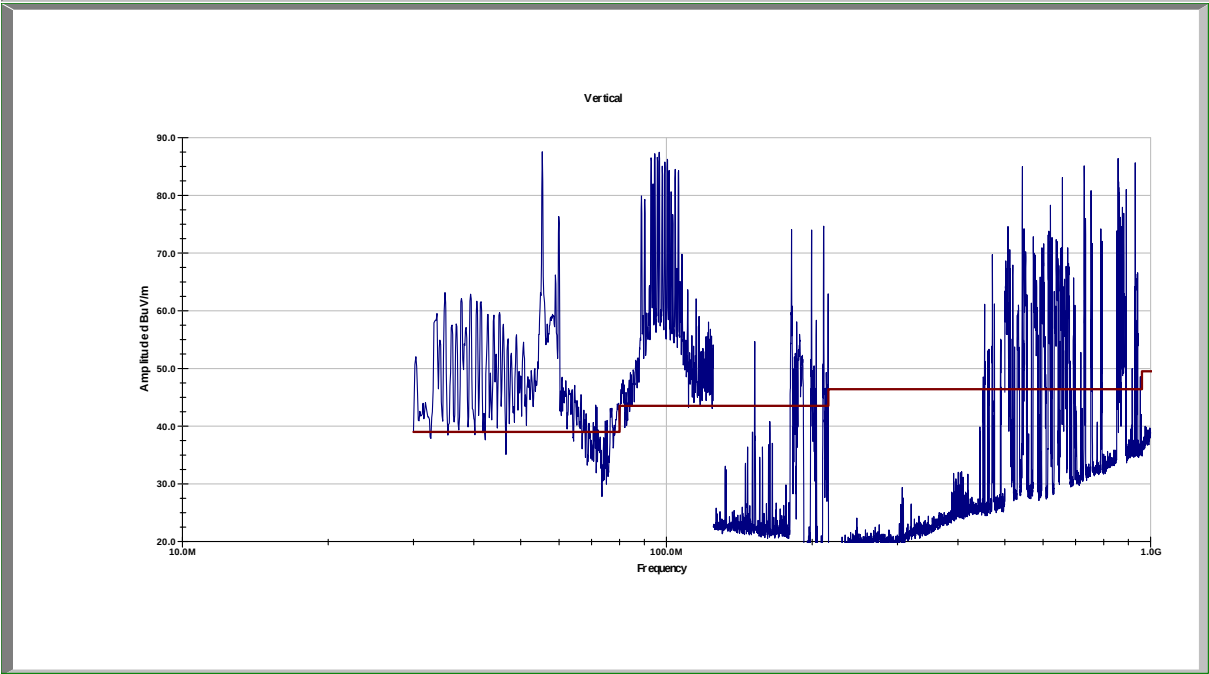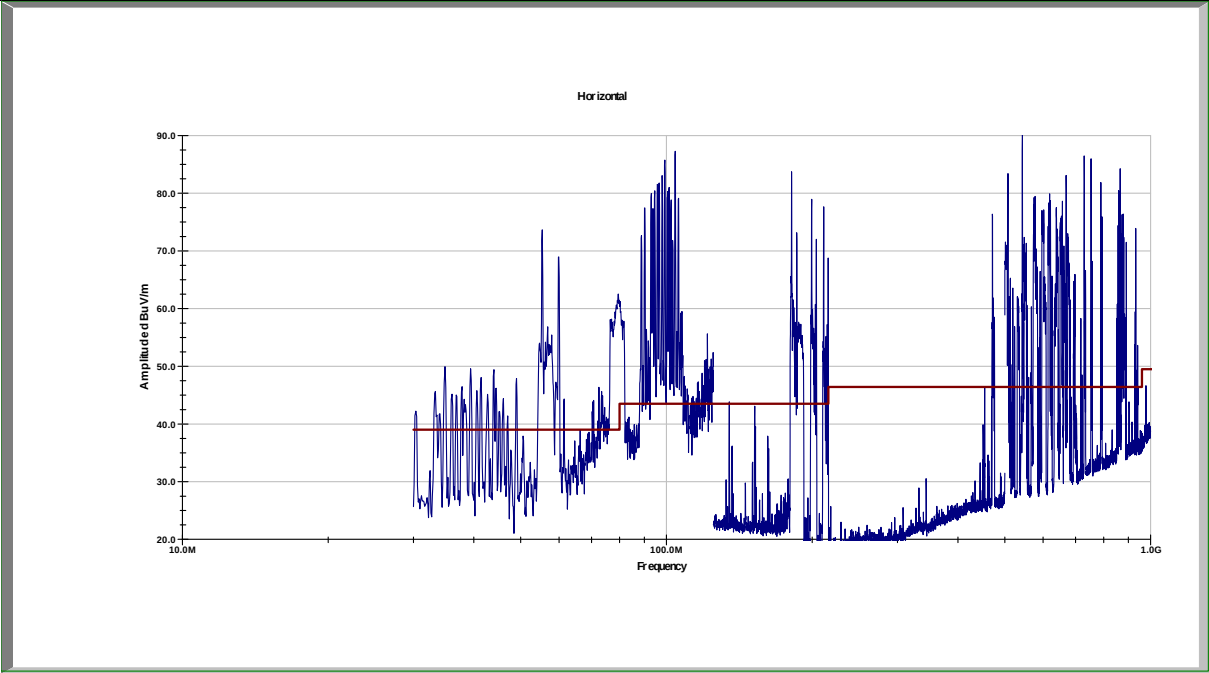

| Field Strengths (location 16) 30 MHz– 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|-------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                 | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 31.933                                          | 52.03                 | 33.5                | 17.1                  | 1.0             | 0.0               | 36.7                     | 39             | -2.3        | QP                |

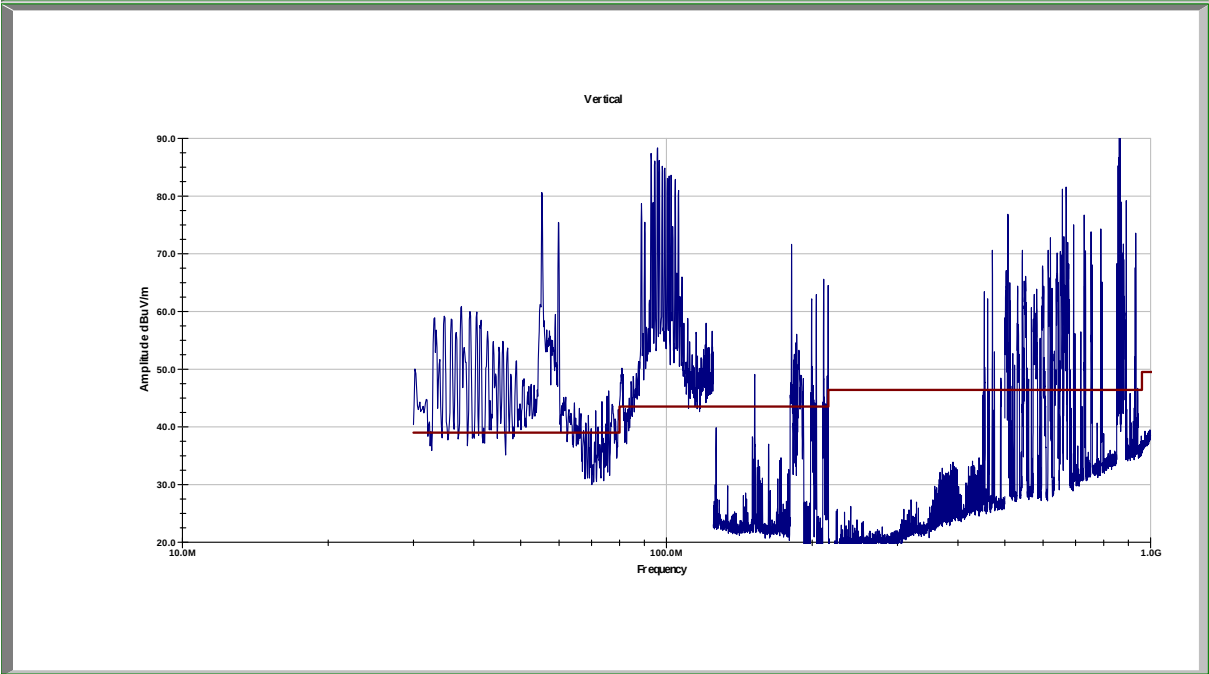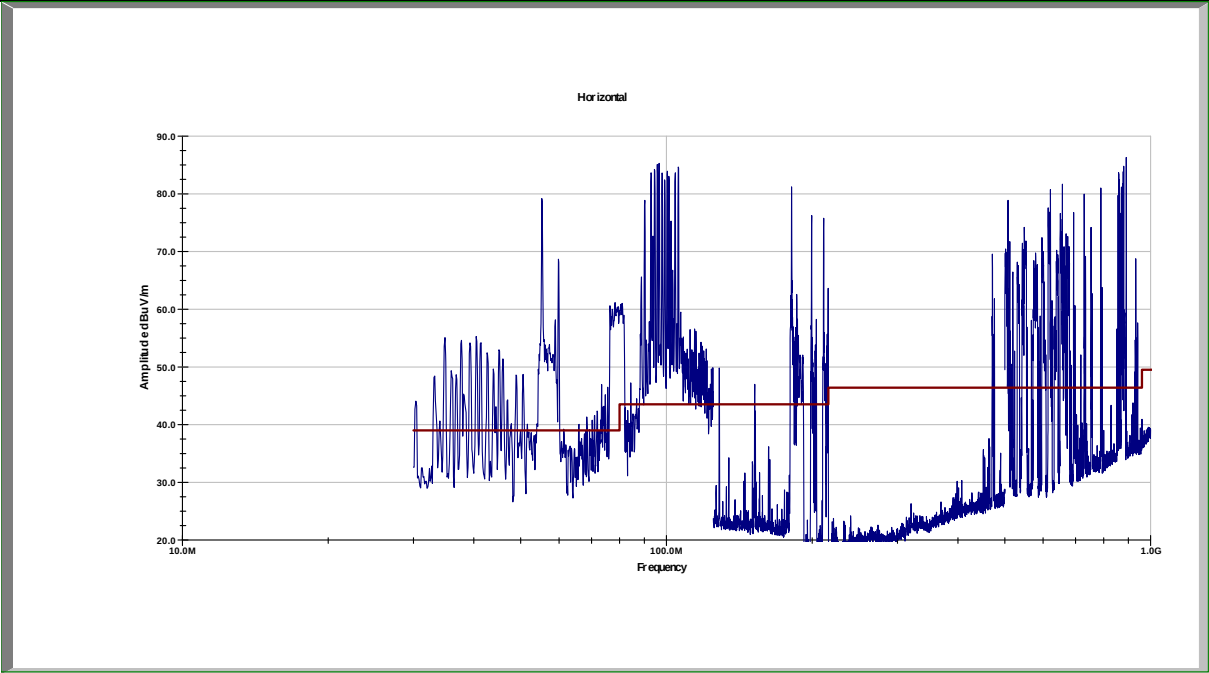

| Field Strengths (all locations) 30 MHz – 1,000 MHz |                       |                     |                       |                 |                   |                          |                |             |                   |
|----------------------------------------------------|-----------------------|---------------------|-----------------------|-----------------|-------------------|--------------------------|----------------|-------------|-------------------|
| Frequency (MHz)                                    | Recorded Level (dBuV) | Amplifier Gain (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Slant Factor (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Function |
| 30.945                                             | 52.7                  | 33.5                | 17.1                  | 1               | 0                 | 37.3                     | 39             | -1.7        | QP                |
| 30.945                                             | 52.7                  | 33.5                | 17.1                  | 1               | 0                 | 37.3                     | 39             | -1.7        | QP                |
| 30.975                                             | 52.19                 | 33.5                | 17.1                  | 1               | 0                 | 36.8                     | 39             | -2.2        | QP                |
| 31.933                                             | 52.03                 | 33.5                | 17.1                  | 1               | 0                 | 36.7                     | 39             | -2.3        | QP                |
| 31.933                                             | 52.03                 | 33.5                | 17.1                  | 1               | 0                 | 36.7                     | 39             | -2.3        | QP                |
| 31.93                                              | 51.7                  | 33.5                | 17.1                  | 1               | 0                 | 36.3                     | 39             | -2.7        | QP                |
| <b>Test Results: PASS</b>                          |                       |                     |                       |                 |                   |                          |                |             |                   |

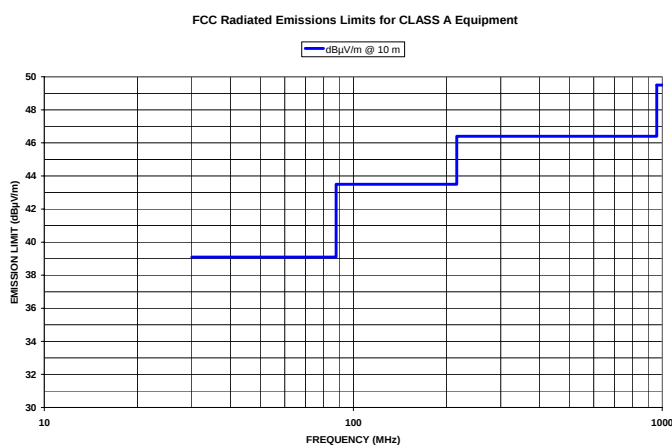

|                                                           |                                                                                      |
|-----------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Cumulative Test Results:</b>                           | <b>PASS</b>                                                                          |
| <b>Name &amp; Address of Testing Organization:</b>        | Professional Testing<br>1601 North A.W. Grimes<br>Suite B<br>Round Rock, Texas 78665 |
| <b>Test Engineer's Signature:</b>                         | <i>Michael A. Royer</i>                                                              |
| <b>Date:</b>                                              | 12/20/07                                                                             |
| <b>Name &amp; Address of Entity requesting this test:</b> | Corinex                                                                              |