



731 Enterprise Drive  
Lexington, KY 40510

Telephone: 859-226-1000  
Facsimile: 859-226-1040  
www.intertek-etlsemko.com

## Hearing Aid Compatibility T-Coil Test Report

**Model:** RM-927  
**FCC ID:** QMND  
**Intertek Report Number:** 101237626LEX-002

**Tested in accordance with:**

**ANSI C63.19-2011**  
**FCC Rule Parts: §20.19(b), §6.3(v), §7.3(v)**

**Testing Performed By:**

Intertek  
731 Enterprise Drive  
Lexington, KY 40510

**Testing Authorized By:**


Nokia  
16620 West Bernardo Drive  
San Diego, CA 92127

**Prepared By:**

  
**Jason Centers, Senior Project Engineer**

**Date:** 8/19/13

**Approved By:**

  
**Bryan Taylor, Team Leader – Engineering**

**Date:** 8/19/13

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>2 / 37 |

## TABLE OF CONTENTS

|                                                       | Page |
|-------------------------------------------------------|------|
| SECTION 1: INTRODUCTION .....                         | 3    |
| SECTION 2: SUMMARY OF TEST RESULTS .....              | 3    |
| SECTION 3: EQUIPMENT UNDER TEST .....                 | 5    |
| 3.1 Test Sample Photographs.....                      | 5    |
| 3.2 Test Sample Description .....                     | 5    |
| 3.3 Sample Modification.....                          | 6    |
| SECTION 4: TEST SITE DESCRIPTION .....                | 7    |
| 4.1 Description of the Test Equipment .....           | 8    |
| 4.2 Verification of the System .....                  | 10   |
| 4.3 Test Signals.....                                 | 10   |
| SECTION 5: MEASUREMENT PROCEDURES .....               | 12   |
| 5.1 Wireless Device – Positioning and Call Setup..... | 12   |
| 5.1.1 Device Positioning .....                        | 12   |
| 5.2 Audio Signal Level Setting .....                  | 14   |
| 5.3 Wireless Device (WD) Setup & Call Procedure ..... | 14   |
| 5.4 T-Coil Measurement Test Procedure .....           | 15   |
| 5.4.1 T-Coil Scans.....                               | 15   |
| SECTION 6: ANSI C63.19-2011 REQUIREMENTS .....        | 16   |
| 6.1 ANSI Near-Field Categories.....                   | 16   |
| 6.2 Axial and Radial Field Intensity .....            | 17   |
| 6.3 Frequency Response .....                          | 17   |
| 6.4 Signal Quality.....                               | 18   |
| SECTION 7: TABULAR OUTPUT POWER TEST DATA .....       | 19   |
| 7.1 Conducted Output Power.....                       | 19   |
| SECTION 8: T-COIL TABULAR TEST DATA .....             | 20   |
| SECTION 9: TEST EQUIPMENT .....                       | 24   |
| 9.1 HAC RF Measurement System.....                    | 24   |
| 9.2 Support Equipment .....                           | 24   |
| SECTION 10: MEASUREMENT UNCERTAINTY .....             | 25   |
| 10.1 Equipment Uncertainty .....                      | 25   |
| SECTION 11: DOCUMENT HISTORY .....                    | 26   |
| SECTION 12: REFERENCES .....                          | 26   |
| SECTION 13: HAC T-COIL TEST PLOTS.....                | 27   |
| SECTION 14: BACKGROUND ABM2 NOISE PLOTS .....         | 35   |
| SECTION 15: CALIBRATION DOCUMENTS .....               | 37   |

|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>3 / 37 |

## SECTION 1: INTRODUCTION

The RM-927 was evaluated to the requirements for T-Coil audio band magnetic compliance testing defined in ANSI C63.19-2011. Testing was performed at the Intertek facility in Lexington, Kentucky.

For this evaluation, the SPEAG DASY52 HAC extension was used. This near-field measurement system is comprised of a high-precision robot, HAC Test Arch and Helmholtz coil, magnetic field probe (AM1D), EUT holder and DASY52 software with SEMCAD post-processor for generating test plots. The specially designed Test Arch allows a high precision positioning of the device.

This report demonstrates compliance for T-Coil HAC performance only and not near-field emissions.

## SECTION 2: SUMMARY OF TEST RESULTS

This report contains data for the RM-927 in CDMA mode only. The minimum HAC T-Coil ("T") ratings that were obtained for the RM-927 are summarized below:

**Table 1: Summary of Test Results**

| Reference (C63.19-2011) | Description            | Result |
|-------------------------|------------------------|--------|
| 8.3.1                   | Axial Field Intensity  | Pass   |
| 8.3.1                   | Radial Field Intensity | Pass   |
| 8.3.2                   | Frequency Response     | Pass   |
| 8.3.4                   | Signal Quality         | T4     |

**Table 2: Summary of Signal Quality Classification**

| Mode      | Minimum Limit (dB) |    |    |    | Minimum Result (dB) | Category Assessment |
|-----------|--------------------|----|----|----|---------------------|---------------------|
|           | T1                 | T2 | T3 | T4 |                     |                     |
| CDMA Cell | 0                  | 10 | 20 | 30 | 35.28               | T4                  |
| CDMA PCS  | 0                  | 10 | 20 | 30 | 45.28               | T4                  |

|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>4 / 37 |

**Table 3: Summary T-Coil Coupling Field Intensity**

| Mode      | Field Component | Minimum Limit (dB A/m) | Minimum Measured (dB A/m) | Result |
|-----------|-----------------|------------------------|---------------------------|--------|
| CDMA Cell | Axial (Z)       | -18                    | -14.62                    | Pass   |
|           | Radial(Y)       | -18                    | -11.60                    | Pass   |
| CDMA PCS  | Axial (Z)       | -18                    | -5.02                     | Pass   |
|           | Radial(Y)       | -18                    | -5.24                     | Pass   |

**Table 4: Summary of HAC Rating for Device**

| Mode                                                                                                                                                         | RF Emissions Category at T-Coil Measurement Point | Category Assessment of T-Coil Signal Quality | Category Assessment |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------|---------------------|
| CDMA Cell                                                                                                                                                    | M4                                                | T4                                           | M4/T4               |
| CDMA PCS                                                                                                                                                     | M4                                                | T4                                           |                     |
| T-Coil Measurement Points were not located in excluded grids in the RF Emissions scans. RF Near field emissions evaluation is provided in a separate report. |                                                   |                                              |                     |

|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>5 / 37 |

## SECTION 3: EQUIPMENT UNDER TEST

### 3.1 Test Sample Photographs

Photographs of the RM-927 can be found in a separate exhibit.

### 3.2 Test Sample Description

| TEST SAMPLE                                                            |                                                                                                                                                                                                                                                                         |                                                         |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| NAME/MODEL                                                             | RM-927                                                                                                                                                                                                                                                                  |                                                         |
| FCC ID                                                                 | QMND                                                                                                                                                                                                                                                                    |                                                         |
| MEID                                                                   | 355906050012334                                                                                                                                                                                                                                                         |                                                         |
| HW ID                                                                  | 0160                                                                                                                                                                                                                                                                    |                                                         |
| SW VERSION                                                             | 1028.0305.1329.2000                                                                                                                                                                                                                                                     |                                                         |
| SAMPLE TYPE                                                            | Prototype                                                                                                                                                                                                                                                               |                                                         |
| MODE(S) OF OPERATION                                                   | GSM, WCDMA, CDMA, LTE                                                                                                                                                                                                                                                   |                                                         |
| FREQUENCY RANGE                                                        | GSM 850 – 824.2 – 848.6 MHz<br>GSM 1900 – 1850.2 – 1909.8 MHz<br>WCDMA Band V – 826.4 – 846.6 MHz<br>WCDMA Band V – 1852.4 – 1907.6 MHz<br>CDMA Cell – 824.7 – 848.31 MHz<br>CDMA PCS – 1851.2 – 1908.75 MHz<br>LTE Band 4 – 1710-1750 MHz<br>LTE Band 13 – 777-787 MHz |                                                         |
| ANTENNA DESCRIPTION                                                    |                                                                                                                                                                                                                                                                         |                                                         |
| TYPE                                                                   | Internal fixed antenna                                                                                                                                                                                                                                                  |                                                         |
| TEST SAMPLE ACCESSORIES                                                |                                                                                                                                                                                                                                                                         |                                                         |
| BATTERY TYPE                                                           | Internal Battery                                                                                                                                                                                                                                                        |                                                         |
| OTHER ACCESSORIES                                                      | None                                                                                                                                                                                                                                                                    |                                                         |
| JOB DESCRIPTION                                                        |                                                                                                                                                                                                                                                                         |                                                         |
| MANUFACTURER<br>Nokia, 16620 West Bernardo Drive, San Diego, CA, 92127 |                                                                                                                                                                                                                                                                         |                                                         |
| CONTACT PERSON<br>Victoria Abadilla                                    | PHONE<br>(858) 831-5000                                                                                                                                                                                                                                                 | FAX<br>NA                                               |
| EUT RECEIVE DATE<br>7/25/13                                            | TEST START DATE<br>8/4/13                                                                                                                                                                                                                                               | TEST END DATE<br>8/5/13                                 |
| EUT CONDITION<br>Good condition                                        |                                                                                                                                                                                                                                                                         | EUT TESTED BY<br>Jason Centers, Senior Project Engineer |

|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>6 / 37 |

**Table 5: Summary of Air Interfaces & Bands Supported**

| Air-Interface                                                                                       | Band (MHz)    | Type Transport | HAC Tested | Simultaneous Transmissions But Not Tested | Voice Over Digital Transport OTT Capability | WIFI Low Power | Additional GSM Power Reduction |
|-----------------------------------------------------------------------------------------------------|---------------|----------------|------------|-------------------------------------------|---------------------------------------------|----------------|--------------------------------|
| GSM                                                                                                 | 850           | VO             | Yes        | Yes                                       | NA                                          | NA             | NA                             |
|                                                                                                     | 1900          | VO             | Yes        | BT,WLAN,LTE                               | NA                                          |                |                                |
|                                                                                                     | GPRS/EDGE     | DT             | No         | Yes<br>BT,WLAN,LTE                        | Yes                                         | NA             |                                |
| WCDMA                                                                                               | 850           | VO/DT          | Yes        | Yes                                       | Yes                                         | NA             | NA                             |
|                                                                                                     | 1900          | VO/DT          | Yes        | BT,WLAN,LTE                               | Yes                                         |                |                                |
| CDMA                                                                                                | 800           | VO             | Yes        | Yes<br>BT,WLAN,LTE                        | NA                                          | NA             | NA                             |
|                                                                                                     | 1900          | VO             | Yes        |                                           | NA                                          |                |                                |
|                                                                                                     | EVDO          | DT             | No         |                                           | Yes                                         |                |                                |
| LTE                                                                                                 | 700 (Band 13) | DT             | No         | Yes<br>BT,<br>WLAN,CDMA                   | Yes                                         | No             | NA                             |
| LTE                                                                                                 | 1700 (Band 4) | DT             | No         | Yes<br>BT,<br>WLAN,GSM,<br>CDMA           | Yes                                         | No             | NA                             |
| BT                                                                                                  | 2450          | DT             | No         | Yes<br>GSM,<br>GPRS/EDGE,<br>WCDMA, LTE   | NA                                          | NA             | NA                             |
| WLAN                                                                                                | 2450          | DT             | No         | Yes<br>GSM,<br>GPRS/EDGE,<br>WCDMA, LTE   | Yes                                         | No             | NA                             |
| WLAN                                                                                                | 5GHz Bands    | DT             | No         | Yes<br>GSM,<br>GPRS/EDGE,<br>WCDMA, LTE   | Yes                                         | No             | NA                             |
| Type of Transport<br>VO = Voice Only<br>DT = Digital Data Transport<br>VD = CMRS and Data Transport |               |                |            |                                           |                                             |                |                                |

**Note: this report only contains data for CDMA modes.**

### 3.3 Sample Modification

No modifications were made to the test sample during this evaluation.

|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>7 / 37 |

## SECTION 4: TEST SITE DESCRIPTION

The Intertek HAC test site is located at 731 Enterprise Drive, Lexington, KY 40510, USA.

The HAC T-Coil Setup is comprised of the SPEAG DASY 52 Hearing Aid Compatibility extension, which is used to perform the audio band magnetic performance tests in accordance with ANSI C63.19.

This system is installed in a shielded chamber. During each day of testing, the ambient temperature was verified to be  $22.0 \pm 2^{\circ}\text{C}$ .

**Figure 1: Intertek HAC T-Coil Test Site**




|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>8 / 37 |

#### 4.1 Description of the Test Equipment

The measurements were performed using an automated near-field scanning system, DASY52 manufactured by Schmid and Partner AG (SPEAG) in Switzerland.

Figure 2: Diagram of T-Coil Measurement Setup

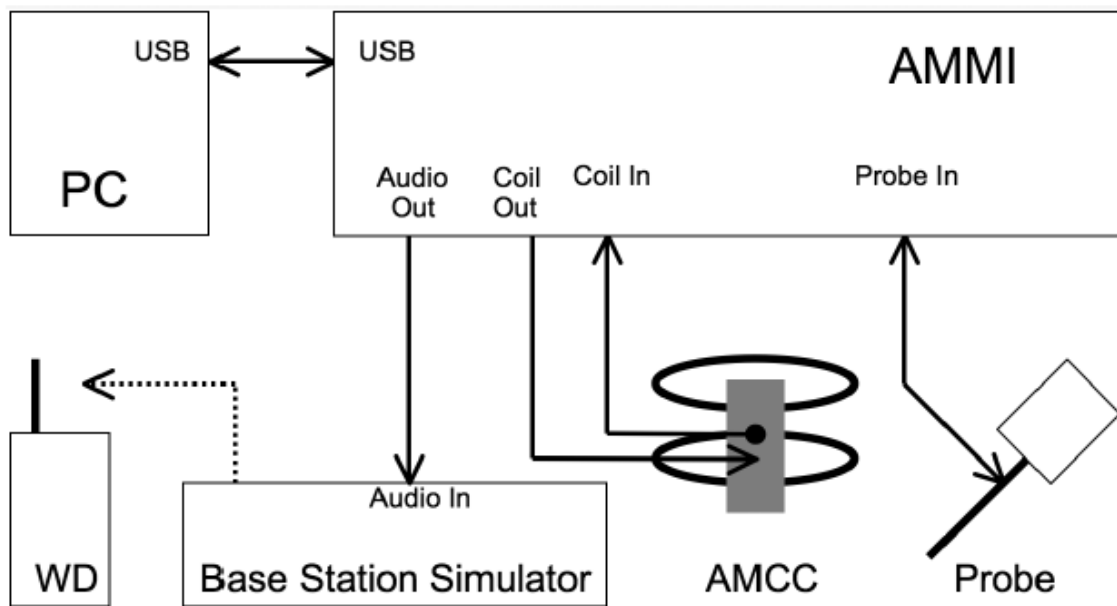

**AMMI (Audio Magnetic Measurement Instrument)** is a desktop unit containing a sampling unit, a waveform generator for test, calibration signals and a USB interface. Front connectors include: Audio Out – predefined or user definable audio signals for injection into the WD; Probe In – the probe signal is evaluated by AMMI; Coil Out – test and calibration signal to the AMCC; Coil In – monitor signal from the AMCC

Figure 3: Photographs of AMMI



|                                                                                                            |                                            |                |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>9 / 37 |


**Audio Magnetic Probe (AM1DV2)** is an active probe with a single sensor. The probe is fully RF shielded. The same probe coil is used to measure three orthogonal field components (axial, radial x, radial y). The probe is rotated to properly orient the coil for each field component.

**Figure 4: AM1D Probe with probe cable**



**AMCC (Audio Magnetic Calibration Coil)** is a Helmholtz coil for calibration of the AM1D probe. The two horizontal coils create a homogeneous magnetic field in the z direction. The coil is ANSI C63.19 compliant.

**Figure 5: AMCC**

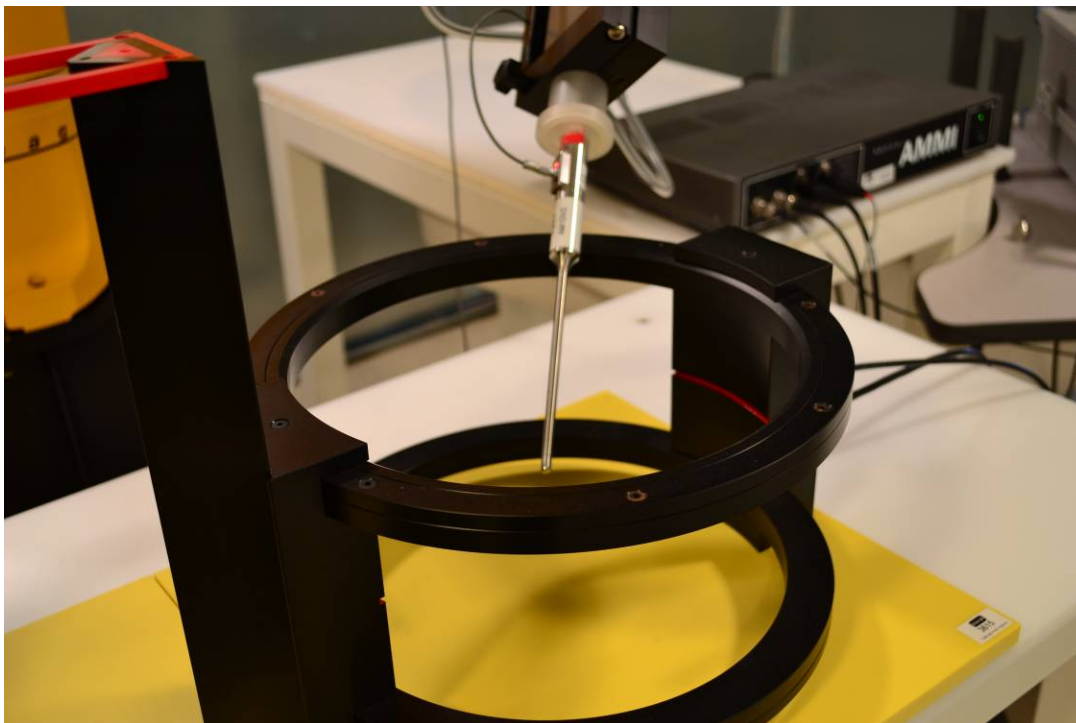


|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>10 / 37 |

## 4.2 Verification of the System

The Audio Magnetic Probe AM1D is calibrated in the AMCC Helmholtz Audio Magnetic Calibration Coil before each measurement procedure using calibration and reference signals. The frequency response and sensitivity are measured and stored. The sensitivity is for a 1kHz sine signal. The sensitivity includes both probe sensitivity and pre-amplifier sensitivity. The evaluated probe sensitivity was compared to the calibration of the AM1D probe.

**Figure 6: Frequency Response and Sensitivity measured in AMCC**

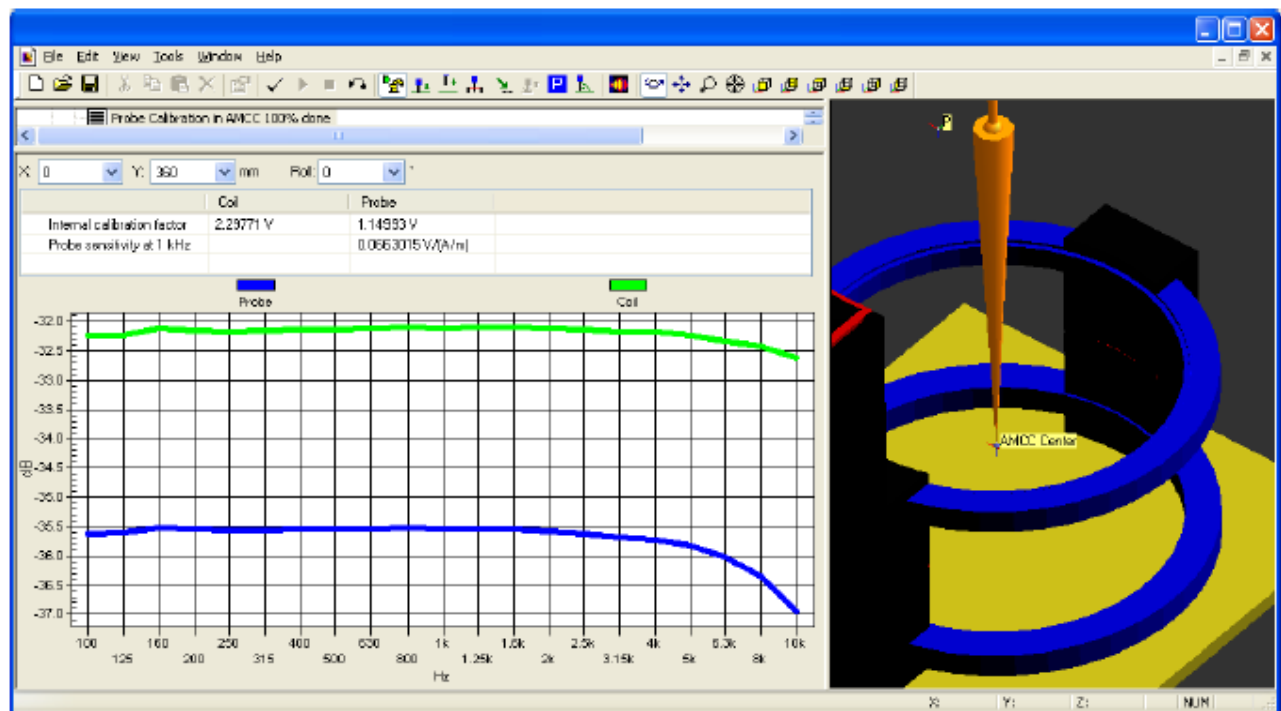

The R&S CMU200 base station audio codec and SPEAG AMMI audio paths (gain) were calibrated according to the manufacture instructions and described in Section 5.

## 4.3 Test Signals

Narrowband voice-like signals are used during the scans to determine the optimum location for the T-Coil assessment. A broadband voice-like signal (300 Hz – 3kHz) is used for the frequency response measurements. These signals are calibrated by the system in AMCC prior to starting a measurement procedure. The DASY52 software compensates for the spectral response of these signals.

Figure 7: Audio Signal Spectrum of the Narrowband Signal


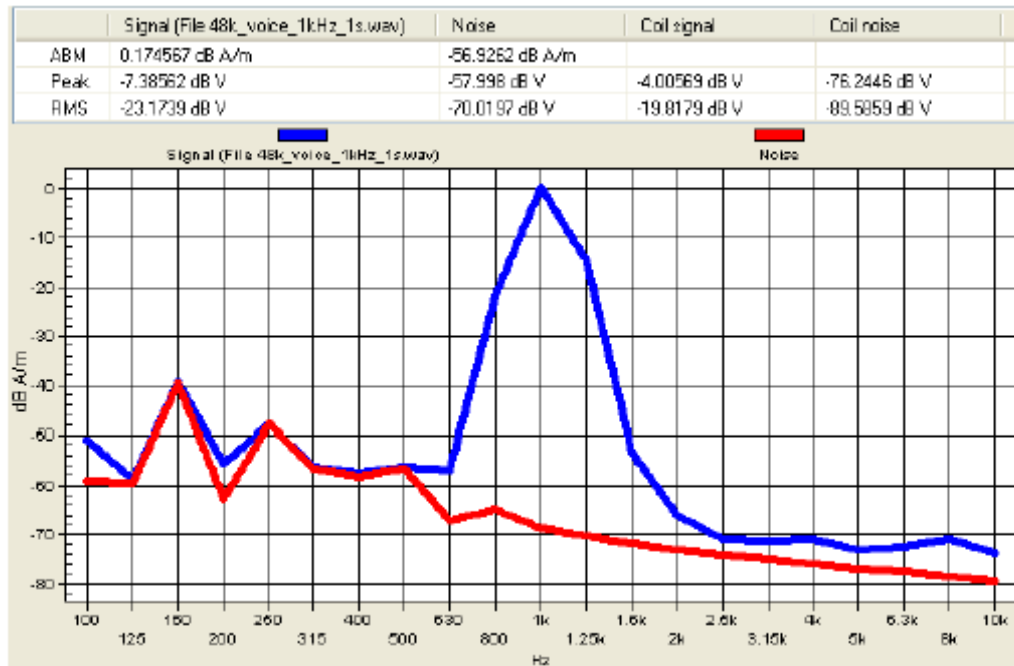


Figure 8: Audio Signal Spectrum of the Broadband Signal

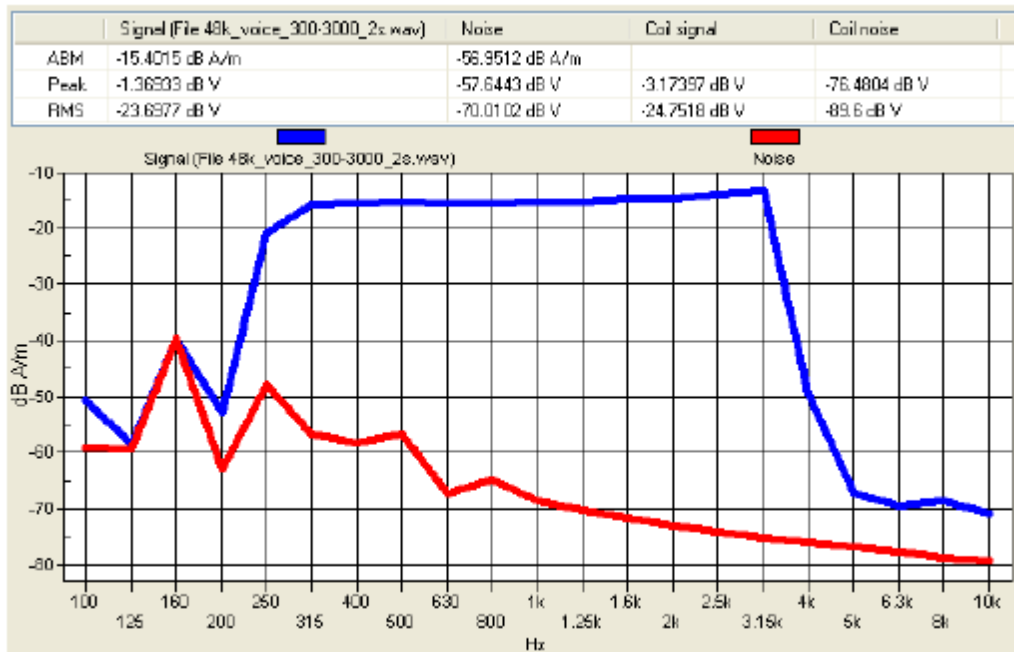

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>12 / 37 |

## SECTION 5: MEASUREMENT PROCEDURES

### 5.1 Wireless Device – Positioning and Call Setup

#### 5.1.1 Device Positioning

- The DASY52 HAC RF test arch was installed on the phantom cover.
- The correct position of the test arch was verified by moving the free-space probe to its 4 reference points using the DASY52 software. If any variations were seen, the reference points were re-taught.
- The wireless device was mounted in the device holder shown in Figure 9.


**Figure 9: Device Holder**



- The wireless device was then centered under the test arch as shown in Figure 10. The acoustic output of the WD coincided with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame.

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>13 / 37 |

**Figure 10: Centering the WD under the Test Arch**

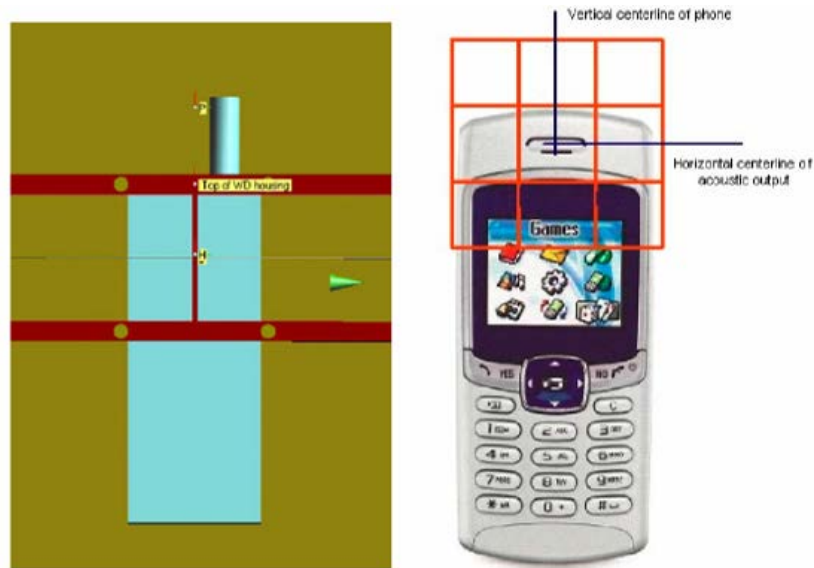

- e. The reference plane of the wireless device was then positioned as follows: After the phone was centered, it was adjusted until the reference plane was parallel to, and touching the bottom of the test arch. The reference plane is the planar area that contains the highest point in the area of the WD that normally rests against the user's ear. The measurement plane is 10 mm parallel to, and above the reference plane, and contains the nearest point on the probe sensor per ANSI C63.19-2011.

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>14 / 37 |

## 5.2 Audio Signal Level Setting

According to ANSI C63.19:2011, the normal speech input level for HAC T-coil tests shall be set to -16dBm0 for GSM and UMTS (WCDMA) and -18dBm0 for CDMA.

The required speech input levels were determined as follows using a CMU200 base station and a DASY52 T-Coil measurement job:

Calculate the internal reference level of the CMU200 (in dBm0)

- Perform the internal calibration sequence of the AMMI. After the calibration, the Coil In port can be used as a calibrated audio voltmeter.
- Select "Decoder Cal" to obtain 1kHz signal from internal generator with a level of 3.14 dBm0.
- Run a T-Coil measurement job to read the RMS voltage level corresponding to 3.14 dBm0.
- Calculate the desired signal levels of -16dBm0 or -18dBm0.

Determine the 1kHz Gain level to generate the desired signal level of -16dBm0 or -18dBm0

- Select "Encoder Cal" with the WD in a call.
- Run a measurement job with a 1kHz sine signal applied at a gain level of 10.
- Record the RMS voltage level.
- Using the measured level, calculate the required gain setting for the desired level.
- Run the measurement job again with this gain level and verify the result.

Calculate and Verify the Gain levels for the signals to be used during the test

- Select Handset Low with the WD in a voice call.
- Run a measurement job with selected signal at an estimated gain level.
- Measure level and compare to the desired level of -16dBm0 or -18dBm0.
- Adjust gain and repeat until the desired level is measured.

The gain determined for each signal to achieve a speech level -16dBm0 or -18dBm0 will be used during the t-coil measurements.

## 5.3 Wireless Device (WD) Setup & Call Procedure

- A fully charged battery was installed in the phone.
- The backlight was turned on and the contrast setting was adjusted to maximum unless otherwise noted in this report.
- The WD was placed into a call using a base station simulator.
- The microphone was muted and the audio volume was set to maximum.
- The WD was configured for normal operation at maximum rated output power. The device was tested in a voice call. In CDMA mode, the device was tested in RC1/SO3 mode. Speech coding was processed with EFR speech codec for GSM and with AMR 12.2kbps for WCDMA.
- Unless otherwise noted, the Bluetooth and WLAN radios were disabled.

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>15 / 37 |

## 5.4 T-Coil Measurement Test Procedure

### 5.4.1 T-Coil Scans

The following explains a typical test procedure for a device:

- a. The geometry and reference signals are checked. The probe is aligned.
- b. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test arch.
- c. The reference drive level of voice signal defined in C63.19 per 7.4.2.1 was calibrated as described in previous section. Gain levels for signals used were determined and entered into the measurement software.
- d. The ambient background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the category limit of C63.19 per 7.3.1. Background noise is shown in Table 9 and noise spectrum plots are shown at this end of this report.
- e. The DUT was positioned under the test arch centered on the acoustic output point of the device.
- f. The device was placed in a call. In each operating band, a measurement of ABM2 was made at the low, middle, and high channels to determine the worse case channel. The channel with the highest ABM2 measurement was selected to perform a scan to find the optimal measurement points.
- g. The optimal measurement points were selected from the scan based on the signal quality measurement. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1. The noise measurement was performed after the scan with the signal removed. The ABM2 was calculated from this second scan. Scans were performed over a 50 x 50 mm grid with a 1kHz voice like signal for the ABM1 measurement.
- h. A point measurement for ABM1 and ABM2 in axial and radial y was made at a point based on optimal SNR of the scan. The SNR was calculated for axial and radial y orientation.
- i. A point measurement for frequency response (300Hz to 3 kHz signal) was made in the axial orientation. The position was selected based on optimal SNR of the axial scan.
- j. At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial and radial y orientation, and the frequency response was measured in axial axis.
- k. In SEMCAD post-processing, the spectral points are scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.
- l. The signal quality was classified based on the values listed in Table 7.
- m. Measurements at the two remaining channels were made at the same location as the channel that was scanned. A scan was only performed again if it were necessary to obtain a better classification.

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>16 / 37 |

## SECTION 6: ANSI C63.19-2011 REQUIREMENTS

T-Coil measurements were taken by following the procedures outlined below. A complete evaluation was performed per the guidelines provided by ANSI C63.19-2011.

### 6.1 ANSI Near-Field Categories

The procedures outlined in ANSI C63.19 for measuring near-field RF Emissions from a wireless device (WD) were followed. The test criteria (categories) to be met are stated in Table 8-3 of ANSI C63.19-2011 (see Table 6, below). This table was used to assign the wireless device's "M" rating.

**Table 6: ANSI Near-Field Categories in Linear Units**

| Emission categories | <960 MHz          |          |
|---------------------|-------------------|----------|
|                     | E-field emissions |          |
| Category M1         | 50 to 55          | dB (V/m) |
| Category M2         | 45 to 50          | dB (V/m) |
| Category M3         | 40 to 45          | dB (V/m) |
| Category M4         | <40               | dB (V/m) |

| Emission categories | >960 MHz          |          |
|---------------------|-------------------|----------|
|                     | E-field emissions |          |
| Category M1         | 40 to 45          | dB (V/m) |
| Category M2         | 35 to 40          | dB (V/m) |
| Category M3         | 30 to 35          | dB (V/m) |
| Category M4         | <30               | dB (V/m) |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>17 / 37 |


## 6.2 Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial orientation (y) along in the measurement plane shall be  $\geq -18$  dB(A/m) at 1kHz in 1/3 octave band filter per 8.3.1.

## 6.3 Frequency Response


The frequency response over the range of 300 Hz – 3 kHz of the axial component of the magnetic field must be within the limits show in response curves below per 8.3.2.

**Figure 11: Magnetic Field Frequency Response for WD with an Axial Field  $\leq -15$  dB (A/m) at 1 kHz**

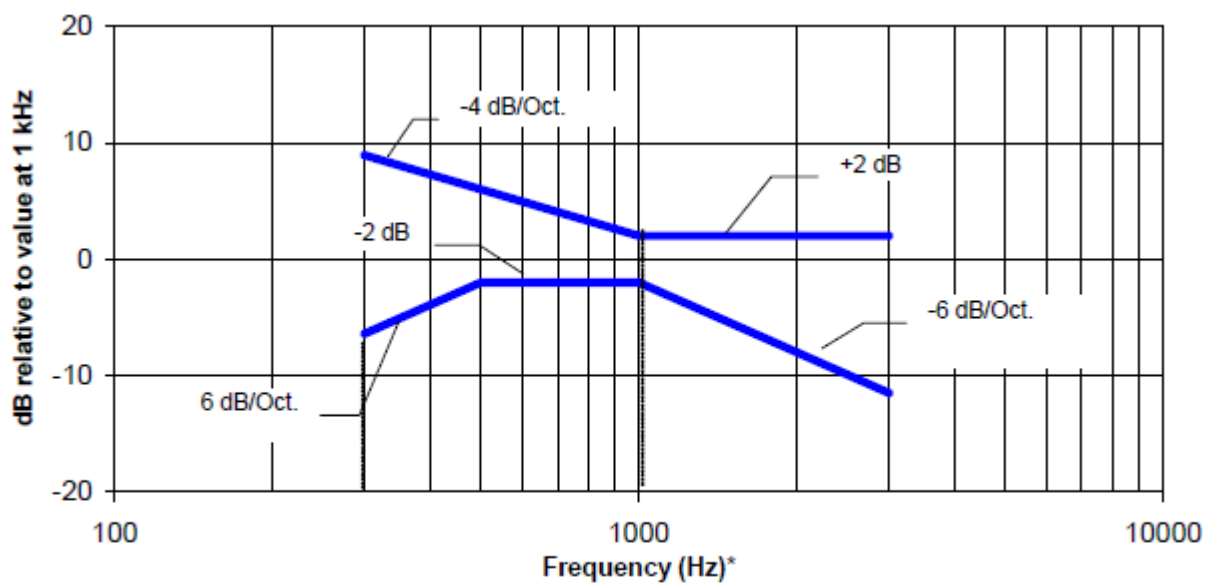

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 12: Magnetic Field Frequency Response for WD with an Axial Field > -15 dB (A/m) at 1 kHz**

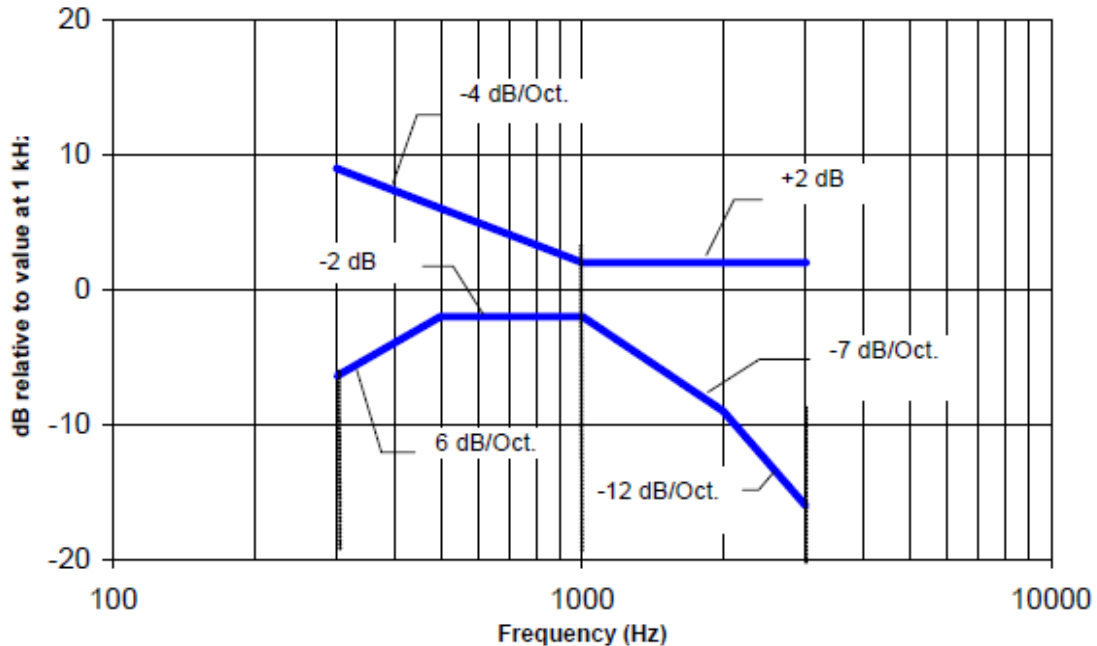

NOTE—Frequency response is between 300 Hz and 3000 Hz.

## 6.4 Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from the wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode.

The signal quality of the axial and radial component of the magnetic field was used to determine the T-coil mode category.

**Table 7: T-Coil Signal Quality Categories**

| Category | Telephone Parameters<br>WD Signal Quality<br>[(signal+noise)-to-noise ratio in dB] |
|----------|------------------------------------------------------------------------------------|
| T1       | 0 to 10 dB                                                                         |
| T2       | 10 to 20 dB                                                                        |
| T3       | 20 to 30 dB                                                                        |
| T4       | > 30 dB                                                                            |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>19 / 37 |

## SECTION 7: TABULAR OUTPUT POWER TEST DATA

### 7.1 Conducted Output Power

The conducted output power of the RM-927 was measured and summarized in Table 8. Conducted power measurements were taken with a base station simulator. Cable loss was accounted for within the test set by offsetting the readings by the appropriate amounts. Readings were taken at the RF port that was present on the RM-927.

**Table 8: Conducted Output Power – CDMA**

| Band     | Channel | Frequency (MHz) | RC1/SO2 | RC3/SO55 | RC1/SO3 |
|----------|---------|-----------------|---------|----------|---------|
| Cellular | 1013    | 824.7           | 25.08   | 25.11    | 25.1    |
|          | 384     | 836.52          | 25.11   | 25.11    | 25.1    |
|          | 777     | 848.31          | 25.1    | 25.1     | 25.08   |
| PCS      | 25      | 1851.25         | 25.05   | 25.09    | 25.01   |
|          | 600     | 1880            | 24.96   | 24.94    | 24.96   |
|          | 1175    | 1908.75         | 25.1    | 25.09    | 24.98   |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>20 / 37 |

## SECTION 8: T-COIL TABULAR TEST DATA

The results in the tables below summarize the data obtained when the device was tested in the operating conditions described previously. Detailed measurement data and plots are shown in Section 13: of this report for the worse case measurement channels in each band. Frequency response plots for the axial position are shown in Figure 13 through Figure 18.

**Table 9: T-Coil Test Data**


| T-Coil Measurement Results |         |                |                                         |                                |                        |               |               |          |          |
|----------------------------|---------|----------------|-----------------------------------------|--------------------------------|------------------------|---------------|---------------|----------|----------|
| Band                       | Channel | Probe Position | Measured Point Coordinates (x mm, y mm) | Frequency Response Margin (dB) | Ambient Noise (dB A/m) | ABM2 (dB A/m) | ABM1 (dB A/m) | SNR (dB) | T-Rating |
| CDMA Cell                  | 1013    | Axial          | 4.2, -4.2                               | 0.98                           | -57.56                 | -51.47        | -5.74         | 45.73    | T4       |
|                            |         | Radial (Y)     | 4.2, -12.5                              |                                | -51.54                 | -48.17        | -11.6         | 36.57    | T4       |
| CDMA Cell                  | 384     | Axial          | 0, -4.2                                 | 0.42                           | -57.56                 | -52.67        | 0.86          | 53.53    | T4       |
|                            |         | Radial (Y)     | 4.2, -12.5                              |                                | -51.54                 | -49.52        | -4.03         | 45.49    | T4       |
| CDMA Cell                  | 777     | Axial          | 0, 4.2                                  | 1.20                           | -57.56                 | -49.9         | -14.62        | 35.28    | T4       |
|                            |         | Radial (Y)     | 4.2, 0                                  |                                | -51.54                 | -44.49        | -3.98         | 40.51    | T4       |
| CDMA PCS                   | 25      | Axial          | 4.2, -4.2                               | 0.27                           | -57.56                 | -50.04        | 2.22          | 52.26    | T4       |
|                            |         | Radial (Y)     | 0, -16.7                                |                                | -51.54                 | -50.67        | -5.24         | 45.43    | T4       |
| CDMA PCS                   | 600     | Axial          | 4.2, -4.2                               | 0.16                           | -57.56                 | -50.37        | 2.47          | 52.84    | T4       |
|                            |         | Radial (Y)     | 4.2, -16.7                              |                                | -51.54                 | -50.66        | -3.67         | 46.99    | T4       |
| CDMA PCS                   | 1175    | Axial          | 0, 0                                    | 0.21                           | -57.56                 | -50.3         | -5.02         | 45.28    | T4       |
|                            |         | Radial (Y)     | 4.2, -16.7                              |                                | -51.54                 | -50.08        | -3.51         | 46.57    | T4       |

Note: Backlight On, Volume = Max, Microphone muted, BT Off, WLAN Off.

**Figure 13: Frequency Response CDMA Cell – Channel 1013**

Scan For Best S/N/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)


Loc: 4.2, -4.2, 3.7 mm Diff: 0.98dB

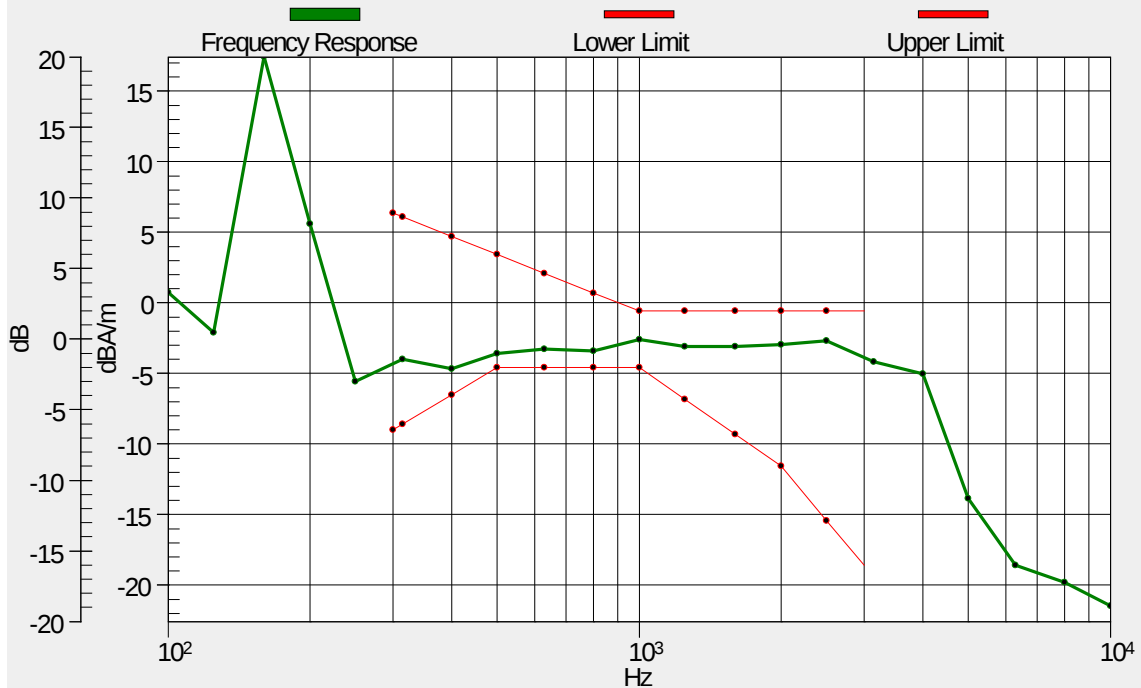


**Figure 14: Frequency Response CDMA Cell – Channel 384**

Scan For Best S/N/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)


Loc: 0, -4.2, 3.7 mm Diff: 0.42dB

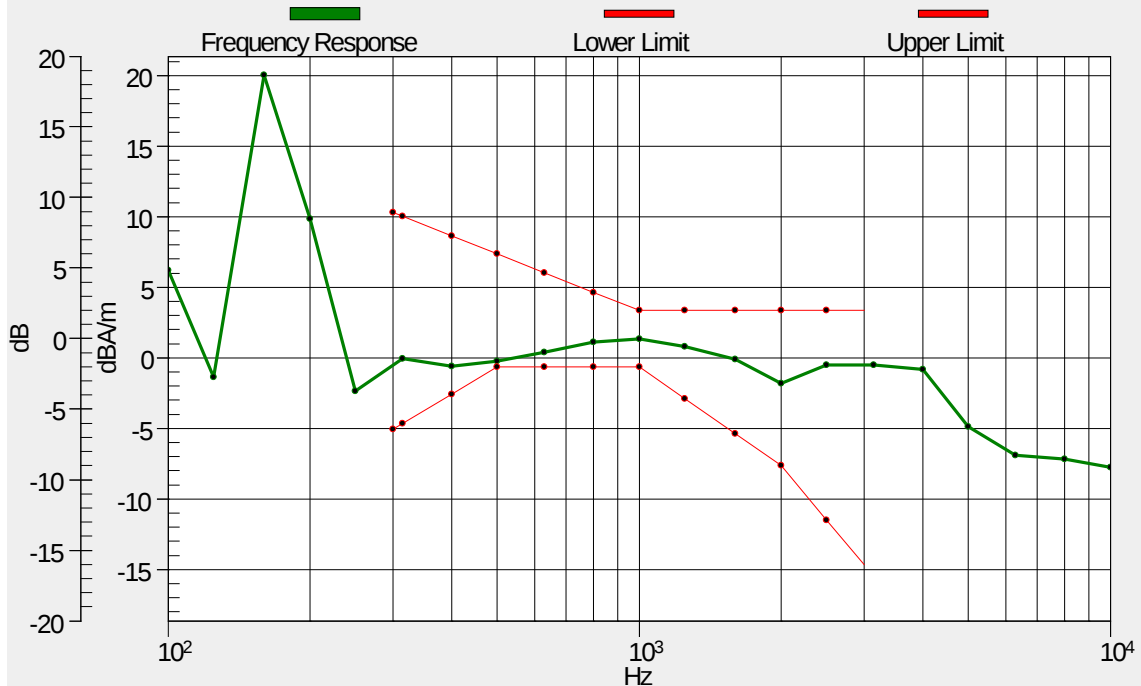

**Figure 15: Frequency Response CDMA Cell – Channel 777**

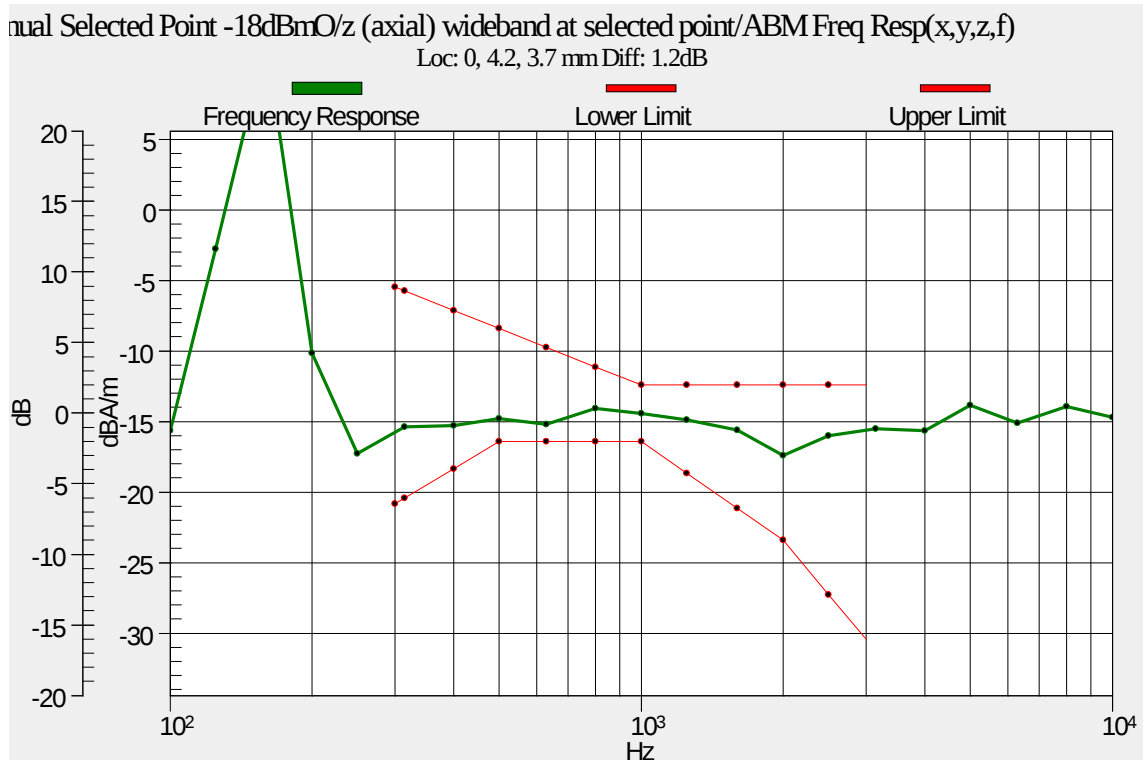


**Figure 16: Frequency Response CDMA PCS – Channel 25**

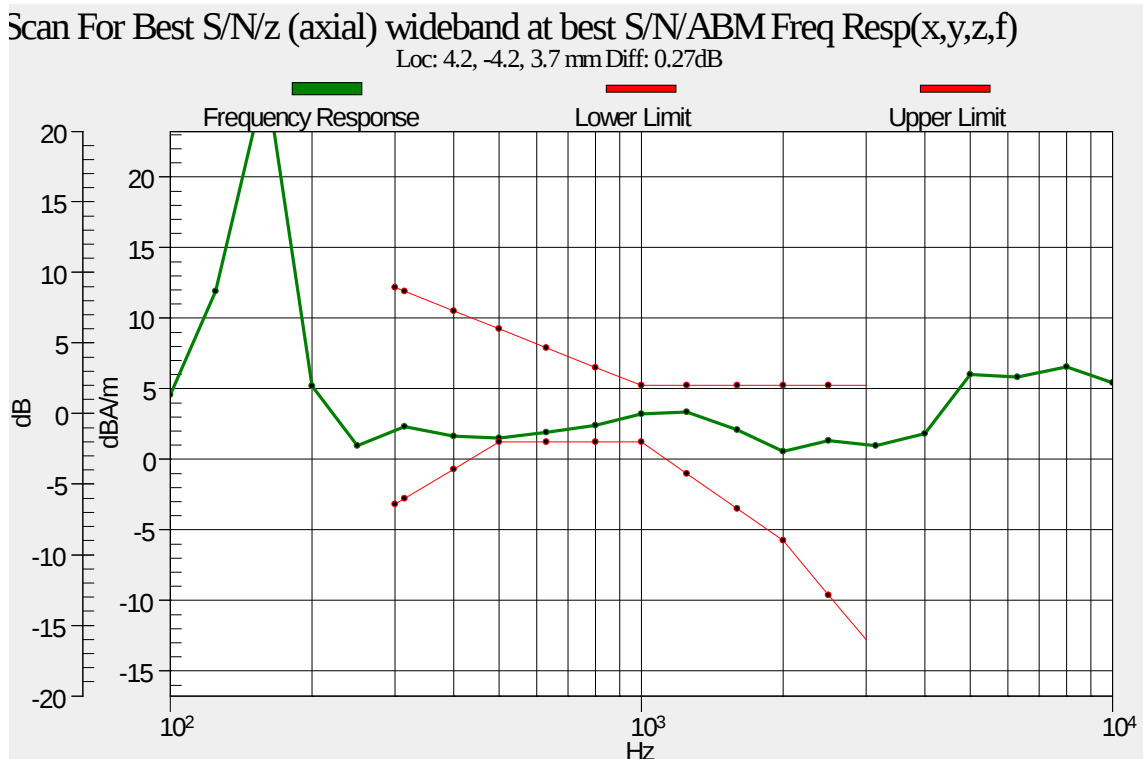

**Figure 17: Frequency Response CDMA PCS – Channel 600**

Scan For Best S/N/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)


Loc: 4.2, -4.2, 3.7 mm Diff: 0.16dB

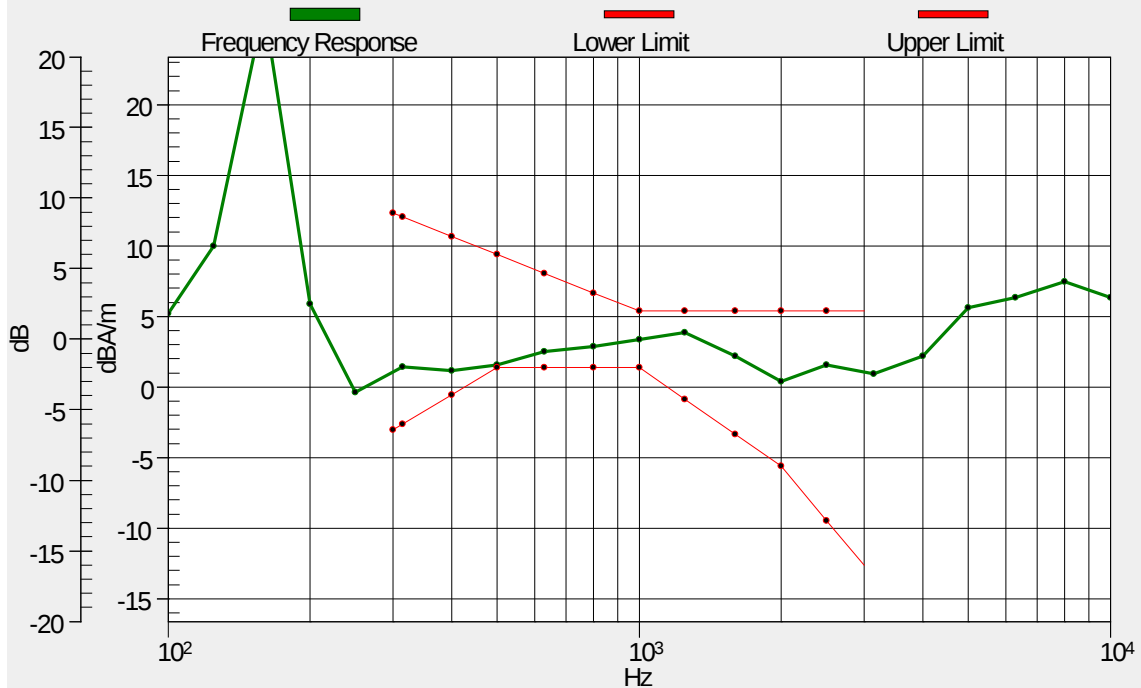

**Figure 18: Frequency Response CDMA PCS – Channel 1175**

Manual Selected Point -18dBmO/z (axial) wideband at selected point/ABM Freq Resp(x,y,z,f)

Loc: 0, 0, 3.7 mm Diff: 0.21dB

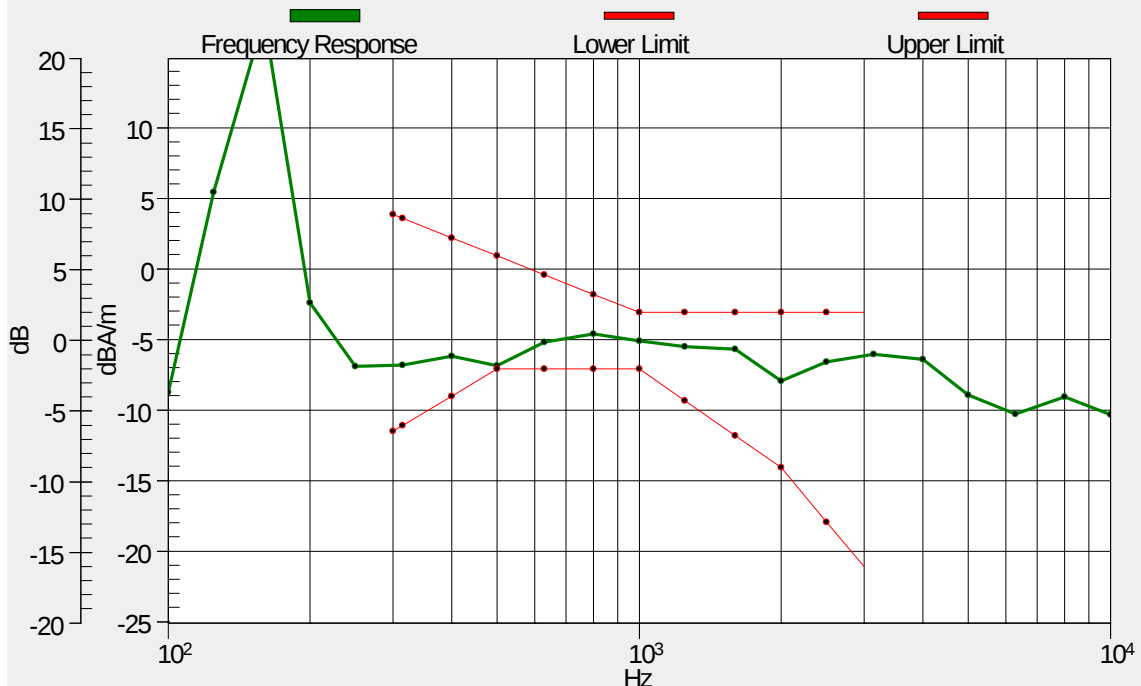

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>24 / 37 |

## SECTION 9: TEST EQUIPMENT

The following major equipment/components were used for the HAC RF evaluation:

### 9.1 HAC RF Measurement System

Table 10: HAC Measurement Equipment

| Model         | Manufacturer | Type of Equipment               | Serial Number  | Calibration Date | Calibration Due |
|---------------|--------------|---------------------------------|----------------|------------------|-----------------|
| RX-90         | Stäubli      | Robot                           | F11/5H1YA/A/01 | N/A              | N/A             |
| AM1DV2        | SPEAG        | Shielded T-Coil Probe           | 1047           | 9/20/2012        | 9/20/2013       |
| DAE4          | SPEAG        | Data Acquisition Electronics    | 258            | 9/11/2012        | 9/11/2013       |
| SE UMS 010 AC | SPEAG        | AMMI                            | 1043           | N/A              | N/A             |
| SD HC P01BA   | SPEAG        | HAC RF Test Arch                | 1046           | N/A              | N/A             |
| SD HAC P02 AB | SPEAG        | AMCC Helmholtz Calibration Coil | 1041           | N/A              | N/A             |

### 9.2 Support Equipment

Table 11: Test Support Equipment

| Model    | Manufacturer      | Type of Equipment                | Serial Number | Calibration Date | Calibration Due |
|----------|-------------------|----------------------------------|---------------|------------------|-----------------|
| CMU200   | Rohde and Schwarz | Wireless Communications Test Set | 119978        | 9/17/2012        | 9/17/2013       |
| ZHL-4240 | Mini-Circuits     | Amplifier                        | 012012        | N/A              | N/A             |
| SMBV100A | Rohde & Schwarz   | Vector Signal Generator          | 257708        | 5/30/2013        | 5/30/2014       |
| 8651A    | Gigatronics       | Power Meter                      | 8650456       | 7/18/2013        | 7/18/2014       |
| 80701A   | Gigatronics       | Power Sensor                     | 1834169       | 7/18/2013        | 7/18/2014       |
| NRP-Z51  | Rohde and Schwarz | Thermal Power Sensor             | 100705        | 9/14/2012        | 9/14/2013       |



|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>26 / 37 |

## SECTION 11: DOCUMENT HISTORY

| Revision/<br>Project Number | Writer<br>Initials | Date    | Change            |
|-----------------------------|--------------------|---------|-------------------|
| 1.0 /G101237626             | JC                 | 8/19/13 | Original document |
|                             |                    |         |                   |
|                             |                    |         |                   |
|                             |                    |         |                   |

## SECTION 12: REFERENCES

- [1] *ANSI/IEEE C63.19-2011: American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.*
- [2] *SPEAG DASY5 V5.2 User Manual, August 2010*

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>27 / 37 |

## SECTION 13: HAC T-COIL TEST PLOTS

Date/Time: 8/4/2013 2:58:27 PM

Test Laboratory: Intertek

File Name: [HAC-T-Coil-CDMA Cell Band Channel 1013.da52:0](#)

### HAC-T-Coil-CDMA Cell Band Channel 1013

**DUT: Nokia RM-927; Serial: 355906050012334**

Communication System: Generic CDMA RC1\_SO3; Communication System Band: Cell Band; Frequency: 824.7 MHz; Duty Cycle: 1:8.01678

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: AM1DV2 - 1047; ; Calibrated: 9/20/2012
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.8(7028)


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/Scan For Best S/N/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 32.8  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>28 / 37 |

**Cursor:**

ABM1/ABM2 = 45.73 dB  
ABM1 comp = -5.74 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

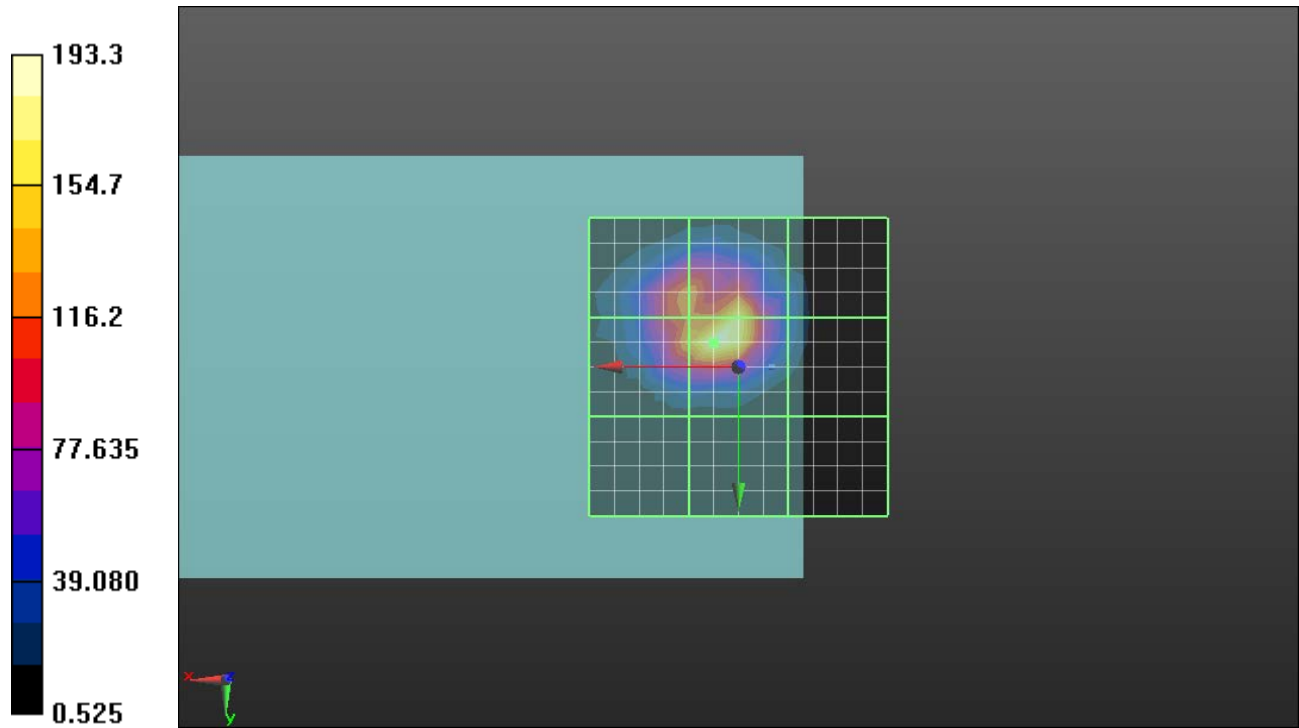

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>29 / 37 |

Date/Time: 8/4/2013 3:14:20 PM

Test Laboratory: Intertek

File Name: [HAC-T-Coil-CDMA Cell Band Channel 1013.da52:0](#)

## HAC-T-Coil-CDMA Cell Band Channel 1013

**DUT: Nokia RM-927; Serial: 355906050012334**

Communication System: Generic CDMA RC1\_SO3; Communication System Band: Cell Band; Frequency: 824.7 MHz; Duty Cycle: 1:8.01678

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: AM1DV2 - 1047; ; Calibrated: 9/20/2012
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.8(7028)


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/Scan For Best S/N/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 32.8  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>30 / 37 |

**Cursor:**

ABM1/ABM2 = 36.57 dB  
ABM1 comp = -11.60 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -12.5, 3.7 mm

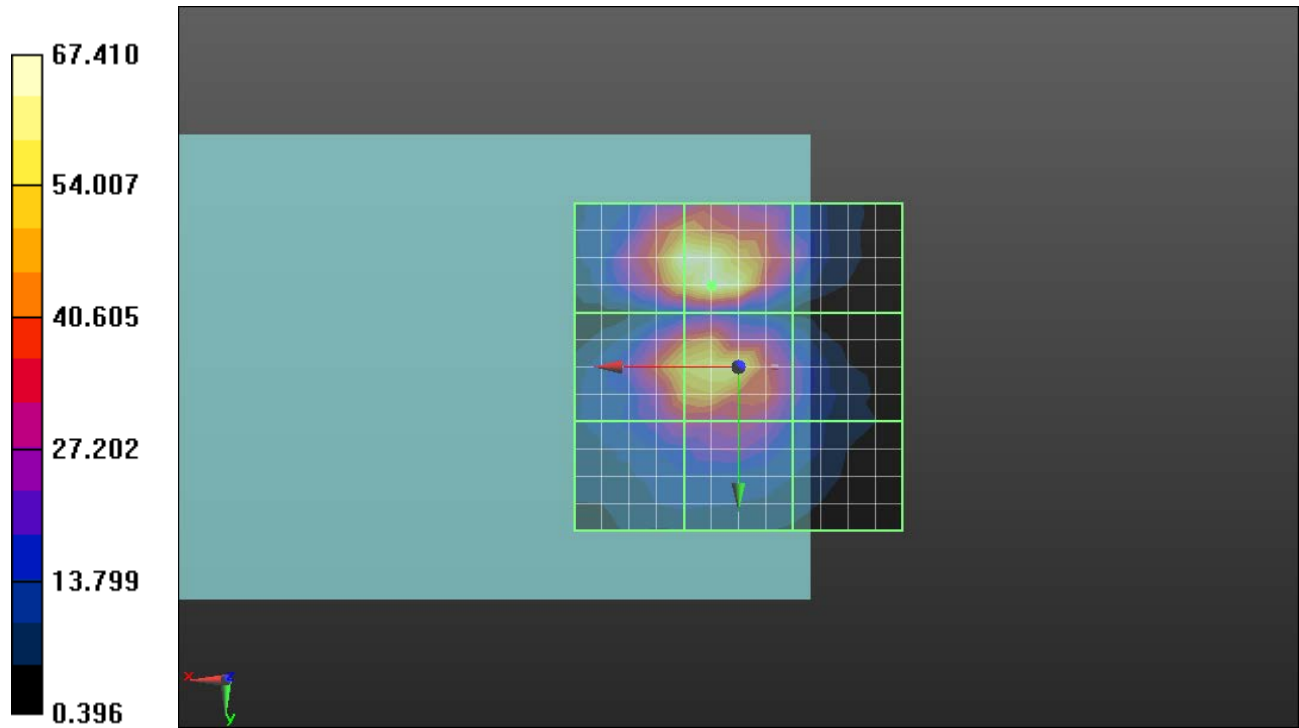

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>31 / 37 |

Date/Time: 8/5/2013 3:12:57 PM

Test Laboratory: Intertek

File Name: [HAC-T-Coil-CDMA PCS Band Channel 1175.da52:0](#)

## HAC-T-Coil-CDMA PCS Band Channel 1175

**DUT: Nokia RM-927; Serial: 355906050012334**

Communication System: Generic CDMA RC1\_SO3 (0); Communication System Band: PCS Band; Frequency: 1908.75 MHz; Duty Cycle: 1:8.01678

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: AM1DV2 - 1047; ; Calibrated: 9/20/2012
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.8(7028)

## T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/Scan For Best S/N/z (axial) 4.2mm 50 x

**50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 32.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB


Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>32 / 37 |

**Cursor:**

ABM1/ABM2 = 52.25 dB  
ABM1 comp = 2.46 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

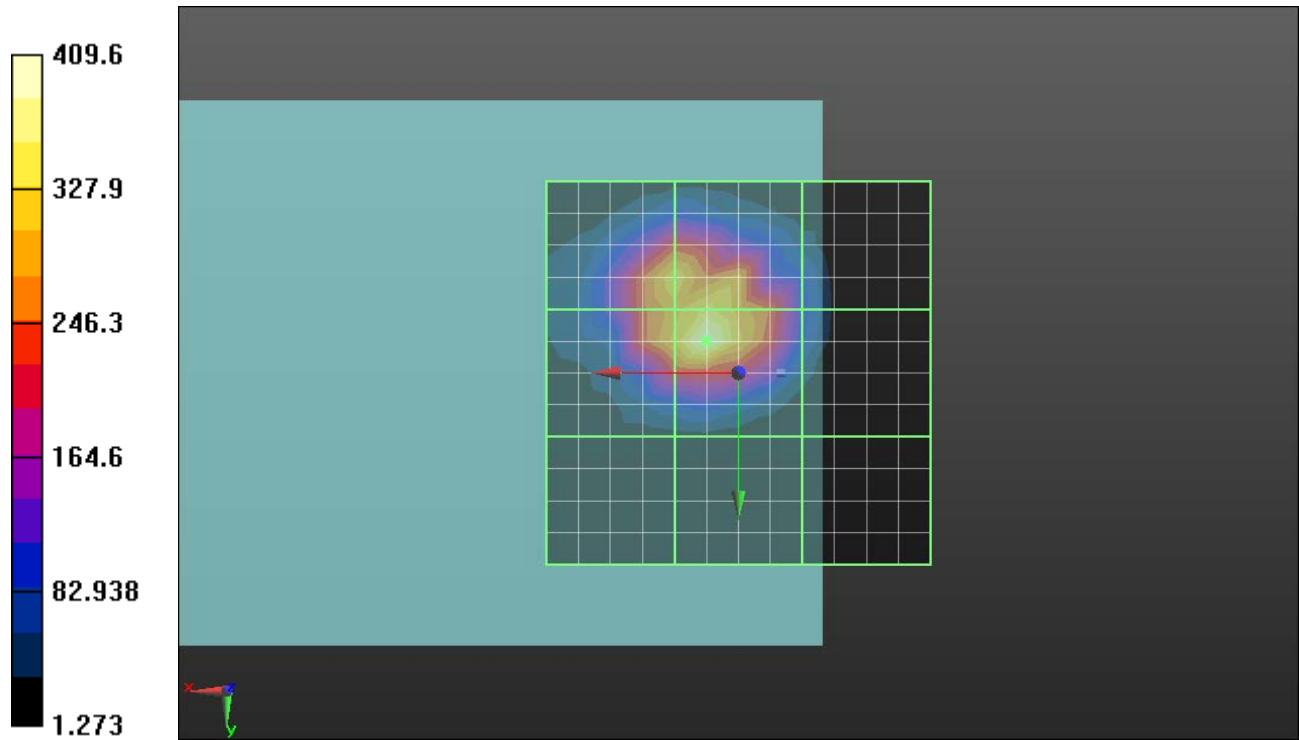

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>33 / 37 |

Date/Time: 8/5/2013 3:28:51 PM

Test Laboratory: Intertek

File Name: [HAC-T-Coil-CDMA PCS Band Channel 1175.da52:0](#)

## HAC-T-Coil-CDMA PCS Band Channel 1175

**DUT: Nokia RM-927; Serial: 355906050012334**

Communication System: Generic CDMA RC1\_SO3 (0); Communication System Band: PCS Band; Frequency: 1908.75 MHz; Duty Cycle: 1:8.01678

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: AM1DV2 - 1047; ; Calibrated: 9/20/2012
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn358; Calibrated: 9/11/2012
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.8(7028)

## T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/Scan For Best S/N/y (transversal) 4.2mm 50

x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 32.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB


Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>34 / 37 |


**Cursor:**

ABM1/ABM2 = 46.57 dB  
ABM1 comp = -3.51 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -16.7, 3.7 mm

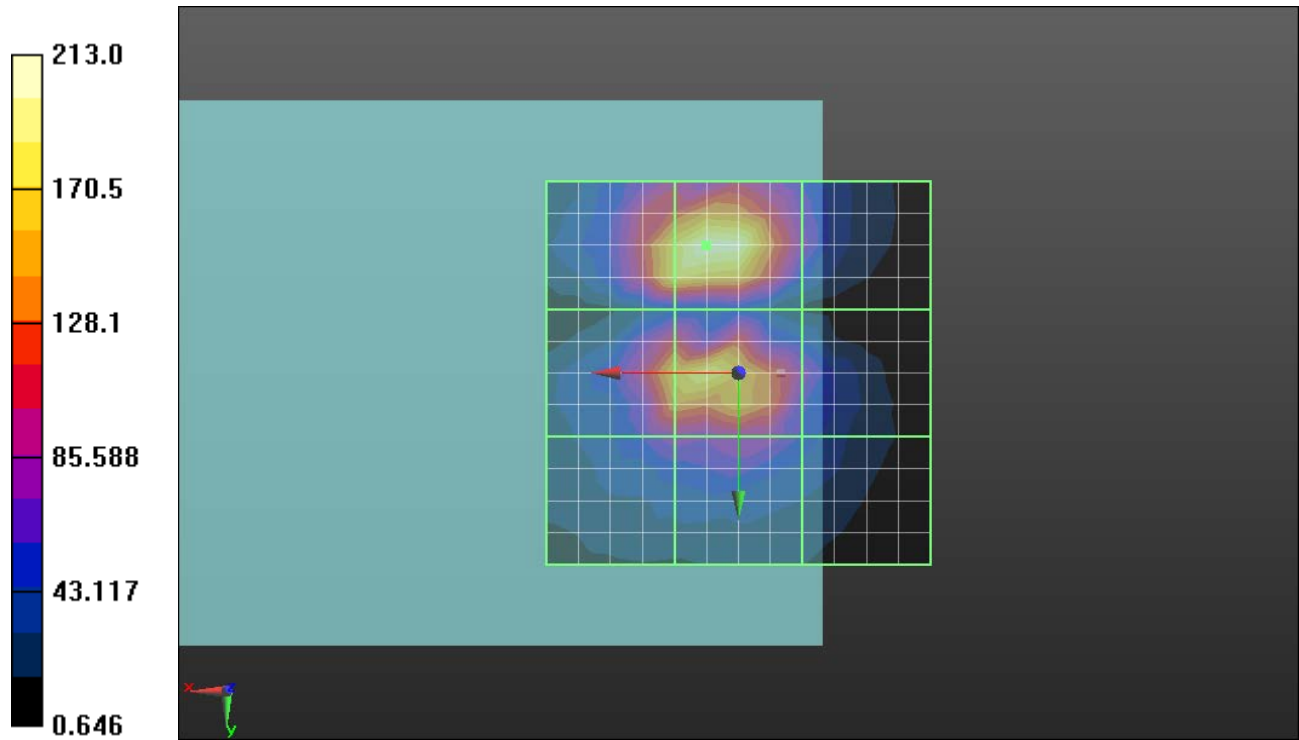


SECTION 14: BACKGROUND ABM2 NOISE PLOTS

Figure 19: Ambient Background Noise Spectrum Plot – Axial Orientation

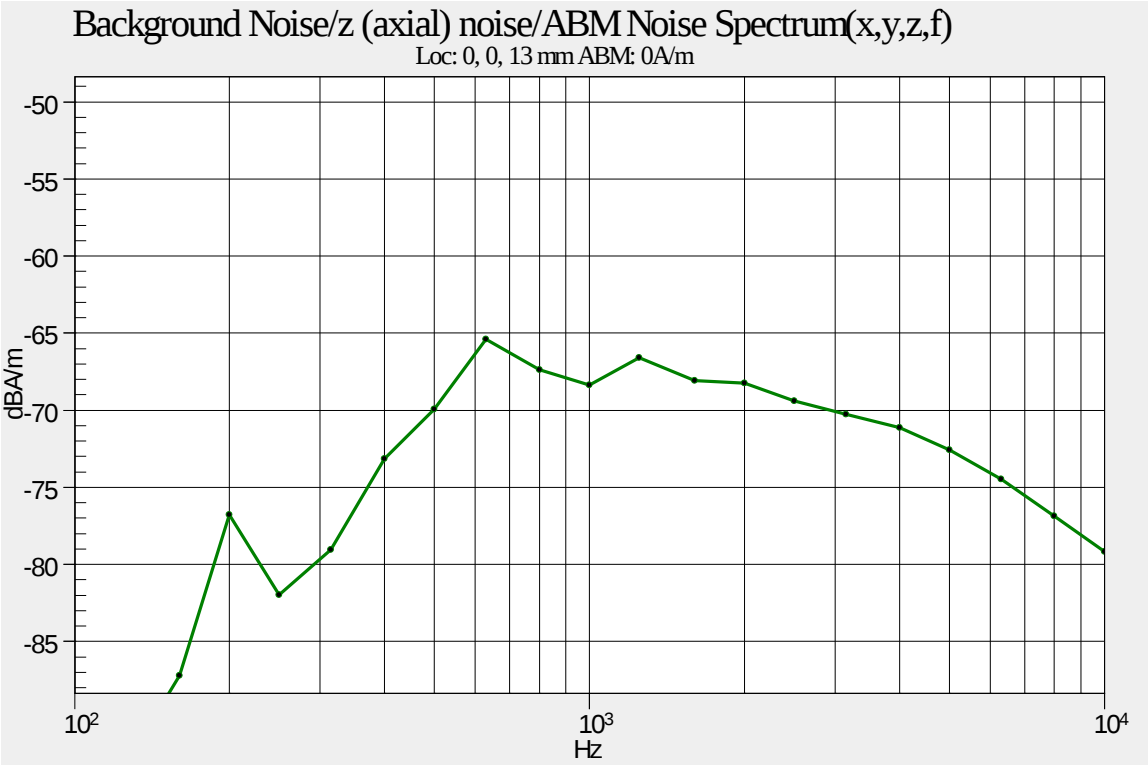

**Figure 20: Ambient Background Noise Spectrum Plot – Radial Y Orientation**

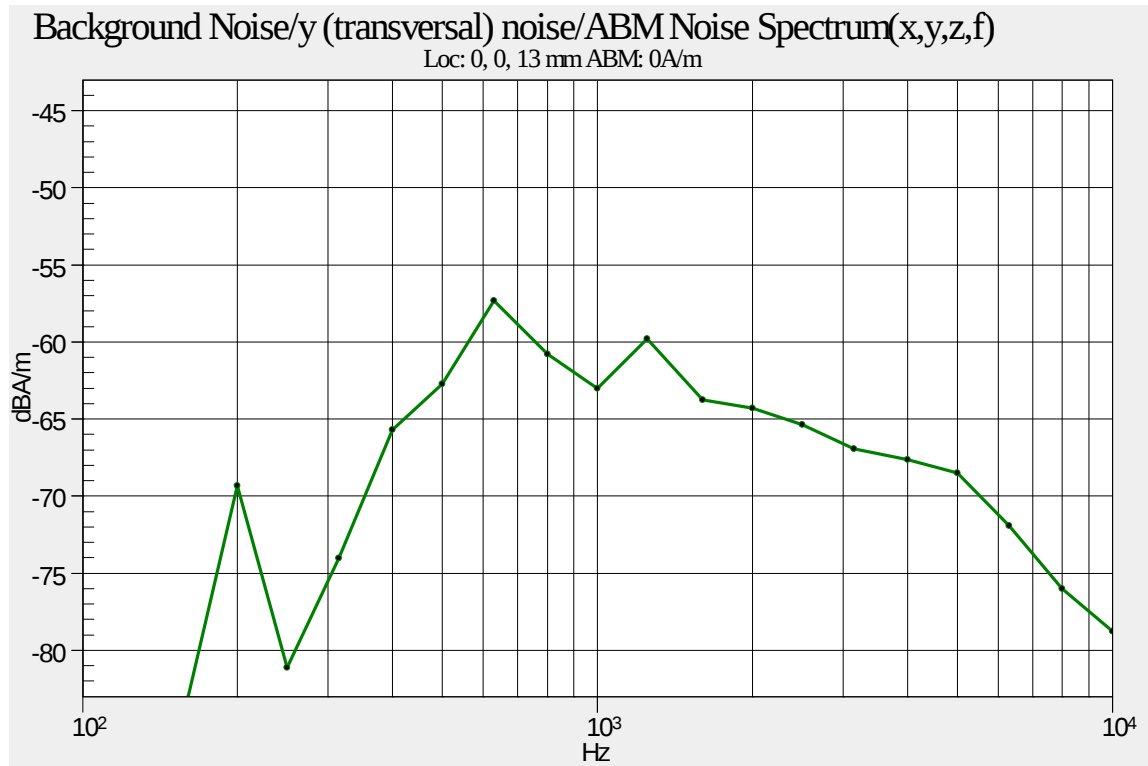

|                                                                                                            |                                            |                 |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------|
| <br>HAC RF (T-COIL) REPORT | MODEL<br>RM-927                            | FCC ID<br>QMND  |
|                                                                                                            | INTERTEK REPORT NUMBER<br>101237626LEX-002 | PAGE<br>37 / 37 |

## SECTION 15: CALIBRATION DOCUMENTS

Calibration documents are provided in a separate exhibit.