

HAC RF Emissions Test Report

Test report no.:	Salo_HAC_0812_06	Date of report:	2008-03-26
Template version:	4.0	Number of pages:	28
Testing laboratory:	TCC Salo P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Ari Orte	Product contact person:	Victoria Abadilla
Measurements made by:	Ari Orte		
Tested devices:	RM-324 (Hearing aid mode active)		
FCC ID:	QMNRM-324H		
Supplement reports:	Salo_HAC_0812_07 Salo_HAC_0812_08		
Testing has been carried out in accordance with:	ANSI C63.19-2006 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF HAC RF EMISSION TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 <i>Electric field measurements</i>	3
1.2.2 <i>Magnetic field measurements</i>	3
1.2.3 <i>Overall RF emissions category of the tested device</i>	4
1.2.4 <i>Maximum Drift</i>	4
1.2.5 <i>Measurement Uncertainty</i>	4
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)	5
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER.....	6
4. DESCRIPTION OF THE TEST EQUIPMENT	7
4.1 MEASUREMENT SYSTEM AND COMPONENTS	7
4.1.1 <i>Isotropic E-field probe ER3DV6</i>	8
4.1.2 <i>Isotropic H-field probe H3DV6</i>	8
4.1.3 <i>Device Holder</i>	9
4.2 VALIDATION OF THE SYSTEM.....	9
5. DESCRIPTION OF THE TEST PROCEDURE	10
5.1 TEST ARCH AND DEVICE HOLDER	10
5.2 SCAN PROCEDURES.....	10
5.3 SCAN AREA CENTERED AT THE MAXIMUM MAGNETIC T-COIL COUPLING	10
5.4 PROBE MODULATION FACTOR.....	11
5.5 SLOT AVERAGED CALCULATION METHOD.....	12
5.6 SUB-GRID EXCLUSION.....	12
5.7 CATEGORY LIMITS.....	13
6. MEASUREMENT UNCERTAINTY	14
7. RESULTS	15
APPENDIX A: SYSTEM VALIDATION SCANS	16
APPENDIX B: MEASUREMENT SCANS.....	21
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	27
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	28

1. SUMMARY OF HAC RF EMISSION TEST REPORT

1.1 Test Details

Period of test	2008-02-11 to 2008-02-17
SN, HW, SW and DUT numbers of tested device	SN: 004401/01/379288/8, HW: 3100, SW: QS_02.14, DUT: 12500
Batteries used in testing	BP-4L, DUT: 12501, 12502
State of sample	Prototype unit
Notes	AWF = -5 for GSM, 0 for WCDMA

1.2 Maximum Results

The maximum measured HAC RF emission values and categories for electric and magnetic fields are given in section 1.2.1 and 1.2.2.

1.2.1 Electric field measurements

Band & Mode	Ch / Freq. [MHz]	Radiated power	Limit of E-field max. value in category M3 [V/m]	Maximum E-field value after exclusion [V/m]	Category
GSM 850	251 / 848.8	32.8 dBm ERP	149.6 – 266.1	248.6	M3 (-5dB)
WCDMA 850	4175 / 835.0	22.9 dBm ERP	199.5 – 354.8	95.9	M4 (0dB)
GSM 1900	810 / 1909.8	30.4 dBm EIRP	47.3 – 84.1	74.2	M3 (-5dB)
WCDMA 1900	9400 / 1880.0	24.9 dBm EIRP	63.1 – 112.2	32.2	M4 (0dB)

1.2.2 Magnetic field measurements

Band & Mode	Ch / Freq. [MHz]	Radiated power	Limit of H-field max. value in category M3 [A/m]	Maximum H-field value after exclusion [A/m]	Category
GSM 850	251 / 848.8	32.8 dBm ERP	0.45 – 0.80	0.513	M3 (-5dB)
WCDMA 850	4233 / 846.6	23.0 dBm ERP	0.60 – 1.07	0.115	M4 (0dB)
GSM 1900	810 / 1909.8	30.4 dBm EIRP	0.14 – 0.25	0.147	M3 (-5dB)
WCDMA 1900	9400 / 1880.0	24.9 dBm EIRP	0.19 – 0.34	0.057	M4 (0dB)

1.2.3 Overall RF emissions category of the tested device

Band & Mode	Combined category (E- and H-fields)	Verdict
GSM 850	M3	Pass
WCDMA 850	M4	Pass
GSM 1900	M3	Pass
WCDMA 1900	M4	Pass
Final Category	M3	Pass

1.2.4 Maximum Drift

Maximum drift during measurements	0.14 dB
-----------------------------------	---------

1.2.5 Measurement Uncertainty

Extended Uncertainty (k=2) 95%, E-field	14.7 %
Extended Uncertainty (k=2) 95%, H-field	10.9 %

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850	GMSK	1/8	824 – 849
GSM	1900	GMSK	1/8	1850 – 1910
WCDMA	850		1	826 – 847
WCDMA	1900		1	1852 - 1908

Outside of USA the transmitter of the device is capable of operating also in 900MHz and 1800MHz bands, which are not part of this filing.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature [°C]:	18 to 25
Ambient humidity [RH %]:	30 to 70

3.2 Test Signal, Frequencies, and Output Power

The transmitter of the device was put into operation by using a call tester. Communications between the device and the call tester were established by air link.

For all tests the device output power was set to maximum power level; a fully charged battery was used for every test sequence.

The transmission mode of the device in WCDMA HAC RF emission tests was configured to 12.2kbps RMC with all TPC bits set as “1”.

The measurements were performed on low, middle and high channels.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement system and components

The measurements were performed using an automated near-field scanning system, DASY 4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.
The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 4	555	12 months	2008-03
E-field Probe ER3DV6	2326	12 months	2008-04
E-field Probe ER3DV6	2333	12 months	2009-01
H-field Probe H3DV6	6053	12 months	2009-01
Dipole Validation Kit, CD835V3	1004	24 months	2009-02
Dipole Validation Kit, CD1880V3	1003	24 months	2009-02

Additional test equipment used in testing and validation:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SML03	101265	12 months	2008-07
Amplifier	ZHL-42 (SMA)	N072095-5	12 months	2008-07
Power Meter	NRVS	849305/028	12 months	2008-07
Power Sensor	NRV-Z32	839176/020	12 months	2008-07
Radio Communication Tester	CMU 200	101111	12 months	2008-07

4.1.1 Isotropic E-field probe ER3DV6

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Frequency	In air 100 MHz to >6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 8 mm Distance from probe tip to nearest point of dipole: 1.25 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

4.1.2 Isotropic H-field probe H3DV6

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material
Frequency	200 MHz to 3 GHz; Output linearized (absolute accuracy $\pm 6.0\%$, $k=2$)
Directivity	± 0.25 dB (spherical isotropy error)
Dynamic Range	10 mA/m to 2 A/m at 1 GHz
Dimensions	Overall length: 330 mm Tip length: 40 mm Body diameter: 12 mm Tip diameter: 6 mm Distance from probe tip to nearest point of dipole: 1.1 mm
Application	General magnetic near-field measurements up to 3 GHz Field component measurements, surface current measurements Measurements in air or liquids, low interaction

4.1.3 Device Holder

The Device Holder and Test Arch are manufactured by Speag (<http://www.dasy4.com/hac>). Test arch is used for all tests i.e. for both validation testing and device testing. The holder and test arch conforms to the requirements of ANSI C63.19.

The SPEAG device holder (see Section 5.1) was used to position the test device in all tests.

4.2 Validation of the System

The manufacturer calibrates the probes annually. Validation measurements are made regularly using the dipole validation kit. The power level used by manufacturer in dipole calibration is supplied to the dipole antenna. The antenna is scanned at 1.0cm distance between top surface of the dipole and calibration point of the probe.

System Validation, H-field and E-field

f [MHz]	Description	E-field [V/m]		H-field [A/m]	
835	Reference result	160.0		0.452	
	± 10% window	144.0 – 176.0	Probe	0.406 – 0.497	Probe
	2008-02-11	167.9	2326	0.493	6053
	2008-02-11	167.2	2333	-	-
1880	Reference result	128.8		0.452	
	± 10% window	115.9 – 141.7	Probe	0.406 – 0.497	
	2008-02-11	127.8	2326	0.464	6053
	2008-02-11	134.7	2333	-	-

Plots of the system validation scans are given in Appendix A.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Arch and Device Holder

The test device was placed in the Device Holder (illustrated below) that is supplied by SPEAG. Using this positioner the tested device is positioned under Test Arch.



Device holder and Test Arch supplied by SPEAG

5.2 Scan Procedures

Near field scans of 5cm x 5cm were used for determination of the field distribution. Measurement plane distance from WD reference plane is 1cm. Scans were performed for both E- and H-field using appropriate probe. DASY software divides detected values into 3 x 3 sub grids as described in the C63.19 standard.

5.3 Scan area centered at the maximum magnetic T-coil coupling

Scanning centered at the maximum magnetic T-coil coupling was not applicable for the tested device.

5.4 Probe Modulation Factor

All raw measurements in DASY4 system are presented as RMS values. The measurement software then applies Probe Modulation Factor (PMF) to convert readings to “slot averaged” peak values as required by C63.19 standard.

Therefore PMF was assessed as described in C63.19 standard along with Speag's Application Note (AN_Hearing_Aid_Compatibility.pdf, section 28.8, "Definition / Determination of the Probe Modulation Factor").

Observed Modulation Factor:

$$PMF_{(E)} = E\text{-field}_{(CW)} / E\text{-field}_{(Modulated)}$$

$$PMF_{(H)} = H\text{-field}_{(CW)} / H\text{-field}_{(Modulated)}$$

Observed Crest Factor:

$$CF_{(E)} = (PMF_{(E)})^2$$

$$CF_{(H)} = (PMF_{(H)})^2$$

Modulation factors, GSM

f [MHz]	p [dBm]	E-field [V/m] Probe SN: 2333		H-field [A/m] Probe SN: 6053		PMF SN: 2326*	PMF SN: 2333	PMF SN: 6053
		CW	GSM	CW	GSM			
835.0	20	95.6	33.9	0.452	0.173	2.71	2.82	2.61
1880.0	20	136.3	48.4	0.506	0.249	2.82	2.82	2.03

*PMF for ER3DV6 - SN2326 was obtained by using method described in Speag document '061117a_TN_HAC_PMF_Predefined_Files.pdf'

Modulation factors, WCDMA

f [MHz]	p [dBm]	E-field [V/m] Probe SN: 2333		H-field [A/m] Probe SN: 6053		PMF E-field	PMF H-field
		CW	WCDMA	CW	WCDMA		
835.0	17	92.3	114.0	0.377	0.526	0.81	0.72
1880.0	17	91.9	113.9	0.308	0.551	0.81	0.56

5.5 Slot Averaged Calculation Method

The slot-averaged values for the every measured signal type were calculated using observed duty cycles.

5.6 Sub-grid Exclusion

The measurement grid defined in C63.19 consists of 9 evenly sized blocks, which are used to define permissible exclusion areas. For both E- and H-field measurements three contiguous blocks may be excluded from the measurements except center block may never be excluded. There must be 4 blocks left that are common for both E- and H-field measurements, so maximum of 5 different blocks can be excluded (e.g. 3 blocks excluded from E-field and 2 blocks from H-field).

5.7 Category Limits

From remaining maximum values after exclusion process, Hearing Aid M-category is defined according to the category limits of C63.19 – 2006.

Category	AWF [dB]	Limits for RF-parameters <960MHz				Limits for RF-parameters >960MHz			
		E-field [V/m]		H-field [A/m]		E-field [V/m]		H-field [A/m]	
		Min	Max	Min	Max	Min	Max	Min	Max
M1	0	631.0	1122.0	1.91	3.39	199.5	354.8	0.60	1.07
M1	-5	473.2	841.4	1.43	2.54	149.6	266.1	0.45	0.80
M2	0	354.8	631.0	1.07	1.91	112.2	199.5	0.34	0.60
M2	-5	266.1	473.2	0.80	1.43	84.1	149.6	0.25	0.45
M3	0	199.5	354.8	0.60	1.07	63.1	112.2	0.19	0.34
M3	-5	149.6	266.1	0.45	0.80	47.3	84.1	0.14	0.25
M4	0		<199.5		<0.60		<63.1		<0.19
M4	-5		<149.6		<0.45		<47.3		<0.14

6. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Tolerance ±%	Probability Distribution	Div.	ci E	ci H	Standard Uncertainty ±%, E	Standard Uncertainty ±%, H	Remark
MEASUREMENT SYSTEM								
Probe Calibration	5.1	N	1	1	1	5.1	5.1	
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	
Sensor Displacement	16.5	R	√3	1	0.145	9.5	1.4	
Boundary Effect	2.4	R	√3	1	1	1.4	1.4	
Linearity	4.7	R	√3	1	1	2.7	2.7	SAR
Scaling to Peak Envelope Power	2.0	R	√3	1	1	1.2	1.2	
System Detection Limit	1.0	R	√3	1	1	0.6	0.6	
Readout Electronics	0.3	N	1	1	1	0.3	0.3	SAR
Response Time	0.8	R	√3	1	1	0.5	0.5	
Integration Time	2.6	R	√3	1	1	1.5	1.5	SAR
RF Ambient Conditions	3.0	R	√3	1	1	1.7	1.7	SAR
RF Reflections	12.0	R	√3	1	1	6.9	6.9	
Probe Positioner	1.2	R	√3	1	0.67	0.7	0.5	
Probe Positioning	4.7	R	√3	1	0.67	2.7	1.8	
Extrapolation and Interpolation	1.0	R	√3	1	1	0.6	0.6	SAR
TEST SAMPLE RELATED								
Device Positioning Vertical	4.7	R	√3	1	0.67	2.7	1.8	
Device Positioning Lateral	1.0	R	√3	1	1	0.6	0.6	
Device Holder and Test Arch	2.4	R	√3	1	1	1.4	1.4	
Power Drift	5.0	R	√3	1	1	2.9	2.9	SAR
TEST ARCH AND SETUP RELATED								
Test Arch Thickness	2.4	R	√3	1	0.67	1.4	0.9	
COMBINED STANDARD UNCERTAINTY						14.7	10.9	
Expanded Uncertainty on Power						29.4	21.8	
Expanded Uncertainty on Field						14.7	10.9	

7. RESULTS

The calculated maximum field values for the test device are tabulated below:

850MHz RF emissions test results

Option used	Test configuration	Ch 128 824.2MHz	Ch 190 836.6MHz	Ch 251 848.8MHz
GSM 850	Power	33.4 dBm	33.7 dBm	32.8 dBm
Flip open	E-field [V/M]	246.4	243.5	248.6
	H-field [A/m]	0.469	0.463	0.513
	Category	M3 (-5dB)	M3 (-5dB)	M3 (-5dB)
Option used	Test configuration	Ch 4132 826.4MHz	Ch 4175 835.0MHz	Ch 4233 846.6MHz
WCDMA 850	Power	22.3 dBm	22.9 dBm	23.0 dBm
Flip open	E-field [V/M]	86.1	95.9	92.9
	H-field [A/m]	0.099	0.109	0.115
	Category	M4 (0dB)	M4 (0dB)	M4 (0dB)

1900MHz RF emissions test results

Option used	Test configuration	Ch 512 1850.2MHz	Ch 661 1880.0MHz	Ch 810 1909.8MHz
GSM 1900	Power	28.7 dBm	32.2 dBm	30.4 dBm
Flip open	E-field [V/M]	68.0	71.9	74.2
	H-field [A/m]	0.120	0.130	0.147
	Category	M3 (-5dB)	M3 (-5dB)	M3 (-5dB)
Option used	Test configuration	Ch 9262 1852.4MHz	Ch 9400 1880.0MHz	Ch 9538 1907.6MHz
WCDMA 1900	Power	23.3 dBm	24.9 dBm	25.8 dBm
Flip open	E-field [V/M]	30.4	32.2	32.1
	H-field [A/m]	0.052	0.057	0.054
	Category	M4 (0dB)	M4 (0dB)	M4 (0dB)

Plots of the measurement scans are shown in **Appendix B**. Excluded cells are colored orange.

APPENDIX A: SYSTEM VALIDATION SCANS

SYSTEM VALIDATION DATA 850MHz (ER3DV6 - SN2326, H3DV6 - SN6053)

Date/Time: 2008-02-11 14:34:51

Test Laboratory: TCC Nokia

Type: D835V3; Serial: 1004

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2326

- ConvF(1, 1, 1); Calibrated: 2007-04-20

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2007-03-15

- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 169.2 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 127.4 V/m; Power Drift = -0.022 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Date/Time: 2008-02-11 10:57:46

Test Laboratory: TCC Nokia

Type: D835V3; Serial: 1004

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6053

- ; Calibrated: 2008-01-21

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2007-03-15

- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.493 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.521 A/m; Power Drift = -0.017 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

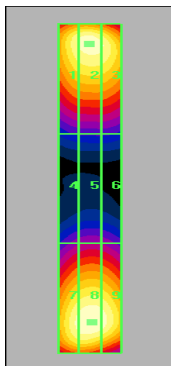

Grid 1	Grid 2	Grid 3
162.1 M4	166.6 M4	162.5 M4
Grid 4	Grid 5	Grid 6
88.3 M4	91.4 M4	89.9 M4
Grid 7	Grid 8	Grid 9
164.3 M4	169.2 M4	166.0 M4

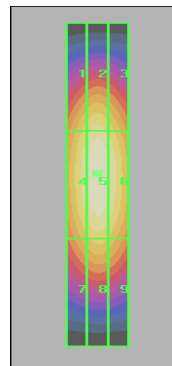

Grid 1	Grid 2	Grid 3
0.424 M4	0.449 M4	0.424 M4
Grid 4	Grid 5	Grid 6
0.462 M4	0.493 M4	0.468 M4
Grid 7	Grid 8	Grid 9
0.394 M4	0.418 M4	0.399 M4

SYSTEM VALIDATION DATA 850MHz (ER3DV6 - SN2333)

Date/Time: 2008-02-11 11:38:22

Test Laboratory: TCC Nokia

Type: D835V3; Serial: 1004

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2333; Probe Notes:

- ConvF(1, 1, 1); Calibrated: 2008-01-21

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2007-03-15

- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 173.4 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 122.7 V/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

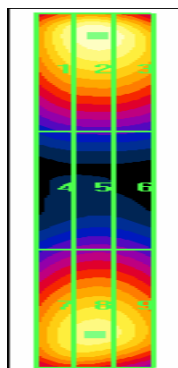

Grid 1	Grid 2	Grid 3
165.3 M4	173.4 M4	169.5 M4
Grid 4	Grid 5	Grid 6
85.6 M4	88.9 M4	87.5 M4
Grid 7	Grid 8	Grid 9
156.8 M4	160.9 M4	157.8 M4

SYSTEM VALIDATION DATA GSM1900MHZ (ER3DV6 - SN2326, H3DV6 - SN6053)

Date/Time: 2008-02-11 14:51:08
Test Laboratory: TCC Nokia
Type: CD1880V3; Serial: 1003

Date/Time: 2008-02-11 11:10:14
Test Laboratory: TCC Nokia
Type: CD1880V3; Serial: 1003

Communication System: CW
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Dipole Section


Communication System: CW
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Dipole Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2326
- ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176


DASY4 Configuration:
- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Scan - ER3DV6 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):
Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 129.0 V/m
Probe Modulation Factor = 1.00
Device Reference Point: 0.000, 0.000, 354.7 mm
Reference Value = 130.6 V/m; Power Drift = -0.042 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

H Scan - H3DV6 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):
Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.464 A/m
Probe Modulation Factor = 1.00
Device Reference Point: 0.000, 0.000, 354.7 mm
Reference Value = 0.491 A/m; Power Drift = 0.000 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)



Grid 1	Grid 2	Grid 3
124.6 M2	126.5 M2	122.2 M2
Grid 4	Grid 5	Grid 6
86.8 M3	89.6 M3	87.9 M3
Grid 7	Grid 8	Grid 9
126.6 M2	129.0 M2	125.8 M2



Grid 1	Grid 2	Grid 3
0.401 M2	0.427 M2	0.407 M2
Grid 4	Grid 5	Grid 6
0.436 M2	0.464 M2	0.445 M2
Grid 7	Grid 8	Grid 9
0.390 M2	0.416 M2	0.399 M2

SYSTEM VALIDATION DATA GSM1900MHz (ER3DV6 - SN2333)

Date/Time: 2008-02-11 11:25:46

Test Laboratory: TCC Nokia

Type: CD1880V3; Serial: 1003

Communication System: CW

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2333; Probe Notes:

- ConvF(1, 1, 1); Calibrated: 2008-01-21

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2007-03-15

- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004-

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 136.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 140.6 V/m; Power Drift = 0.000 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

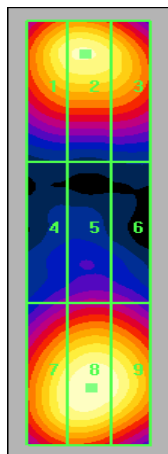

Grid 1	Grid 2	Grid 3
130.4 M2	132.7 M2	126.9 M2
Grid 4	Grid 5	Grid 6
87.3 M3	92.0 M3	90.8 M3
Grid 7	Grid 8	Grid 9
131.9 M2	136.6 M2	134.1 M2

APPENDIX B: MEASUREMENT SCANS

MEASUREMENT DATA GSM850, CHANNEL HIGH (848.8 MHz)


Date/Time: 2008-02-11 15:21:06
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: GSM850
Frequency: 848.8 MHz; Duty Cycle: 1:7.95
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2326; Probe Notes:
- ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance, closest sensor part to the Device = 10mm, High/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 248.6 V/m
Probe Modulation Factor = 2.71
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 90.4 V/m; Power Drift = -0.024 dB
Hearing Aid Near-Field Category: M3 (AWF -5 dB)

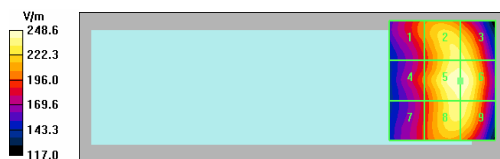

Grid 1	Grid 2	Grid 3
206.0 M3	235.7 M3	235.5 M3
Grid 4	Grid 5	Grid 6
199.5 M3	248.6 M3	248.6 M3
Grid 7	Grid 8	Grid 9
190.7 M3	239.5 M3	239.5 M3


Date/Time: 2008-02-12 09:50:06
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: GSM850
Frequency: 848.8 MHz; Duty Cycle: 1:6.79
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance, closest sensor part to the Device = 10mm, high/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.513 A/m
Probe Modulation Factor = 2.61
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 0.098 A/m; Power Drift = 0.083 dB
Hearing Aid Near-Field Category: M3 (AWF -5 dB)

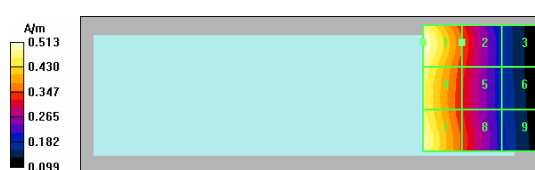

Grid 1	Grid 2	Grid 3
0.513 M3	0.352 M4	0.191 M4
Grid 4	Grid 5	Grid 6
0.487 M3	0.335 M4	0.192 M4
Grid 7	Grid 8	Grid 9
0.499 M3	0.344 M4	0.197 M4

MEASUREMENT DATA WCDMA850, CHANNEL MIDDLE (835 MHz)

Date/Time: 2008-02-13 11:41:40
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: WCDMA850
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2333; Probe Notes:
- ConvF(1, 1, 1); Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176


E Scan - ER3DV6 - measurement distance, closest sensor part to the Device = 10mm, Mid/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 95.9 V/m
Probe Modulation Factor = 0.810
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 115.9 V/m; Power Drift = -0.064 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Date/Time: 2008-02-13 13:51:23
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8


Communication System: WCDMA850
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:
- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance, closest sensor part to the Device = 10mm, mid/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.156 A/m
Probe Modulation Factor = 0.720
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 0.113 A/m; Power Drift = 0.027 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

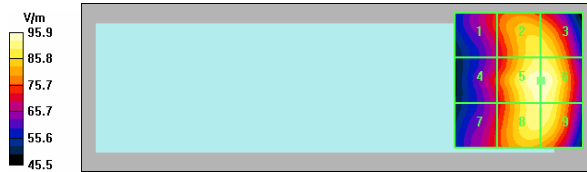

Grid 1	Grid 2	Grid 3
74.5 M4	89.8 M4	89.8 M4
Grid 4	Grid 5	Grid 6
73.9 M4	95.9 M4	95.9 M4
Grid 7	Grid 8	Grid 9
73.7 M4	93.0 M4	93.0 M4

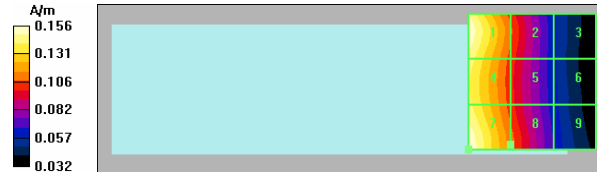

Grid 1	Grid 2	Grid 3
0.156 M4	0.109 M4	0.060 M4
Grid 4	Grid 5	Grid 6
0.146 M4	0.104 M4	0.061 M4
Grid 7	Grid 8	Grid 9
0.156 M4	0.111 M4	0.065 M4


MEASUREMENT DATA WCDMA850, CHANNEL HIGH (846.6 MHz)

Date/Time: 2008-02-13 11:47:31
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: WCDMA850
Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2333; Probe Notes:
- ConvF(1, 1, 1); Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance, closest sensor part to the Device = 10mm, High/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 92.9 V/m
Probe Modulation Factor = 0.810
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 111.7 V/m; Power Drift = -0.035 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

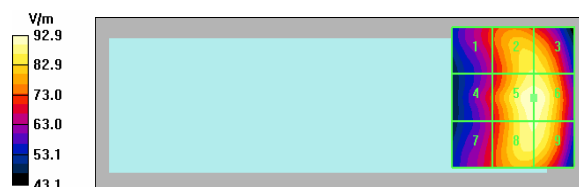


Grid 1	Grid 2	Grid 3
71.8 M4	86.9 M4	86.9 M4
Grid 4	Grid 5	Grid 6
71.1 M4	92.9 M4	92.9 M4
Grid 7	Grid 8	Grid 9
70.8 M4	90.4 M4	90.4 M4

Date/Time: 2008-02-13 13:55:00
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: WCDMA850
Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:
- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance, closest sensor part to the Device = 10mm, high/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.163 A/m
Probe Modulation Factor = 0.720
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 0.115 A/m; Power Drift = -0.003 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

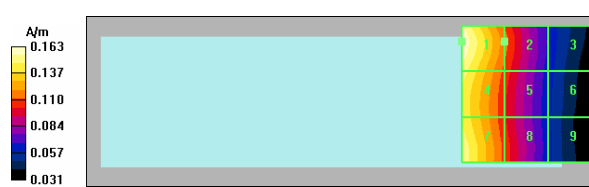

Grid 1	Grid 2	Grid 3
0.163 M4	0.115 M4	0.065 M4
Grid 4	Grid 5	Grid 6
0.151 M4	0.108 M4	0.063 M4
Grid 7	Grid 8	Grid 9
0.153 M4	0.108 M4	0.062 M4


MEASUREMENT DATA GSM1900, CHANNEL HIGH (1909.8 MHz)

Date/Time: 2008-02-11 15:40:04
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: GSM1900
Frequency: 1909.8 MHz; Duty Cycle: 1:7.92
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2326; Probe Notes:
- ConvF(1, 1, 1); Calibrated: 2007-04-20
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance, closest sensor part to the Device = 10mm, High/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 86.3 V/m
Probe Modulation Factor = 2.82
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 18.3 V/m; Power Drift = -0.022 dB
Hearing Aid Near-Field Category: M2 (AWF -5 dB)

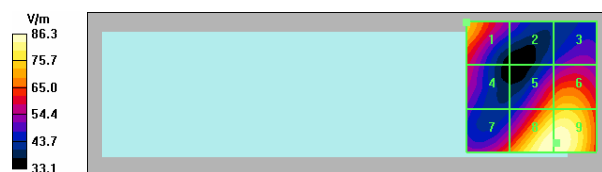


Grid 1	Grid 2	Grid 3
74.2 M3	52.2 M3	54.0 M3
Grid 4	Grid 5	Grid 6
59.3 M3	71.5 M3	75.0 M3
Grid 7	Grid 8	Grid 9
66.8 M3	86.2 M2	86.3 M2

Date/Time: 2008-02-12 09:27:54
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: GSM1900
Frequency: 1909.8 MHz; Duty Cycle: 1:4.13
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:
- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance, closest sensor part to the Device = 10mm, high/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.183 A/m
Probe Modulation Factor = 2.03
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 0.067 A/m; Power Drift = -0.063 dB
Hearing Aid Near-Field Category: M3 (AWF -5 dB)

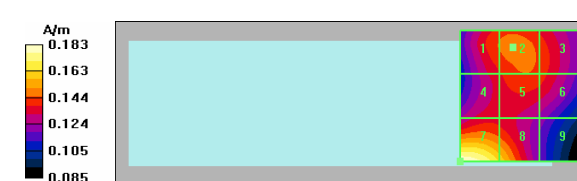

Grid 1	Grid 2	Grid 3
0.144 M3	0.147 M3	0.143 M3
Grid 4	Grid 5	Grid 6
0.137 M4	0.144 M3	0.141 M3
Grid 7	Grid 8	Grid 9
0.183 M3	0.163 M3	0.122 M4

MEASUREMENT DATA WCDMA1900, CHANNEL MIDDLE (1880MHz)


Date/Time: 2008-02-13 12:06:13
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2333; Probe Notes:
- ConvF(1, 1, 1); Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - ER3DV6 - measurement distance, closest sensor part to the Device = 10mm, Mid/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 38.9 V/m
Probe Modulation Factor = 0.810
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 29.5 V/m; Power Drift = -0.076 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

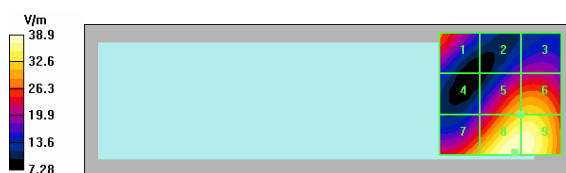

Grid 1	Grid 2	Grid 3
27.2 M4	19.1 M4	20.7 M4
Grid 4	Grid 5	Grid 6
18.0 M4	32.2 M4	32.9 M4
Grid 7	Grid 8	Grid 9
31.7 M4	38.9 M4	38.7 M4


Date/Time: 2008-02-13 13:35:51
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV6 - SN6053; Probe Notes:
- ; Calibrated: 2008-01-21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - H3DV6 - measurement distance, closest sensor part to the Device = 10mm, mid/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 0.082 A/m
Probe Modulation Factor = 0.560
Device Reference Point: 0.000, 0.000, 353.7 mm
Reference Value = 0.100 A/m; Power Drift = -0.032 dB
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

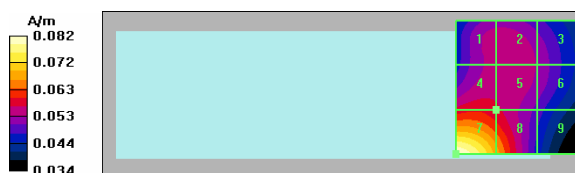

Grid 1	Grid 2	Grid 3
0.055 M4	0.056 M4	0.053 M4
Grid 4	Grid 5	Grid 6
0.059 M4	0.057 M4	0.053 M4
Grid 7	Grid 8	Grid 9
0.082 M4	0.068 M4	0.049 M4

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

E-field probe ER3DV6, SN: 2326

E-field probe ER3DV6, SN: 2333

H-field probe H3DV6, SN: 6053



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Nokia SD TCC**

Certificate No: **ER3-2326_Apr07**

CALIBRATION CERTIFICATE

Object	ER3DV6 - SN:2326
Calibration procedure(s)	QA CAL-02.v5 Calibration procedure for E-field probes optimized for close near field evaluations in air
Calibration date:	April 20, 2007
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ER3DV6	SN: 2328	2-Oct-06 (SPEAG, No. ER3-2328_Oct06)	Oct-07
DAE4	SN: 907	20-Jul-06 (SPEAG, No. DAE4-907_Jul06)	Jul-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature
Approved by:	Niels Kuster	Quality Manager	

Issued: April 21, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Nokia Salo TCC**

Certificate No: ER3-2333_Jan08

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2333**

Calibration procedure(s) **QA CAL-02.v5**
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **January 21, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ER3DV6	SN: 2328	2-Oct-07 (SPEAG, No. ER3-2328_Oct07)	Oct-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: January 21, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Nokia Salo TCC**

Certificate No: **H3-6053_Jan08**

CALIBRATION CERTIFICATE

Object	H3DV6 - SN:6053
Calibration procedure(s)	QA CAL-03.v5 Calibration procedure for H-field probes optimized for close near field evaluations in air
Calibration date:	January 21, 2008
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe H3DV6	SN: 6182	2-Oct-07 (SPEAG, No. H3-6182_Oct07)	Oct-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: January 21, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

835MHz dipole CD835V3, SN: 1004
1880MHz dipole CD1880V3, SN: 1003



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: CD835V3-1004_Feb07

CALIBRATION CERTIFICATE

Object CD835V3 - SN: 1004

Calibration procedure(s) QA CAL-20.v4
Calibration procedure for dipoles in air

Calibration date: February 13, 2007

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
DAE4	SN: 660	1-Mar-06 (SPEAG, No. DAE4-660_Mar06)	Calibration, Mar-07
Probe ER3DV6	SN: 2336	27-Dec-06 (SPEAG, No. ER3-2336_Dec06)	Calibration, Dec-07
Probe H3DV6	SN: 6065	27-Dec-06 (SPEAG, No. H3-6065-Dec06)	Calibration, Dec-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-4419B	GB43310788	12-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-07
Power sensor HP 8481A	MY41093312	10-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-08
Power sensor HP 8481A	MY41093315	10-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-08
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
RF generator R&S SMT06	SN: 100005	26-Jul-04 (SPEAG, in house check Nov-05)	In house check: Nov-07

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Fin Bomholt	Technical Director	

Issued: March 6, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7 B53
DASY PP Version	SEMCAD	V1.8 B172
Phantom	HAC Test Arch	SD HAC P01 BA, #1002
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 180 mm
Frequency	835 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.07 dB	

2 Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW forward power	0.452 A/m

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW forward power	161.7 V/m
Maximum measured above low end	100 mW forward power	158.3 V/m
Averaged maximum above arm	100 mW forward power	160.0 V/m

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	16.8 dB	(42.5 – j11.2) Ohm
835 MHz	26.1 dB	(52.9 + j4.2) Ohm
900 MHz	15.6 dB	(57.3 – j16.4) Ohm
950 MHz	24.7 dB	(45.3 + j2.9) Ohm
960 MHz	19.1 dB	(51.7 + j11.2) Ohm

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3.2 DASY4 H-Field Result

Date/Time: 2/13/2007 10:40:13 AM

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1004

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: Air

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 12/27/2006
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn660: Calibrated: 3/1/2006
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

H Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.452 A/m


Probe Modulation Factor = 1.00

Reference Value = 0.479 A/m; Power Drift = 0.012 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.393	0.408	0.380
Grid 4	Grid 5	Grid 6
0.436	0.452	0.425
Grid 7	Grid 8	Grid 9
0.374	0.387	0.365

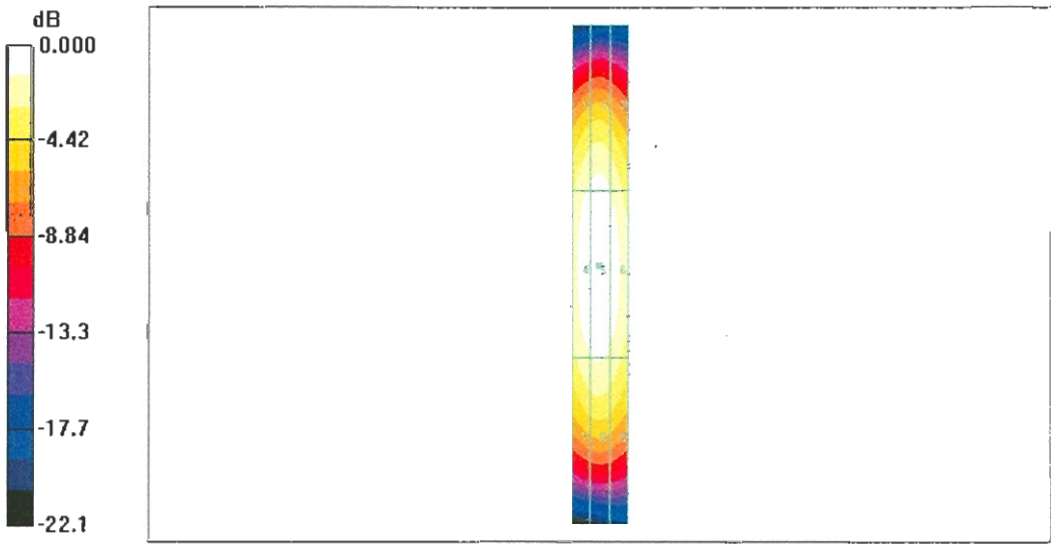

0 dB = 0.452A/m

3.3.3 DASY4 E-Field Result

Date/Time: 2/13/2007 2:25:30 PM

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1004

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: Air

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 12/27/2006
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn660; Calibrated: 3/1/2006
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

E Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 161.7 V/m


Probe Modulation Factor = 1.00

Reference Value = 107.2 V/m; Power Drift = 0.001 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
153.2	158.3	154.4
Grid 4	Grid 5	Grid 6
84.7	85.8	82.6
Grid 7	Grid 8	Grid 9
161.6	161.7	143.5

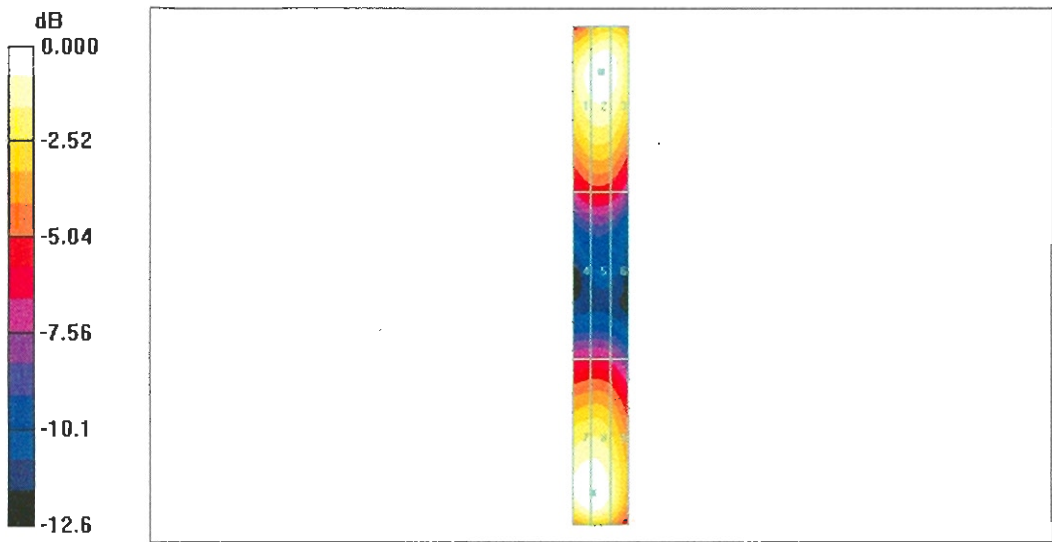

0 dB = 161.7V/m



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Nokia Salo TCC**

Certificate No: **CD1880V3-1003_Feb07**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1003**

Calibration procedure(s) **QA CAL-20.v4
Calibration procedure for dipoles in air**

Calibration date: **February 12, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
DAE4	SN: 660	1-Mar-06 (SPEAG, No. DAE4-660_Mar06)	Calibration, Mar-07
Probe ER3DV6	SN: 2336	27-Dec-06 (SPEAG, No. ER3-2336_Dec06)	Calibration, Dec-07
Probe H3DV6	SN: 6065	27-Dec-06 (SPEAG, No. H3-6065-Dec06)	Calibration, Dec-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-4419B	GB43310788	12-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-07
Power sensor HP 8481A	MY41093312	10-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-08
Power sensor HP 8481A	MY41093315	10-Aug-03 (SPEAG, in house check Oct-06)	In house check: Oct-08
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
RF generator R&S SMT06	SN: 100005	26-Jul-04 (SPEAG, in house check Nov-05)	In house check: Nov-07

Calibrated by:	Name	Function	Signature
	Mike Meili	Laboratory Technician	
Approved by:	Fin Bomholt	Technical Director	

Issued: February 14, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7 B53
DASY PP Version	SEMCAD	V1.8 B172
Phantom	HAC Test Arch	SD HAC P01 BA, #1002
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 90 mm
Frequency	1880 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.05 dB	

2 Maximum Field values

H-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured	100 mW forward power	0.452 A/m

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW forward power	130.9 V/m
Maximum measured above low end	100 mW forward power	126.7 V/m
Averaged maximum above arm	100 mW forward power	128.8 V/m

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

Frequency	Return Loss	Impedance
1710 MHz	19.0 dB	(49.8 + j11.3) Ohm
1880 MHz	19.9 dB	(53.7 + j9.9) Ohm
1900 MHz	19.8 dB	(56.3 + j9.0) Ohm
1950 MHz	23.7 dB	(57.0 – j0.7) Ohm
2000 MHz	26.2 dB	(45.4 + j0.7) Ohm

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3.2 DASY4 H-Field Result

Date/Time: 2/12/2007 4:55:48 PM

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1003

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

DASY4 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 12/27/2006
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn660; Calibrated: 3/1/2006
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

H Scan - Sensor Center 10mm above CD1880V3 Dipole/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.452 A/m


Probe Modulation Factor = 1.00

Reference Value = 0.476 A/m; Power Drift = 0.007 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.392	0.419	0.404
Grid 4	Grid 5	Grid 6
0.425	0.452	0.437
Grid 7	Grid 8	Grid 9
0.378	0.401	0.388

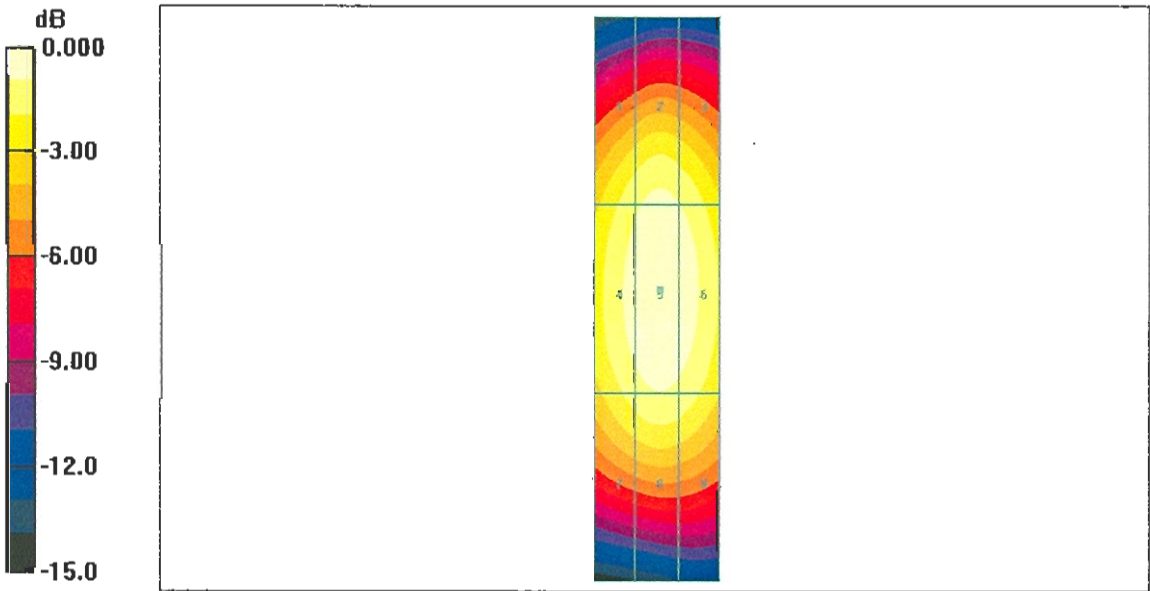

0 dB = 0.452A/m

3.3.3 DASY4 E-Field Result

Date/Time: 2/12/2007 2:59:33 PM

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1003

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 12/27/2006
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn660; Calibrated: 3/1/2006
- Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

E Scan - Sensor Center 10mm above CD1880V3 Dipole/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 130.9 V/m


Probe Modulation Factor = 1.00

Reference Value = 139.0 V/m; Power Drift = 0.015 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
126.8	130.9	127.9
Grid 4	Grid 5	Grid 6
86.2	87.1	84.0
Grid 7	Grid 8	Grid 9
123.9	126.7	121.4

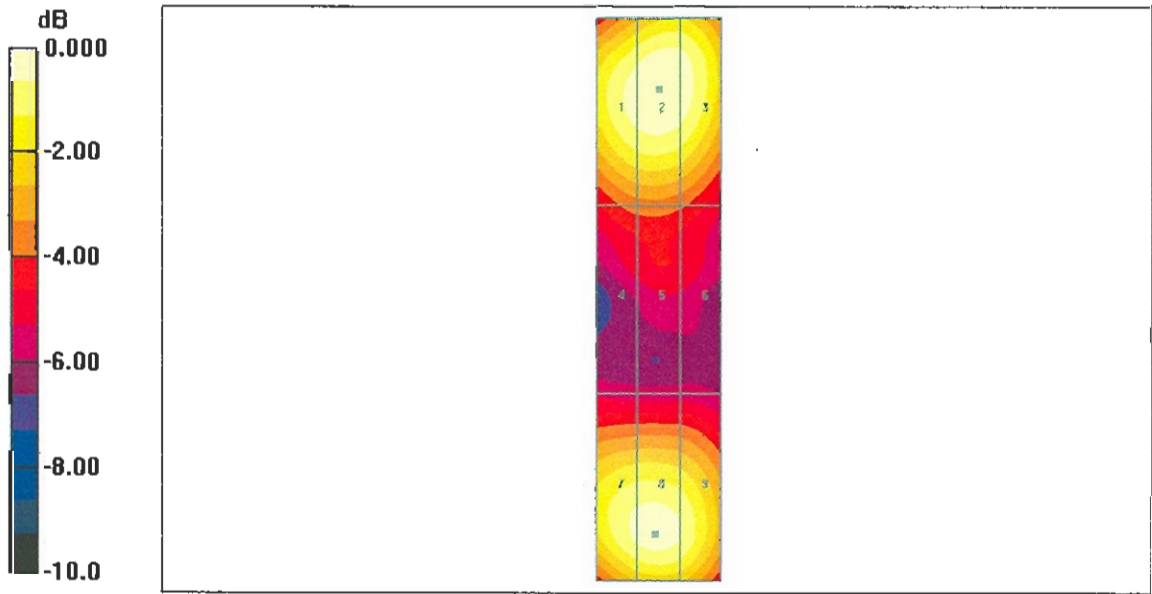

0 dB = 130.9V/m