

HAC T-Coil Signal Test Report

Test report no.:	Salo_HAC_0812_07	Date of report:	2008-03-26
Template version:	3.0	Number of pages:	29
Testing laboratory:	TCC Salo P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Ari Orte	Product contact person:	Victoria Abadilla
Measurements made by:	Ari Orte		
Tested devices:	RM-324 (Hearing aid mode active)		
FCC ID:	QMNRM-324H		
Supplement reports:	Salo_HAC_0812_06 Salo_HAC_0812_08		
Testing has been carried out in accordance with:	ANSI C63.19-2006 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 SUMMARY OF T-COIL TEST RESULTS	3
1.2.1 <i>T-Coil Coupling Field Intensity</i>	3
1.2.2 <i>Frequency Response at Axial Measurement Point</i>	3
1.2.3 <i>Signal Quality</i>	4
1.2.4 <i>Overall HAC rating of the tested device</i>	4
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)	4
3. TEST CONDITIONS	4
3.1 TEMPERATURE AND HUMIDITY.....	4
3.2 WD CONTROL.....	5
3.3 WD PARAMETERS	5
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 <i>Audio Magnetic Probe AM1DV3</i>	7
4.1.2 <i>Audio Magnetic Measurement Instrument AMMI</i>	7
4.1.3 <i>Audio Magnetic Calibration Coil AMCC</i>	7
4.1.4 <i>Device Holder</i>	7
4.2 VERIFICATION OF THE SYSTEM	7
5. DESCRIPTION OF THE TEST PROCEDURE	8
5.1 TEST ARCH AND DEVICE HOLDER	8
5.2 TEST POSITIONS.....	8
5.3 T-COIL SCAN PROCEDURES	9
5.4 MEASUREMENT PROCEDURE AND USED TEST SIGNALS	9
5.5 T-COIL REQUIREMENTS AND CATEGORY LIMITS	9
6. MEASUREMENT UNCERTAINTY	11
7. RESULTS	12
APPENDIX A: MEASUREMENT SCANS	14
APPENDIX B: AUDIO MAGNETIC PROBE AM1DV3 CALIBRATION DOCUMENT	29

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT

1.1 Test Details

Period of test	2008-03-11
SN, HW, SW and DUT numbers of tested device	SN: 004401/01/379288/8, HW: 3100, SW: QS_02.16, DUT: 12605
Batteries used in testing	BP-4L, DUT: 12501, 12502
State of sample	Prototype unit
Notes	AWF = -5 for GSM, 0 for WCDMA

1.2 Summary of T-Coil Test Results

1.2.1 T-Coil Coupling Field Intensity

1.2.1.1 Axial Field Intensity

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-13	-8.5	Pass
WCDMA850	-13	-9.5	Pass
GSM1900	-13	-8.8	Pass
WCDMA1900	-13	-8.1	Pass

1.2.1.2 Radial Field Intensity

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-18	-4.8	Pass
WCDMA850	-18	-3.8	Pass
GSM1900	-18	-3.5	Pass
WCDMA1900	-18	-4.1	Pass

1.2.2 Frequency Response at Axial Measurement Point

Mode	Verdict
GSM850	Pass
WCDMA850	Pass
GSM1900	Pass
WCDMA1900	Pass

1.2.3 Signal Quality

Mode	Minimum limit [dB]				Minimum result [dB]	Category assessment
	T1	T2	T3	T4		
GSM850	-15	-5	5	15	28.1	T4
WCDMA850	-20	-10	0	10	25.3	T4
GSM1900	-15	-5	5	15	30.3	T4
WCDMA1900	-20	-10	0	10	28.4	T4

1.2.4 Overall HAC rating of the tested device

Mode	RF emissions category at T-coil axial measurement point (E- and H-fields)*	Category assessment, T-Coil signal quality	HAC category of the tested device (RF emissions and T-coil requirements combined)
GSM850	M3	T4	M3/T3
WCDMA850	M4	T4	
GSM1900	M3	T4	
WCDMA1900	M4	T4	

*See separate HAC RF report

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850	GMSK	1/8	824 – 849
GSM	1900	GMSK	1/8	1850 – 1910
WCDMA	850		1	826 – 847
WCDMA	1900		1	1852 - 1908

Outside of USA the transmitter of the device is capable of operating also in 900MHz and 1800MHz bands, which are not part of this filing.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	18 to 25
Ambient humidity (RH %):	30 to 70

3.2 WD Control

The transmitter of the device was put into operation by using a call tester. Communications between the device and the call tester were established by air link. Speech coding was processed with EFR speech codec for GSM and with AMR 12.2 kbps for WCDMA.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel.

3.3 WD Parameters


HAC mode was switched on from the WD user interface, volume setting was set to maximum and microphone was muted.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement system and components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.7, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Components and signal paths of used measurement system are pictured below:

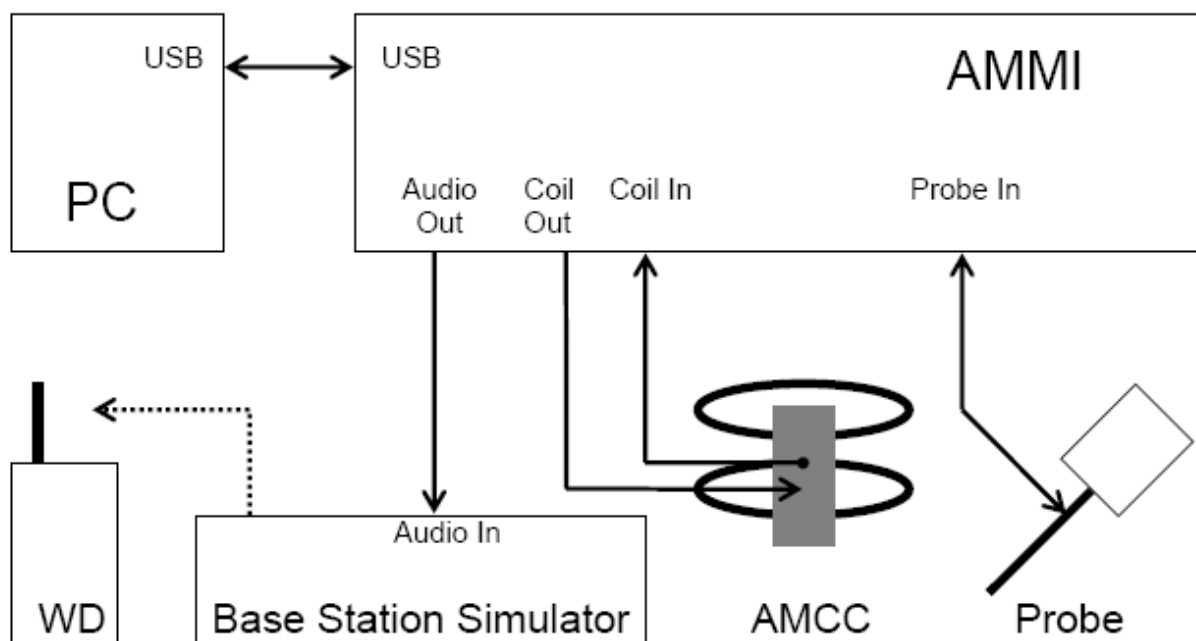

The following table lists calibration dates of measurement equipment:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
R&S CMU200 Radio Communication Test Set	101111	12 months	2008-07
AM1DV3 Audio Magnetic Probe	3036	12 months	2009-01
AMMI Audio Magnetic Measurement Instrument	1002	-	-
AMCC Helmholtz Audio Magnetic Calibration Coil	1004	-	-

4.1.1 Audio Magnetic Probe AM1DV3

Construction	Fully RF shielded metal construction (RF sensitivity < -100dB)
System calibration	Calibrated using Helmholtz coil according to manufacturers instructions
Frequency range	0.1 – 20 kHz (H0X! test signal is limited to required BW of 300 to 3000 Hz, ANSI C63.19)
Sensitivity	< -50 dB A/m
Dimensions	Overall length: 290 mm; Tip diameter: 6 mm

4.1.2 Audio Magnetic Measurement Instrument AMMI

Sampling Rate	48 kHz / 24 bit
Dynamic Range	85 dB
Test Signal Generation	User selectable and predefined (via PC)
System calibration	Auto-calibration / full system calibration using AMCC with monitor output

4.1.3 Audio Magnetic Calibration Coil AMCC

Dimensions	370 x 370 x 196 mm (ANSI-C63.19 compliant)
-------------------	--

4.1.4 Device Holder

The device holder and Test Arch are manufactured by Speag (<http://www.dasy4.com/hac>). Test arch is used for all tests i.e. for both validation testing and device testing. The holder and test arch conforms to the requirements of ANSI C63.19.

The SPEAG device holder (see Section 5.1) was used to position the test device in all tests.

4.2 Verification of the System

Audio Magnetic Probe AM1D is calibrated in AMCC Helmholtz Audio Magnetic Calibration Coil before each measurement procedure using calibration and reference signals.

R&S CMU200 audio codec and SPEAG AMMI audio paths (gain) were calibrated according to manufacturer's instructions.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Arch and Device Holder

The test device was placed in the Device Holder (illustrated below) that is supplied by SPEAG. Using this positioner the tested device is positioned under Test Arch.



Device holder and Test Arch supplied by SPEAG

5.2 Test Positions

The device was positioned such that Device Reference Plane was touching the bottom of the Test Arch. The acoustic output is aligned with the intersection of the Test Arch's middle bar and dielectric wire. The WD is positioned always this way to ensure repeatability of the measurements. Coordinate system depicted below is used to define exact locations of measurement points relative to the center of the acoustic output.



Photo of the device positioned under Test Arch and coordinate system (The EUT in picture is generic phone sample and does not represent the actual equipment under test)

5.3 T-coil Scan Procedures

Manufacturer can either define measurement locations for WD categorization or optimum locations can be found using following procedure: First, coarse scans in all measurement orientations, centered at the earpiece, are made to find approximate locations of optimum signal. More accurate fine scans are made in these locations to find final measurement points.

5.4 Measurement procedure and used test signals

During measurements signal is fed to WD via communication tester. Proper gain setting is used in software to ensure correct signal level fed to communication tester speech input. Measurement software compares fed signal and signal from measurement probe and applies proper filtering and integration procedures.

Broadband voice-like signal (300...3000Hz) is used during scans and frequency response measurement to ensure proper operation of WD vocoder and audio enhancement algorithms.

Both signal (ABM1) and undesired audio noise (ABM2) are measured consequently to enable determination of signal+noise to noise ratio (SNR).

In final measurement sine signal is used to determine signal strength @ 1025 Hz.

5.5 T-coil Requirements and Category Limits

RF Emissions

Wireless device has to fulfill RF emission requirements at the axial measurement location.

Axial Field Intensity

The axial component of the magnetic field shall be $\geq -13\text{dB(A/m)}$ at 1 kHz, in 1/3 octave band filter.

Radial Field Intensity

The radial components of the magnetic field shall be $\geq -18\text{dB(A/m)}$ at 1 kHz, in 1/3 octave band filter.


Signal Quality

The worst result of three T-coil signal measurements is used to define WD Hearing Aid T-category according to the category limits:

Category	T1	T2	T3	T4
Limits for Signal Quality AWF -5 [dB]	-15	-5	5	15
Limits for Signal Quality AWF 0 [dB]	-20	-10	0	10

Frequency Response

Frequency response of the axial component must be between the limits pointed by frequency curves below:

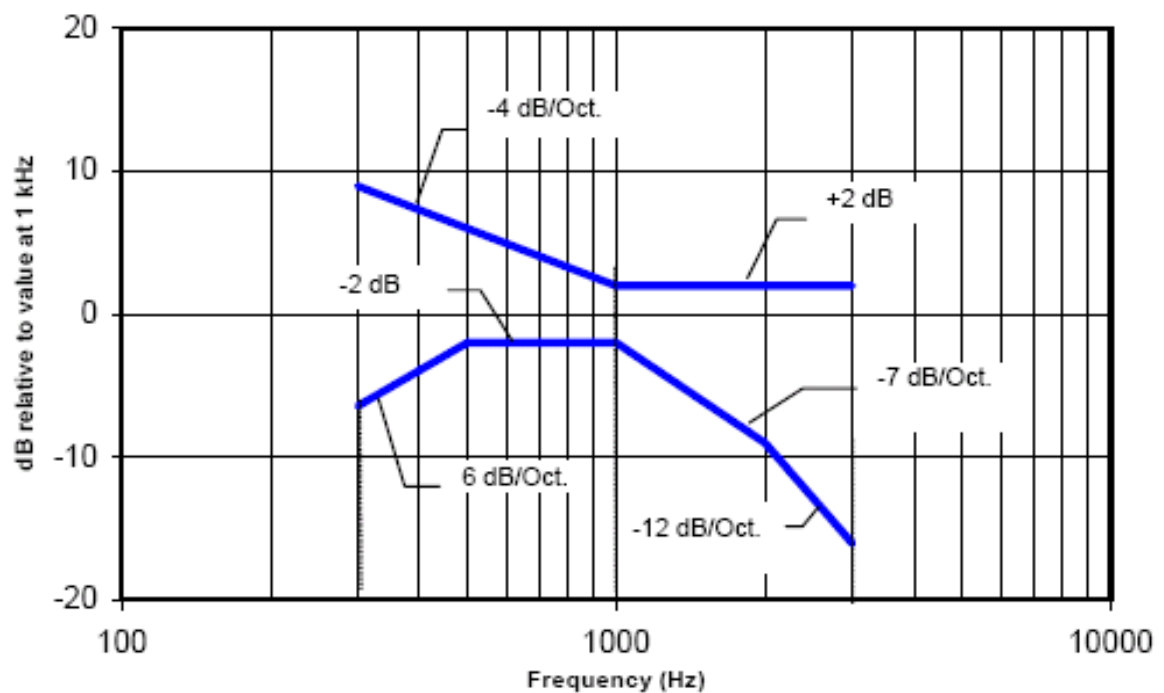

Magnetic field frequency response for devices with a field that exceeds -10dB (A/m) @ 1kHz

6. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Tolerance ±%	Probability Distribution	Div.	c ABM1	c ABM2	Standard Uncertainty ±%, ABM1	Standard Uncertainty ±%, ABM2
PROBE SENSITIVITY							
Reference level	3.0	N	1.0	1	1	3.0	3.0
AMCC geometry	0.4	R	√3	1	1	0.2	0.2
AMCC current	0.6	R	√3	1	1	0.4	0.4
Probe positioning during calibration	0.1	R	√3	1	1	0.1	0.1
Noise contribution	0.7	R	√3	0.0143	1	0.0	0.4
Frequency slope	5.9	R	√3	0.1	1.0	0.3	3.5
PROBE SYSTEM							
Repeatability / Drift	1.0	R	√3	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	√3	1	1	0.4	0.4
Acoustic noise	1.0	R	√3	0.1	1	0.1	0.6
Probe angle	2.3	R	√3	1	1	1.4	1.4
Spectral processing	0.9	R	√3	1	1	0.5	0.5
Integration time	0.6	N	1.0	1	5	0.6	3.0
Field disturbance	0.2	R	√3	1	1	0.1	0.1
TEST SIGNAL							
Reference signal spectral response	0.6	R	√3	0	1	0.0	0.4
POSITIONING							
Probe positioning	1.9	R	√3	1	1	1.1	1.1
Phantom thickness	0.9	R	√3	1	1	0.5	0.5
EUT Positioning	1.9	R	√3	1	1	1.1	1.1
EXTERNAL CONTRIBUTIONS							
RF interference	0.0	R	√3	1	1	0.0	0.0
Test signal variation	2.0	R	√3	1	1	1.2	1.2
COMBINED UNCERTAINTY							
Combined Standard Uncertainty (ABM field)						4.1	6.1
Expanded Standard Uncertainty [%]						8.1	12.3

7. RESULTS

Measurement location coordinates are defined as deviation from earpiece center in millimeters. Coordinate system is defined in chapter 4.2

Axial measurement location was defined by the manufacturer of the device as the center of the earpiece. Maximum values for axial field are listed for informative purposes although results at earpiece center were used in evaluating T-category of the device.

GSM850 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-2.2	-11.6	-8.2	-17.0	-7.4	-9.8	0.0	-3.0
Signal strength [dB A/m]	3.8		-4.8		5.0		-8.5	
ABM2 [dB A/m]	-45.2		-47.1		-41.3		-36.6	
Signal quality [dB]	49.0		42.3		46.3		28.1	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.4		-48.7		-48.1		-48.1	

WCDMA850 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-0.6	-11.4	-7.4	-18.0	-6.8	-11	0.0	-3.0
Signal strength [dB A/m]	4.9		-3.8		6.0		-9.5	
ABM2 [dB A/m]	-49.6		-52.4		-49.5		-34.8	
Signal quality [dB]	54.5		48.6		55.5		25.3	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.4		-48.7		-48.1		-48.1	

GSM1900 results


	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-1.0	-11.0	-8.2	-16.8	-7.0	-11.0	0.0	-3.0
Signal strength [dB A/m]	4.7		-3.5		6.1		-8.8	
ABM2 [dB A/m]	-47.0		-51.9		-46.2		-39.1	
Signal quality [dB]	51.6		48.4		52.3		30.3	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.4		-48.7		-48.1		-48.1	

WCDMA1900 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-0.8	-11.2	-7.0	-17.8	-6.6	-10.6	0.0	-3.0
Signal strength [dB A/m]	4.4		-4.1		5.4		-8.1	
ABM2 [dB A/m]	-49.8		-53.4		-47.4		-36.6	
Signal quality [dB]	54.2		49.3		52.8		28.4	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.4		-48.7		-48.1		-48.1	

Plots of the measurement scans are presented in Appendix A.

APPENDIX A: MEASUREMENT SCANS

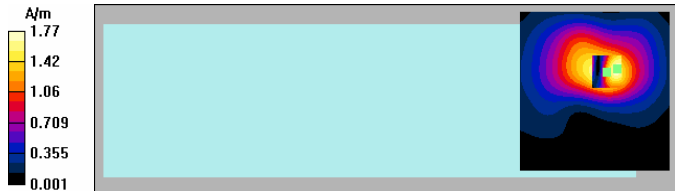
Axial Measurements, GSM850	
Date/Time: 2008-03-11 10:19:32 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM850 Frequency: 836.6 MHz; Duty Cycle: 1:7 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75, Measure Window Start: 0ms, Measure Window Length: 2000ms, BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 4.94 dB A/m BWC Factor = 10.8 dB Location: -4, -9, 363.7 mm Point scan (sinewave signal, z, x, y scan @ max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 4.97 dB A/m, BWC Factor = 0.0059912 dB Location: -7.4, -9.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 46.3 dB ABM1 comp = 4.97 dB A/m, BWC Factor = 0.0059912 dB Location: -7.4, -9.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -41.3 dB A/m, Location: -7.4, -9.8, 363.7 mm	Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75, Measure Window Start: 0ms, Measure Window Length: 2000ms, BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 5.84 dB A/m BWC Factor = 10.8 dB Location: -7.4, -9.8, 363.7 mm Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.00625159 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -8.47 dB A/m, BWC Factor = 0.00625159 dB, Location: 0, -3, 363.7 mm Point scan 1 (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 28.1 dB ABM1 comp = -8.47 dB A/m, BWC Factor = 0.00625159 dB, Location: 0, -3, 363.7 mm Point scan 1 (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -36.6 dB A/m, Location: 0, -3, 363.7 mm
	
Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.1 dB A/m, Location: 0, 0, 368.7 mm	

Axial Measurements, WCDMA850	
Date/Time: 2008-03-11 14:49:29 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: WCDMA850 Frequency: 835 MHz; Duty Cycle: 1:1 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 4.32 dB A/m, BWC Factor = 10.8 dB Location: -4, -9, 363.7 mm	Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 5.54 dB A/m, BWC Factor = 10.8 dB Location: -6.8, -11, 363.7 mm
Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.006078 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 6.01 dB A/m, BWC Factor = 0.006078 dB Location: -6.8, -11, 363.7 mm	Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.00564399 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -9.47 dB A/m, BWC Factor = 0.00564399 dB Location: 0, -3, 363.7 mm
Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 55.5 dB ABM1 comp = 6.01 dB A/m, BWC Factor = 0.006078 dB Location: -6.8, -11, 363.7 mm	Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 25.3 dB ABM1 comp = -9.47 dB A/m, BWC Factor = 0.00564399 dB Location: 0, -3, 363.7 mm
Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -49.5 dB A/m, Location: -6.8, -11, 363.7 mm	Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -34.8 dB A/m, Location: 0, -3, 363.7 mm
Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.1 dB A/m, Location: 0, 0, 368.7 mm	


Axial Measurements, GSM1900	
Date/Time: 2008-03-11 12:00:16 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM1900 Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0058176 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 6.08 dB A/m BWC Factor = 0.0058176 dB Location: -7, -11, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 52.3 dB ABM1 comp = 6.08 dB A/m BWC Factor = 0.0058176 dB Location: -7, -11, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -46.2 dB A/m Location: -7, -11, 363.7 mm	Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0058176 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -8.81 dB A/m BWC Factor = 0.0058176 dB Location: 0, -3, 363.7 mm Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 30.3 dB ABM1 comp = -8.81 dB A/m BWC Factor = 0.0058176 dB Location: 0, -3, 363.7 mm Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -39.1 dB A/m Location: 0, -3, 363.7 mm
Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.1 dB A/m Location: 0, 0, 368.7 mm	

Axial Measurements, WCDMA1900	
Date/Time: 2008-03-11 13:29:23 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: WCDMA1900 Frequency: 1880 MHz; Duty Cycle: 1:1 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 5.44 dB A/m BWC Factor = 0.0059912 dB Location: -6.6, -10.6, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 52.8 dB ABM1 comp = 5.44 dB A/m BWC Factor = 0.0059912 dB Location: -6.6, -10.6, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -47.4 dB A/m Location: -6.6, -10.6, 363.7 mm	Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -8.10 dB A/m BWC Factor = 0.0059912 dB Location: 0, -3, 363.7 mm Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 28.4 dB ABM1 comp = -8.10 dB A/m BWC Factor = 0.0059912 dB Location: 0, -3, 363.7 mm Point scan (sinewave signal, z scan @ acoustic output)/z (axial) scan at point of ACOUSTIC OUTPUT with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -36.6 dB A/m Location: 0, -3, 363.7 mm
Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.1 dB A/m Location: 0, 0, 368.7 mm	


Frequency response in the point of maximum signal strength (axial)

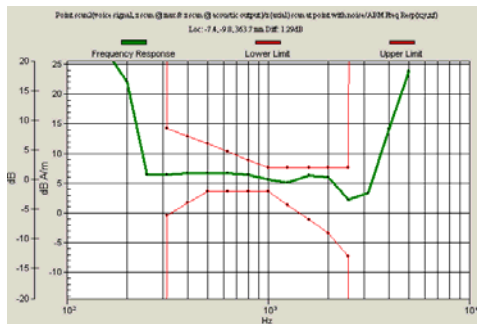


GSM850

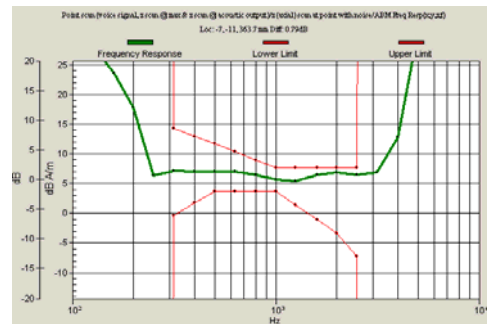

GSM1900

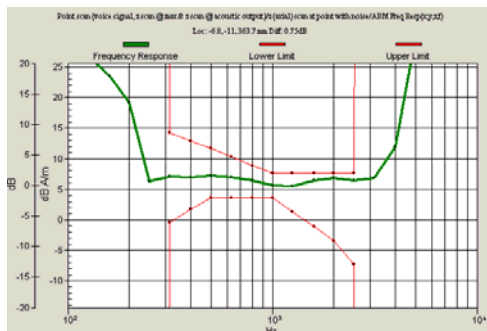


WCDMA850

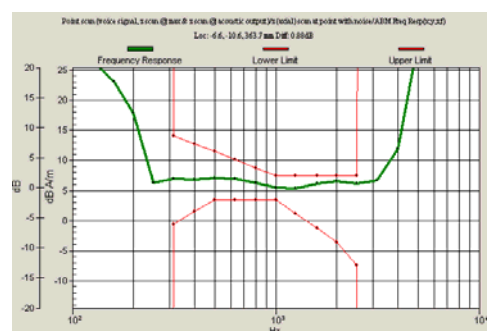


WCDMA1900

Frequency response over earpiece, point 0,-3 (axial)

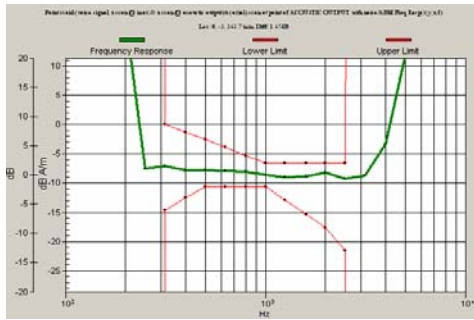

GSM850

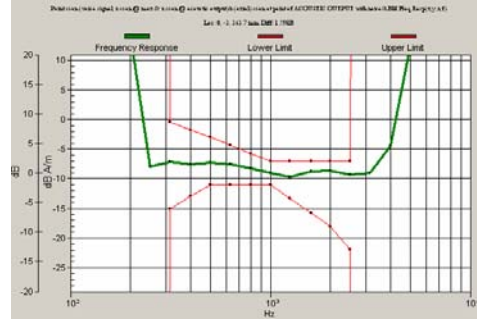


GSM1900



WCDMA850



WCDMA1900

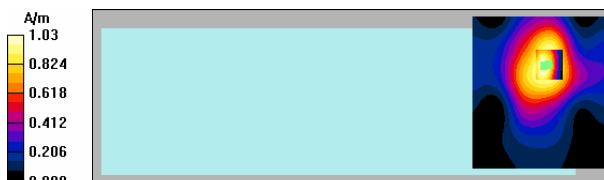Radial1 Measurements, GSM850	
Date/Time: 2008-03-11 10:24:02 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM850 Frequency: 836.6 MHz; Duty Cycle: 1:7 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Coarse scan/x (longitudinal) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms, Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 0.236 dB A/m, BWC Factor = 10.8 dB Location: -4, -12, 363.7	Fine scan/x (longitudinal) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms, Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = 4.48 dB A/m, BWC Factor = 10.8 dB, Location: -2.2, -11.6, 363.7 mm
Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms, Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 3.82 dB A/m, BWC Factor = 0.0059912 dB Location: -2.2, -11.6, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 49.0 dB ABM1 comp = 3.82 dB A/m, BWC Factor = 0.0059912 dB Location: -2.2, -11.6, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -45.2 dB A/m, Location: -2.2, -11.6, 363.7 mm	
	
Background noise 5mm above Grid Reference/x (longitudinal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100 Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -49.4 dB A/m, Location: 0, 0, 368.7 mm	

Radial1 Measurements, WCDMA850

Date/Time: 2008-03-11 14:54:00
Test Laboratory: TCC Nokia
Type: RM-324; Serial: 004401/01/379288/8
Communication System: WCDMA850
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:
- Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2007-03-15
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/x (longitudinal) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 72.75
Measure Window Start: 0ms
Measure Window Length: 2000ms
BWC applied: 10.8 dB
Device Reference Point: 0.000, 0.000, 353.7 mm
ABM1 = -0.652 dB A/m, BWC Factor = 10.8 dB
Location: -3, -12, 363.7 mm

Fine scan/x (longitudinal) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 72.75
Measure Window Start: 0ms
Measure Window Length: 2000ms
BWC applied: 10.8 dB
Device Reference Point: 0.000, 0.000, 353.7 mm
ABM1 = 4.50 dB A/m, BWC Factor = 10.8 dB
Location: -0.6, -11.4, 363.7 mm

Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Signal(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav
Output Gain: 8.53
Measure Window Start: 0ms
Measure Window Length: 10000ms
BWC applied: 0.006078 dB
Device Reference Point: 0.000, 0.000, 353.7 mm
ABM1 comp = 4.93 dB A/m, BWC Factor = 0.006078 dB
Location: -0.6, -11.4, 363.7 mm

Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

ABM1/ABM2 = 54.5 dB
ABM1 comp = 4.93 dB A/m, BWC Factor = 0.006078 dB
Location: -0.6, -11.4, 363.7 mm

Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

ABM2 = -49.6 dB A/m, Location: -0.6, -11.4, 363.7 mm

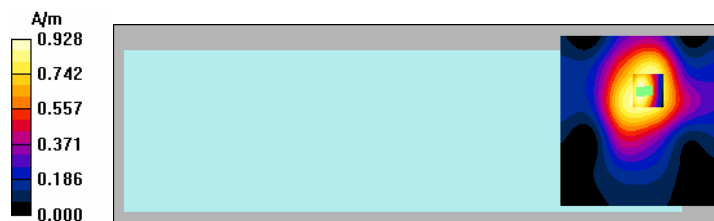

Background noise 5mm above Grid Reference/x (longitudinal) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100,
Measure Window Start: 2000ms, Measure Window Length: 5000ms
Device Reference Point: 0.000, 0.000, 353.7 mm
ABM2 = -49.4 dB A/m, Location: 0, 0, 368.7 mm

Radial1 Measurements, GSM1900	
Date/Time: 2008-03-11 12:04:51 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM1900 Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0058176 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 4.65 dB A/m, BWC Factor = 0.0058176 dB Location: -1, -11, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 51.6 dB ABM1 comp = 4.65 dB A/m, BWC Factor = 0.0058176 dB Location: -1, -11, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -47.0 dB A/m, Location: -1, -11, 363.7 mm	
Background noise 5mm above Grid Reference/x (longitudinal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -49.4 dB A/m, Location: 0, 0, 368.7 mm	

Radial1 Measurements, WCDMA1900	
Date/Time: 2008-03-11 13:33:54 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: WCDMA1900 Frequency: 1880 MHz; Duty Cycle: 1:1 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = 4.40 dB A/m, BWC Factor = 0.0059912 dB Location: -0.8, -11.2, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 54.2 dB ABM1 comp = 4.40 dB A/m, BWC Factor = 0.0059912 dB Location: -0.8, -11.2, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/x (longitudinal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -49.8 dB A/m Location: -0.8, -11.2, 363.7 mm	
Background noise 5mm above Grid Reference/x (longitudinal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -49.4 dB A/m, Location: 0, 0, 368.7 mm	

Radial2 Measurements, GSM850	
Date/Time: 2008-03-11 10:28:38 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM850 Frequency: 836.6 MHz; Duty Cycle: 1:7 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m ³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Coarse scan/y (transversal) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = -4.73 dB A/m, BWC Factor = 10.8 dB Location: -5, -18, 363.7 mm	Fine scan/y (transversal) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = -3.98 dB A/m, BWC Factor = 10.8 dB Location: -8.2, -17, 363.7 mm
Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms, Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -4.81 dB A/m, BWC Factor = 0.0059912 dB Location: -8.2, -17, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 42.3 dB ABM1 comp = -4.81 dB A/m, BWC Factor = 0.0059912 dB Location: -8.2, -17, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -47.1 dB A/m, Location: -8.2, -17, 363.7 mm	
A/m	
Background noise 5mm above Grid Reference/y (transversal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.7 dB A/m, Location: 0, 0, 368.7 mm	

Radial2 Measurements, WCDMA850	
Date/Time: 2008-03-11 14:58:39 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: WCDMA850 Frequency: 835 MHz; Duty Cycle: 1:1 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Coarse scan/y (transversal) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms, Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = -4.77 dB A/m, BWC Factor = 10.8 dB Location: -5, -18, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.006078 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -3.83 dB A/m, BWC Factor = 0.006078 dB Location: -7.4, -18, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 48.6 dB ABM1 comp = -3.83 dB A/m, BWC Factor = 0.006078 dB Location: -7.4, -18, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -52.4 dB A/m, Location: -7.4, -18, 363.7 mm	Fine scan/y (transversal) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 72.75 Measure Window Start: 0ms, Measure Window Length: 2000ms BWC applied: 10.8 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 = -3.95 dB A/m, BWC Factor = 10.8 dB Location: -7.4, -18, 363.7 mm
Background noise 5mm above Grid Reference/y (transversal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100 Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.7 dB A/m, Location: 0, 0, 368.7 mm	

Radial2 Measurements, GSM1900	
Date/Time: 2008-03-11 12:09:27 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: GSM1900 Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max) 2/y (transversal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -3.53 dB A/m, BWC Factor = 0.0059912 dB Location: -8.2, -16.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max) 2/y (transversal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 48.4 dB ABM1 comp = -3.53 dB A/m, BWC Factor = 0.0059912 dB Location: -8.2, -16.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max) 2/y (transversal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -51.9 dB A/m, Location: -8.2, -16.8, 363.7 mm	
Background noise 5mm above Grid Reference/y (transversal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.7 dB A/m, Location: 0, 0, 368.7 mm	

Radial2 Measurements, WCDMA1900	
Date/Time: 2008-03-11 13:38:32 Test Laboratory: TCC Nokia Type: RM-324; Serial: 004401/01/379288/8 Communication System: WCDMA1900 Frequency: 1880 MHz; Duty Cycle: 1:1 Medium: Air; Medium Notes: Not Specified Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³ Phantom section: AMB with Coil Section	DASY4 Configuration: - Probe: AM1DV3 - 3036 - ; Calibrated: 2008-01-23 - Sensor-Surface: 0mm (Fix Surface) - Electronics: DAE4 Sn555; Calibrated: 2007-03-15 - Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1004 - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176
Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Signal(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav Output Gain: 8.53 Measure Window Start: 0ms Measure Window Length: 10000ms BWC applied: 0.0059912 dB Device Reference Point: 0.000, 0.000, 353.7 mm ABM1 comp = -4.05 dB A/m, BWC Factor = 0.0059912 dB Location: -7, -17.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM SNR(x,y,z) (1x1x1): ABM1/ABM2 = 49.3 dB ABM1 comp = -4.05 dB A/m, BWC Factor = 0.0059912 dB Location: -7, -17.8, 363.7 mm Point scan (sinewave signal, z,x,y scan @ max)/y (transversal) scan at point with noise/ABM Noise(x,y,z) (1x1x1): ABM2 = -53.4 dB A/m, Location: -7, -17.8, 363.7 mm	
Background noise 5mm above Grid Reference/y (transversal) noise/ABM Noise(x,y,z) (1x1x1): Measurement grid: dx=10mm, dy=10mm, Signal Type: Off, Output Gain: 100, Measure Window Start: 2000ms, Measure Window Length: 5000ms Device Reference Point: 0.000, 0.000, 353.7 mm ABM2 = -48.7 dB A/m, Location: 0, 0, 368.7 mm	

APPENDIX B: AUDIO MAGNETIC PROBE AM1DV3 CALIBRATION DOCUMENT

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Client

Nokia Salo TCC

Certificate of test and configuration

Item	AM1DV3 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Series No	3036
Manufacturer / Origin	Schmid & Partner Engineering AG, Zürich, Switzerland

Description of the item

The Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric 20dB low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface. The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted 35.3° above the measurement plane, using the connector rotation and Sensor angle stated below. The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in the DASY system, the probe must be operated with the special probe cup provided (larger diameter). Verify that the probe can slide in the probe cup rubber smoothly.

Functional test, configuration data and sensitivity

The probe configuration data were evaluated after a functional test including noise level and RF immunity. Connector rotation, sensor angle and sensitivity are specific for this probe.

DASY configuration data for the probe

Configuration item	Condition	Configuration Data	Dimension
Overall length	mounted on DAE in DASY system	296	mm
Tip diameter	at the cylindrical part	6	mm
Sensor offset	center of sensor, from tip	3	mm
Connector rotation	Evaluated in homogeneous 1 kHz magnetic field generated with AMCC Helmholtz Calibration Coil	-4.1	
Sensor angle		1.03	
Sensitivity	at 1 kHz	0.00732	V / (A/m)

Standards

[1] ANSI-C63.19-2007

Test date 23.1.2008 MM

Issue date 25.1.2008

Signature

M. Meik FB