

HAC T-Coil Signal Test Report

Test report no.:	Salo_HAC_0838_08	Date of report:	2008-11-26
Template version:	3.0	Number of pages:	28
Testing laboratory:	TCC Nokia San Diego Laboratory 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500	Client:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
Responsible test engineer:	Julian Kim	Product contact person:	Victoria Abadilla
Measurements made by:	Julian Kim		
Tested devices:	RM-381 (Hearing aid mode active)		
FCC ID:	QMNRM-381		
Supplement reports:	Salo_HAC_0838_06, Salo_HAC_0838_07		
Testing has been carried out in accordance with:	ANSI C63.19-2007 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 SUMMARY OF T-COIL TEST RESULTS	3
1.2.1 <i>T-Coil Coupling Field Intensity</i>	3
1.2.2 <i>Frequency Response at Axial Measurement Point</i>	3
1.2.3 <i>Signal Quality</i>	4
1.2.4 <i>Overall HAC rating of the tested device</i>	4
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)	4
3. TEST CONDITIONS	4
3.1 TEMPERATURE AND HUMIDITY.....	4
3.2 WD CONTROL.....	5
3.3 WD PARAMETERS.....	5
4. DESCRIPTION OF THE TEST EQUIPMENT	6
4.1 MEASUREMENT SYSTEM AND COMPONENTS	6
4.1.1 <i>Audio Magnetic Probe AM1DV3</i>	7
4.1.2 <i>Audio Magnetic Measurement Instrument AMMI</i>	7
4.1.3 <i>Audio Magnetic Calibration Coil AMCC</i>	7
4.1.4 <i>Device Holder</i>	7
4.2 VERIFICATION OF THE SYSTEM	7
5. DESCRIPTION OF THE TEST PROCEDURE	8
5.1 TEST ARCH AND DEVICE HOLDER	8
5.2 TEST POSITIONS.....	8
5.3 T-COIL SCAN PROCEDURES	9
5.4 MEASUREMENT PROCEDURE AND USED TEST SIGNALS	9
5.5 T-COIL REQUIREMENTS AND CATEGORY LIMITS	9
6. MEASUREMENT UNCERTAINTY.....	11
7. RESULTS	12
APPENDIX A: MEASUREMENT SCANS	14

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT

1.1 Test Details

Period of test	2008-11-20 to 2008-11-24
SN, HW, SW and EUT numbers of tested device	SN: 004401/10/205339/0, HW: S2.5, SW: sy08w11_08w36, DUT: 13077
Batteries used in testing	BP-6MT, DUT: 3030, 3031
State of sample	Prototype unit
Notes	AWF = -5 for GSM, 0 for WCDMA

1.2 Summary of T-Coil Test Results

1.2.1 T-Coil Coupling Field Intensity

1.2.1.1 Axial Field Intensity

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-13	-4.2	Pass
WCDMA850	-13	-6.2	Pass
GSM1900	-13	-1.6	Pass
WCDMA1900	-13	-6.0	Pass

1.2.1.2 Radial Field Intensity

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-18	-7.0	Pass
WCDMA850	-18	-9.0	Pass
GSM1900	-18	-4.8	Pass
WCDMA1900	-18	-9.4	Pass

1.2.2 Frequency Response at Axial Measurement Point

Mode	Verdict
GSM850	Pass
WCDMA850	Pass
GSM1900	Pass
WCDMA1900	Pass

1.2.3 Signal Quality

Mode	Minimum limit [dB]				Minimum result [dB]	Category assessment
	T1	T2	T3	T4		
GSM850	0	10	20	30	37.1	T4
WCDMA850	0	10	20	30	35.4	T4
GSM1900	0	10	20	30	40.1	T4
WCDMA1900	0	10	20	30	36.7	T4

1.2.4 Overall HAC rating of the tested device

Mode	RF emissions category at T-coil axial measurement point (E- and H-fields)*	Category assessment, T-Coil signal quality	HAC category of the tested device (RF emissions and T-coil requirements combined)
GSM850	M3	T4	M3/T3
WCDMA850	M4	T4	
GSM1900	M3	T4	
WCDMA1900	M4	T4	

*See separate HAC RF report

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range [MHz]
GSM	850	GMSK	1/8	824 – 849
GSM	1900	GMSK	1/8	1850 – 1910
WCDMA	850		1	826 – 847
WCDMA	1900		1	1852 - 1908

Outside of USA the transmitter of the device is capable of operating also in 900MHz, 1800MHz and 2100MHz bands, which are not part of this filing.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	21.0 to 23
Ambient humidity (RH %):	30 to 50

3.2 WD Control

The transmitter of the device was put into operation by using a call tester. Communications between the device and the call tester were established by air link. Speech coding was processed with EFR speech codec for GSM and with AMR 12.2 kbps for WCDMA.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel.

3.3 WD Parameters


HAC mode was switched on from the WD user interface, volume setting was set to maximum and microphone was muted.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement system and components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.7, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Components and signal paths of used measurement system are pictured below:

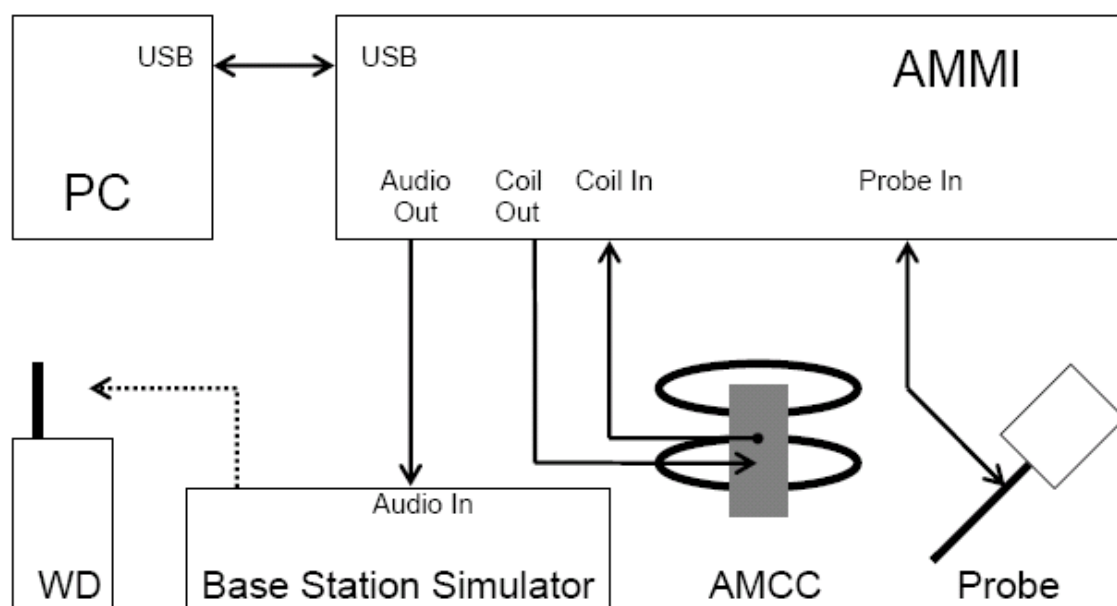

The following table lists calibration dates of measurement equipment:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
R&S CMU200 Radio Communication Test Set	105428	12 months	2009-10
AM1DV3 Audio Magnetic Probe	3036	12 months	2009-01
AMMI Audio Magnetic Measurement Instrument	1004	-	-
AMCC Helmholtz Audio Magnetic Calibration Coil	1001	-	-

4.1.1 Audio Magnetic Probe AM1DV3

Construction	Fully RF shielded metal construction (RF sensitivity < -100dB)
System calibration	Calibrated using Helmholtz coil according to manufacturers instructions
Frequency range	0.1 – 20 kHz (HOX! test signal is limited to required BW of 300 to 3000 Hz, ANSI C63.19)
Sensitivity	< -50 dB A/m
Dimensions	Overall length: 290 mm; Tip diameter: 6 mm

4.1.2 Audio Magnetic Measurement Instrument AMMI

Sampling Rate	48 kHz / 24 bit
Dynamic Range	85 dB
Test Signal Generation	User selectable and predefined (via PC)
System calibration	Auto-calibration / full system calibration using AMCC with monitor output

4.1.3 Audio Magnetic Calibration Coil AMCC

Dimensions	370 x 370 x 196 mm (ANSI-C63.19 compliant)
-------------------	--

4.1.4 Device Holder

The device holder and Test Arch are manufactured by Speag (<http://www.dasy4.com/hac>). Test arch is used for all tests i.e. for both validation testing and device testing. The holder and test arch conforms to the requirements of ANSI C63.19.

The SPEAG device holder (see Section 5.1) was used to position the test device in all tests.

4.2 Verification of the System

Audio Magnetic Probe AM1D is calibrated in AMCC Helmholtz Audio Magnetic Calibration Coil before each measurement procedure using calibration and reference signals.

R&S CMU200 audio codec and SPEAG AMMI audio paths (gain) were calibrated according to manufacturer's instructions.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Arch and Device Holder

The test device was placed in the Device Holder (illustrated below) that is supplied by SPEAG. Using this positioner the tested device is positioned under Test Arch.



Device holder and Test Arch supplied by SPEAG

5.2 Test Positions

The device was positioned such that Device Reference Plane was touching the bottom of the Test Arch. The acoustic output is aligned with the intersection of the Test Arch's middle bar and dielectric wire. The WD is positioned always this way to ensure repeatability of the measurements. Coordinate system depicted below is used to define exact locations of measurement points relative to the center of the acoustic output.

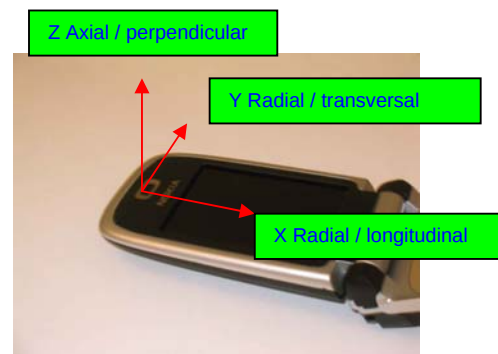


Photo of the device positioned under Test Arch and coordinate system (The EUT in picture is generic phone sample and does not represent the actual equipment under test)

5.3 T-coil Scan Procedures

Manufacturer can either define measurement locations for WD categorization or optimum locations can be found using following procedure: First, coarse scans in all measurement orientations, centered at the earpiece, are made to find approximate locations of optimum signal. More accurate fine scans are made in these locations to find final measurement points.

5.4 Measurement procedure and used test signals

During measurements signal is fed to WD via communication tester. Proper gain setting is used in software to ensure correct signal level fed to communication tester speech input. Measurement software compares fed signal and signal from measurement probe and applies proper filtering and integration procedures.

Broadband voice-like signal (300...3000Hz) is used during scans and frequency response measurement to ensure proper operation of WD vocoder and audio enhancement algorithms.

Both signal (ABM1) and undesired audio noise (ABM2) are measured consequently to enable determination of signal+noise to noise ratio (SNR).

In final measurement sine signal is used to determine signal strength @ 1025 Hz.

5.5 T-coil Requirements and Category Limits

RF Emissions

Wireless device has to fulfill RF emission requirements at the axial measurement location.

Axial and Radial Field Intensity

The radial components of the magnetic field shall be $\geq -18\text{dB(A/m)}$ at 1 kHz, in 1/3 octave band filter.


Signal Quality

The worst result of three T-coil signal measurements is used to define WD Hearing Aid T-category according to the category limits:

Category	T1	T2	T3	T4
Limits for Signal Quality	0	10	20	30

Frequency Response

Frequency response of the axial component must be between the limits pointed by frequency curves below:

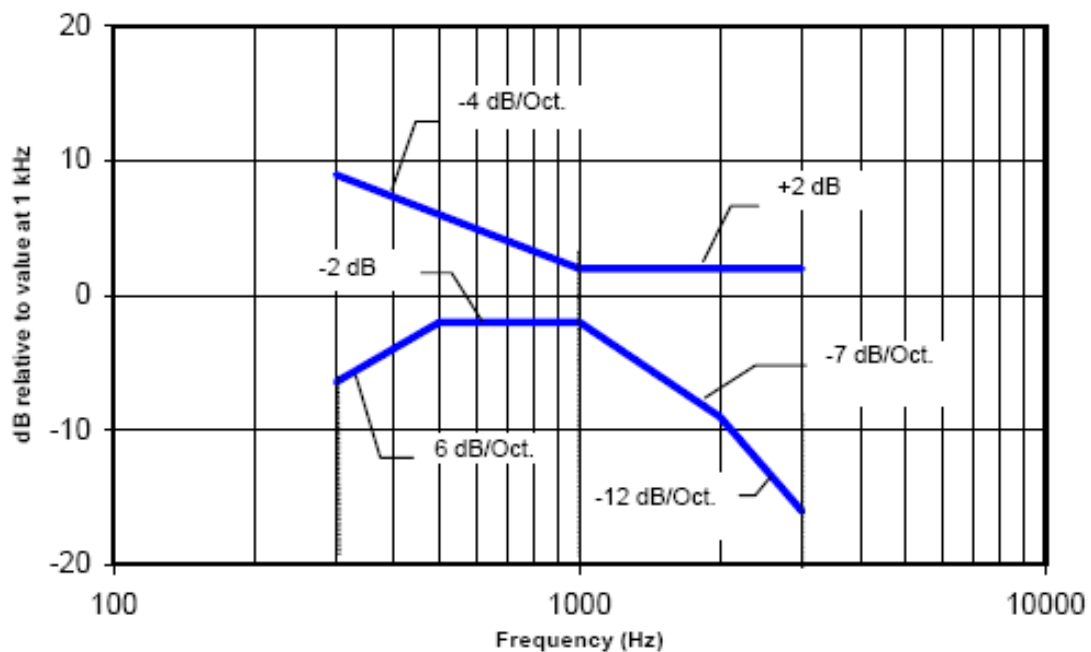

Magnetic field frequency response for devices with a field that exceeds -15dB (A/m) @ 1kHz.

6. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Tolerance ±%	Probability Distribution	Div.	c ABM1	c ABM2	Standard Uncertainty ±%, ABM1	Standard Uncertainty ±%, ABM2
PROBE SENSITIVITY							
Reference level	3.0	N	1.0	1	1	3.0	3.0
AMCC geometry	0.4	R	√3	1	1	0.2	0.2
AMCC current	0.6	R	√3	1	1	0.4	0.4
Probe positioning during calibration	0.1	R	√3	1	1	0.1	0.1
Noise contribution	0.7	R	√3	0.0143	1	0.0	0.4
Frequency slope	5.9	R	√3	0.1	1.0	0.3	3.5
PROBE SYSTEM							
Repeatability / Drift	1.0	R	√3	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	√3	1	1	0.4	0.4
Acoustic noise	1.0	R	√3	0.1	1	0.1	0.6
Probe angle	2.3	R	√3	1	1	1.4	1.4
Spectral processing	0.9	R	√3	1	1	0.5	0.5
Integration time	0.6	N	1.0	1	5	0.6	3.0
Field disturbance	0.2	R	√3	1	1	0.1	0.1
TEST SIGNAL							
Reference signal spectral response	0.6	R	√3	0	1	0.0	0.4
POSITIONING							
Probe positioning	1.9	R	√3	1	1	1.1	1.1
Phantom thickness	0.9	R	√3	1	1	0.5	0.5
EUT Positioning	1.9	R	√3	1	1	1.1	1.1
EXTERNAL CONTRIBUTIONS							
RF interference	0.0	R	√3	1	1	0.0	0.0
Test signal variation	2.0	R	√3	1	1	1.2	1.2
COMBINED UNCERTAINTY							
Combined Standard Uncertainty (ABM field)						4.1	6.1
Expanded Standard Uncertainty [%]						8.1	12.3

7. RESULTS

Measurement location coordinates are defined as deviation from earpiece center in millimeters. Coordinate system is defined in chapter 4.2

Axial measurement location was defined by the manufacturer of the device as the center of the earpiece. Maximum values for axial field are listed for informative purposes although results at earpiece center were used in evaluating T-category of the device.

GSM850 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
Measurement location (x,y) [mm]	x	y	x	y	x	y	x	y
	-4.2	-5.4	1.8	-12.2	1.6	-5.6	0.0	0.0
Signal strength [dB A/m]	-6.9		-7.0		0.7		-4.2	
ABM2 [dB A/m]	-44.0		-44.3		-37.3		-43.4	
Signal quality [dB]	37.1		37.3		37.9		39.1	
Ambient background noise at point (0,0) ABM [dB A/m]	-48.8		-48.7		-48.8		-48.8	

WCDMA850 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
Measurement location (x,y) [mm]	x	y	x	y	x	y	x	y
	-4.4	-5.2	1.4	-12	1.4	-5.6	0.0	0.0
Signal strength [dB A/m]	-9.0		-8.9		-1.3		-6.2	
ABM2 [dB A/m]	-44.4		-46.5		-40.7		-45.4	
Signal quality [dB]	35.4		37.6		39.5		39.2	
Ambient background noise at point (0,0) ABM [dB A/m]	-48.6		-48.7		-48.6		-48.6	

GSM1900 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-5.2	-6.0	1.0	-12.0	1.4	-5.6	0.0	0.0
Signal strength [dB A/m]	-4.8		-4.6		3.3		-1.6	
ABM2 [dB A/m]	-44.9		-45.1		-38.0		-44.6	
Signal quality [dB]	40.1		40.5		41.3		43.0	
Ambient background noise at point (0,0) ABM [dB A/m]	-48.6		-48.6		-48.7		-48.7	

WCDMA1900 results

	Radial 1 (longitudinal)		Radial 2 (transversal)		Axial			
					Max signal		Earpiece	
	x	y	x	y	x	y	x	y
Measurement location (x,y) [mm]	-5.4	-5.6	1.0	-12.4	1.2	-5.4	0.0	0.0
Signal strength [dB A/m]	-9.4		-9.3		-1.6		-6.0	
ABM2 [dB A/m]	-47.1		-46.0		-40.5		-46.5	
Signal quality [dB]	37.8		36.7		38.9		40.5	
Ambient background noise at point (0,0) ABM [dB A/m]	-48.6		-48.6		-48.5		-48.5	

Plots of the measurement scans are presented in Appendix A.

APPENDIX A: MEASUREMENT SCANS

Axial Measurements, GSM850

Date/Time: 2008-11-20 14:35:53

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -1.41 dB A/m

BWC Factor = 10.8 dB

Location: 4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = 0.587 dB A/m

BWC Factor = 10.8 dB

Location: 1.6, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 0.658 dB A/m

BWC Factor = 0.00138963 dB

Location: 1.6, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -37.3 dB A/m

Location: 1.6, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.9 dB

BWC Factor = 0.00138963 dB

Location: 1.6, -5.6, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -4.22 dB A/m

BWC Factor = 0.00138963 dB

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -43.4 dB A/m

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):



Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.1 dB

BWC Factor = 0.00138963 dB

Location: 0, 0, 363.7 mm

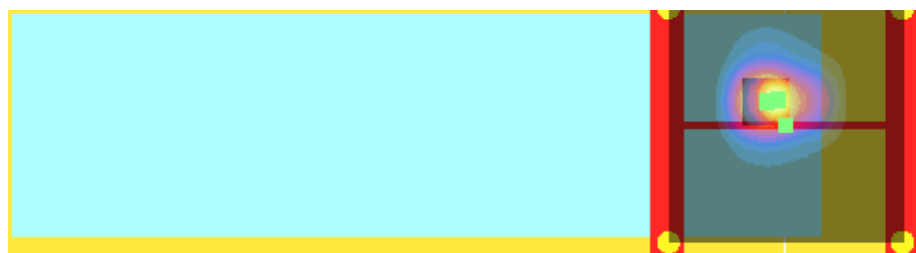

Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.8 dB A/m

Location: 0, 0, 368.7 mm

Axial Measurements, WCDMA850

Date/Time: 2008-11-21 13:54:56

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: WCDMA850

Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -3.54 dB A/m

BWC Factor = 10.8 dB

Location: 4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -1.30 dB A/m

BWC Factor = 10.8 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -1.26 dB A/m

BWC Factor = 0.00104224 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.7 dB A/m

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.5 dB

BWC Factor = 0.00104224 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -6.20 dB A/m

BWC Factor = 0.00104224 dB

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -45.4 dB A/m

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.2 dB

BWC Factor = 0.00104224 dB

Location: 0, 0, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m

Location: 0, 0, 368.7 mm

Axial Measurements, GSM1900

Date/Time: 2008-11-20 10:40:13

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = 0.09 dB A/m

BWC Factor = 10.8 dB

Location: 4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = 2.47 dB A/m

BWC Factor = 10.8 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 3.29 dB A/m

BWC Factor = 0.00112909 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -38.0 dB A/m

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 41.3 dB

BWC Factor = 0.00112909 dB

Location: 1.4, -5.6, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -1.58 dB A/m

BWC Factor = 0.00112909 dB

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -44.6 dB A/m

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.0 dB

BWC Factor = 0.00112909 dB

Location: 0, 0, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.7 dB A/m

Location: 0, 0, 368.7 mm

Axial Measurements, WCDMA1900

Date/Time: 2008-11-24 10:36:15

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -4.47 dB A/m

BWC Factor = 10.8 dB

Location: 3, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM

Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -1.74 dB A/m

BWC Factor = 10.8 dB

Location: 1.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -1.62 dB A/m

BWC Factor = 0.00104224 dB

Location: 1.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.5 dB A/m

Location: 1.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 38.9 dB

BWC Factor = 0.00104224 dB

Location: 1.2, -5.4, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -6.01 dB A/m

BWC Factor = 0.00104224 dB

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -46.5 dB A/m

Location: 0, 0, 363.7 mm

Point scan (sinewave, earpiece)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.5 dB

BWC Factor = 0.00104224 dB

Location: 0, 0, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM2 = -48.5 dB A/m

Location: 0, 0, 368.7 mm

Frequency response in the point of maximum signal strength (axial)

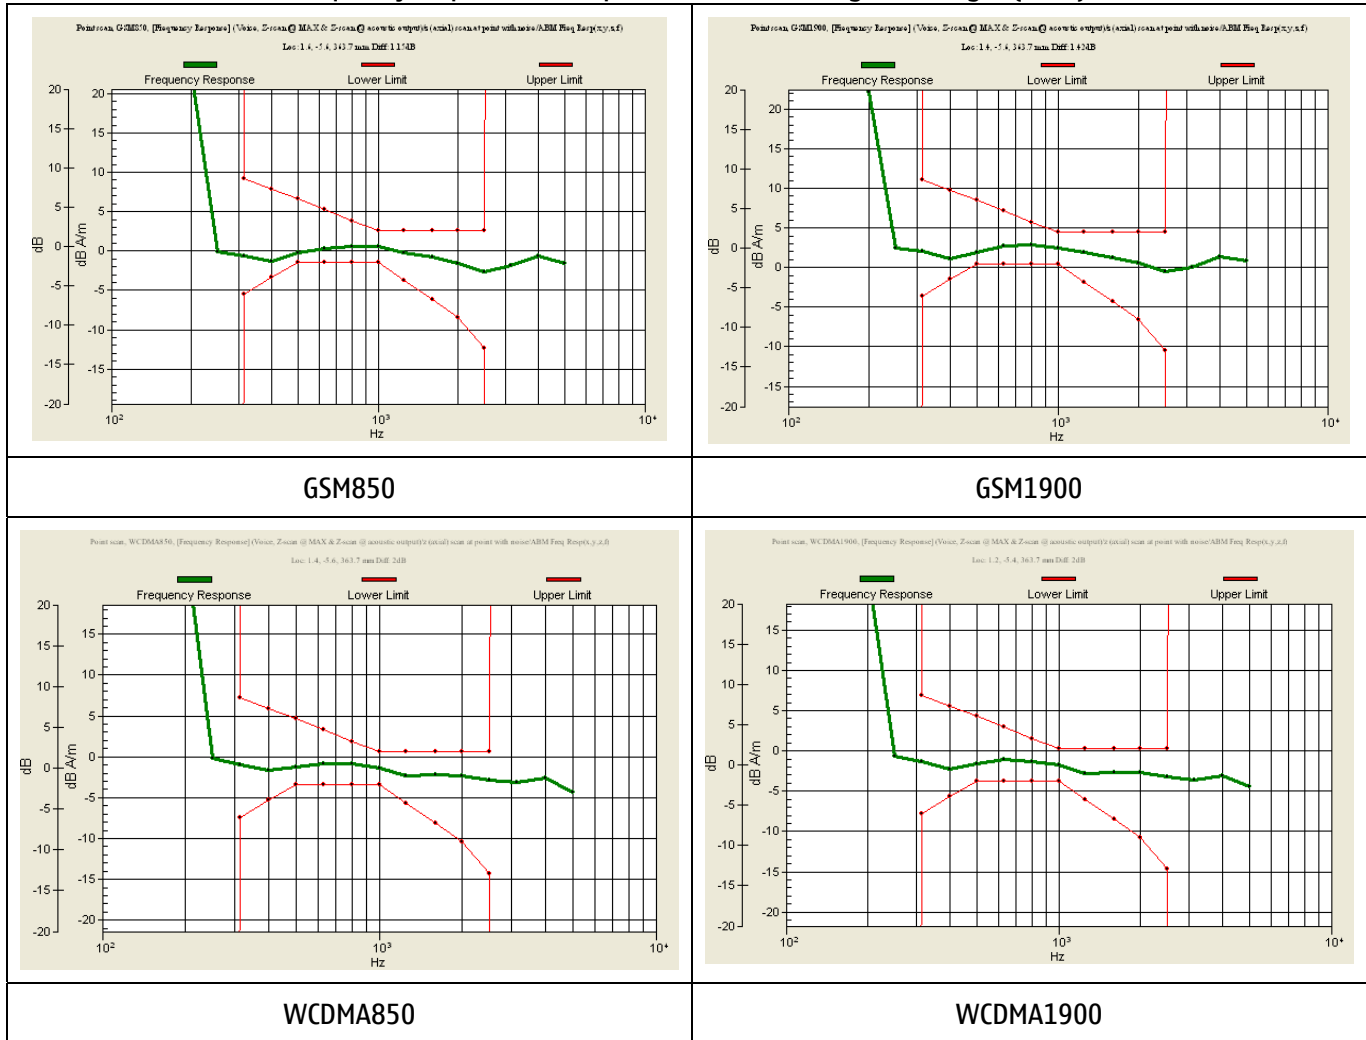

Frequency response over earpiece, point 0,0 (axial)

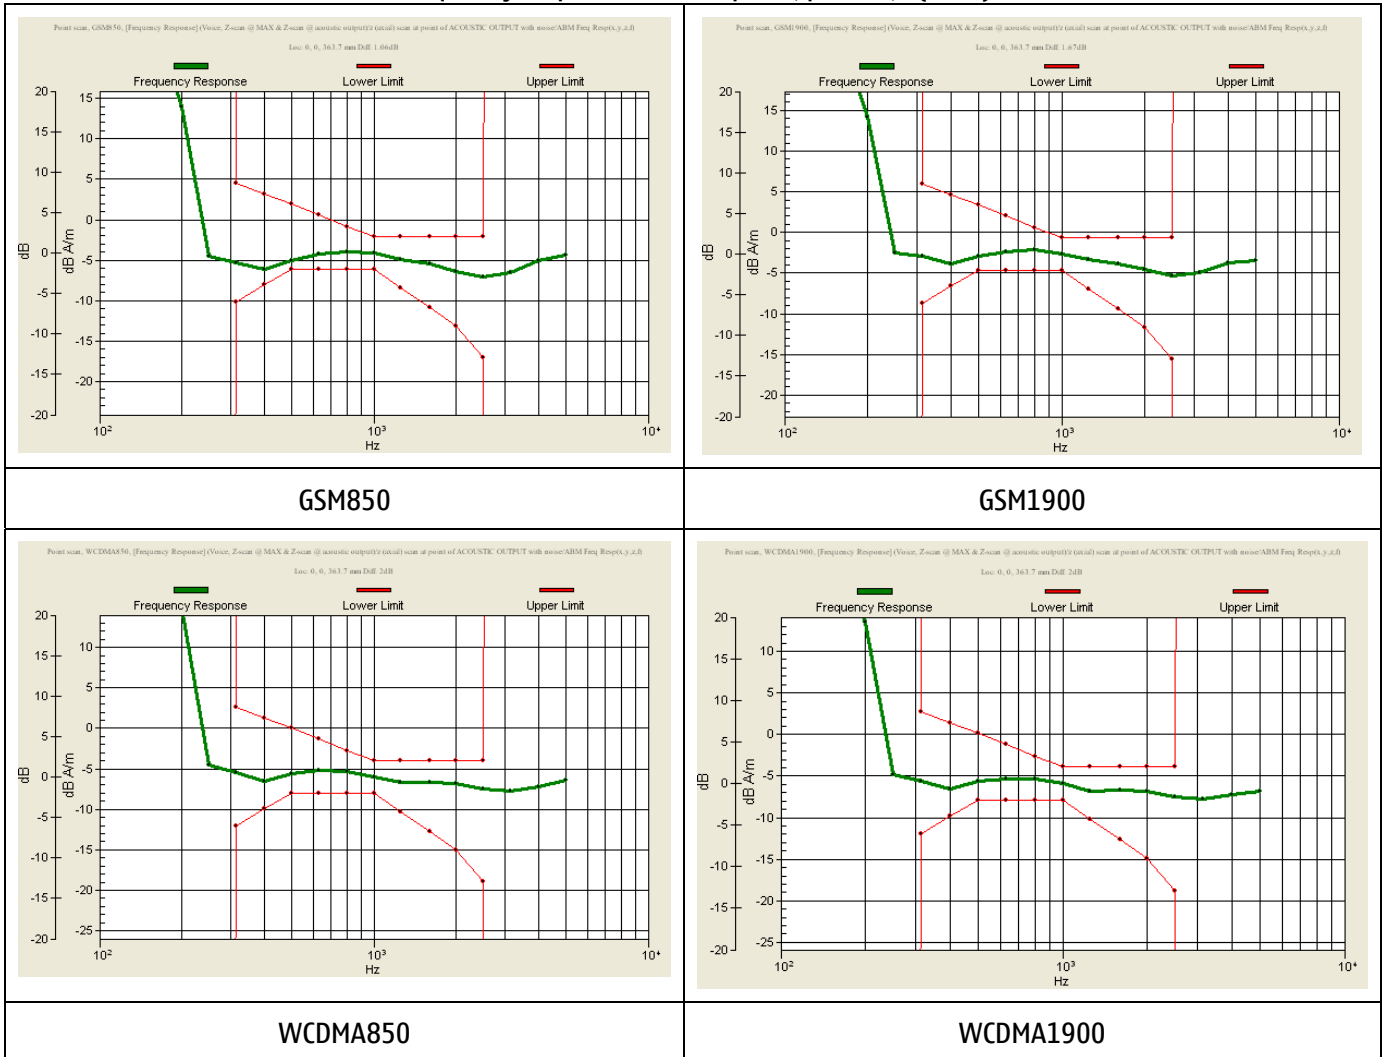

Radial1 Measurements, GSM850

Date/Time: 2008-11-20 14:40:19

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -6.86 dB A/m

BWC Factor = 10.8 dB

Location: -4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -6.98 dB A/m

BWC Factor = 10.8 dB

Location: -4.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -6.89 dB A/m

BWC Factor = 0.00138963 dB

Location: -4.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -44.0 dB A/m

Location: -4.2, -5.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.1 dB

BWC Factor = 0.00138963 dB

Location: -4.2, -5.4, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.8 dB A/m

Location: 0, 0, 368.7 mm

Radial1 Measurements, WCDMA850

Date/Time: 2008-11-21 13:59:21
Test Laboratory: TCC Nokia
Type: RM-381; Serial: 004401/10/205339/0
Communication System: WCDMA850
Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: Air; Medium Notes: Not Specified
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:
- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn858; Calibrated: 2008-06-12
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -8.94 dB A/m
BWC Factor = 10.8 dB
Location: -4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -9.19 dB A/m
BWC Factor = 10.8 dB
Location: -4.4, -5.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -9.03 dB A/m
BWC Factor = 0.00104224 dB
Location: -4.4, -5.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM2 = -44.4 dB A/m
Location: -4.4, -5.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 35.4 dB
BWC Factor = 0.00104224 dB
Location: -4.4, -5.2, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m
Location: 0, 0, 368.7 mm

Radial1 Measurements, GSM1900

Date/Time: 2008-11-20 10:44:38

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -5.05 dB A/m

BWC Factor = 10.8 dB

Location: -4, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -5.59 dB A/m

BWC Factor = 10.8 dB

Location: -5.2, -6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -4.78 dB A/m

BWC Factor = 0.00112909 dB

Location: -5.2, -6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -44.9 dB A/m

Location: -5.2, -6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.1 dB

BWC Factor = 0.00112909 dB

Location: -5.2, -6, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m

Location: 0, 0, 368.7 mm

Radial1 Measurements, WCDMA1900

Date/Time: 2008-11-24 10:40:40

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -9.36 dB A/m

BWC Factor = 10.8 dB

Location: -3, -5, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -9.55 dB A/m

BWC Factor = 10.8 dB

Location: -5.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -9.36 dB A/m

BWC Factor = 0.00104224 dB

Location: -5.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -47.1 dB A/m

Location: -5.4, -5.6, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.8 dB

BWC Factor = 0.00104229 dB

Location: -5.4, -5.6, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m

Location: 0, 0, 368.7 mm

Radial2 Measurements, GSM850

Date/Time: 2008-11-20 14:44:51

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -8.89 dB A/m

BWC Factor = 10.8 dB

Location: 4, 15, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -7.12 dB A/m

BWC Factor = 10.8 dB

Location: 1.8, -12.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -6.97 dB A/m

BWC Factor = 0.00138963 dB

Location: 1.8, -12.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -44.3 dB A/m

Location: 1.8, -12.2, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.3 dB

BWC Factor = 0.00138963 dB

Location: 1.8, -12.2, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.7 dB A/m

Location: 0, 0, 368.7 mm

Radial2 Measurements, WCDMA850

Date/Time: 2008-11-21 14:03:53

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: WCDMA850

Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -11.0 dB A/m

BWC Factor = 10.8 dB

Location: 4, -15, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -8.86 dB A/m

BWC Factor = 10.8 dB

Location: 1.4, -12., 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -8.93 dB A/m

BWC Factor = 0.00104224 dB

Location: 1.4, -12, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -46.5 dB A/m

Location: 1.4, -12, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.6 dB

BWC Factor = 0.00104224 dB

Location: 1.4, -12, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.7 dB A/m

Location: 0, 0, 368.7 mm

Radial2 Measurements, GSM1900

Date/Time: 2008-11-20 10:49:10

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -7.34 dB A/m

BWC Factor = 10.8 dB

Location: 4, -15, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -5.08 dB A/m

BWC Factor = 10.8 dB

Location: 1, -12, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -4.55 dB A/m

BWC Factor = 0.00112909 dB

Location: 1, -12, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -45.1 dB A/m

Location: 1, -12, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.5 dB

BWC Factor = 0.00112909 dB

Location: 1, -12, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m

Location: 0, 0, 368.7 mm

Radial2 Measurements, WCDMA1900

Date/Time: 2008-11-24 10:45:11

Test Laboratory: TCC Nokia

Type: RM-381; Serial: 004401/10/205339/0

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: Not Specified

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV3 - 3036; Calibrated: 2008-01-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn858; Calibrated: 2008-06-12

- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x

- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 176

Coarse scan/z (axial) scan 50 x 50 (grid 10) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -11.7 dB A/m

BWC Factor = 10.8 dB

Location: 3, -15, 363.7 mm

Fine scan/z (axial) scan 10 x 10 (grid 2) with noise/ABM Interpolated Signal(x,y,z) (51x51x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 = -9.45 dB A/m

BWC Factor = 10.8 dB

Location: 1, -12.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = -9.28 dB A/m

BWC Factor = 0.00104224 dB

Location: 1, -12.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -46.0 dB A/m

Location: 1, -12.4, 363.7 mm

Point scan (sinewave, max)/z (axial) scan at point with noise/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.7 dB

BWC Factor = 0.00104224 dB

Location: 1, -12.4, 363.7 mm



Background noise 5mm above Grid Reference/z (axial) noise/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -48.6 dB A/m

Location: 0, 0, 368.7 mm