

Receiver Installation

1) Receiver installation on the operation

Mount the receiver directly on the operator by sliding the receiver tabs under the 3 terminal screws installed on the operator(See Diagram 1)

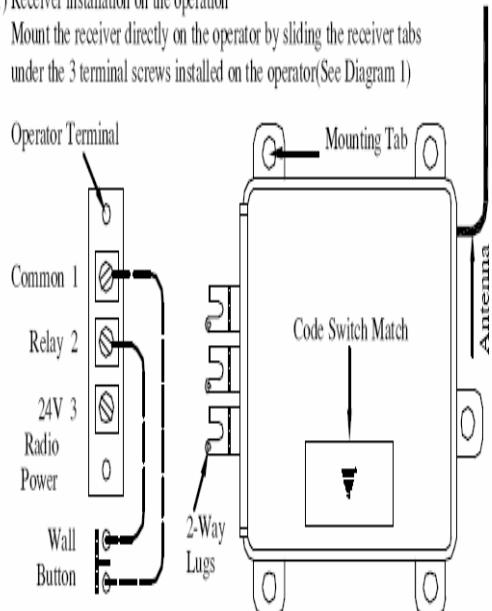


DIAGRAM 1

2) Remote Installation

The receiver may be mounted on the wall or post provided with security box near the operator with connecting between the operator terminal and the two way lugs on the receiver. (See Diagram 2)

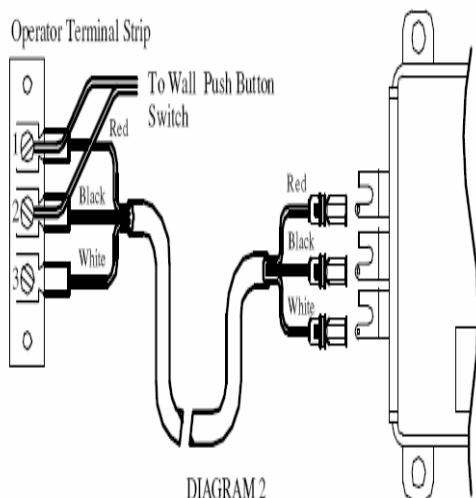



DIAGRAM 2

- (1) Red wire → Terminal #1 or "Common"
- (2) Black wire → Terminal #2 or "Relay"
- (3) White wire → Terminal #3 or "24V Radio Power"
- (4) Connect push button wires to terminal #1 and #2(See Diagram 2)

Where electric power for receiver is not available from the operator, order a power transformer adaptor(24V)

3) Code Setting

Using a small screwdriver, remove the rectangular hatch from the receiver to expose the code switch. Using a sharp object, such as a paper clip, set the new code identical with transmitter by setting the " on and off " switches.




Note : The switches are in the on position when the switch is depressed toward the number. The switches are in the off position when the switch is depressed toward the letter "open" (See Diagram 3)

ACCESS 10 Transmitter

OPERATING INSTRUCTIONS:

Code Setting

1. Determine the 10 digit access code obtained from the previous transmitter or the receiver.
However there are over hundreds of combinations of codes possible for you to choose from.
2. Open the battery compartment cover located on the front side of the Transmitter. Carefully press down on the arrow and separate the cover to expose the circuit board and battery.(See Diagram #1)

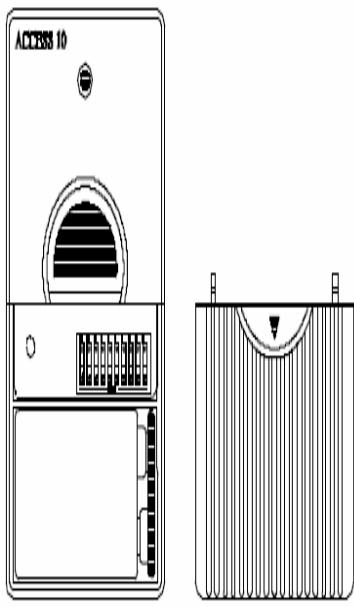


Transmitter with
Batt.Cover Removed

Battery Cover

DIAGRAM #1

3. Using a sharp object or tool, such as a paper clip, set the new transmitter code by setting the "ON" and "OFF" switches according to the exact code setting of your previous transmitter

or the receiver.(Note: The switches are in the "OFF" positions when the switch is pushed toward the letter OPEN.)
(See Diagram #2)

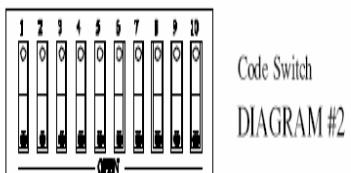

Code Switch
DIAGRAM #2

4. Once the codes have been set, replace the battery cover, and test the system.

Note: In order to avoid duplication of your access code, the following sequences are not recommended.

- Alternating from "ON" and "OFF" or "OFF" and "ON" position.
- Setting the switch on all "ON" or all "OFF" position.
- It is important for the access code to be set exactly in the same order as the receiver for the transmitter to function properly.

Testing the Transmitter

1. Standing approximately 10-30 feet away from the receiver, push the transmitter button to activate.
2. Stand in several different areas of usage to locate possible points where certain structures may interfere with the transmission.

General specification & Features

1. Output Power : -37dBm
2. Output Frequency : 300MHz
3. Power Supply : 9Vdc
4. Operation Indicate LED Lamp

CAUTION: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment

WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

INFORMATION TO USER:

This equipment has been tested and found to comply with the limit of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation; if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient / Relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit difference from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help