

A.6 Radiated Spurious Emission Test Result

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2024-12-07	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	12184.3	35.9	13.2	49.1	74.0	-24.9	Peak	Horizontal
	15693.1	36.9	20.2	57.1	74.0	-16.9	Peak	Horizontal
	15693.1	23.7	20.2	43.9	54.0	-10.1	Average	Horizontal
	17921.8	35.4	24.1	59.5	74.0	-14.5	Peak	Horizontal
	17921.8	23.3	24.1	47.4	54.0	-6.6	Average	Horizontal
	11324.1	34.9	13.5	48.4	74.0	-25.6	Peak	Vertical
	15830.8	37.2	20.2	57.4	74.0	-16.6	Peak	Vertical
	15830.8	23.9	20.2	44.1	54.0	-9.9	Average	Vertical
	17823.2	36.3	23.9	60.2	74.0	-13.8	Peak	Vertical
06	4852.2	37.1	5.6	42.7	74.0	-31.3	Peak	Horizontal
	7635.1	35.8	8.0	43.8	74.0	-30.2	Peak	Horizontal
	11388.7	35.3	13.3	48.6	74.0	-25.4	Peak	Horizontal
	4248.7	40.3	3.9	44.2	74.0	-29.8	Peak	Vertical
	4874.3	37.7	5.7	43.4	74.0	-30.6	Peak	Vertical
	11417.6	36.8	13.0	49.8	74.0	-24.2	Peak	Vertical
11	4893.0	37.5	5.8	43.3	74.0	-30.7	Peak	Horizontal
	7500.8	36.3	7.9	44.2	74.0	-29.8	Peak	Horizontal
	11225.5	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
	4248.7	39.9	3.9	43.8	74.0	-30.2	Peak	Vertical
	8401.8	36.8	8.9	45.7	74.0	-28.3	Peak	Vertical
	12152.0	35.1	13.3	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2024-12-07	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4845.4	37.5	5.6	43.1	74.0	-30.9	Peak	Horizontal
	8354.2	36.1	8.6	44.7	74.0	-29.3	Peak	Horizontal
	11319.0	34.6	13.6	48.2	74.0	-25.8	Peak	Horizontal
	4248.7	41.1	3.9	45.0	74.0	-29.0	Peak	Vertical
	7505.9	35.9	7.9	43.8	74.0	-30.2	Peak	Vertical
	12143.5	35.5	13.2	48.7	74.0	-25.3	Peak	Vertical
06	4869.2	36.8	5.7	42.5	74.0	-31.5	Peak	Horizontal
	7466.8	36.0	7.9	43.9	74.0	-30.1	Peak	Horizontal
	11393.8	35.2	13.3	48.5	74.0	-25.5	Peak	Horizontal
	4248.7	40.3	3.9	44.2	74.0	-29.8	Peak	Vertical
	4898.1	36.8	5.7	42.5	74.0	-31.5	Peak	Vertical
	12213.2	36.0	12.6	48.6	74.0	-25.4	Peak	Vertical
11	4852.2	37.3	5.6	42.9	74.0	-31.1	Peak	Horizontal
	8299.8	36.9	8.5	45.4	74.0	-28.6	Peak	Horizontal
	11317.3	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	4248.7	40.3	3.9	44.2	74.0	-29.8	Peak	Vertical
	7373.3	36.8	8.2	45.0	74.0	-29.0	Peak	Vertical
	11189.8	35.3	13.4	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2024-12-07	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4876.0	37.7	5.7	43.4	74.0	-30.6	Peak	Horizontal
	8355.9	37.0	8.6	45.6	74.0	-28.4	Peak	Horizontal
	11325.8	34.7	13.4	48.1	74.0	-25.9	Peak	Horizontal
	4247.0	40.3	3.9	44.2	74.0	-29.8	Peak	Vertical
	7665.7	36.6	8.4	45.0	74.0	-29.0	Peak	Vertical
	11293.5	34.8	13.5	48.3	74.0	-25.7	Peak	Vertical
06	4199.4	37.6	4.0	41.6	74.0	-32.4	Peak	Horizontal
	4872.6	37.0	5.7	42.7	74.0	-31.3	Peak	Horizontal
	11317.3	34.4	13.6	48.0	74.0	-26.0	Peak	Horizontal
	4248.7	39.8	3.9	43.7	74.0	-30.3	Peak	Vertical
	8405.2	37.5	8.9	46.4	74.0	-27.6	Peak	Vertical
	11203.4	34.8	13.6	48.4	74.0	-25.6	Peak	Vertical
11	4918.5	37.7	5.7	43.4	74.0	-30.6	Peak	Horizontal
	7453.2	35.8	8.0	43.8	74.0	-30.2	Peak	Horizontal
	11541.7	35.5	12.7	48.2	74.0	-25.8	Peak	Horizontal
	4921.9	38.5	5.7	44.2	74.0	-29.8	Peak	Vertical
	7276.4	37.2	8.0	45.2	74.0	-28.8	Peak	Vertical
	11211.9	34.5	13.6	48.1	74.0	-25.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2024-12-07	Test Mode	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4002.2	37.8	3.8	41.6	74.0	-32.4	Peak	Horizontal
	7456.6	36.6	8.0	44.6	74.0	-29.4	Peak	Horizontal
	12240.4	34.7	13.1	47.8	74.0	-26.2	Peak	Horizontal
	4248.7	40.0	3.9	43.9	74.0	-30.1	Peak	Vertical
	8355.9	36.6	8.6	45.2	74.0	-28.8	Peak	Vertical
	11235.7	34.9	13.4	48.3	74.0	-25.7	Peak	Vertical
06	4248.7	39.0	3.9	42.9	74.0	-31.1	Peak	Horizontal
	7296.8	36.1	7.9	44.0	74.0	-30.0	Peak	Horizontal
	11125.2	34.9	13.2	48.1	74.0	-25.9	Peak	Horizontal
	4248.7	39.5	3.9	43.4	74.0	-30.6	Peak	Vertical
	7463.4	36.0	8.0	44.0	74.0	-30.0	Peak	Vertical
	12060.2	35.4	13.2	48.6	74.0	-25.4	Peak	Vertical
09	4870.9	37.2	5.7	42.9	74.0	-31.1	Peak	Horizontal
	7458.3	36.8	8.0	44.8	74.0	-29.2	Peak	Horizontal
	12162.2	35.3	13.2	48.5	74.0	-25.5	Peak	Horizontal
	4248.7	40.2	3.9	44.1	74.0	-29.9	Peak	Vertical
	7636.8	35.7	8.0	43.7	74.0	-30.3	Peak	Vertical
	11398.9	34.6	13.3	47.9	74.0	-26.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	SIP-AC2	Test Date	2025-01-07
Temperature	15.1°C	Humidity	52.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999_25-2000MHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2437MHz		

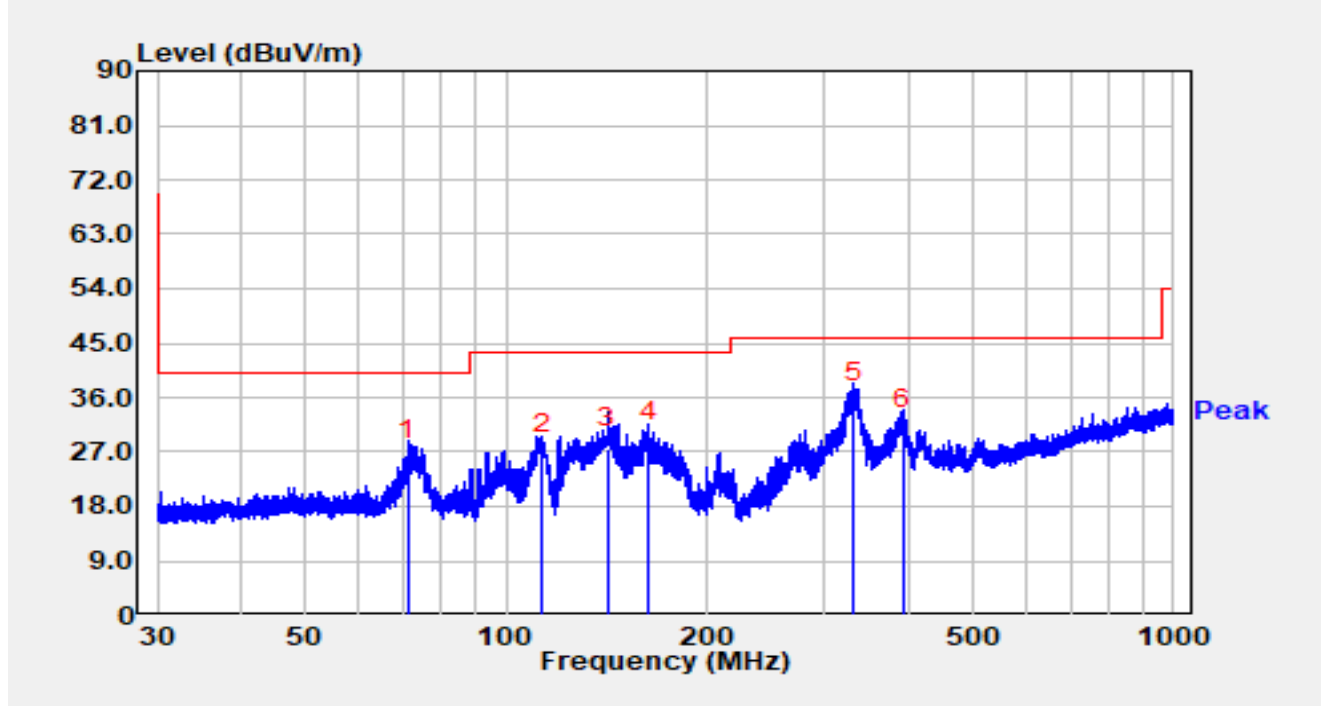


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		71.130	7.80	17.90	25.70	-14.30	40.00	QP
2		113.118	9.20	17.44	26.64	-16.86	43.50	QP
3		142.125	7.50	20.05	27.55	-15.95	43.50	QP
4		163.239	8.40	20.26	28.66	-14.84	43.50	QP
5	*	331.704	13.40	21.83	35.23	-10.77	46.00	QP
6		393.197	7.60	23.26	30.86	-15.14	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC2	Test Date	2025-01-07
Temperature	15.1°C	Humidity	52.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999_25-2000MHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2437MHz		

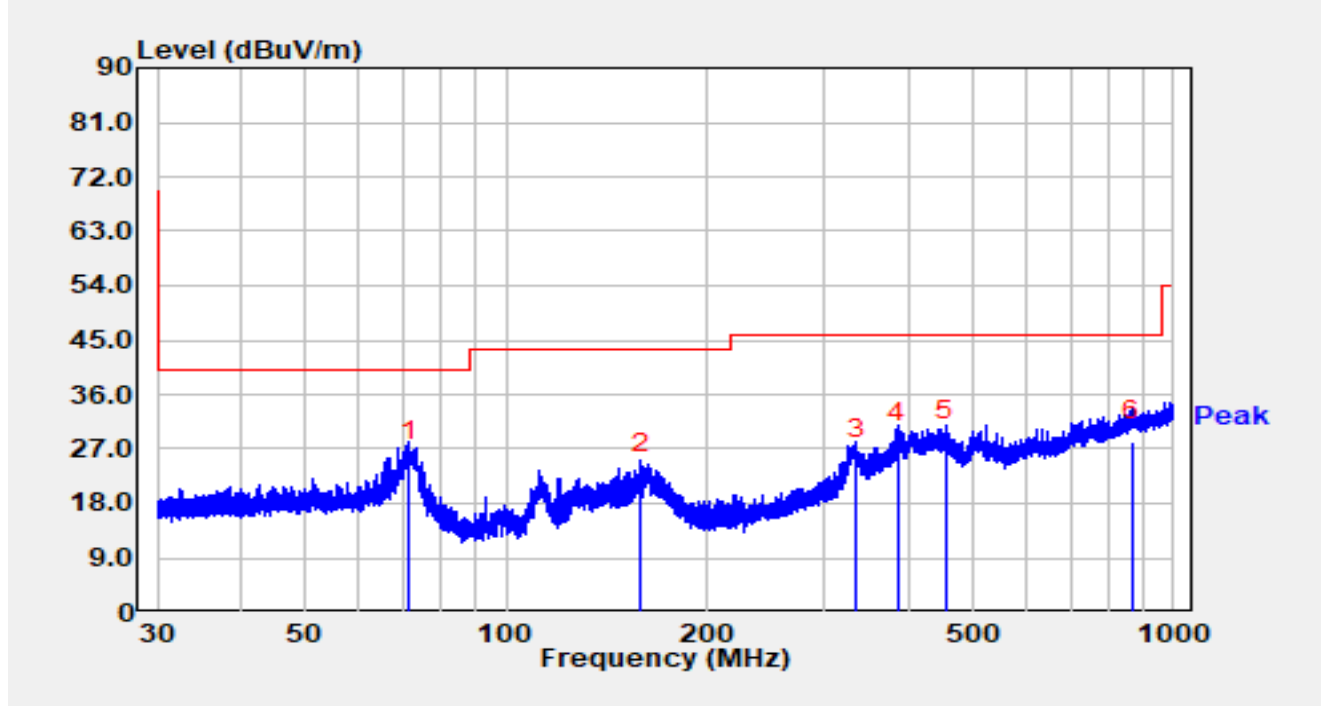


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	71.430	7.20	17.85	25.05	-14.95	40.00	QP
2		158.835	2.50	20.43	22.93	-20.57	43.50	QP
3		335.211	3.40	21.88	25.28	-20.72	46.00	QP
4		386.363	4.80	23.13	27.93	-18.07	46.00	QP
5		455.267	3.30	24.96	28.26	-17.74	46.00	QP
6		867.000	-4.10	32.39	28.29	-17.71	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

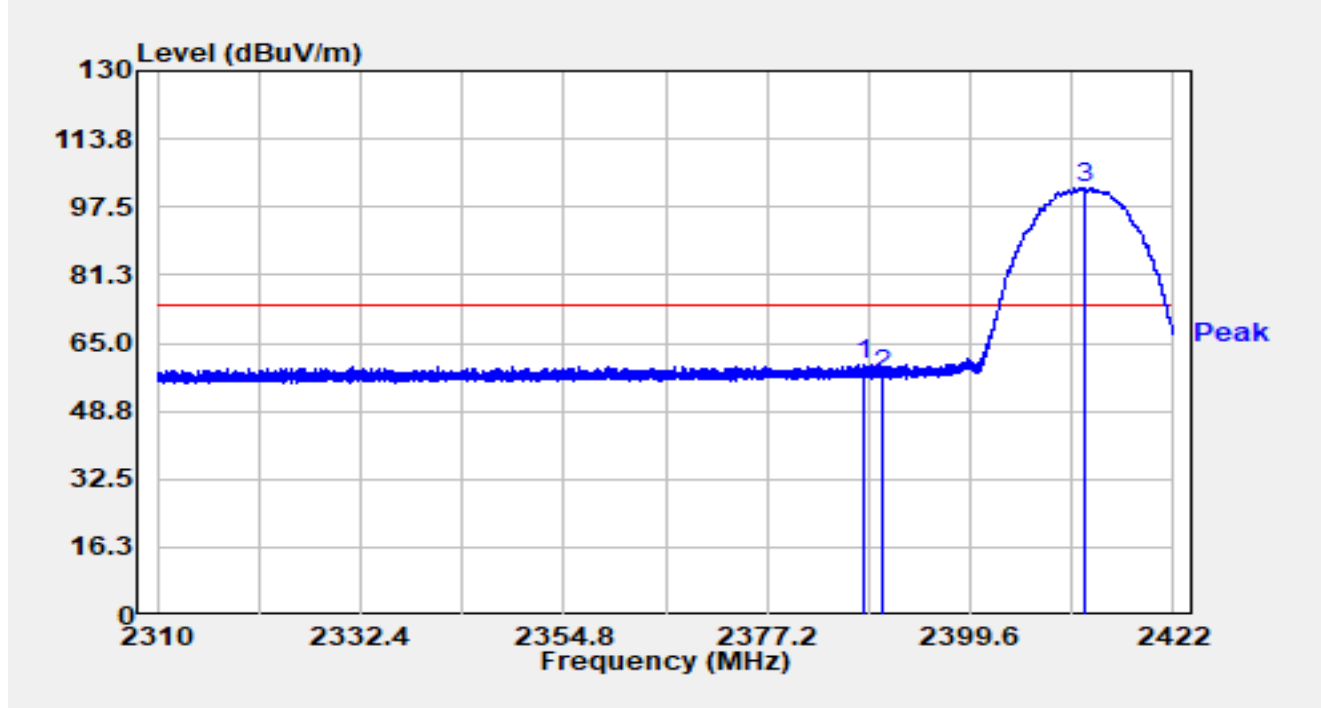


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.784	27.59	32.46	60.05	-13.95	74.00	Peak
2		2390.000	25.05	32.49	57.54	-16.46	74.00	Peak
3		2412.357	69.54	32.42	101.97	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

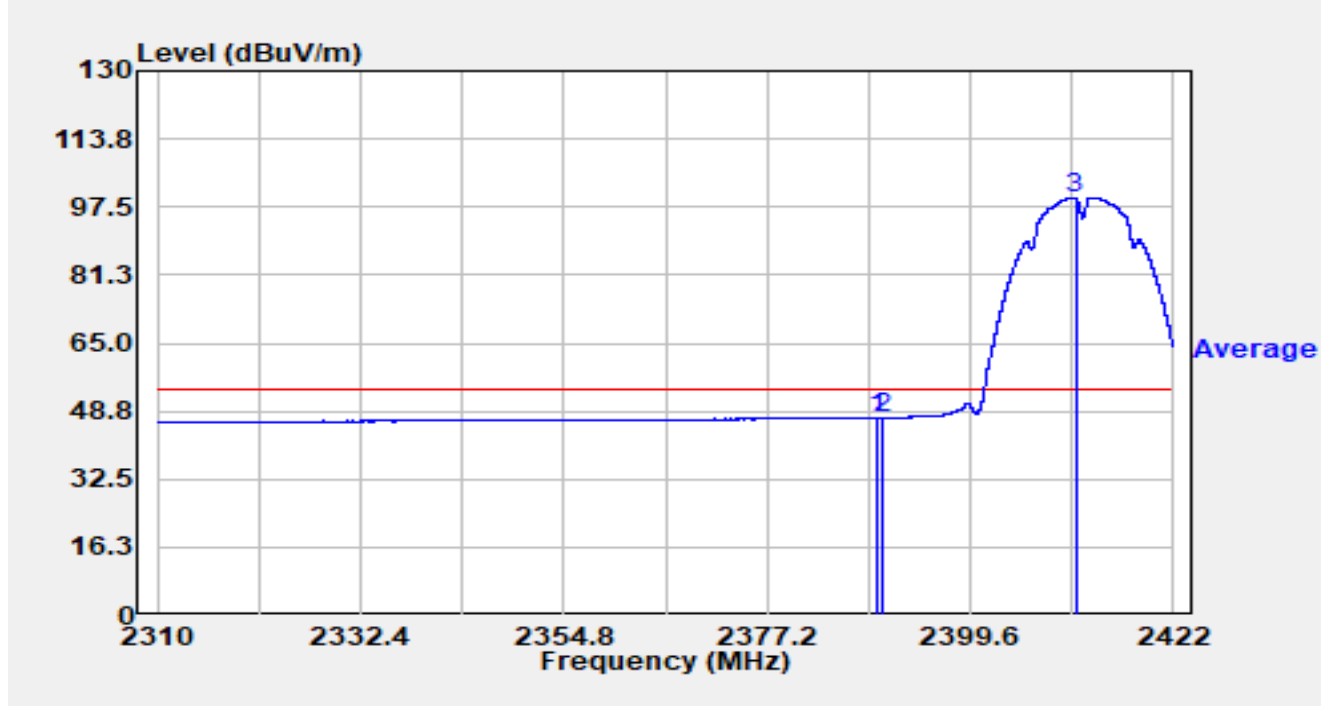


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.408	14.75	32.48	47.23	-6.77	54.00	Average
2		2390.000	14.72	32.49	47.21	-6.79	54.00	Average
3		2411.192	67.30	32.42	99.72	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

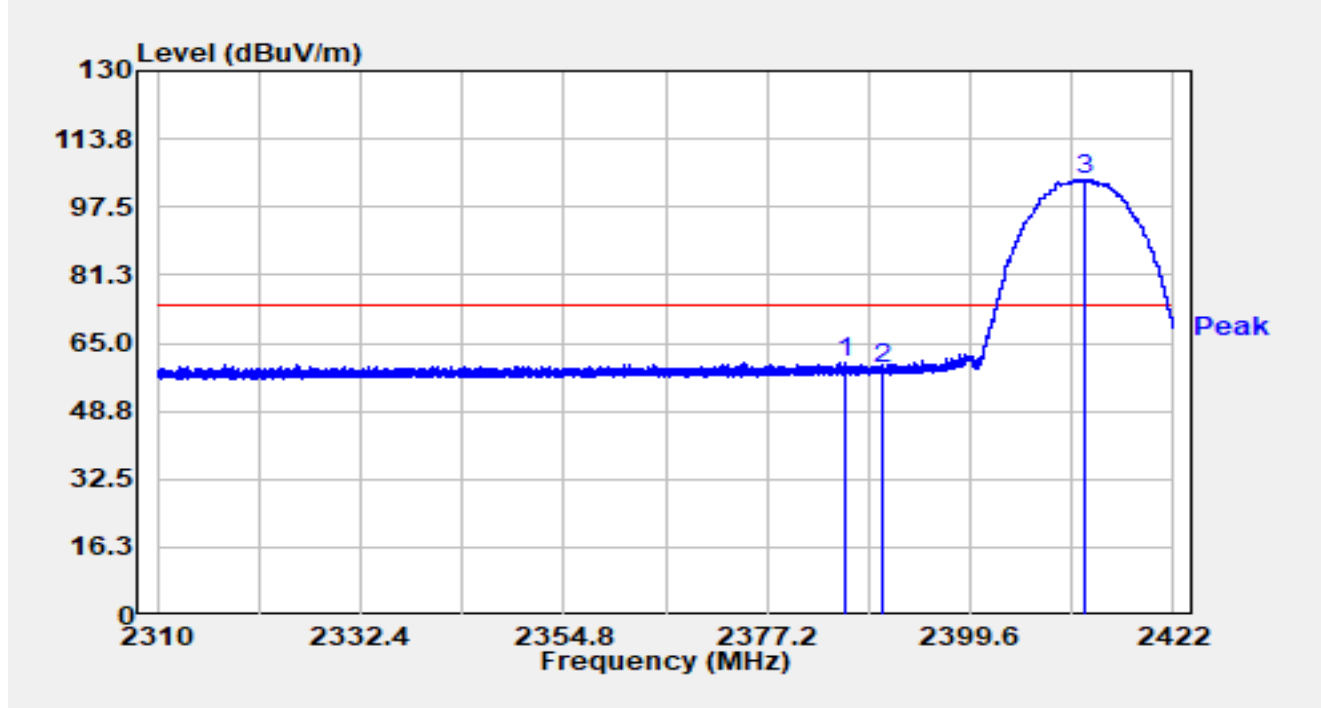


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.835	28.03	32.44	60.48	-13.52	74.00	Peak
2		2390.000	26.30	32.49	58.79	-15.21	74.00	Peak
3		2412.323	71.54	32.42	103.96	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

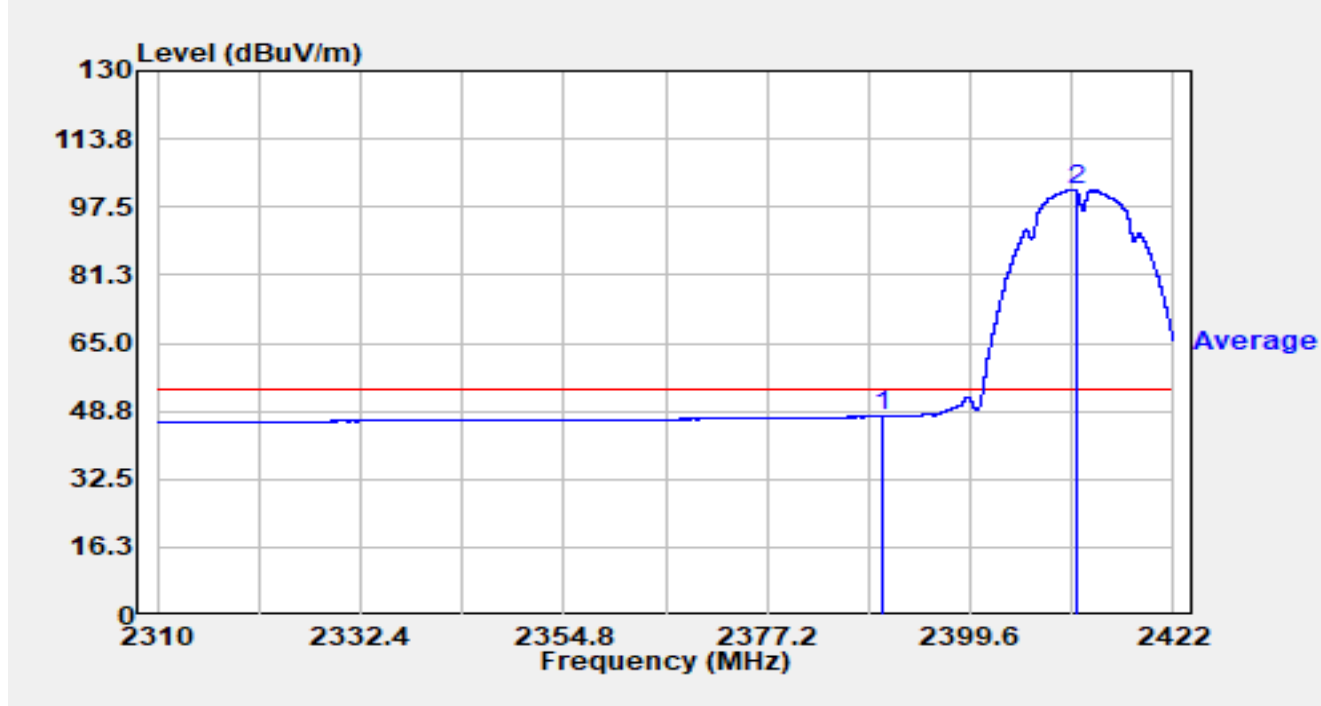


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	14.95	32.49	47.44	-6.56	54.00	Average
2		2411.203	69.26	32.42	101.69	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

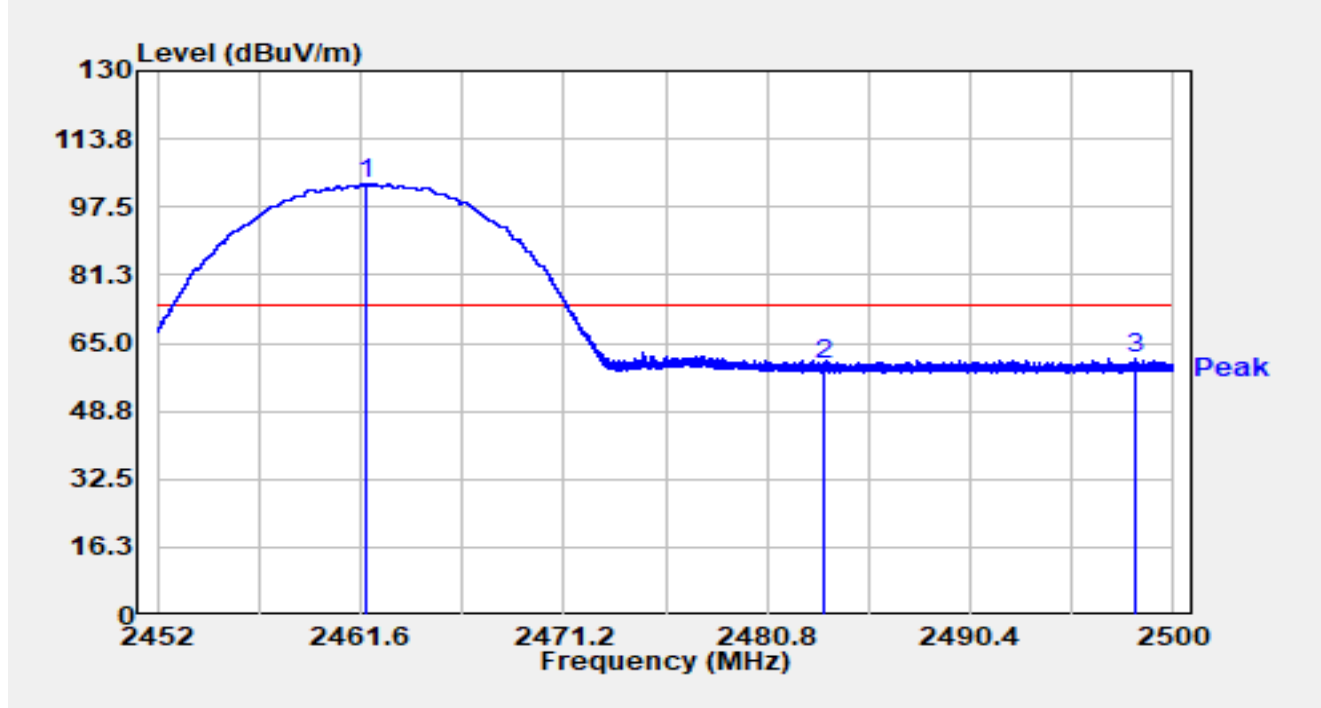


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.893	70.28	32.67	102.96	N/A	N/A	Peak
2		2483.500	27.21	32.82	60.03	-13.97	74.00	Peak
3	*	2498.224	28.56	32.89	61.45	-12.55	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

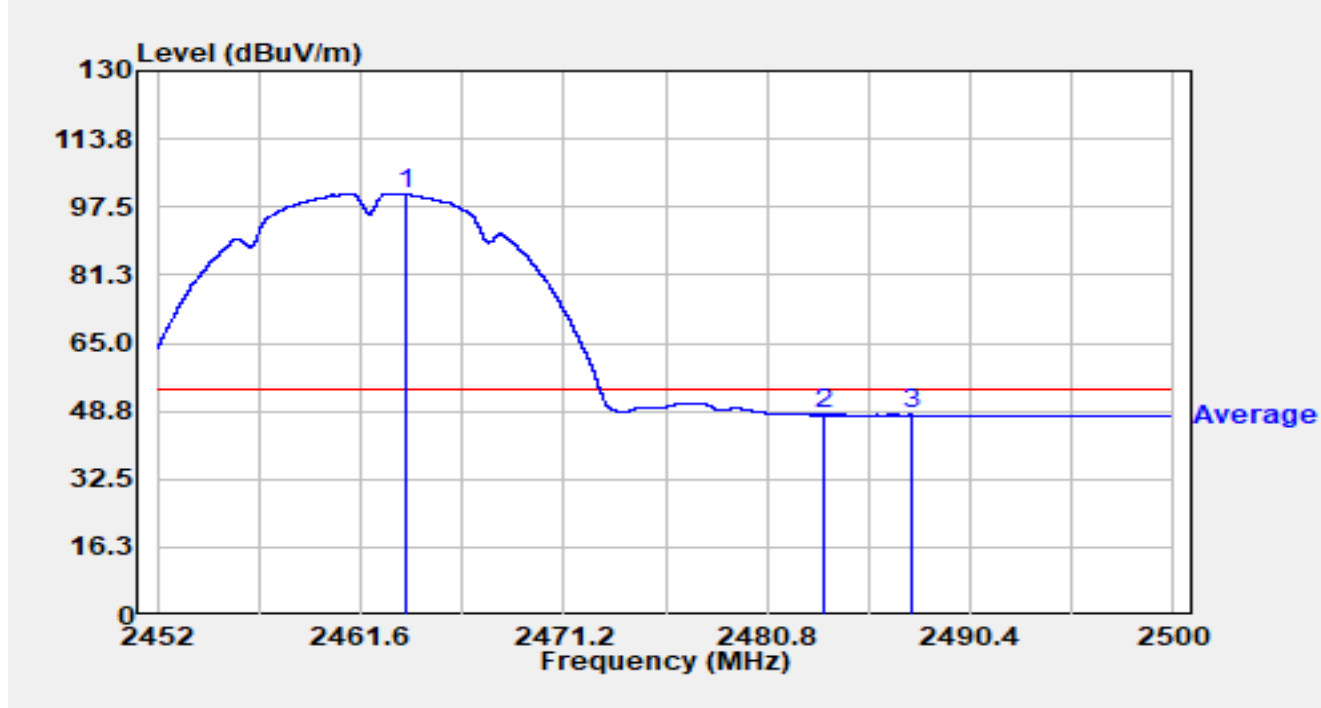


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.707	68.08	32.69	100.77	N/A	N/A	Average
2		2483.500	15.02	32.82	47.84	-6.16	54.00	Average
3	*	2487.616	15.05	32.83	47.88	-6.12	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

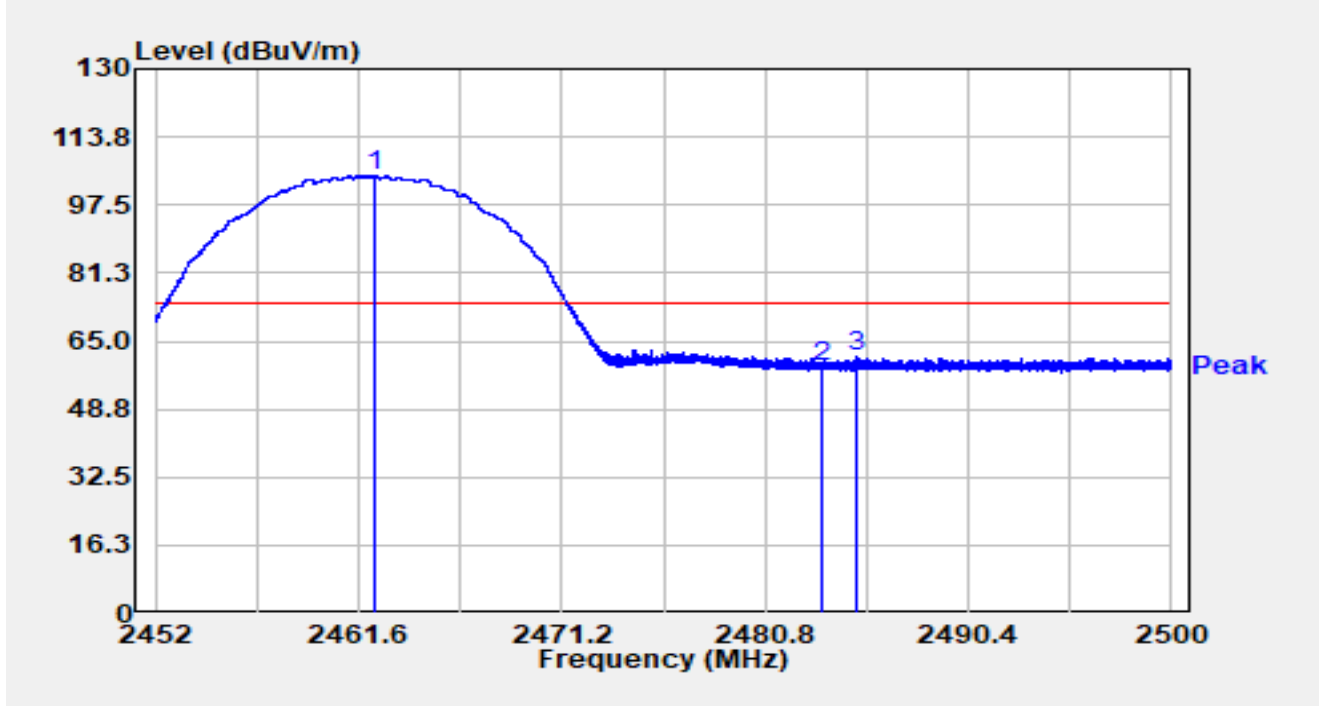


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.320	71.82	32.68	104.50	N/A	N/A	Peak
2		2483.500	25.98	32.82	58.80	-15.20	74.00	Peak
3	*	2485.101	28.29	32.83	61.11	-12.89	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

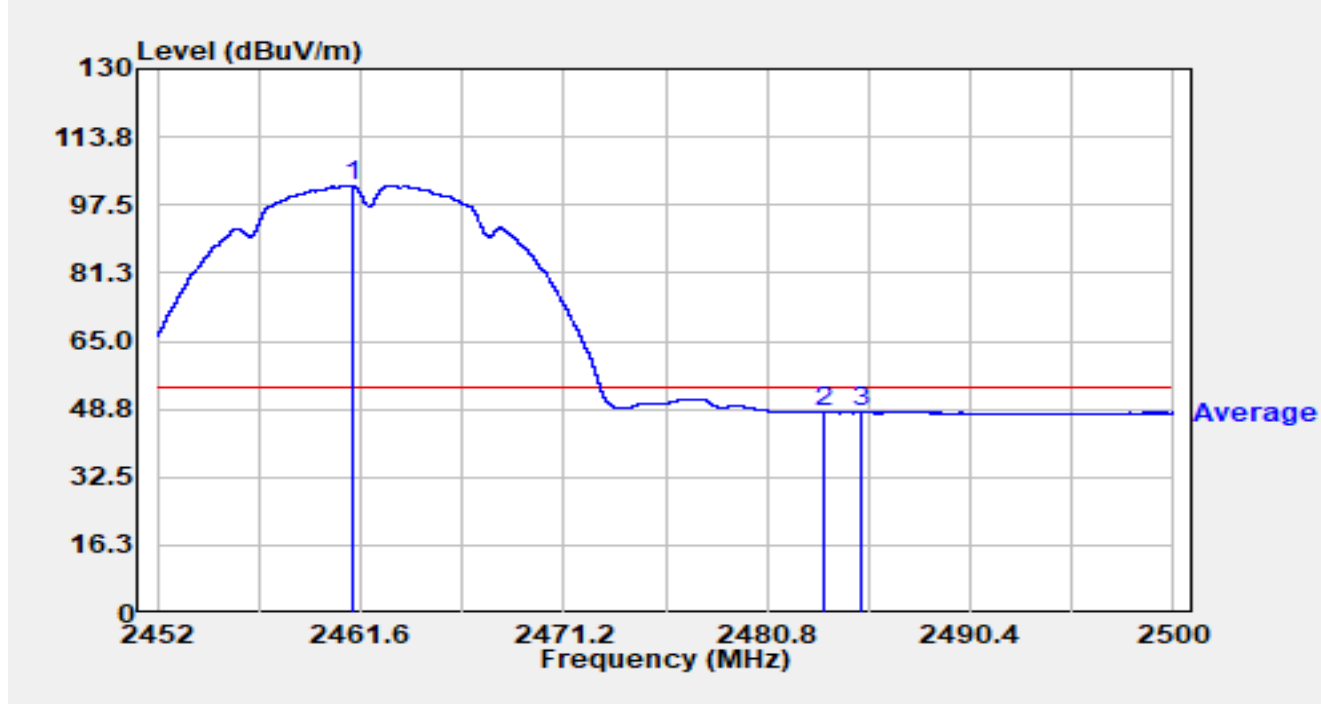


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.182	69.45	32.67	102.12	N/A	N/A	Average
2		2483.500	15.06	32.82	47.88	-6.12	54.00	Average
3	*	2485.269	15.08	32.83	47.91	-6.09	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

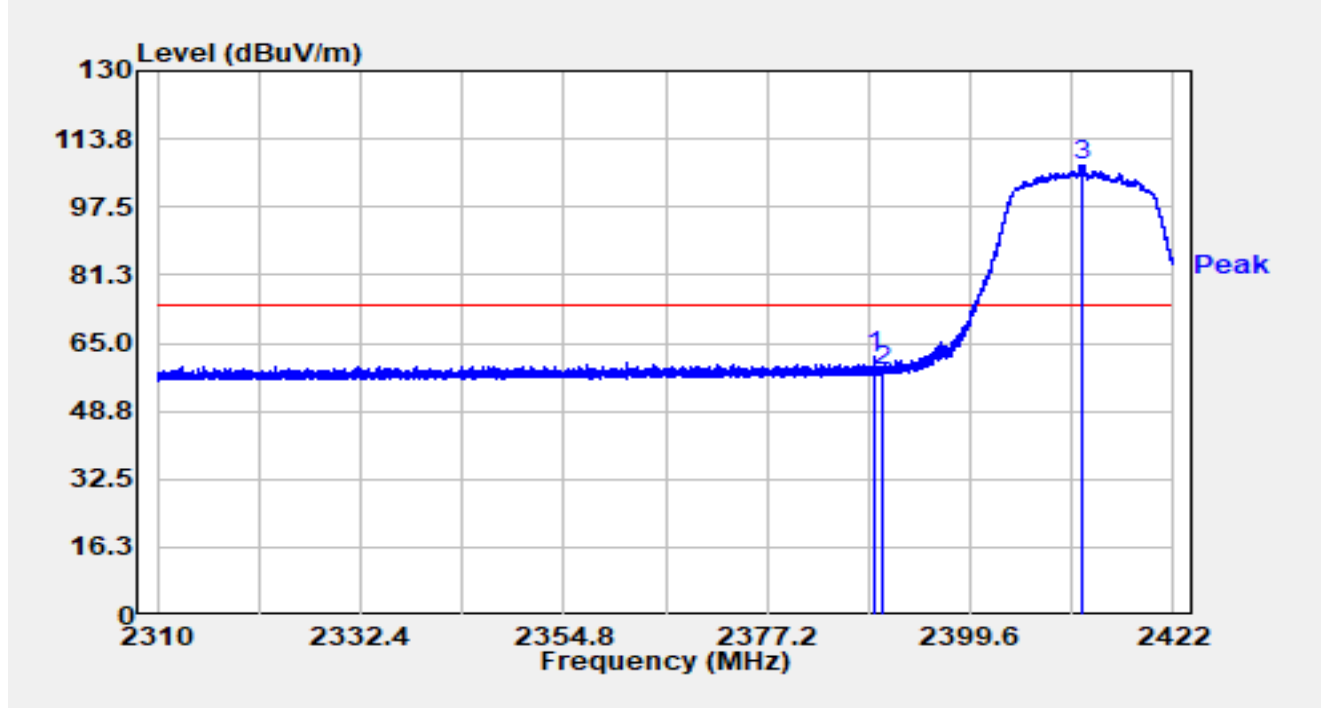


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.083	29.11	32.48	61.59	-12.41	74.00	Peak
2		2390.000	25.70	32.49	58.19	-15.81	74.00	Peak
3		2411.920	75.19	32.42	107.62	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

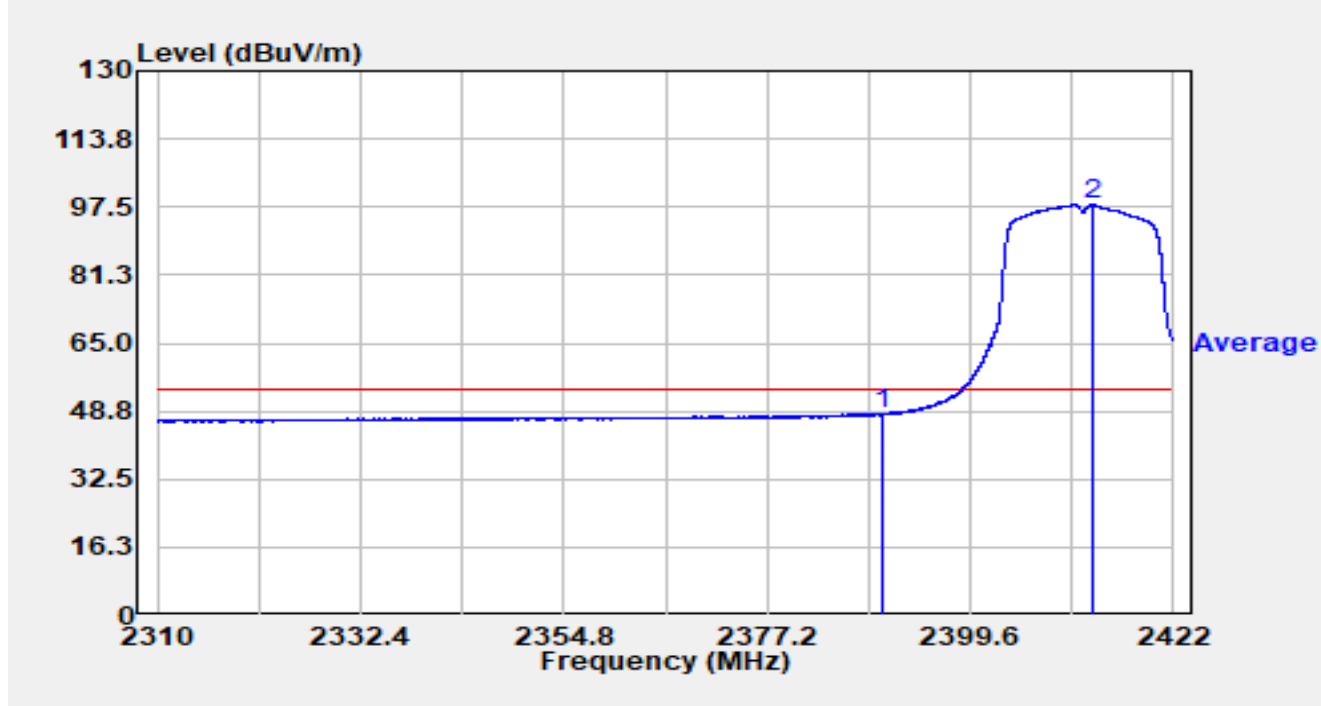


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.62	32.49	48.11	-5.89	54.00	Average
2		2413.018	65.69	32.42	98.12	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

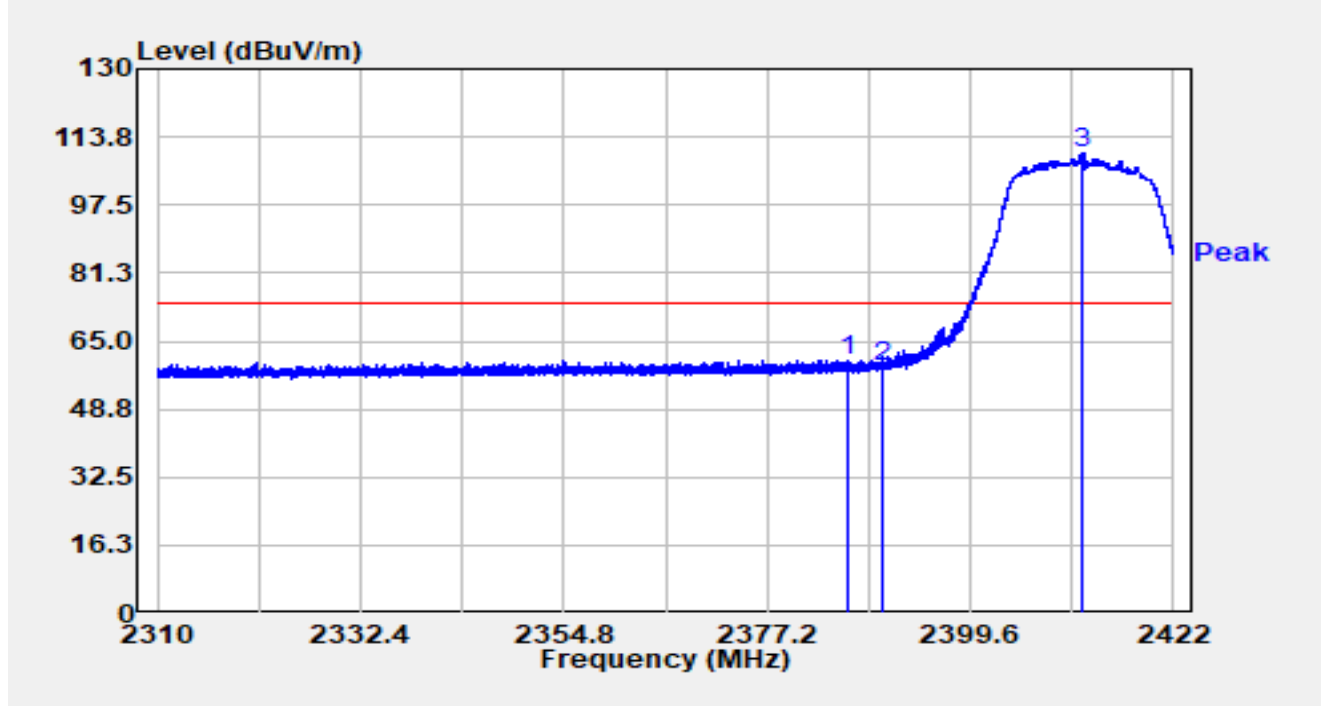


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.003	28.05	32.44	60.49	-13.51	74.00	Peak
2		2390.000	26.21	32.49	58.69	-15.31	74.00	Peak
3		2411.965	77.50	32.42	109.92	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

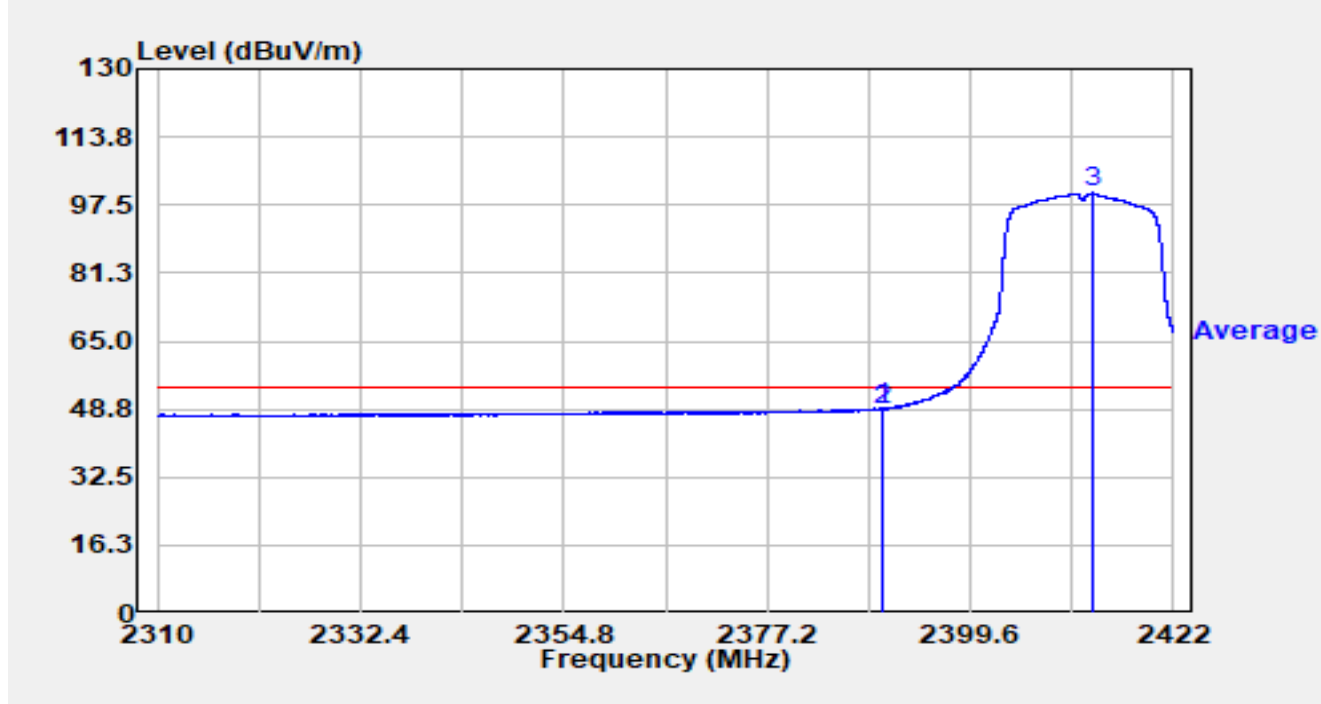


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.923	16.51	32.49	49.00	-5.00	54.00	Average
2		2390.000	16.33	32.49	48.81	-5.19	54.00	Average
3		2413.029	67.90	32.42	100.33	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

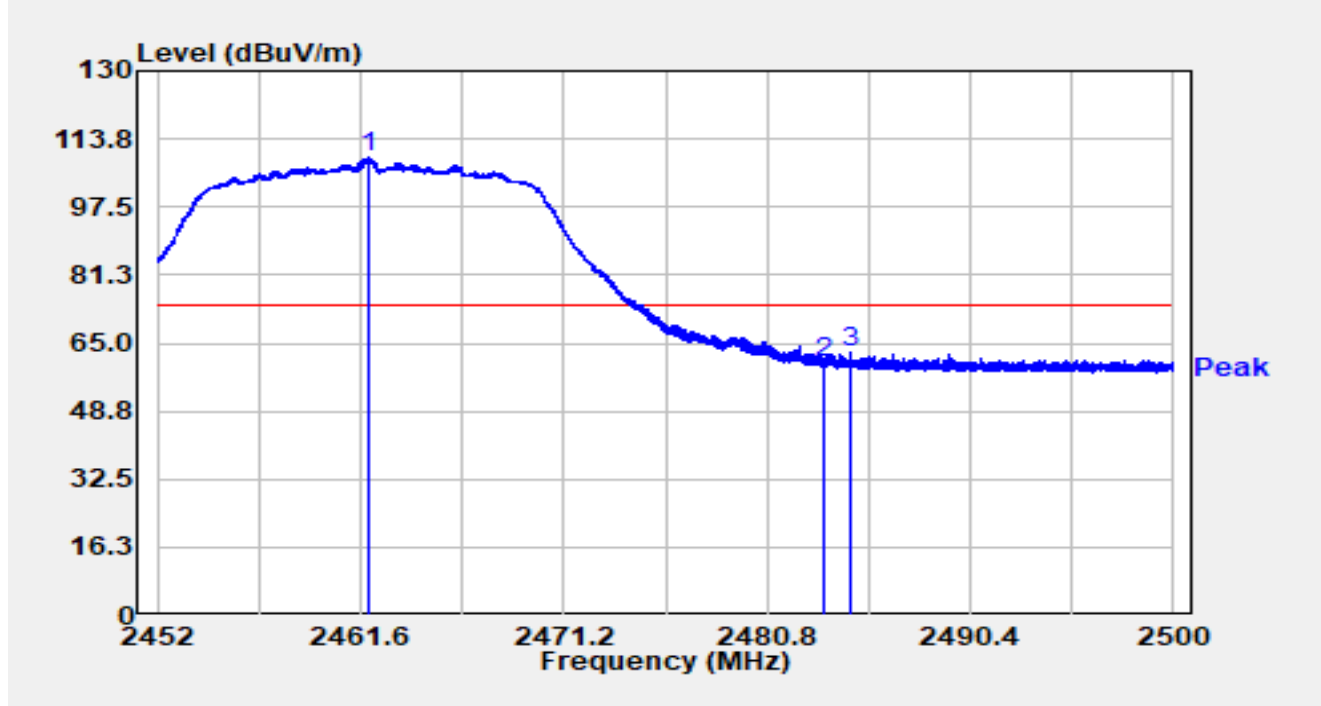


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.941	76.57	32.67	109.24	N/A	N/A	Peak
2		2483.500	27.59	32.82	60.41	-13.59	74.00	Peak
3	*	2484.683	30.17	32.82	62.99	-11.01	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

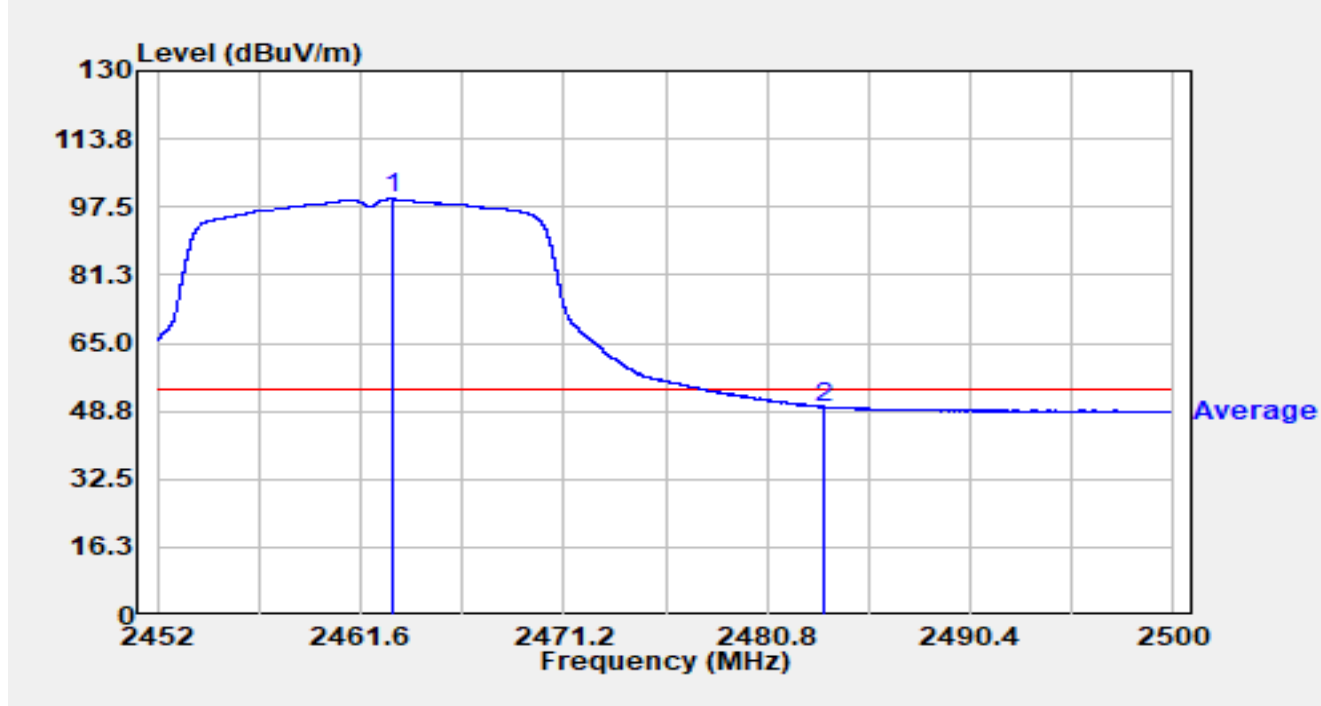


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.054	66.72	32.68	99.41	N/A	N/A	Average
2	*	2483.500	16.96	32.82	49.78	-4.22	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

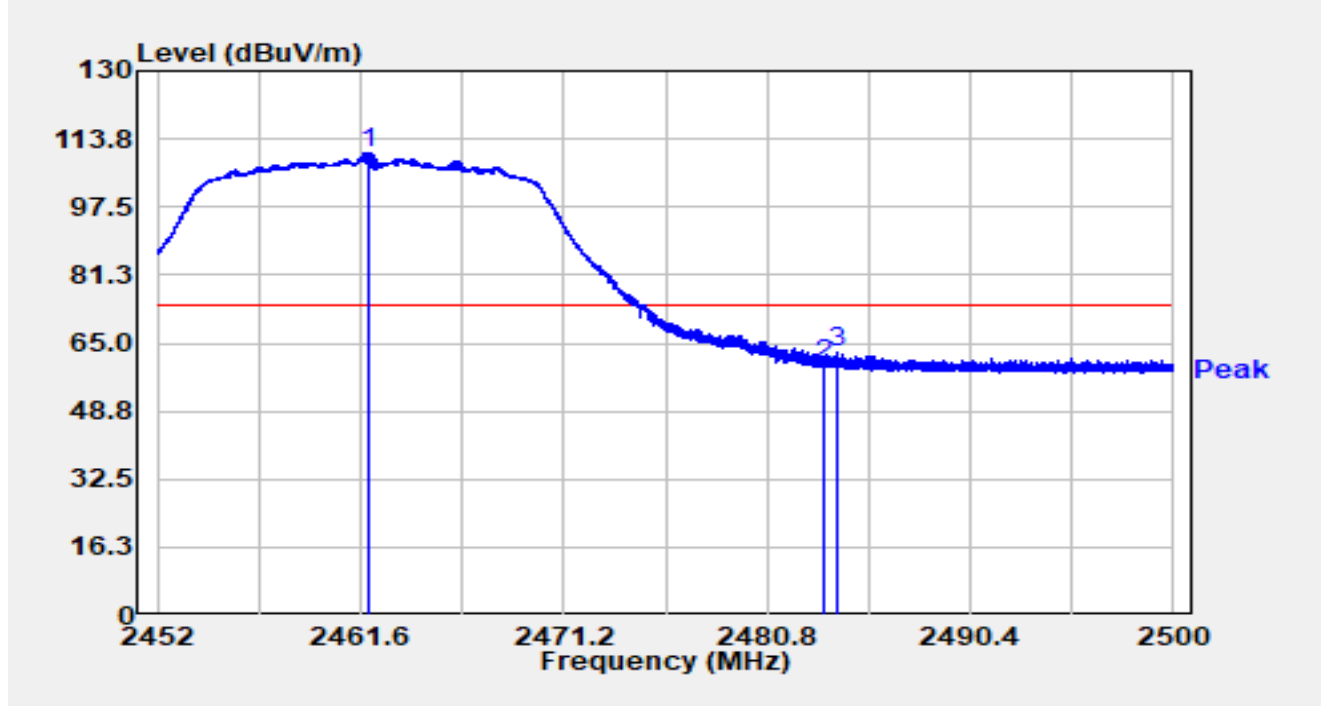


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.984	77.73	32.68	110.41	N/A	N/A	Peak
2		2483.500	27.18	32.82	60.00	-14.00	74.00	Peak
3	*	2484.073	29.73	32.82	62.55	-11.45	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

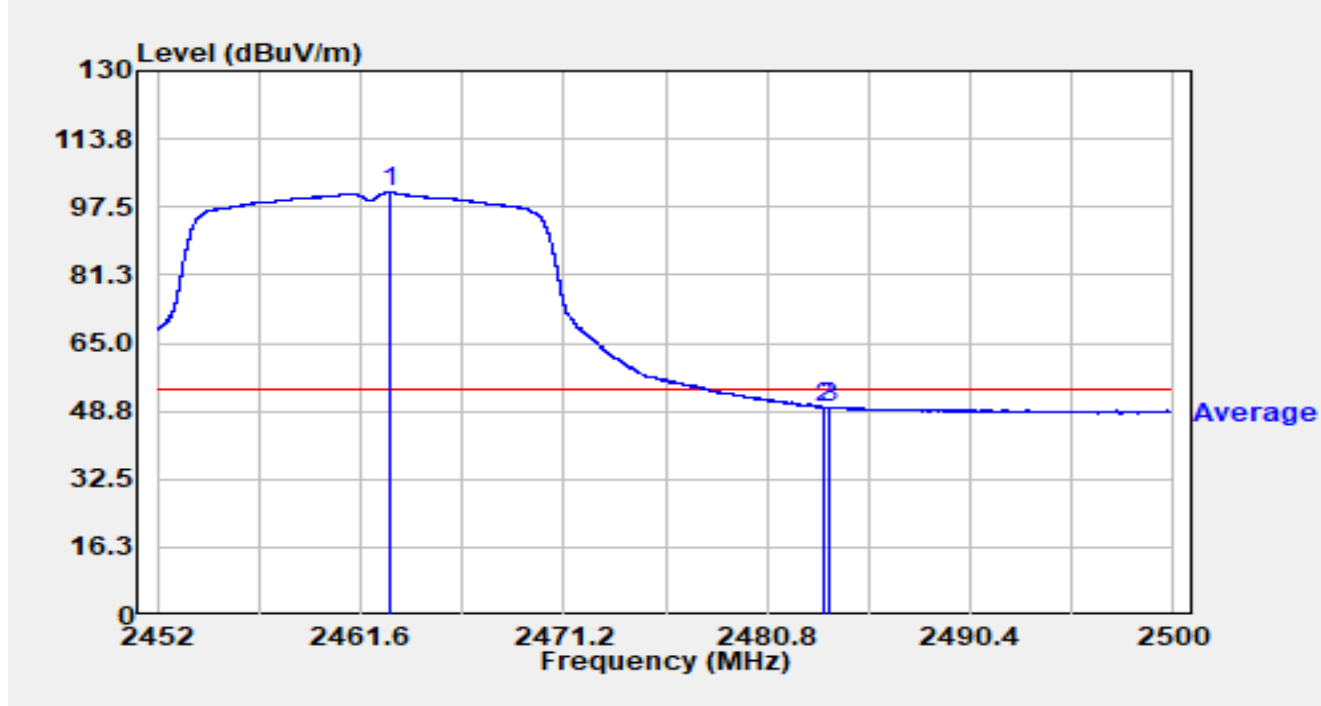


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.982	68.26	32.68	100.95	N/A	N/A	Average
2		2483.500	16.80	32.82	49.62	-4.38	54.00	Average
3	*	2483.690	16.92	32.82	49.74	-4.26	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

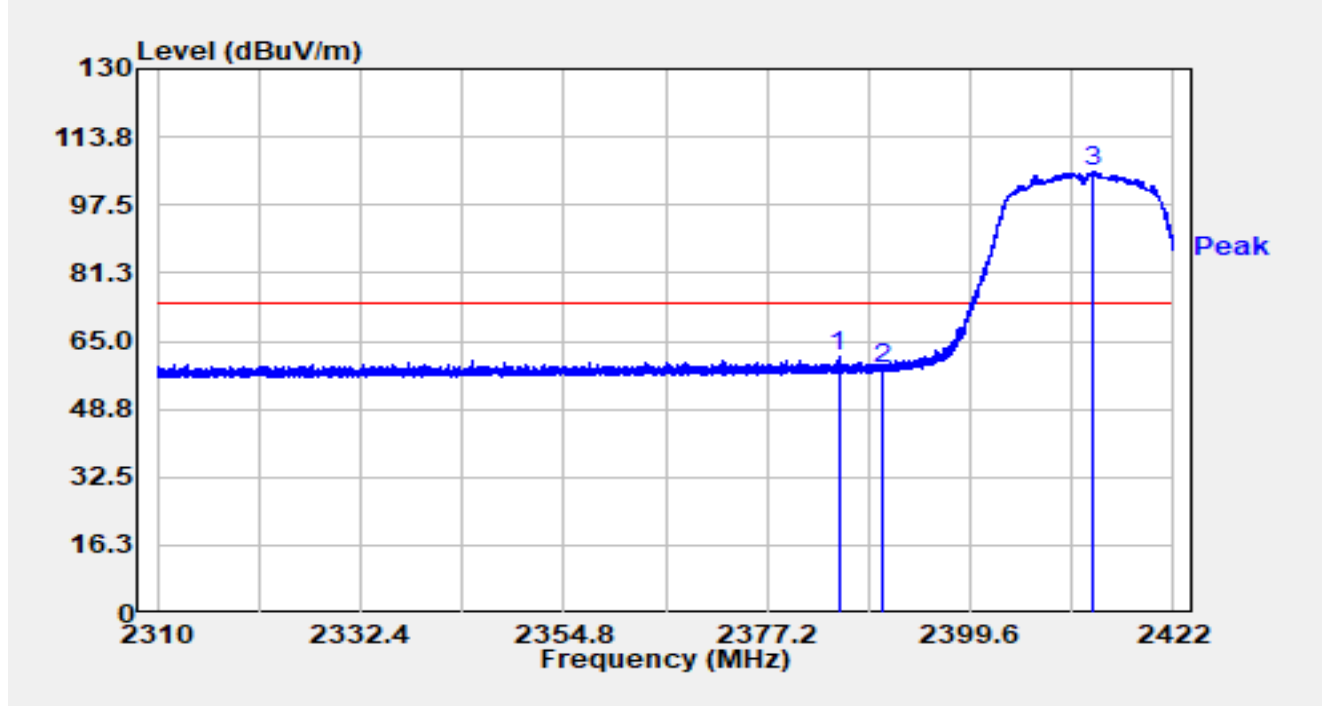


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.073	28.70	32.43	61.14	-12.86	74.00	Peak
2		2390.000	26.11	32.49	58.59	-15.41	74.00	Peak
3		2413.208	72.93	32.42	105.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

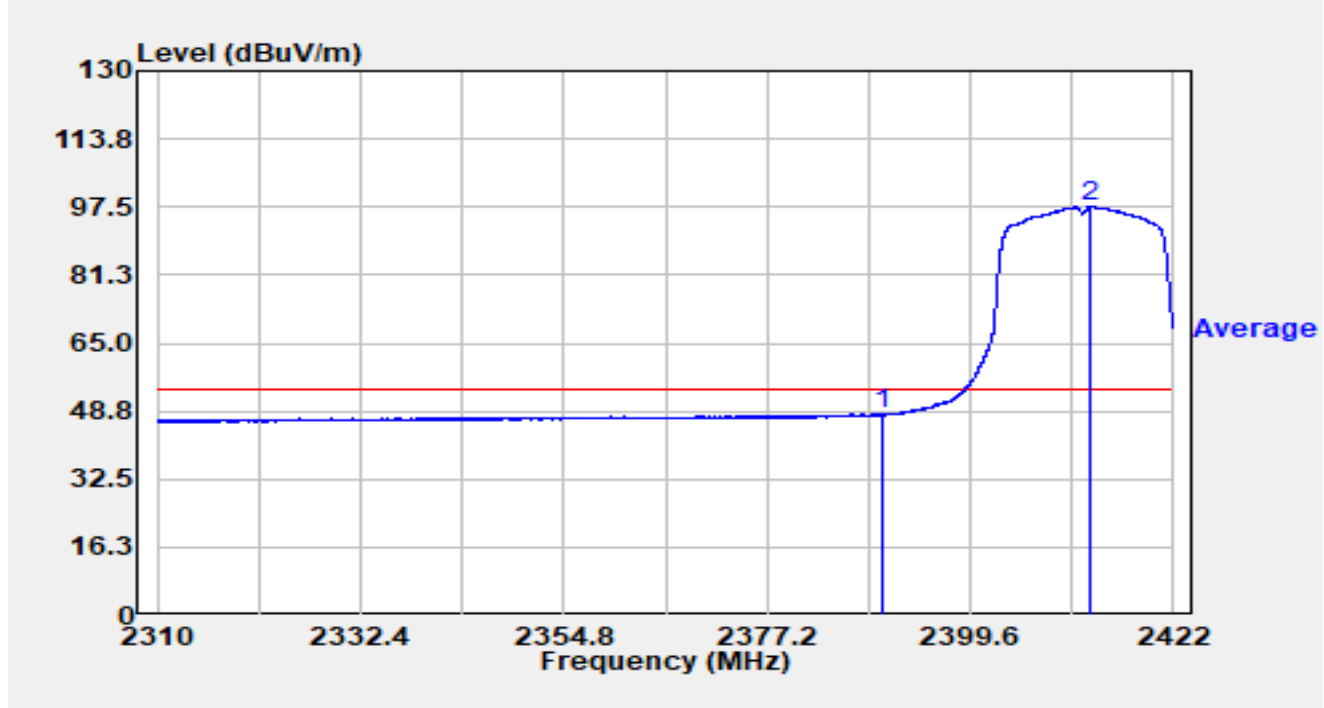


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.39	32.49	47.88	-6.12	54.00	Average
2		2412.850	65.08	32.42	97.51	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

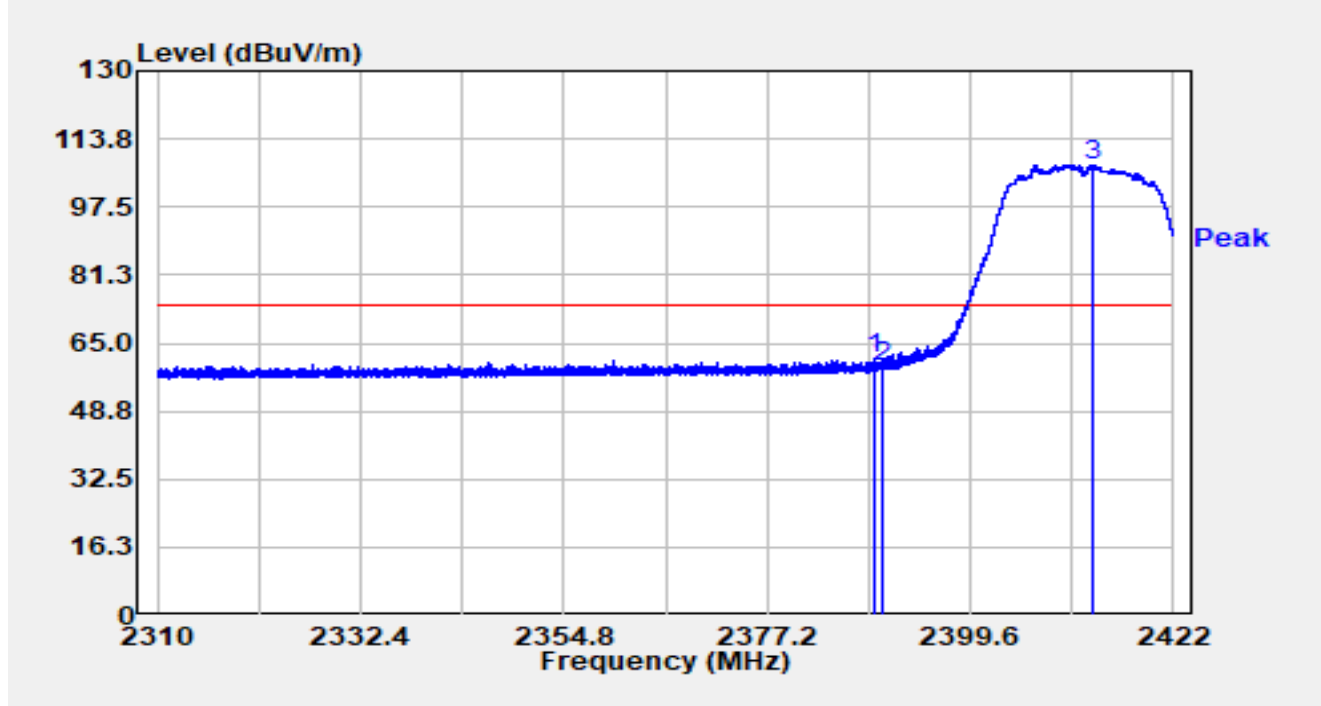


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.094	28.64	32.48	61.11	-12.89	74.00	Peak
2		2390.000	26.68	32.49	59.17	-14.83	74.00	Peak
3		2413.208	75.13	32.42	107.55	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

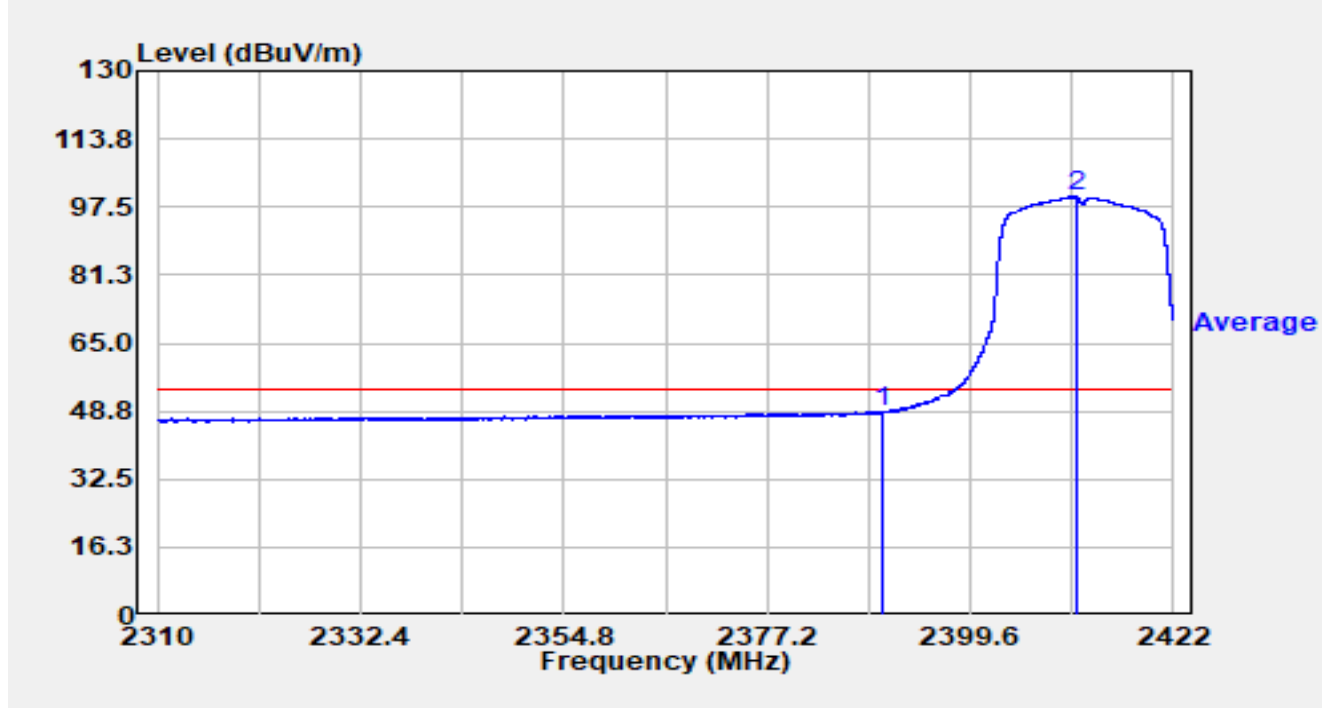


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	16.12	32.49	48.60	-5.40	54.00	Average
2		2411.259	67.54	32.42	99.96	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

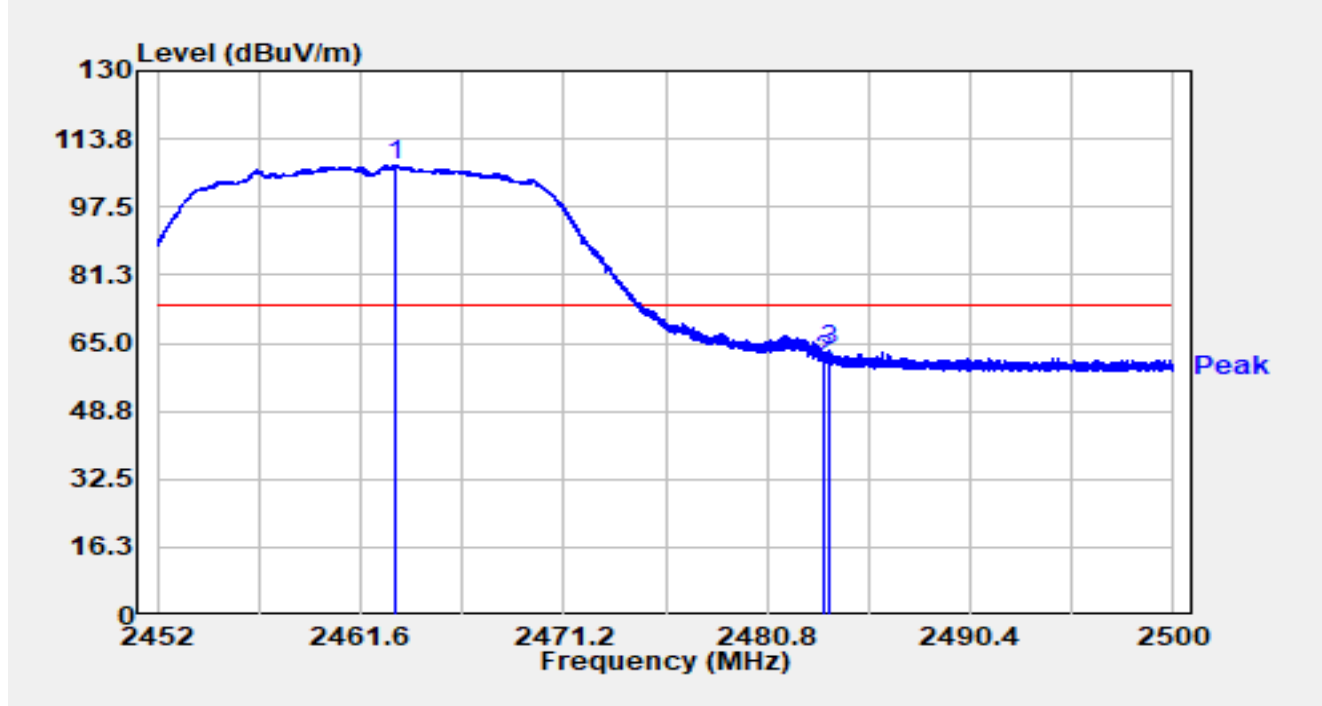


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.227	74.74	32.68	107.43	N/A	N/A	Peak
2		2483.500	28.01	32.82	60.83	-13.17	74.00	Peak
3	*	2483.747	30.34	32.82	63.16	-10.84	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

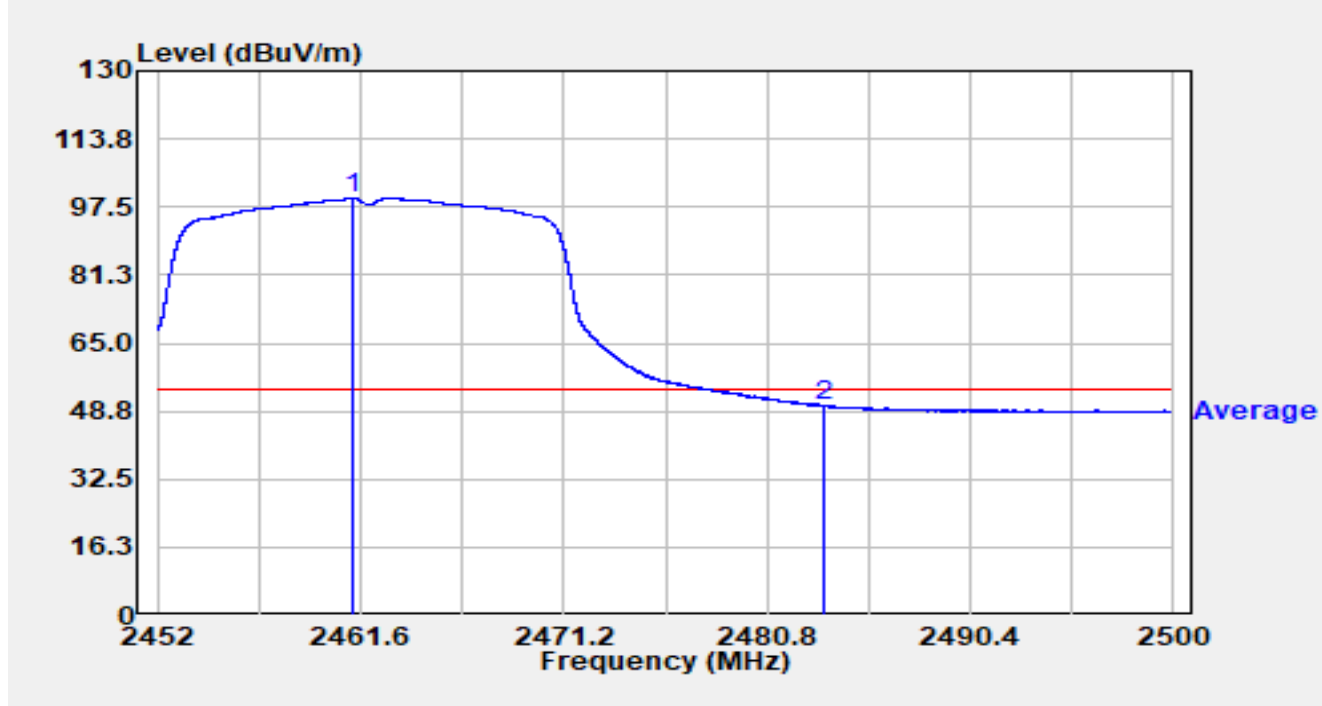


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.216	66.92	32.67	99.58	N/A	N/A	Average
2	*	2483.500	17.32	32.82	50.14	-3.86	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

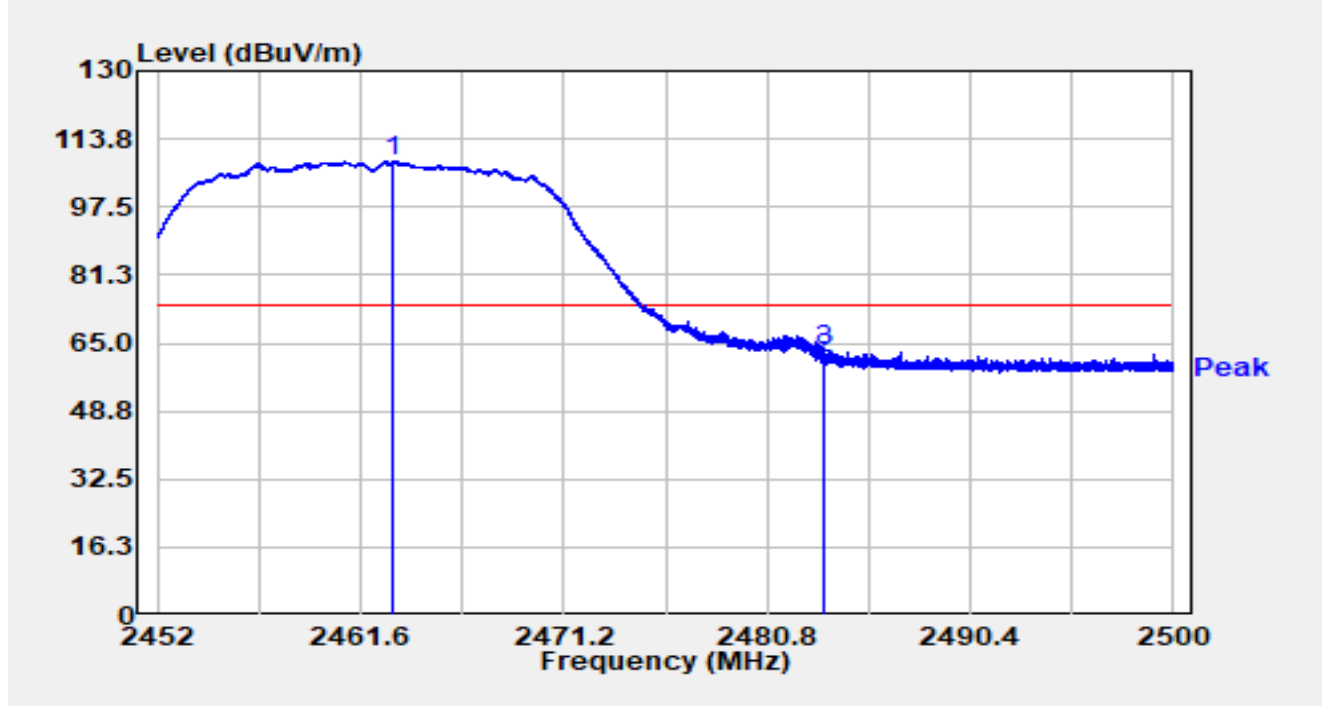


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.170	75.74	32.68	108.42	N/A	N/A	Peak
2		2483.500	28.56	32.82	61.38	-12.62	74.00	Peak
3	*	2483.526	30.46	32.82	63.28	-10.72	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

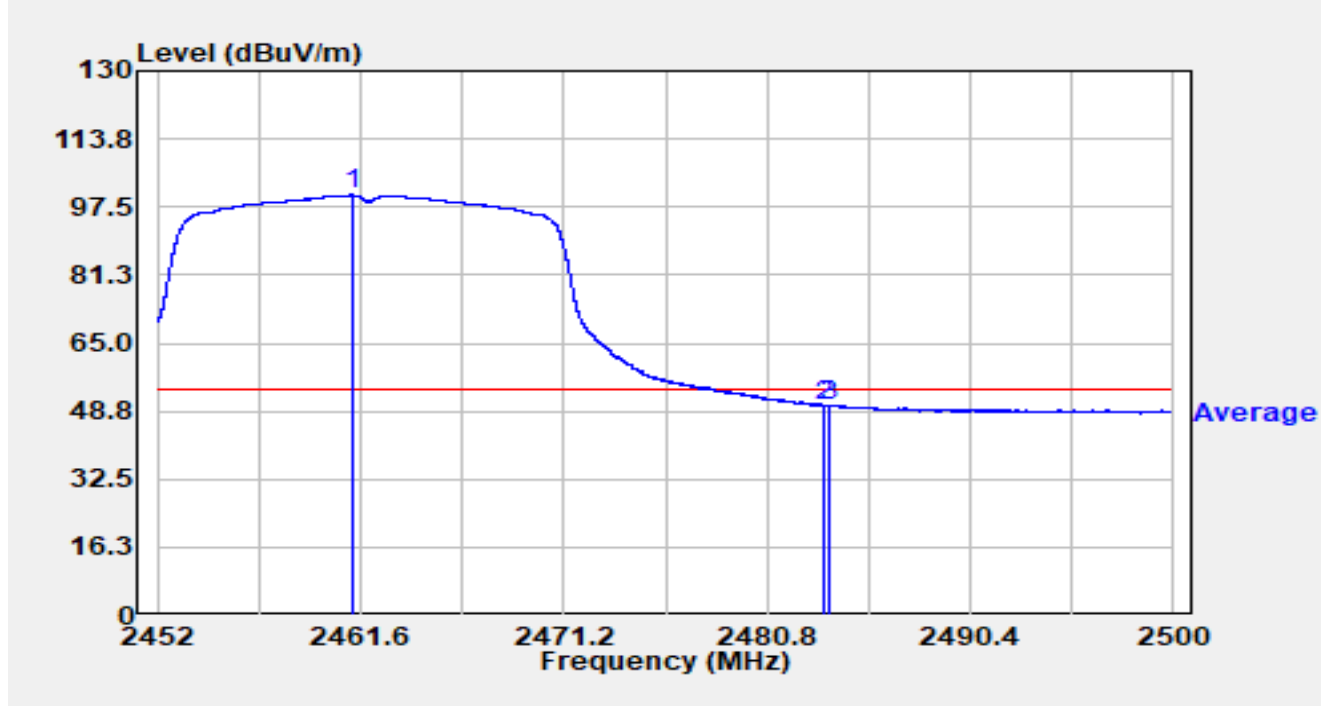


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.250	67.70	32.67	100.36	N/A	N/A	Average
2		2483.500	17.22	32.82	50.04	-3.96	54.00	Average
3	*	2483.762	17.38	32.82	50.21	-3.79	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

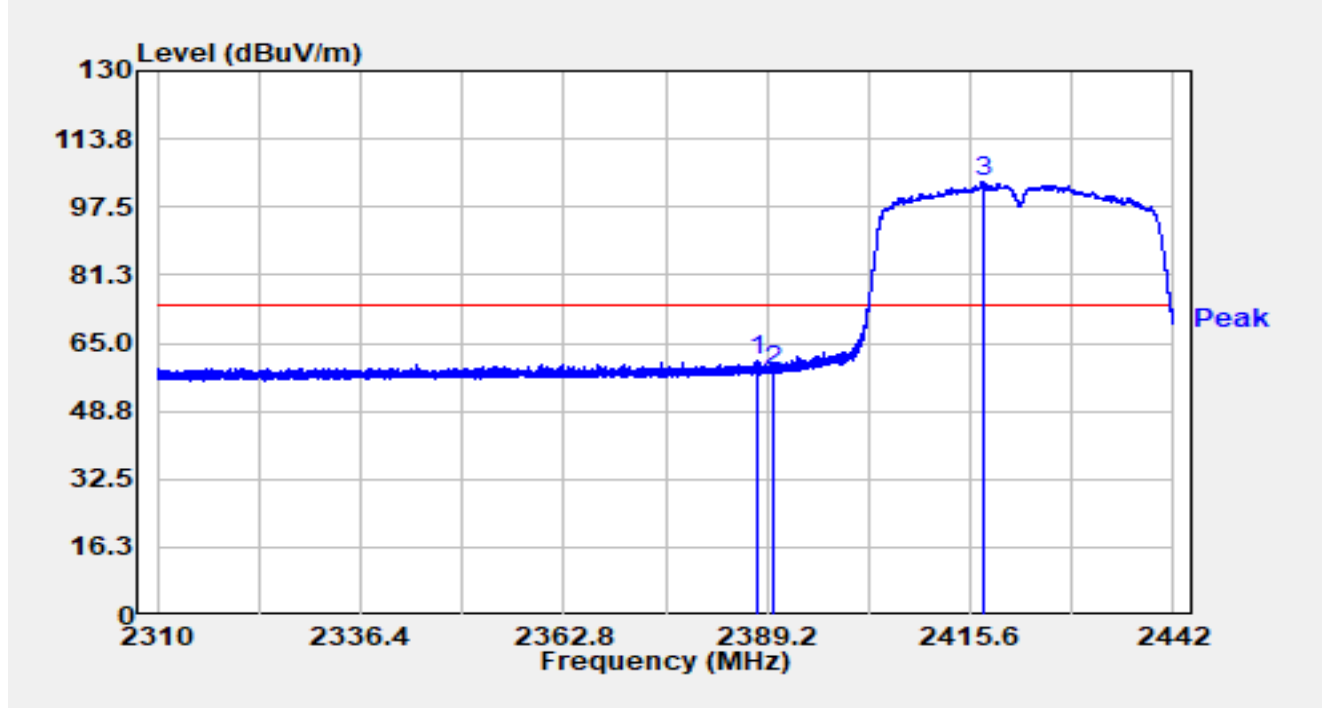


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.867	28.51	32.46	60.97	-13.03	74.00	Peak
2		2390.000	26.05	32.49	58.54	-15.46	74.00	Peak
3		2417.184	71.18	32.43	103.61	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

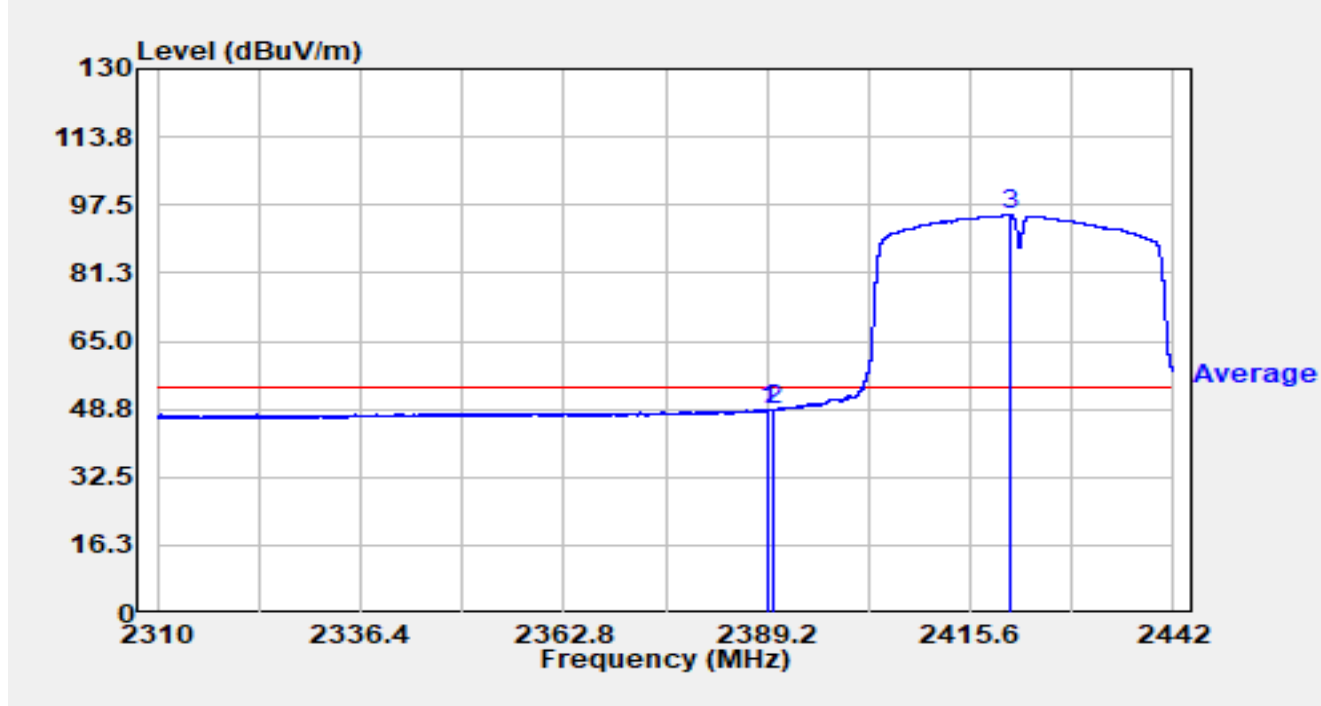


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.319	16.22	32.48	48.70	-5.30	54.00	Average
2		2390.000	15.99	32.49	48.47	-5.53	54.00	Average
3		2420.695	62.70	32.43	95.13	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

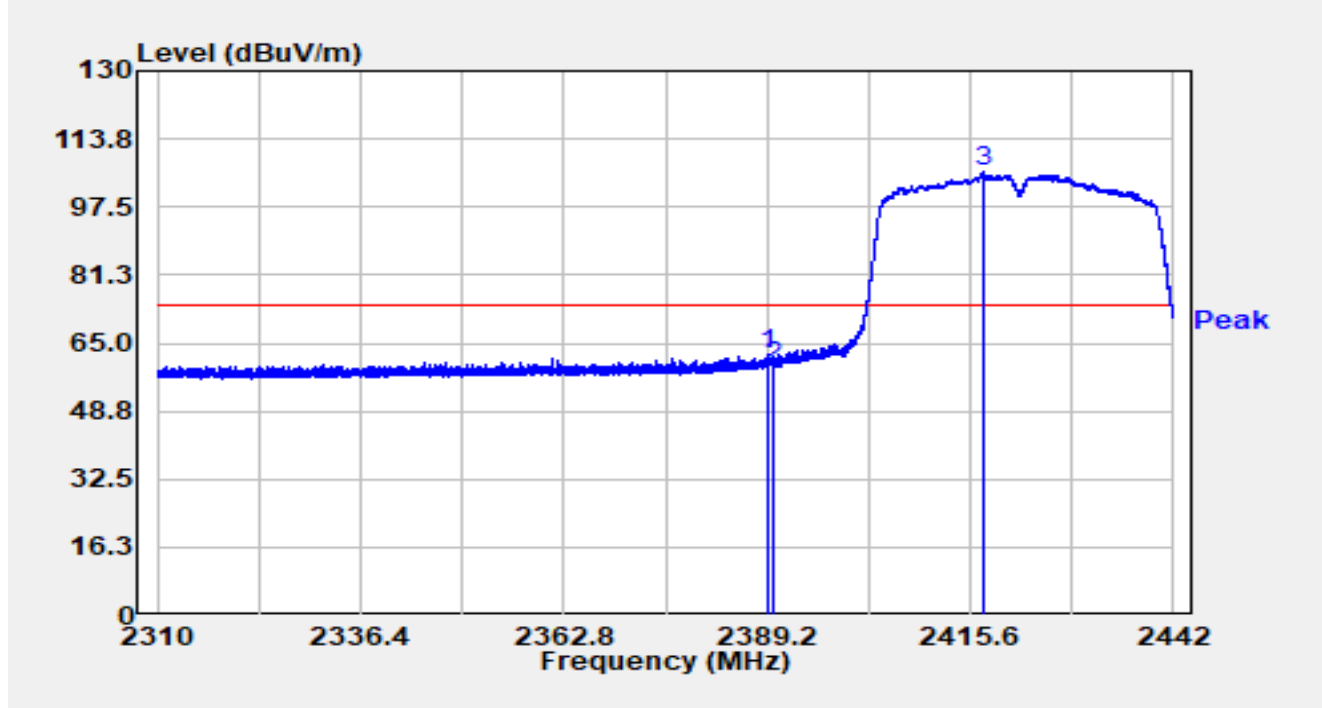


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.240	29.73	32.48	62.21	-11.79	74.00	Peak
2		2390.000	27.05	32.49	59.53	-14.47	74.00	Peak
3		2417.210	73.40	32.43	105.82	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

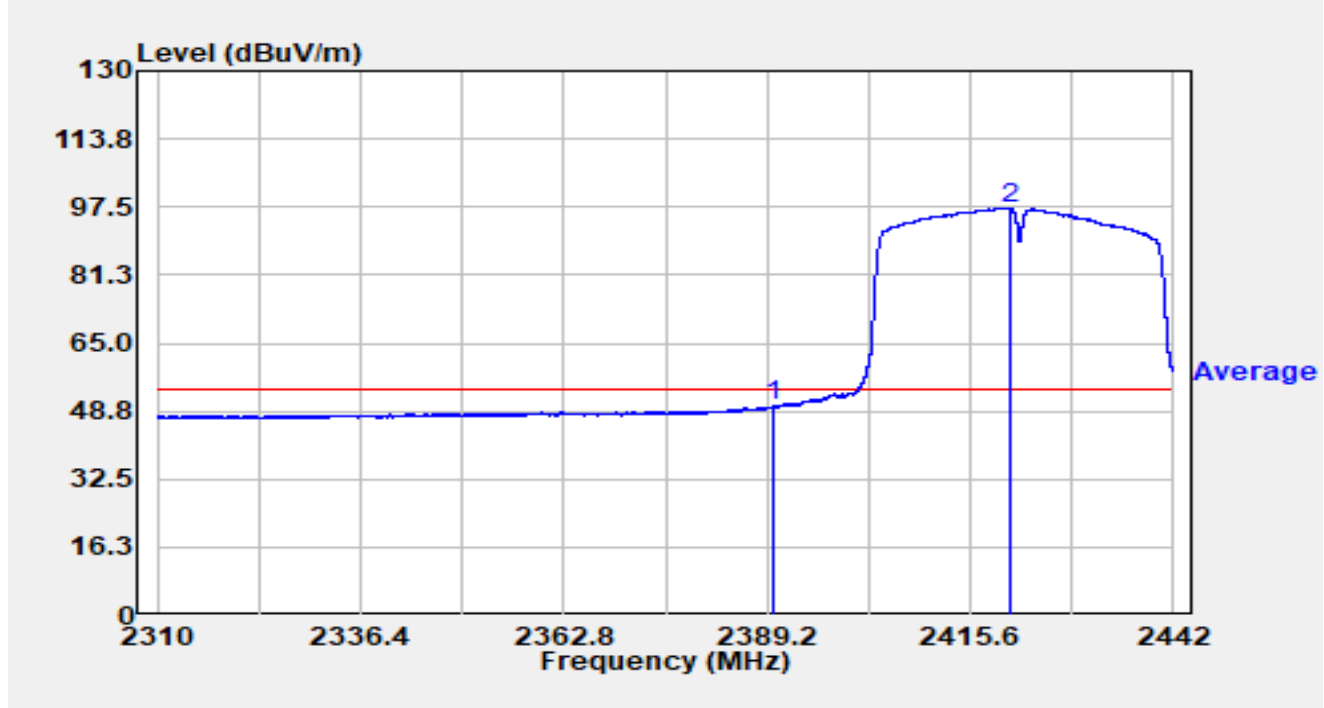


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	17.41	32.49	49.90	-4.10	54.00	Average
2		2420.774	64.87	32.43	97.29	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

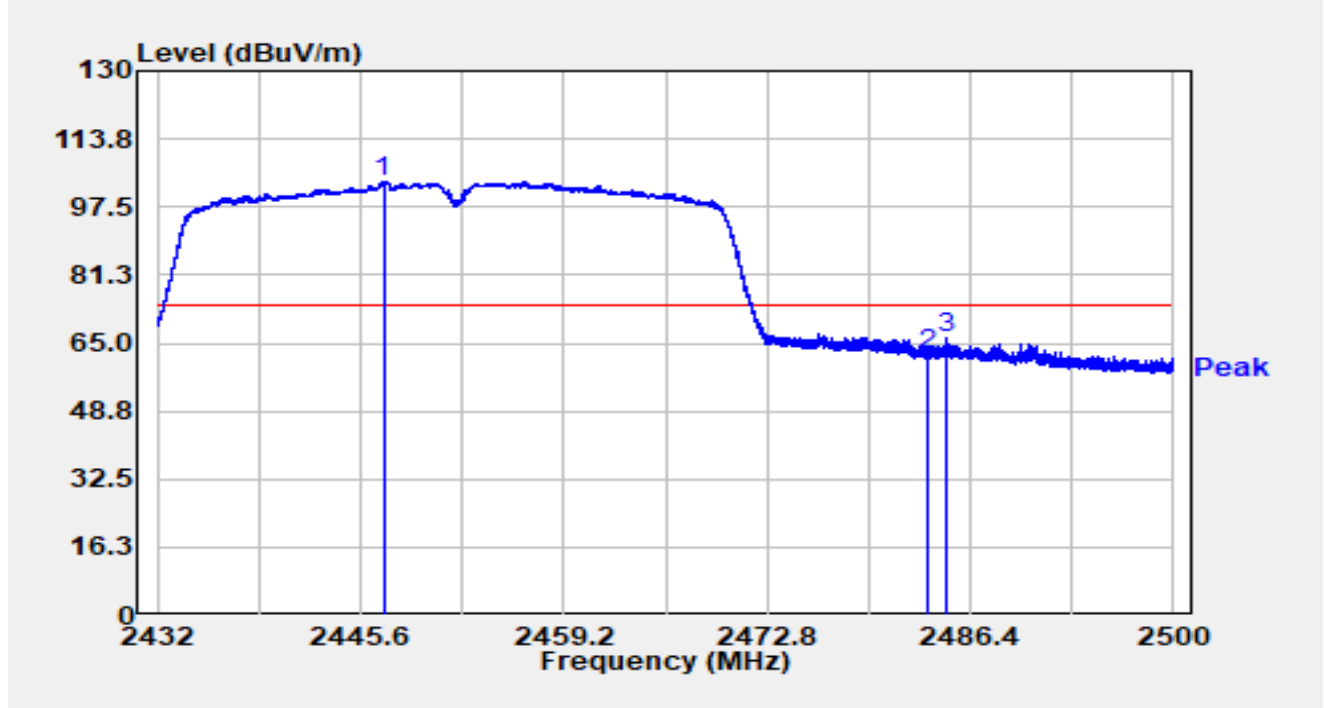


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2447.123	71.19	32.50	103.69	N/A	N/A	Peak
2		2483.500	29.57	32.82	62.39	-11.61	74.00	Peak
3	*	2484.775	33.26	32.82	66.09	-7.91	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

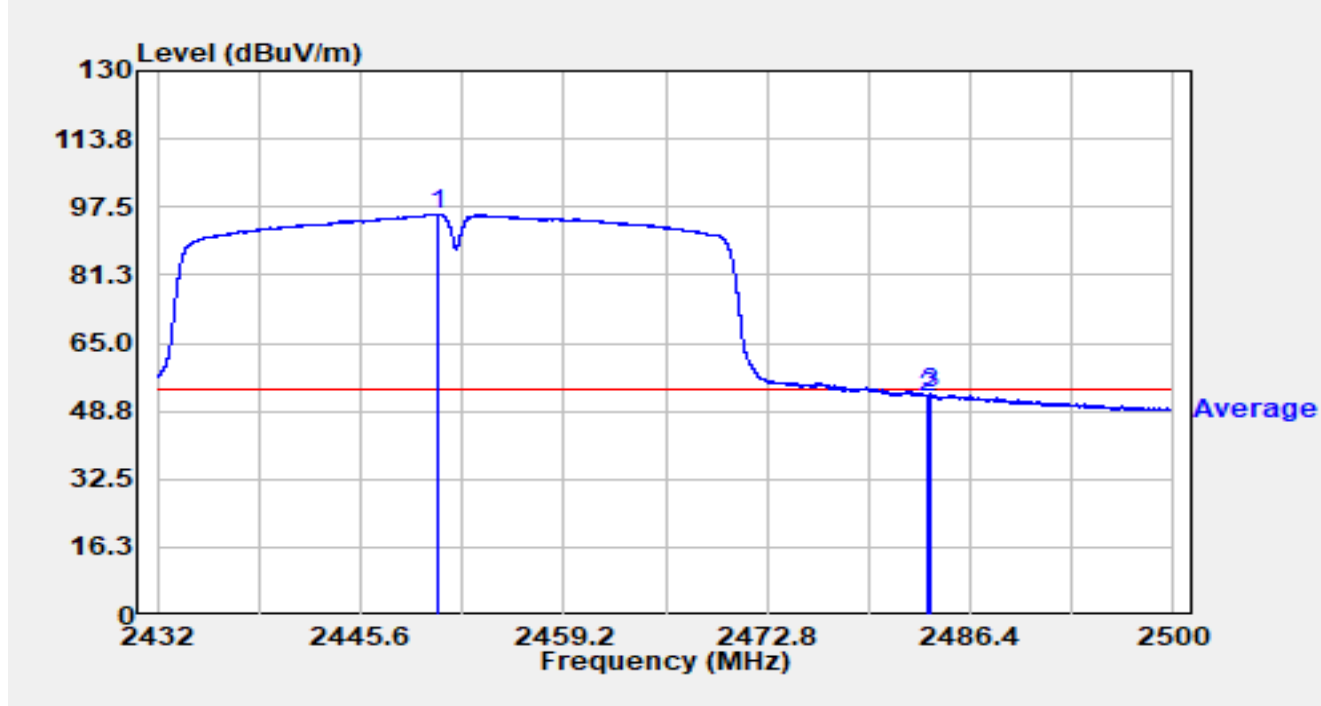


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.748	63.23	32.55	95.77	N/A	N/A	Average
2		2483.500	19.25	32.82	52.07	-1.93	54.00	Average
3	*	2483.762	19.99	32.82	52.81	-1.19	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

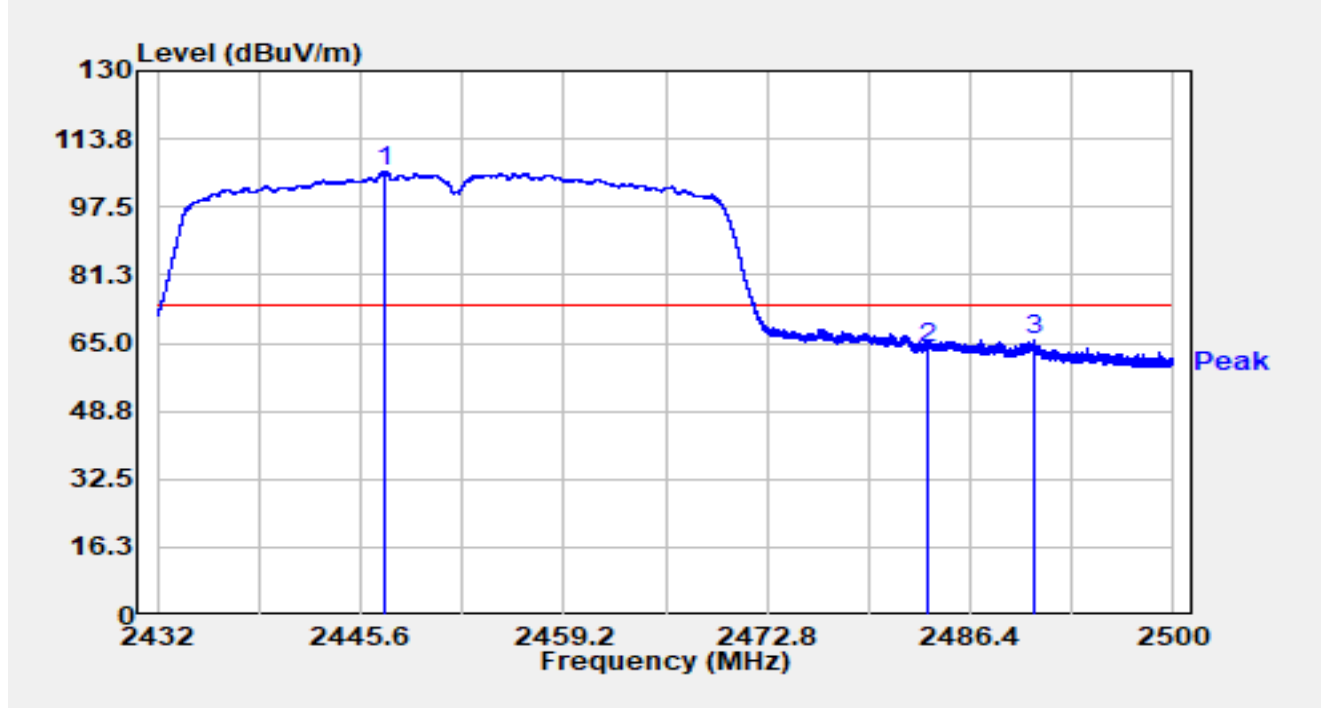


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2447.164	73.40	32.50	105.90	N/A	N/A	Peak
2		2483.500	31.10	32.82	63.92	-10.08	74.00	Peak
3	*	2490.738	32.78	32.85	65.62	-8.38	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2024-12-07
Temperature	18.1°C	Humidity	46.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Barry Wu
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Lawn Mowing Robot	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

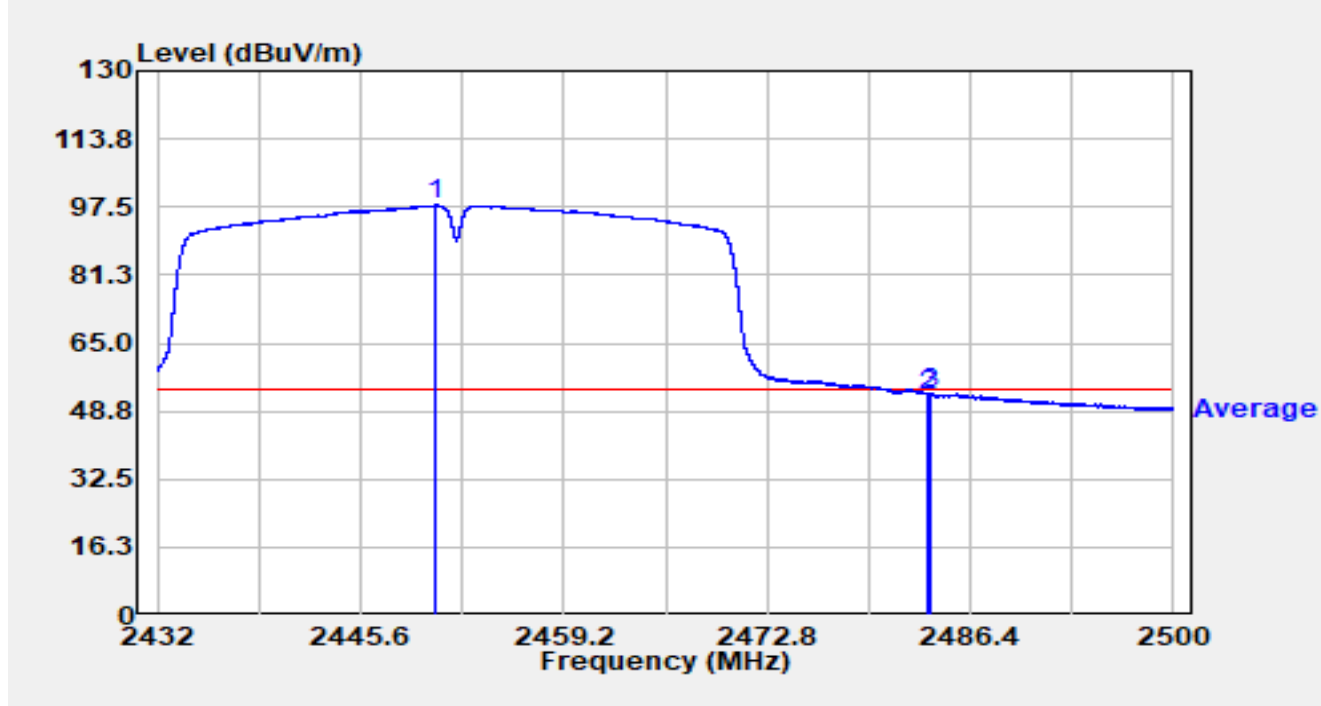


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.673	65.40	32.54	97.94	N/A	N/A	Average
2		2483.500	19.80	32.82	52.62	-1.38	54.00	Average
3	*	2483.734	20.17	32.82	52.99	-1.01	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-03-31
Temperature	20.9 °C	Humidity	28.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_C	Polarity	Line
EUT	Lawn Mowing Robot	Test Voltage	AC 120V/60Hz
Test Mode	Normal Operation in 2.4G Wi-Fi.		

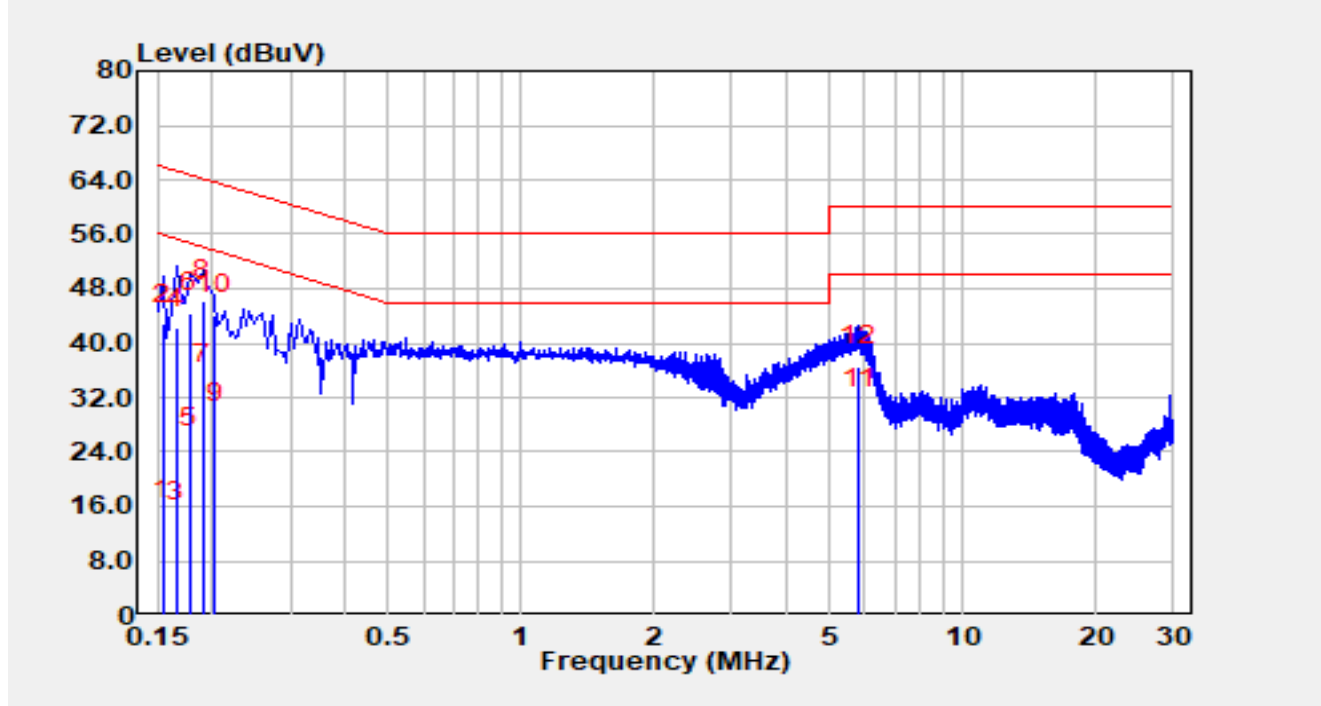


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	4.40	9.65	14.05	-41.73	55.78	Average
2		0.154	33.19	9.65	42.84	-22.94	65.78	QP
3		0.166	4.04	9.66	13.69	-41.46	55.16	Average
4		0.166	32.56	9.66	42.22	-22.94	65.16	QP
5		0.178	15.09	9.66	24.74	-29.83	54.58	Average
6		0.178	34.76	9.66	44.42	-20.16	64.58	QP
7		0.190	24.18	9.67	33.86	-20.18	54.04	Average
8	*	0.190	36.56	9.67	46.23	-17.80	64.04	QP
9		0.202	18.64	9.69	28.33	-25.20	53.53	Average
10		0.202	34.45	9.69	44.14	-19.39	63.53	QP
11		5.822	20.33	9.91	30.24	-19.76	50.00	Average
12		5.822	26.75	9.91	36.66	-23.34	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-03-31
Temperature	20.9 °C	Humidity	28.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_C	Polarity	Neutral
EUT	Lawn Mowing Robot	Test Voltage	AC 120V/60Hz
Test Mode	Normal Operation in 2.4G Wi-Fi.		

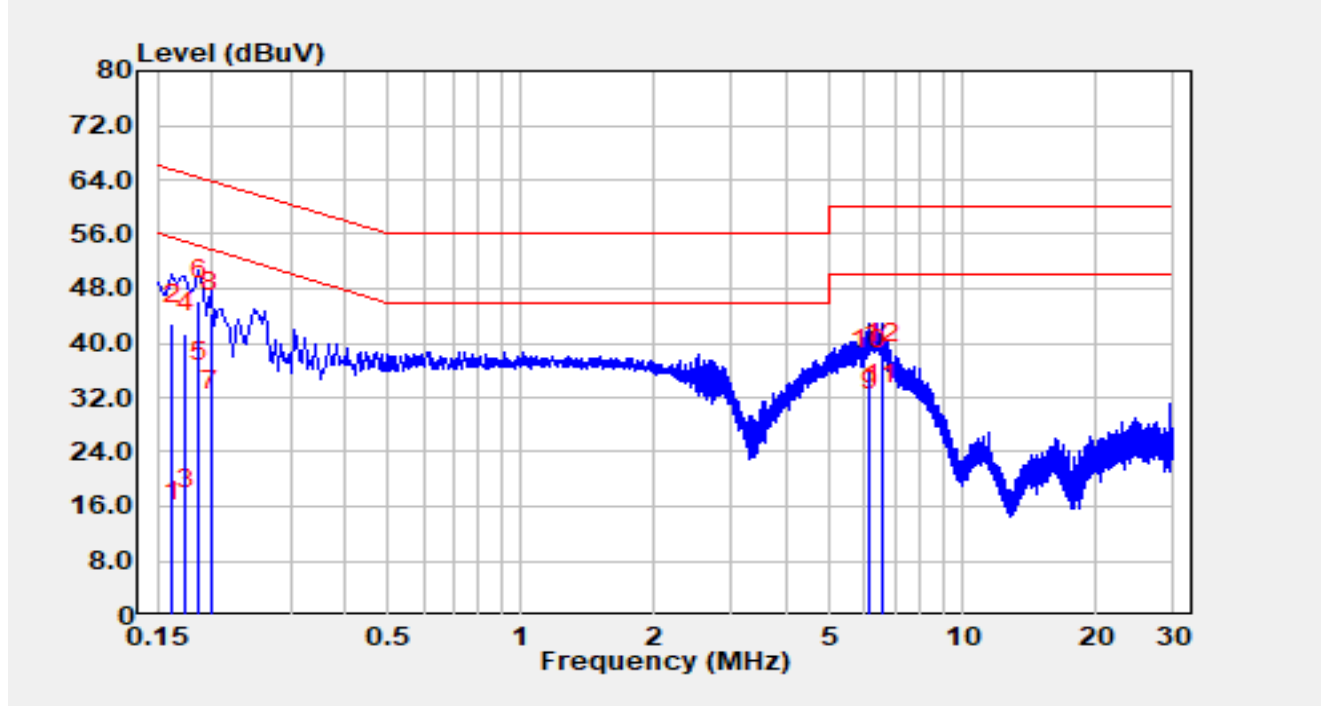

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	4.10	9.68	13.78	-41.58	55.36	Average
2		0.162	33.18	9.68	42.86	-22.50	65.36	QP
3		0.174	5.96	9.68	15.64	-39.13	54.77	Average
4		0.174	31.69	9.68	41.37	-23.40	64.77	QP
5		0.186	24.53	9.69	34.21	-20.00	54.21	Average
6	*	0.186	36.51	9.69	46.20	-18.01	64.21	QP
7		0.198	20.35	9.70	30.05	-23.64	53.69	Average
8		0.198	34.67	9.70	44.38	-19.32	63.69	QP
9		6.162	19.97	9.93	29.90	-20.10	50.00	Average
10		6.162	26.02	9.93	35.95	-24.05	60.00	QP
11		6.530	21.06	9.94	31.01	-18.99	50.00	Average
12		6.530	27.06	9.94	37.00	-23.00	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2411RSU032-UT” file.

Appendix C – EUT Photograph

Refer to “2411RSU032-UE” file.

The End
