



Global Product Certification  
EMC-EMR-Safety Approvals

**EMC Technologies**

ABN 82 057 105 549  
Unit 3/87 Station Road  
Seven Hills NSW 2147 AU

**Telephone** +61 2 9624 2777  
**Facsimile** +61 2 9838 4050  
**Email** syd@emctech.com.au  
[www.emctech.com.au](http://www.emctech.com.au)

## APPENDIX H OF TEST REPORT T60822\_F

### TEST SAMPLE TEST PLAN

FCC ID: QVL-BT900A

Manufacturer: BQT Solutions (Australia) Pty Ltd

Test Sample: Contactless Smart Card Reader

Model: BT900-WG

Serial Number: None

Date: 4<sup>th</sup> September 2006

---

**Melbourne**  
57 Assembly Drive  
Tullamarine Vic 3043  
Tel: +61 3 9335 3333  
Fax: +61 3 9338 9260

**Sydney**  
Unit 3/87 Station Road  
Seven Hills NSW 2147  
Tel: +61 2 9624 2777  
Fax: +61 2 9838 4050

**Brisbane**  
1/15 Success Street  
Acacia Ridge Qld 4110  
Tel: +61 7 3875 2455  
Fax: +61 7 3875 2466

**Auckland (NZ)**  
47 Mackelvie Street  
Grey Lynn Auckland  
Tel: +64 9 360 0862  
Fax: +64 9 360 0861



**PROLIFICX AUSTRALIA Pty Ltd**

*ABN 37 658 594 084*

*Suite G12*

*National Innovation Centre  
Australian Technology Park  
Eveleigh NSW 2015  
Australia*

*Phone +61-2-9209-4640  
Fax +61-2-9209-4641  
Web [www.prolificx.com](http://www.prolificx.com)*

# EMC TEST PLAN

## For the

# BQT BT900A

# SMARTCARD READER

<b>Document No.</b>	<b>Description</b>	<b>By</b>	<b>Date</b>
DC25505A	Initial Release	PJJ	8-Aug-06
DC25505B	Added FCC wiring diagram	PJJ	18-Sep-06

BQT Solutions Document Release Approval						
Checked by		Check Date		Approved by		Approval Date

## TABLE OF CONTENTS

<b>1</b>	<b>PRODUCT DESCRIPTION</b>	<b>4</b>
<b>2</b>	<b>SPECIFICATIONS RELEVANT TO EMC</b>	<b>4</b>
<b>3</b>	<b>EUT TESTING CONFIGURATION</b>	<b>4</b>
<b>4</b>	<b>EUT BUILD DETAILS</b>	<b>4</b>
<b>5</b>	<b>TESTING REQUIRED</b>	<b>5</b>
<b>6</b>	<b>EMISSIONS TESTING</b>	<b>5</b>
<b>6.1</b>	<b>Radiated</b>	<b>5</b>
6.1.1	Classifications	5
6.1.2	Requirements	5
6.1.3	Performance Criteria	6
<b>6.2</b>	<b>Conducted</b>	<b>6</b>
6.2.1	HARMONIC CURRENT EMISSIONS	6
6.2.1.1	Requirements	6
6.2.2	VOLTAGE FLUCTUATIONS AND FLICKER	6
6.2.2.1	Requirements	6
<b>7</b>	<b>IMMUNITY TESTING</b>	<b>6</b>
<b>7.1</b>	<b>Radiated</b>	<b>6</b>
7.1.1	Requirements	6
7.1.2	Frequency Range	6
7.1.3	Field Strength	6
7.1.4	Performance Criteria	6
<b>7.2</b>	<b>Conducted</b>	<b>6</b>
7.2.1	ELECTROSTATIC DISCHARGE TESTING	6
7.2.1.1	Requirements	7
7.2.1.2	Types of Discharges	7
7.2.1.3	Application Points	7
7.2.1.4	Number of Discharges	7
7.2.1.5	Severity Level	7
7.2.1.6	Performance Criteria	7
7.2.2	ELECTRICAL FAST TRANSIENT BURST TESTING	7
7.2.2.1	Requirements	7
7.2.2.2	Lines to be Tested	7
7.2.2.3	Duration of Test	7
7.2.2.4	Polarity Of Test Voltage	7
7.2.2.5	Severity Level	7
7.2.2.6	Performance Criteria	8
7.2.3	ELECTRICAL FAST TRANSIENTS BURST TEST	8
7.2.3.1	Requirements	8
7.2.3.2	Lines to be Tested	8
7.2.3.3	Duration of Test	8

7.2.3.4	Severity Level	8
7.2.3.5	Performance Criteria	8
7.2.4	CONDUCTED RF, Common Mode	8
7.2.4.1	Requirements	8
7.2.4.2	Lines to be Tested	8
7.2.4.3	Frequency Range	8
7.2.4.4	Severity Level	8
7.2.4.5	Performance Criteria	9
7.2.5	VOLTAGE DIPS and INTERRUPTIONS	9
7.2.5.1	Requirements	9
7.2.5.2	Voltage Limits	9
7.2.5.3	Performance Criteria	9

**8 SAFETY** **9**

**9 SELV** **9**

## 1 PRODUCT DESCRIPTION

The BQT BT900 is a contactless smartcard reader designed for keyless entry and other personnel identification and entry purposes. The BT900 family of products share a common PCB, with the models differing only in their configuration procedures and data interfaces. See table below:

Model	Interface
BT900-WG	Wiegand (configurable via setup card)

The BT900-WG uses a pair of open collector drivers to provide a Wiegand interface.

A BT900-WG is being provided for testing.

The BT900 is powered from a single 12 Volt DC supply and is connected to a generic controller unit for data transfer. Both power supply and data cabling lengths are between 3m and 1200m for a normal installation.

## 2 SPECIFICATIONS RELEVANT TO EMC

Clock Frequencies	MIFARE 13.56MHz +/- 30ppm, MIFARE IF 847.5kHz +/- 30ppm, Processor 11.0592MHz +/-30ppm
Microprocessor	Atmel AT89S8253-24JC
Case style & material	Plastic – no metal coating
Power Supply	Internal linear 5V regulated

## 3 EUT TESTING CONFIGURATION

The BT900 is to be tested on a table top in the configurations shown in Fig.1 and Fig.2. The cable lengths on the table shall comply with the minimum required under the particular test standard. The BT900 will be connected to a Controller and Power Supply as shown. These units will be remote from the test table in all testing performed. To replicate the normal operation of the BT900 a suitable smartcard is to be placed upon the reader's antenna where it will automatically be read repeatedly.

## 4 EUT BUILD DETAILS

Model Number/Name	BT900
Version	WG (Wiegand)
Serial Number	
PCB Revision(s)	PC25503B (BT900 Rev 5.1)
Software revision(s)	
Manufacturer	BQT Solutions

## 5 TESTING REQUIRED

Emissions Radiated	Comment
FCC Part 15.209 & 15.225	
EN 300 330 Part 1 & 2	
EN 301 489 Part 1	
EN 55022	
Emissions Conducted	
FCC Part 15.207	
EN 300 330 Part 1 & 2	
EN 301 489 Part 1	
EN 61000_3-2	Current Harmonics
EN 61000-3-3	Voltage Fluctuations & Flicker
Immunity Radiated	
EN 61000-4-3	RF radiated Immunity
Immunity Conducted	
EN 61000-4-2	Electrostatic Discharge
EN 61000-4-4	Fast Transients
EN 61000-4-5	Surges
EN 61000-4-6	Conducted RF
EN 61000-4-11	Voltage dips & interruptions
SELV	
EN 60950	

## 6 EMISSIONS TESTING

### 6.1 Radiated

#### 6.1.1 Classifications

Classification	Relevant Clause	Class
Product	ETSI EN 300 330 / 7.1.4	1
Transmitter Power		2
Receiver	ETSI EN 300 330 / 4.1.1	3
Duty Cycle	ETSI EN 300 330 / 7.5	4

#### 6.1.2 Requirements

The following tests are to be performed and reported.

#### Transmitter

Test	Relevant Clause	
Radiated H-Field	ETSI EN 300 330-1 / 7.2.1	YES
RF Carrier current		N/A
Radiated E-field		N/A
Spurious emissions		YES

#### Receiver

Test	Relevant Clause	
Adjacent channel selectivity		N/A
Blocking or desensitisation		N/A
Receiver spurious radiation	ETSI EN 300 330-1 / 7.4	YES

### 6.1.3 Performance Criteria

The EUT must meet the limits of

- ETSI EN 300 330-1
- ETSI EN 300 330-2
- ETSI EN 301 489-1 [EN 55022].

## 6.2 Conducted

### 6.2.1 HARMONIC CURRENT EMISSIONS

#### 6.2.1.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-3-2 and ETSI 301 489.

### 6.2.2 VOLTAGE FLUCTUATIONS AND FLICKER

#### 6.2.2.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-3-3 and ETSI 301 489.

## 7 IMMUNITY TESTING

### 7.1 Radiated

#### 7.1.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-3 and ETSI 301 489.

#### 7.1.2 Frequency Range

80 to 1000 and 1400 to 2000 MHz with a step increment of 1% of the current test frequency.

#### 7.1.3 Field Strength

3 V/m with 1kHz, 80% amplitude modulation

#### 7.1.4 Performance Criteria

The EUT does not provide a continuous communications link and as such under clause 6.3 of ETSI EN 301 489-1 the following performance criteria shall be applied.

- Degradation of operation permitted during test.
- Erroneous data transmission is permitted.
- No performance degradation permitted after testing complete.

### 7.2 Conducted

#### 7.2.1 ELECTROSTATIC DISCHARGE TESTING

#### 7.2.1.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-2 and ETSI EN 301 489.

#### 7.2.1.2 Types of Discharges

Air and contact discharges are to be applied.

#### 7.2.1.3 Application Points

Discharges are to be applied to all operator accessible areas of the EUT

#### 7.2.1.4 Number of Discharges

At least ten (10) single discharges are to be applied at each point.

#### 7.2.1.5 Severity Level

Air discharge:	Level 4 (8kV)
Contact Discharge:	Level 2 (4kV)

All intermediate levels are to be tested as per the requirements of EN 61000-4-2.

#### 7.2.1.6 Performance Criteria

The EUT does not provide a continuous communications link and as such under clause 6.3 of ETSI EN 301 489-1 the following performance criteria shall be applied.

- Degradation of operation permitted during test.
- Erroneous data transmission is permitted.
- No performance degradation permitted after testing complete.

## 7.2.2 ELECTRICAL FAST TRANSIENT BURST TESTING

#### 7.2.2.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-4 and ETSI EN 301 489 levels required.

#### 7.2.2.2 Lines to be Tested

Mains power line and data cable greater than 3m in length are to be tested.

#### 7.2.2.3 Duration of Test

Nominal 5 minutes on all cables.

#### 7.2.2.4 Polarity Of Test Voltage

Both polarities are mandatory.

#### 7.2.2.5 Severity Level

DC Power Line - Level 1 (0.5 kV)

Data Line - Level 1 (0.5 kV).

#### 7.2.2.6 Performance Criteria

The EUT does not provide a continuous communications link and as such under clause 6.3 of ETSI EN 301 489-1 the following performance criteria shall be applied.

- Degradation of operation permitted during test.
- Erroneous data transmission is permitted.
- No performance degradation permitted after testing complete.

### 7.2.3 ELECTRICAL FAST TRANSIENTS BURST TEST

#### 7.2.3.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-5 and ETSI EN 301 489 levels required.

#### 7.2.3.2 Lines to be Tested

Mains power line and Telecommunications cable greater than 3m.

#### 7.2.3.3 Duration of Test

As per the requirements of EN 61000-4-5.

#### 7.2.3.4 Severity Level

Power Line - Level 2 (1kV to ground & 0.5kV line to line)  
Telecommunications line - Level 1 (0.5 kV).

#### 7.2.3.5 Performance Criteria

The EUT does not provide a continuous communications link and as such under clause 6.3 of ETSI EN 301 489-1 the following performance criteria shall be applied.

- Degradation of operation permitted during test.
- Erroneous data transmission is permitted.
- No performance degradation permitted after testing complete.

### 7.2.4 CONDUCTED RF, Common Mode

#### 7.2.4.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-6 and ETSI 301 489 levels required.

#### 7.2.4.2 Lines to be Tested

Mains power line and data cable greater than 3m in length are to be tested.

#### 7.2.4.3 Frequency Range

150kHz to 80 MHz. With 1kHz 80% amplitude modulation

#### 7.2.4.4 Severity Level

Line - Level 2 – 3Volts rms

#### 7.2.4.5 Performance Criteria

The EUT does not provide a continuous communications link and as such under clause 6.3 of ETSI EN 301 489-1 the following performance criteria shall be applied.

- Degradation of operation permitted during test.
- Erroneous data transmission is permitted.
- No performance degradation permitted after testing complete.

### 7.2.5 VOLTAGE DIPS and INTERRUPTIONS

#### 7.2.5.1 Requirements

Testing is to be performed using the procedures and criteria contained in EN61000-4-11 and ETSI 301 489 levels required.

#### 7.2.5.2 Voltage Limits

30% dip for 10ms  
60% dip for 100ms  
95% dip for 5000ms

#### 7.2.5.3 Performance Criteria


Criteria as specified in ETSI 301 489-1 clause 9.7.3. All operating anomalies are to be reported.

## 8 SAFETY


## 9 SELV

## EUT TESTING CONFIGURATION

**Fig. 1**

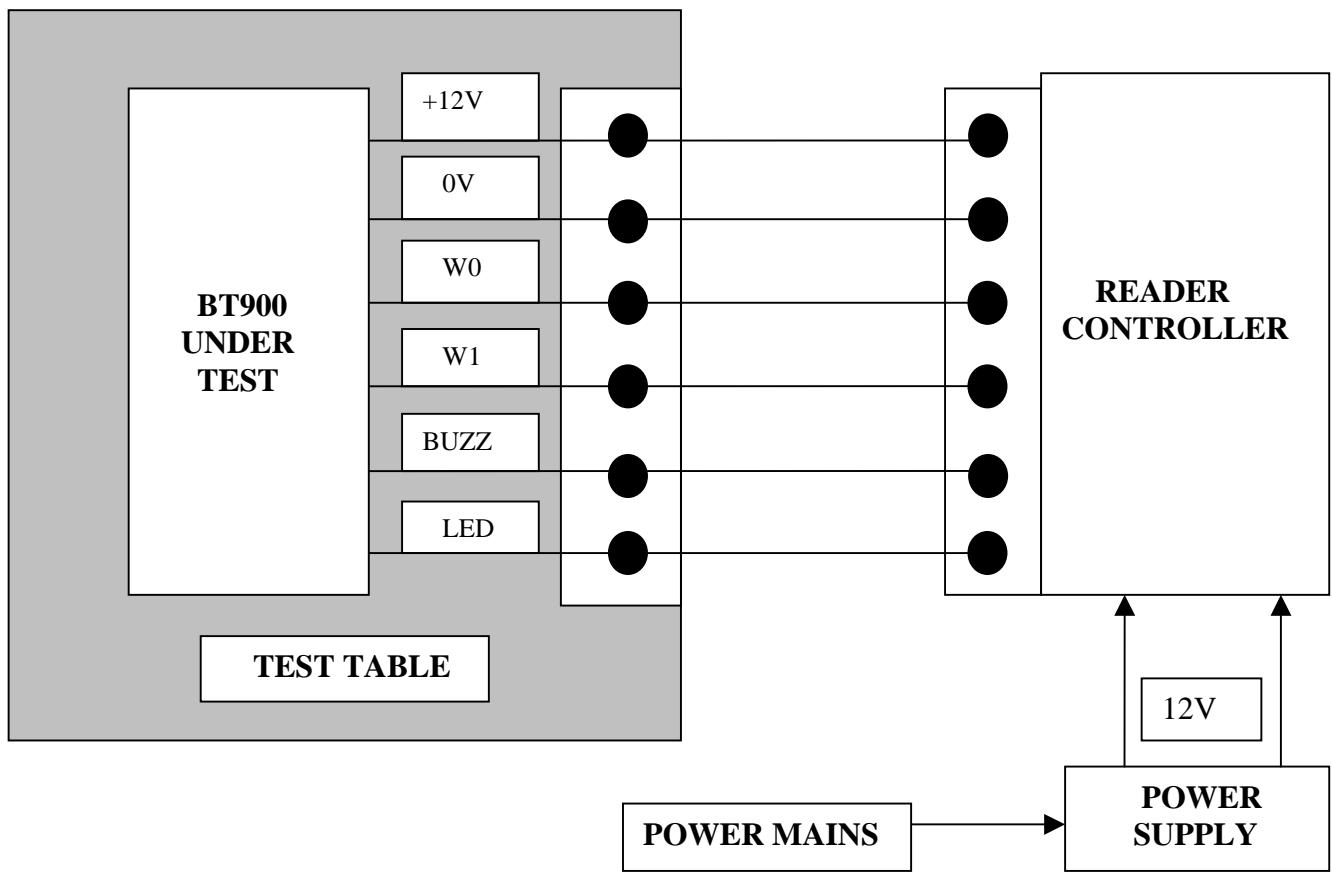

**Note:** Cable lengths are defined as per Section “1. Product Description” (page 4)

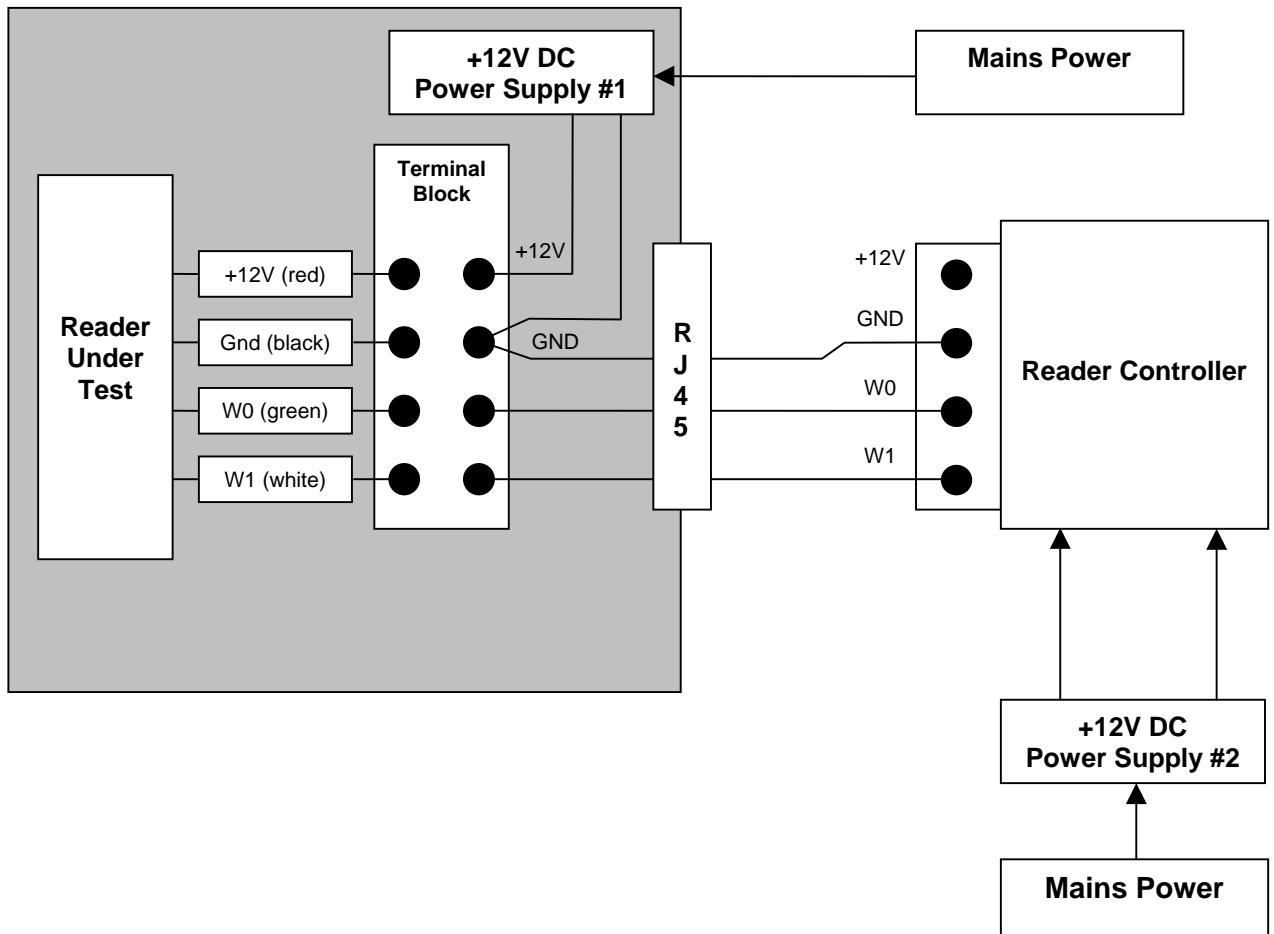

**Fig 2. Power and signal interconnections required to test a card reader for FCC.**

Note that there is no +12V DC connection between the “Reader Under Test” and the “Reader Controller”.

- Ensure that the +12V wire from the RJ45 connector is disconnected from the terminal block and insulated to avoid the possibility of short circuits.
- Ensure that the +12V wire is disconnected from the “Reader Controller” output terminal, and insulated to avoid the possibility of short circuits.

Power Supply #1 should be a Powermaster switch mode power supply, model #30D12150P (or equivalent)

Power Supply #2 may be a linear bench supply or a Powermaster supply as described above

**Note: Cable lengths are defined as per Section “1. Product Description” (page 4)**