


802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)


100kHz PSD Reference Level

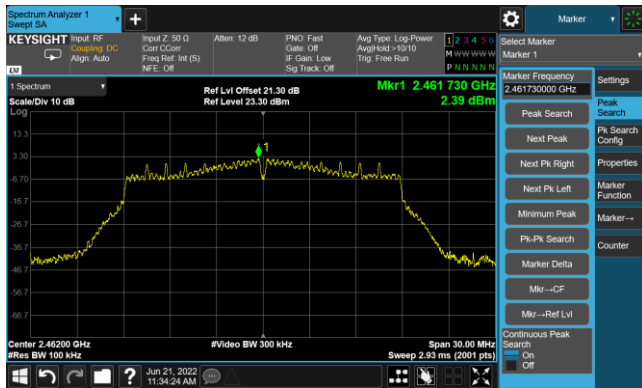

High Band Edge




Spurious Emission

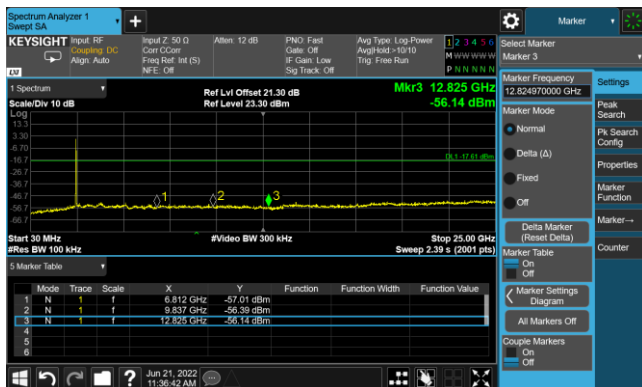

802.11n-HT40 Out-of-Band Emissions

Channel 03 (2422MHz)


100kHz PSD Reference Level

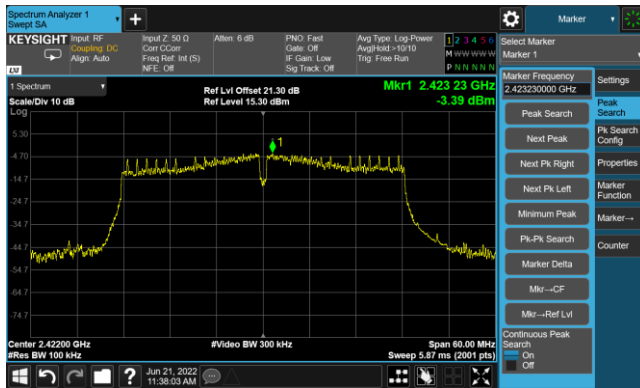

Low Band Edge




Spurious Emission

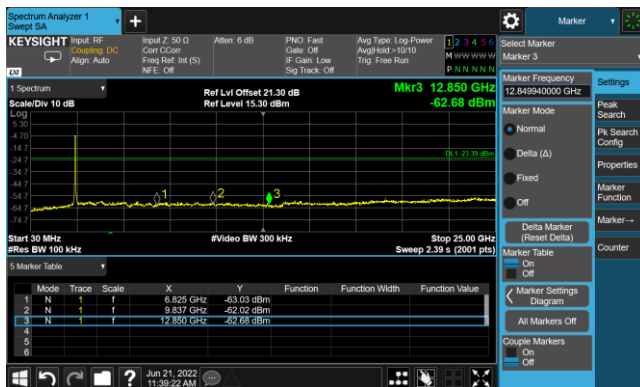


Channel 06 (2437MHz)

100kHz PSD Reference Level

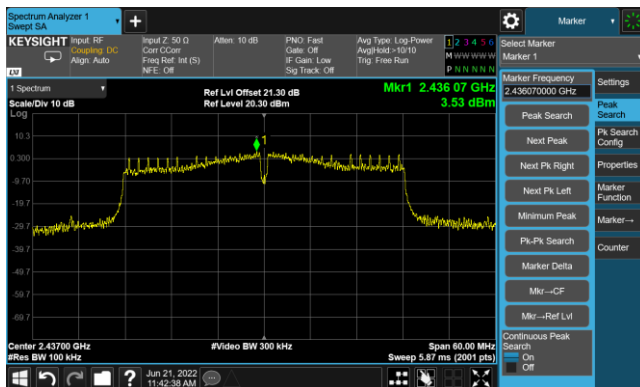


Spurious Emission

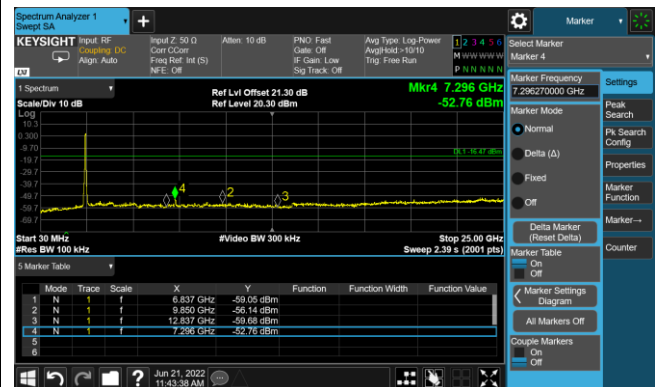

802.11n-HT40 Out-of-Band Emissions

Channel 09 (2452MHz)

100kHz PSD Reference Level

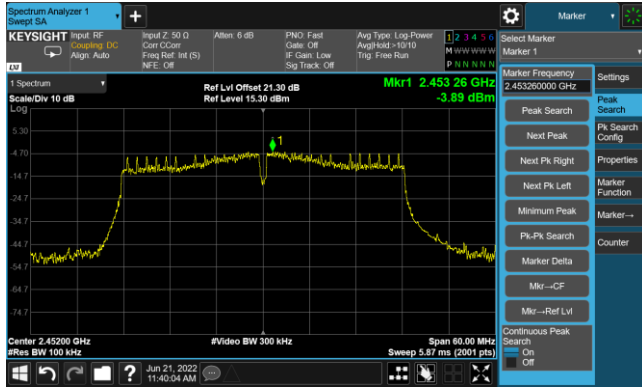

A.6 Radiated Spurious Emission Test Result

Test Site	SIP-AC3	Test Engineer	Avrin Ding
Test Date	2022/06/16	Test Mode:	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7638.5	51.1	-5.4	45.7	74.0	-28.3	Peak	Horizontal
	11956.5	51.3	-2.9	48.4	74.0	-25.6	Peak	Horizontal
	15637.0	45.9	3.7	49.6	74.0	-24.4	Peak	Horizontal
	4825.0	56.1	-8.7	47.4	74.0	-26.6	Peak	Vertical
	11021.5	49.7	-2.5	47.2	74.0	-26.8	Peak	Vertical
	15730.5	45.8	3.4	49.2	74.0	-24.8	Peak	Vertical
06	7307.0	54.0	-5.7	48.3	74.0	-25.7	Peak	Horizontal
	11990.5	51.1	-2.9	48.2	74.0	-25.8	Peak	Horizontal
	15637.0	45.3	3.7	49.0	74.0	-25.0	Peak	Horizontal
	4876.0	56.2	-8.6	47.6	74.0	-26.4	Peak	Vertical
	7307.0	57.7	-5.7	52.0	74.0	-22.0	Peak	Vertical
	7307.0	52.8	-5.7	47.1	54.0	-6.9	Average	Vertical
	11514.5	51.6	-3.2	48.4	74.0	-25.6	Peak	Vertical
11	7383.5	52.9	-5.7	47.2	74.0	-26.8	Peak	Horizontal
	9041.0	51.0	-3.3	47.7	74.0	-26.3	Peak	Horizontal
	15679.5	46.7	3.7	50.4	74.0	-23.6	Peak	Horizontal
	4927.0	55.8	-8.5	47.3	74.0	-26.7	Peak	Vertical
	7383.5	55.3	-5.7	49.6	74.0	-24.4	Peak	Vertical
	11047.0	51.1	-2.5	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Avrin Ding
Test Date	2022/06/16	Test Mode:	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	8148.5	51.3	-4.7	46.6	74.0	-27.4	Peak	Horizontal
	11438.0	50.1	-2.8	47.3	74.0	-26.7	Peak	Horizontal
	15637.0	46.3	3.7	50.0	74.0	-24.0	Peak	Horizontal
	4315.0	54.3	-9.1	45.2	74.0	-28.8	Peak	Vertical
	8412.0	52.0	-4.3	47.7	74.0	-26.3	Peak	Vertical
	12075.5	50.9	-2.8	48.1	74.0	-25.9	Peak	Vertical
06	7307.0	51.8	-5.7	46.1	74.0	-27.9	Peak	Horizontal
	11030.0	50.4	-2.5	47.9	74.0	-26.1	Peak	Horizontal
	15637.0	46.1	3.7	49.8	74.0	-24.2	Peak	Horizontal
	7315.5	56.5	-5.7	50.8	74.0	-23.2	Peak	Vertical
	11412.5	51.0	-2.9	48.1	74.0	-25.9	Peak	Vertical
	15994.0	45.2	3.9	49.1	74.0	-24.9	Peak	Vertical
11	8259.0	51.0	-4.3	46.7	74.0	-27.3	Peak	Horizontal
	11106.5	49.5	-2.8	46.7	74.0	-27.3	Peak	Horizontal
	15535.0	45.3	3.7	49.0	74.0	-25.0	Peak	Horizontal
	7383.5	53.6	-5.7	47.9	74.0	-26.1	Peak	Vertical
	11905.5	50.8	-2.8	48.0	74.0	-26.0	Peak	Vertical
	15637.0	46.3	3.7	50.0	74.0	-24.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Avrin Ding
Test Date	2022/06/16	Test Mode:	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	5020.5	51.6	-8.3	43.3	74.0	-30.7	Peak	Horizontal
	11684.5	50.6	-3.0	47.6	74.0	-26.4	Peak	Horizontal
	15722.0	47.4	3.5	50.9	74.0	-23.1	Peak	Horizontal
	4315.0	54.2	-9.1	45.1	74.0	-28.9	Peak	Vertical
	8284.5	50.5	-4.2	46.3	74.0	-27.7	Peak	Vertical
	10962.0	50.3	-2.6	47.7	74.0	-26.3	Peak	Vertical
06	7485.5	51.4	-5.5	45.9	74.0	-28.1	Peak	Horizontal
	11123.5	50.2	-2.7	47.5	74.0	-26.5	Peak	Horizontal
	15773.0	46.0	3.7	49.7	74.0	-24.3	Peak	Horizontal
	7315.5	55.9	-5.7	50.2	74.0	-23.8	Peak	Vertical
	12109.5	50.3	-2.9	47.4	74.0	-26.6	Peak	Vertical
	15501.0	46.2	3.6	49.8	74.0	-24.2	Peak	Vertical
11	7426.0	51.5	-5.5	46.0	74.0	-28.0	Peak	Horizontal
	11438.0	50.4	-2.8	47.6	74.0	-26.4	Peak	Horizontal
	15747.5	46.3	3.3	49.6	74.0	-24.4	Peak	Horizontal
	4281.0	53.0	-9.0	44.0	74.0	-30.0	Peak	Vertical
	7383.5	54.2	-5.7	48.5	74.0	-25.5	Peak	Vertical
	15645.5	45.0	3.7	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Avrin Ding
Test Date	2022/06/16	Test Mode:	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	8276.0	50.5	-4.3	46.2	74.0	-27.8	Peak	Horizontal
	10996.0	49.6	-2.6	47.0	74.0	-27.0	Peak	Horizontal
	15611.5	46.5	3.9	50.4	74.0	-23.6	Peak	Horizontal
	7409.0	50.2	-5.4	44.8	74.0	-29.2	Peak	Vertical
	11038.5	49.6	-2.5	47.1	74.0	-26.9	Peak	Vertical
	15722.0	45.9	3.5	49.4	74.0	-24.6	Peak	Vertical
06	8352.5	50.6	-4.2	46.4	74.0	-27.6	Peak	Horizontal
	11038.5	49.9	-2.5	47.4	74.0	-26.6	Peak	Horizontal
	15501.0	45.9	3.6	49.5	74.0	-24.5	Peak	Horizontal
	7298.5	54.3	-5.7	48.6	74.0	-25.4	Peak	Vertical
	11421.0	50.8	-2.9	47.9	74.0	-26.1	Peak	Vertical
	15501.0	45.5	3.6	49.1	74.0	-24.9	Peak	Vertical
09	7392.0	51.6	-5.6	46.0	74.0	-28.0	Peak	Horizontal
	11897.0	50.6	-2.8	47.8	74.0	-26.2	Peak	Horizontal
	15713.5	46.8	3.7	50.5	74.0	-23.5	Peak	Horizontal
	4298.0	54.7	-8.8	45.9	74.0	-28.1	Peak	Vertical
	7358.0	54.4	-5.7	48.7	74.0	-25.3	Peak	Vertical
	12075.5	50.5	-2.8	47.7	74.0	-26.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Worst-case of Radiated Spurious Emission for below 1GHz:

Site: SIP-AC1	Test Date: 2022/06/12
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

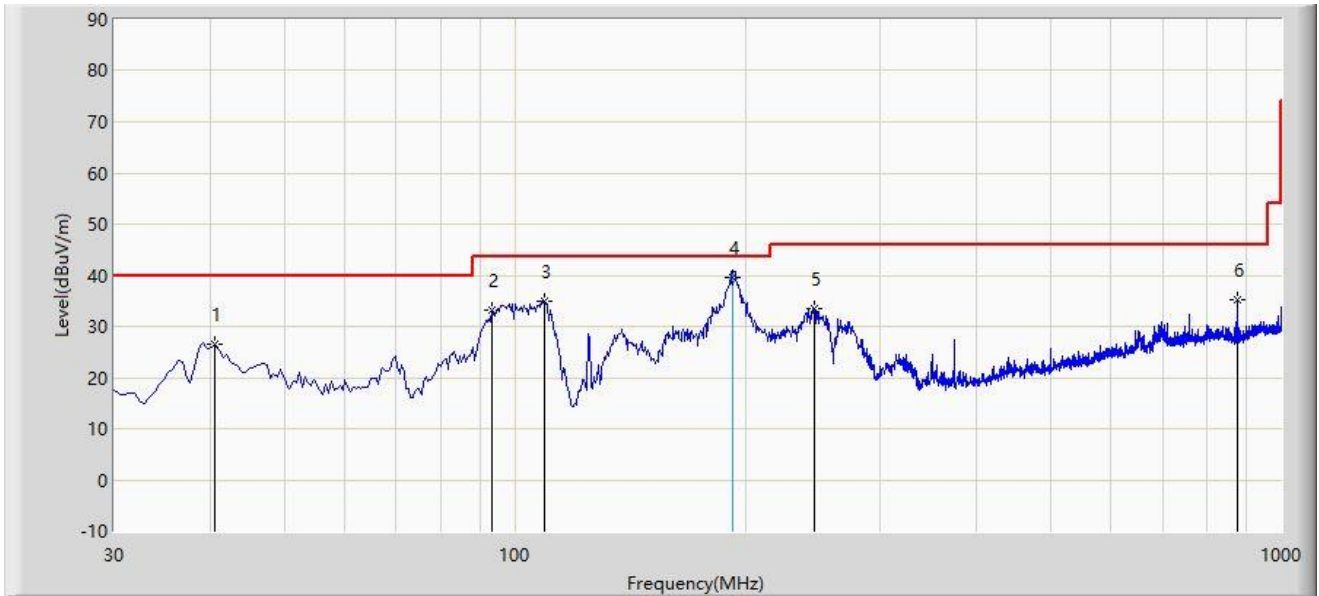

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		40.670	26.513	9.116	-13.487	40.000	17.397	PK
2		93.535	33.102	20.709	-10.398	43.500	12.393	PK
3		109.540	34.975	20.190	-8.525	43.500	14.785	PK
4	*	192.500	39.698	24.700	-3.802	43.500	14.998	QP
5		246.310	33.535	17.176	-12.465	46.000	16.359	PK
6		874.870	35.224	7.116	-10.776	46.000	28.108	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC1	Test Date: 2022/06/12
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

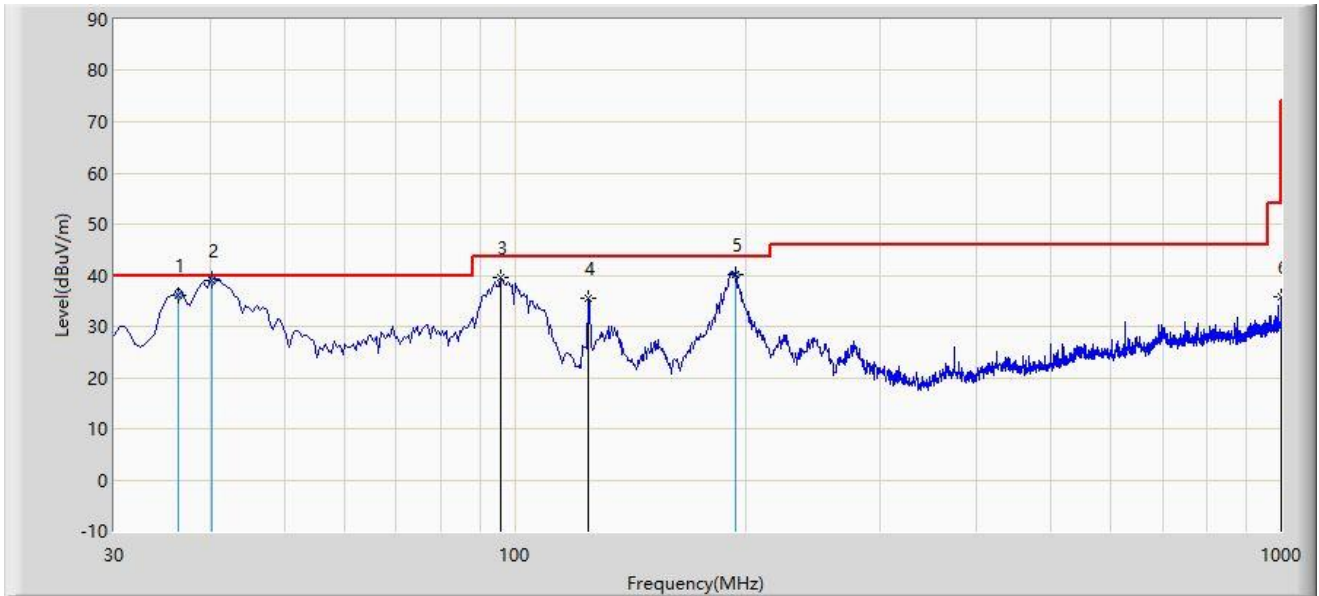

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		36.400	36.011	19.000	-3.989	40.000	17.012	QP
2	*	40.200	39.059	21.700	-0.941	40.000	17.359	QP
3		95.960	39.462	26.702	-4.038	43.500	12.760	PK
4		124.575	35.401	19.527	-8.099	43.500	15.875	PK
5		194.320	40.076	25.200	-3.424	43.500	14.876	QP
6		1000.000	35.898	5.895	-18.102	54.000	30.003	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: SIP-AC3	Test Date: 2022/06/15 - 23:43
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

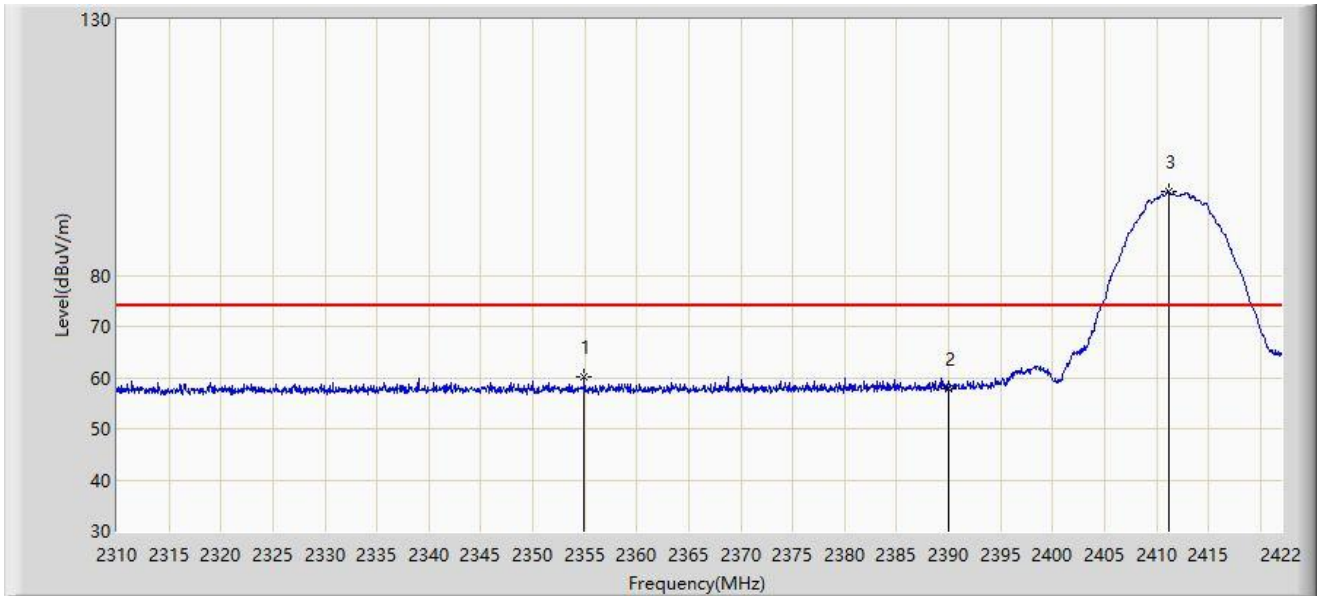


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2354.968	60.062	28.209	-13.938	74.000	31.853	PK
2		2390.000	57.803	25.864	-16.197	74.000	31.939	PK
3		2411.136	96.393	64.305	N/A	N/A	32.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/15 - 23:53
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

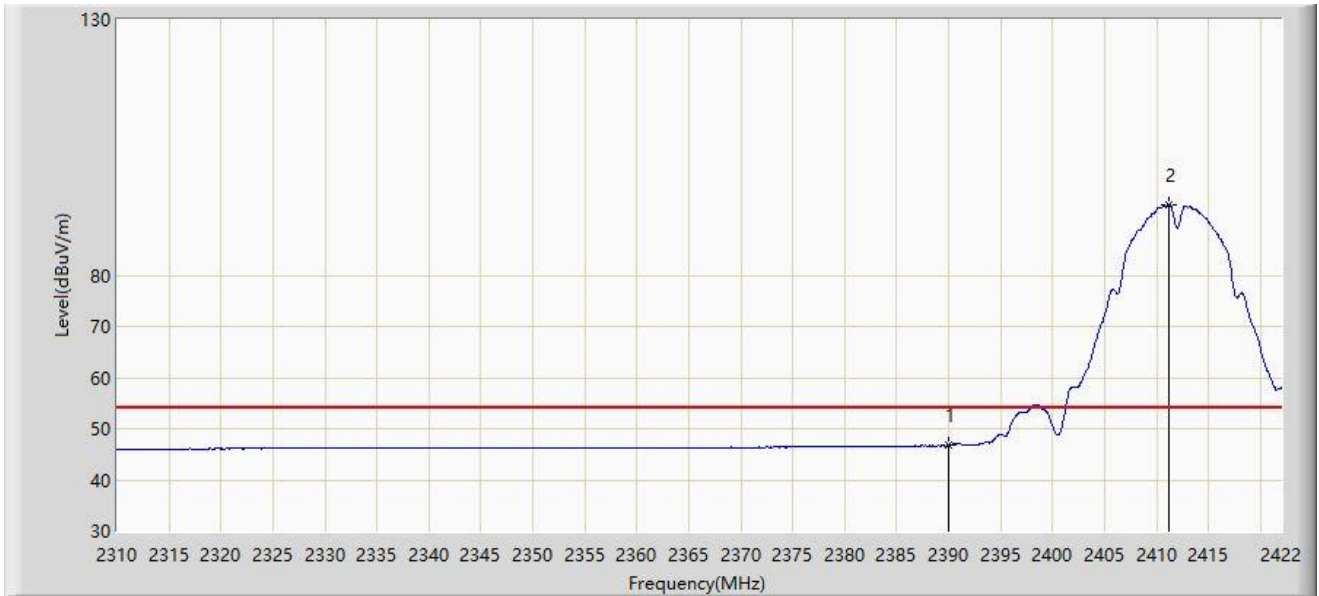


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	46.698	14.759	-7.302	54.000	31.939	AV
2		2411.192	93.831	61.743	N/A	N/A	32.088	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/15 - 23:54
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

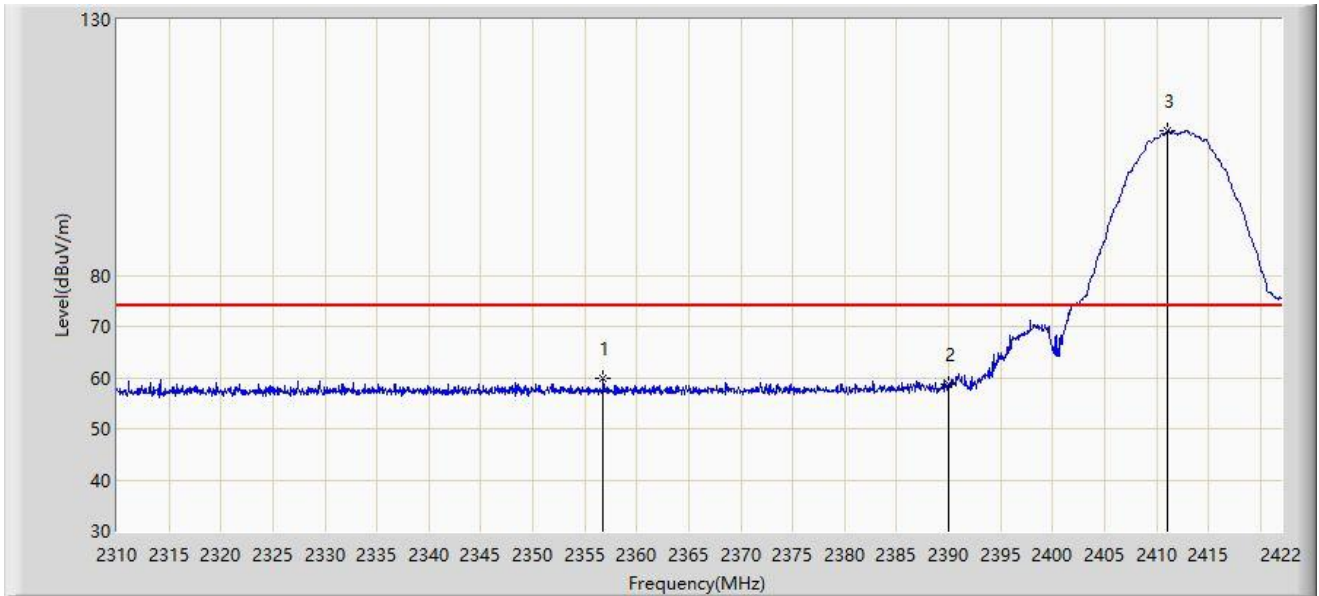


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2356.760	59.733	27.873	-14.267	74.000	31.861	PK
2		2390.000	58.728	26.789	-15.272	74.000	31.939	PK
3		2411.024	108.253	76.165	N/A	N/A	32.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/15 - 23:57
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

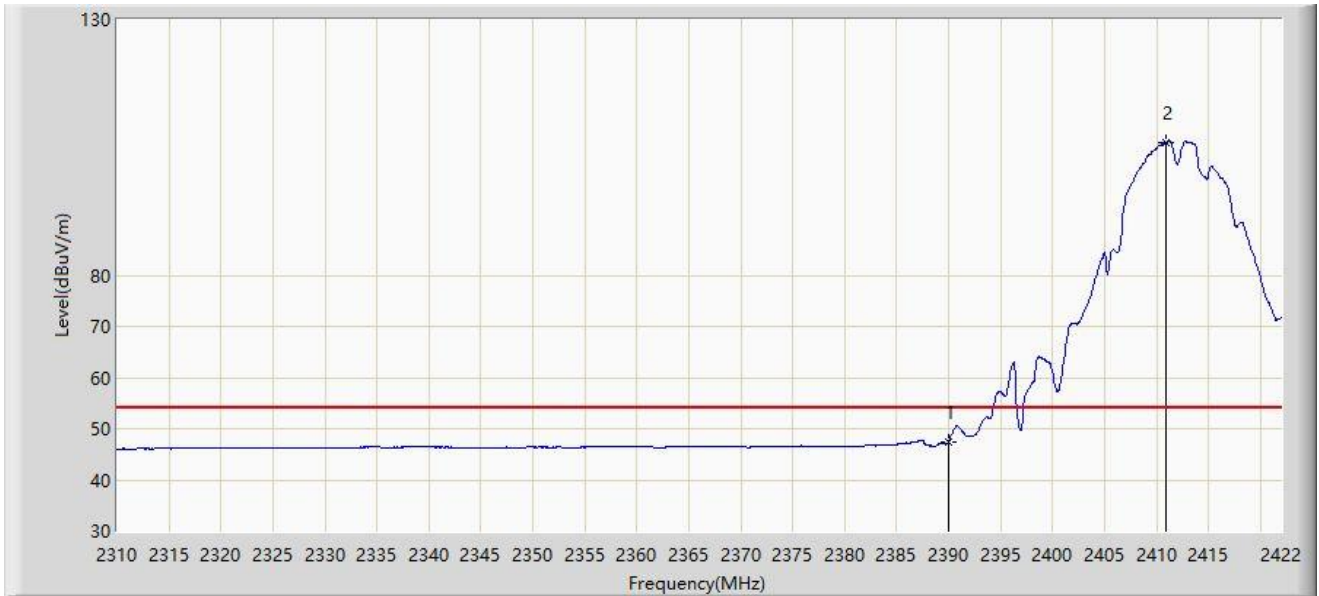


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	47.462	15.523	-6.538	54.000	31.939	AV
2		2410.968	105.940	73.852	N/A	N/A	32.088	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:01
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

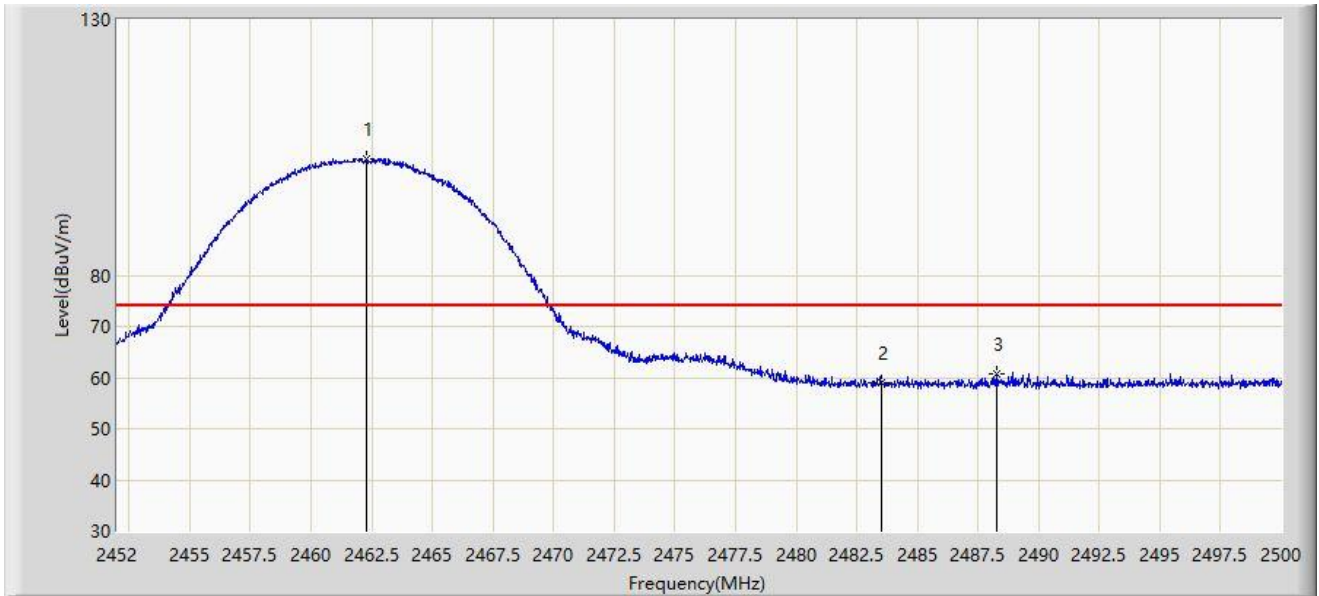


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.296	102.734	70.508	N/A	N/A	32.226	PK
2		2483.500	58.920	26.605	-15.080	74.000	32.315	PK
3	*	2488.264	60.620	28.281	-13.380	74.000	32.340	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:04
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

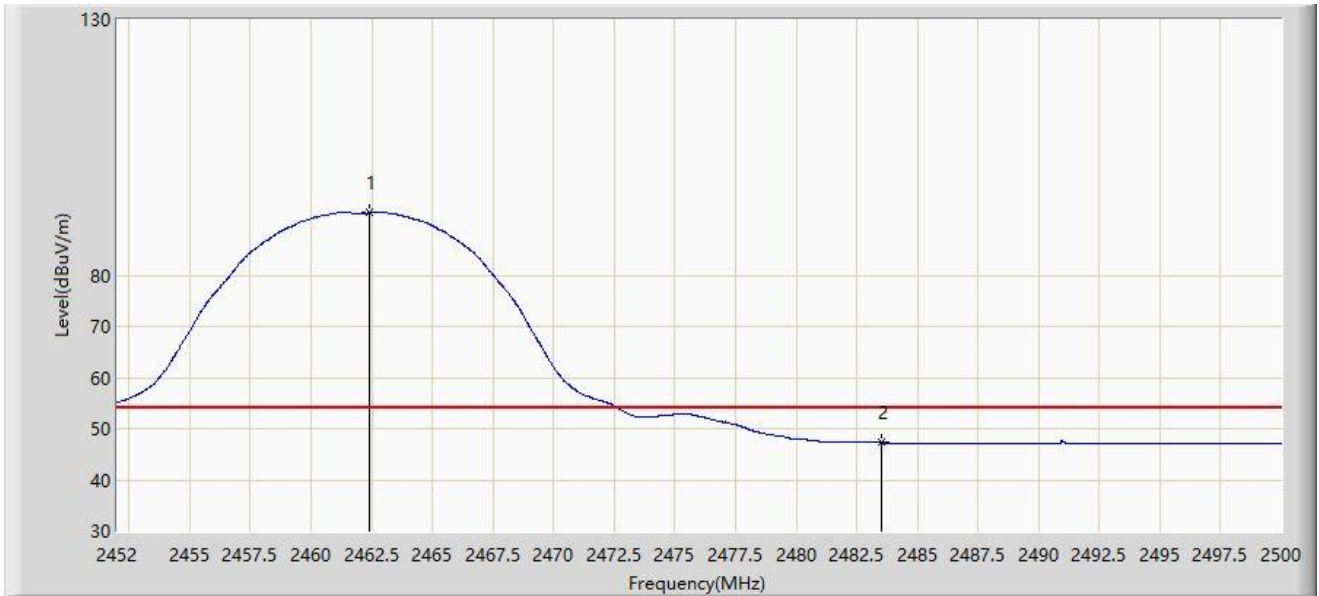


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.416	92.290	60.063	N/A	N/A	32.226	AV
2	*	2483.500	47.297	14.982	-6.703	54.000	32.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:05
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

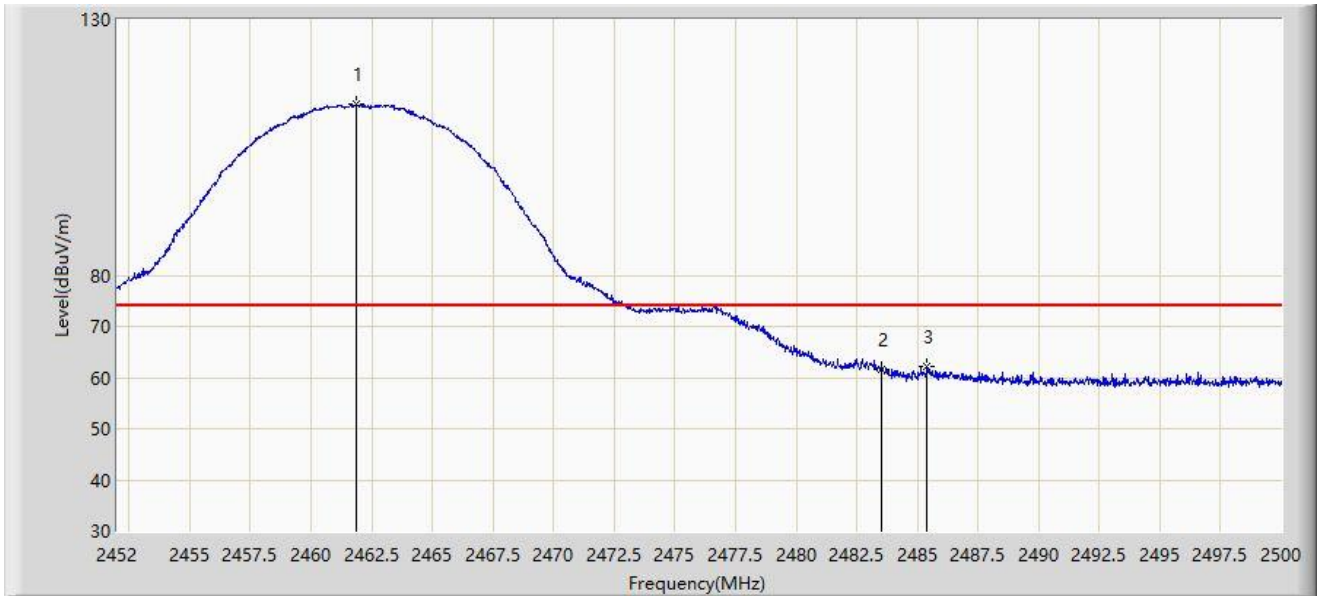


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.864	113.449	81.225	N/A	N/A	32.225	PK
2		2483.500	61.596	29.281	-12.404	74.000	32.315	PK
3	*	2485.408	62.131	29.806	-11.869	74.000	32.325	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:08
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

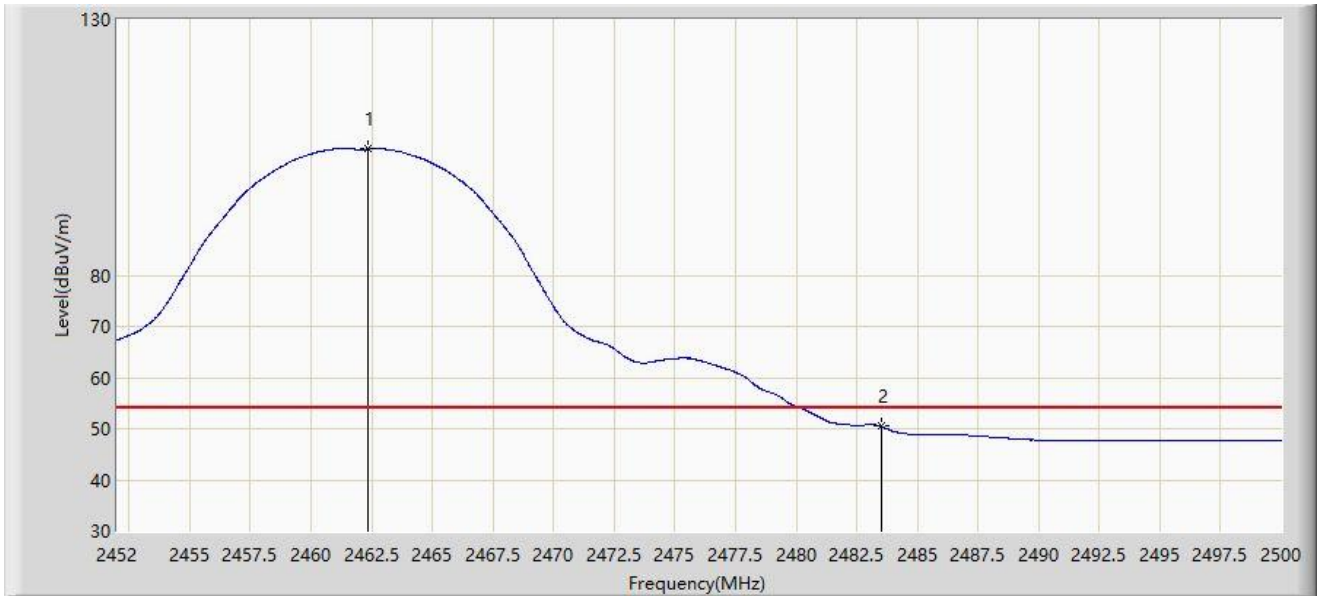


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.368	104.695	72.468	N/A	N/A	32.226	AV
2	*	2483.500	50.444	18.129	-3.556	54.000	32.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:28
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

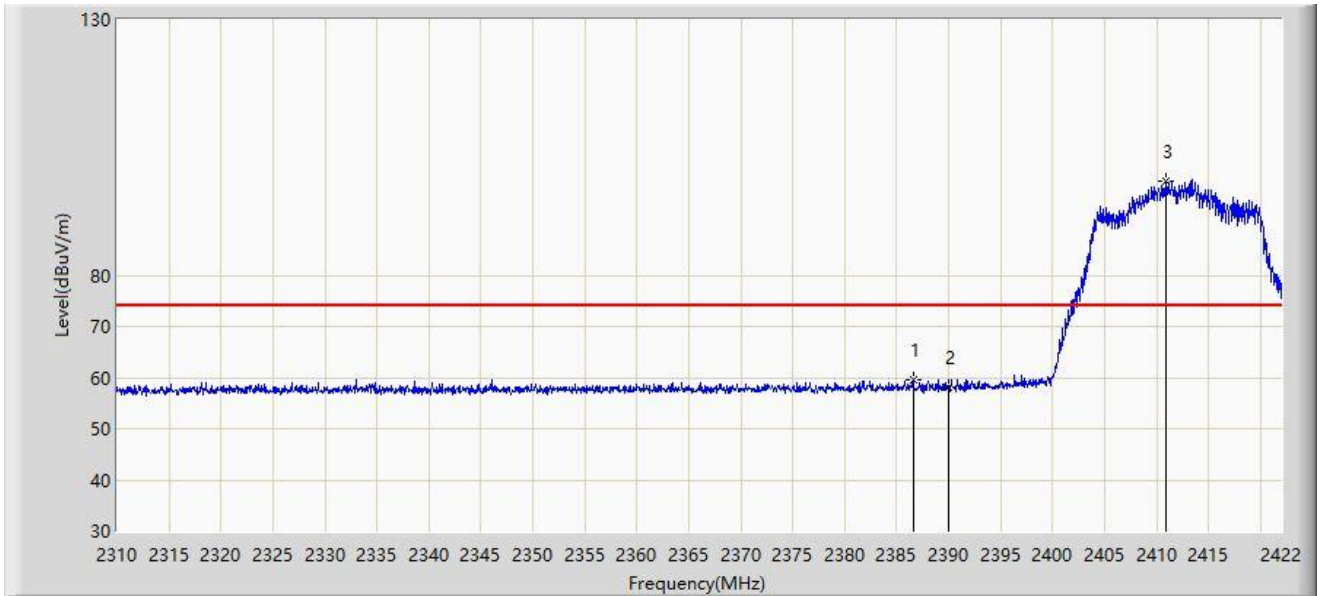


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.608	59.652	27.734	-14.348	74.000	31.919	PK
2		2390.000	58.017	26.078	-15.983	74.000	31.939	PK
3		2410.856	98.344	66.257	N/A	N/A	32.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:29
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

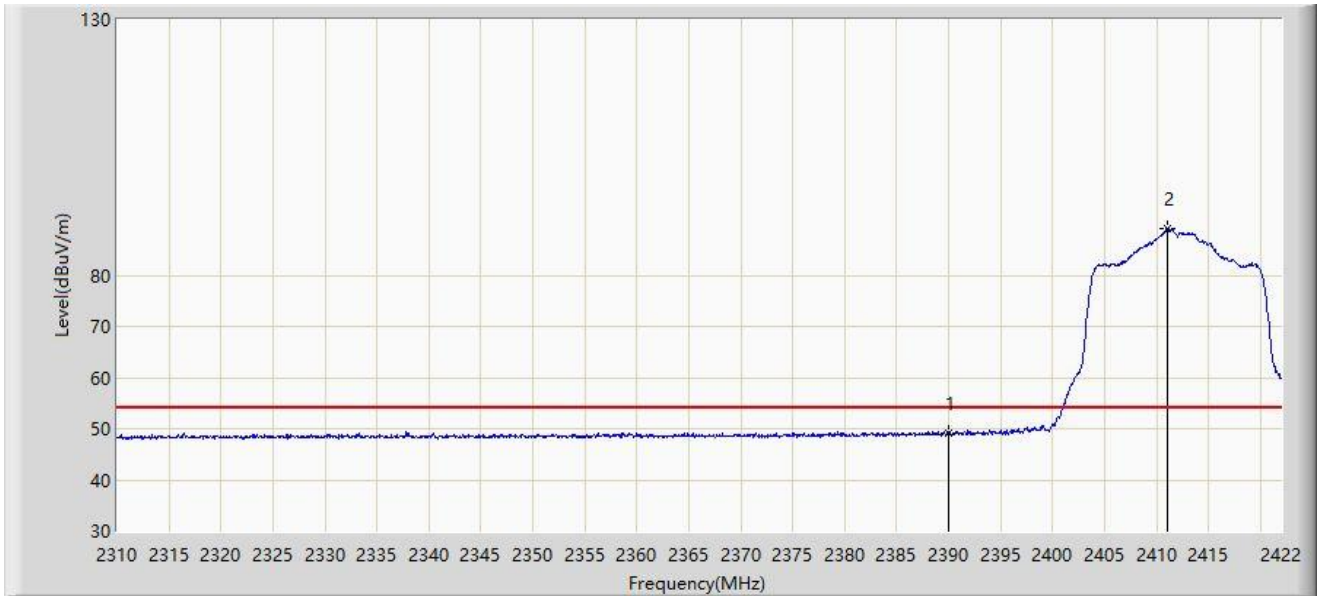


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.271	17.332	-4.729	54.000	31.939	AV
2		2411.080	89.198	57.110	N/A	N/A	32.088	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:27
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

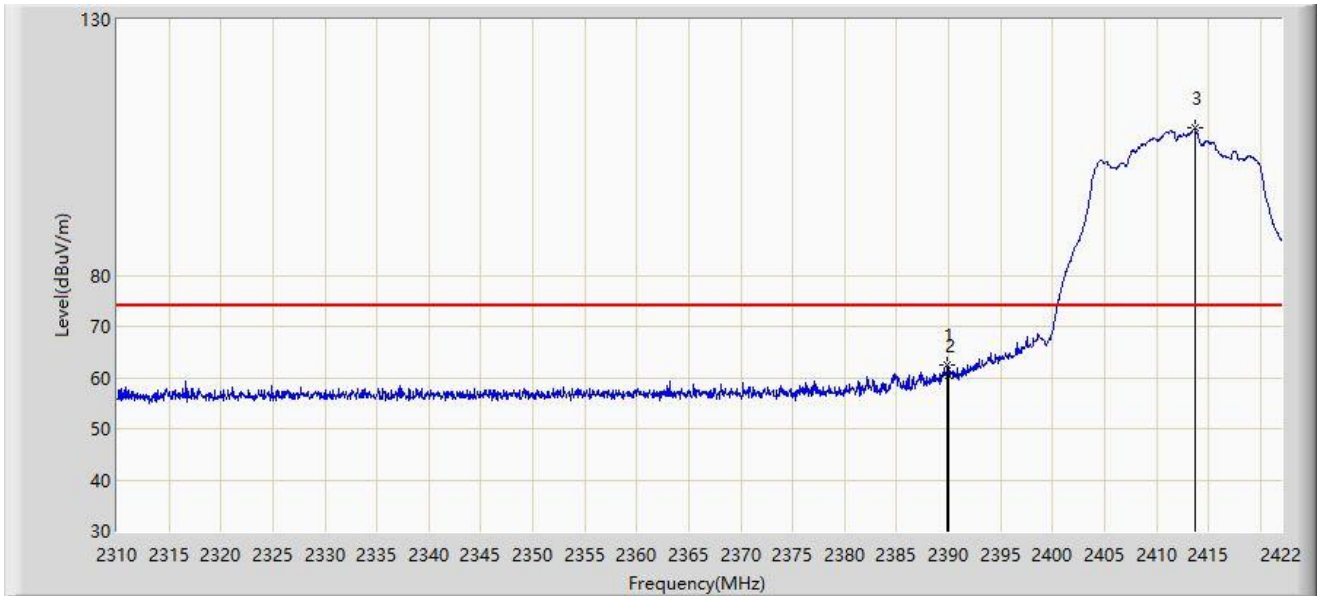


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	62.516	30.578	-11.484	74.000	31.938	PK
2		2390.000	60.314	28.375	-13.686	74.000	31.939	PK
3		2413.656	108.854	76.769	N/A	N/A	32.085	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:26
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

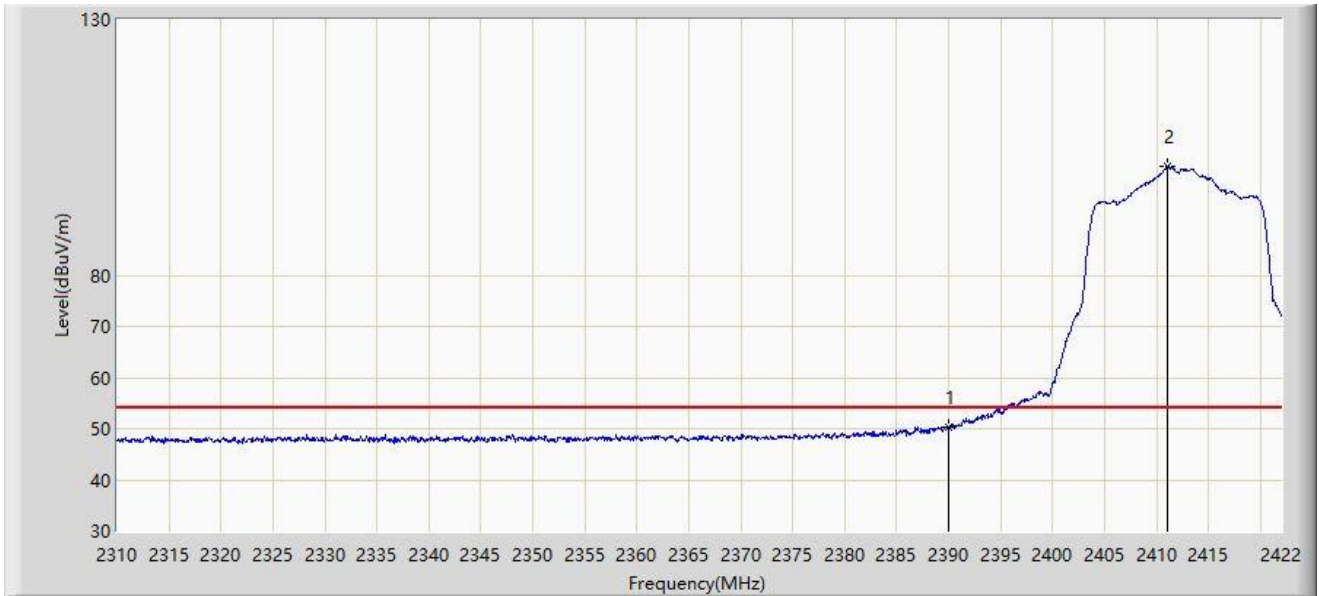


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.293	18.354	-3.707	54.000	31.939	AV
2		2411.024	101.276	69.188	N/A	N/A	32.088	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:35
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

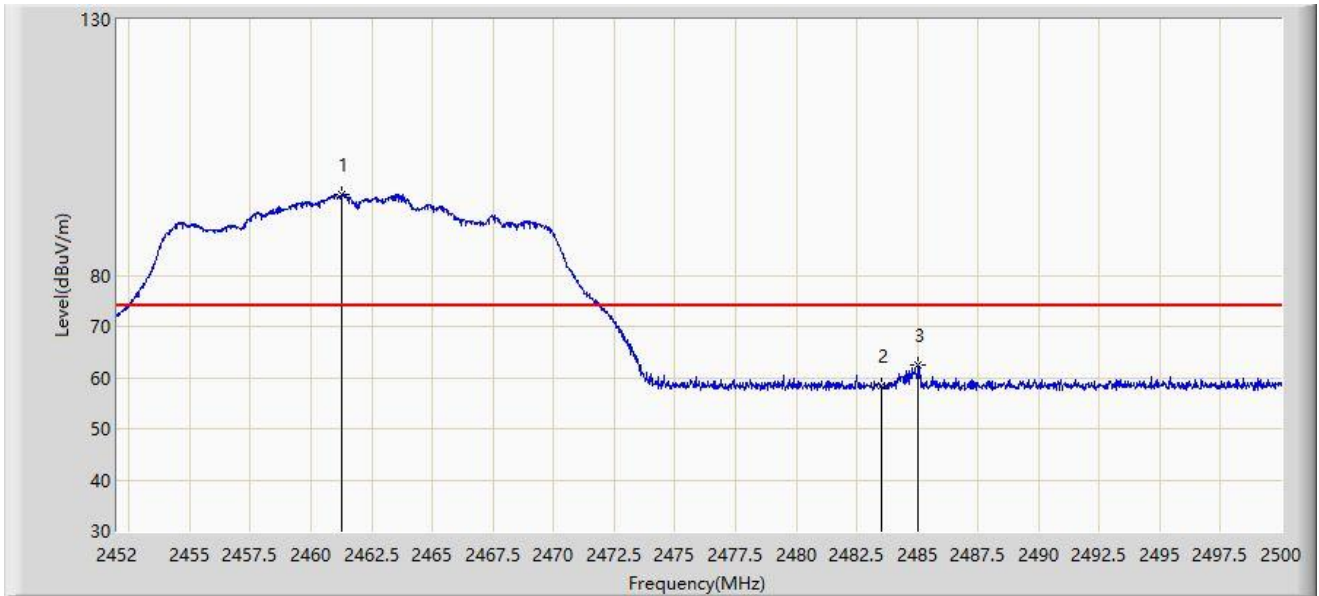


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.264	95.723	63.503	N/A	N/A	32.220	PK
2		2483.500	58.364	26.049	-15.636	74.000	32.315	PK
3	*	2485.024	62.565	30.242	-11.435	74.000	32.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:37
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

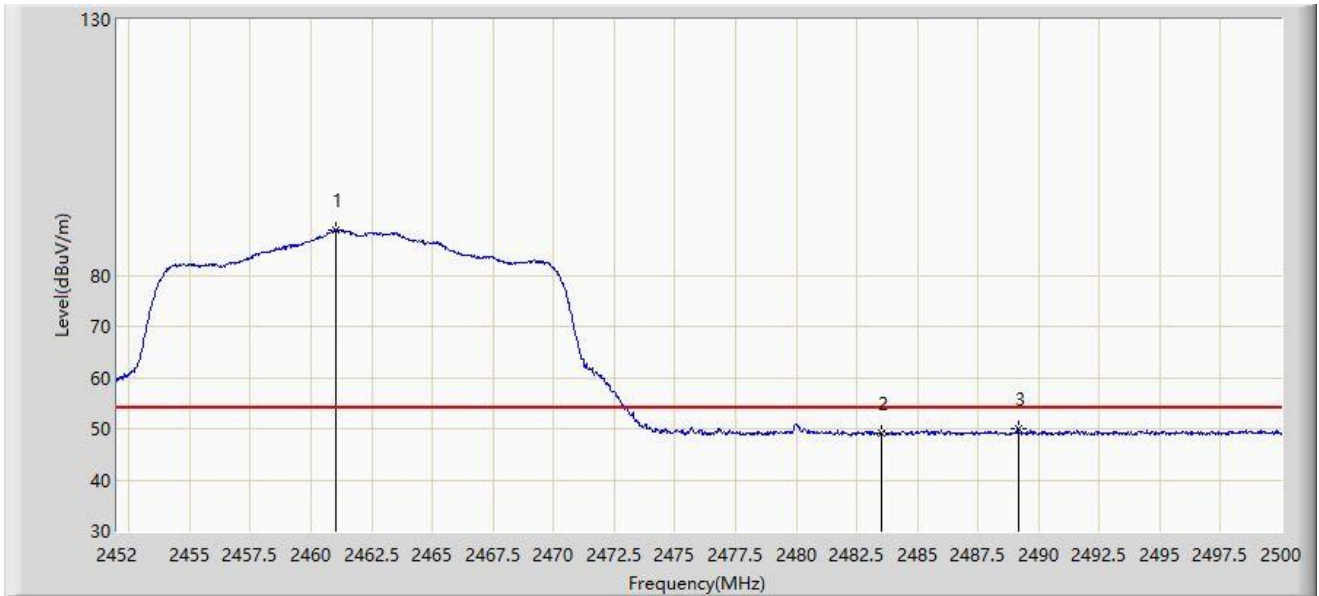


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.048	88.951	56.732	N/A	N/A	32.219	AV
2		2483.500	49.188	16.873	-4.812	54.000	32.315	AV
3	*	2489.152	49.885	17.541	-4.115	54.000	32.343	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:35
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

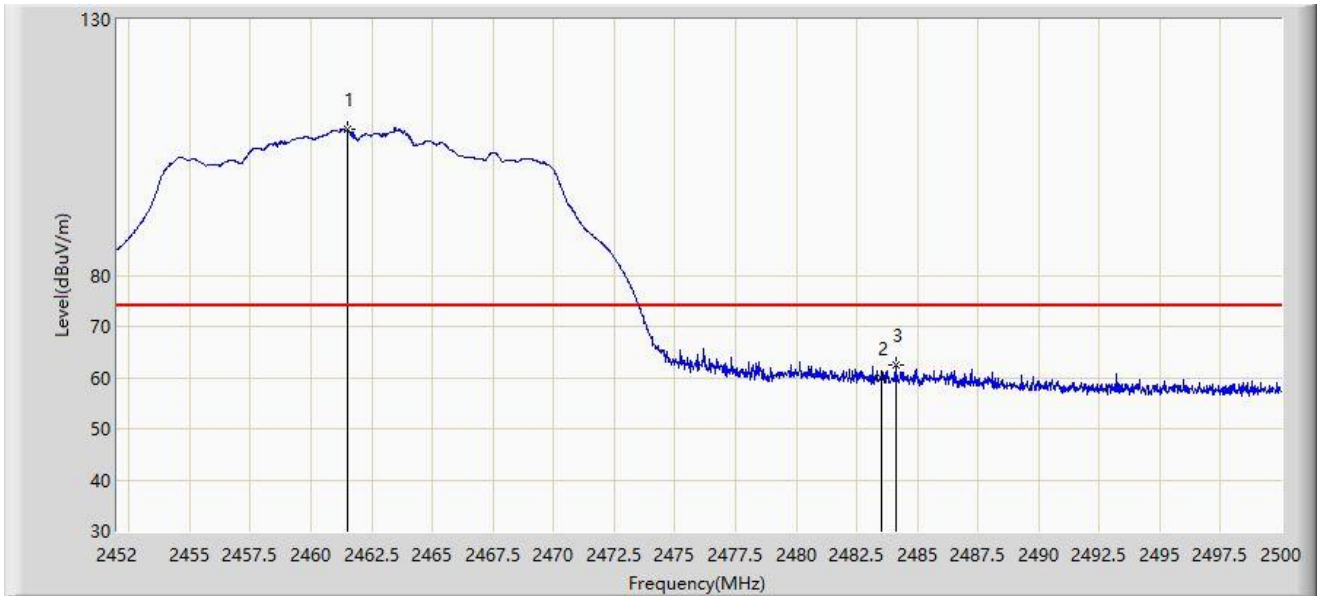


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.528	108.476	76.254	N/A	N/A	32.222	PK
2		2483.500	59.795	27.480	-14.205	74.000	32.315	PK
3	*	2484.112	62.507	30.189	-11.493	74.000	32.318	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:34
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

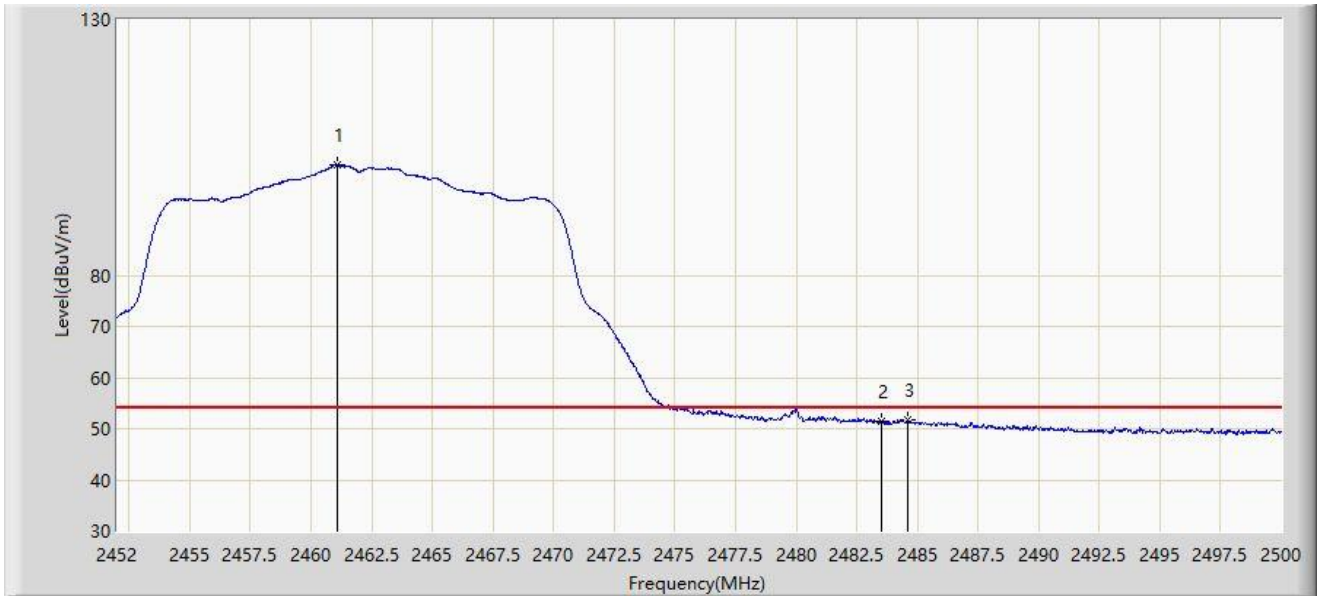


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.072	101.609	69.390	N/A	N/A	32.219	AV
2		2483.500	51.405	19.090	-2.595	54.000	32.315	AV
3	*	2484.592	51.596	19.275	-2.404	54.000	32.320	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:46
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

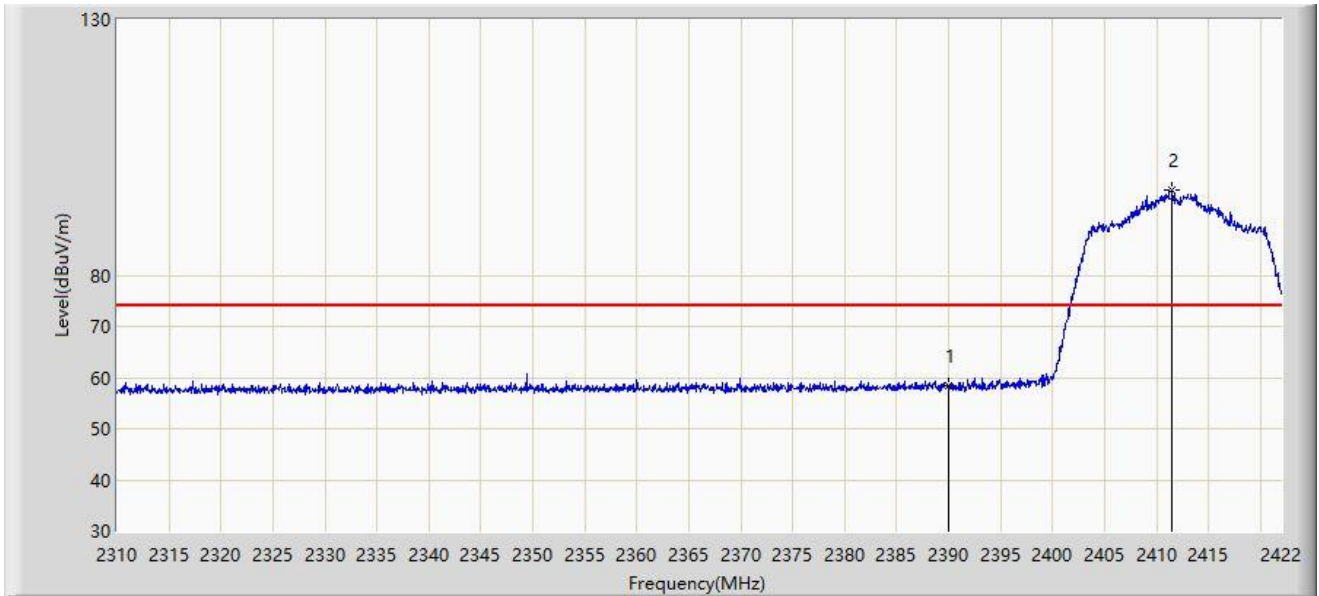


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	58.341	26.402	-15.659	74.000	31.939	PK
2		2411.472	96.576	64.488	N/A	N/A	32.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:48
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

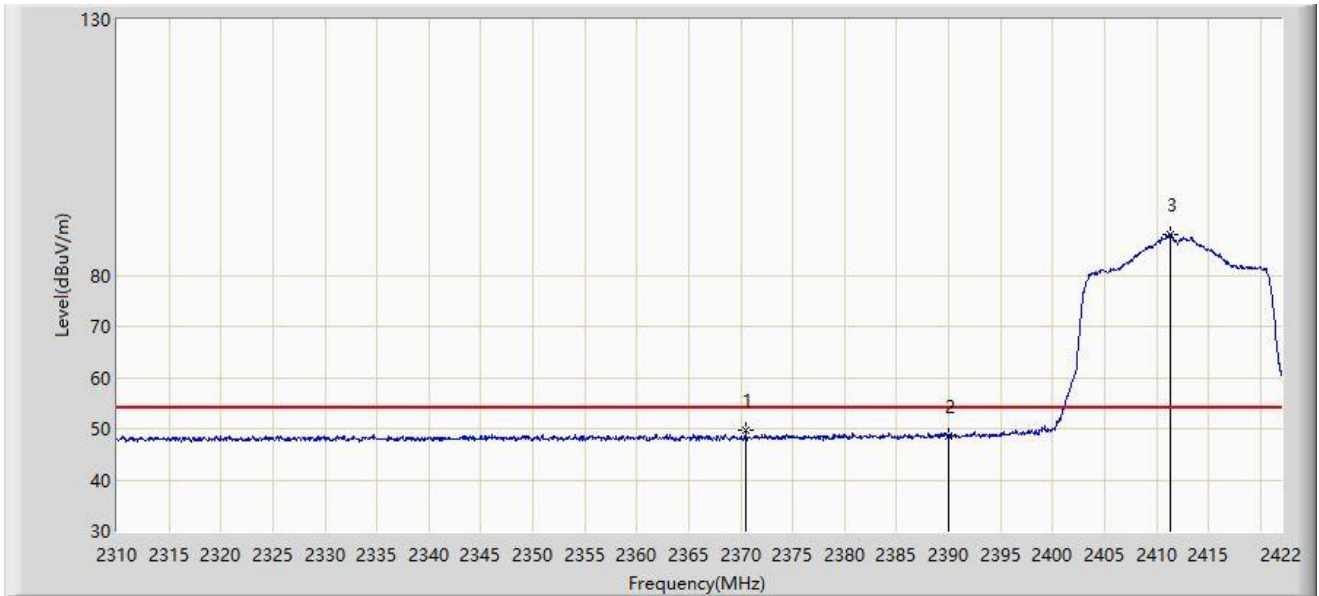


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2370.480	49.768	17.902	-4.232	54.000	31.866	AV
2		2390.000	48.573	16.634	-5.427	54.000	31.939	AV
3		2411.360	88.000	55.912	N/A	N/A	32.088	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:45
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

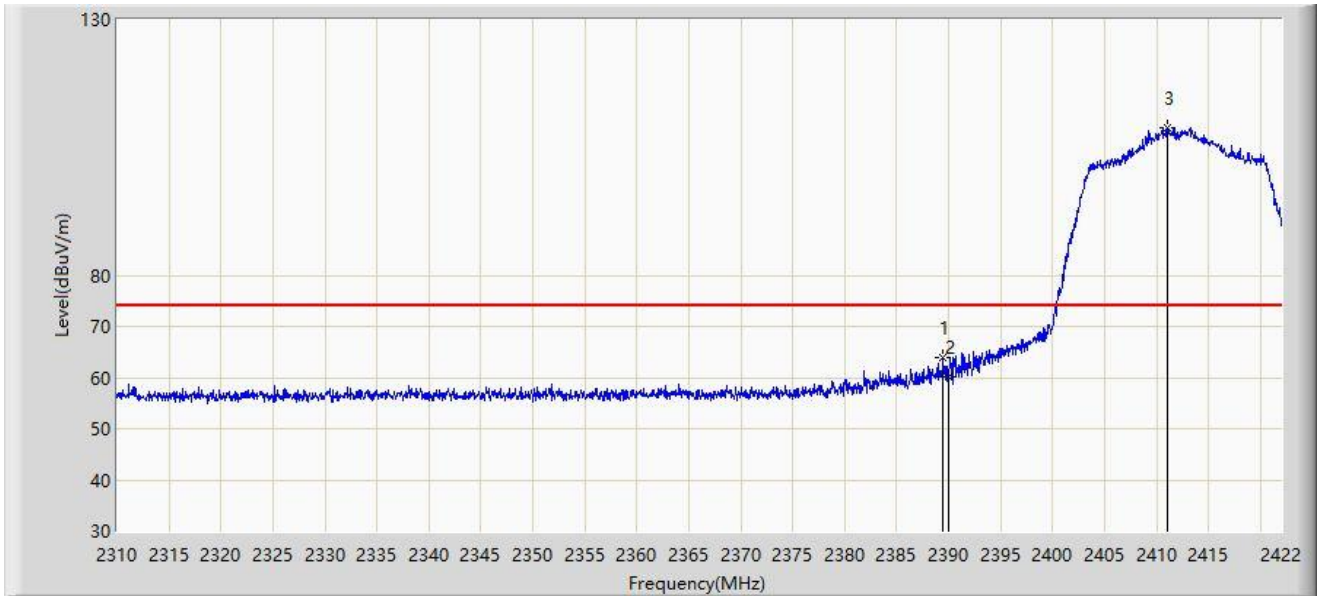


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.464	63.843	31.907	-10.157	74.000	31.936	PK
2		2390.000	60.112	28.173	-13.888	74.000	31.939	PK
3		2411.080	108.731	76.643	N/A	N/A	32.088	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:45
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

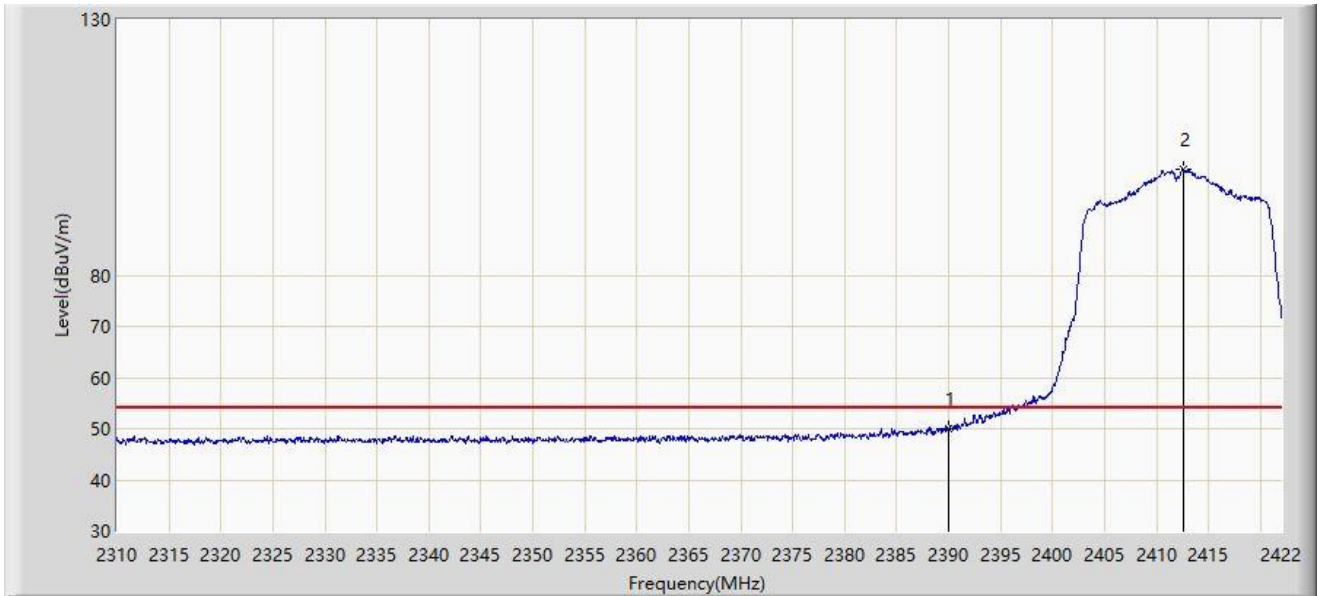


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.071	18.132	-3.929	54.000	31.939	AV
2		2412.592	100.752	68.666	N/A	N/A	32.086	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:52
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

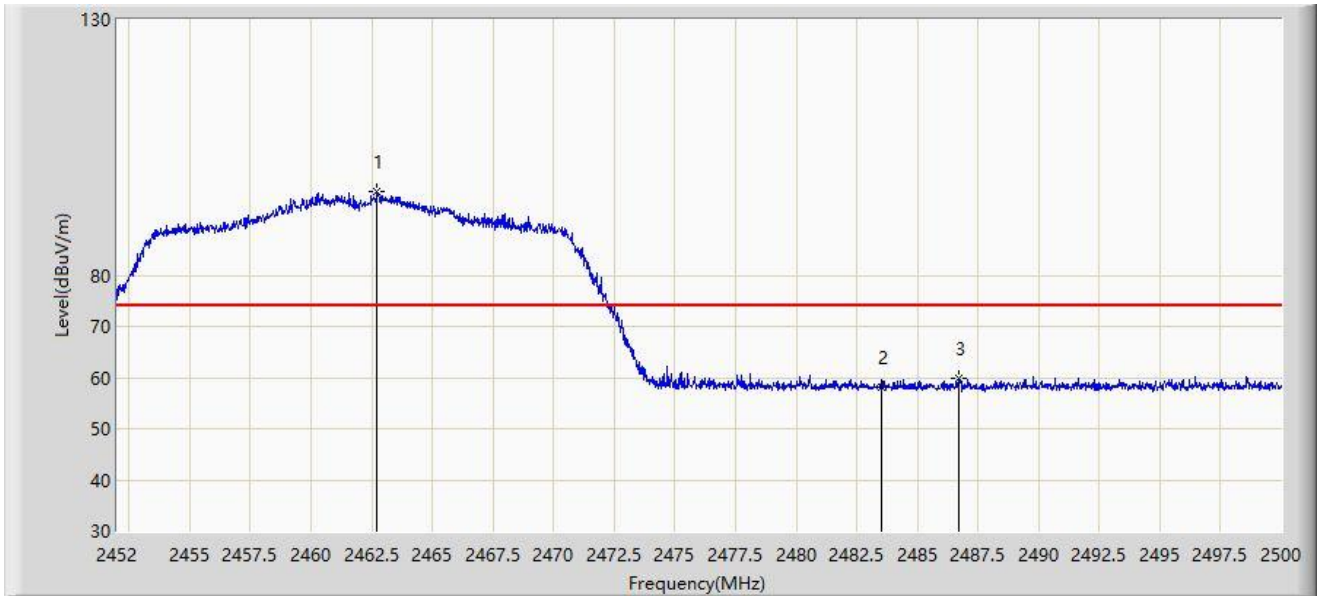


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.728	96.342	64.114	N/A	N/A	32.228	PK
2		2483.500	58.009	25.694	-15.991	74.000	32.315	PK
3	*	2486.680	59.761	27.430	-14.239	74.000	32.331	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:54
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

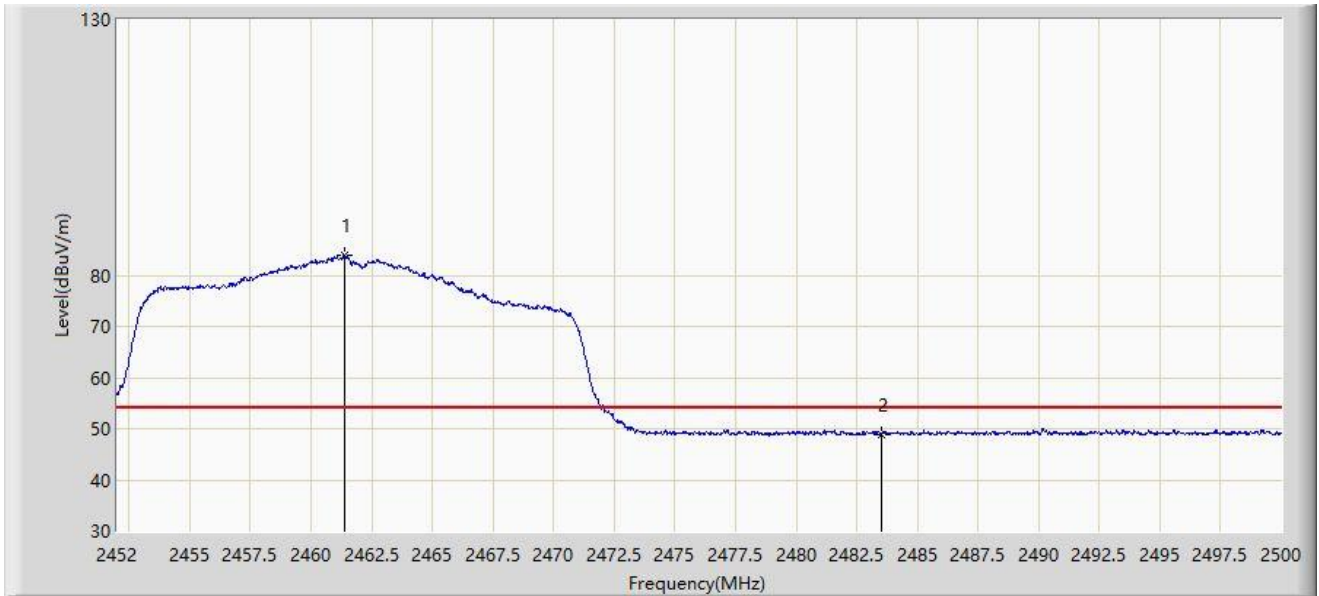


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.360	83.959	51.738	N/A	N/A	32.221	AV
2	*	2483.500	48.969	16.654	-5.031	54.000	32.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:52
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

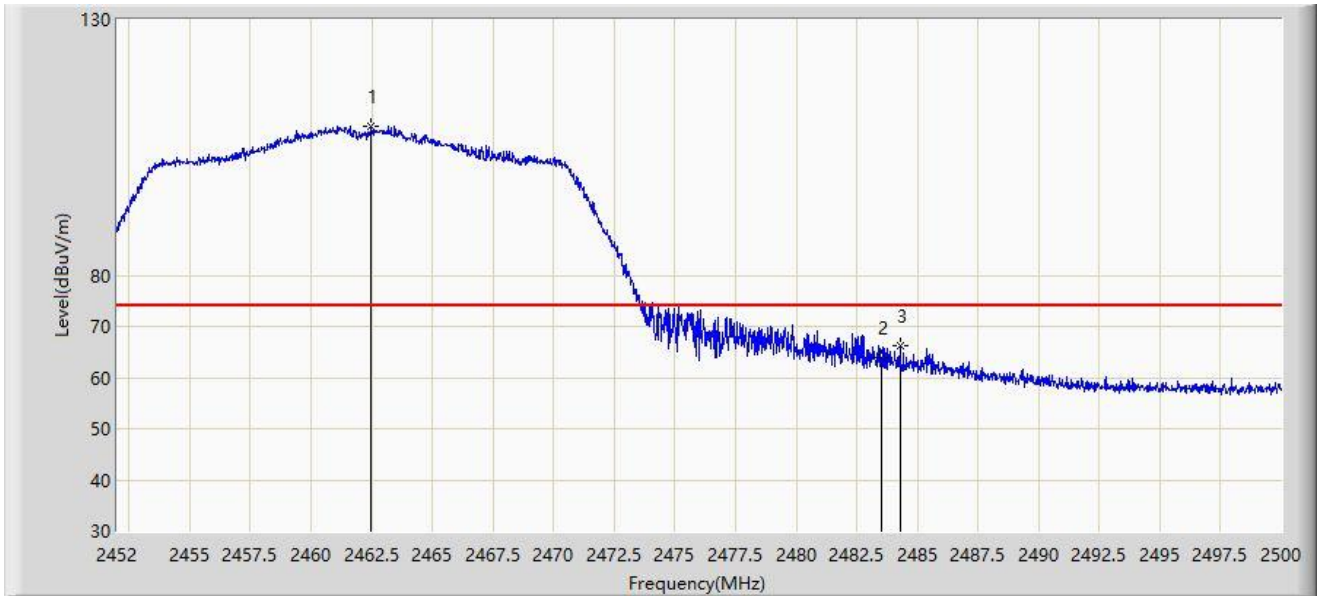


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.464	109.065	76.838	N/A	N/A	32.227	PK
2		2483.500	63.945	31.630	-10.055	74.000	32.315	PK
3	*	2484.280	66.264	33.945	-7.736	74.000	32.319	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 00:51
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

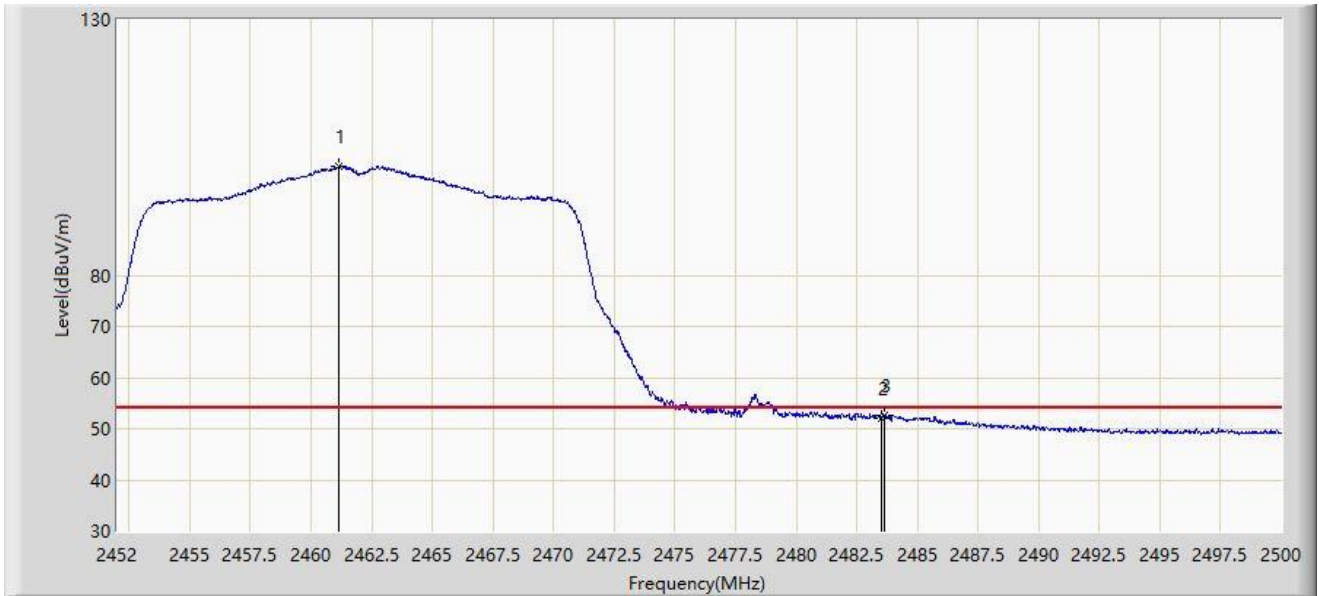


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.168	101.297	69.077	N/A	N/A	32.220	AV
2		2483.500	51.908	19.593	-2.092	54.000	32.315	AV
3	*	2483.656	52.681	20.365	-1.319	54.000	32.316	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:02
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

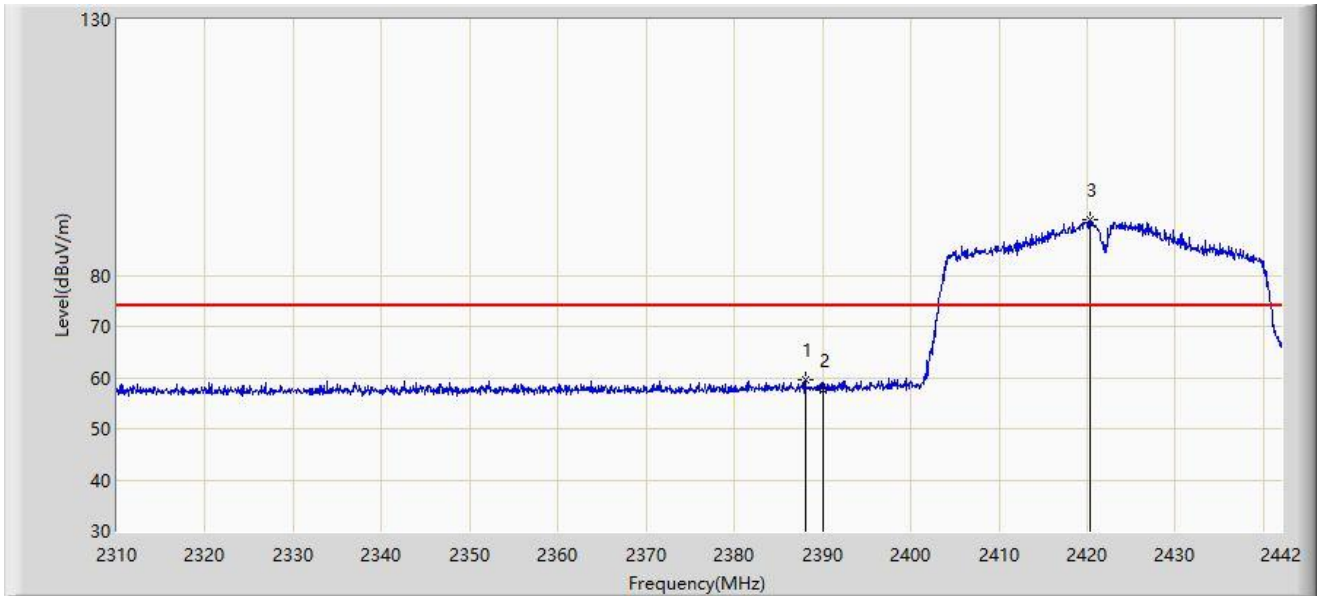


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.012	59.683	27.756	-14.317	74.000	31.927	PK
2		2390.000	57.651	25.712	-16.349	74.000	31.939	PK
3		2420.352	90.735	58.659	N/A	N/A	32.076	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:03
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

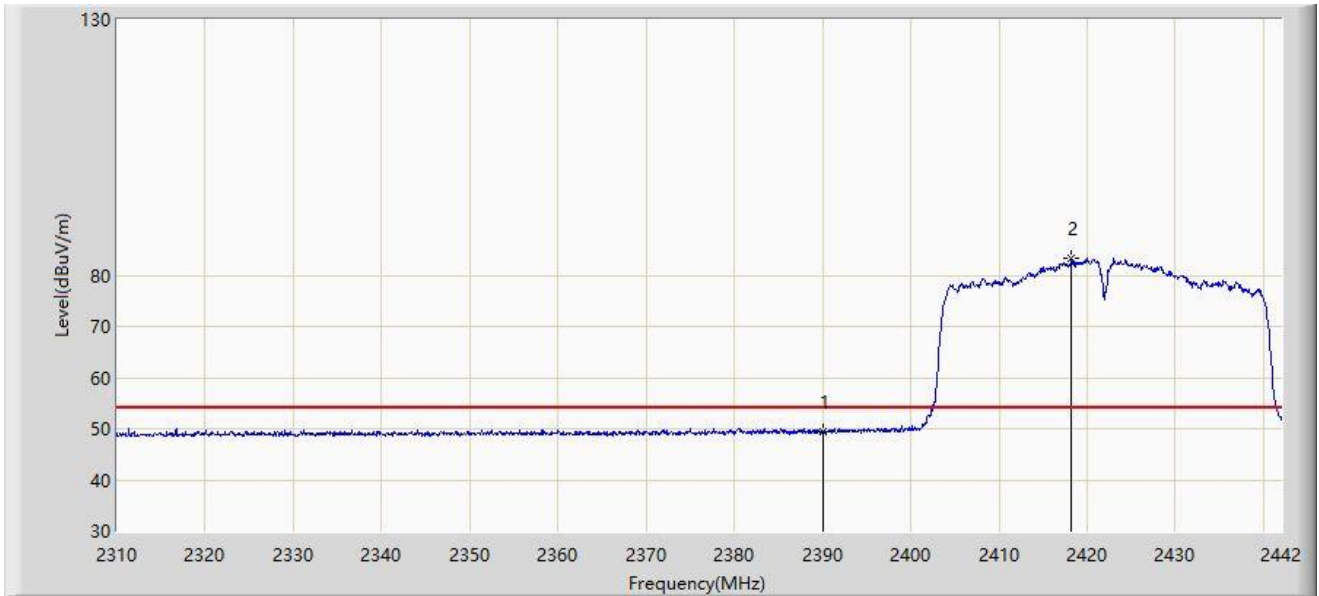


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.421	17.482	-4.579	54.000	31.939	AV
2		2418.240	83.242	51.163	N/A	N/A	32.079	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:01
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

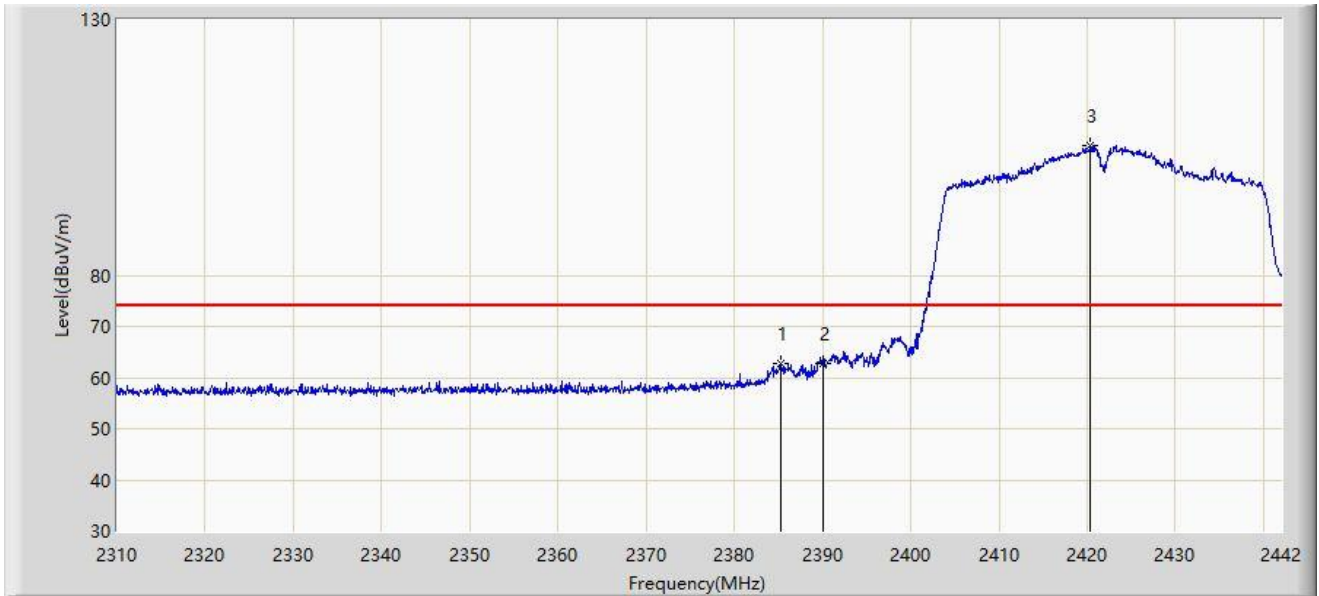


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.240	62.881	30.971	-11.119	74.000	31.911	PK
2		2390.000	62.702	30.763	-11.298	74.000	31.939	PK
3		2420.352	105.322	73.246	N/A	N/A	32.076	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:00
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

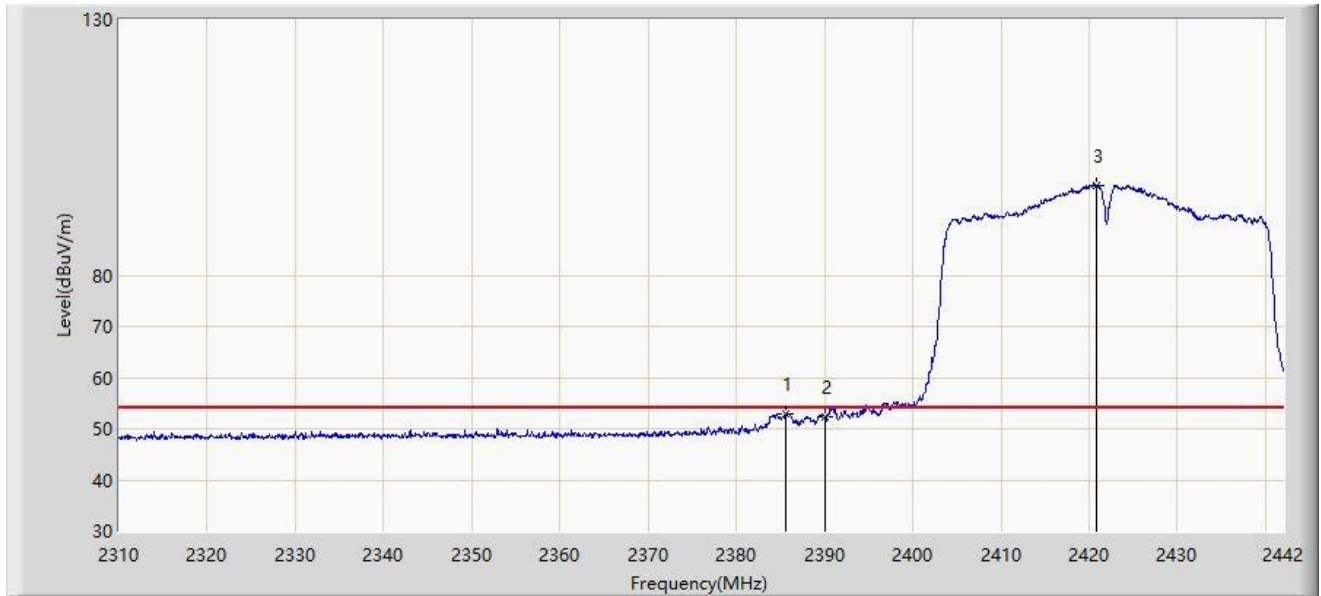


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.636	52.892	20.979	-1.108	54.000	31.913	AV
2		2390.000	52.340	20.401	-1.660	54.000	31.939	AV
3		2420.748	97.552	65.476	N/A	N/A	32.076	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:11
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

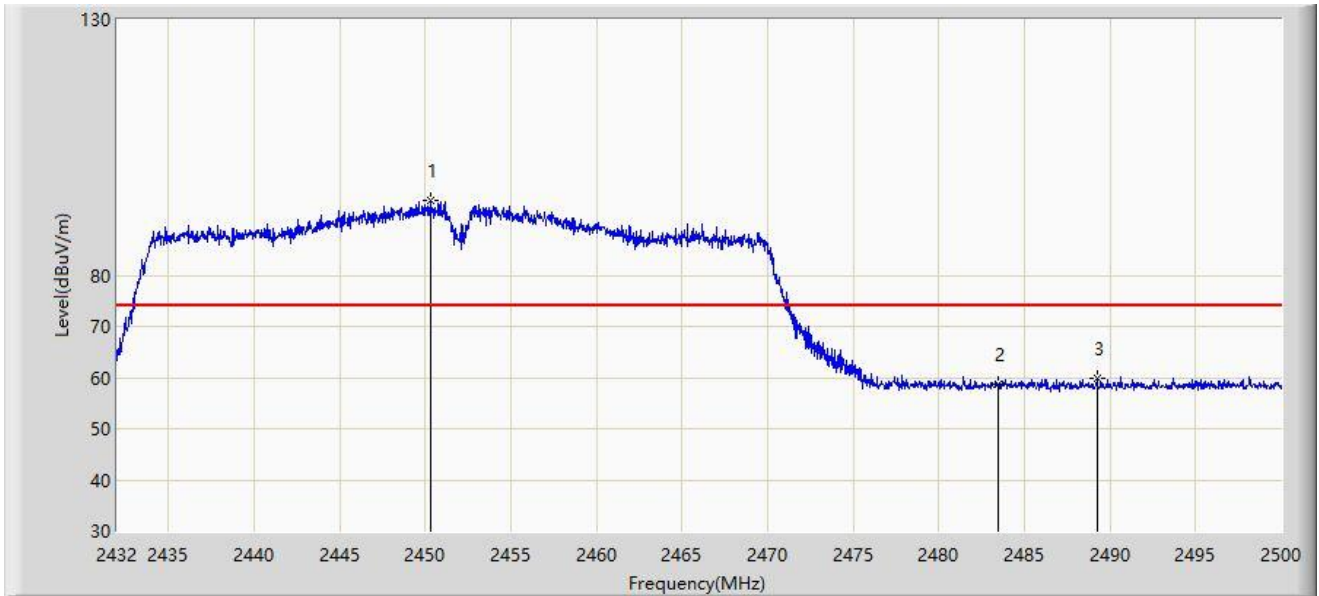


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.292	94.781	62.632	N/A	N/A	32.149	PK
2		2483.500	58.619	26.304	-15.381	74.000	32.315	PK
3	*	2489.256	59.717	27.373	-14.283	74.000	32.344	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:12
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

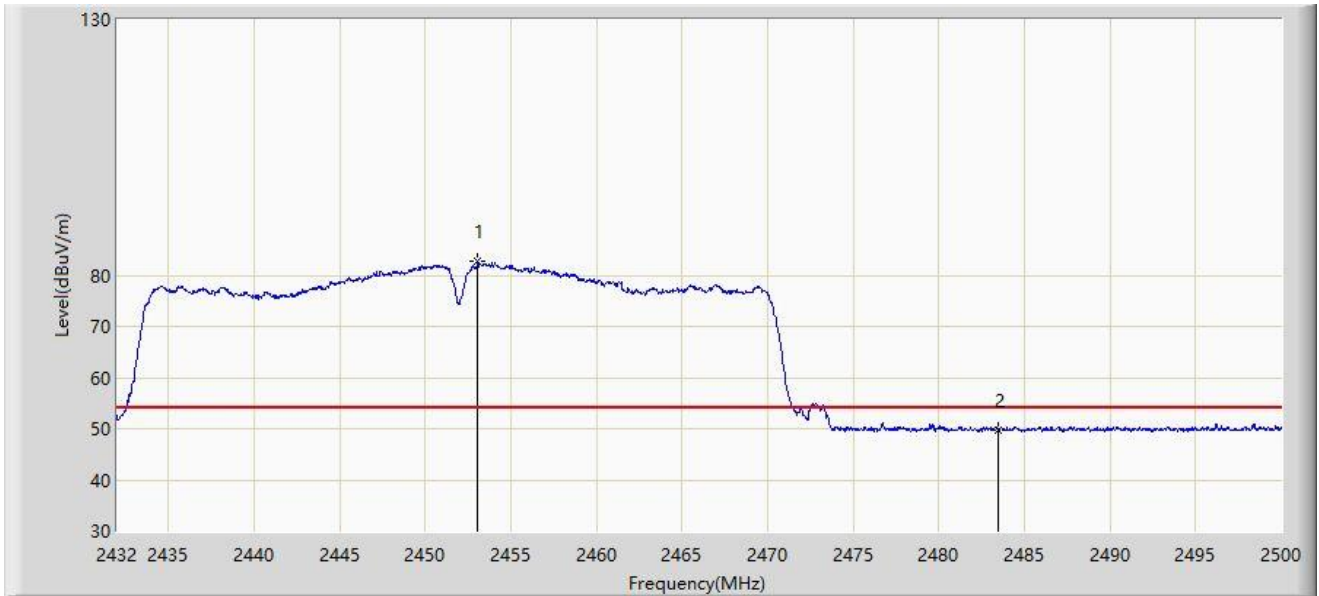


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2453.080	82.727	50.560	N/A	N/A	32.167	AV
2	*	2483.500	49.844	17.529	-4.156	54.000	32.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:09
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

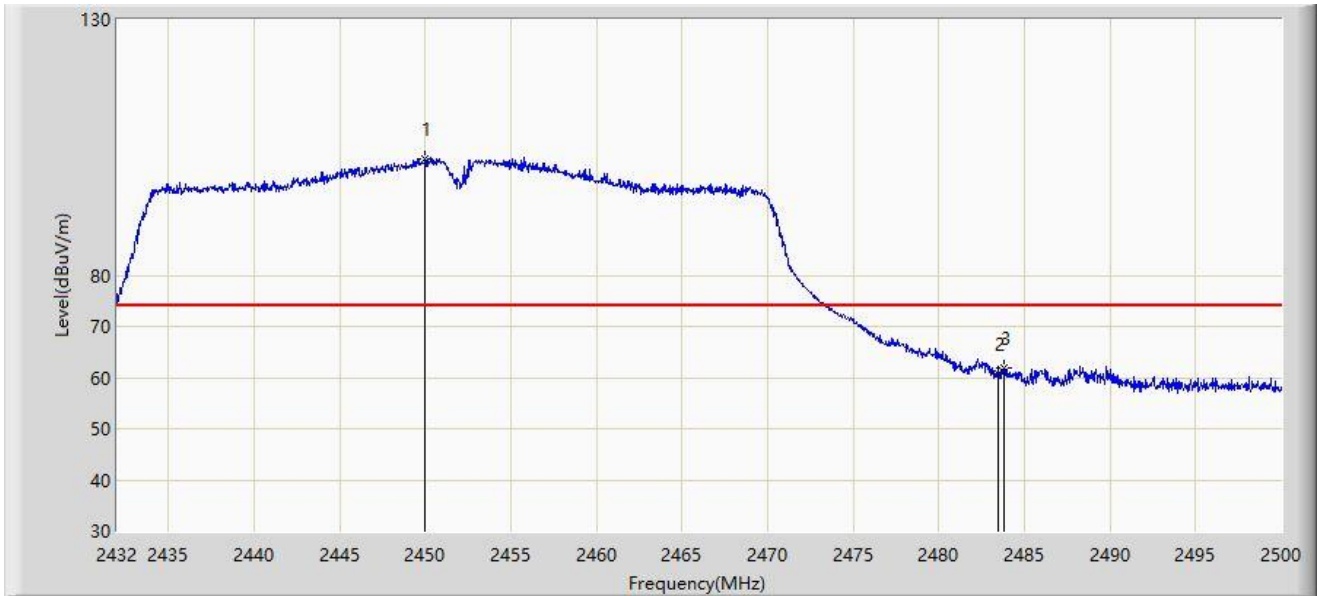


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.020	102.878	70.731	N/A	N/A	32.147	PK
2		2483.500	60.838	28.523	-13.162	74.000	32.315	PK
3	*	2483.782	61.945	29.628	-12.055	74.000	32.317	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2022/06/16 - 01:09
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

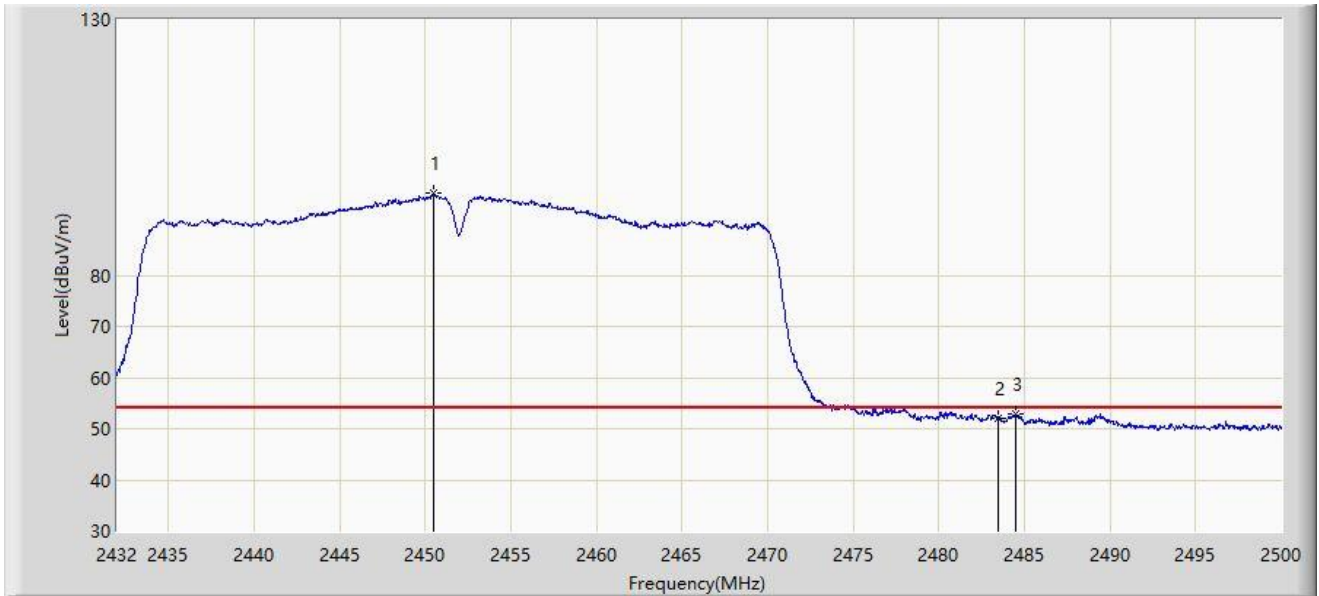

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.462	95.978	63.828	N/A	N/A	32.150	AV
2		2483.500	51.899	19.584	-2.101	54.000	32.315	AV
3	*	2484.496	52.983	20.663	-1.017	54.000	32.320	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: SIP-SR2	Test Date: 2022/06/25 - 20:53
Temperature: 26.4°C	Humidity: 49.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Augleo Wang
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

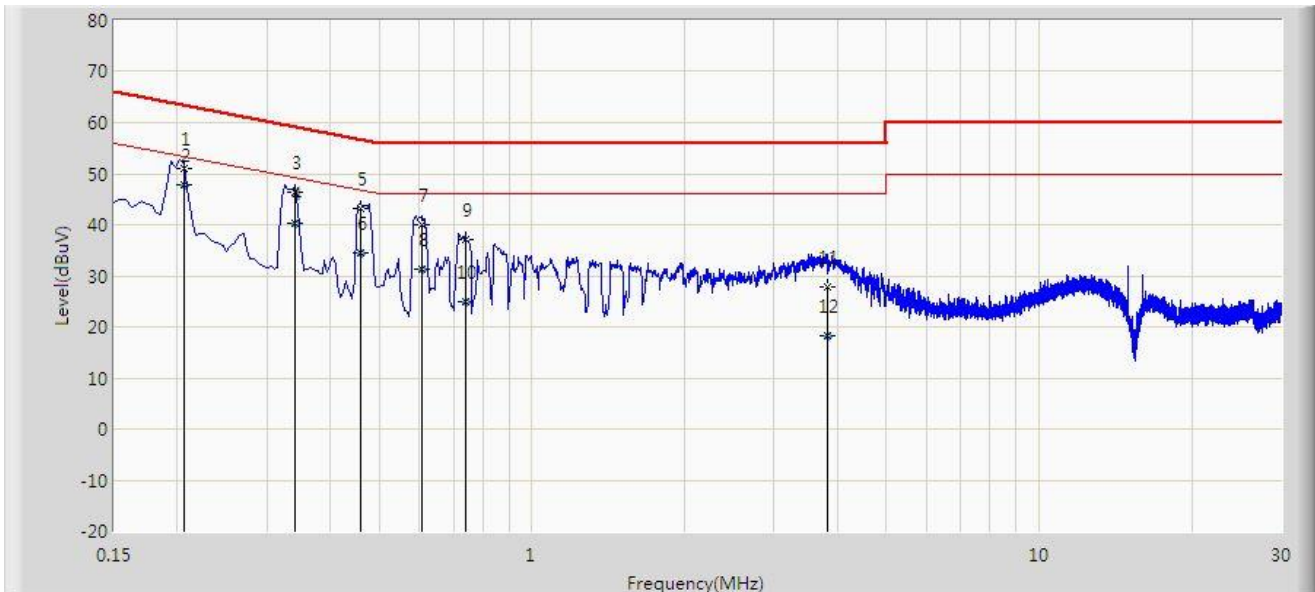


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.206	50.998	41.322	-12.367	63.365	9.676	QP
2	*	0.206	47.758	38.082	-5.607	53.365	9.676	AV
3		0.342	46.394	36.678	-12.761	59.155	9.716	QP
4		0.342	40.223	30.507	-8.931	49.155	9.716	AV
5		0.458	43.286	33.566	-13.443	56.729	9.720	QP
6		0.458	34.446	24.726	-12.283	46.729	9.720	AV
7		0.606	40.066	30.346	-15.934	56.000	9.720	QP
8		0.606	31.263	21.543	-14.737	46.000	9.720	AV
9		0.738	37.114	27.394	-18.886	56.000	9.720	QP
10		0.738	24.948	15.228	-21.052	46.000	9.720	AV
11		3.814	27.949	18.121	-28.051	56.000	9.828	QP
12		3.814	18.386	8.558	-27.614	46.000	9.828	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2022/06/25 - 20:57
Temperature: 26.4°C	Humidity: 49.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Augleo Wang
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Segway ServeBot S1	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

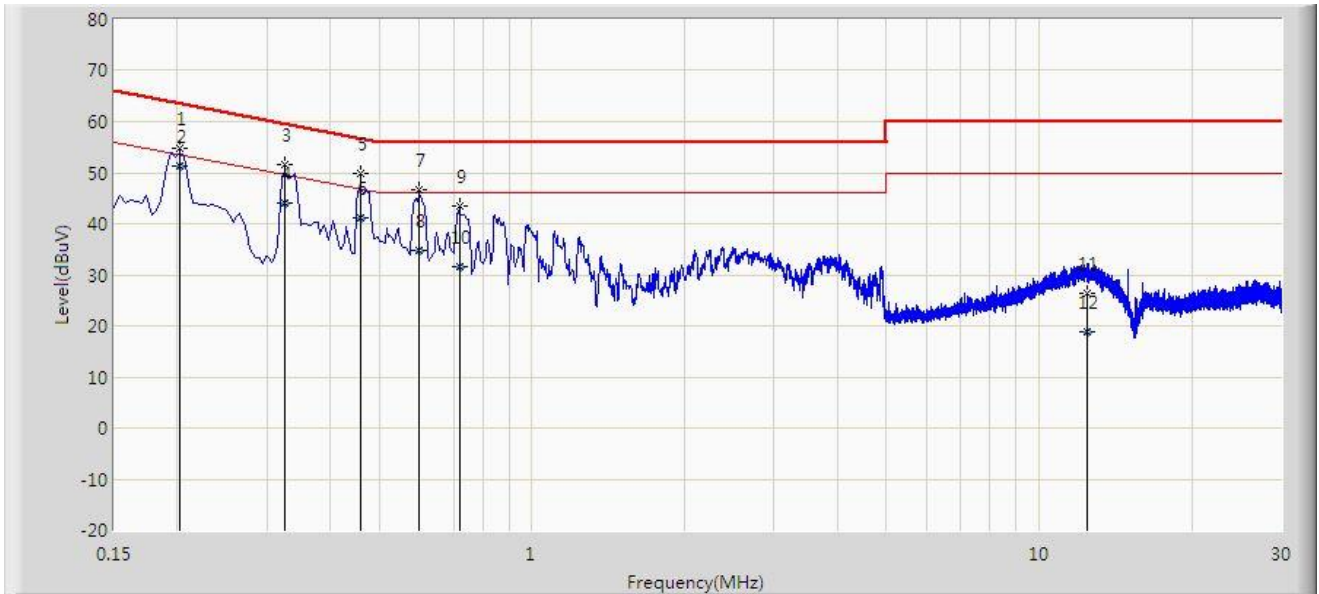

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.202	54.876	45.215	-8.652	63.528	9.661	QP
2	*	0.202	51.294	41.633	-2.234	53.528	9.661	AV
3		0.326	51.682	41.973	-7.871	59.552	9.709	QP
4		0.326	44.174	34.465	-5.379	49.552	9.709	AV
5		0.458	49.942	40.232	-6.787	56.729	9.710	QP
6		0.458	41.200	31.490	-5.529	46.729	9.710	AV
7		0.598	46.644	36.934	-9.356	56.000	9.710	QP
8		0.598	34.909	25.199	-11.091	46.000	9.710	AV
9		0.722	43.465	33.754	-12.535	56.000	9.711	QP
10		0.722	31.558	21.847	-14.442	46.000	9.711	AV
11		12.406	26.422	16.313	-33.578	60.000	10.109	QP
12		12.406	18.810	8.701	-31.190	50.000	10.109	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2205RSU027-UT” file.

Appendix C – EUT Photograph

Refer to “2205RSU027-UE” file.

The End
