

TEST REPORT

Reference No..... : WTX22X03058239W001
FCC ID : 2A64L-1001
Applicant : ERGATTA, INC
Address : 40 West 25th Street, 9th Floor, New York, NY10010,USA
Manufacturer : JLINK TIMES (HK) LIMITED
Address : RM 18,27/F HO KING COMM CTR 2-16 FA YUEN ST MONGKOK,KL,HK
Product Name : Ergatta TouchScreen
Model No..... : 1001
Standards : FCC Part 15.407
Date of Receipt sample : 2022-03-30
Date of Test..... : 2022-03-30 to 2022-07-04
Date of Issue : 2022-07-04
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE	15
5.2 TEST PROCEDURE	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	24
9. FREQUENCY STABILITY	52
9.1 STANDARD APPLICABLE	52
9.2 TEST PROCEDURE	52
9.3 SUMMARY OF TEST RESULTS/PLOTS	52
10. CONDUCTED EMISSIONS	53
10.1 TEST PROCEDURE	53
10.2 BASIC TEST SETUP BLOCK DIAGRAM	53
10.3 TEST RECEIVER SETUP	53
10.4 SUMMARY OF TEST RESULTS/PLOTS	53
APPENDIX SUMMARY	56
APPENDIX A	57
APPENDIX B	72
APPENDIX C	100
APPENDIX D	115

APPENDIX PHOTOGRAPHS.....117

Report version

Version No.	Date of issue	Description
Rev.00	2022-07-04	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Ergatta TouchScreen
Trade Name:	Ergatta
Model No.:	1001
Adding Model(s):	/
Rated Voltage:	DC12V
Battery Capacity:	/
Power Adapter:	MODEL: FJ-SW20261203000D INPUT: AC100-240V, 50/60Hz 1.5A MAX OUTPUT: DC12V, 3.0A, 36.0W
Software Version:	V1.12
Hardware Version:	V2.0
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	11.83dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM, 256QAM
Quantity of Channels:	15
Type of Antenna:	FPC Antenna
Antenna Gain:	1.74dBi
Note: The Antenna Gain is provided by the customer and can affect the validity of results.	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	default	default	default	default	default	default	default	default	default	/	default	default	default
802.11n-HT20 MCS0	default	default	default	default	default	default	default	default	default	/	default	default	default
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	default	default	default	default	default	default	default	default	/	default	default		
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	default		default		default		default		/		default		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5590MHz,5670MHz,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite
DC Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
RJ45 Cable	1.5	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	TianYi 100-14IBD	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an FPC Antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If

measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500\text{kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1\text{MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since RBW=100kHz is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 * \text{RBW}$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

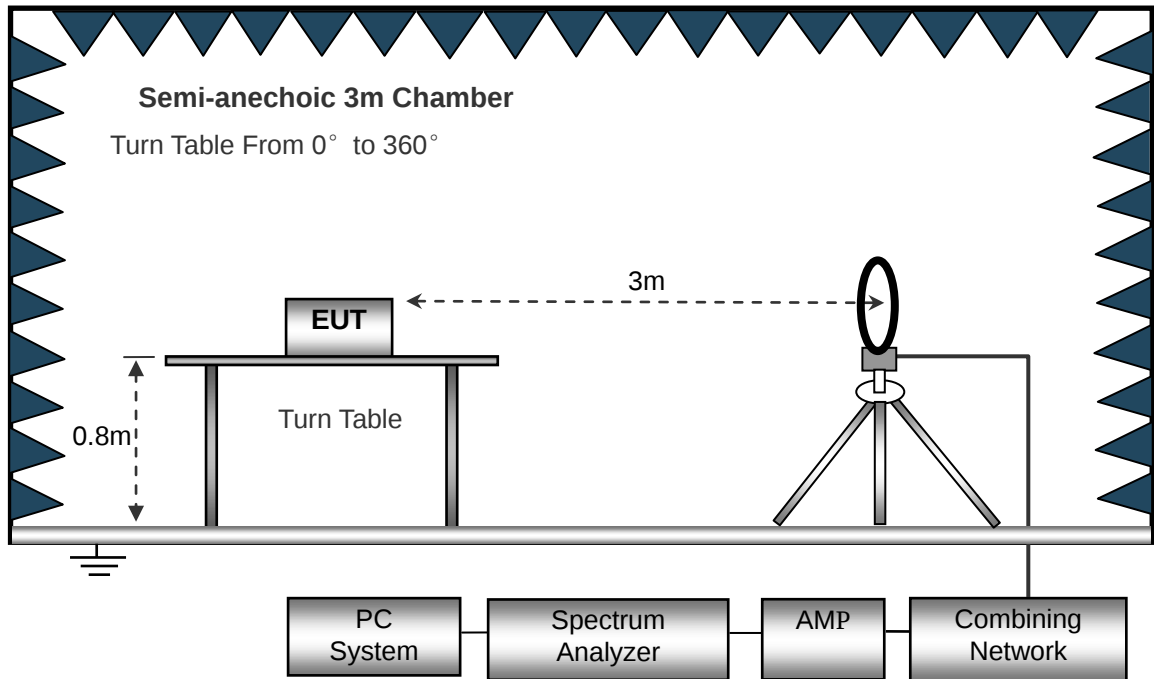
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

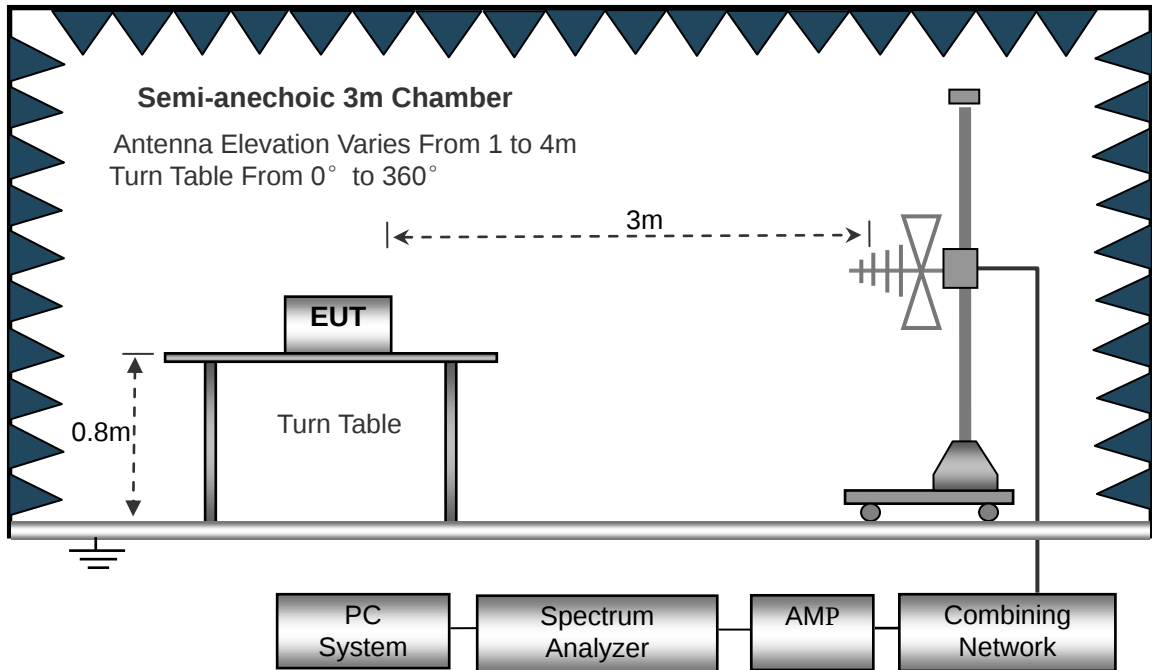
The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

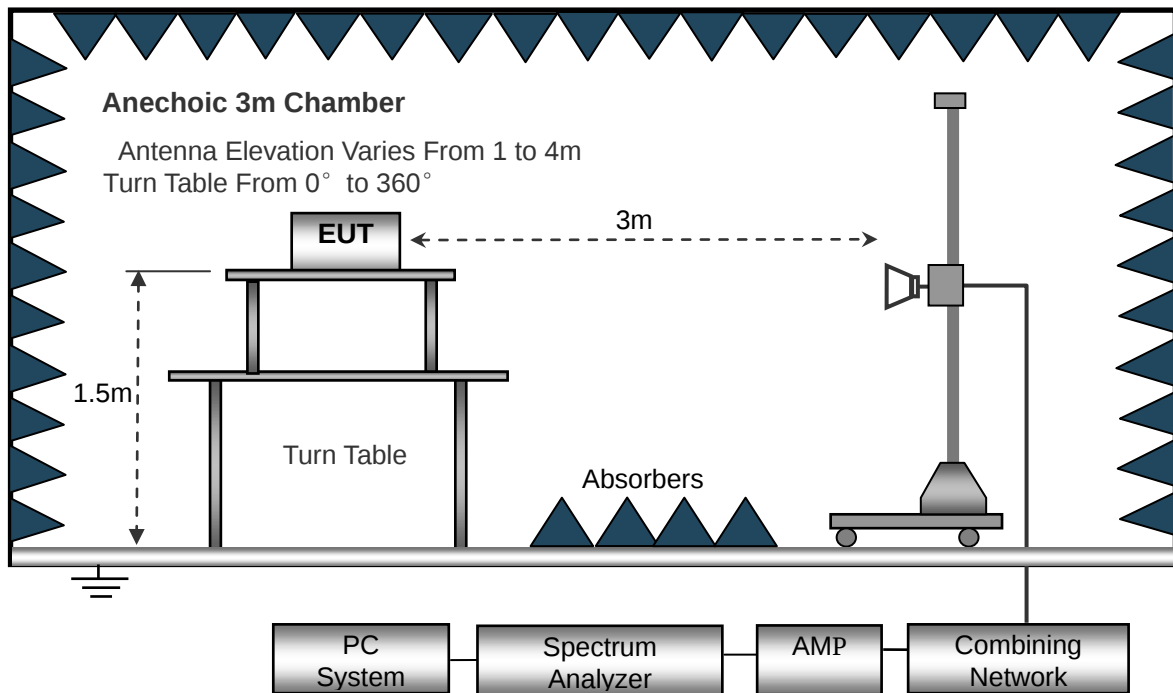
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30MHz to 1GHz.



The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

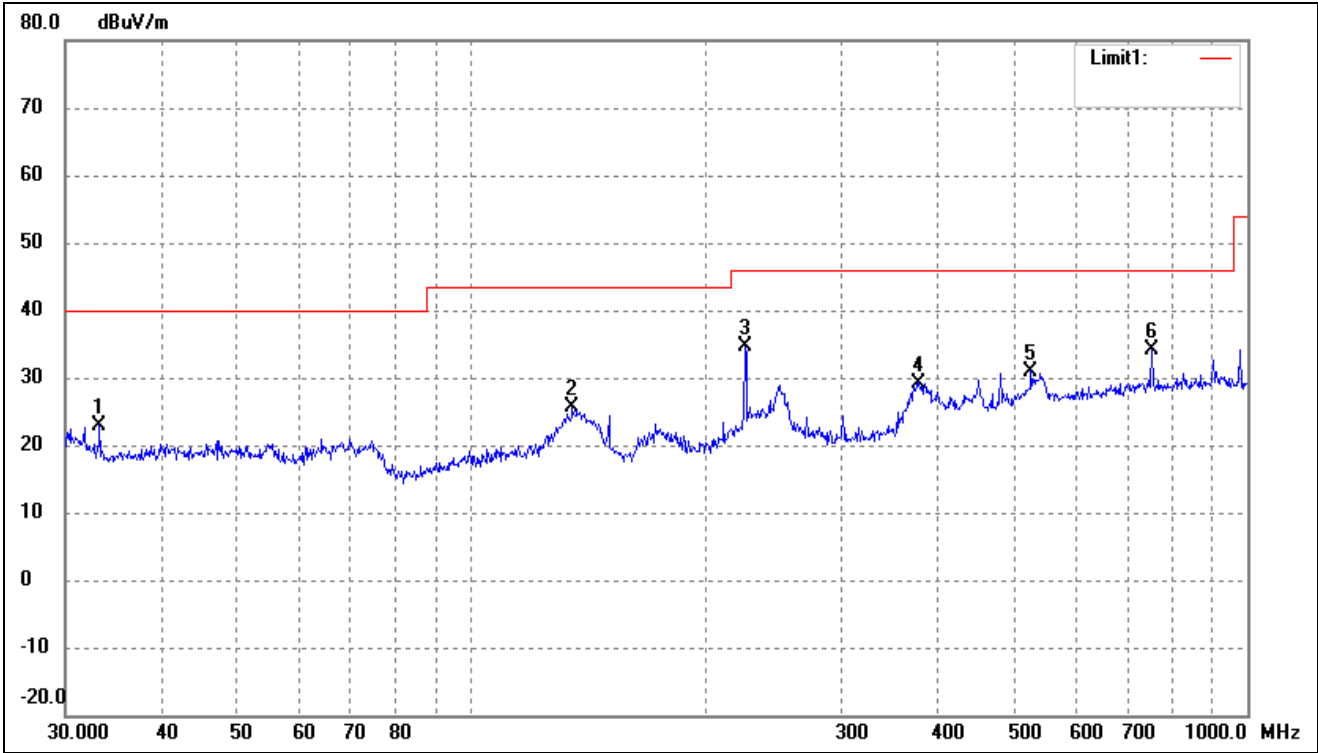
$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

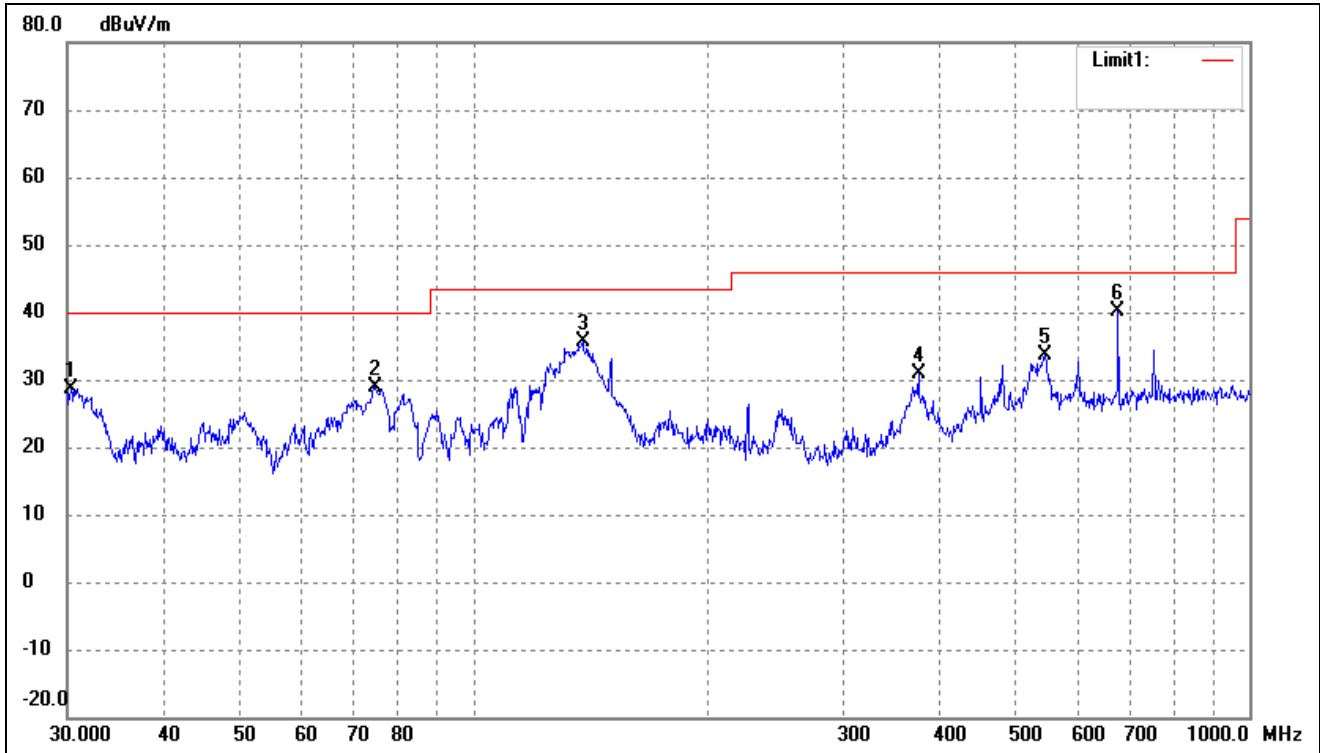
802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal



No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	33.2112	31.67	-8.67	23.00	40.00	-17.00	-	-	peak
2	135.0319	37.53	-11.85	25.68	43.50	-17.82	-	-	peak
3	225.3080	43.64	-9.00	34.64	46.00	-11.36	-	-	peak
4	377.2591	33.83	-4.58	29.25	46.00	-16.75	-	-	peak
5	526.3967	31.86	-0.86	31.00	46.00	-15.00	-	-	peak
6	752.7432	32.46	1.78	34.24	46.00	-11.76	-	-	peak

802.11a(Worst case)

Test Channel	5180MHz(Worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

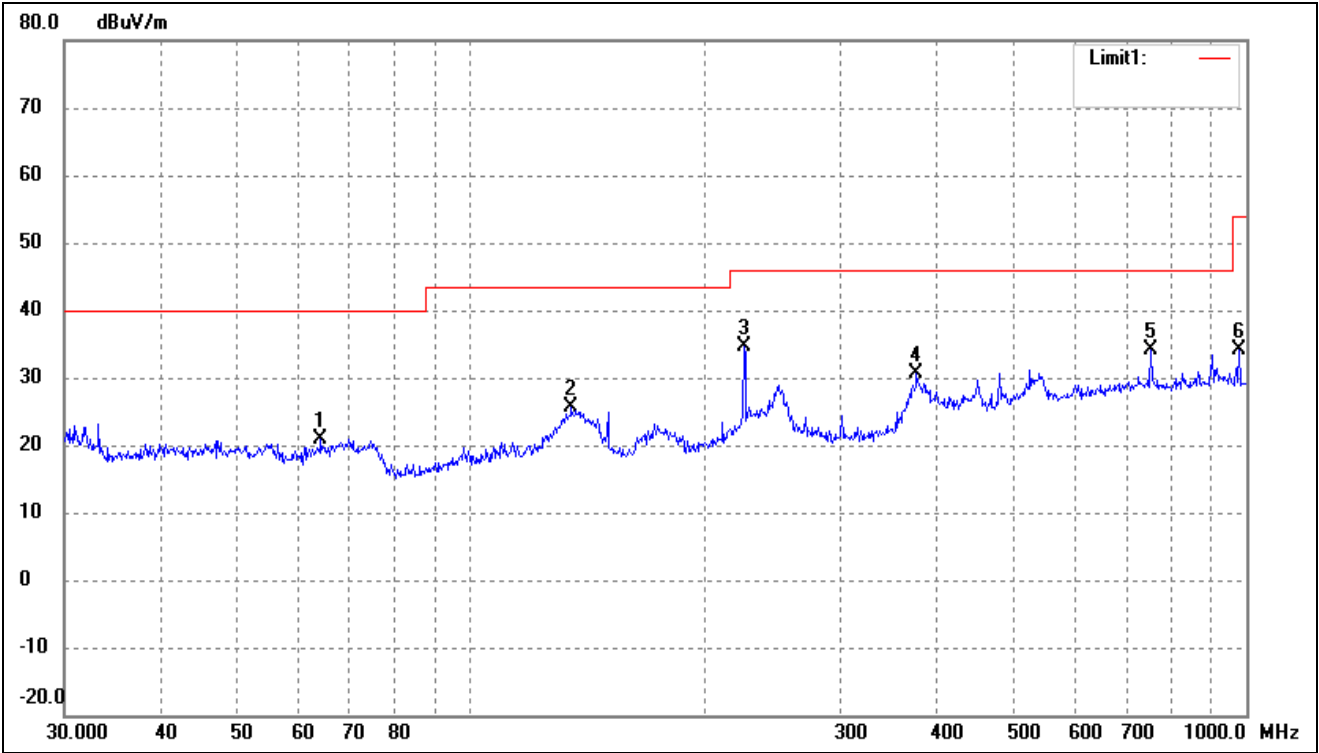


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.3173	38.12	-9.37	28.75	40.00	-11.25	-	-	peak
2	74.6569	39.36	-10.43	28.93	40.00	-11.07	-	-	peak
3	138.3873	47.71	-12.13	35.58	43.50	-7.92	-	-	peak
4	374.6226	35.56	-4.66	30.90	46.00	-15.10	-	-	peak
5	545.1826	34.19	-0.55	33.64	46.00	-12.36	-	-	peak
6	677.5798	38.82	1.20	40.02	46.00	-5.98	-	-	peak

➤ 5250-5350MHz

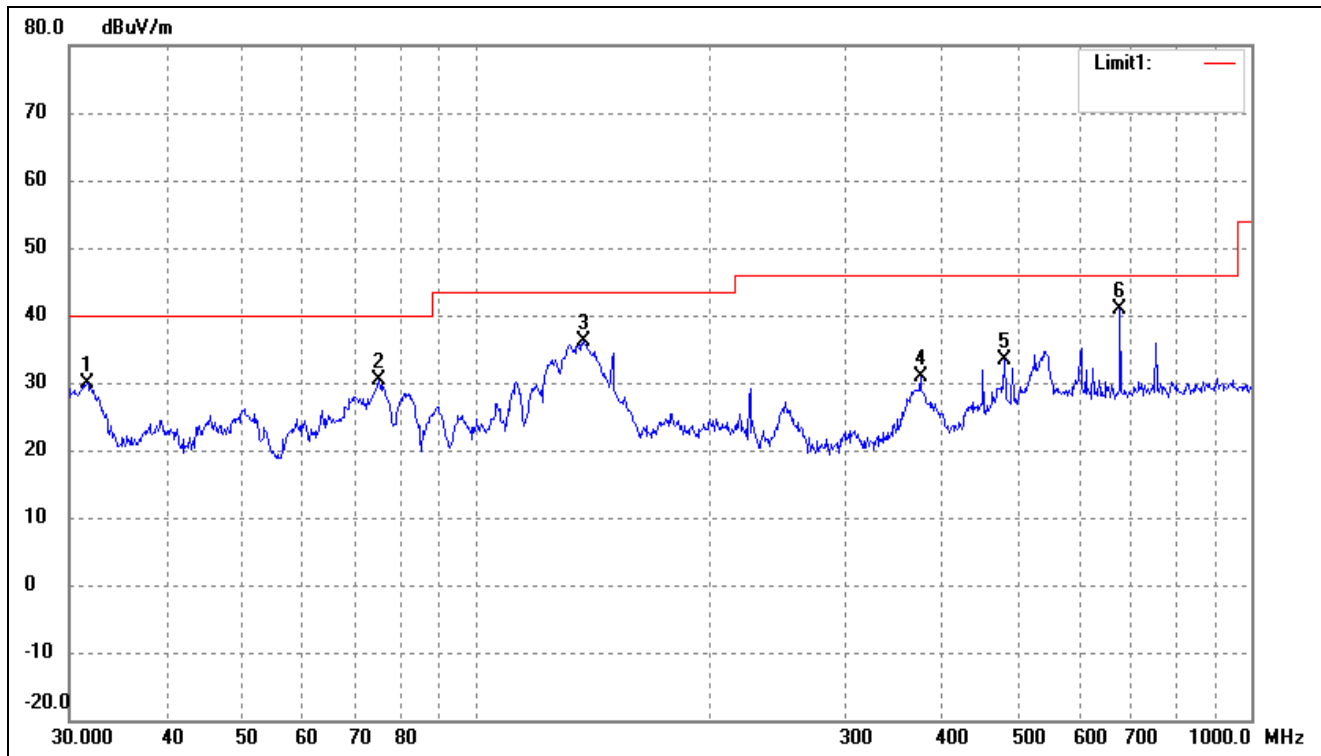
802.11a(Worst case)

Test Channel	5260MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	64.2075	30.11	-9.16	20.95	40.00	-19.05	-	-	peak
2	135.0319	37.53	-11.85	25.68	43.50	-17.82	-	-	peak
3	225.3080	43.64	-9.00	34.64	46.00	-11.36	-	-	peak
4	375.9385	35.26	-4.61	30.65	46.00	-15.35	-	-	peak
5	752.7432	32.46	1.78	34.24	46.00	-11.76	-	-	peak
6	979.1804	31.66	2.49	34.15	54.00	-19.85	-	-	peak

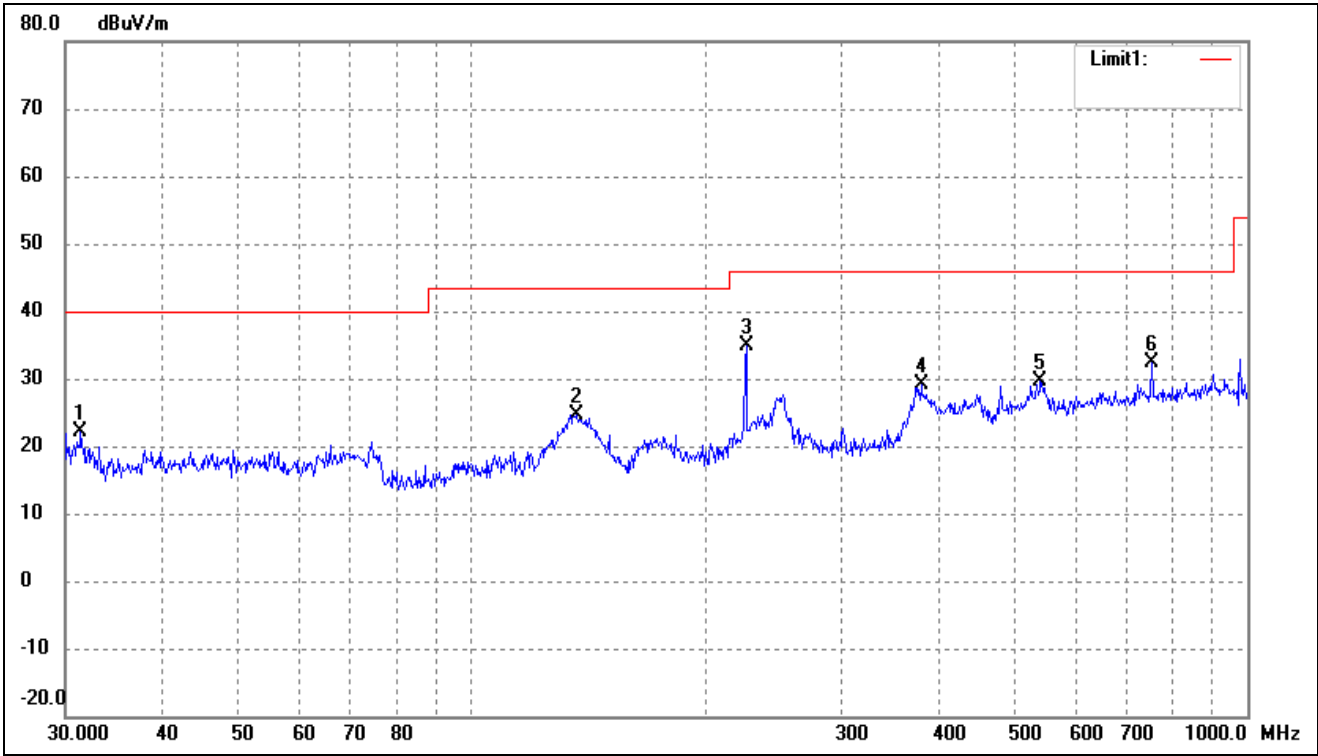
802.11a(Worst case)			
Test Channel	5260MHz(worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.6202	38.97	-9.06	29.91	40.00	-10.09	-	-	peak
2	75.1823	40.74	-10.46	30.28	40.00	-9.72	-	-	peak
3	137.9029	48.26	-12.09	36.17	43.50	-7.33	-	-	peak
4	374.6226	35.56	-4.66	30.90	46.00	-15.10	-	-	peak
5	480.5276	35.11	-1.79	33.32	46.00	-12.68	-	-	peak
6	677.5798	39.71	1.20	40.91	46.00	-5.09	-	-	peak

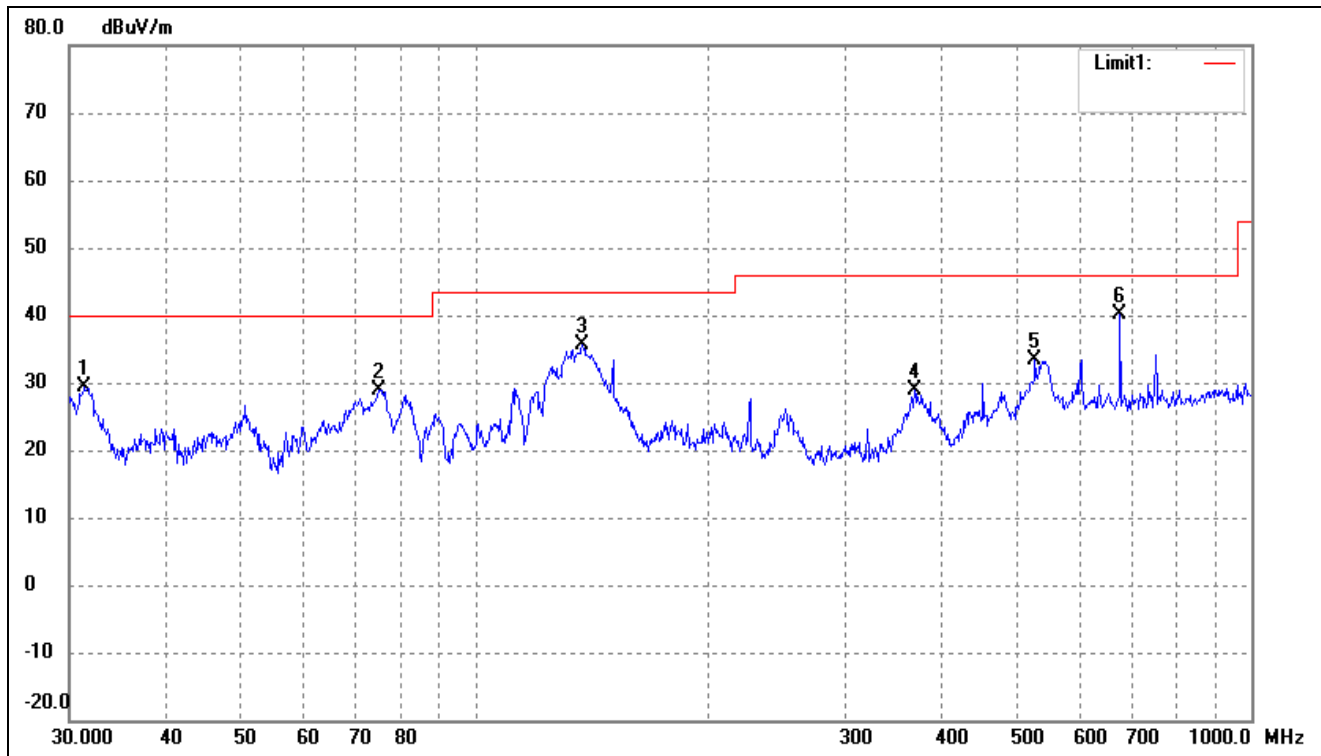
➤ 5470-5725MHz

802.11a(worst case)			
Test Channel	5500MHz	Polarity:	Horizontal



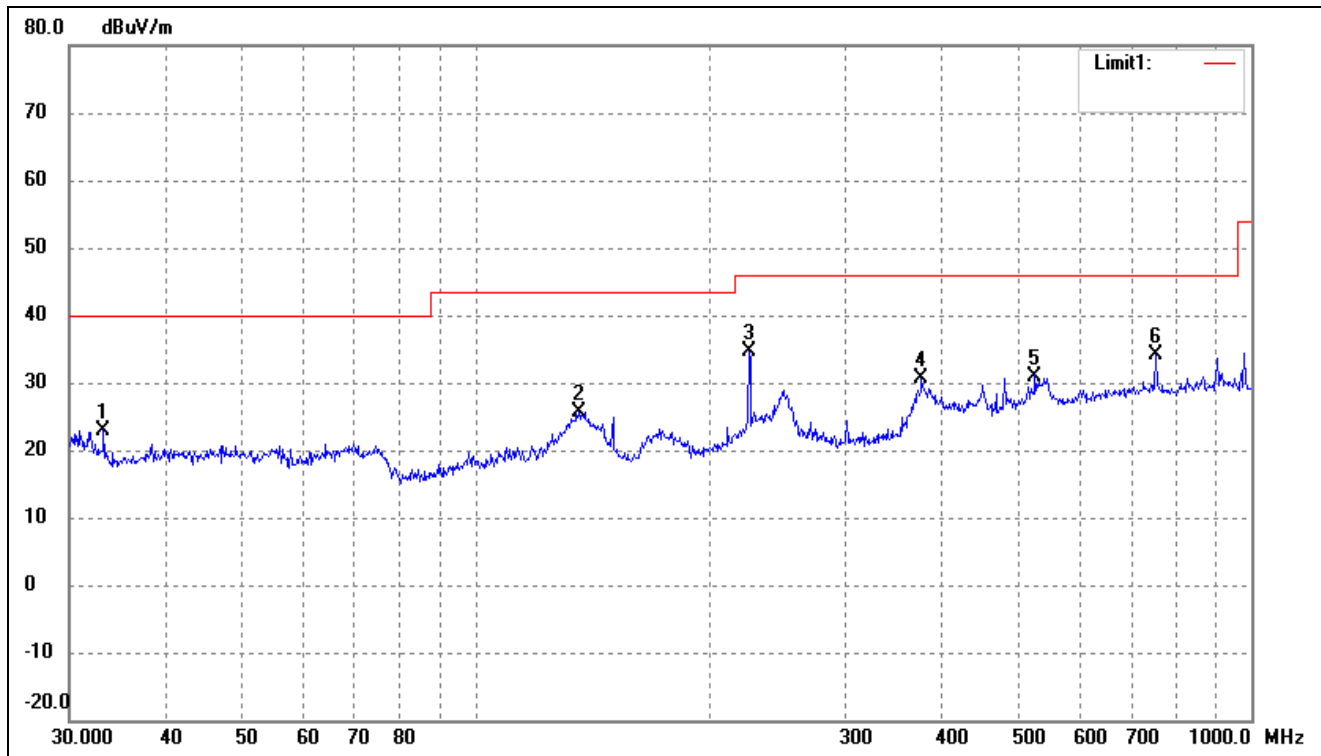
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.3992	31.29	-9.11	22.18	40.00	-17.82	-	-	peak
2	136.4598	36.56	-11.97	24.59	43.50	-18.91	-	-	peak
3	226.0994	43.87	-8.98	34.89	46.00	-11.11	-	-	peak
4	379.9141	33.67	-4.49	29.18	46.00	-16.82	-	-	peak
5	541.3725	30.23	-0.62	29.61	46.00	-16.39	-	-	peak
6	752.7432	30.51	1.78	32.29	46.00	-13.71	-	-	peak

802.11a(worst case)			
Test Channel	5500MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.3992	38.43	-9.11	29.32	40.00	-10.68	-	-	peak
2	75.1823	39.43	-10.46	28.97	40.00	-11.03	-	-	peak
3	137.4202	47.74	-12.05	35.69	43.50	-7.81	-	-	peak
4	368.1116	33.64	-4.85	28.79	46.00	-17.21	-	-	peak
5	526.3967	34.19	-0.86	33.33	46.00	-12.67	-	-	peak
6	677.5798	38.85	1.20	40.05	46.00	-5.95	-	-	peak

802.11a(worst case)			
Test Channel	5700MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	31.67	-8.67	23.00	40.00	-17.00	-	-	peak
2	135.9822	37.63	-11.94	25.69	43.50	-17.81	-	-	peak
3	225.3080	43.64	-9.00	34.64	46.00	-11.36	-	-	peak
4	375.9385	35.26	-4.61	30.65	46.00	-15.35	-	-	peak
5	526.3967	31.86	-0.86	31.00	46.00	-15.00	-	-	peak
6	752.7432	32.46	1.78	34.24	46.00	-11.76	-	-	peak

802.11a(worst case)			
Test Channel	5700MHz	Polarity:	Vertical

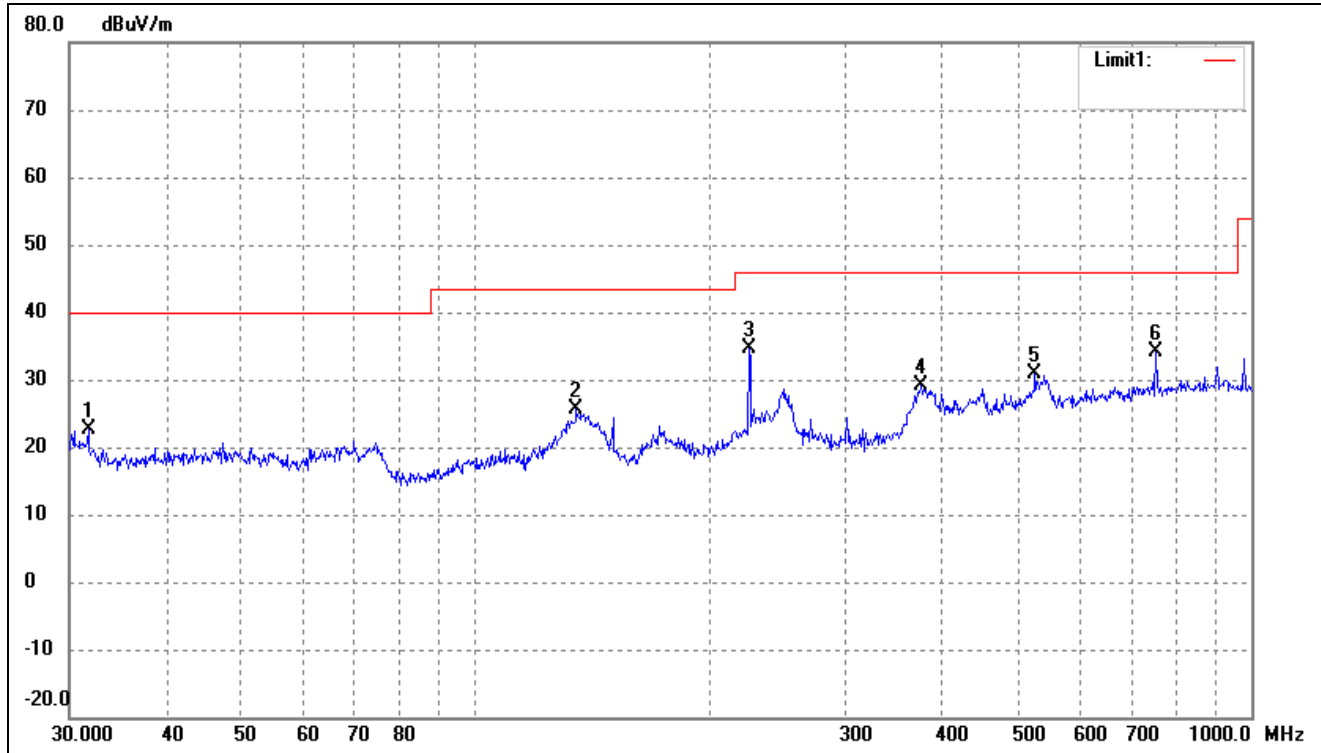


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.1054	37.54	-9.43	28.11	40.00	-11.89	-	-	peak
2	74.9191	39.87	-10.45	29.42	40.00	-10.58	-	-	peak
3	138.8735	47.88	-12.18	35.70	43.50	-7.80	-	-	peak
4	372.0045	33.98	-4.74	29.24	46.00	-16.76	-	-	peak
5	526.3967	34.93	-0.86	34.07	46.00	-11.93	-	-	peak
6	677.5798	38.64	1.20	39.84	46.00	-6.16	-	-	peak

➤ 5725-5850MHz

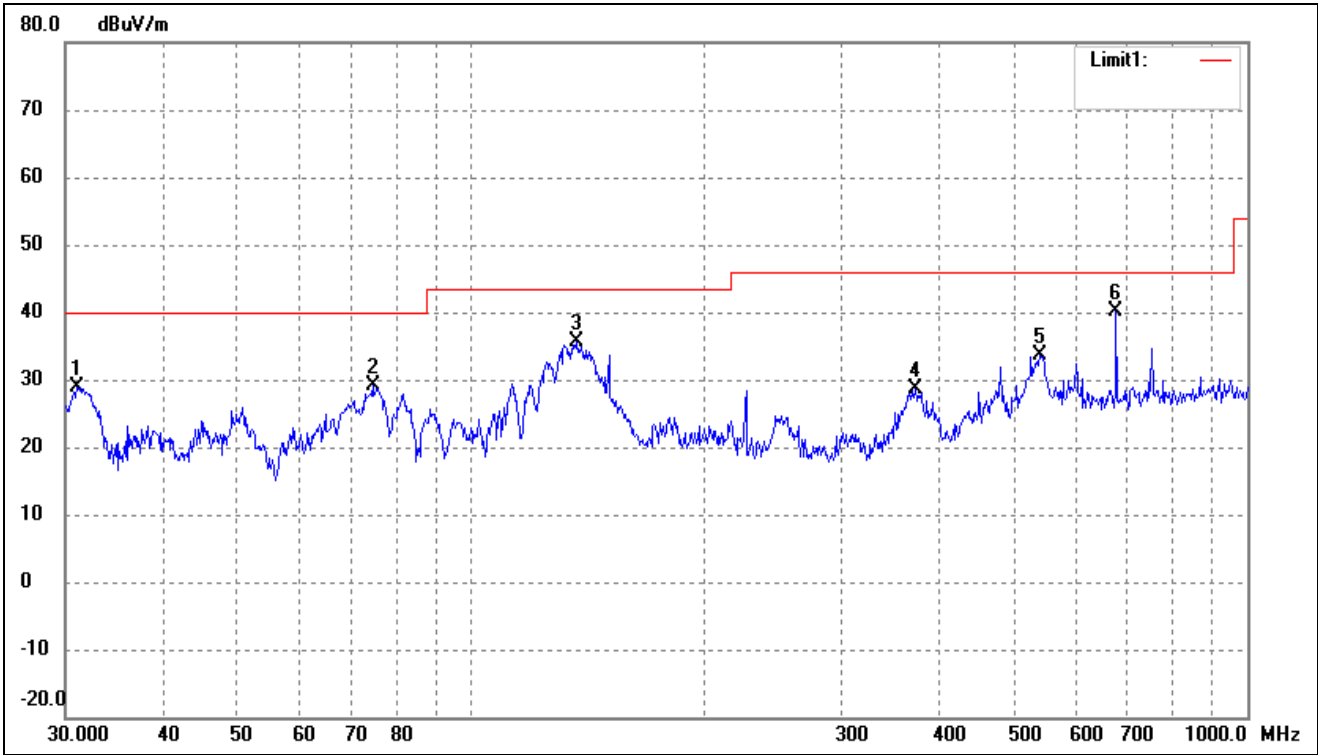
802.11a(worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



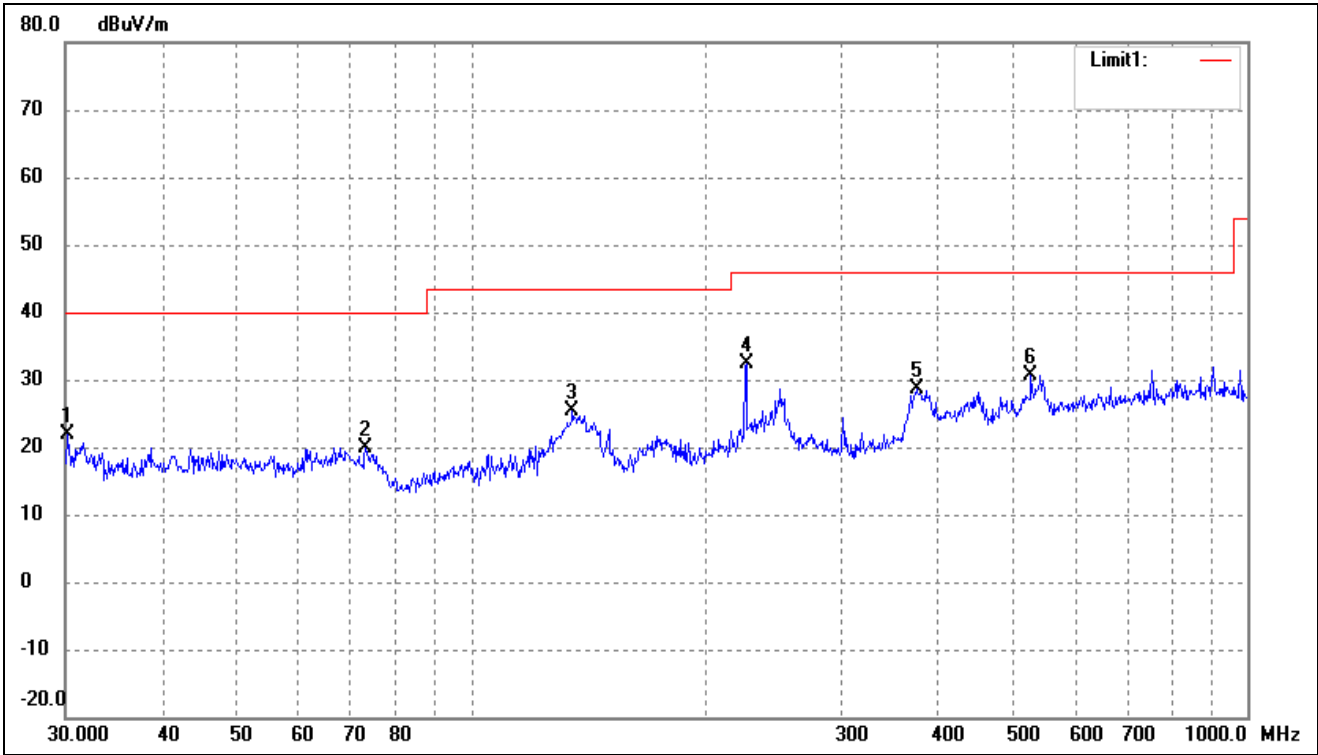
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.7313	31.68	-9.03	22.65	40.00	-17.35	-	-	peak
2	135.0319	37.53	-11.85	25.68	43.50	-17.82	-	-	peak
3	225.3080	43.64	-9.00	34.64	46.00	-11.36	-	-	peak
4	375.9385	33.77	-4.61	29.16	46.00	-16.84	-	-	peak
5	526.3967	31.77	-0.86	30.91	46.00	-15.09	-	-	peak
6	752.7432	32.46	1.78	34.24	46.00	-11.76	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical



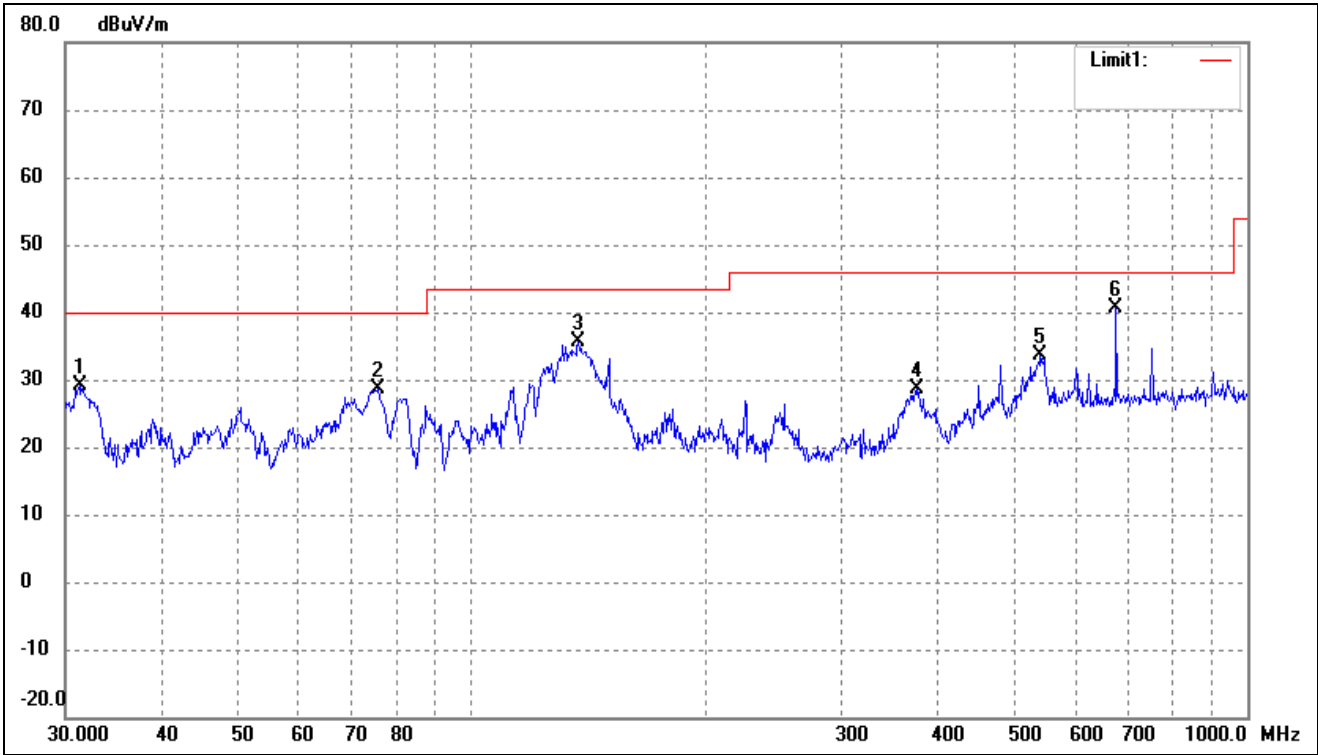
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.0706	37.97	-9.19	28.78	40.00	-11.22	-	-	peak
2	74.6569	39.61	-10.43	29.18	40.00	-10.82	-	-	peak
3	136.9392	47.59	-12.01	35.58	43.50	-7.92	-	-	peak
4	373.3112	33.23	-4.69	28.54	46.00	-17.46	-	-	peak
5	539.4775	34.25	-0.65	33.60	46.00	-12.40	-	-	peak
6	677.5798	38.90	1.20	40.10	46.00	-5.90	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.2111	31.27	-9.41	21.86	40.00	-18.14	-	-	peak
2	73.1025	30.12	-10.35	19.77	40.00	-20.23	-	-	peak
3	135.0319	37.23	-11.85	25.38	43.50	-18.12	-	-	peak
4	226.0994	41.27	-8.98	32.29	46.00	-13.71	-	-	peak
5	374.6226	33.38	-4.66	28.72	46.00	-17.28	-	-	peak
6	526.3967	31.59	-0.86	30.73	46.00	-15.27	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

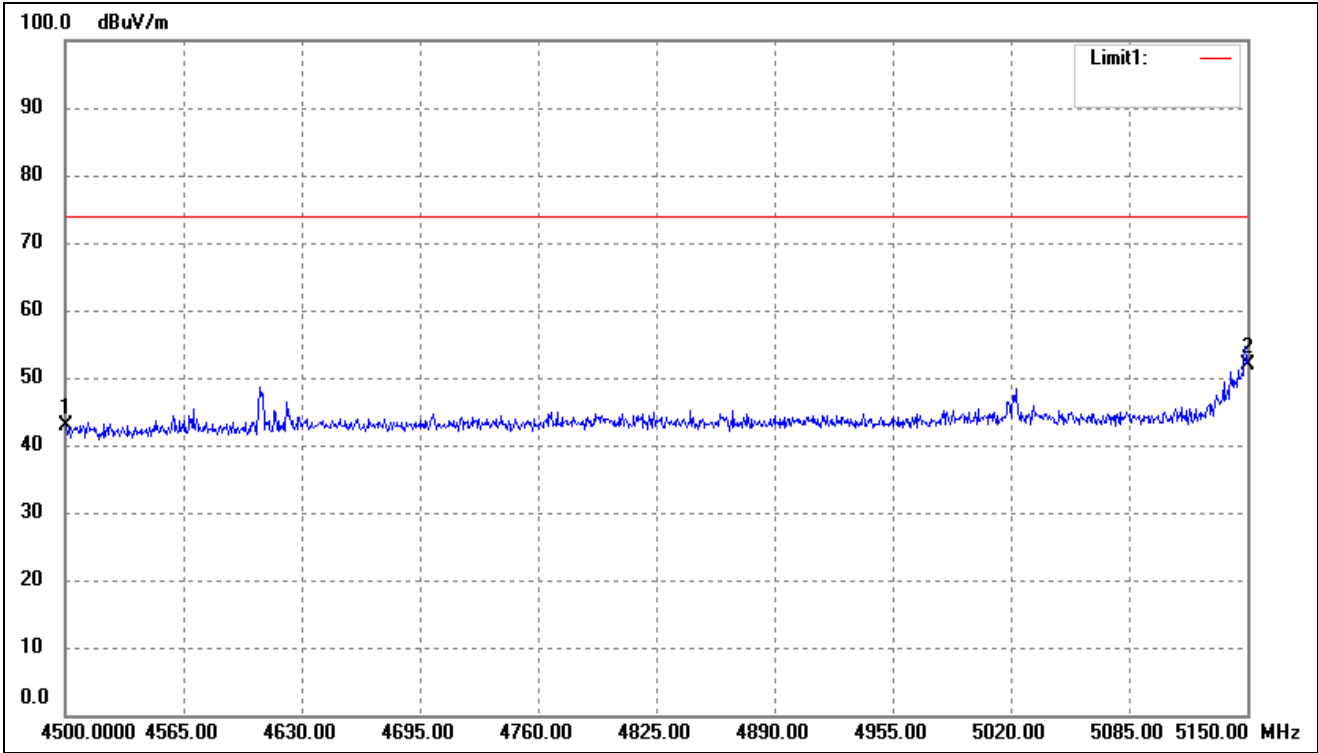


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.2893	38.27	-9.13	29.14	40.00	-10.86	-	-	peak
2	75.7114	39.16	-10.49	28.67	40.00	-11.33	-	-	peak
3	137.4202	47.63	-12.05	35.58	43.50	-7.92	-	-	peak
4	375.9385	33.28	-4.61	28.67	46.00	-17.33	-	-	peak
5	541.3725	34.21	-0.62	33.59	46.00	-12.41	-	-	peak
6	677.5798	39.35	1.20	40.55	46.00	-5.45	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

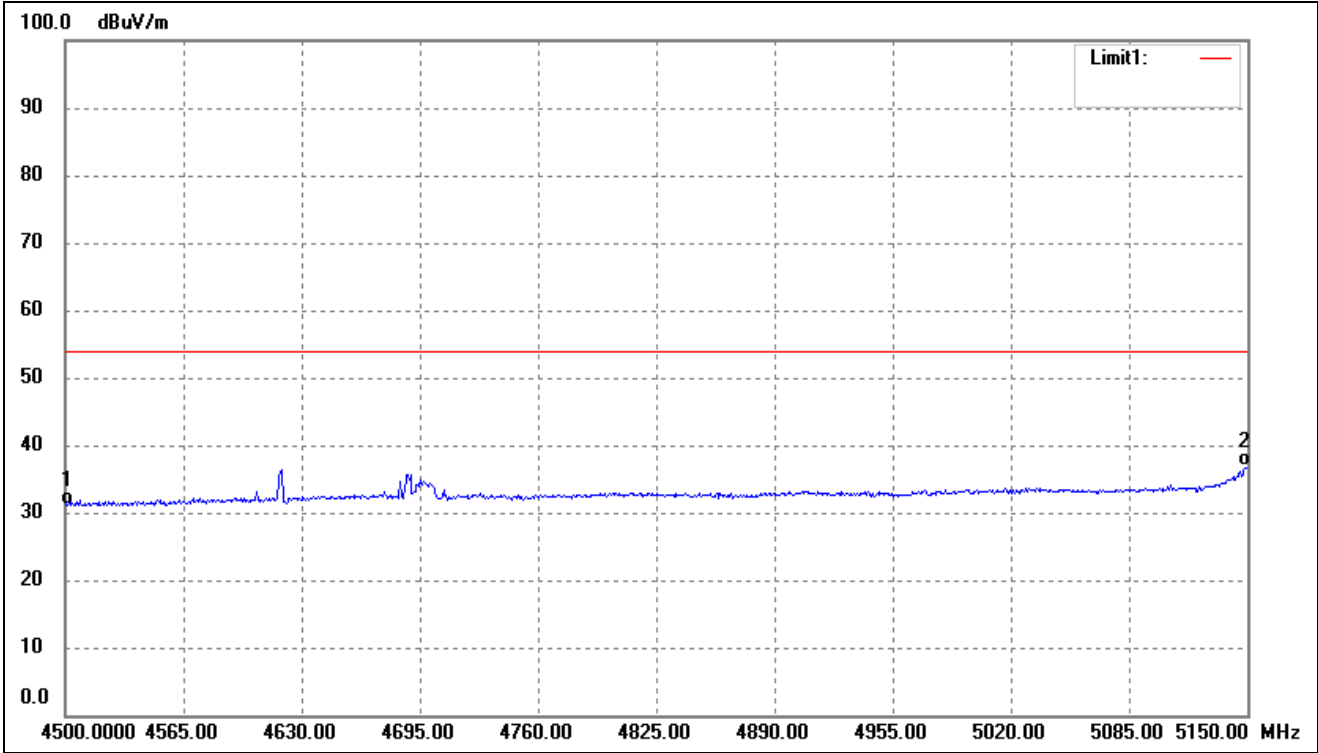
➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



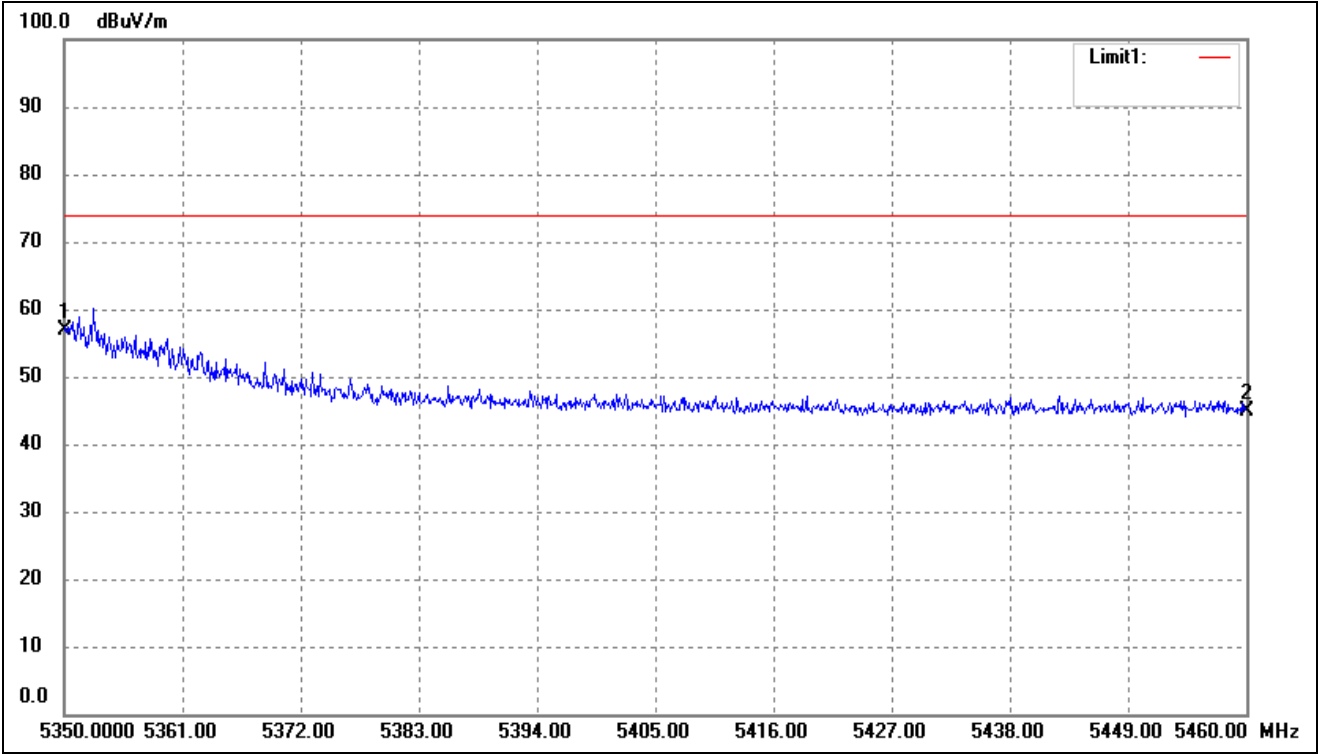
No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	4500.000	49.88	-6.92	42.96	74.00	-31.04	-	-	peak
2	5150.000	57.21	-5.33	51.88	74.00	-22.12	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



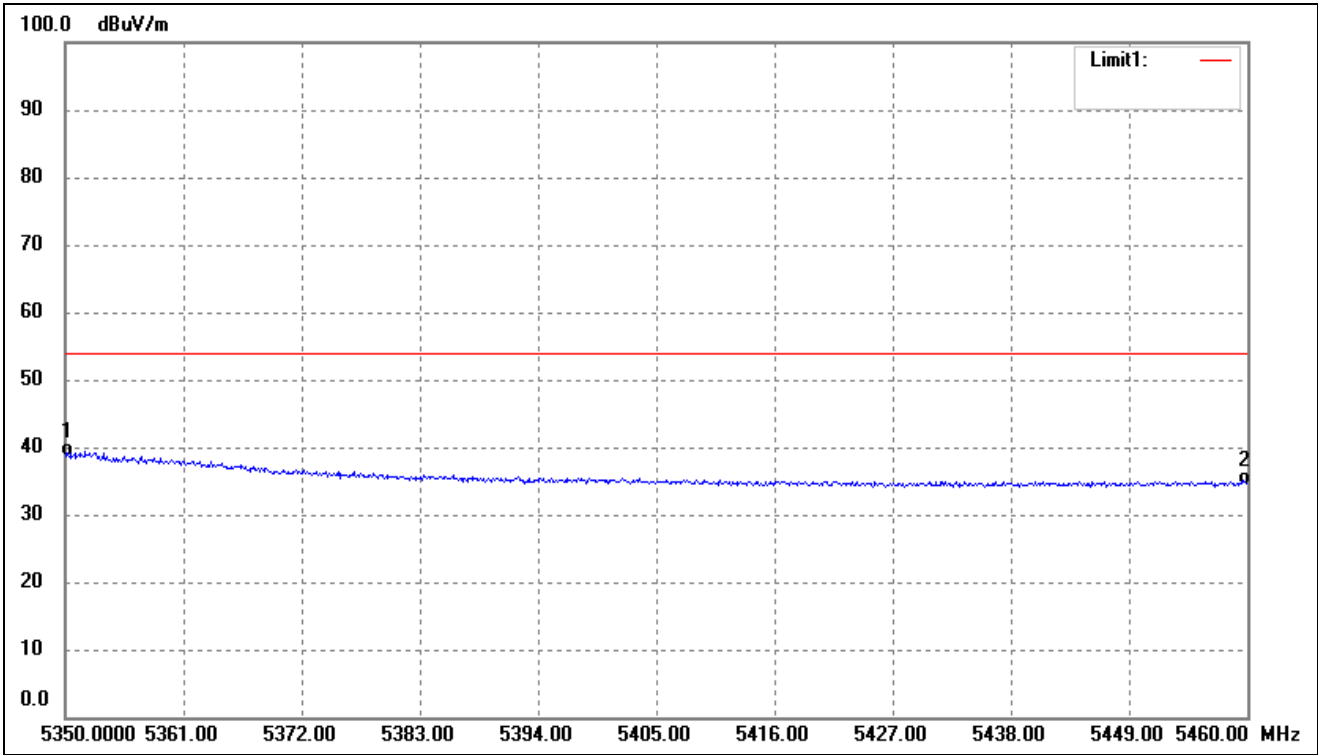
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	38.12	-6.92	31.20	54.00	-22.80	-	-	AVG
2	5150.000	42.21	-5.33	36.88	54.00	-17.12	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)



No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5350.000	61.84	-4.97	56.87	74.00	-17.13	-	-	peak
2	5460.000	49.55	-4.77	44.78	74.00	-29.22	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	43.50	-4.97	38.53	54.00	-15.47	-	-	AVG
2	5460.000	39.12	-4.77	34.35	54.00	-19.65	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘ - ’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	59.15	7.11	66.26	74	-7.74	H	PK
15540	37.94	8.22	46.16	54	-7.84	H	AV
10360	60.59	7.11	67.70	74	-6.30	V	PK
15540	37.52	8.22	45.74	54	-8.26	V	AV
Middle Channel (5200MHz)							
10400	57.68	7.22	64.90	74	-9.10	H	PK
15600	37.38	8.67	46.05	54	-7.95	H	AV
10400	58.24	7.22	65.46	74	-8.54	V	PK
15600	38.60	8.67	47.27	54	-6.73	V	AV
High Channel (5240MHz)							
10480	58.27	7.69	65.96	74	-8.04	H	PK
15720	35.35	8.93	44.28	54	-9.72	H	AV
10480	57.66	7.69	65.35	74	-8.65	V	PK
15720	40.48	8.93	49.41	54	-4.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	56.46	7.96	64.42	74	-9.58	H	PK
15780	37.00	9.02	46.02	54	-7.98	H	AV
10520	56.13	7.96	64.09	74	-9.91	V	PK
15780	39.68	9.02	48.70	54	-5.30	V	AV
Middle Channel (5280MHz)							
10560	59.53	8.02	67.55	74	-6.45	H	PK
15840	36.23	9.42	45.65	54	-8.35	H	AV
10560	59.98	8.02	68.00	74	-6.00	V	PK
15840	35.74	9.42	45.16	54	-8.84	V	AV
High Channel (5320MHz)							
10640	57.09	8.35	65.44	74	-8.56	H	PK
15960	35.42	9.63	45.05	54	-8.95	H	AV
10640	57.83	8.35	66.18	74	-7.82	V	PK
15960	34.20	9.63	43.83	54	-10.17	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	57.19	8.82	66.01	74	-7.99	H	PK
16500	37.06	9.88	46.94	54	-7.06	H	AV
11000	56.13	8.82	64.95	74	-9.05	V	PK
16500	32.93	9.88	42.81	54	-11.19	V	AV
Middle Channel (5600MHz)							
11200	59.17	8.92	68.09	74	-5.91	H	PK
16800	37.04	10.03	47.07	54	-6.93	H	AV
11200	58.25	8.92	67.17	74	-6.83	V	PK
16800	37.29	10.03	47.32	54	-6.68	V	AV
High Channel (5700MHz)							
11400	54.23	9.36	63.59	74	-10.41	H	PK
17100	34.75	10.25	45.00	54	-9.00	H	AV
11400	58.11	9.36	67.47	74	-6.53	V	PK
17100	35.62	10.25	45.87	54	-8.13	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.82	9.45	67.27	74	-6.73	H	PK
17235	38.26	10.36	48.62	54	-5.38	H	AV
11490	56.17	9.45	65.62	74	-8.38	V	PK
17235	34.52	10.36	44.88	54	-9.12	V	AV
Middle Channel (5785MHz)							
11570	58.29	9.62	67.91	74	-6.09	H	PK
17355	36.67	10.67	47.34	54	-6.66	H	AV
11570	55.84	9.62	65.46	74	-8.54	V	PK
17355	35.75	10.67	46.42	54	-7.58	V	AV
High Channel (5825MHz)							
11650	57.41	9.84	67.25	74	-6.75	H	PK
17475	31.41	10.95	42.36	54	-11.64	H	AV
11650	55.24	9.84	65.08	74	-8.92	V	PK
17475	37.38	10.95	48.33	54	-5.67	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.36	-27
Highest	Above 5350	-41.76	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.48	-27
Highest	Above 5350	-35.89	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-38.11	-27
Highest	Above 5725	-34.16	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.93	-27
	5650 to 5700	-34.21	-27 to -17
	5700 to 5720	-26.25	-17 to 15.6
	5720 to 5725	-15.84	15.6 to 27
Highest	5850 to 5855	-16.33	27 to 15.6
	5855 to 5875	-28.18	15.6 to -17
	5875 to 5925	-39.30	-17 to -27
	Above 5925	-38.10	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	58.93	7.11	66.04	74	-7.96	H	PK
15540	38.72	8.22	46.94	54	-7.06	H	AV
10360	59.72	7.11	66.83	74	-7.17	V	PK
15540	37.17	8.22	45.39	54	-8.61	V	AV
Middle Channel (5200MHz)							
10400	57.22	7.22	64.44	74	-9.56	H	PK
15600	34.97	8.67	43.64	54	-10.36	H	AV
10400	56.83	7.22	64.05	74	-9.95	V	PK
15600	37.46	8.67	46.13	54	-7.87	V	AV
High Channel (5240MHz)							
10480	57.47	7.69	65.16	74	-8.84	H	PK
15720	38.33	8.93	47.26	54	-6.74	H	AV
10480	59.92	7.69	67.61	74	-6.39	V	PK
15720	35.48	8.93	44.41	54	-9.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	60.65	7.96	68.61	74	-5.39	H	PK
15780	36.59	9.02	45.61	54	-8.39	H	AV
10520	59.83	7.96	67.79	74	-6.21	V	PK
15780	38.05	9.02	47.07	54	-6.93	V	AV
Middle Channel (5280MHz)							
10560	57.77	8.02	65.79	74	-8.21	H	PK
15840	36.42	9.42	45.84	54	-8.16	H	AV
10560	58.28	8.02	66.30	74	-7.70	V	PK
15840	36.12	9.42	45.54	54	-8.46	V	AV
High Channel (5320MHz)							
10640	58.83	8.35	67.18	74	-6.82	H	PK
15960	34.78	9.63	44.41	54	-9.59	H	AV
10640	57.18	8.35	65.53	74	-8.47	V	PK
15960	34.90	9.63	44.53	54	-9.47	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	56.02	8.82	64.84	74	-9.16	H	PK
16500	37.23	9.88	47.11	54	-6.89	H	AV
11000	56.64	8.82	65.46	74	-8.54	V	PK
16500	34.16	9.88	44.04	54	-9.96	V	AV
Middle Channel (5600MHz)							
11200	59.70	8.92	68.62	74	-5.38	H	PK
16800	36.63	10.03	46.66	54	-7.34	H	AV
11200	55.20	8.92	64.12	74	-9.88	V	PK
16800	36.21	10.03	46.24	54	-7.76	V	AV
High Channel (5700MHz)							
11400	54.07	9.36	63.43	74	-10.57	H	PK
17100	37.26	10.25	47.51	54	-6.49	H	AV
11400	57.17	9.36	66.53	74	-7.47	V	PK
17100	32.98	10.25	43.23	54	-10.77	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.95	9.45	67.40	74	-6.60	H	PK
17235	37.26	10.36	47.62	54	-6.38	H	AV
11490	56.33	9.45	65.78	74	-8.22	V	PK
17235	34.11	10.36	44.47	54	-9.53	V	AV
Middle Channel (5785MHz)							
11570	56.65	9.62	66.27	74	-7.73	H	PK
17355	35.97	10.67	46.64	54	-7.36	H	AV
11570	54.71	9.62	64.33	74	-9.67	V	PK
17355	34.15	10.67	44.82	54	-9.18	V	AV
High Channel (5825MHz)							
11650	56.68	9.84	66.52	74	-7.48	H	PK
17475	35.98	10.95	46.93	54	-7.07	H	AV
11650	53.71	9.84	63.55	74	-10.45	V	PK
17475	35.79	10.95	46.74	54	-7.26	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-29.54	-27
Highest	Above 5350	-39.34	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.05	-27
Highest	Above 5350	-34.91	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.16	-27
Highest	Above 5725	-39.65	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-48.93	-27
	5650 to 5700	-35.21	-27 to -17
	5700 to 5720	-27.25	-17 to 15.6
	5720 to 5725	-18.84	15.6 to 27
Highest	5850 to 5855	-16.33	27 to 15.6
	5855 to 5875	-24.18	15.6 to -17
	5875 to 5925	-39.30	-17 to -27
	Above 5925	-40.10	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	57.99	7.25	65.24	74	-8.76	H	PK
15570	38.96	8.33	47.29	54	-6.71	H	AV
10380	57.79	7.25	65.04	74	-8.96	V	PK
15570	38.51	8.33	46.84	54	-7.16	V	AV
High Channel (5230MHz)							
10460	57.88	7.54	65.42	74	-8.58	H	PK
15690	35.47	8.86	44.33	54	-9.67	H	AV
10460	57.70	7.54	65.24	74	-8.76	V	PK
15690	35.73	8.86	44.59	54	-9.41	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	57.32	8.12	65.44	74	-8.56	H	PK
15810	35.27	9.24	44.51	54	-9.49	H	AV
10540	58.00	8.12	66.12	74	-7.88	V	PK
15810	36.38	9.24	45.62	54	-8.38	V	AV
High Channel (5310MHz)							
10620	56.86	8.30	65.16	74	-8.84	H	PK
15930	37.07	9.45	46.52	54	-7.48	H	AV
10620	56.31	8.30	64.61	74	-9.39	V	PK
15930	35.80	9.45	45.25	54	-8.75	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	56.08	8.95	65.03	74	-8.97	H	PK
16530	35.77	9.99	45.76	54	-8.24	H	AV
11020	54.97	8.95	63.92	74	-10.08	V	PK
16530	34.28	9.99	44.27	54	-9.73	V	AV
Middle Channel (5590MHz)							
11180	56.10	9.12	65.22	74	-8.78	H	PK
16770	35.29	10.12	45.41	54	-8.59	H	AV
11180	58.32	9.12	67.44	74	-6.56	V	PK
16770	34.49	10.12	44.61	54	-9.39	V	AV
High Channel (5670MHz)							
11340	56.23	9.39	65.62	74	-8.38	H	PK
17010	35.54	10.22	45.76	54	-8.24	H	AV
11340	53.71	9.39	63.10	74	-10.90	V	PK
17010	36.24	10.22	46.46	54	-7.54	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.43	8.95	65.38	74	-8.62	H	PK
17265	36.25	9.99	46.24	54	-7.76	H	AV
11510	55.3	8.95	64.25	74	-9.75	V	PK
17265	35.75	9.99	45.74	54	-8.26	V	AV
Middle Channel (5590MHz)							
11590	56.94	9.12	66.06	74	-7.94	H	PK
17385	36.08	10.12	46.20	54	-7.80	H	AV
11590	58.32	9.12	67.44	74	-6.56	V	PK
17385	36.25	10.12	46.37	54	-7.63	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.08	-27
Highest	Above 5350	-43.07	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.65	-27
Highest	Above 5350	-36.42	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.33	-27
Highest	Above 5725	-42.04	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-47.93	-27
	5650 to 5700	-36.21	-27 to -17
	5700 to 5720	-29.25	-17 to 15.6
	5720 to 5725	-19.84	15.6 to 27
Highest	5850 to 5855	-14.33	27 to 15.6
	5855 to 5875	-28.18	15.6 to -17
	5875 to 5925	-34.30	-17 to -27
	Above 5925	-42.10	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	55.40	7.58	62.98	74	-11.02	H	PK
10420	34.82	8.67	43.49	54	-10.51	H	AV
10420	56.36	7.58	63.94	74	-10.06	H	PK
10420	33.85	8.67	42.52	54	-11.48	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	55.14	8.35	63.49	74	-10.51	H	PK
10580	34.25	9.64	43.89	54	-10.11	H	AV
10580	56.06	8.35	64.41	74	-9.59	V	PK
10580	33.59	9.64	43.23	54	-10.77	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5530MHz)							
11060	54.25	9.05	63.30	74	-10.70	H	PK
11060	31.94	10.25	42.19	54	-11.81	H	AV
11060	56.69	9.05	65.74	74	-8.26	V	PK
11060	33.88	10.25	44.13	54	-9.87	V	AV
Middle Channel (5610MHz)							
11220	55.57	9.22	64.79	74	-9.21	H	PK
11220	34.63	10.28	44.91	54	-9.09	H	AV
11220	52.53	9.22	61.75	74	-12.25	V	PK
11220	34.71	10.28	44.99	54	-9.01	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.87	9.87	64.74	74	-9.26	H	PK
11550	35.64	11.02	46.66	54	-7.34	H	AV
11550	56.07	9.87	65.94	74	-8.06	V	PK
11550	34.57	11.02	45.59	54	-8.41	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.00	-27
Highest	Above 5350	-44.53	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.67	-27
Highest	Above 5350	-36.67	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.90	-27
Highest	Above 5725	-43.73	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-50.93	-27
	5650 to 5700	-35.21	-27 to -17
	5700 to 5720	-29.25	-17 to 15.6
	5720 to 5725	-20.84	15.6 to 27
Highest	5850 to 5855	-17.33	27 to 15.6
	5855 to 5875	-26.18	15.6 to -17
	5875 to 5925	-37.30	-17 to -27
	Above 5925	-40.10	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

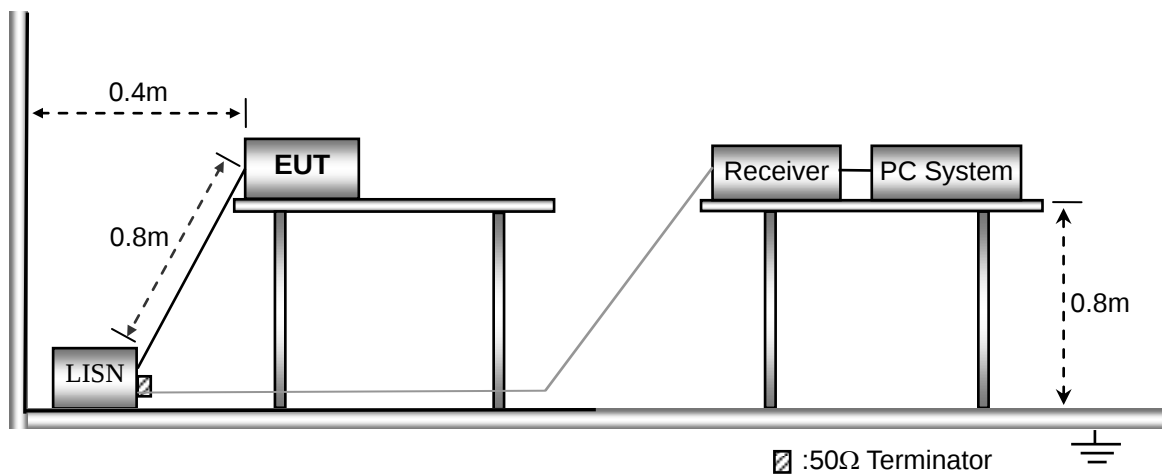
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



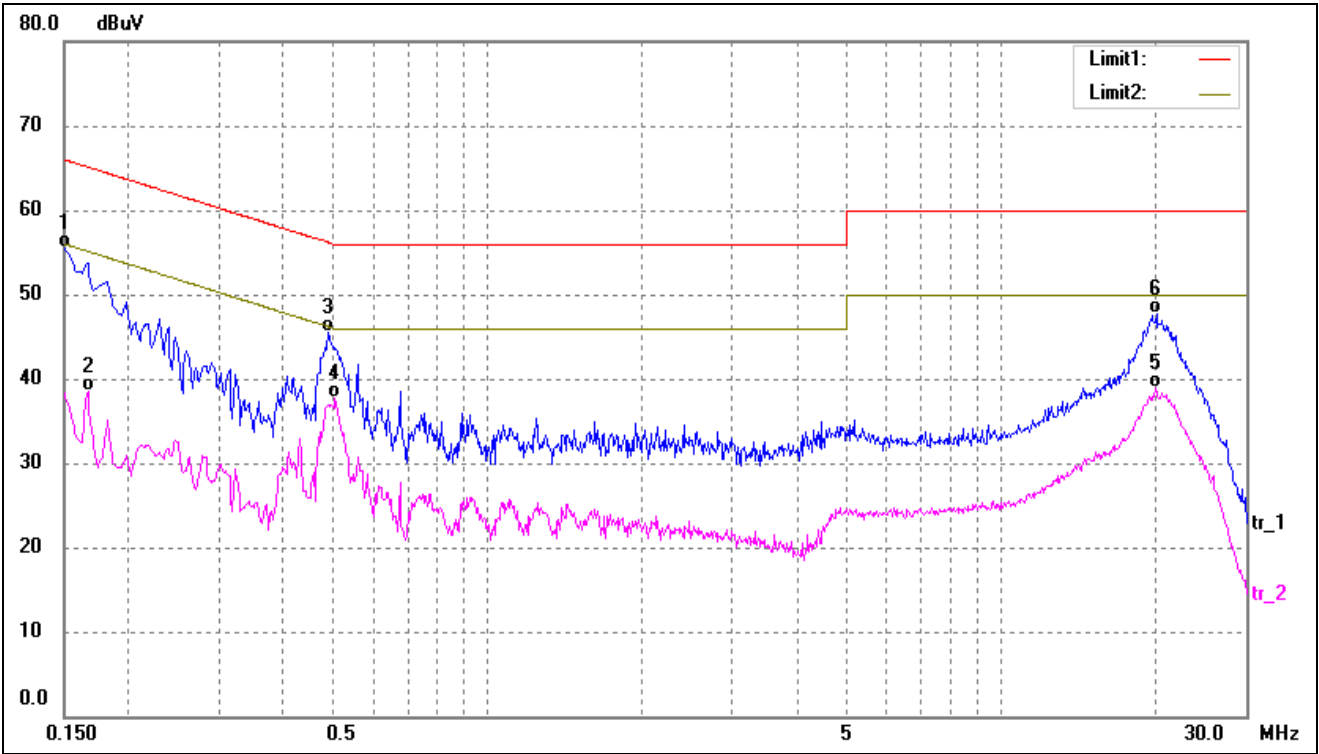
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

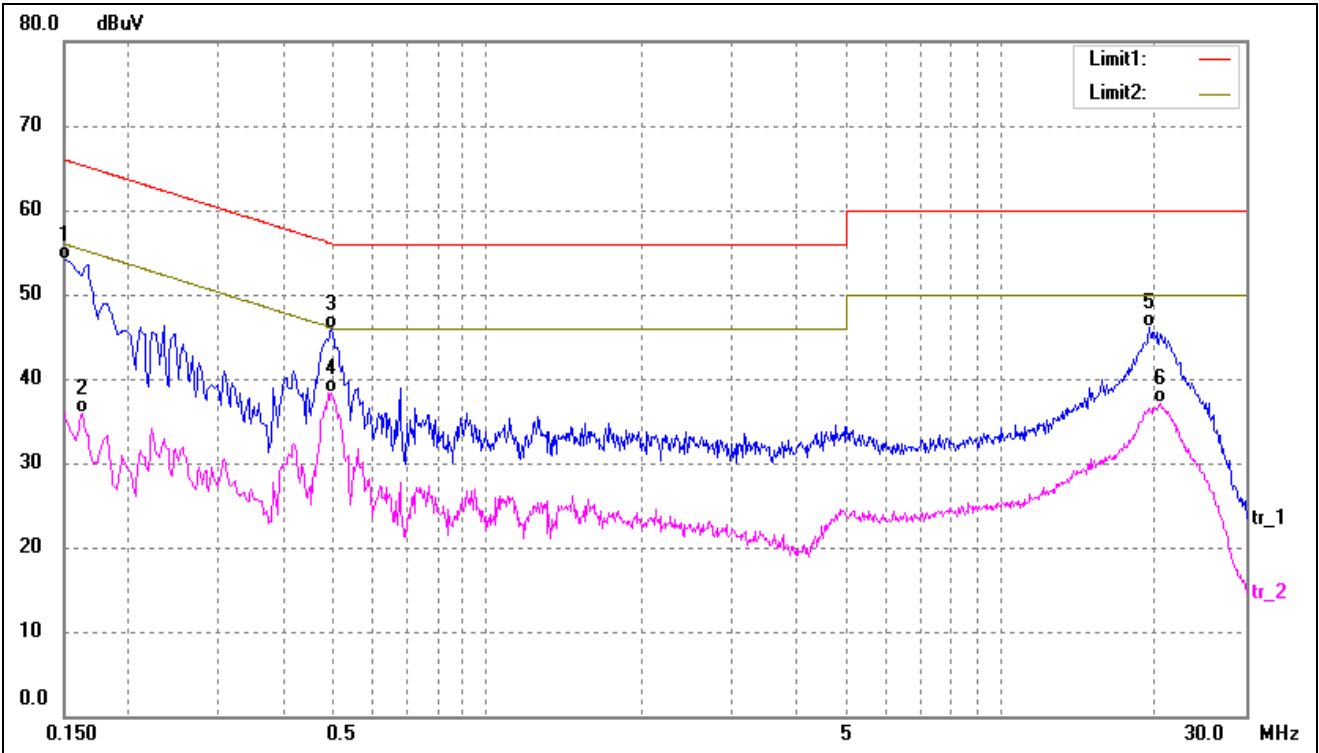
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	45.18	10.38	55.56	66.00	-10.44	QP
2	0.1660	28.14	10.37	38.51	55.16	-16.65	AVG
3	0.4900	35.19	10.26	45.45	56.17	-10.72	QP
4*	0.5060	27.44	10.26	37.70	46.00	-8.30	AVG
5	20.0420	28.74	10.25	38.99	50.00	-11.01	AVG
6	20.1580	37.53	10.25	47.78	60.00	-12.22	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	43.70	10.38	54.08	66.00	-11.92	QP
2	0.1620	25.51	10.37	35.88	55.36	-19.48	AVG
3	0.4980	35.62	10.26	45.88	56.03	-10.15	QP
4*	0.4980	28.10	10.26	38.36	46.03	-7.67	AVG
5	19.4940	35.91	10.24	46.15	60.00	-13.85	QP
6	20.4740	26.84	10.25	37.09	50.00	-12.91	AVG

APPENDIX SUMMARY

Project No.	WTX22X03058240W	Test Engineer	Gala Wang
Start date	2022/5/28	Finish date	2022/6/2
Temperature	23℃	Humidity	45%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	1.02	11
	5200	1.12	11
	5240	0.95	11
802.11n-HT20	5180	0.05	11
	5200	0.03	11
	5240	0.15	11
802.11n-HT40	5190	-2.13	11
	5230	-2.59	11
802.11ac-HT80	5210	-6.51	11

U-NII-2A: 5250-5350MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	0.72	11
	5280	1.51	11
	5320	1.77	11
802.11n-HT20	5260	-0.91	11
	5280	-0.31	11
	5320	0.56	11
802.11n-HT40	5270	-2.67	11
	5310	-1.57	11
802.11ac-HT80	5290	-5.36	11

U-NII-2C: 5470-5725MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5500	4.50	11
	5600	-0.92	11
	5700	0.10	11
802.11n-HT20	5500	3.35	11
	5600	-1.99	11
	5700	-1.68	11
802.11n-HT40	5510	-1.78	11
	5590	-3.87	11
	5670	-6.12	11
802.11ac-HT80	5530	-3.57	11
	5610	-9.94	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	-4.19	2.22	-1.97	30
	5785	-3.62	2.22	-1.4	30
	5825	-3.08	2.22	-0.86	30
802.11n-HT20	5745	-4.30	2.22	-2.08	30
	5785	-4.41	2.22	-2.19	30
	5825	-3.13	2.22	-0.91	30
802.11n HT40	5755	-5.40	2.22	-1.97	30
	5795	-4.97	2.22	-1.4	30
802.11ac VH80	5775	-7.71	2.22	-0.86	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

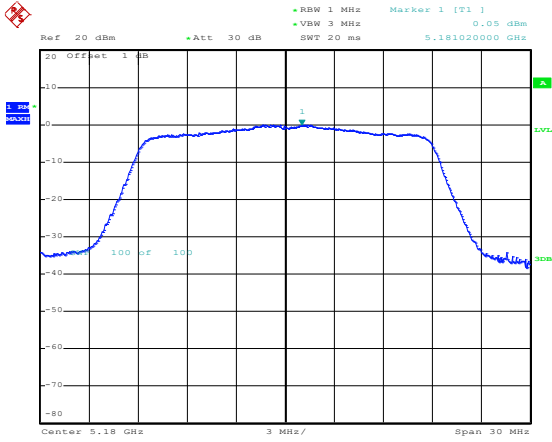
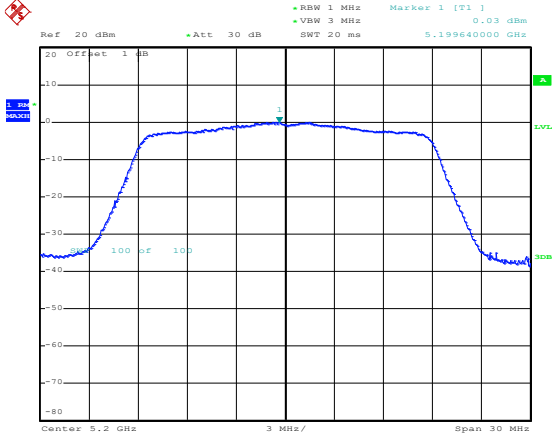
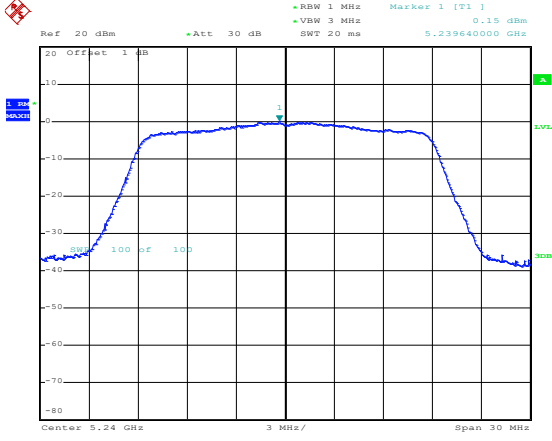
5150-5250MHz

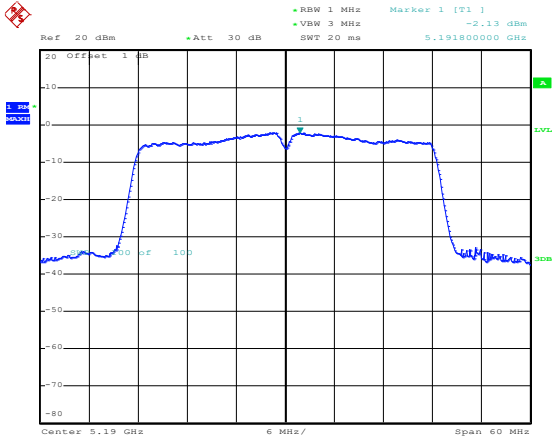
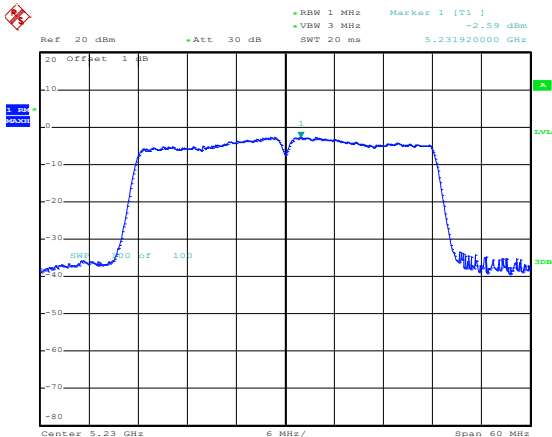
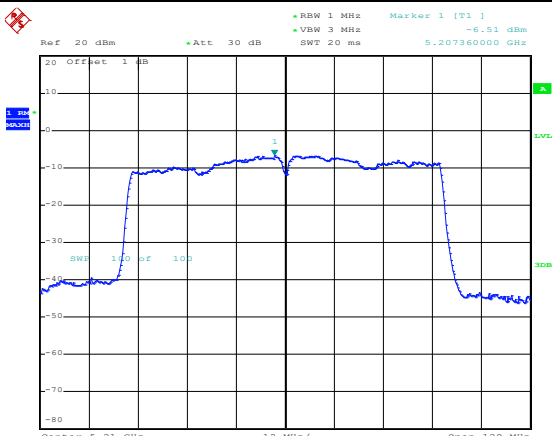
Channel	Frequency (GHz)	Power (dBm)	Bandwidth (MHz)	Span (MHz)	Offset (dB)	Att (dB)	SWT (ms)	Marker 1 (GHz)	Marker 1 (dBm)
802.11a-Low	5.18	1.02	3	30	1	30	20	5.179100000	1.02
802.11a-Middle	5.2	1.12	3	30	1	30	20	5.198200000	1.12
802.11a-High	5.24	0.95	3	30	1	30	20	5.239200000	0.95

802.11a-Low

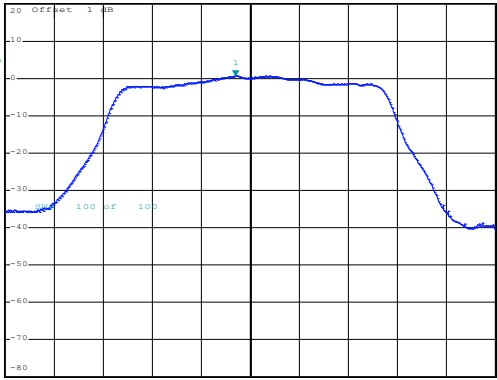
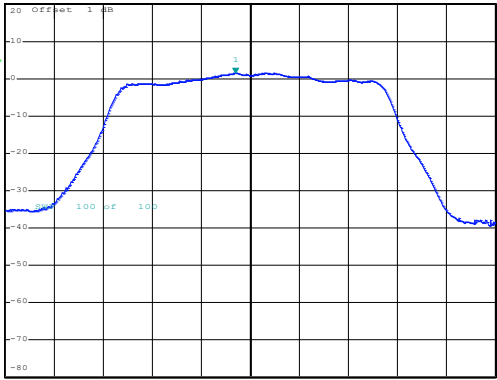
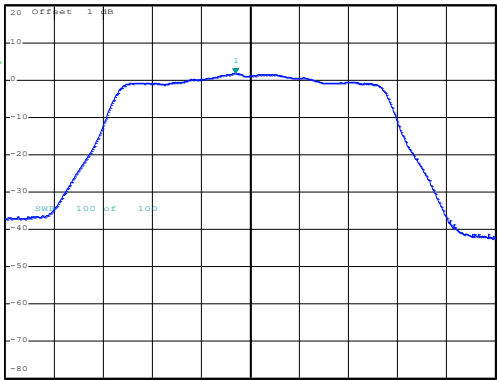
802.11a-Middle

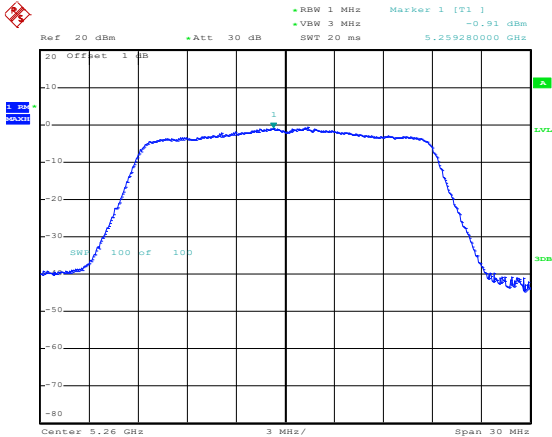
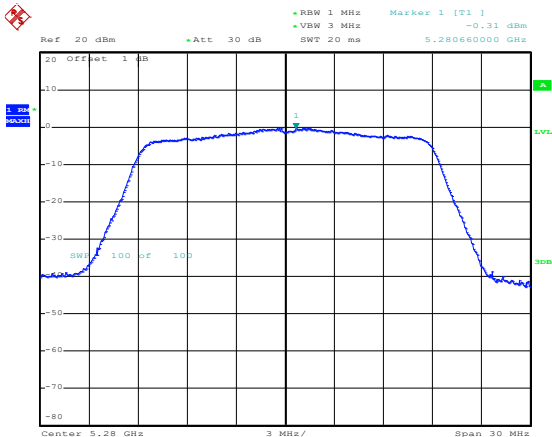
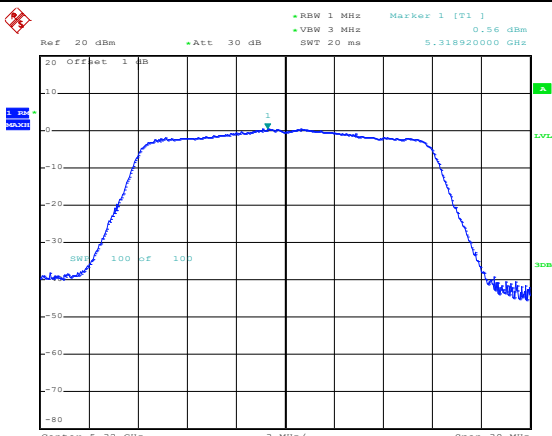
802.11a-High

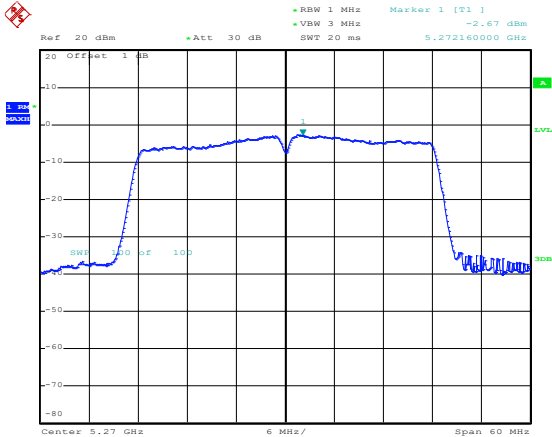
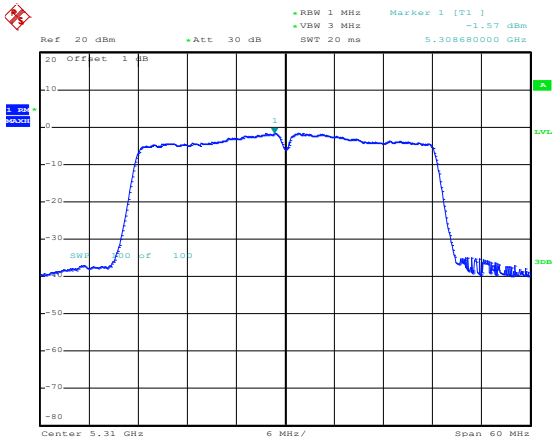
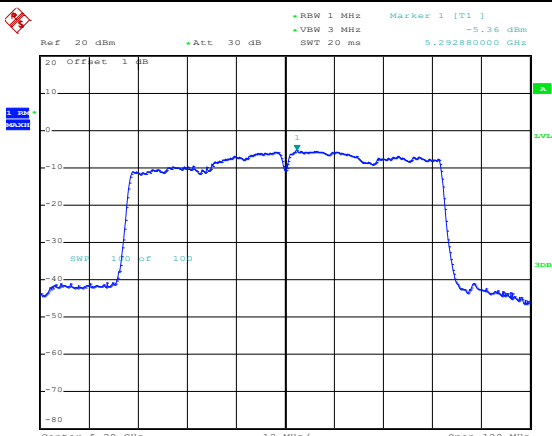
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 0.05 dBm VSW 3 MHz SWT 20 ms 5.181020000 GHz 20 Offset 1 dB 100 Hz Center 5.18 GHz 3 MHz/ Span 30 MHz Date: 30.MAY.2022 18:10:46
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 0.03 dBm VSW 3 MHz SWT 20 ms 5.199640000 GHz 20 Offset 1 dB 100 Hz Center 5.2 GHz 3 MHz/ Span 30 MHz Date: 30.MAY.2022 18:11:33
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 0.15 dBm VSW 3 MHz SWT 20 ms 5.239640000 GHz 20 Offset 1 dB 100 Hz Center 5.24 GHz 3 MHz/ Span 30 MHz Date: 30.MAY.2022 18:12:10

802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.13 dBm VSW 3 MHz SWT 20 ms 5.19180000 GHz Center 5.19 GHz 6 MHz/ Span 60 MHz Date: 30.MAY.2022 18:12:52
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.59 dBm VSW 3 MHz SWT 20 ms 5.231920000 GHz Center 5.23 GHz 6 MHz/ Span 60 MHz Date: 30.MAY.2022 18:13:23
802.11ac-HT80-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -6.51 dBm VSW 3 MHz SWT 20 ms 5.207360000 GHz Center 5.21 GHz 12 MHz/ Span 120 MHz Date: 30.MAY.2022 18:04:02

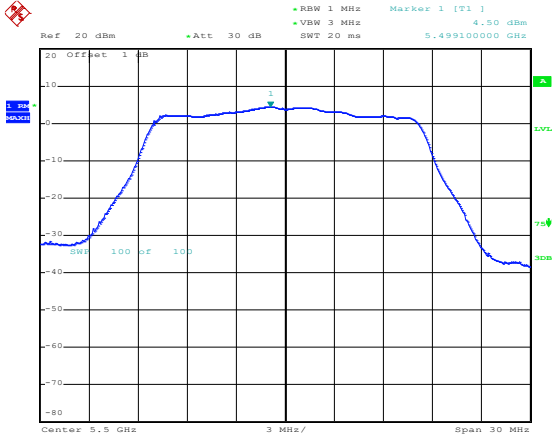
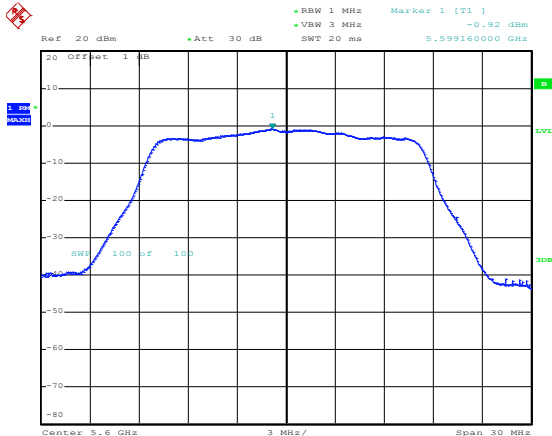
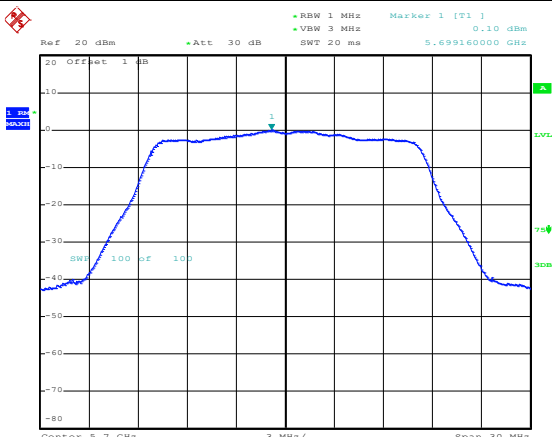
5250-5350MHz

802.11a-Low	 Date: 1.JUN.2022 11:06:28
802.11a-Middle	 Date: 1.JUN.2022 11:08:36
802.11a-High	 Date: 1.JUN.2022 11:09:29

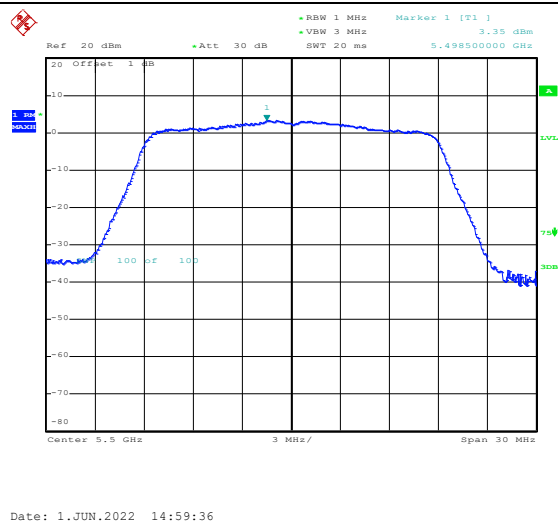
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -0.91 dBm VSW 3 MHz SWT 20 ms 5.259280000 GHz 20 Offset 1 dB Center 5.26 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 11:10:05
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -0.31 dBm VSW 3 MHz SWT 20 ms 5.280660000 GHz 20 Offset 1 dB Center 5.28 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 11:10:46
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 0.56 dBm VSW 3 MHz SWT 20 ms 5.318920000 GHz 20 Offset 1 dB Center 5.32 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 11:11:16

802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -2.67 dBm •VBW 3 MHz 5.272160000 GHz SWT 20 ms 20 Offset 1 dB SWR 100 100 Center 5.27 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 11:13:33
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -1.57 dBm •VBW 3 MHz 5.308680000 GHz SWT 20 ms 20 Offset 1 dB SWR 100 100 Center 5.31 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 11:14:20
802.11ac-HT80-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.36 dBm •VBW 3 MHz 5.292880000 GHz SWT 20 ms 20 Offset 1 dB SWR 100 100 Center 5.29 GHz 12 MHz/ Span 120 MHz Date: 1.JUN.2022 11:05:49

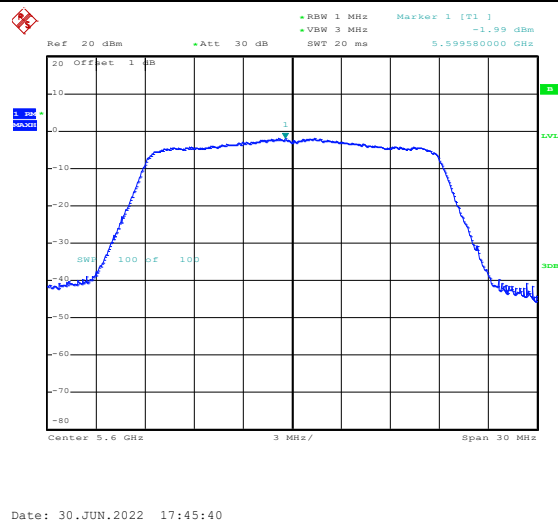
5470-5725MHz

802.11a-Low	 Date: 1.JUN.2022 14:58:02
802.11a-Middle	 Date: 30.JUN.2022 17:45:08
802.11a-High	 Date: 1.JUN.2022 14:59:09

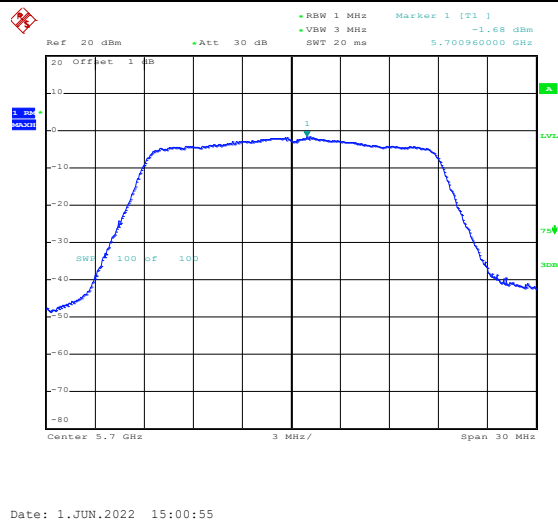
802.11n-HT20-Low

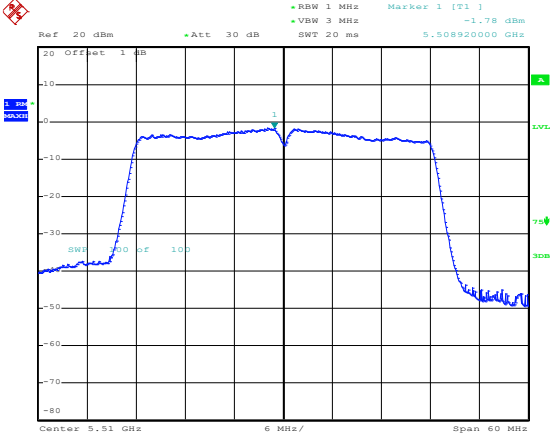
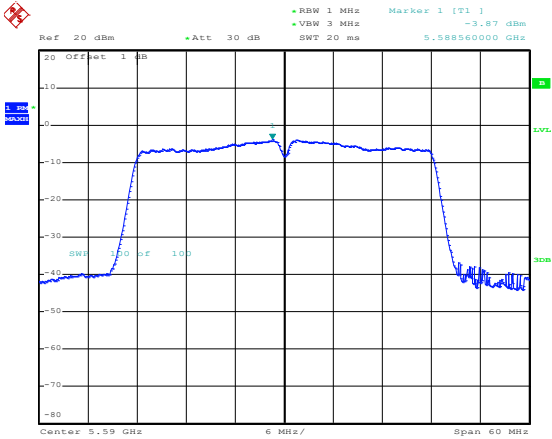
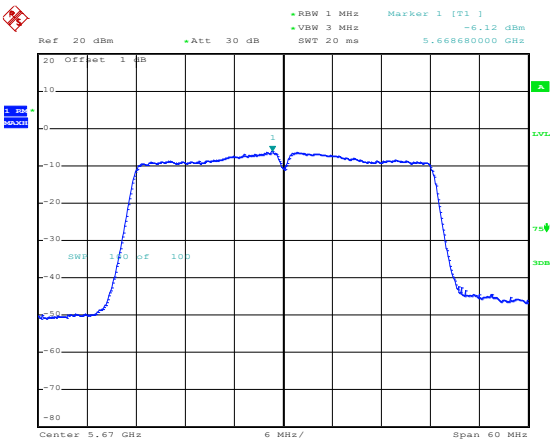


802.11n-HT20-Middle



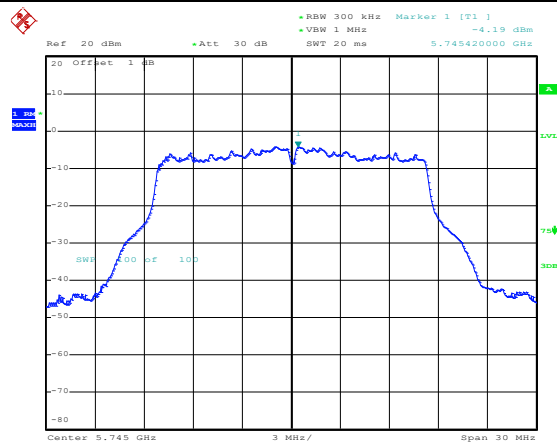
802.11n-HT20-High



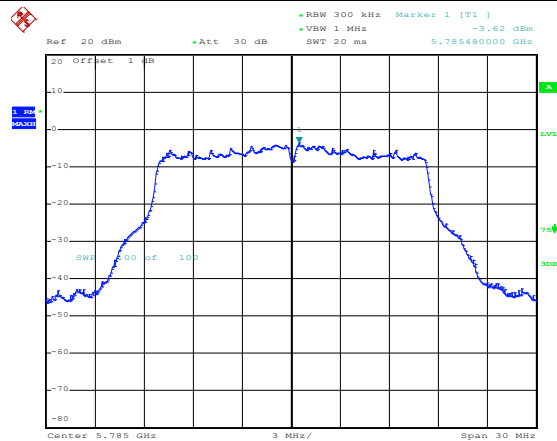
802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -1.78 dBm +VBW 3 MHz 5.508920000 GHz SWT 20 ms 20 Offset 1 dB 1 10 20 30 40 50 60 70 80 SWR 100 dB 100 Center 5.51 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 15:01:34
802.11n-HT40- Middle	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -3.87 dBm +VBW 3 MHz 5.588560000 GHz SWT 20 ms 20 Offset 1 dB 1 10 20 30 40 50 60 70 80 SWR 100 dB 100 Center 5.59 GHz 6 MHz/ Span 60 MHz Date: 30.JUN.2022 17:46:24
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -6.12 dBm +VBW 3 MHz 5.668680000 GHz SWT 20 ms 20 Offset 1 dB 1 10 20 30 40 50 60 70 80 SWR 100 dB 100 Center 5.67 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 15:02:39

802.11ac-HT80-L	Date: 1.JUN.2022 14:56:58
802.11ac-HT80-T	Date: 30.JUN.2022 18:00:27

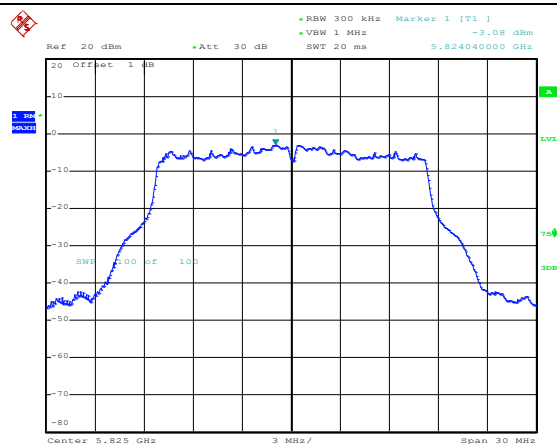
5725-5850MHz



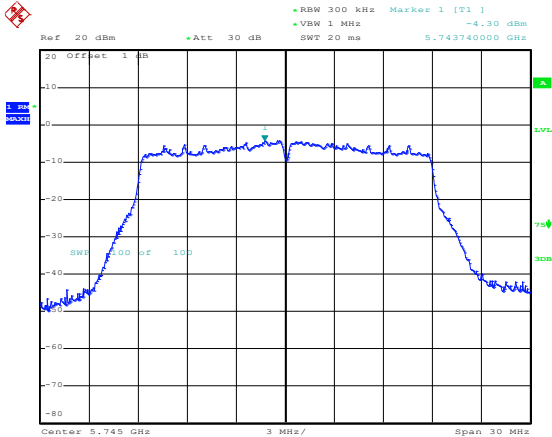
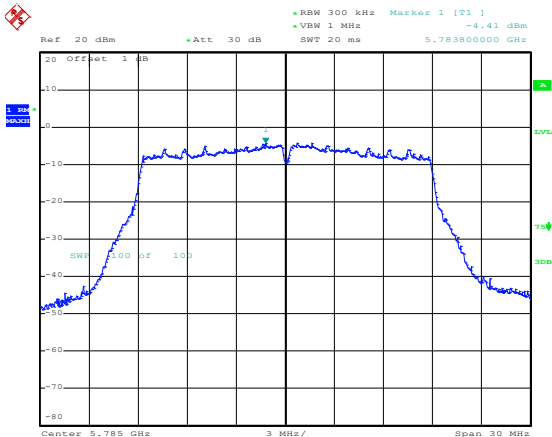
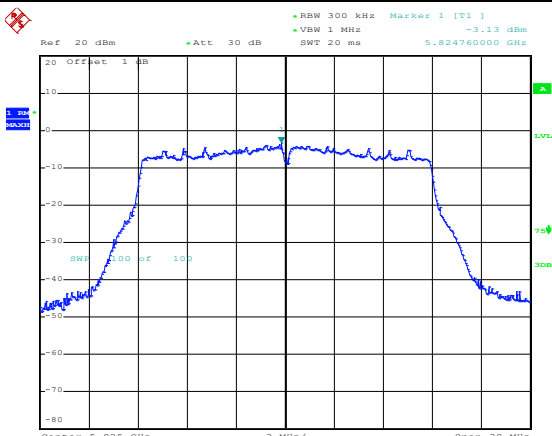
Date: 1.JUN.2022 15:43:40

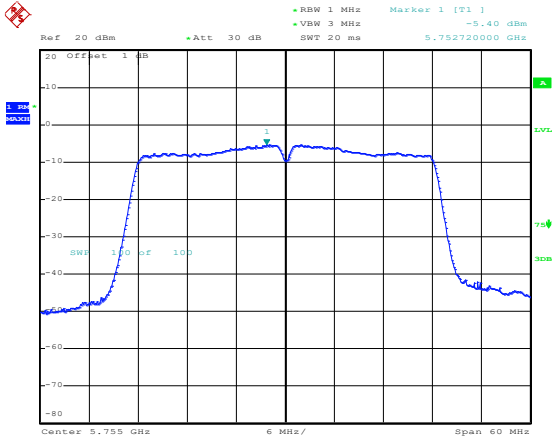
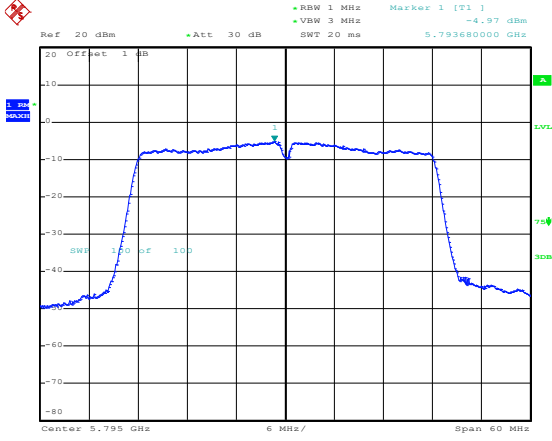
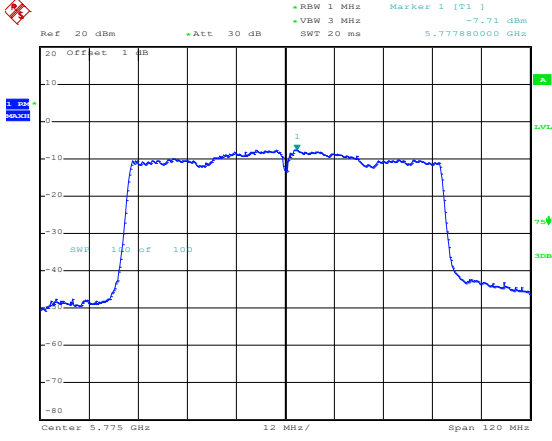


Date: 1.JUN.2022 15:44:02



Date: 1.JUN.2022 15:44:35

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -4.30 dBm VBW 1 MHz SWT 20 ms 5.743740000 GHz Center 5.745 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 15:45:19
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -4.41 dBm VBW 1 MHz SWT 20 ms 5.783800000 GHz Center 5.785 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 15:46:58
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -3.13 dBm VBW 1 MHz SWT 20 ms 5.824760000 GHz Center 5.825 GHz 3 MHz/ Span 30 MHz Date: 1.JUN.2022 15:47:27

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -5.40 dBm +VBW 3 MHz SWT 20 ms 5.752720000 GHz 20 Offset 1 dB Center 5.755 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 15:48:16
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -4.97 dBm +VBW 3 MHz SWT 20 ms 5.793680000 GHz 20 Offset 1 dB Center 5.795 GHz 6 MHz/ Span 60 MHz Date: 1.JUN.2022 15:48:46
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -7.71 dBm +VBW 3 MHz SWT 20 ms 5.777880000 GHz 20 Offset 1 dB Center 5.775 GHz 12 MHz/ Span 120 MHz Date: 1.JUN.2022 15:41:27

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

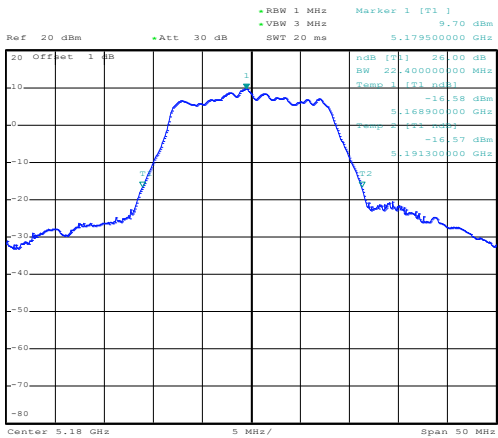
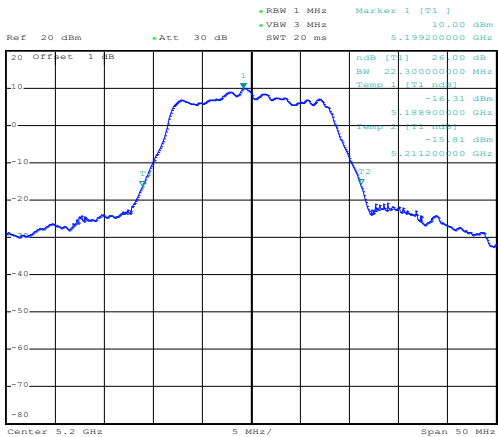
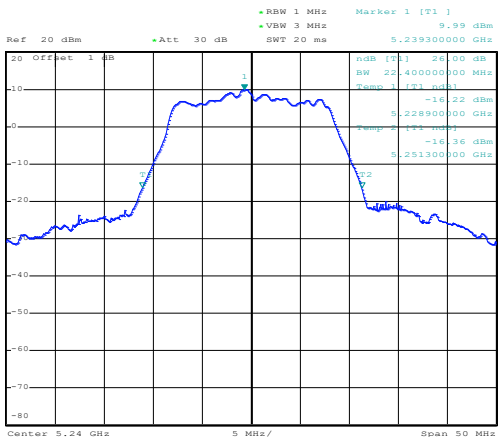
U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	22.40	17.70	Pass
	5200	22.30	17.80	Pass
	5240	22.40	17.80	Pass
802.11n-HT20	5180	23.30	19.30	Pass
	5200	23.20	19.40	Pass
	5240	23.30	19.40	Pass
802.11n-HT40	5190	46.40	36.80	Pass
	5230	41.00	37.00	Pass
802.11ac-HT80	5210	81.60	76.00	Pass

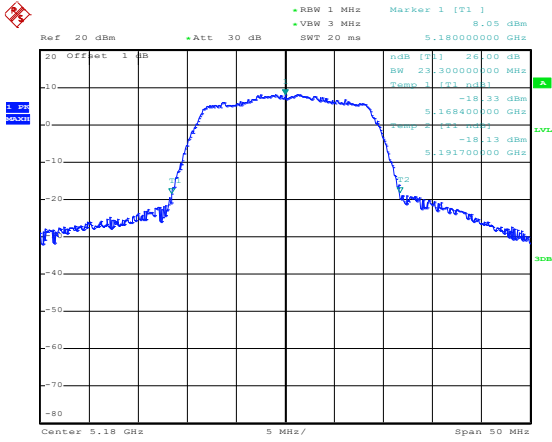
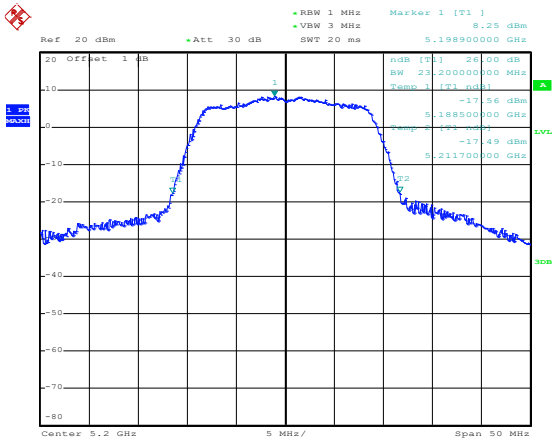
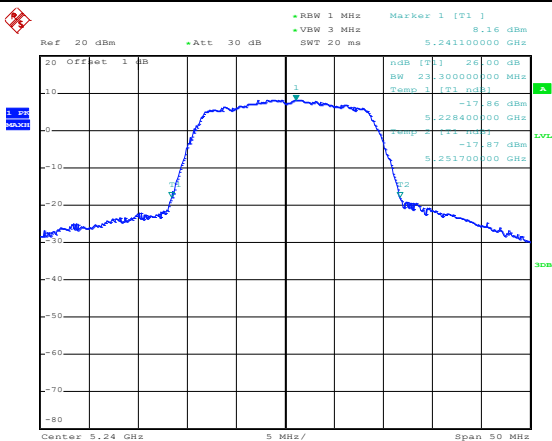
U-NII-2A: 5250-5350MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5260	22.20	17.70	Pass
	5280	22.20	17.80	Pass
	5320	22.10	17.60	Pass
802.11n-HT20	5260	23.20	19.40	Pass
	5280	23.00	19.30	Pass
	5320	23.20	19.30	Pass
802.11n-HT40	5270	41.20	37.00	Pass
	5310	41.20	36.60	Pass
802.11ac-HT80	5290	82.00	76.00	Pass

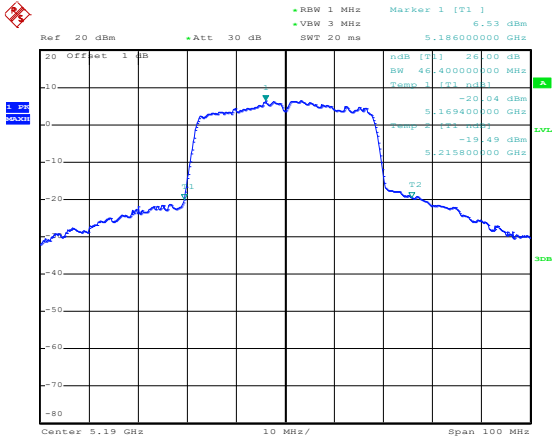
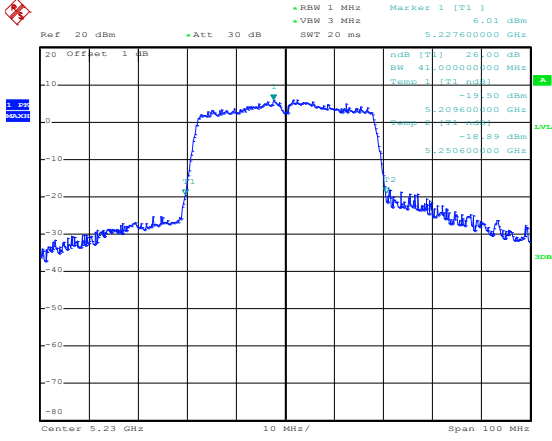
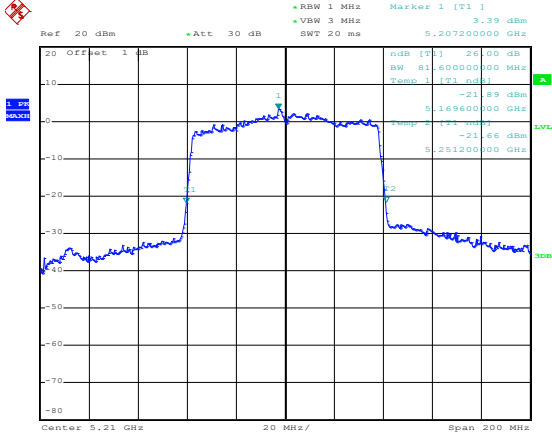
U-NII-2C: 5470-5725MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5500	22.20	17.70	Pass
	5600	22.20	17.70	Pass
	5700	22.30	17.70	Pass
802.11n-HT20	5500	23.20	19.30	Pass
	5600	23.10	19.20	Pass
	5700	23.00	19.20	Pass
802.11n-HT40	5510	41.20	36.80	Pass
	5590	41.20	36.80	Pass
	5670	41.00	36.60	Pass
802.11ac-HT80	5530	82.00	76.00	Pass
	5610	81.60	76.00	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.30	16.60	≥500
	5785	16.30	16.60	≥500
	5825	16.40	16.70	≥500
802.11n-HT20	5745	17.80	18.00	≥500
	5785	17.80	18.00	≥500
	5825	17.90	18.00	≥500
802.11n-HT40	5755	36.60	36.60	≥500
	5795	36.40	36.80	≥500
802.11ac VH80	5775	76.40	75.60	≥500

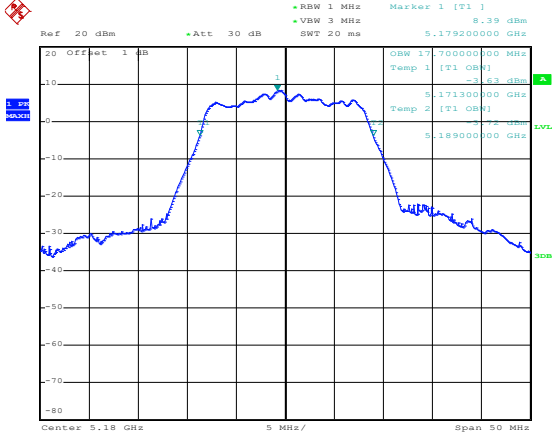
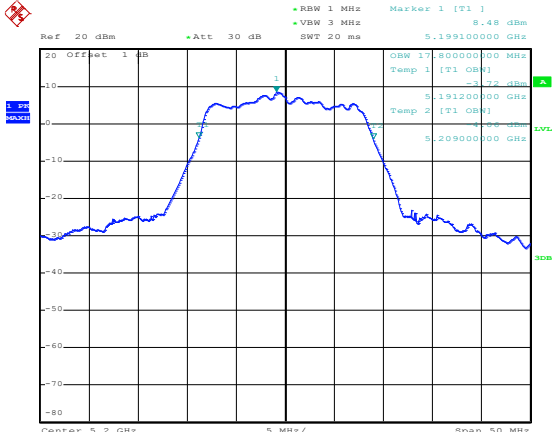
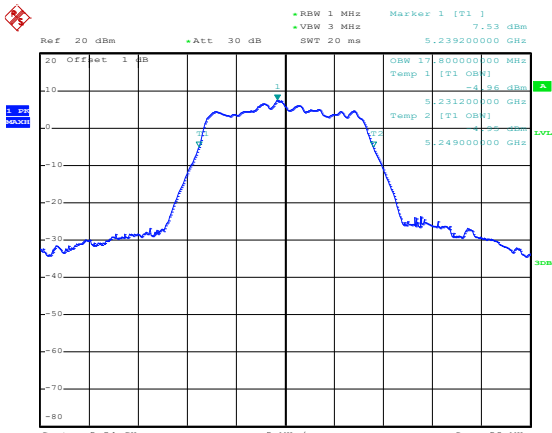
5150-5250MHz
-26dbm

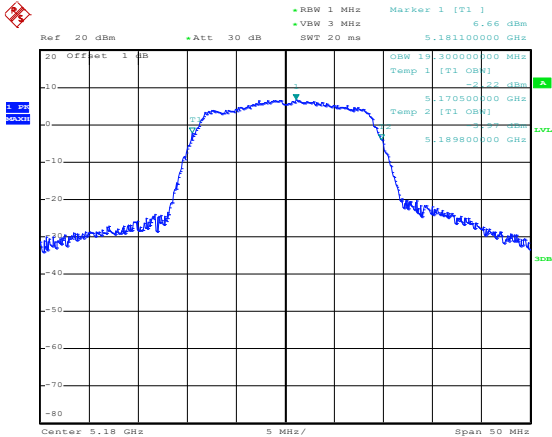
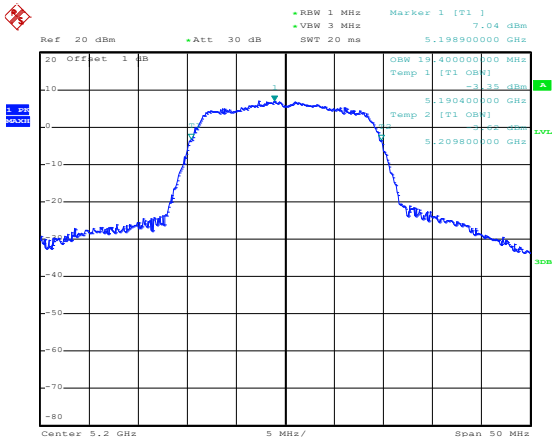
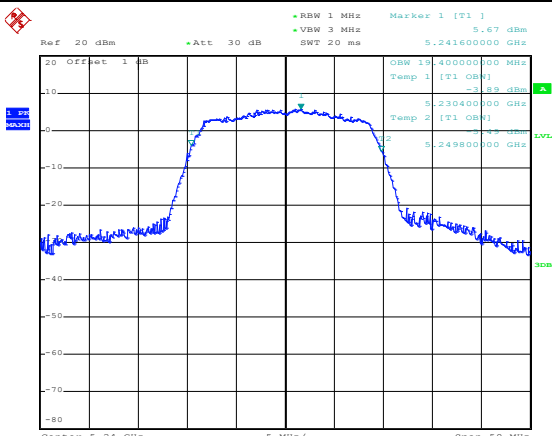
802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 9.70 dBm VBW 3 MHz SWT 20 ms 5.179500000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.400000000 MHz Temp 1 [T1] 0 dBm -16.58 dBm 5.168900000 GHz Temp 2 [T2] 0 dBm -16.57 dBm 5.191300000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:21:59
802.11a-Middle	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 10.00 dBm VBW 3 MHz SWT 20 ms 5.199200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.300000000 MHz Temp 1 [T1] 0 dBm -16.31 dBm 5.188900000 GHz Temp 2 [T2] 0 dBm -15.81 dBm 5.211200000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:23:09
802.11a-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 9.99 dBm VBW 3 MHz SWT 20 ms 5.239300000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.400000000 MHz Temp 1 [T1] 0 dBm -16.22 dBm 5.228900000 GHz Temp 2 [T2] 0 dBm -16.36 dBm 5.251300000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:24:31

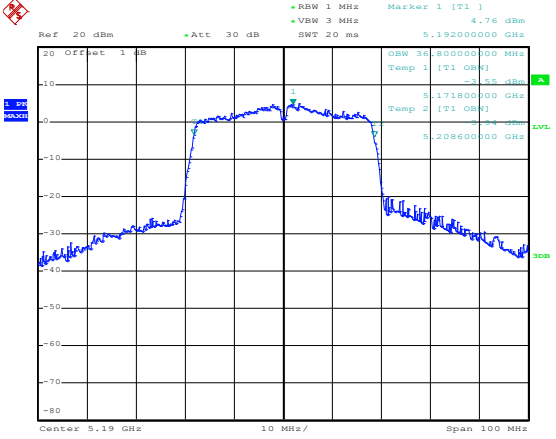
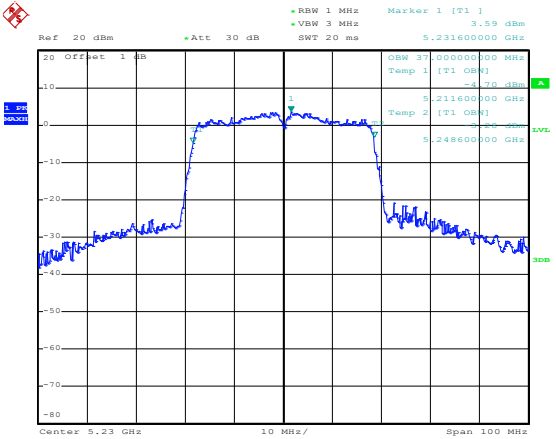
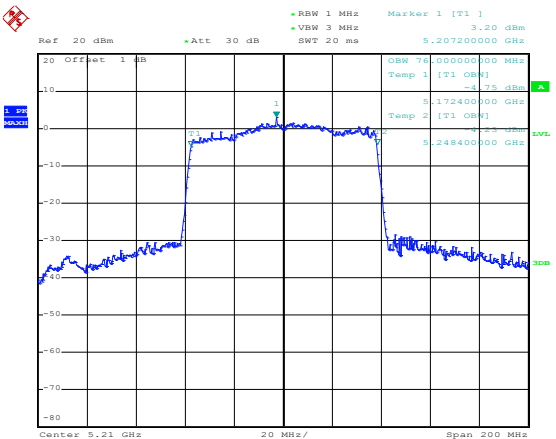
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.18000000 GHz ndB [T1] -18.33 dBm SW 23.30000000 MHz Temp 1 [T1] ndB 5.16840000 GHz -18.13 dBm 5.19170000 GHz -18.13 dBm Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:26:14
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.20000000 GHz ndB [T1] -17.56 dBm SW 23.30000000 MHz Temp 1 [T1] ndB 5.18850000 GHz -17.49 dBm 5.21170000 GHz -17.49 dBm Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:26:41
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.24100000 GHz ndB [T1] -17.86 dBm SW 23.30000000 MHz Temp 1 [T1] ndB 5.22840000 GHz -17.87 dBm 5.25170000 GHz -17.87 dBm Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 10:27:39

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 6.53 dBm VBW 3 MHz SWT 20 ms 5.186000000 GHz nBW [T1] 26.00 dB BW 46.400000000 MHz Temp 1 [T1] nBW -20.04 dBm 5.169400000 GHz -19.49 dBm 5.215800000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 10:40:46
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 6.01 dBm VBW 3 MHz SWT 20 ms 5.227600000 GHz nBW [T1] 26.00 dB BW 41.000000000 MHz Temp 1 [T1] nBW -19.50 dBm 5.209600000 GHz -18.89 dBm 5.250600000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 10:41:40
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 3.39 dBm VBW 3 MHz SWT 20 ms 5.207200000 GHz nBW [T1] 26.00 dB BW 81.600000000 MHz Temp 1 [T1] nBW -21.89 dBm 5.169600000 GHz -21.66 dBm 5.251200000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 10:19:42

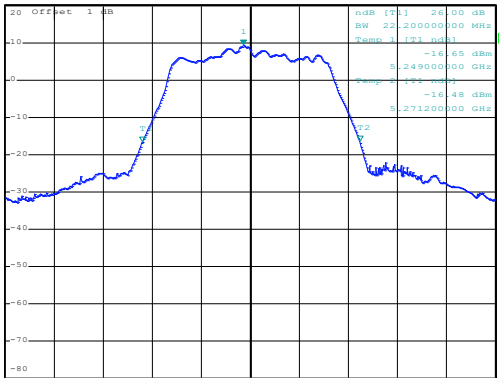
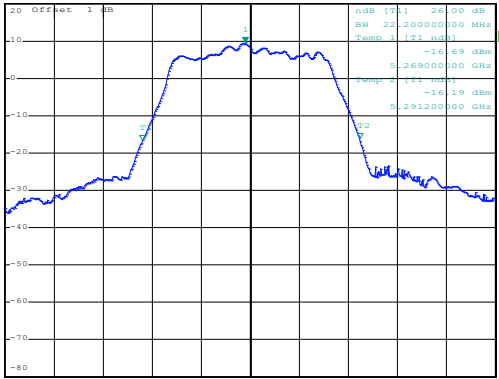
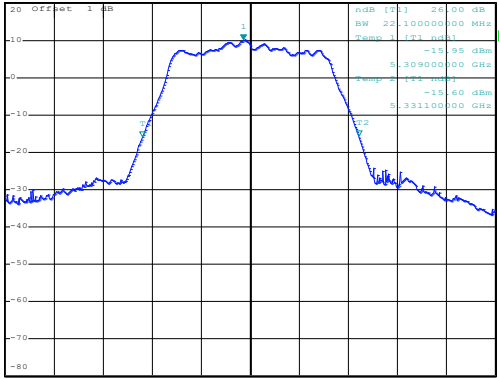
99%

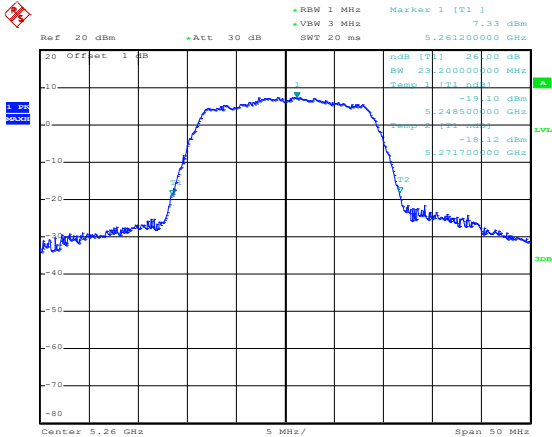
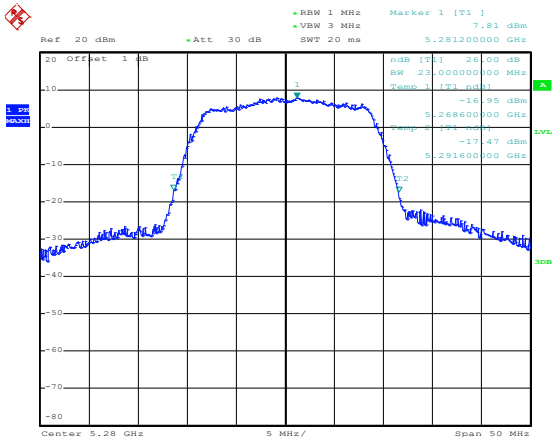
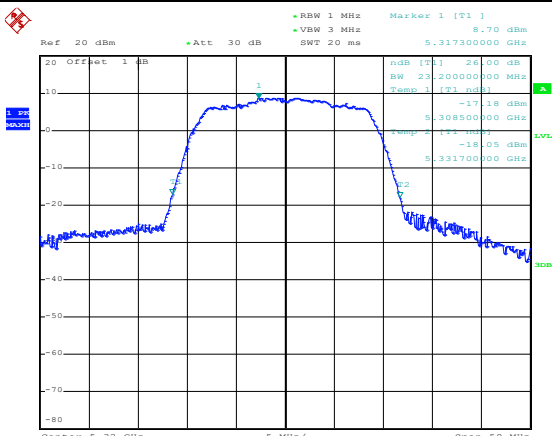
802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.179200000 GHz, -3.63 dBm, OSW: 17.700000000 MHz, Temp 1 [T1]: 5.171300000 GHz, -3.63 dBm, Temp 2 [T1]: 5.189000000 GHz, -3.63 dBm, LVL: 30dB Center: 5.18 GHz, Span: 50 MHz Date: 1.JUN.2022 10:45:07
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.199100000 GHz, -3.42 dBm, OSW: 17.800000000 MHz, Temp 1 [T1]: 5.191200000 GHz, -3.42 dBm, Temp 2 [T1]: 5.209000000 GHz, -3.42 dBm, LVL: 30dB Center: 5.2 GHz, Span: 50 MHz Date: 1.JUN.2022 10:45:53
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.239200000 GHz, -4.36 dBm, OSW: 17.800000000 MHz, Temp 1 [T1]: 5.231200000 GHz, -4.36 dBm, Temp 2 [T1]: 5.249000000 GHz, -4.36 dBm, LVL: 30dB Center: 5.24 GHz, Span: 50 MHz Date: 1.JUN.2022 10:46:43

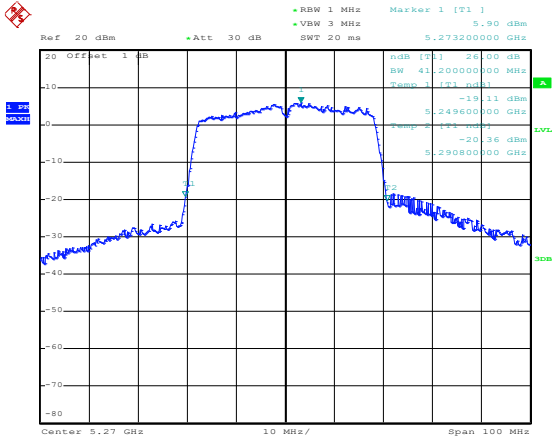
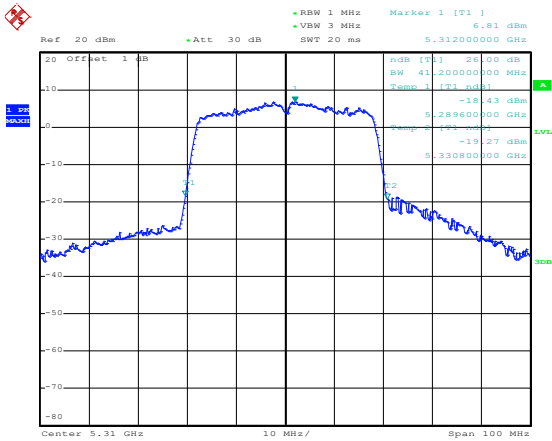
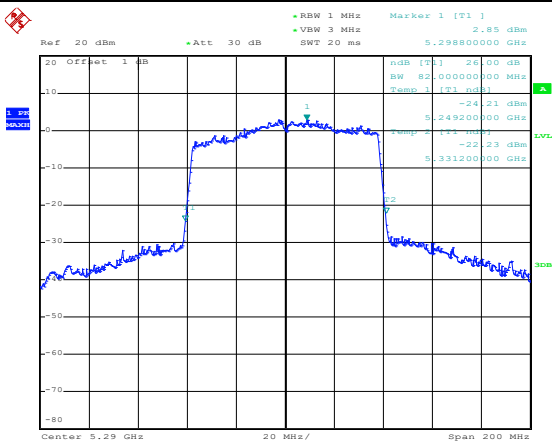
802.11n-HT20-Low	 Date: 1.JUN.2022 10:48:09
802.11n-HT20-Middle	 Date: 1.JUN.2022 10:48:41
802.11n-HT20-High	 Date: 1.JUN.2022 10:49:06

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 4.76 dBm 5.192000000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.00 dBm -3.55 dBm 5.171800000 GHz Temp 2 [T1] 0.00 dBm -3.55 dBm 5.208600000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 10:49:39
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 3.59 dBm 5.231600000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.00 dBm -3.70 dBm 5.211600000 GHz Temp 2 [T1] 0.00 dBm -3.70 dBm 5.248600000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 10:50:11
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 3.20 dBm 5.207200000 GHz OSW 76.00000000 MHz Temp 1 [T1] 0.00 dBm -4.75 dBm 5.172400000 GHz Temp 2 [T1] 0.00 dBm -4.75 dBm 5.248400000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 10:53:17

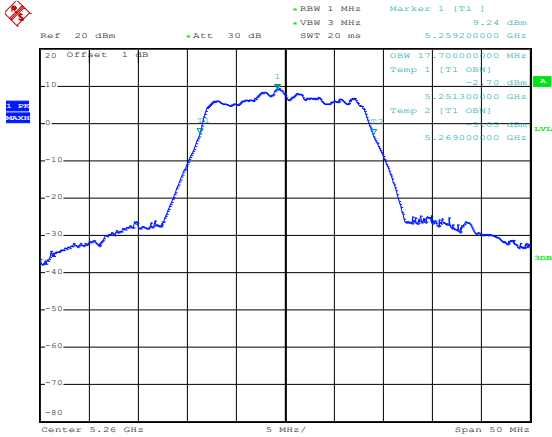
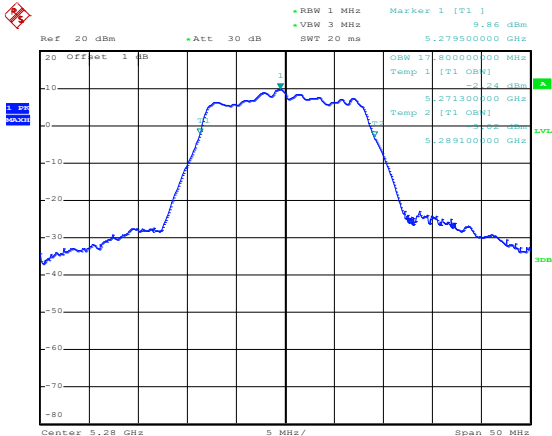
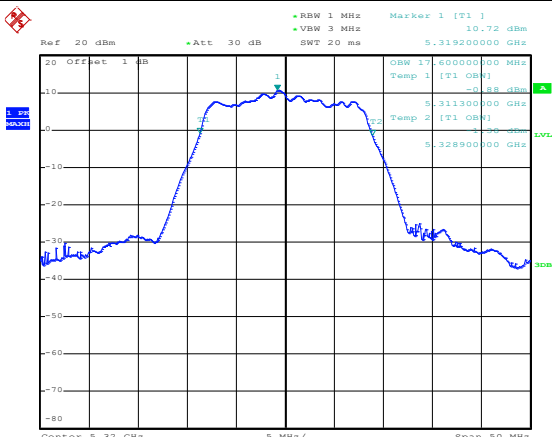
5250-5350MHz
-26dbm

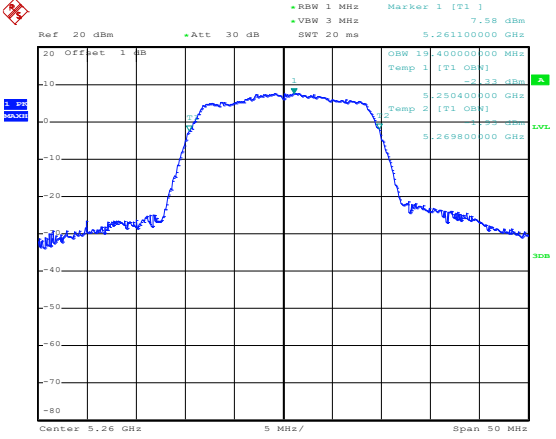
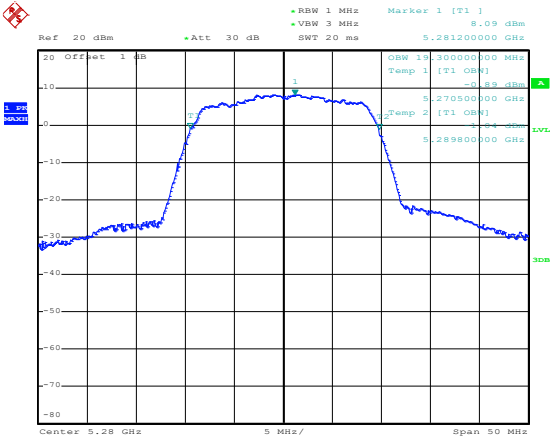
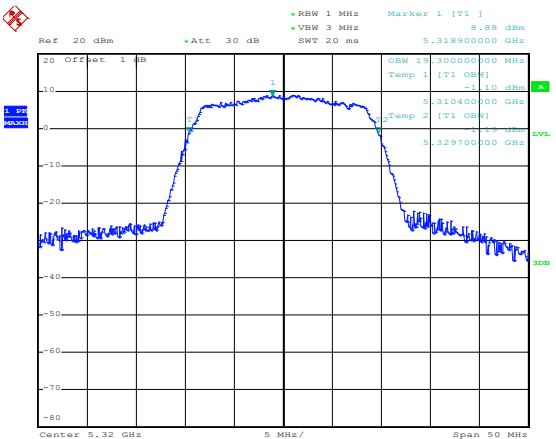
802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 9.28 dBm VBW 3 MHz SWF 20 ms 5.259300000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.200000000 MHz Temp 1 [T1] n dB -16.65 dBm 5.249000000 GHz Temp 2 [T2] n dB -16.48 dBm 5.271200000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:20:55
802.11a-Middle	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 9.51 dBm VBW 3 MHz SWF 20 ms 5.279500000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.200000000 MHz Temp 1 [T1] n dB -16.69 dBm 5.269000000 GHz Temp 2 [T2] n dB -16.19 dBm 5.291200000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:21:37
802.11a-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 10.10 dBm VBW 3 MHz SWF 20 ms 5.319300000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 22.100000000 MHz Temp 1 [T1] n dB -15.95 dBm 5.309000000 GHz Temp 2 [T2] n dB -15.60 dBm 5.331100000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:22:03

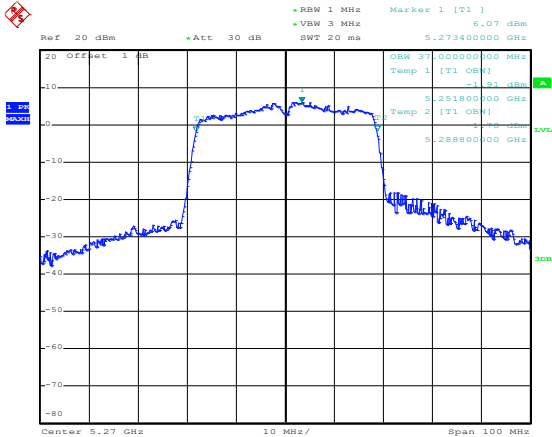
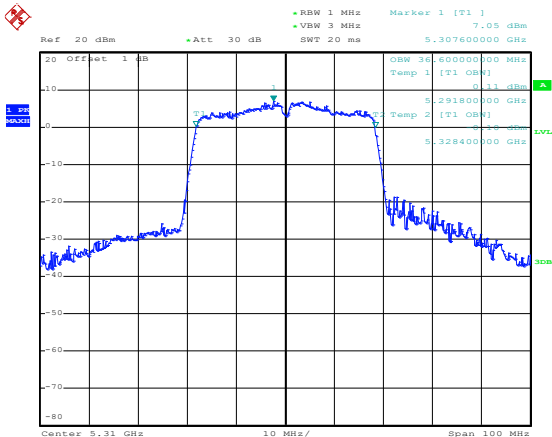
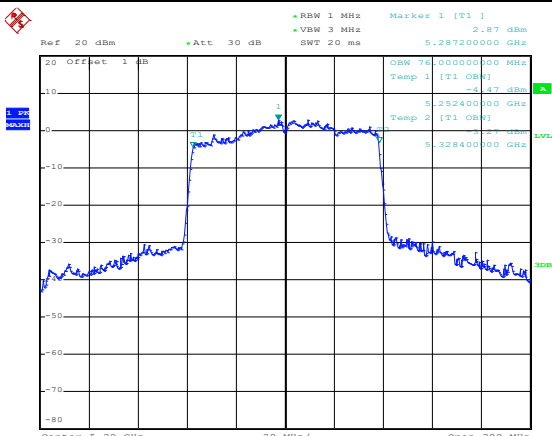
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 7.33 dBm 5.261200000 GHz ndB [T1] 26.00 dB BW 23.00000000 MHz Temp 1 [T1] ndB -19.10 dBm 5.248500000 GHz -18.12 dBm 5.271700000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:23:01
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 7.81 dBm 5.281200000 GHz ndB [T1] 26.00 dB BW 23.00000000 MHz Temp 1 [T1] ndB -16.95 dBm 5.268600000 GHz -17.47 dBm 5.291600000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:23:32
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 8.70 dBm 5.317300000 GHz ndB [T1] 26.00 dB BW 23.00000000 MHz Temp 1 [T1] ndB -17.18 dBm 5.308500000 GHz -18.05 dBm 5.331700000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:24:17

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 5.90 dBm VBW 3 MHz SWT 20 ms 5.273200000 GHz 20 Offset 1 dB dBm 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.27 GHz 10 MHz/ Span 100 MHz ndB [T1] -26.00 dB BW 41.20000000 MHz Temp 1 [T1] dBm -19.11 dBm 5.249600000 GHz -20.36 dBm 5.290800000 GHz LVL 3dB Date: 1.JUN.2022 11:25:13
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 6.81 dBm VBW 3 MHz SWT 20 ms 5.312000000 GHz 20 Offset 1 dB dBm 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.31 GHz 10 MHz/ Span 100 MHz ndB [T1] -26.00 dB BW 41.20000000 MHz Temp 1 [T1] dBm -18.43 dBm 5.289600000 GHz -19.27 dBm 5.330800000 GHz LVL 3dB Date: 1.JUN.2022 11:26:39
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 2.85 dBm VBW 3 MHz SWT 20 ms 5.298800000 GHz 20 Offset 1 dB dBm 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.29 GHz 20 MHz/ Span 200 MHz ndB [T1] -26.00 dB BW 82.00000000 MHz Temp 1 [T1] dBm -24.21 dBm 5.249200000 GHz -22.23 dBm 5.331200000 GHz LVL 3dB Date: 1.JUN.2022 11:18:19

99%

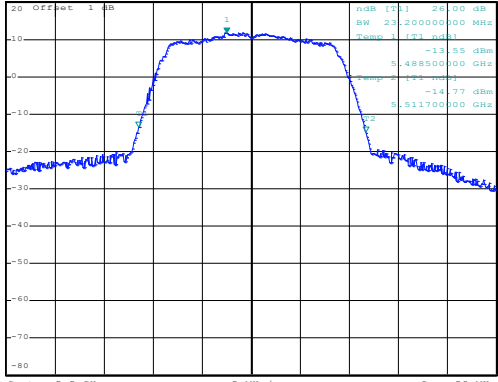
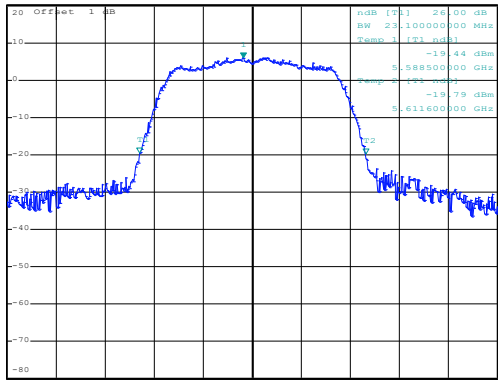
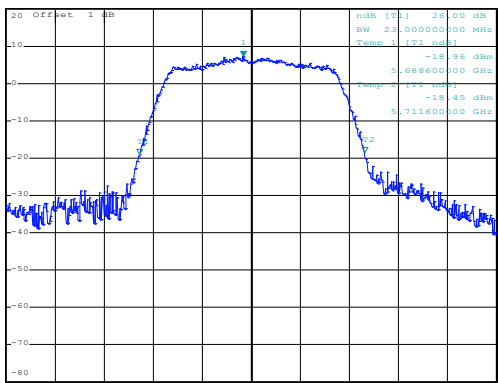
802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.259200000 GHz 9.24 dBm OSW 17.700000000 MHz Temp 1 [T1] OSW] -2.79 dBm 5.251300000 GHz Temp 2 [T1] OSW] -3.22 dBm 5.269000000 GHz LVL Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:28:33
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.279500000 GHz 9.86 dBm OSW 17.800000000 MHz Temp 1 [T1] OSW] -2.84 dBm 5.271300000 GHz Temp 2 [T1] OSW] -3.22 dBm 5.289100000 GHz LVL Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:29:36
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.319200000 GHz 10.72 dBm OSW 17.600000000 MHz Temp 1 [T1] OSW] -2.88 dBm 5.311300000 GHz Temp 2 [T1] OSW] -3.22 dBm 5.328900000 GHz LVL Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:30:13

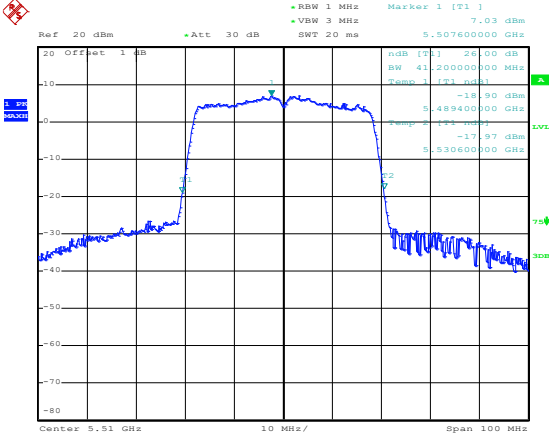
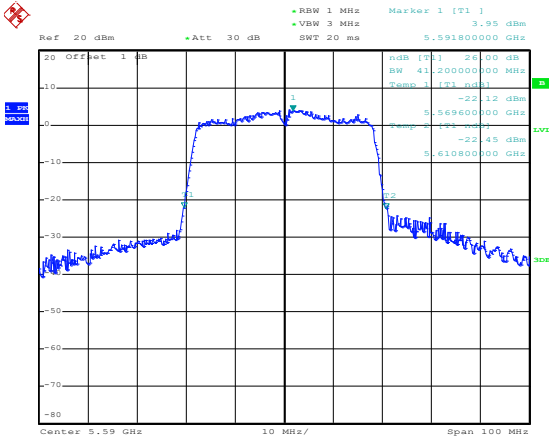
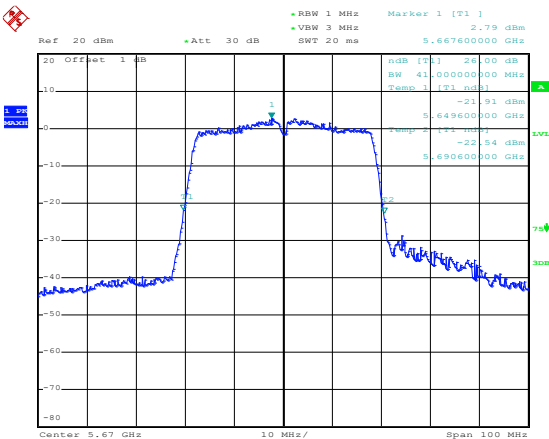
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 7.58 dBm OSW 10.40000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.261000000 GHz 5.250400000 GHz 5.269800000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:31:12
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 8.09 dBm OSW 10.30000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.281200000 GHz 5.270500000 GHz 5.289800000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:32:31
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 8.88 dBm OSW 10.30000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.318900000 GHz 5.310400000 GHz 5.329700000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 11:33:22

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 6.07 dBm 5.273400000 GHz OSW 37.00000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.251800000 GHz 5.288800000 GHz Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 11:34:24
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 7.05 dBm 5.307600000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.11 dBm Temp 2 [T1] 0.00 dBm 5.291800000 GHz 5.328400000 GHz Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 11:35:17
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 2.87 dBm 5.287200000 GHz OSW 76.00000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm 5.252400000 GHz 5.328400000 GHz Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 11:19:00

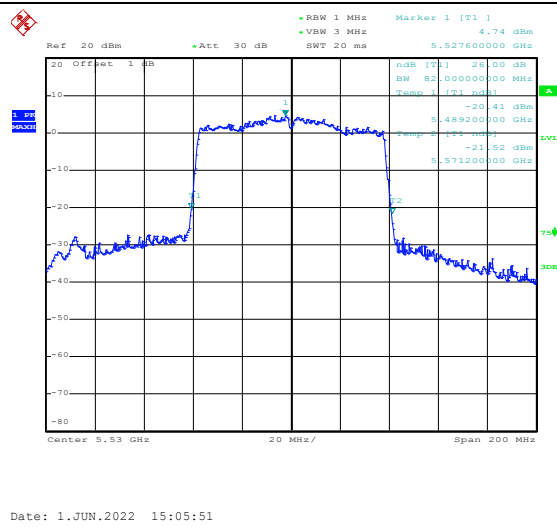
5470-5725MHz
-26dbm

802.11a-Low	Date: 1.JUN.2022 15:08:07
802.11a-Middle	Date: 30.JUN.2022 17:48:09
802.11a-High	Date: 1.JUN.2022 15:11:06

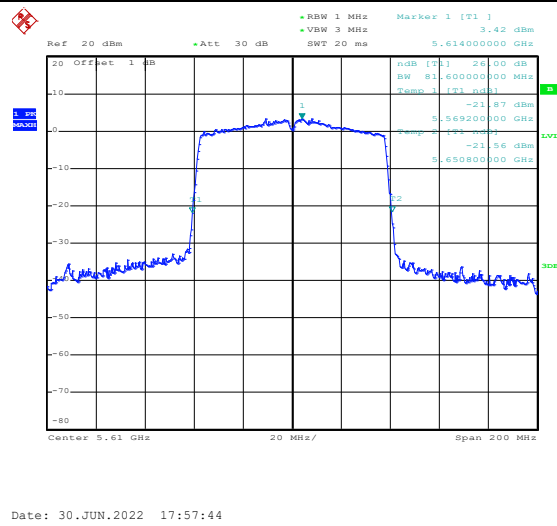
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 11.70 dBm 5.497500000 GHz <table border="1"><thead><tr><th>dBm [T1]</th><th>20.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>23.200000000 MHz</td></tr><tr><td>Temp</td><td>1 [T1] dBm</td></tr><tr><td></td><td>-13.55 dBm</td></tr><tr><td></td><td>5.488500000 GHz</td></tr><tr><td></td><td>-14.77 dBm</td></tr><tr><td></td><td>5.511700000 GHz</td></tr></tbody></table> Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:12:51	dBm [T1]	20.00 dB	SW	23.200000000 MHz	Temp	1 [T1] dBm		-13.55 dBm		5.488500000 GHz		-14.77 dBm		5.511700000 GHz
dBm [T1]	20.00 dB														
SW	23.200000000 MHz														
Temp	1 [T1] dBm														
	-13.55 dBm														
	5.488500000 GHz														
	-14.77 dBm														
	5.511700000 GHz														
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 6.00 dBm 5.599100000 GHz <table border="1"><thead><tr><th>dBm [T1]</th><th>20.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>23.100000000 MHz</td></tr><tr><td>Temp</td><td>1 [T1] dBm</td></tr><tr><td></td><td>-19.44 dBm</td></tr><tr><td></td><td>5.588500000 GHz</td></tr><tr><td></td><td>-19.79 dBm</td></tr><tr><td></td><td>5.611600000 GHz</td></tr></tbody></table> Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 30.JUN.2022 17:49:37	dBm [T1]	20.00 dB	SW	23.100000000 MHz	Temp	1 [T1] dBm		-19.44 dBm		5.588500000 GHz		-19.79 dBm		5.611600000 GHz
dBm [T1]	20.00 dB														
SW	23.100000000 MHz														
Temp	1 [T1] dBm														
	-19.44 dBm														
	5.588500000 GHz														
	-19.79 dBm														
	5.611600000 GHz														
802.11n-HT20-High	 Ref 20 dBm Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 7.20 dBm 5.699200000 GHz <table border="1"><thead><tr><th>dBm [T1]</th><th>20.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>23.000000000 MHz</td></tr><tr><td>Temp</td><td>1 [T1] dBm</td></tr><tr><td></td><td>-18.96 dBm</td></tr><tr><td></td><td>5.688600000 GHz</td></tr><tr><td></td><td>-19.45 dBm</td></tr><tr><td></td><td>5.711600000 GHz</td></tr></tbody></table> Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:17:53	dBm [T1]	20.00 dB	SW	23.000000000 MHz	Temp	1 [T1] dBm		-18.96 dBm		5.688600000 GHz		-19.45 dBm		5.711600000 GHz
dBm [T1]	20.00 dB														
SW	23.000000000 MHz														
Temp	1 [T1] dBm														
	-18.96 dBm														
	5.688600000 GHz														
	-19.45 dBm														
	5.711600000 GHz														

802.11n-HT40-Low	 Date: 1.JUN.2022 15:22:20
802.11n-HT40- Middle	 Date: 30.JUN.2022 17:50:15
802.11n-HT40-High	 Date: 1.JUN.2022 15:23:47

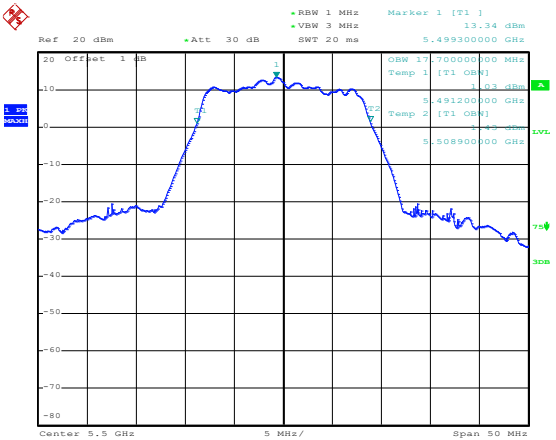
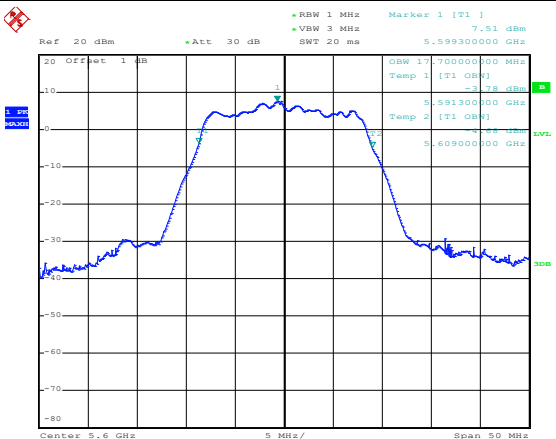
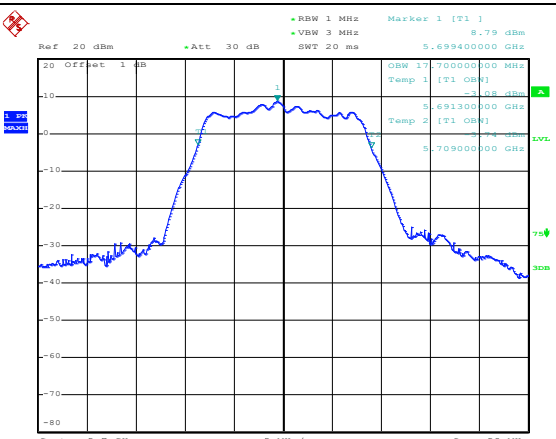
802.11ac-HT80-L

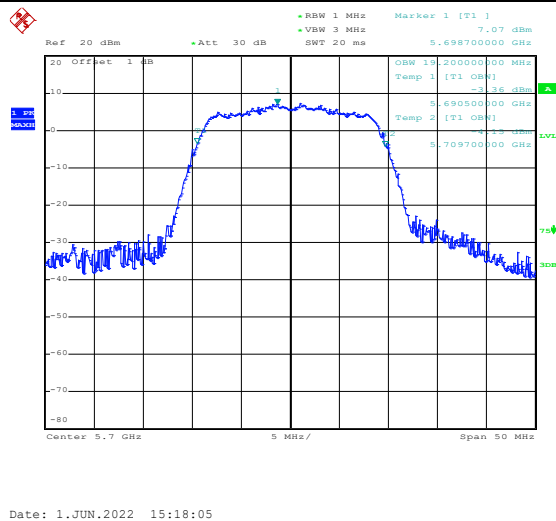
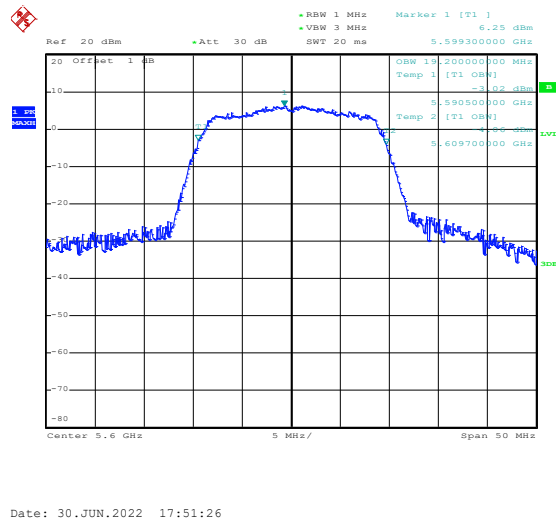
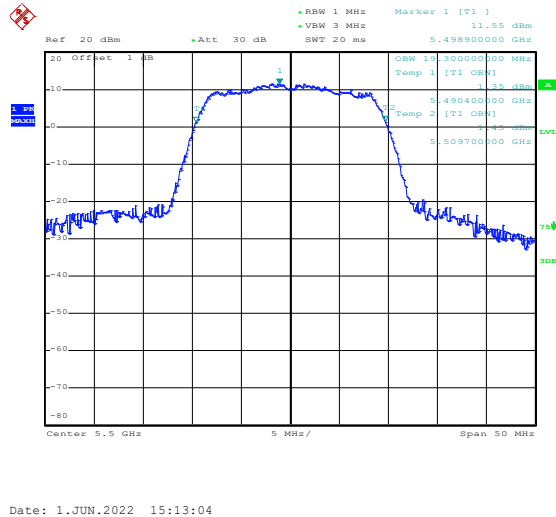


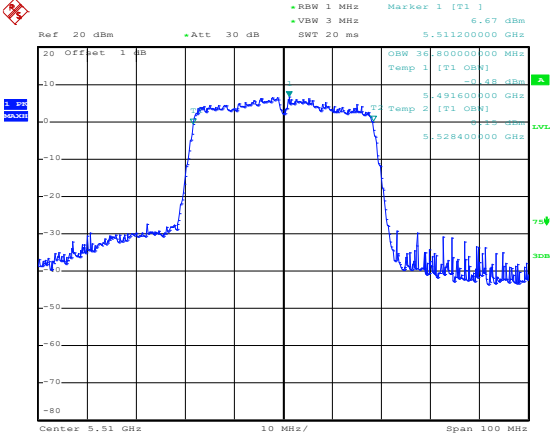
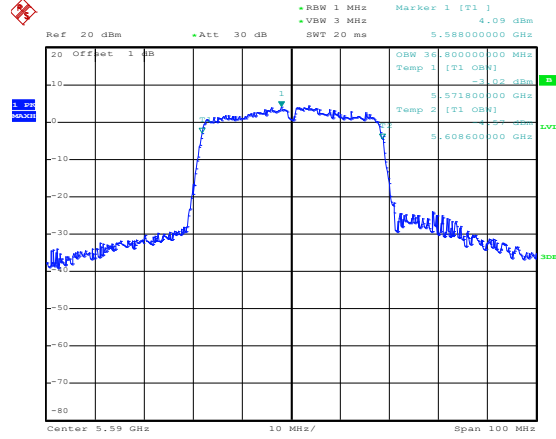
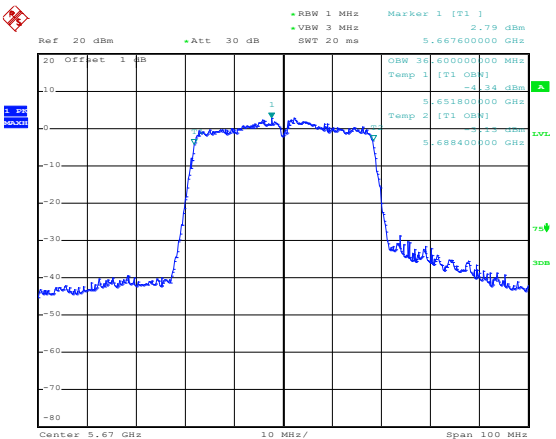
802.11ac-HT80-T

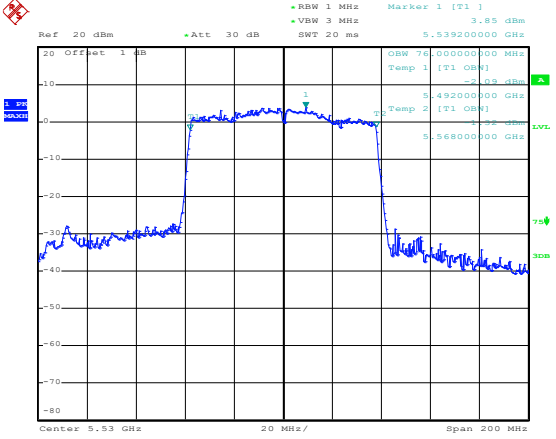
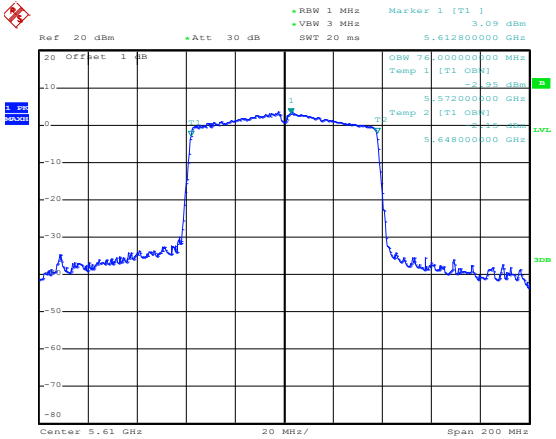


99%

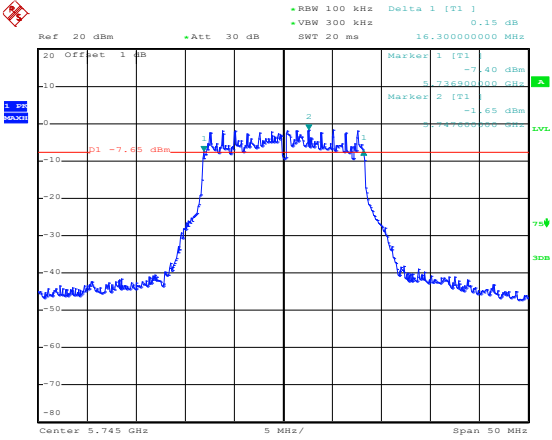
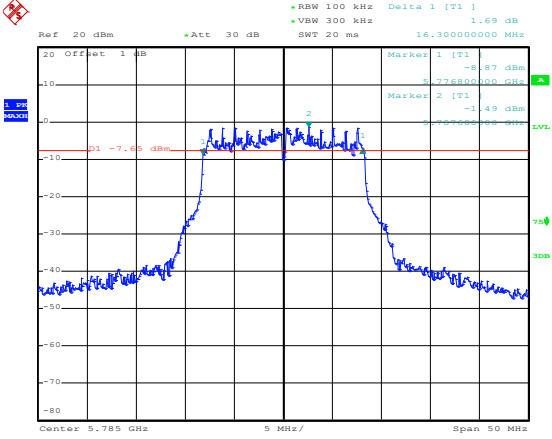
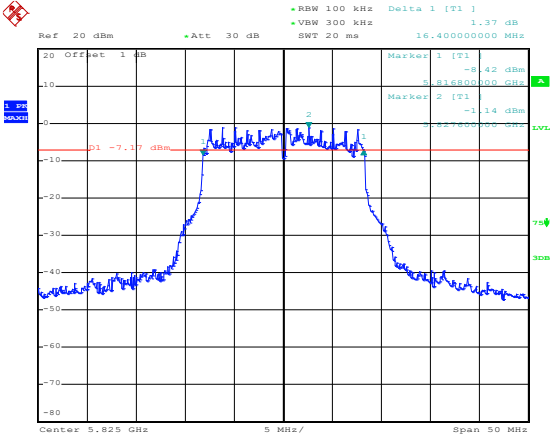
802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 13.34 dBm OSW 17.70000000 MHz Temp 1 [T1] 0.03 dBm 5.491200000 GHz Temp 2 [T1] 0.43 dBm 5.508800000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:08:28
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 7.51 dBm OSW 17.70000000 MHz Temp 1 [T1] 0.78 dBm 5.591300000 GHz Temp 2 [T1] 0.68 dBm 5.609000000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 30.JUN.2022 17:51:53
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 8.79 dBm OSW 17.70000000 MHz Temp 1 [T1] 0.68 dBm 5.691300000 GHz Temp 2 [T1] 0.64 dBm 5.709000000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:11:38

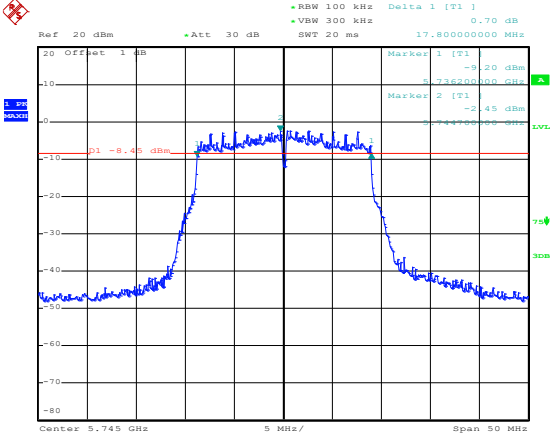
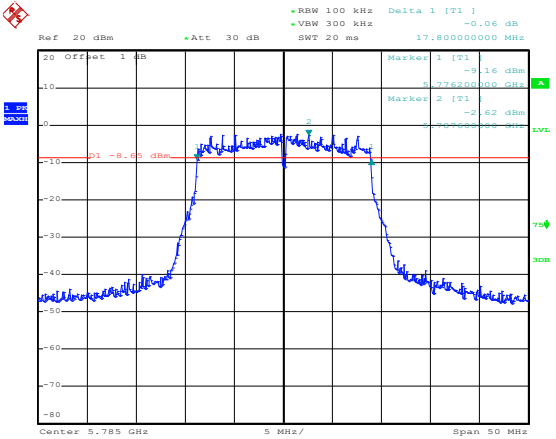
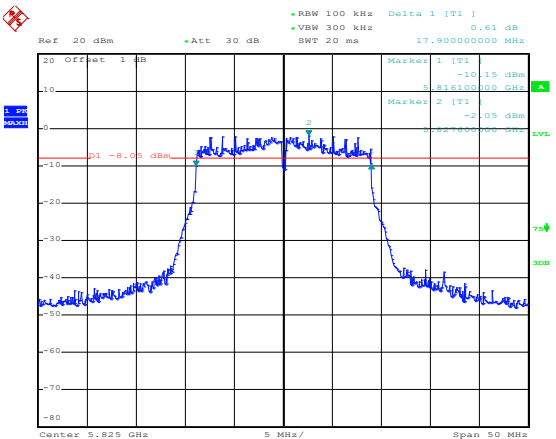


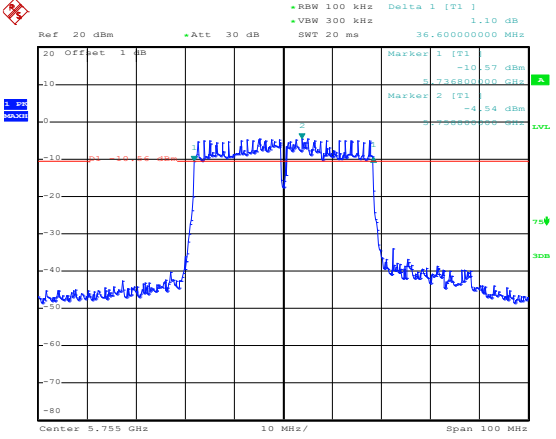
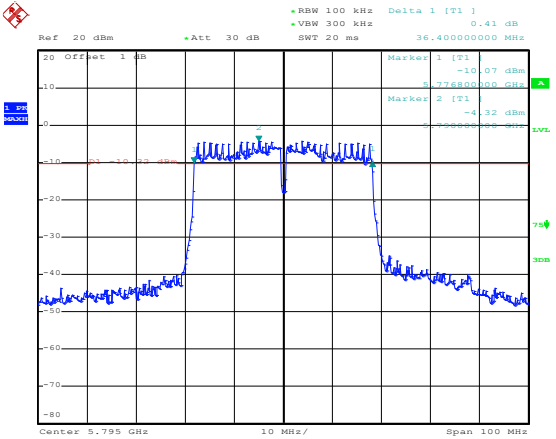
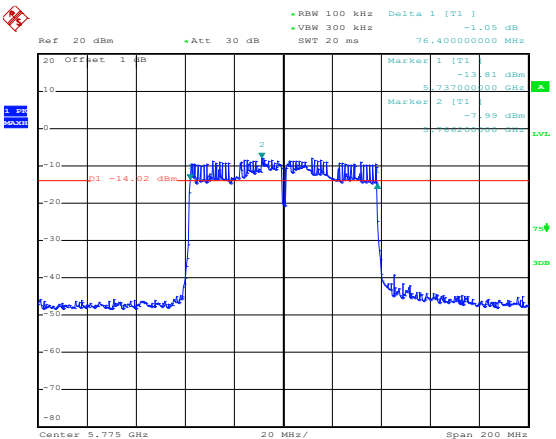
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 6.67 dBm 5.511200000 GHz OSW 30.00000000 MHz Temp 1 [T1 OBW] -10.48 dBm 5.491600000 GHz Temp 2 [T1 OBW] -10.48 dBm 5.528400000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 15:22:27
802.11n-HT40- Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 4.09 dBm 5.588000000 GHz OSW 30.00000000 MHz Temp 1 [T1 OBW] -10.02 dBm 5.571800000 GHz Temp 2 [T1 OBW] -10.02 dBm 5.608600000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 30.JUN.2022 17:50:49
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 2.79 dBm 5.667600000 GHz OSW 30.00000000 MHz Temp 1 [T1 OBW] -10.34 dBm 5.651800000 GHz Temp 2 [T1 OBW] -10.34 dBm 5.688400000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 15:23:56

802.11ac-HT80-L	 Ref 20 dBm Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 3.85 dBm Center 5.53 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 15:06:05
802.11ac-HT80-T	 Ref 20 dBm Att 30 dB SWT 20 ms RBW 1 MHz VBW 3 MHz Marker 1 [T1] 3.09 dBm Center 5.61 GHz 20 MHz/ Span 200 MHz Date: 30.JUN.2022 17:57:04

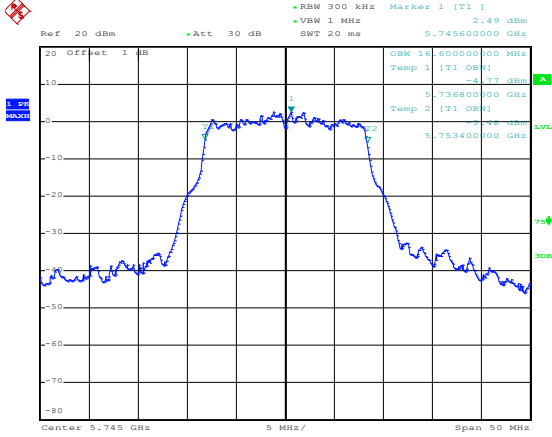
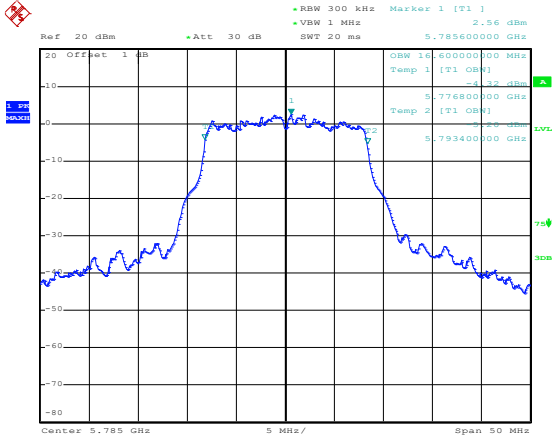
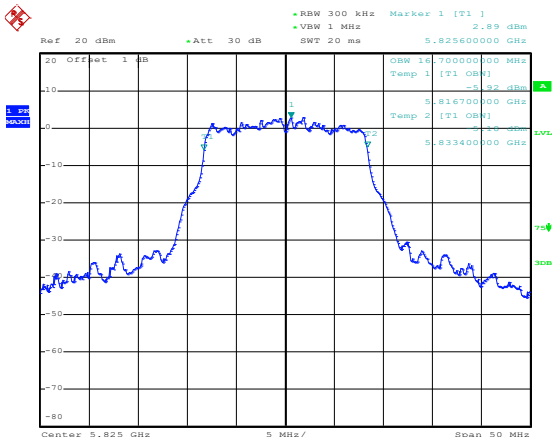
5725-5850MHz
-6dbm

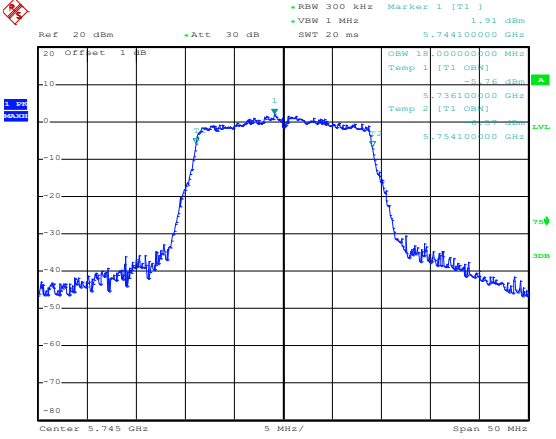
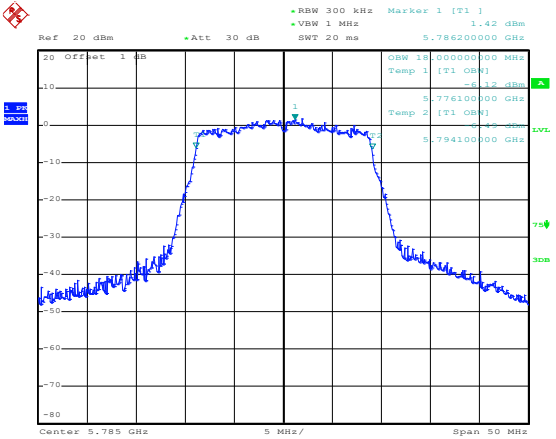
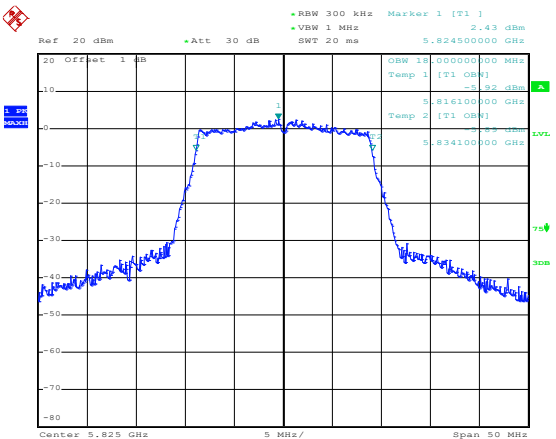
802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.15 dB •VBW 300 kHz SWT 20 ms 16.300000000 MHz Marker 1 [T1] -7.40 dBm 5.736800000 GHz Marker 2 [T1] -1.65 dBm 5.746800000 GHz PL -7.65 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:55:15
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.69 dB •VBW 300 kHz SWT 20 ms 16.300000000 MHz Marker 1 [T1] -8.87 dBm 5.776800000 GHz Marker 2 [T1] -1.49 dBm 5.786800000 GHz PL -7.65 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:56:05
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 1.37 dB •VBW 300 kHz SWT 20 ms 16.400000000 MHz Marker 1 [T1] -8.42 dBm 5.816800000 GHz Marker 2 [T1] -1.14 dBm 5.826800000 GHz PL -7.17 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:56:45

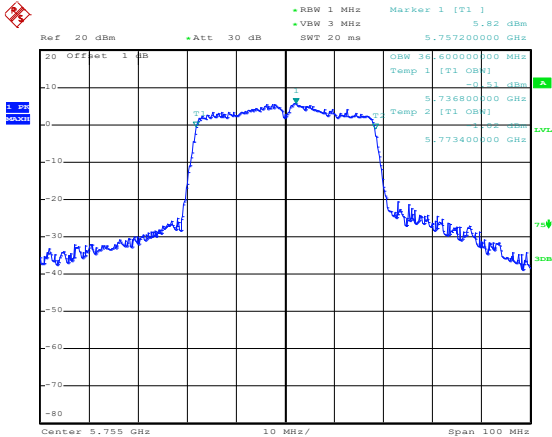
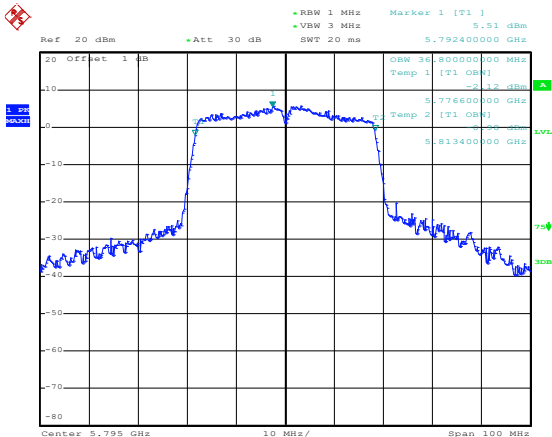
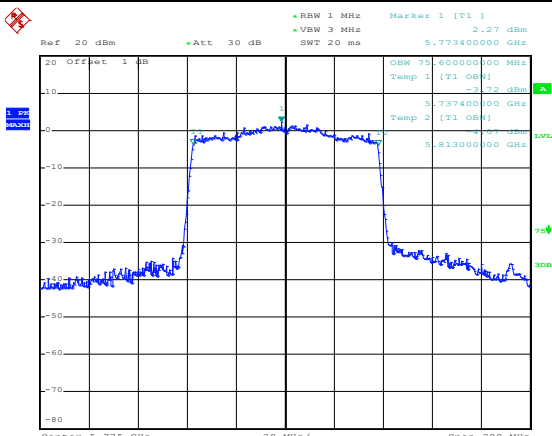
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.70 dB 17.800000000 MHz Marker 1 [T1] -9.20 dBm 5.736200000 GHz Marker 2 [T1] -2.45 dBm 5.745000000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:57:43
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -0.06 dB 17.800000000 MHz Marker 1 [T1] -9.16 dBm 5.776200000 GHz Marker 2 [T1] -2.62 dBm 5.785000000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:58:51
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.61 dB 17.900000000 MHz Marker 1 [T1] -10.15 dBm 5.816100000 GHz Marker 2 [T1] -2.05 dBm 5.825000000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 15:59:56

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 1.10 dB VSW 300 kHz SWT 20 ms 36.60000000 MHz Marker 1 [T1] -10.57 dBm 5.75500000 GHz Marker 2 [T1] -4.54 dBm 5.75500000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 16:00:58
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.41 dB VSW 300 kHz SWT 20 ms 36.40000000 MHz Marker 1 [T1] -10.07 dBm 5.75500000 GHz Marker 2 [T1] -4.32 dBm 5.75500000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 16:02:01
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -1.05 dB VSW 300 kHz SWT 20 ms 76.40000000 MHz Marker 1 [T1] -13.81 dBm 5.77500000 GHz Marker 2 [T1] -7.99 dBm 5.77500000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 15:52:57

99%

802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 2.49 dBm, 5.745600000 GHz OSW: 16.600000000 MHz, Temp 1 [T1]: -1.77 dBm, 5.736800000 GHz, Temp 2 [T1]: -1.44 dBm, 5.753400000 GHz Center: 5.745 GHz, Span: 50 MHz Date: 1.JUN.2022 16:04:31
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 2.56 dBm, 5.785600000 GHz OSW: 16.600000000 MHz, Temp 1 [T1]: -1.32 dBm, 5.776800000 GHz, Temp 2 [T1]: -1.28 dBm, 5.793400000 GHz Center: 5.785 GHz, Span: 50 MHz Date: 1.JUN.2022 16:04:55
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 2.89 dBm, 5.825600000 GHz OSW: 16.700000000 MHz, Temp 1 [T1]: -1.32 dBm, 5.816700000 GHz, Temp 2 [T1]: -1.48 dBm, 5.833400000 GHz Center: 5.825 GHz, Span: 50 MHz Date: 1.JUN.2022 16:05:20

802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.91 dBm VSW 1 MHz SWT 20 ms 5.744100000 GHz OSW 10.00000000 MHz Temp 1 [T1 OBW] -5.76 dBm 5.736100000 GHz Temp 2 [T1 OBW] -5.77 dBm 5.754100000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 16:05:53
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.42 dBm VSW 1 MHz SWT 20 ms 5.786200000 GHz OSW 10.00000000 MHz Temp 1 [T1 OBW] -5.42 dBm 5.776100000 GHz Temp 2 [T1 OBW] -5.43 dBm 5.794100000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 16:06:14
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.43 dBm VSW 1 MHz SWT 20 ms 5.824500000 GHz OSW 10.00000000 MHz Temp 1 [T1 OBW] -5.92 dBm 5.816100000 GHz Temp 2 [T1 OBW] -5.93 dBm 5.834100000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 1.JUN.2022 16:06:42

802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.82 dBm 5.757200000 GHz OSW 30.00000000 MHz Temp 1 [T1 OBW] -2.51 dBm 5.736800000 GHz Temp 2 [T1 OBW] -2.52 dBm 5.773400000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 16:07:24
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 5.51 dBm 5.792400000 GHz OSW 30.00000000 MHz Temp 1 [T1 OBW] -2.42 dBm 5.776600000 GHz Temp 2 [T1 OBW] -2.44 dBm 5.813400000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 1.JUN.2022 16:07:51
802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 2.27 dBm 5.773400000 GHz OSW 75.00000000 MHz Temp 1 [T1 OBW] -3.72 dBm 5.737400000 GHz Temp 2 [T1 OBW] -3.74 dBm 5.813000000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 1.JUN.2022 15:53:55

APPENDIX C

Maximum Conducted Output Power

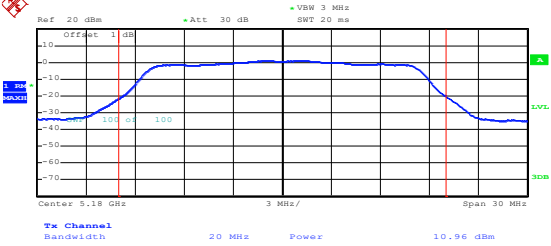
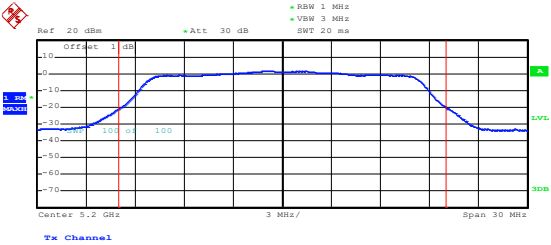
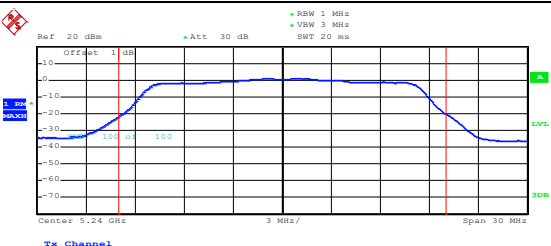
U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	10.96	23.98
	5200	11.38	23.98
	5240	10.81	23.98
802.11n-HT20	5180	10.10	23.98
	5200	10.31	23.98
	5240	10.07	23.98
802.11n-HT40	5190	11.20	23.98
	5230	10.73	23.98
802.11ac VH80	5210	9.59	23.98

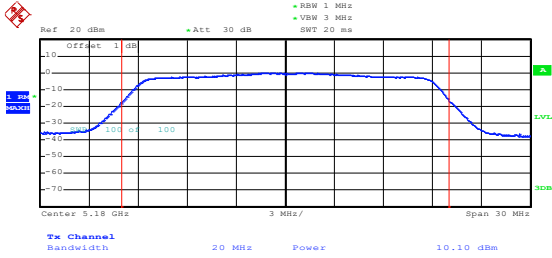
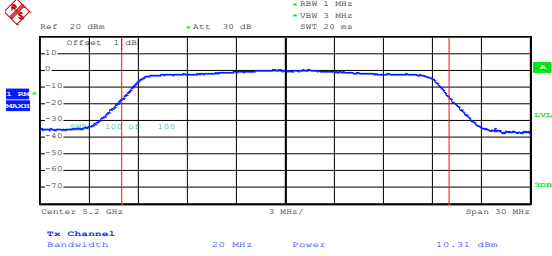
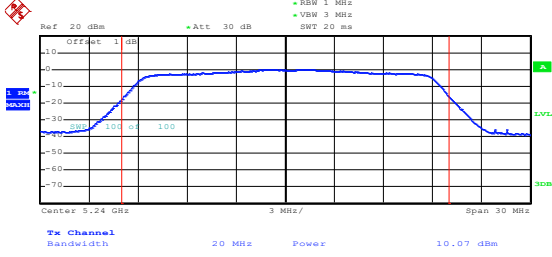
U-NII-2A: 5250-5350MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5260	10.56	23.98
	5280	11.09	23.98
	5320	11.83	23.98
802.11n-HT20	5260	9.43	23.98
	5280	10.41	23.98
	5320	11.06	23.98
802.11n-HT40	5270	8.63	23.98
	5310	9.52	23.98
802.11ac VH80	5290	10.10	23.98

U-NII-2C: 5470-5725MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5500	9.44	23.98
	5600	8.89	23.98
	5700	5.18	23.98
802.11n-HT20	5500	8.95	23.98
	5600	8.12	23.98
	5700	8.45	23.98
802.11n-HT40	5510	9.96	23.98
	5590	9.31	23.98
	5670	6.92	23.98
802.11ac VH80	5530	6.99	23.98
	5610	6.27	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	10.79	30.00
	5785	10.89	30.00
	5825	11.00	30.00
802.11n-HT20	5745	9.64	30.00
	5785	10.32	30.00
	5825	10.25	30.00
802.11n-HT40	5755	7.98	30.00
	5795	8.09	30.00
802.11ac VH80	5775	8.90	30.00

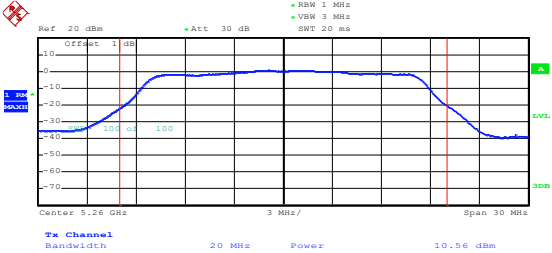
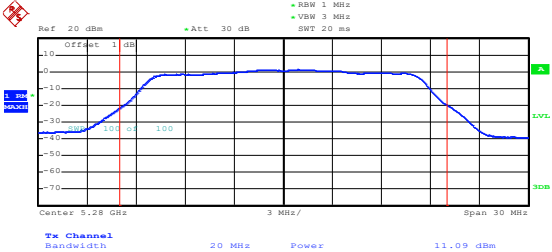
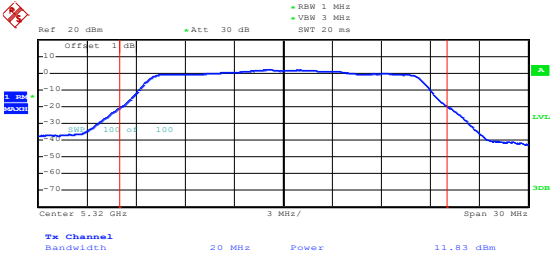
5150-5250MHz

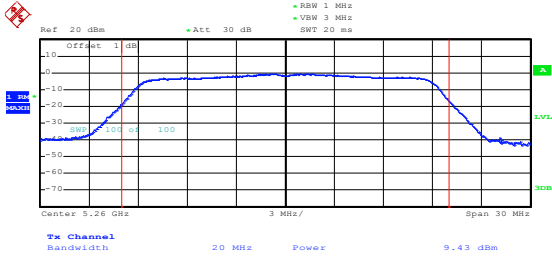
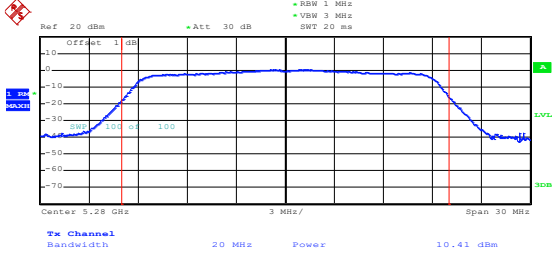
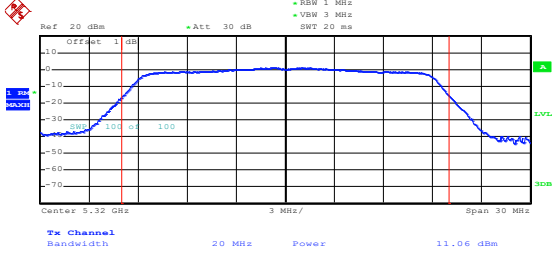
802.11a-Low	 Date: 30.MAY.2022 17:36:59
802.11a-Middle	 Date: 30.MAY.2022 17:38:01
802.11a-High	 Date: 30.MAY.2022 17:39:20

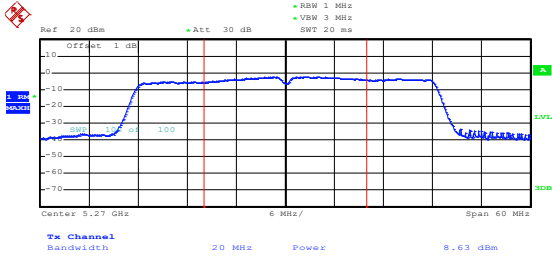
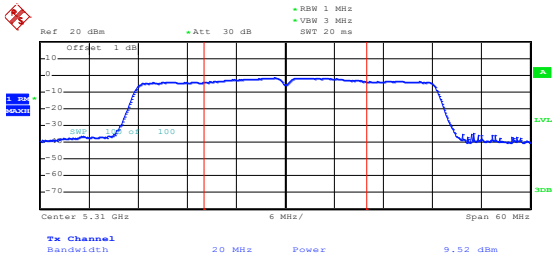
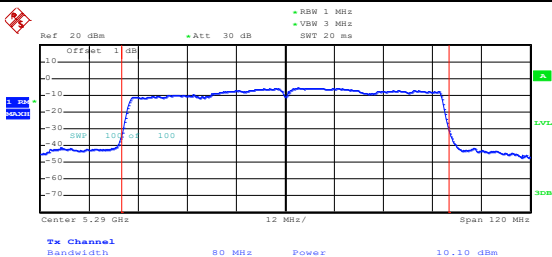
802.11n-HT20-Low	 Date: 30.MAY.2022 17:41:21
802.11n-HT20-Middle	 Date: 30.MAY.2022 17:42:35
802.11n-HT20-High	 Date: 30.MAY.2022 17:43:22

802.11n-HT40-Low	Date: 30.MAY.2022 17:44:44
802.11n-HT40-High	Date: 30.MAY.2022 17:46:38
802.11ac-HT80-Low	Date: 30.MAY.2022 17:34:29

5250-5350MHz

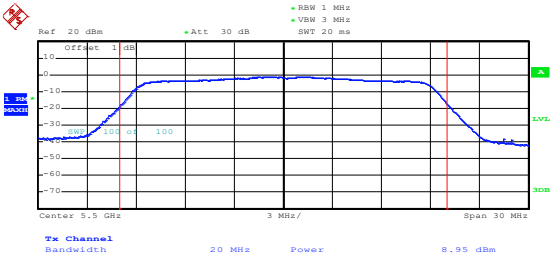
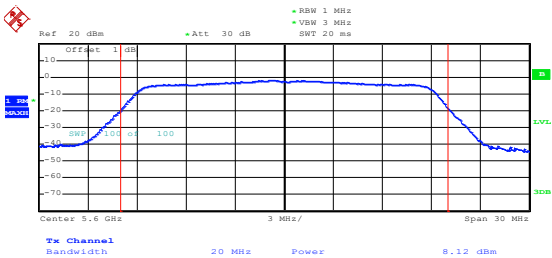
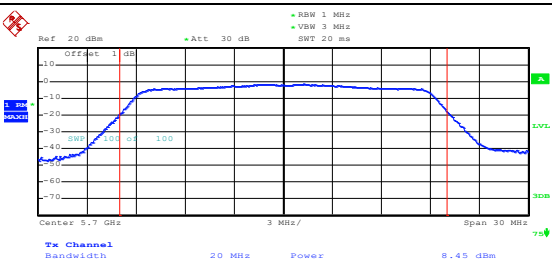
802.11a-Low	 Date: 1.JUN.2022 10:56:54
802.11a-Middle	 Date: 1.JUN.2022 10:57:30
802.11a-High	 Date: 1.JUN.2022 10:58:05

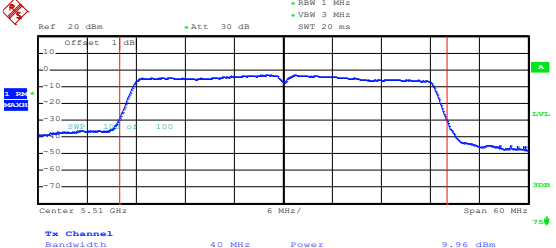
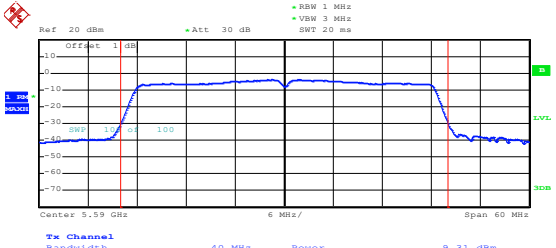
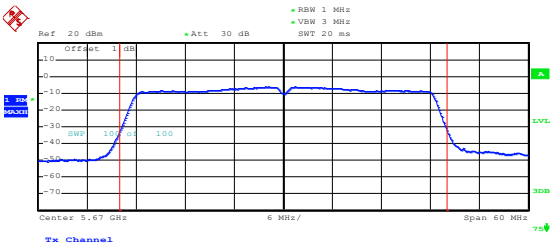
802.11n-HT20-Low	 Date: 1.JUN.2022 10:59:31
802.11n-HT20-Middle	 Date: 1.JUN.2022 10:59:58
802.11n-HT20-High	 Date: 1.JUN.2022 11:00:23

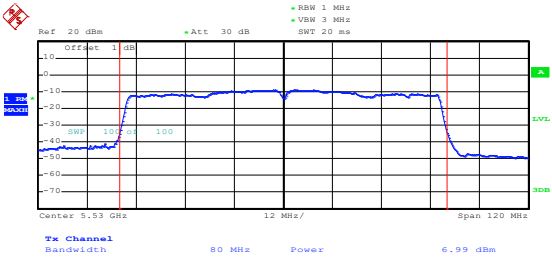
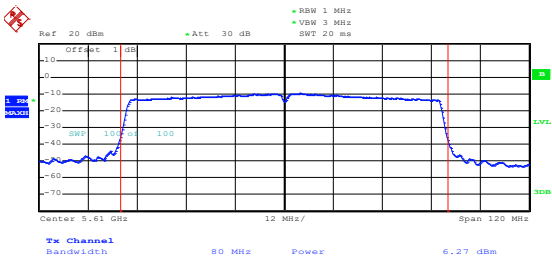
802.11n-HT40-Low	 Ref: 20 dBm • Att: 30 dB • RBW 1 MHz • VBW 3 MHz • SWT 20 ms Offset: 1 dB Center: 5.27 GHz 6 MHz/ Span: 60 MHz Ts Channel Bandwidth: 20 MHz Power: 8.63 dBm Date: 1.JUN.2022 11:01:58
802.11n-HT40-High	 Ref: 20 dBm • Att: 30 dB • RBW 1 MHz • VBW 3 MHz • SWT 20 ms Offset: 1 dB Center: 5.31 GHz 6 MHz/ Span: 60 MHz Ts Channel Bandwidth: 20 MHz Power: 9.52 dBm Date: 1.JUN.2022 11:02:24
802.11ac-HT80-Low	 Ref: 20 dBm • Att: 30 dB • RBW 1 MHz • VBW 3 MHz • SWT 20 ms Offset: 1 dB Center: 5.29 GHz 12 MHz/ Span: 120 MHz Ts Channel Bandwidth: 80 MHz Power: 10.10 dBm Date: 1.JUN.2022 10:55:51

5470-5725MHz

802.11a-Low	Date: 1.JUN.2022 11:42:48
802.11a-Middle	Date: 30.JUN.2022 17:36:10
802.11a-High	Date: 1.JUN.2022 11:45:29

802.11n-HT20-Low	 Date: 1.JUN.2022 11:46:44
802.11n-HT20-Middle	 Date: 30.JUN.2022 17:37:27
802.11n-HT20-High	 Date: 1.JUN.2022 14:50:10

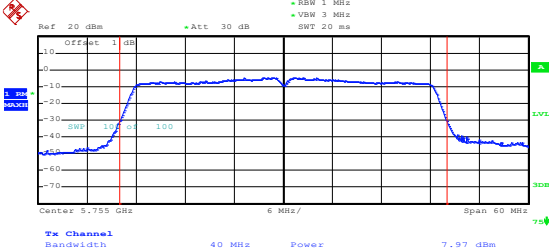
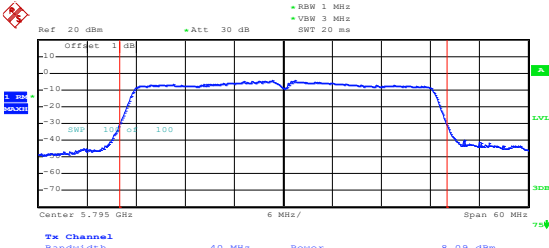
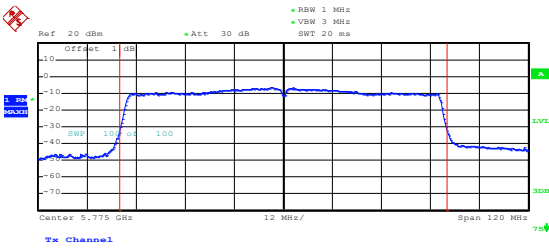
802.11n-HT40-Low	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms Offset: 1 dB Center: 5.51 GHz Span: 60 MHz Tx Channel Bandwidth: 40 MHz Power: 9.96 dBm Date: 1.JUN.2022 14:51:45
802.11n-HT40- Middle	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms Offset: 1 dB Center: 5.59 GHz Span: 60 MHz Tx Channel Bandwidth: 40 MHz Power: 9.31 dBm Date: 30.JUN.2022 17:40:13
802.11n-HT40-High	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms Offset: 1 dB Center: 5.67 GHz Span: 60 MHz Tx Channel Bandwidth: 40 MHz Power: 6.92 dBm Date: 1.JUN.2022 14:54:12

802.11ac-HT80-L	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms Center: 5.53 GHz Span: 120 MHz 12 MHz/ Tx Channel Bandwidth: 80 MHz Power: 6.99 dBm Date: 1.JUN.2022 11:41:25
802.11ac-HT80-T	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 20 ms Center: 5.61 GHz Span: 120 MHz 12 MHz/ Tx Channel Bandwidth: 80 MHz Power: 6.27 dBm Date: 30.JUN.2022 18:00:00

5725-5850MHz

802.11a-Low	Date: 1.JUN.2022 15:27:09
802.11a-Middle	Date: 1.JUN.2022 15:27:35
802.11a-High	Date: 1.JUN.2022 15:27:59

802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	 Date: 1.JUN.2022 15:36:44
802.11n-HT40-High	 Date: 1.JUN.2022 15:37:13
802.11ac-HT80-Low	 Date: 1.JUN.2022 15:40:21

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	3008	0.5785
100%		-20	3008	0.5784
100%		-10	3000	0.5770
100%		0	3009	0.5787
100%		+10	3001	0.5771
100%		+20	3003	0.5774
100%		+30	3004	0.5776
100%		+40	3004	0.5778
100%		+50	3005	0.5778
Low power	10.8	+20	3004	0.5777
High power	13.2	+20	3002	0.5774

U-NII-1: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	3008	0.5697
100%		-20	3007	0.5696
100%		-10	3001	0.5685
100%		0	3006	0.5694
100%		+10	3000	0.5682
100%		+20	3005	0.5692
100%		+30	3003	0.5688
100%		+40	3000	0.5683
100%		+50	3002	0.5686
Low power	10.8	+20	3009	0.5699
High power	13.2	+20	3003	0.5688

U-NII-1: 5470-5725MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	3001	0.5359
100%		-20	3006	0.5368
100%		-10	3007	0.5370
100%		0	3007	0.5371
100%		+10	3007	0.5370
100%		+20	3000	0.5357
100%		+30	3007	0.5370
100%		+40	3010	0.5375
100%		+50	3005	0.5365
Low power	10.8	+20	3003	0.5362
High power	13.2	+20	3005	0.5366

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	3001	0.5188
100%		-20	3010	0.5202
100%		-10	3001	0.5187
100%		0	3007	0.5198
100%		+10	3000	0.5187
100%		+20	3005	0.5194
100%		+30	3009	0.5201
100%		+40	3005	0.5195
100%		+50	3001	0.5188
Low power	10.8	+20	3001	0.5187
High power	13.2	+20	3006	0.5197

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******