

2 Outlet Outdoor Remote Control Instructions
with Countdown Timer Function

ITEM NO: 58373 with RT101T Remoter

Specifications

- a. Receiver: 125VAC, 60Hz, 8A 1000W Tungsten with 2 Grounded Outlets and 6 in. (15.2 cm) 18AWG SJTW Power Cord.
- b. Transmitter: 433MHz, remote range up to 80 ft. (24.3 m) using (1) CR2032 Lithium 3-volt battery (included).

BATTERY INFORMATION AND REPLACEMENT:

- 1. On the bottom of the remote use your finger to depress the tab to slide out the battery holder.
- 2. Remove the used battery and insert a new CR2032 Lithium 3-volt battery with the "+" polarity mark facing up.
- 3. Slide the battery holder back inside so that the tab sets in place.
- 4. Dispose of old battery properly.

WARNING:

Keep batteries away from children and pets. Follow the battery manufacturer's safety and usage instructions.

- Remove battery if product is to be left unused for a long time.
- Clean the battery contacts prior to battery installation.
- Do not dispose batteries in fire. Batteries may explode or leak.

Notice:

Functional Range may be adversely affected by one or more of the following factors: Orientation of the transmitter or receiver, weather, radio frequency interference, low transmitter battery and obstructions between the transmitter and receiver.

NOTE: In case of a power failure, the system will need to be reset.

ATTENTION: INSTRUCTIONS FOR PROPER USE

- FULLY EXTEND CORD BEFORE USING
- USE WITHIN THE ELECTRICAL RATING MARKED ON THE CORD SET
- RATED 125 VOLTS
- Unplug when not in use (grasp plug, not cord, to unplug from outlet)
- Inspect periodically
- Do not splice, repair or modify cord set
- Do not walk or drive on cord set
- Suitable for use with outdoor appliances - store indoors when not in use
- Suitable for damp location
- Do not use as permanent source of power
- When used outdoors, plug into a GFCI protected receptacle. Receptacle should be mounted in an approved "weatherproof while in use" type outlet box. Install according to all applicable local areas.

- Do not expose directly to water - rain tight
- Do not plug one extension cord into another
- Install the cord and unit above ground level at least 5 ft. (1.5m) with receptacles (outlets) facing downward.

CAUTION

- Risk of Fire.
- DO NOT PLUG IN MORE THAN THE RATED LOAD.
- This is a Radio Frequency (RF) Device. Therefore the range of the transmitter is affected by obstructions, walls and other electronic devices.

WARNING:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FRONT
A5
5.8 in H x 8.3 in W

BACK
A5
5.8 in H x 8.3 in W

Operation


a. ON/OFF Remote Control

Note: When the receiver is fully inserted into a working outlet, its red indicator light will come on showing power to the unit.

Press:

ON: Receiver is power ON continuously. "ON" appears on the LCD display.

OFF: Receiver is power OFF instantly. "OF" appears on the LCD display.

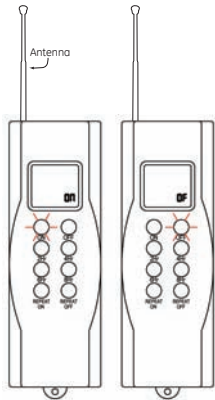

b. Remote Countdown


Press:

2Hr, 4Hr, 6Hr or 8Hr:

Receiver instant on and then off after completing the selected countdown hours.

Notes:

- 1. Setting the countdown hours may be done with the receivers ON.
- 2. The remaining countdown hours for the receiver will be shown on the LCD display. The countdown symbol at the top of "Hr" flashes to indicate the countdown is in progress. "ON" shows that power is on. After the countdown is finished, the power to the outlet goes off with "OF" displayed.
- 3. Pressing the remote ON or OFF button cancels the current countdown operation with power to the outlet remaining continuously on or off.

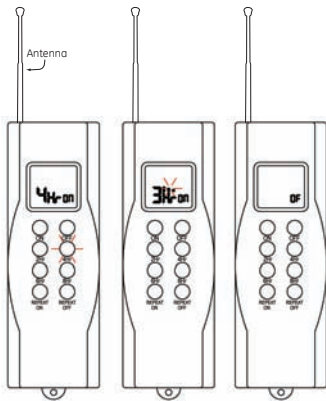

c. Repeat function

This function repeats the last countdown operation the same time everyday.

Press:

REPEAT ON: Do this during or after the countdown operation.

"RPT" appears on the LCD display above "ON". Once the current countdown operation is finished the countdown hours and RPT remain on the LCD display.

Notes:

- 1. To cancel the repeat operation, press REPEAT OFF. "RPT" will disappear. If in the off status, the countdown operation hours will also disappear.
- 2. Pressing the remote ON or OFF button cancels the current day's countdown operation with power to the outlet remaining continuously on or off. This will not interfere the next day's repeat operation.
- 3. Setting a new countdown operation cancels the current day's repeated countdown operation. Power output will be ON or OFF as the new operation. This will not interfere the next day's repeat operation.

