



FCC RF Test Report

APPLICANT : Guangdong OPPO Mobile
Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : OPPO
MODEL NAME : CPH2737
FCC ID : R9C-OP24321
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 14, 2025 ~ Apr. 02, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 LIST OF MEASURING EQUIPMENT.....	23
5 MEASUREMENT UNCERTAINTY.....	24
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR521816B	Rev. 01	Initial issue of report	Apr. 22, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.37 dB at 2484.08 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.75 dB at 0.18 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.2 Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2737
FCC ID	R9C-OP24321
IMEI Code	Conducted: 869081070026695/869081070026687 Conduction: 869081070034053/869081070034046 Radiation: 869081070034574/869081070034566
HW Version	11
SW Version	ColorOS 15.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 11.50 dBm (0.0141 W) BLE 2Mbps: 11.90 dBm (0.0155 W) BLE 125kbps: 11.60 dBm (0.0145 W) BLE 500kbps: 11.50 dBm (0.0141 W)
99% Occupied Bandwidth	BLE 2Mbps:2.084MHz BLE 125kbps:1.064MHz
Antenna Type / Gain	Metal-Frame Antenna type with gain 0 dBi
Type of Modulation	Bluetooth LE : GFSK

Note:

1. BLE 2Mbps does not support three primary advertising channels (CH00/CH12/CH39).
2. For BLE 1Mbps & 125Kbps & 500Kbps mode, the whole testing has assessed BLE 125Kbps mode by referring to the higher conducted power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ; CO02-SZ; 03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 3: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 125kbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 125kbps Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 125kbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 125kbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 125kbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 125kbps Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps Co-location modes: Mode 8: BLE 2Mbps CH01 Tx + LTE B13 Link Mode 9: WLAN 802.11ax HE20 CH11 Tx + BLE 2Mbps CH01 Tx + LTE B13 Link
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter1) + Battery 1
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

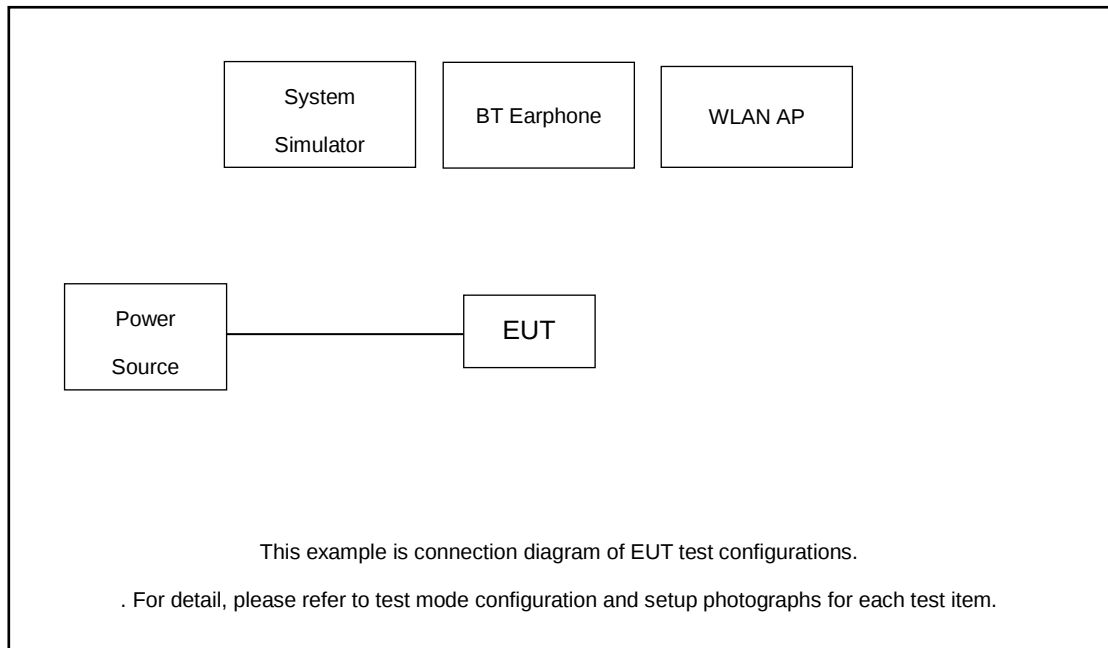

Radiated Emission:

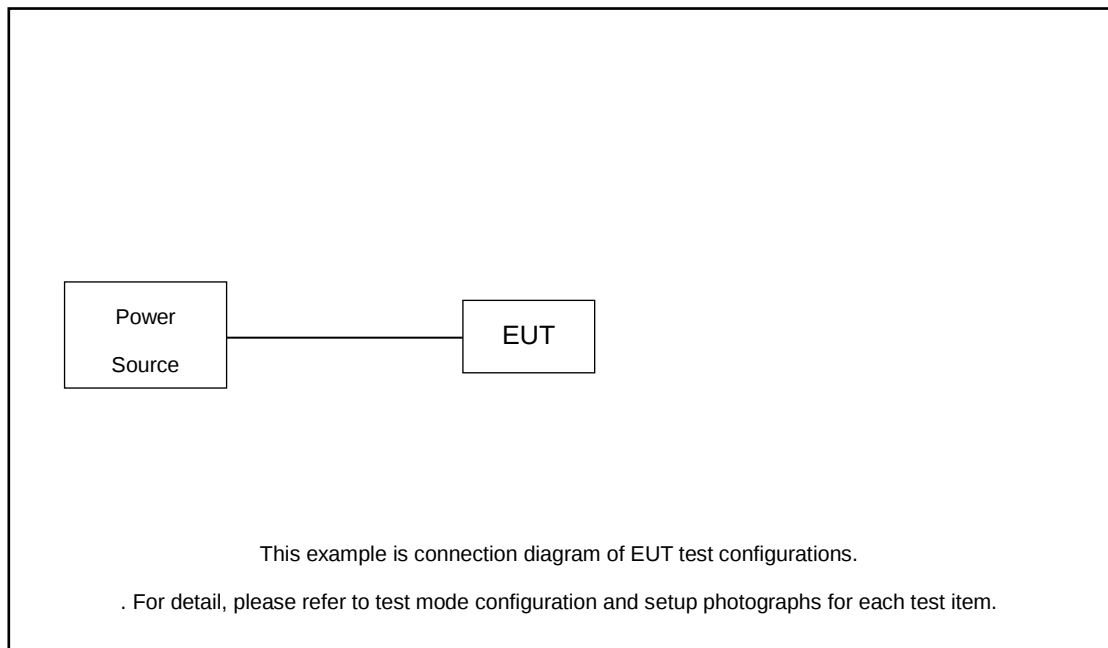

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the BT Earphone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.12 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.12 + 10 = 12.12 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

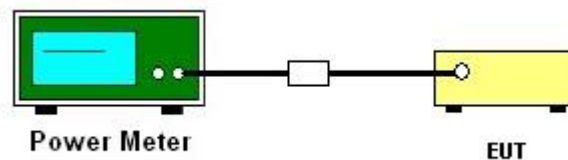

**3.2.5 Test Result of Average Output Power**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	0.84	11.50	Default	30.00	0.00	11.50	36.00	Pass
BLE	125kbps	1	19	2440	0.84	11.60	Default	30.00	0.00	11.60	36.00	Pass
BLE	125kbps	1	39	2480	0.84	10.30	Default	30.00	0.00	10.30	36.00	Pass
BLE	500kbps	1	0	2402	2.48	11.40	Default	30.00	0.00	11.40	36.00	Pass
BLE	500kbps	1	19	2440	2.48	11.50	Default	30.00	0.00	11.50	36.00	Pass
BLE	500kbps	1	39	2480	2.48	10.20	Default	30.00	0.00	10.20	36.00	Pass
BLE	1Mbps	1	0	2402	2.09	11.40	Default	30.00	0.00	11.40	36.00	Pass
BLE	1Mbps	1	19	2440	2.09	11.50	Default	30.00	0.00	11.50	36.00	Pass
BLE	1Mbps	1	39	2480	2.09	10.10	Default	30.00	0.00	10.10	36.00	Pass
BLE	2Mbps	1	1	2404	4.96	11.90	Default	30.00	0.00	11.90	36.00	Pass
BLE	2Mbps	1	19	2440	4.96	11.90	Default	30.00	0.00	11.90	36.00	Pass
BLE	2Mbps	1	38	2478	4.96	10.40	Default	30.00	0.00	10.40	36.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

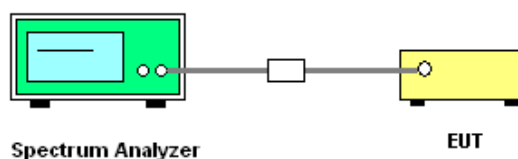

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.
For average measurement:
 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz

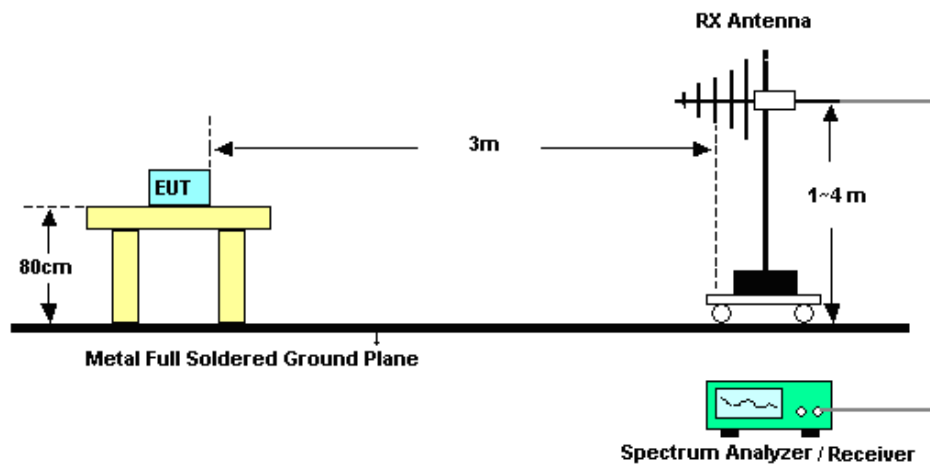

For radiated emissions above 1GHz

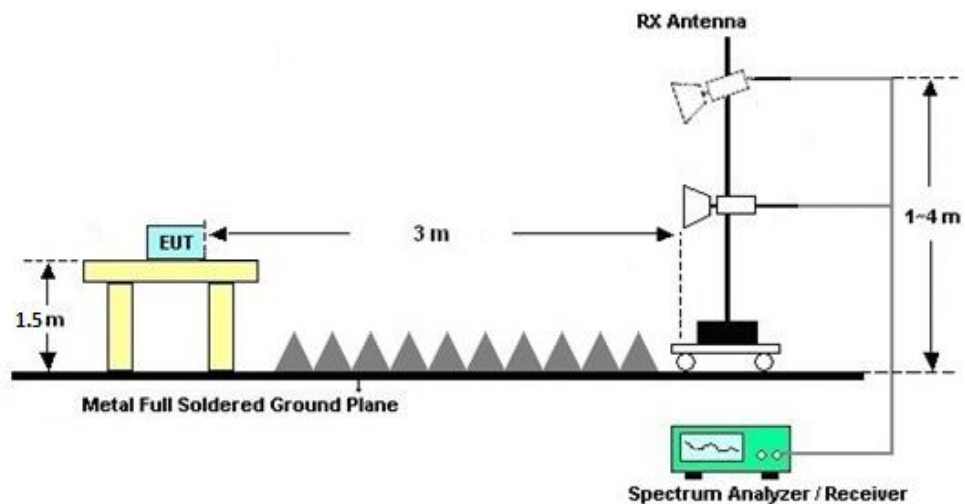

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

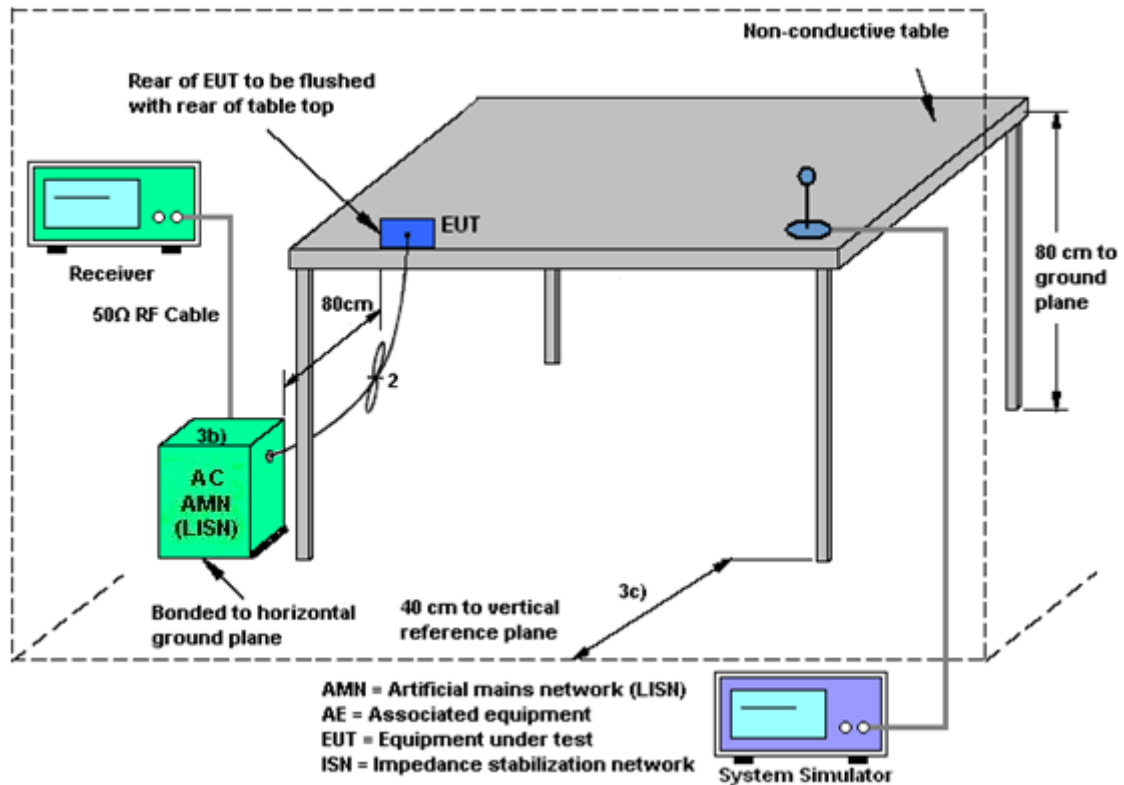

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Apr. 01, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Jan. 02, 2025	Apr. 01, 2025	Jan. 01, 2026	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10°C ~ 50°C 10%RH~99%RH	Apr. 09, 2024	Apr. 01, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Mar. 14, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Mar. 14, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Mar. 14, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Mar. 23, 2025~ Apr. 02, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Mar. 23, 2025~ Apr. 02, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Mar. 23, 2025~ Apr. 02, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	Mar. 23, 2025~ Apr. 02, 2025	May 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Mar. 23, 2025~ Apr. 02, 2025	Jul. 06, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Mar. 23, 2025~ Apr. 02, 2025	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Mar. 23, 2025~ Apr. 02, 2025	Oct. 17, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Mar. 23, 2025~ Apr. 02, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Mar. 23, 2025~ Apr. 02, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2024	Mar. 23, 2025~ Apr. 02, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Mar. 23, 2025~ Apr. 02, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 23, 2025~ Apr. 02, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 23, 2025~ Apr. 02, 2025	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 24-26 °C, 45-55 %RH

Test Date: 2025.04.01


Test Engineer: Chen ZhiQiang


DTS Bandwidth



Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_2M	Ant12	2404	1.18	2403.42	2404.59	0.5	PASS
		2440	1.23	2439.36	2440.59	0.5	PASS
		2478	1.24	2477.35	2478.59	0.5	PASS
BLE_125K	Ant12	2402	0.69	2401.66	2402.35	0.5	PASS
		2440	0.69	2439.65	2440.34	0.5	PASS
		2480	0.69	2479.65	2480.34	0.5	PASS

Test Graphs

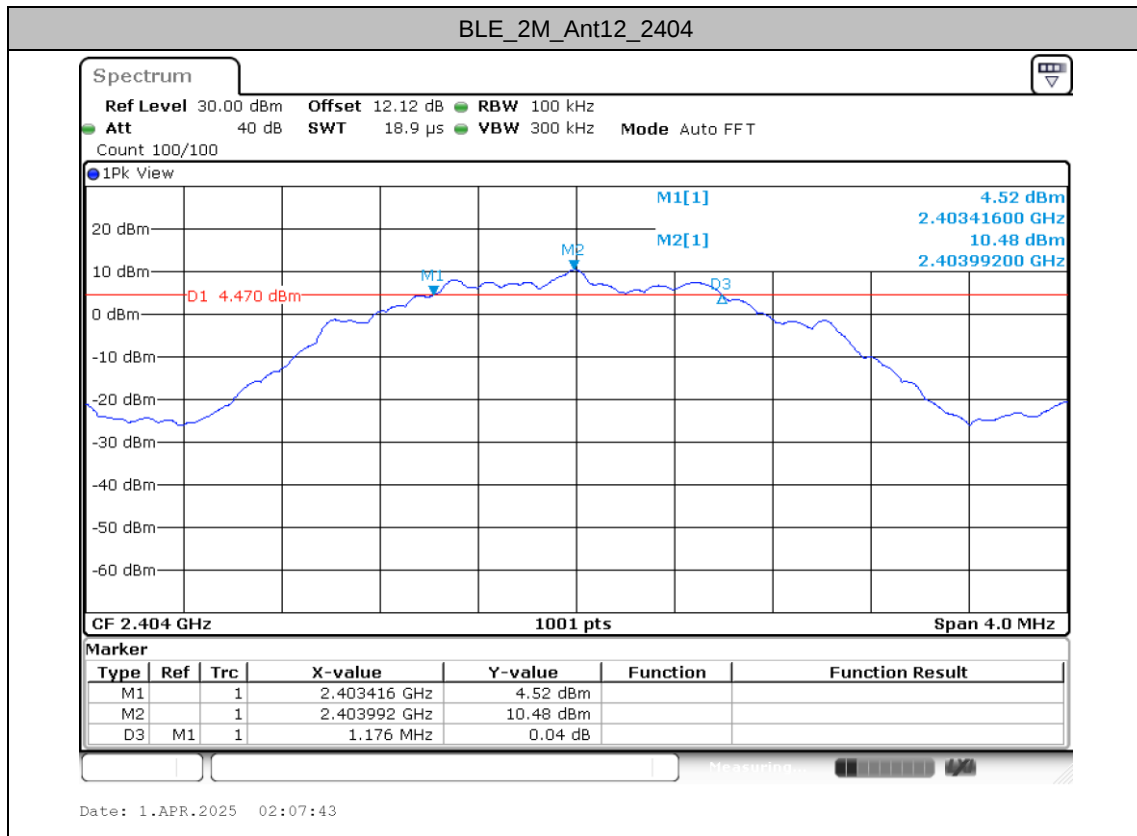

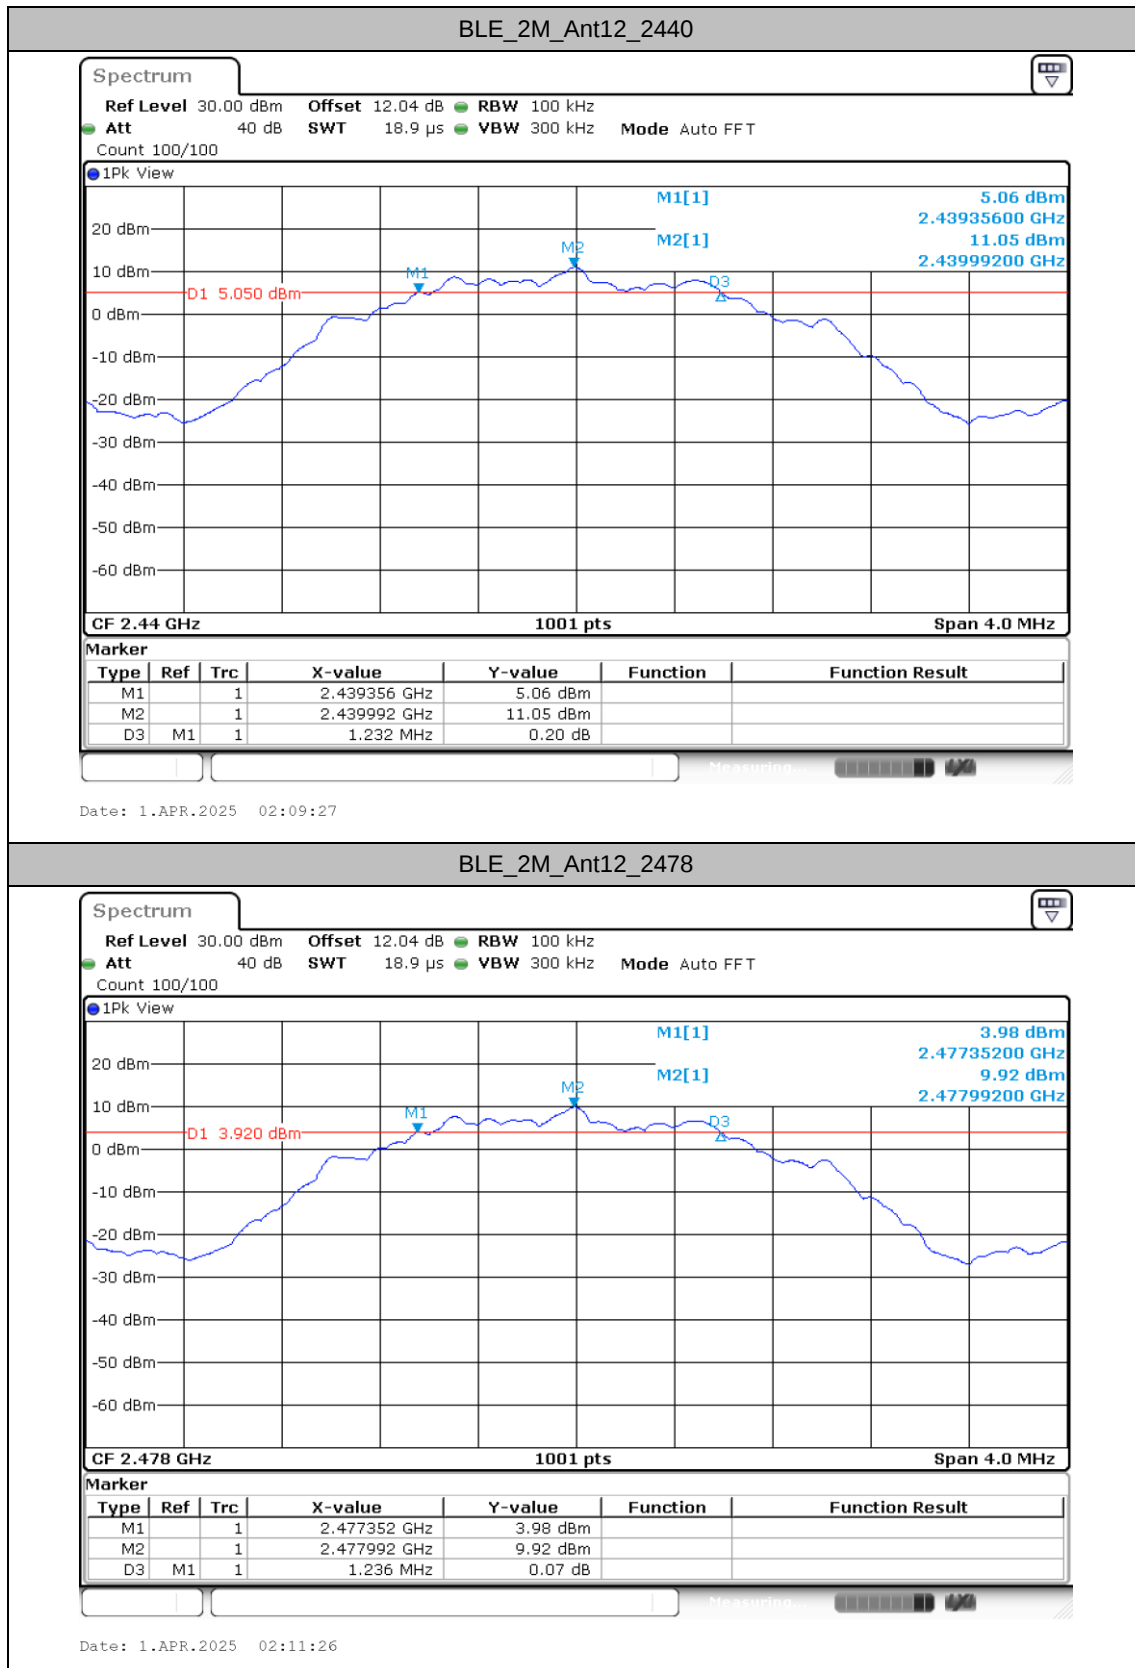

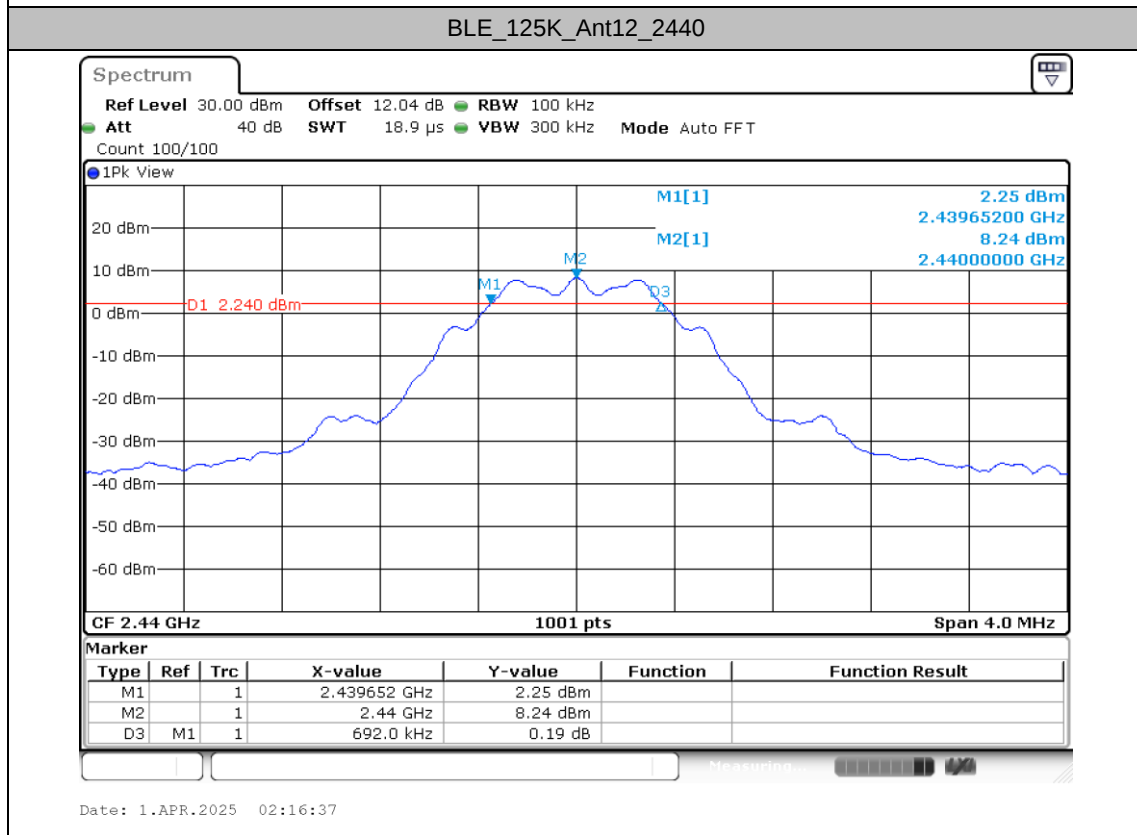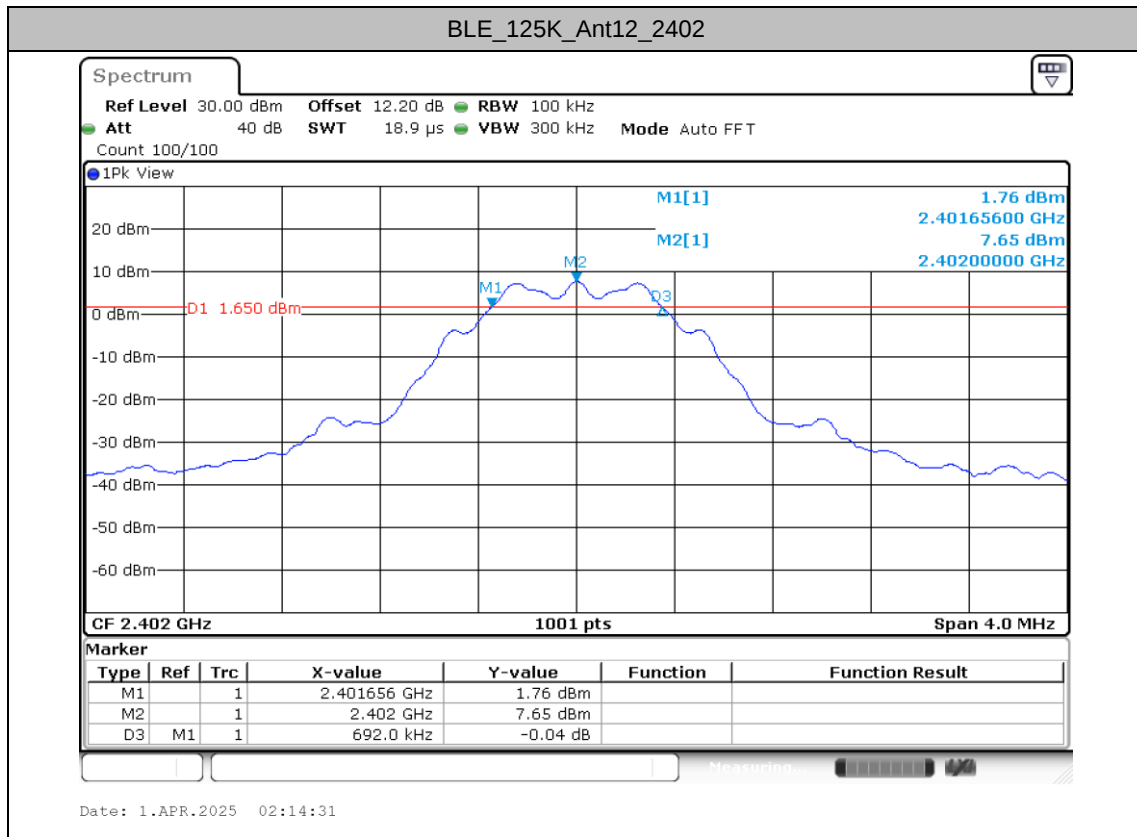

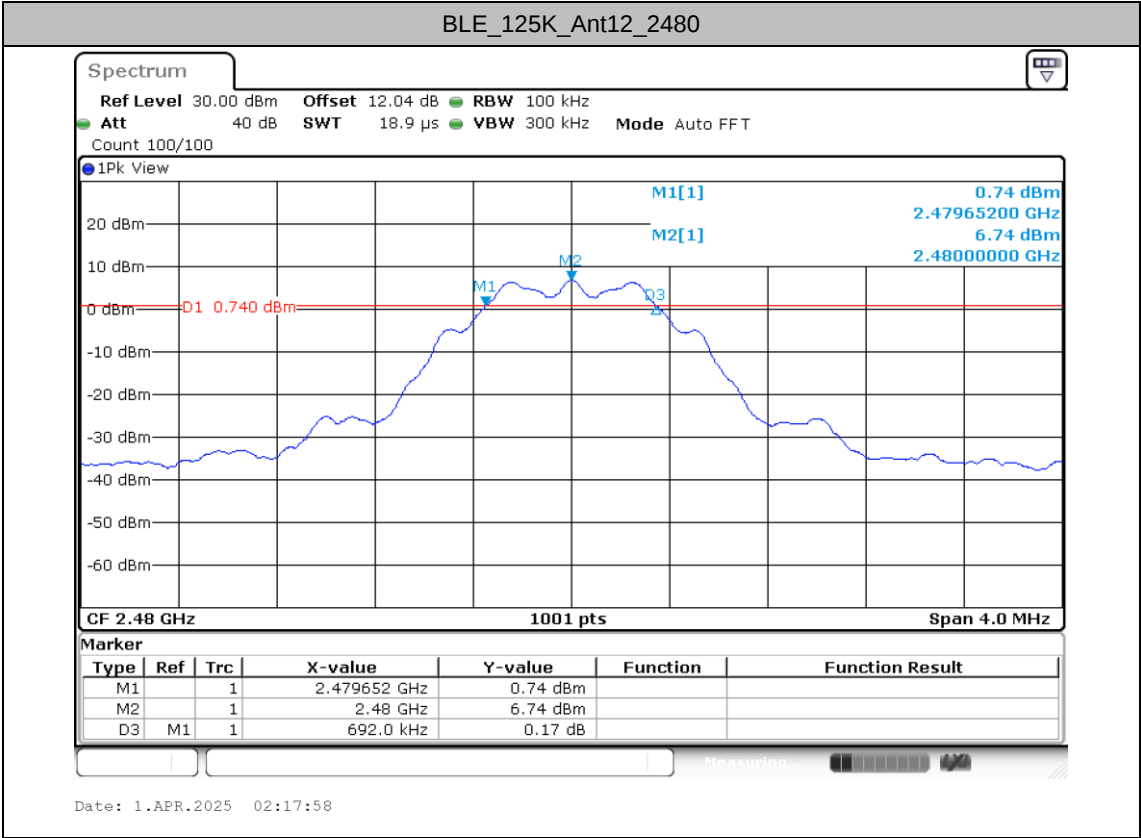





Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE_2M	Ant12	2404	2.084	2402.9821	2405.0659
		2440	2.077	2438.9817	2441.0587
		2478	2.072	2476.9813	2479.0535
BLE_125K	Ant12	2402	1.064	2401.4701	2402.5343
		2440	1.06	2439.4705	2440.5303
		2480	1.058	2479.4701	2480.5283

Test Graphs

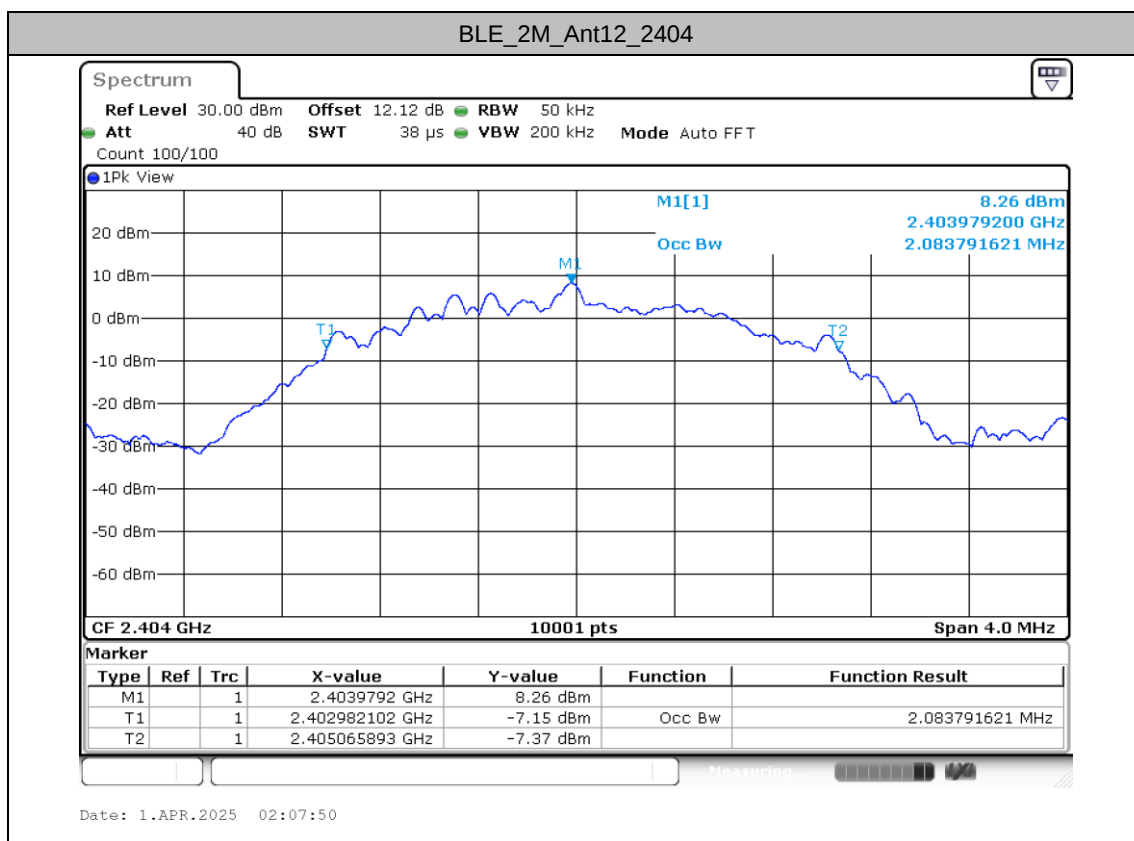

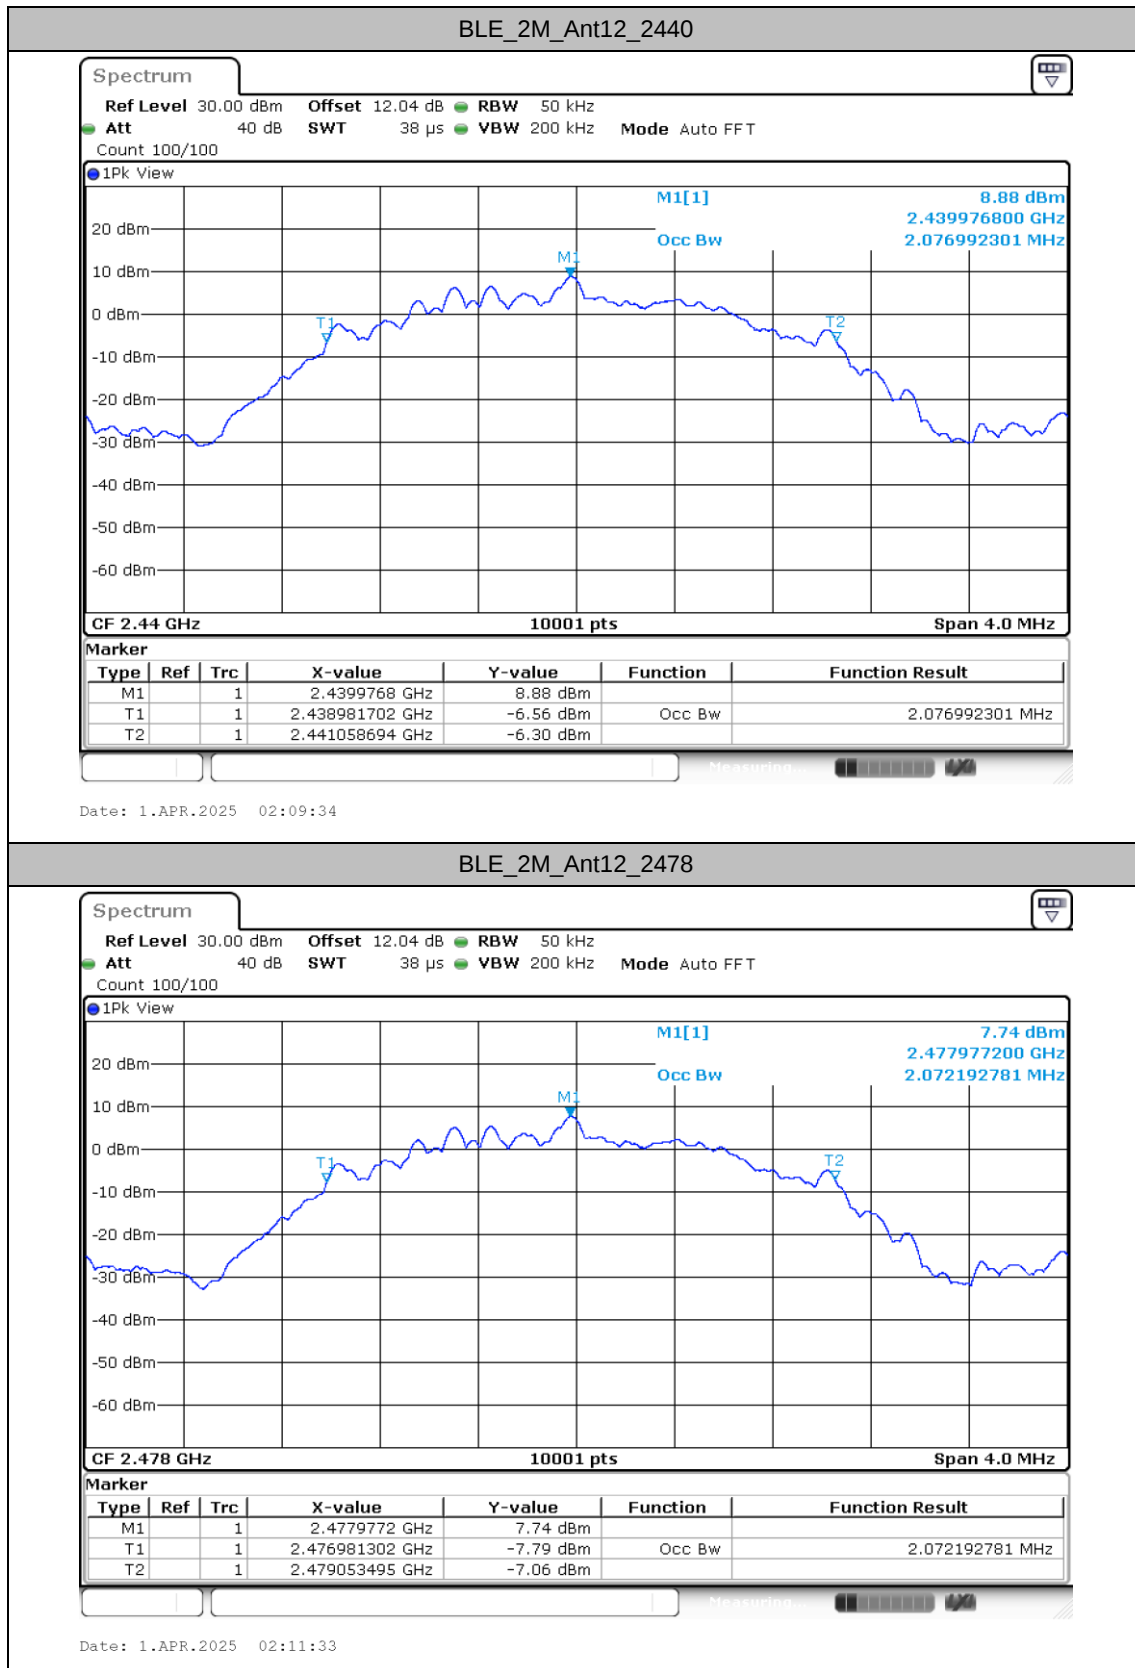

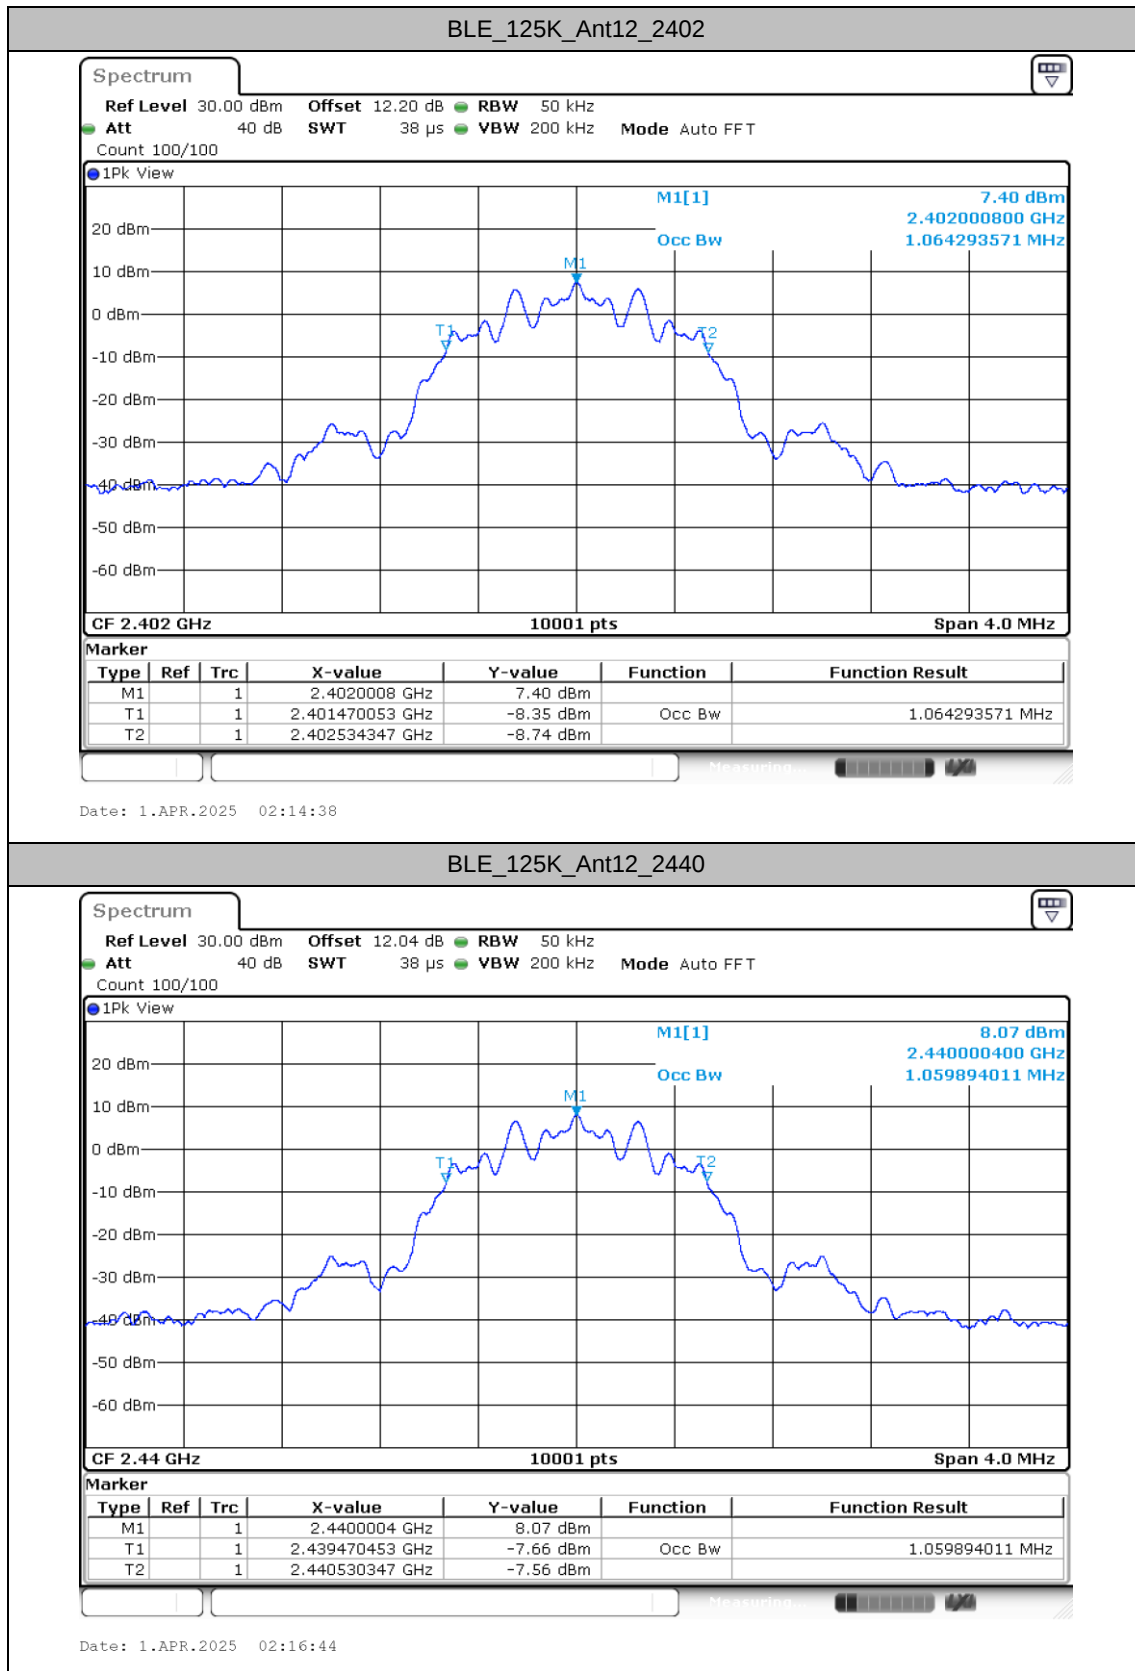

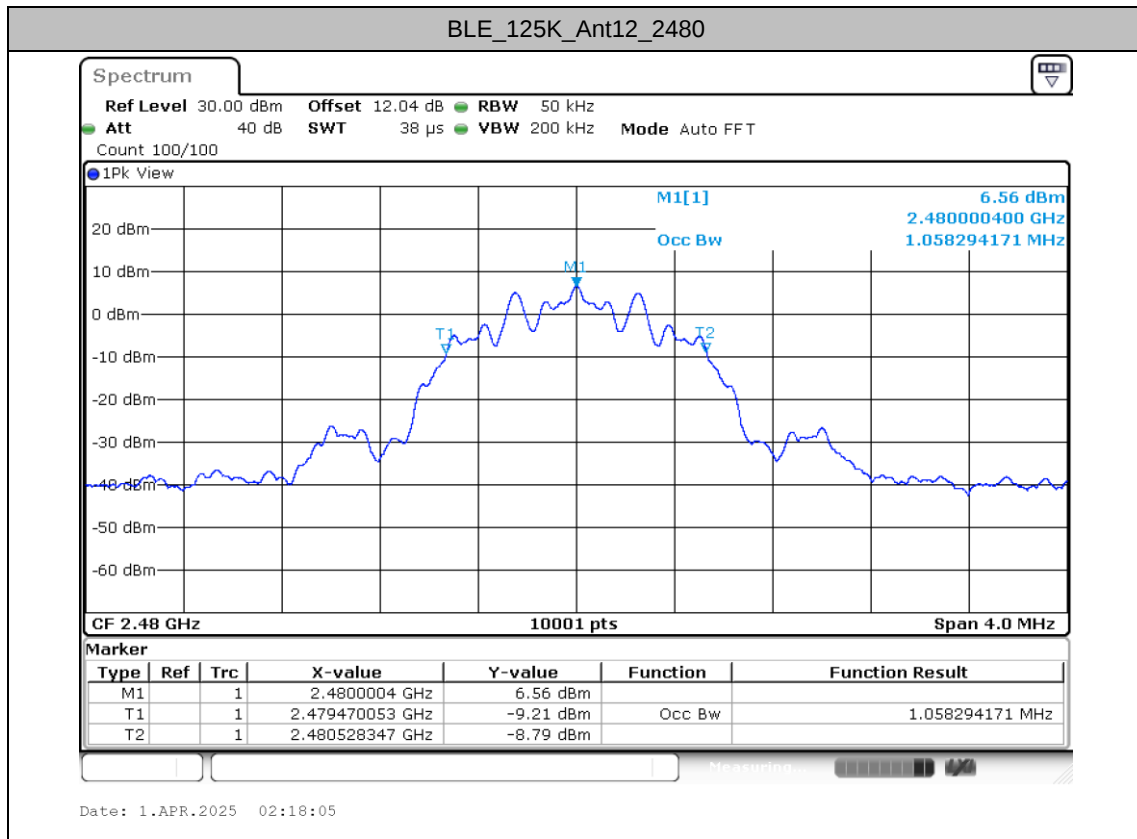





Maximum power spectral density



Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_2M	Ant12	2404	-6.01	≤8.00	PASS
		2440	-5.42	≤8.00	PASS
		2478	-6.53	≤8.00	PASS
BLE_125K	Ant12	2402	4.64	≤8.00	PASS
		2440	5.38	≤8.00	PASS
		2480	3.88	≤8.00	PASS

Test Graphs

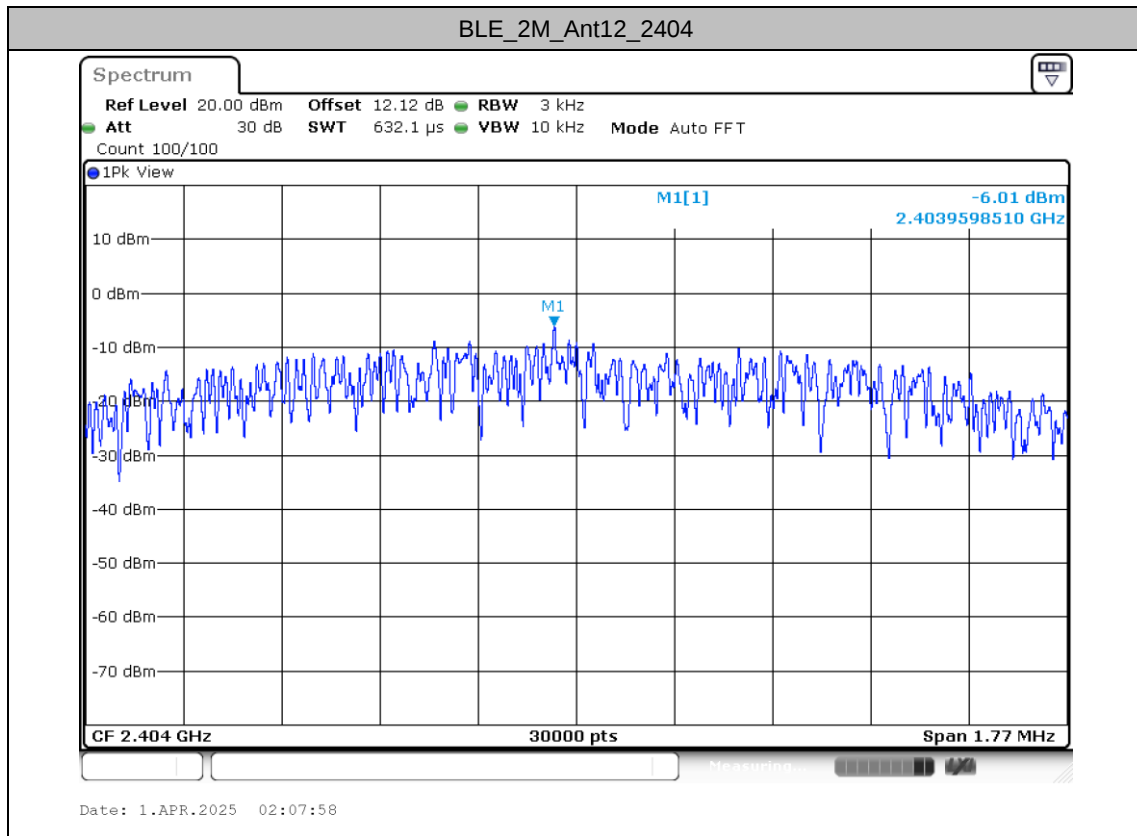

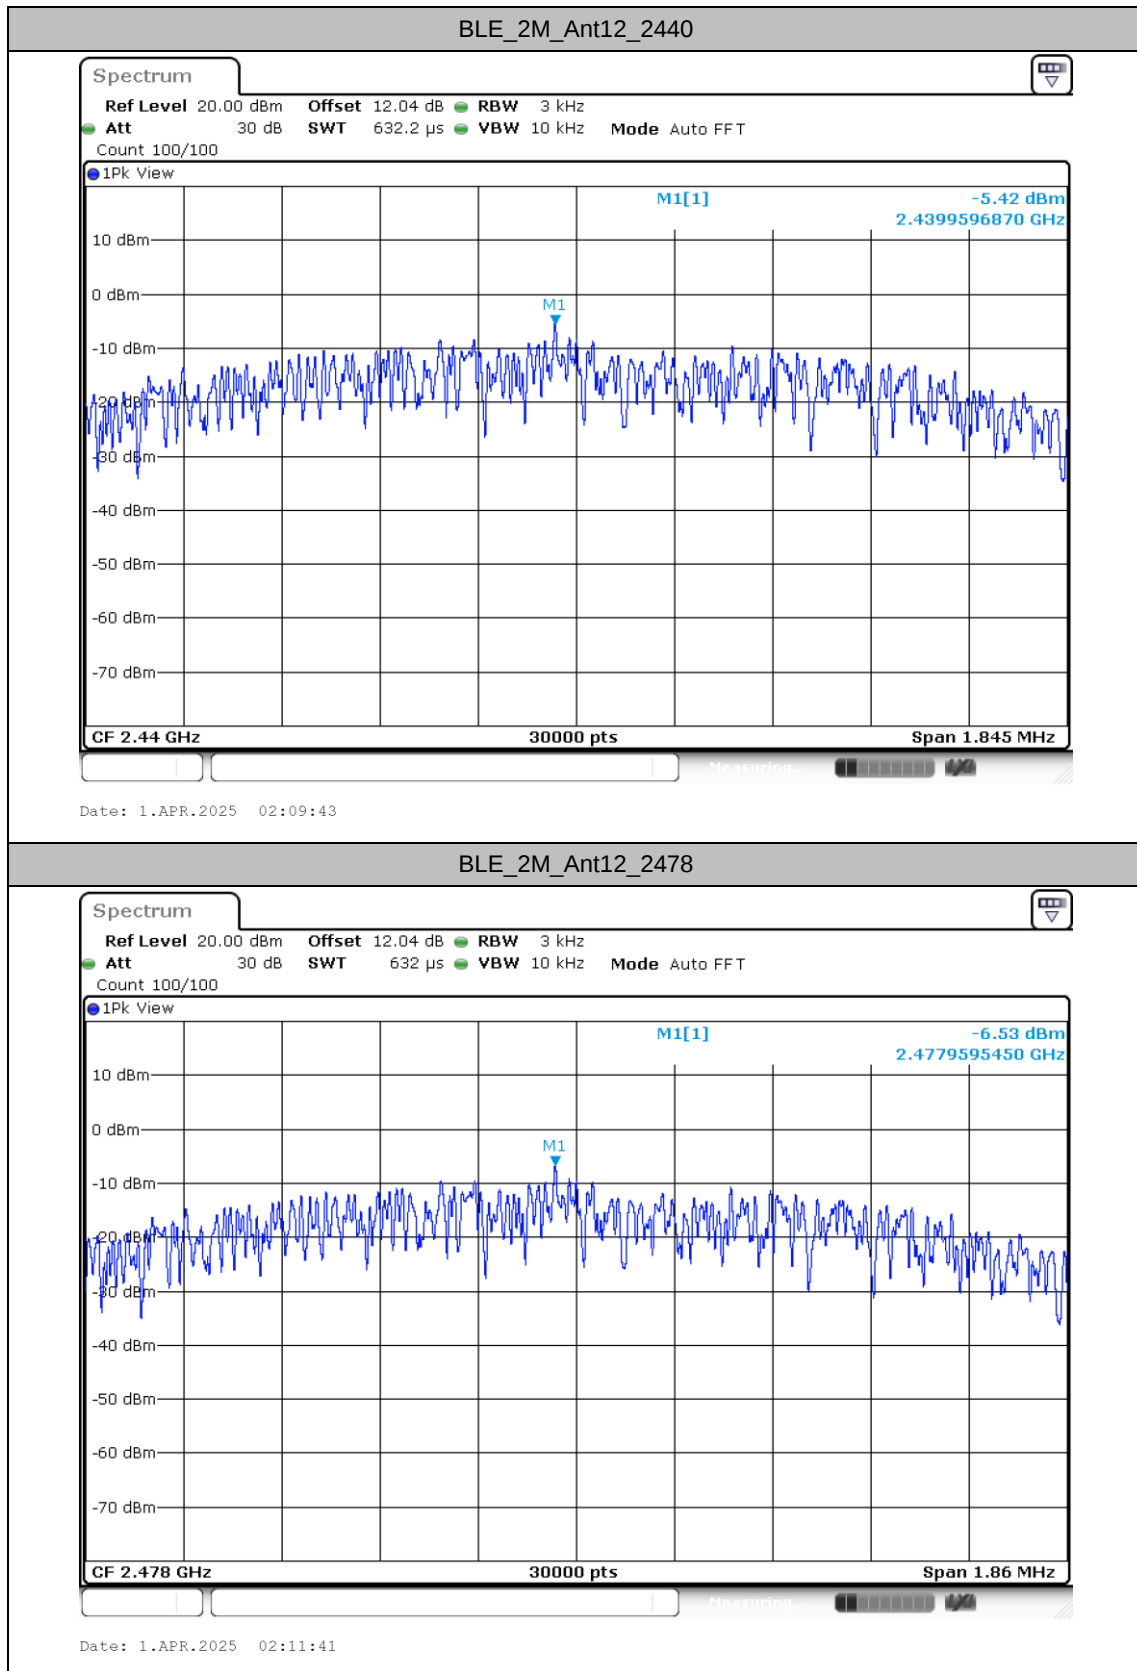

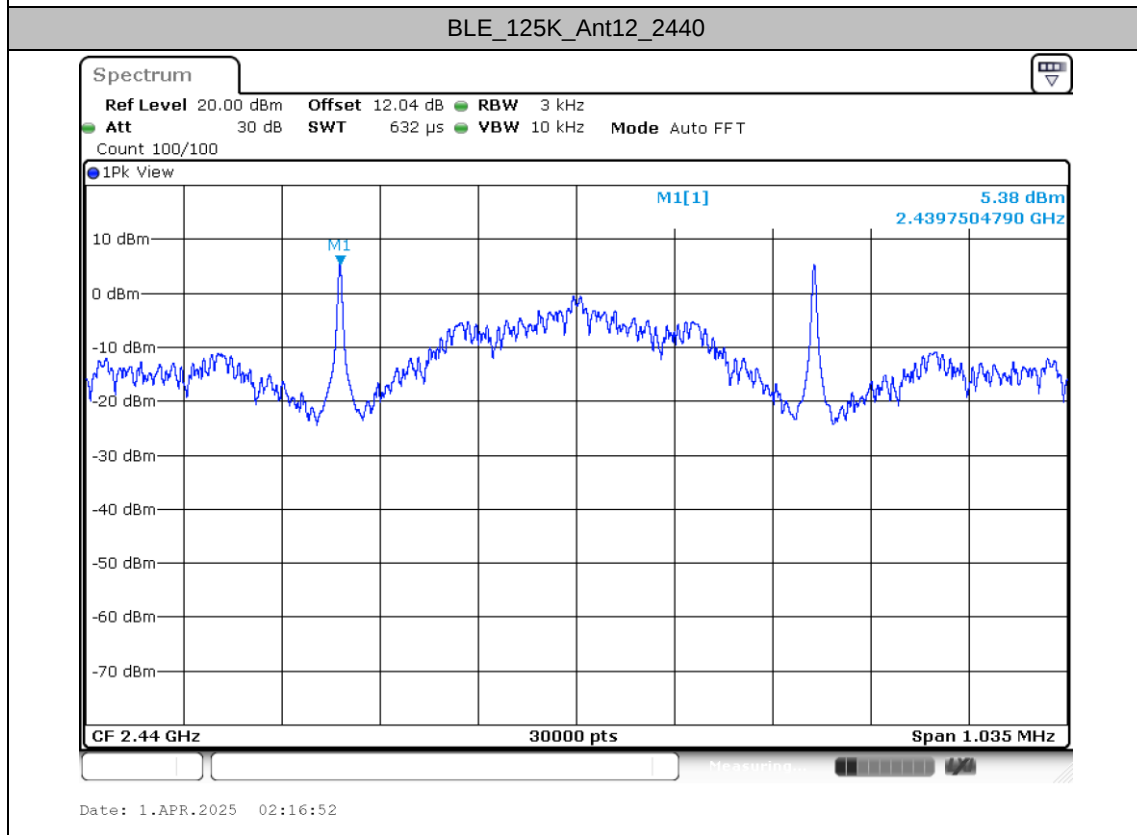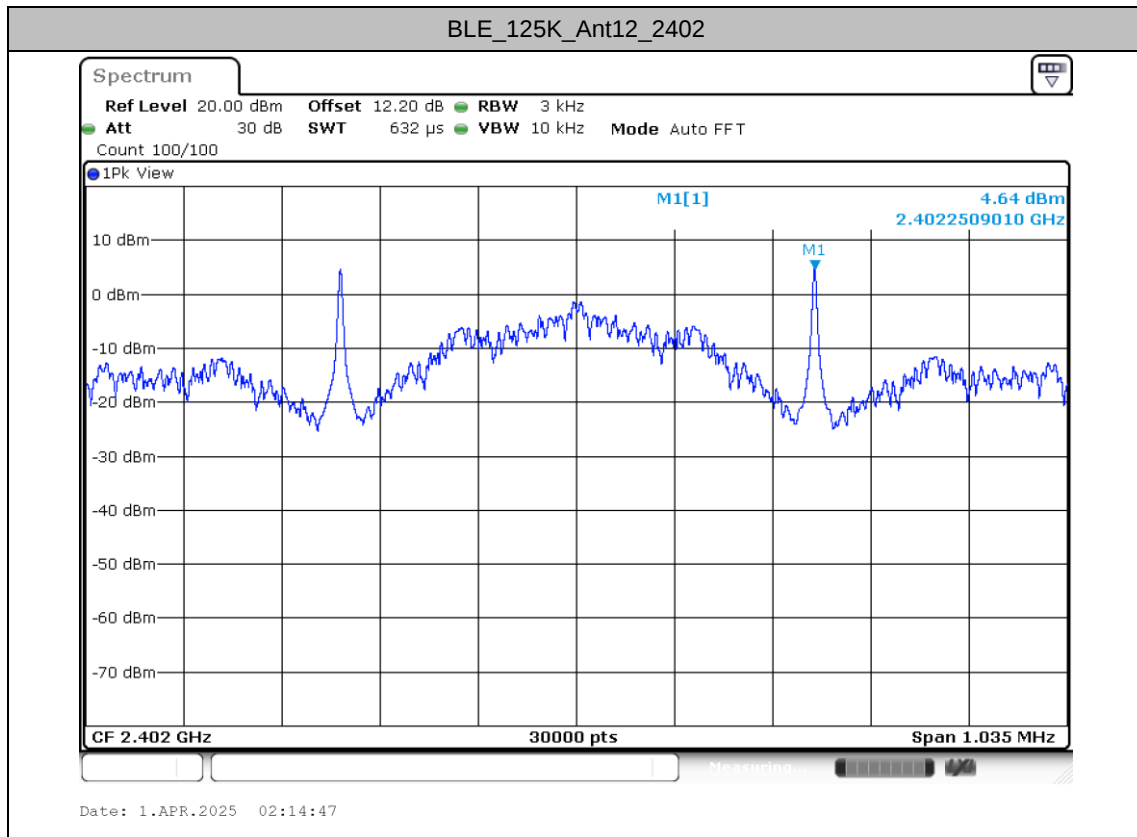

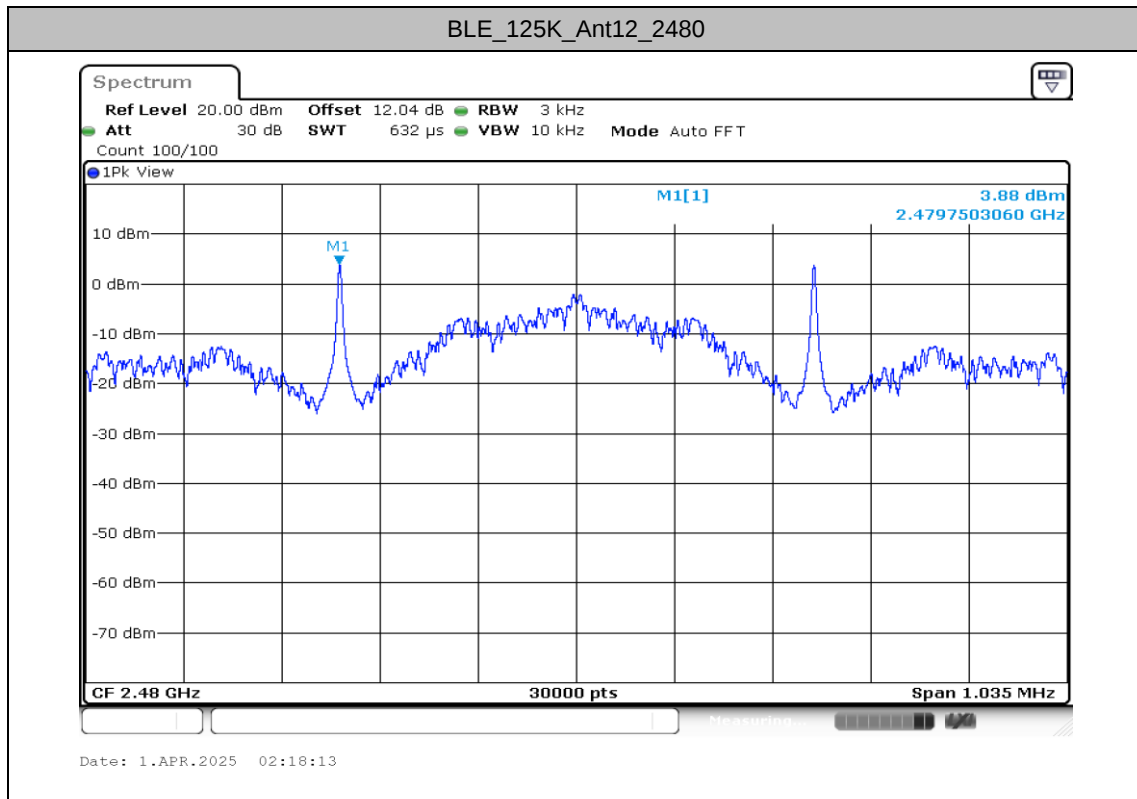





Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_2M	Ant12	2404	2403.99	10.46
		2440	2439.99	10.98
		2478	2477.99	9.86
BLE_125K	Ant12	2402	2402.00	7.44
		2440	2440.00	8.13
		2480	2480.00	6.64

Test Graphs

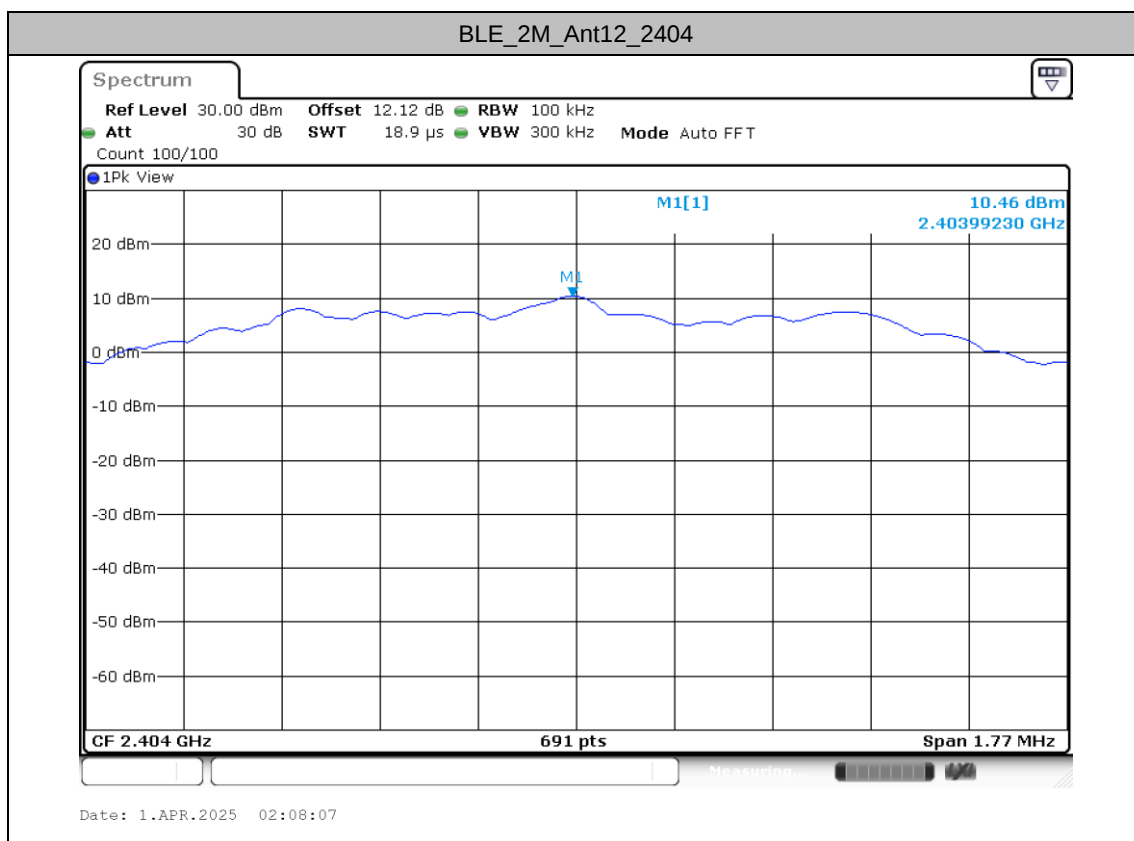

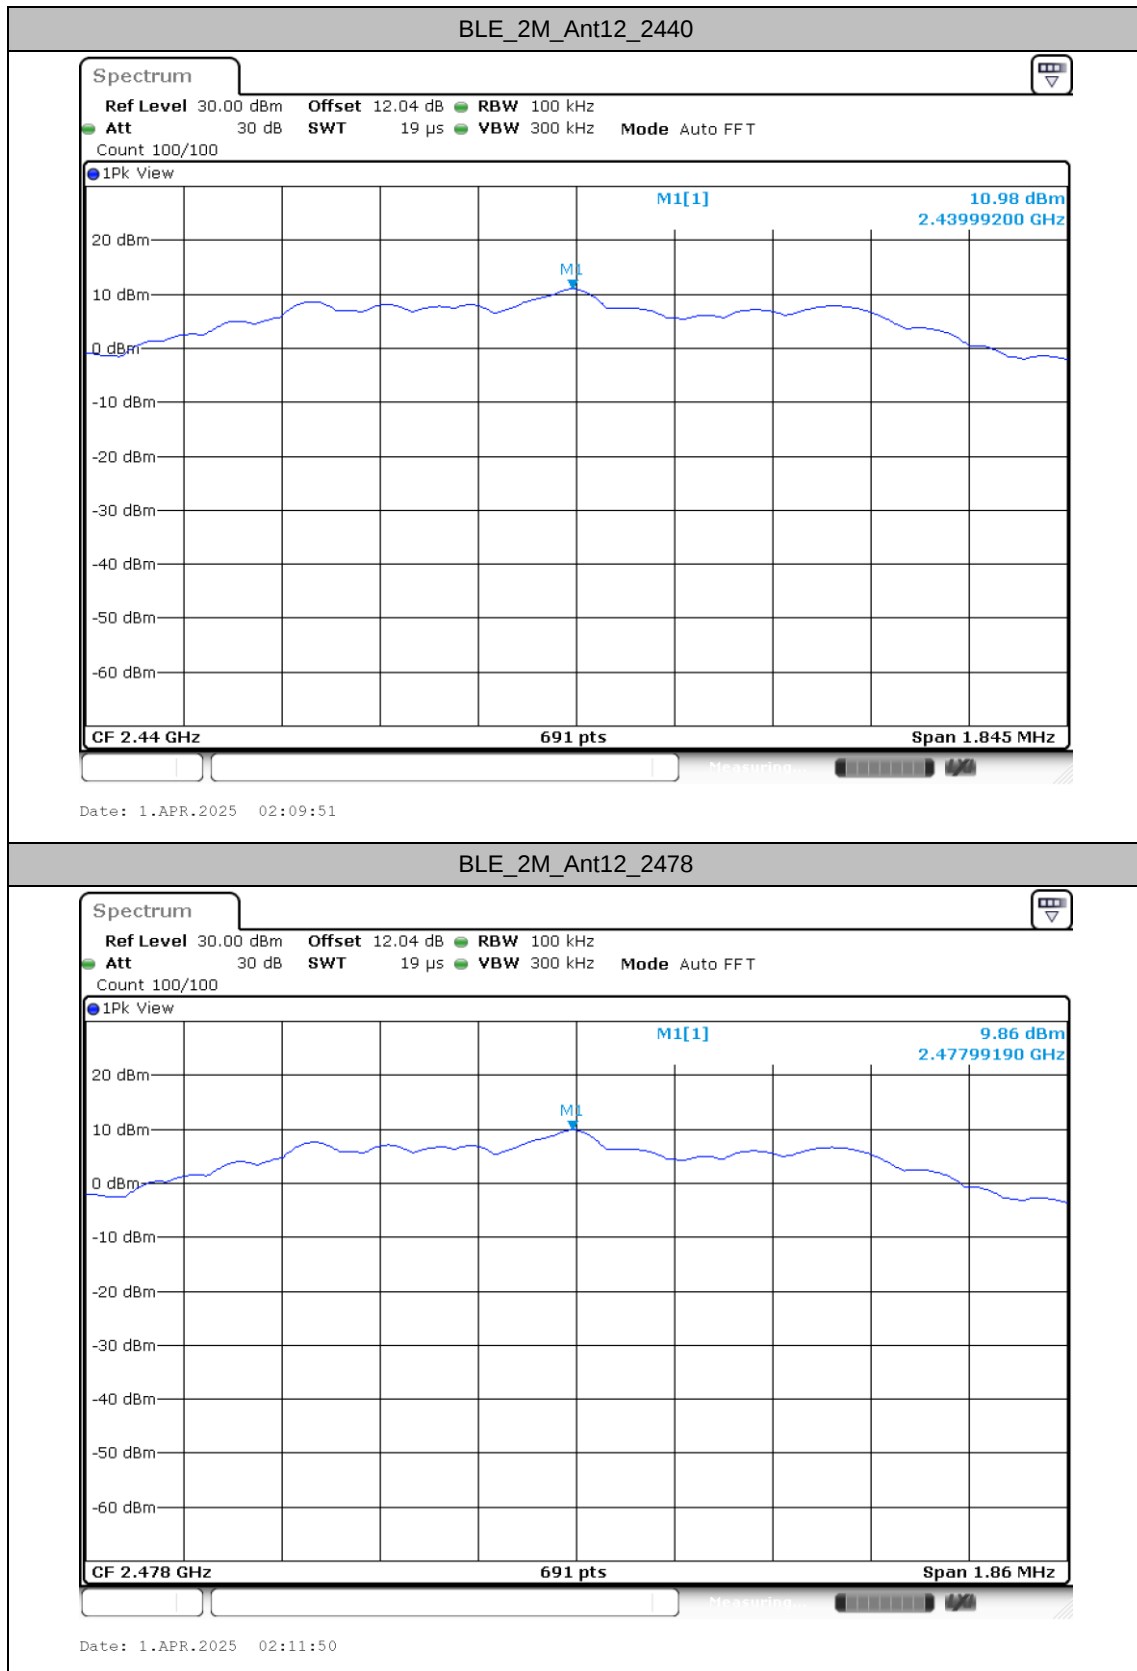

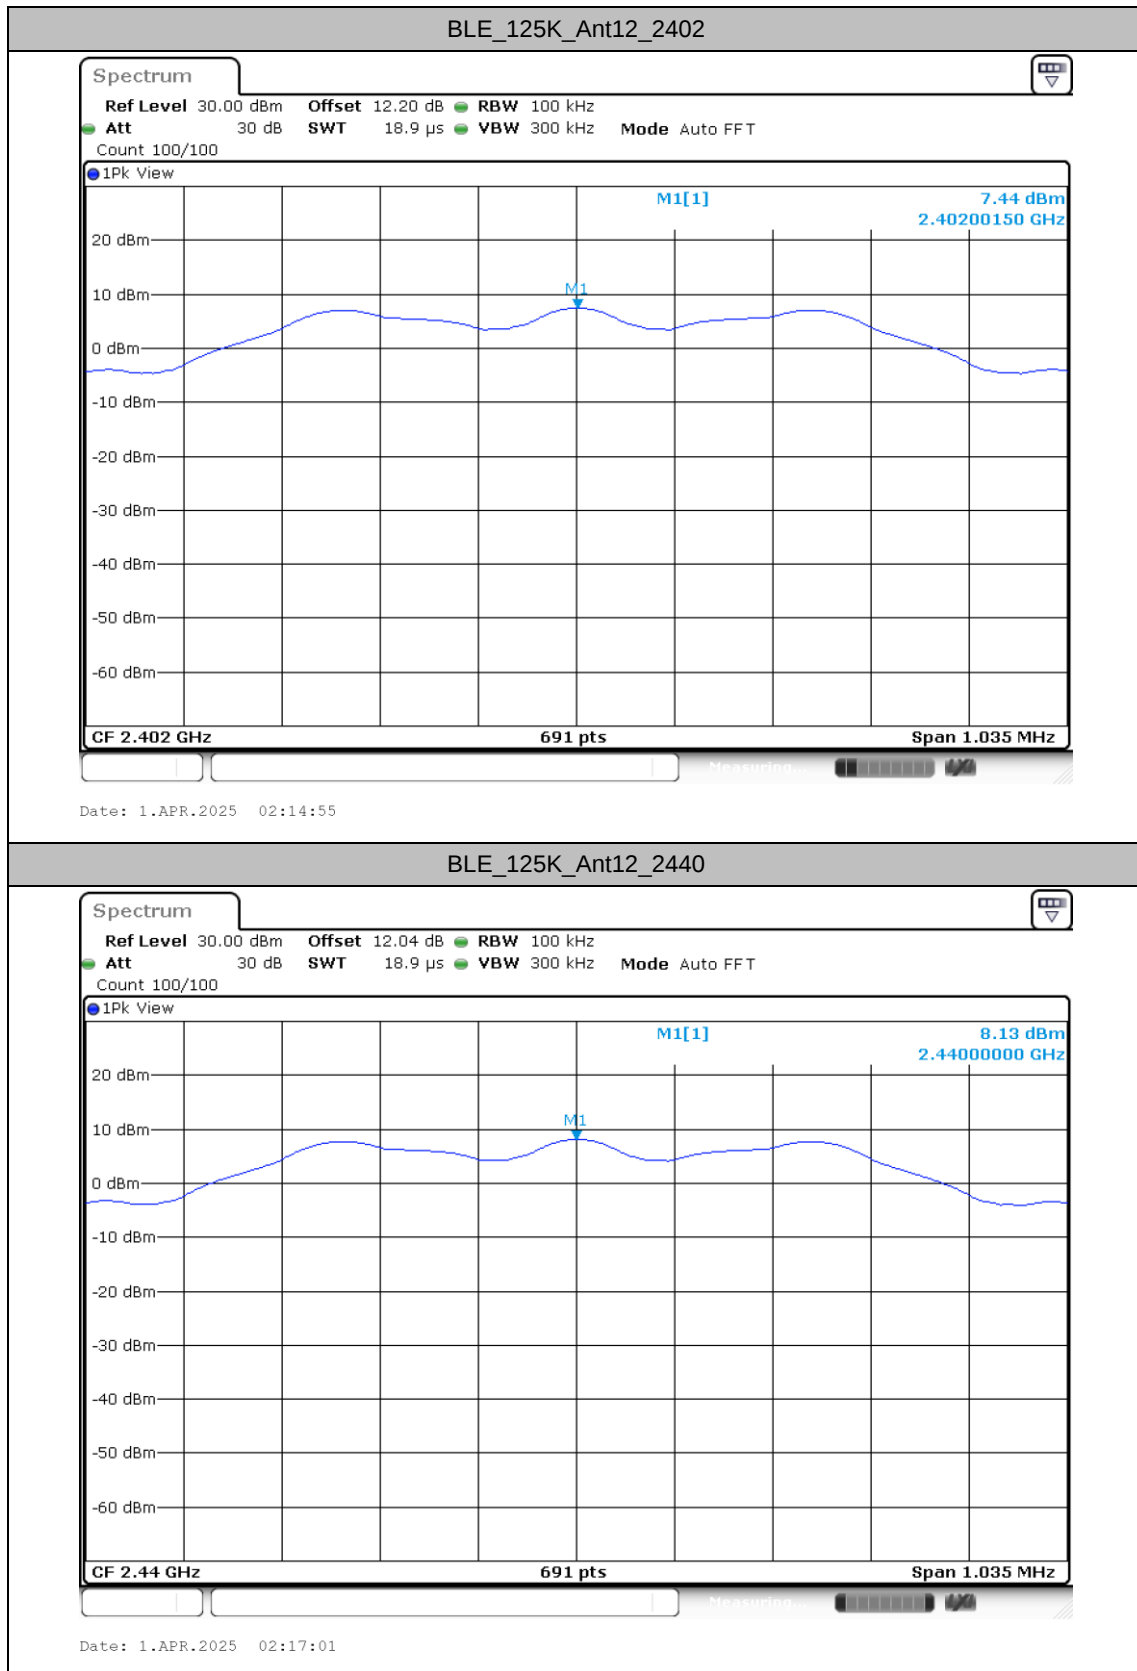

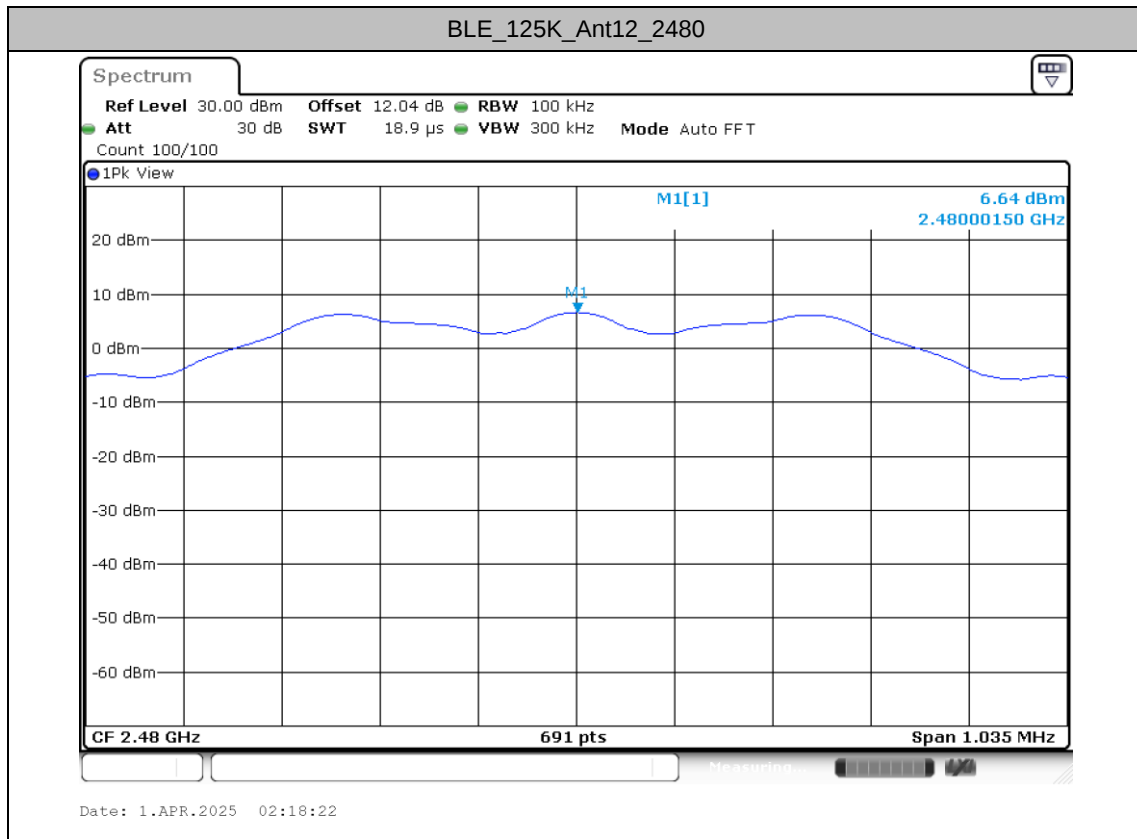




Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_2M	Ant12	Low	2404	10.46	-53.02	≤-19.54	PASS
		High	2478	9.86	-53.89	≤-20.14	PASS
BLE_125K	Ant12	Low	2402	7.44	-50.42	≤-22.56	PASS
		High	2480	6.64	-53.44	≤-23.36	PASS

Test Graphs

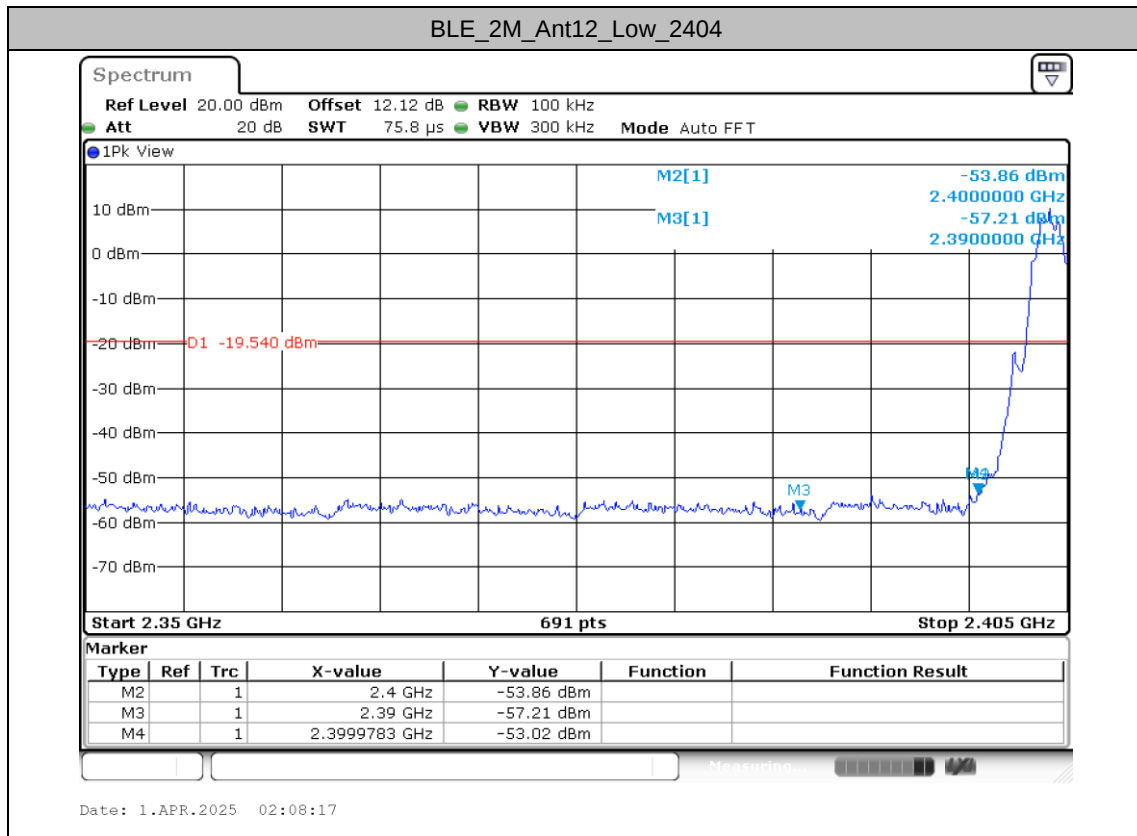

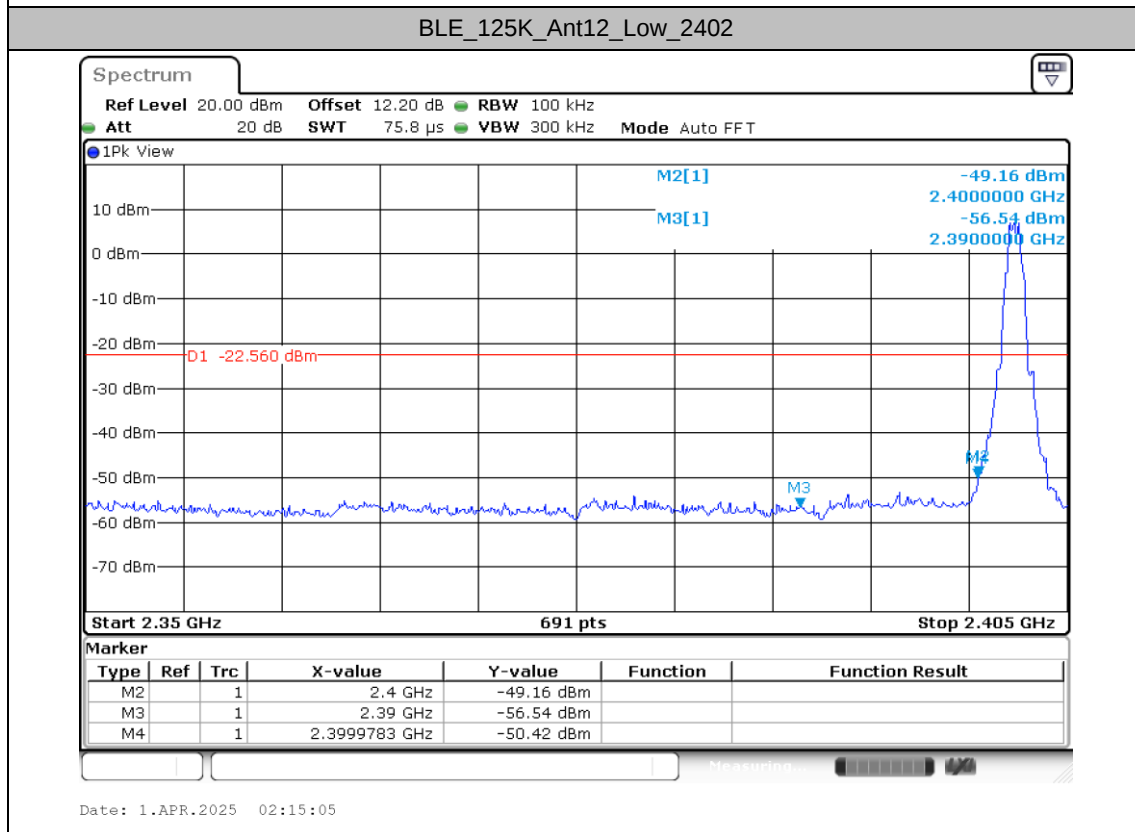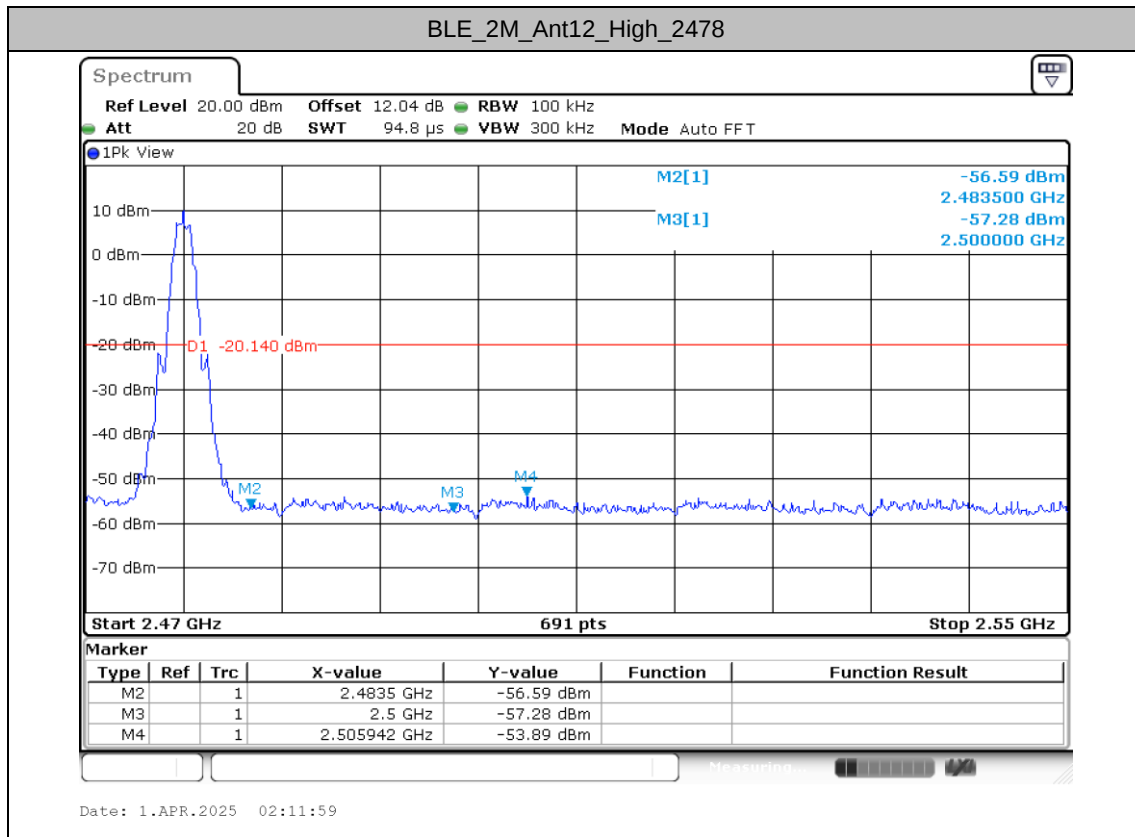

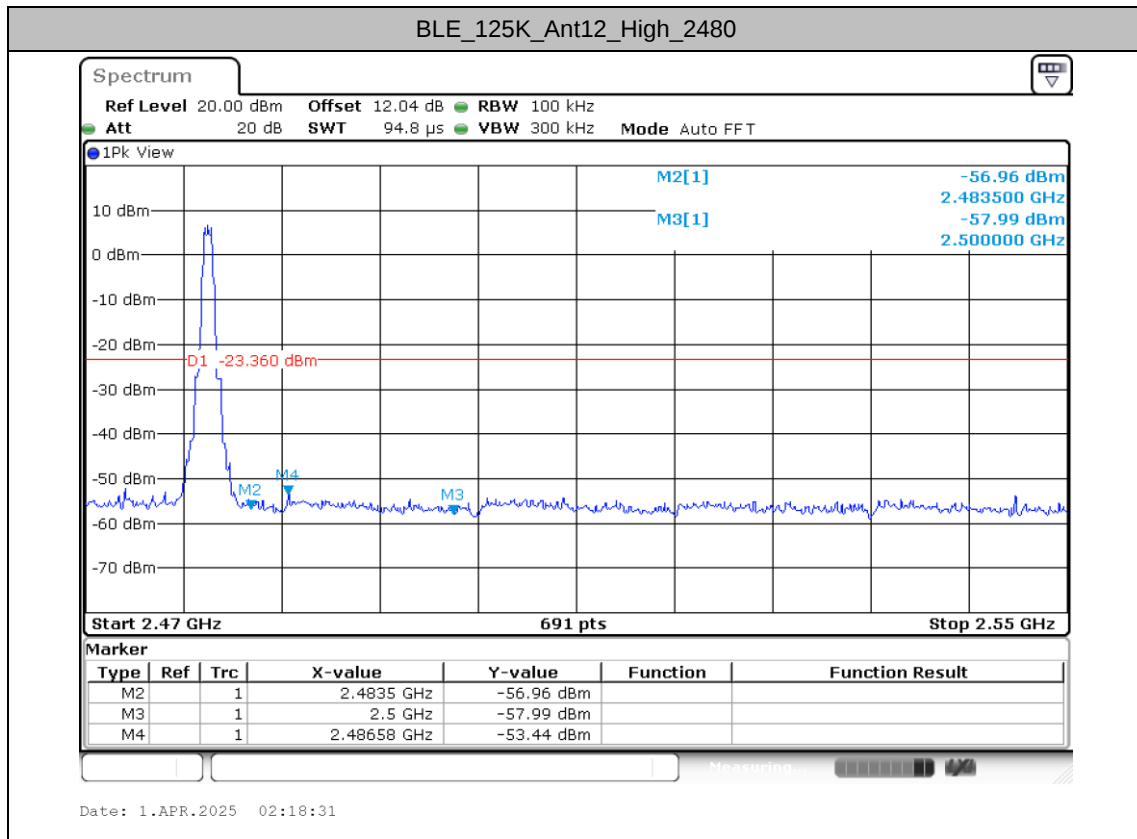





Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_2M	Ant12	2404	30~1000	10.46	-45.03	≤ -19.54	PASS
			1000~26500	10.46	-35.58	≤ -19.54	PASS
		2440	30~1000	10.98	-45.23	≤ -19.02	PASS
			1000~26500	10.98	-35.41	≤ -19.02	PASS
		2478	30~1000	9.86	-45.86	≤ -20.14	PASS
			1000~26500	9.86	-35.36	≤ -20.14	PASS
BLE_125K	Ant12	2402	30~1000	7.44	-45.09	≤ -22.56	PASS
			1000~26500	7.44	-35.72	≤ -22.56	PASS
		2440	30~1000	8.13	-44.95	≤ -21.87	PASS
			1000~26500	8.13	-35.93	≤ -21.87	PASS
		2480	30~1000	6.64	-45.36	≤ -23.36	PASS
			1000~26500	6.64	-34.81	≤ -23.36	PASS


Test Graphs

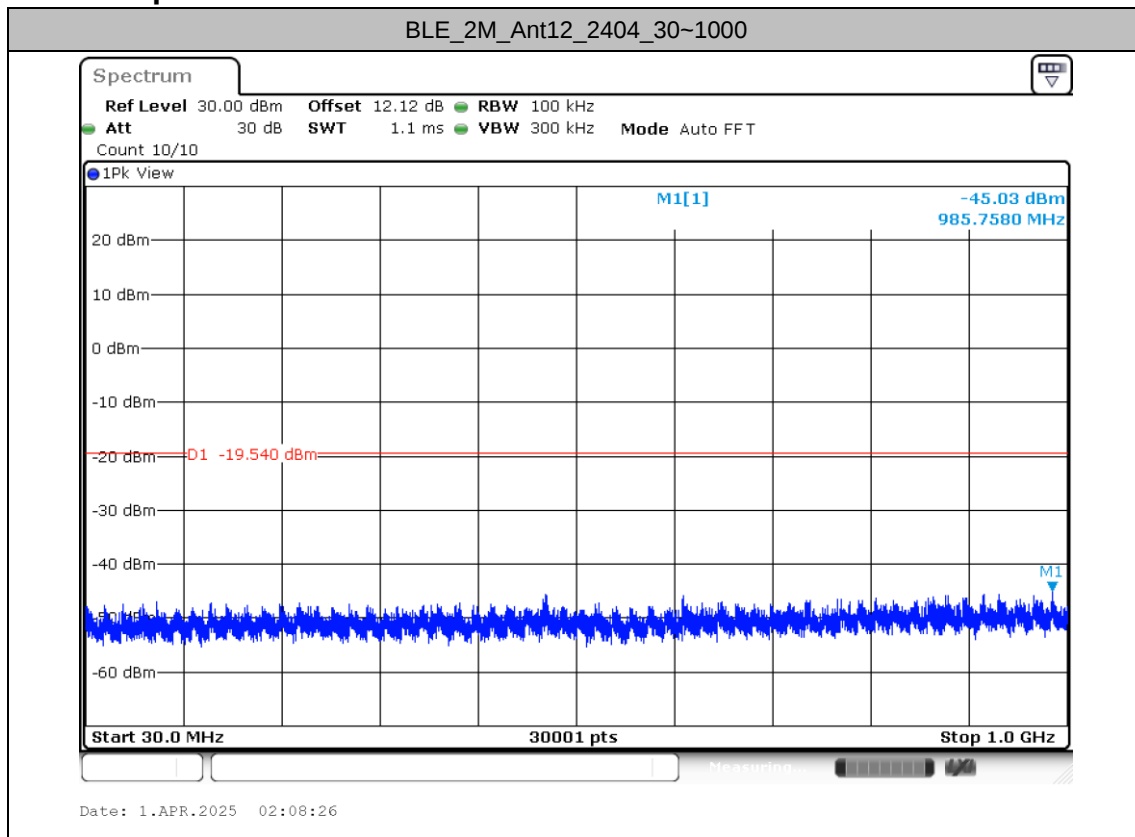


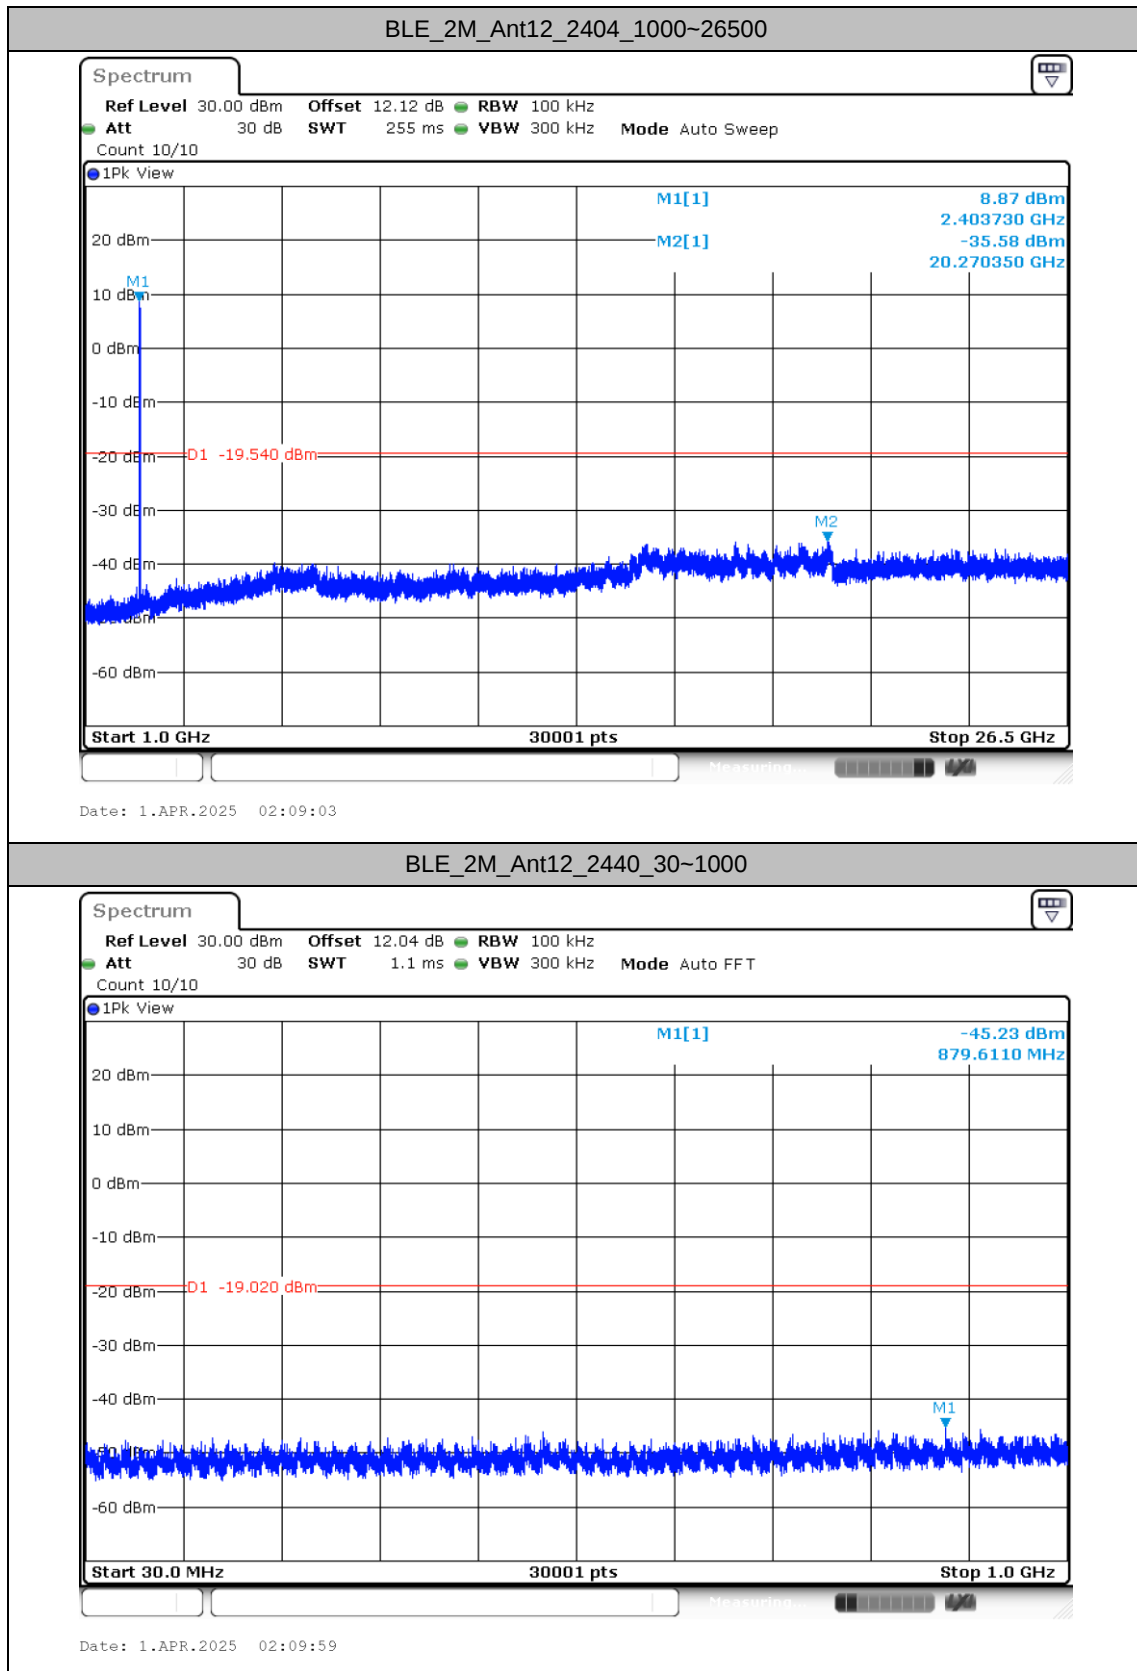


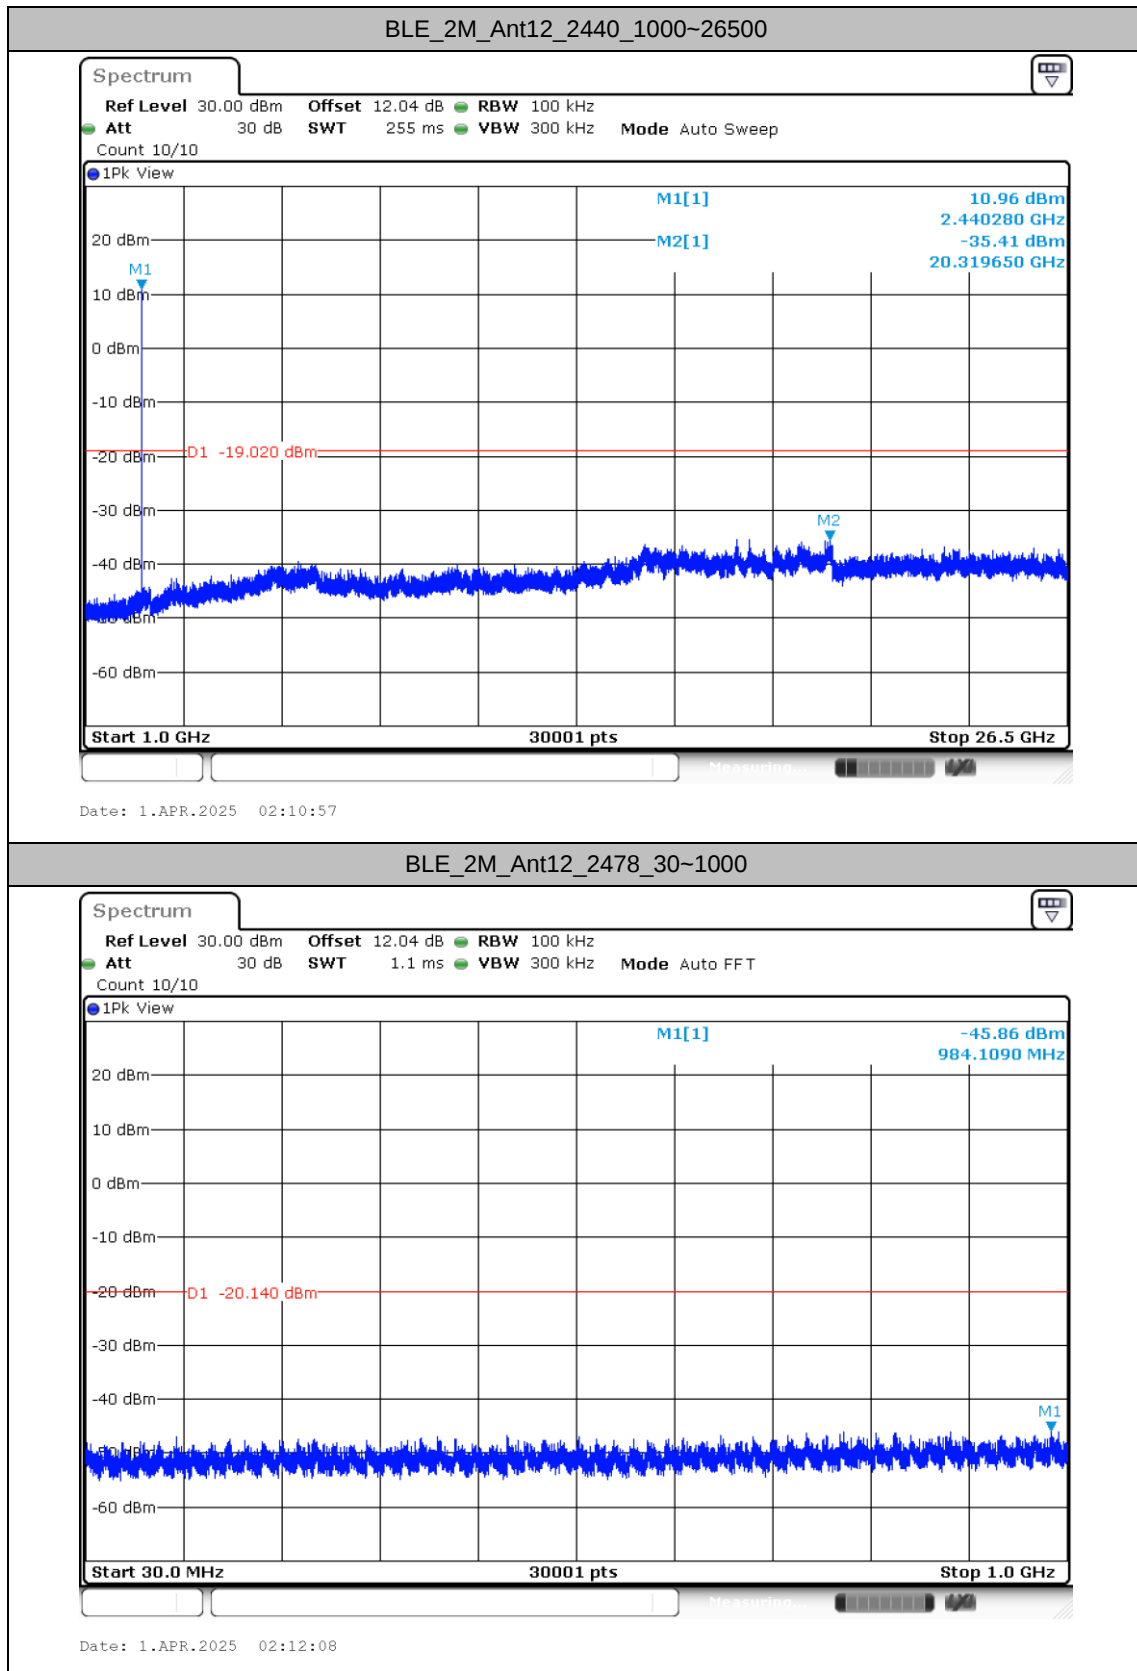

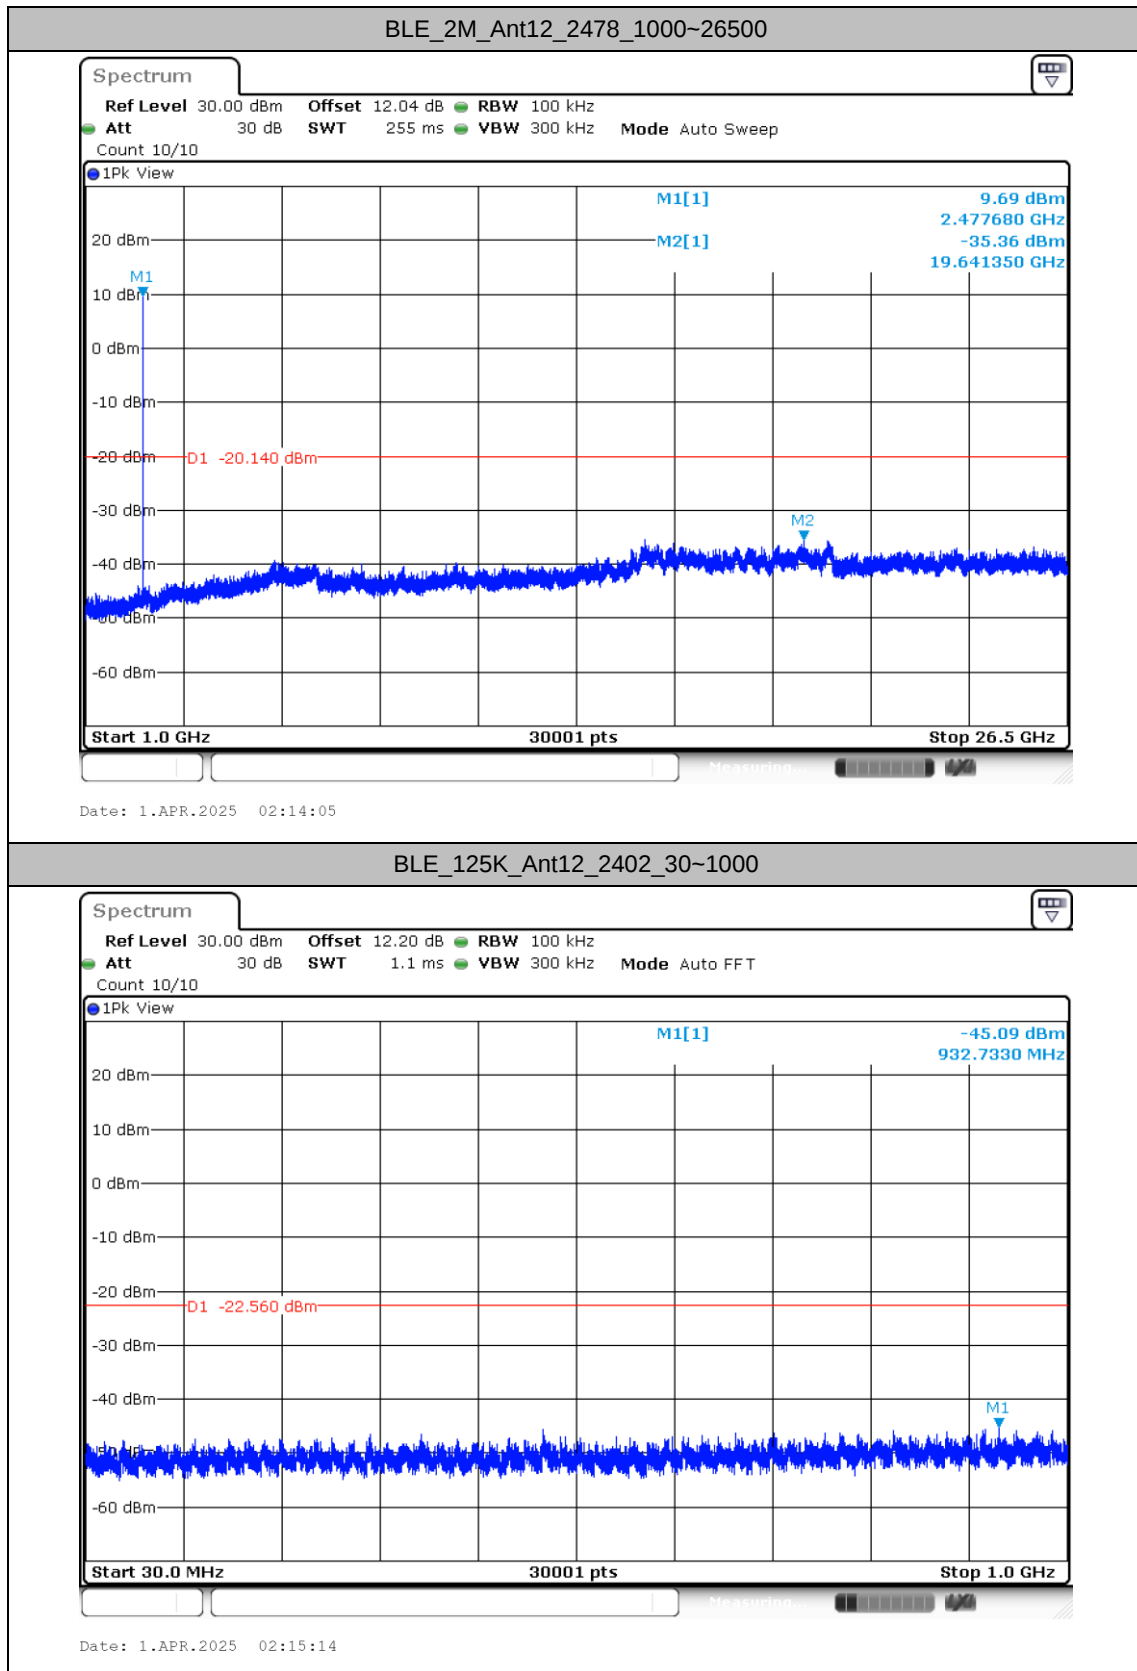

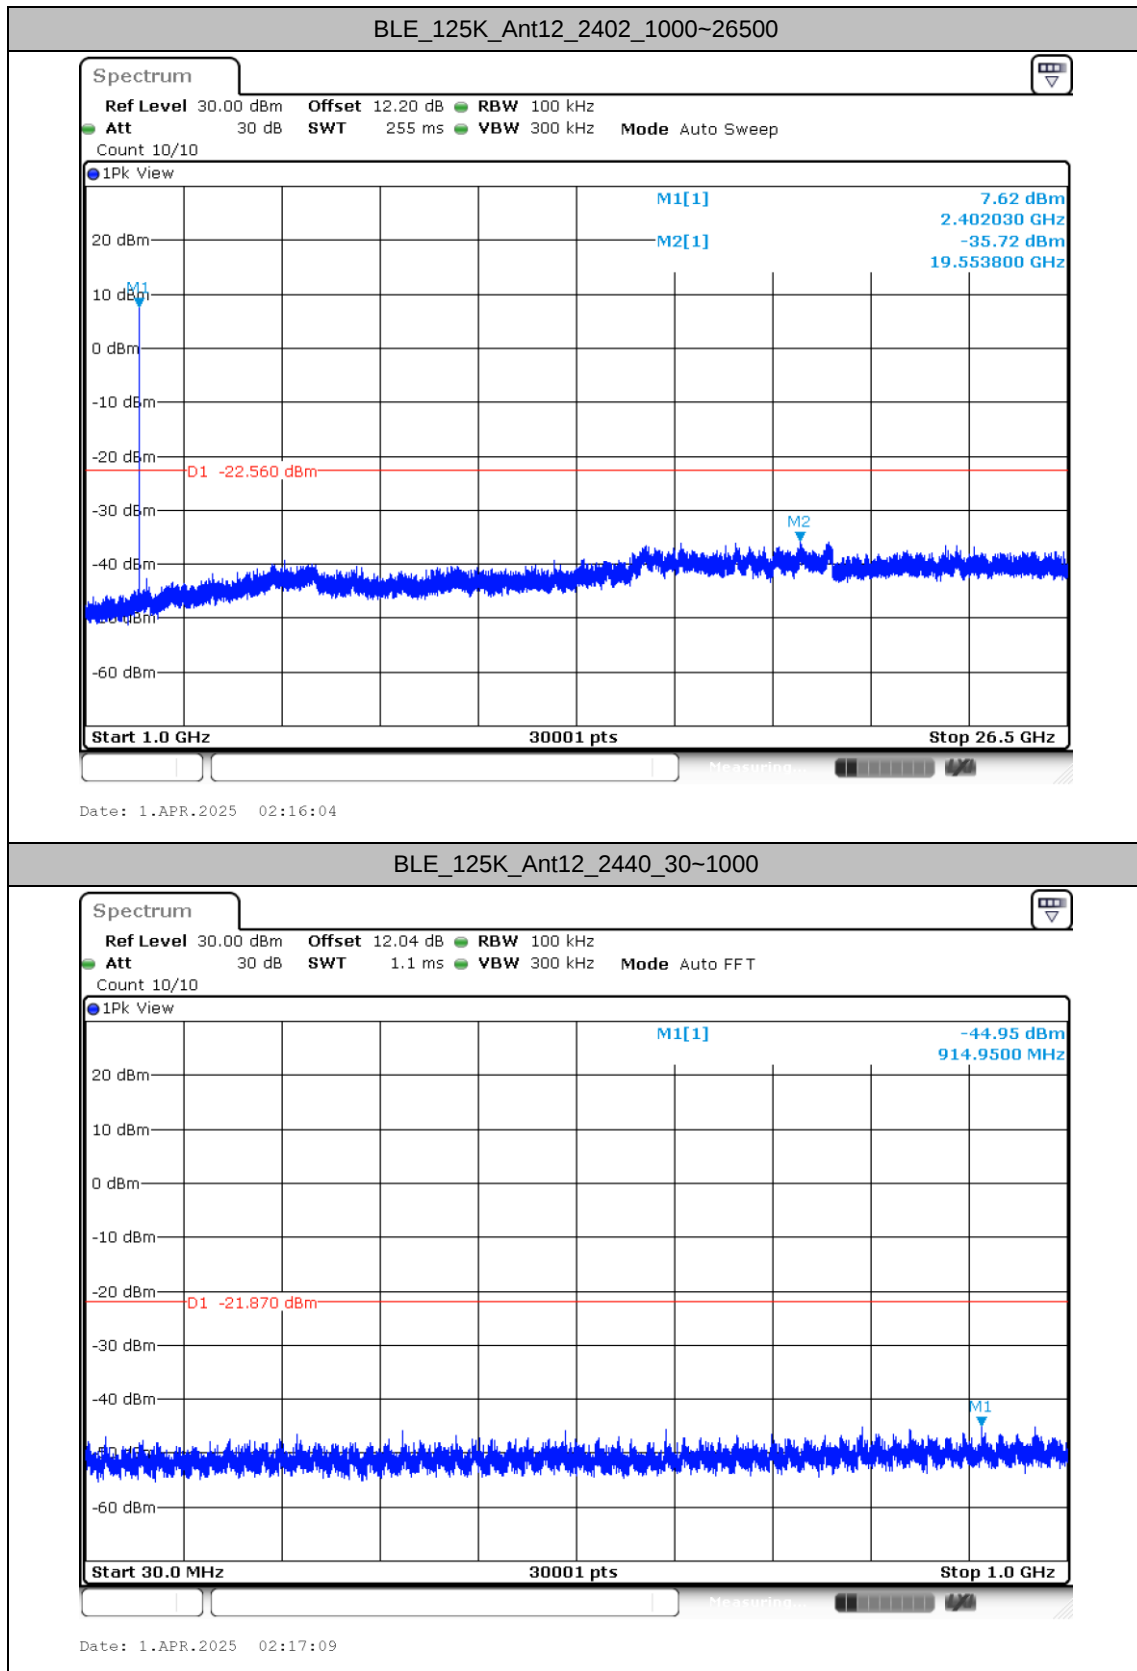


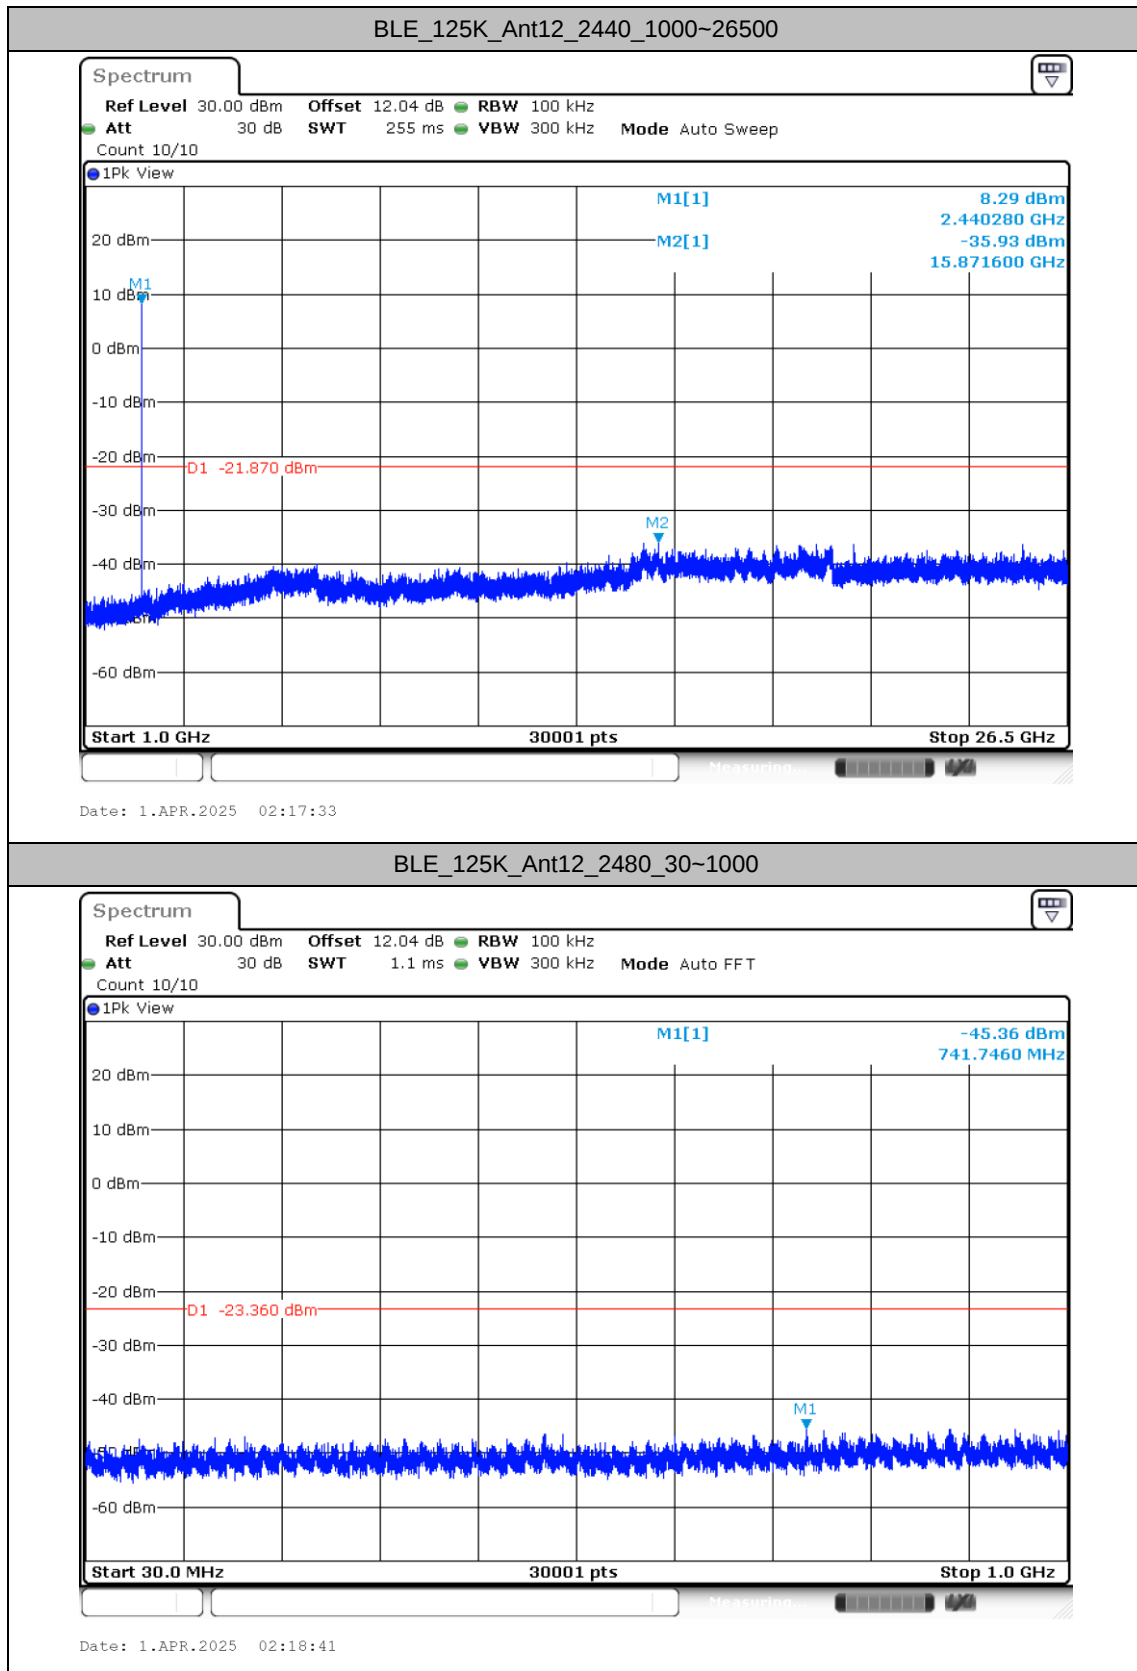

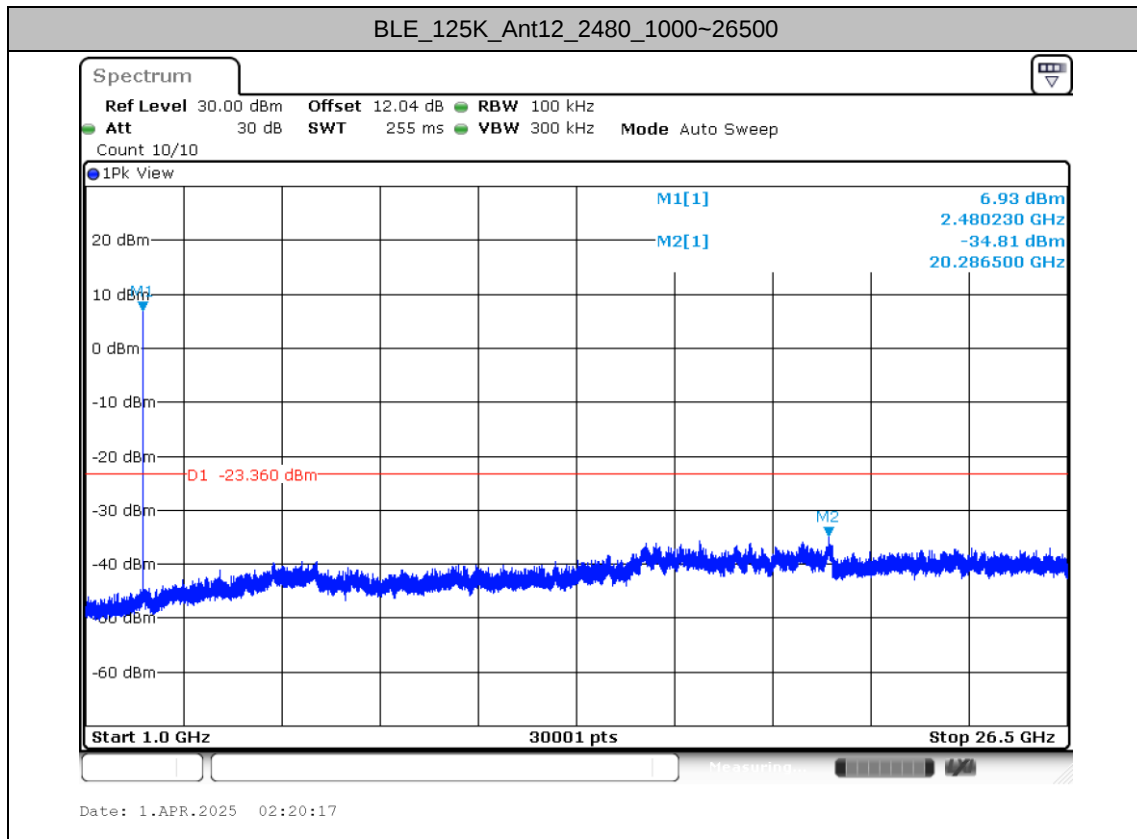




Appendix B. AC Conducted Emission Test Results

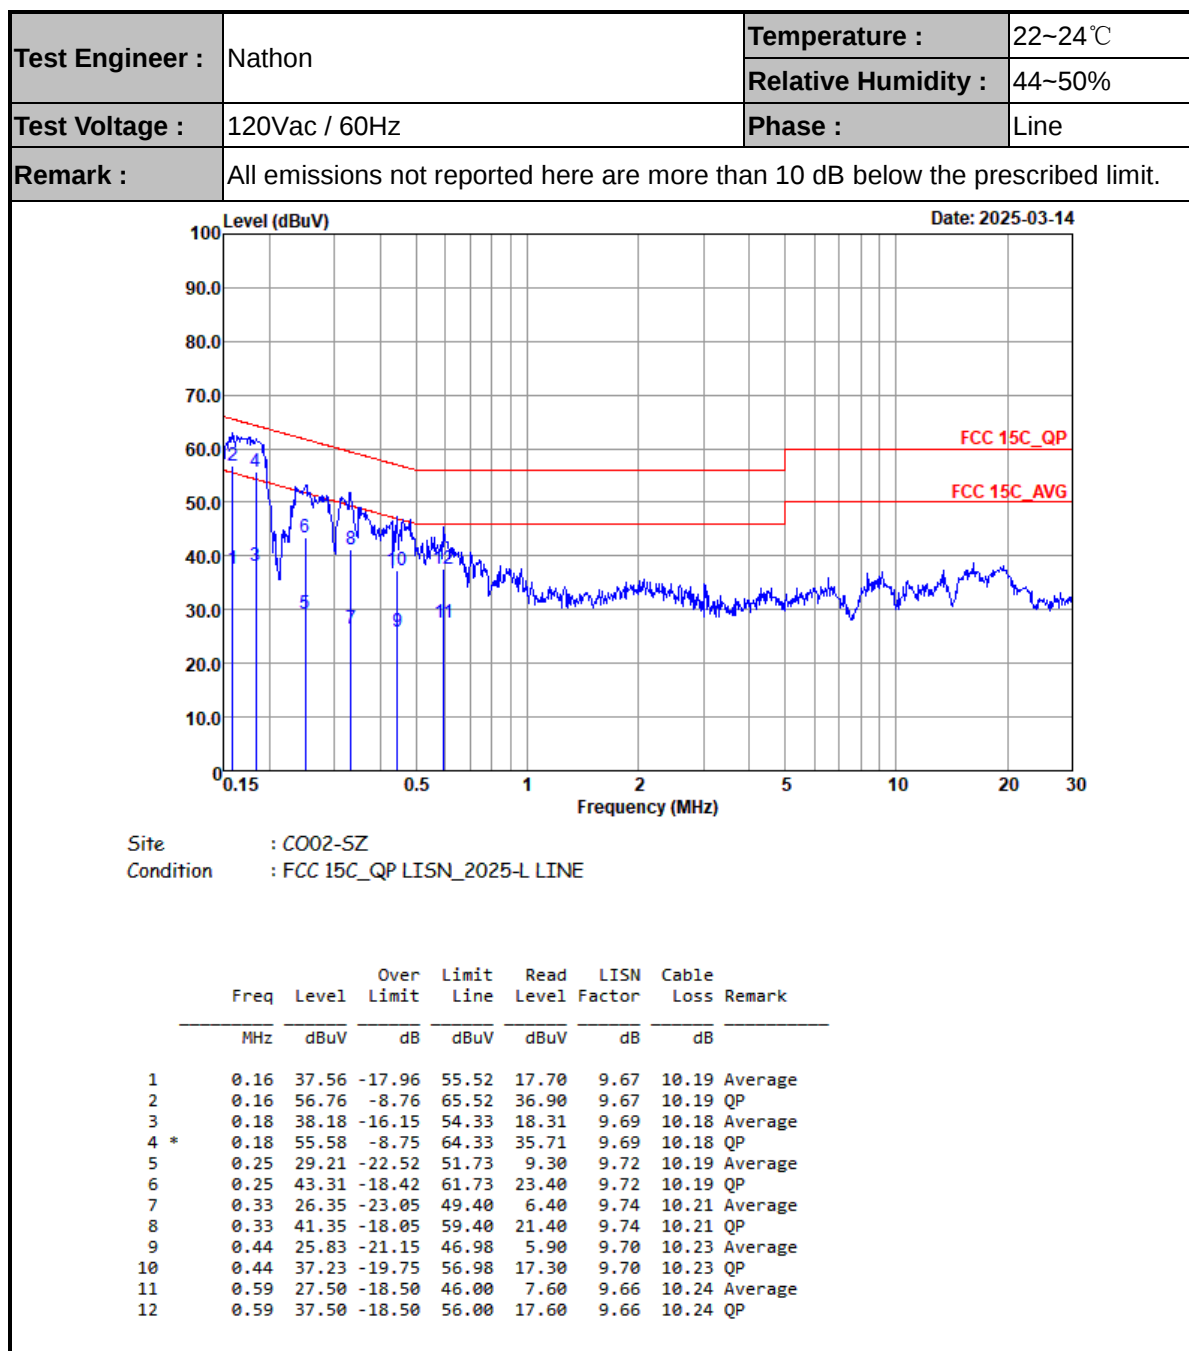

Test Engineer :	Nathon	Temperature :	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

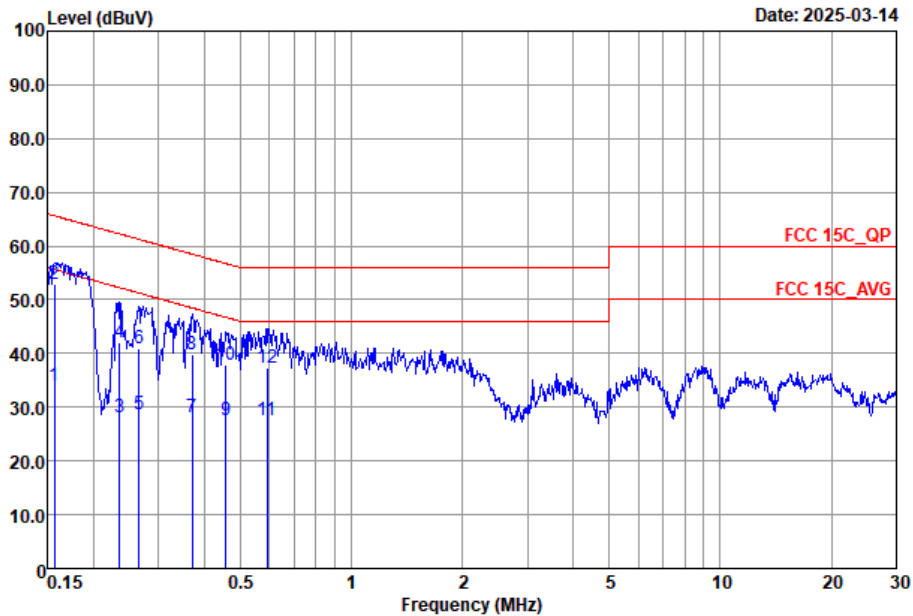

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	34.00	-21.65	55.65	14.19	9.62	10.19	Average
2 *	0.16	52.80	-12.85	65.65	32.99	9.62	10.19	QP
3	0.24	28.21	-24.05	52.26	8.40	9.62	10.19	Average
4	0.24	42.11	-20.15	62.26	22.30	9.62	10.19	QP
5	0.27	28.64	-22.61	51.25	8.80	9.64	10.20	Average
6	0.27	40.84	-20.41	61.25	21.00	9.64	10.20	QP
7	0.37	28.22	-20.25	48.47	8.30	9.70	10.22	Average
8	0.37	39.92	-18.55	58.47	20.00	9.70	10.22	QP
9	0.46	27.62	-19.14	46.76	7.41	9.98	10.23	Average
10	0.46	37.82	-18.94	56.76	17.61	9.98	10.23	QP
11	0.59	27.47	-18.53	46.00	7.59	9.64	10.24	Average
12	0.59	37.27	-18.73	56.00	17.39	9.64	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20°C~22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	12	Bluetooth-LE_GSKF	00	2402	125kbps	-	-
Mode 2	2400-2483.5	12	Bluetooth-LE_GSKF	19	2440	125kbps	-	-
Mode 3	2400-2483.5	12	Bluetooth-LE_GSKF	39	2480	125kbps	-	-
Mode 4	2400-2483.5	12	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	12	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	12	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	12	Bluetooth-LE_GSKF-LF	01	2404	2Mbps	-	LF

For Co-location mode:

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 8	CO_TX	12	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
		1	LTE B13 Link					-
Mode 9	CO_TX	7	802.11ax HE20	11	2462	MCS0	FULL	-
		12	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
		1	LTE B13 Link					-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	00	2389.80	33.38	54.00	-20.62	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	45.31	74.00	-28.69	H	Peak	Pass	Harmonic
2	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	45.67	74.00	-28.33	H	Peak	Pass	Harmonic
3	Bluetooth-LE_GSFK	39	2483.52	36.05	54.00	-17.95	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	45.80	74.00	-28.20	H	Peak	Pass	Harmonic
4	Bluetooth-LE_GSFK	01	2363.34	37.28	54.00	-16.72	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	01	4808.00	44.52	74.00	-29.48	V	Peak	Pass	Harmonic
5	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	43.75	74.00	-30.25	V	Peak	Pass	Harmonic
6	Bluetooth-LE_GSFK	38	2484.97	37.16	54.00	-16.84	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	38	7434.00	43.73	74.00	-30.27	V	Peak	Pass	Harmonic
7	Bluetooth-LE_GSFK-LF	01	39.70	27.02	40.00	-12.98	V	Peak	Pass	LF
8	CO_TX	-	2354.42	35.99	54.00	-18.01	V	Average	Pass	Band Edge
	CO_TX	-	4808.00	43.11	74.00	-30.89	H	PEAK	PASS	Harmonic
9	CO_TX	-	2484.08	47.63	54.00	-6.37	H	Average	Pass	Band Edge
	CO_TX	-	7386.00	44.52	74.00	-29.48	V	Peak	Pass	Harmonic





Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																			
ANT	12																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2344.23</td><td>43.84</td><td>74.00</td><td>-30.16</td><td>41.91</td><td>30.77</td><td>5.32</td><td>34.16</td><td>275</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2344.23	43.84	74.00	-30.16	41.91	30.77	5.32	34.16	275	0 PEAK	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>104.61</td><td>-----</td><td>-----</td><td>102.60</td><td>30.78</td><td>5.37</td><td>34.14</td><td>275</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.61	-----	-----	102.60	30.78	5.37	34.14	275	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2344.23	43.84	74.00	-30.16	41.91	30.77	5.32	34.16	275	0 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	104.61	-----	-----	102.60	30.78	5.37	34.14	275	0 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.80</td><td>33.38</td><td>54.00</td><td>-20.62</td><td>31.38</td><td>30.78</td><td>5.36</td><td>34.14</td><td>275</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.80	33.38	54.00	-20.62	31.38	30.78	5.36	34.14	275	0 AVERAGE	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>103.33</td><td>-----</td><td>-----</td><td>101.32</td><td>30.78</td><td>5.37</td><td>34.14</td><td>275</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.33	-----	-----	101.32	30.78	5.37	34.14	275	0 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.80	33.38	54.00	-20.62	31.38	30.78	5.36	34.14	275	0 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	103.33	-----	-----	101.32	30.78	5.37	34.14	275	0 AVERAGE																																																																										



Mode	1																																									
	Band Edge																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																									
ANT	12																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-03-23 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2319.45</td><td>43.81</td><td>74.00</td><td>-30.19</td><td>41.92</td><td>30.76</td><td>5.30</td><td>34.17</td><td>348</td><td>108 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2319.45	43.81	74.00	-30.19	41.92	30.76	5.30	34.17	348	108 PEAK	Level (dBuV/m) Date: 2025-03-23 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2402.00</td><td>99.21</td><td>-----</td><td>-----</td><td>97.20</td><td>30.78</td><td>5.37</td><td>34.14</td><td>348</td><td>108 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2402.00	99.21	-----	-----	97.20	30.78	5.37	34.14	348	108 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2319.45	43.81	74.00	-30.19	41.92	30.76	5.30	34.17	348	108 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2402.00	99.21	-----	-----	97.20	30.78	5.37	34.14	348	108 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-03-23 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2360.09</td><td>33.08</td><td>54.00</td><td>-20.92</td><td>31.14</td><td>30.77</td><td>5.33</td><td>34.16</td><td>348</td><td>108 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2360.09	33.08	54.00	-20.92	31.14	30.77	5.33	34.16	348	108 AVERAGE	Level (dBuV/m) Date: 2025-03-23 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2402.00</td><td>97.81</td><td>-----</td><td>-----</td><td>95.80</td><td>30.78</td><td>5.37</td><td>34.14</td><td>348</td><td>108 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2402.00	97.81	-----	-----	95.80	30.78	5.37	34.14	348	108 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2360.09	33.08	54.00	-20.92	31.14	30.77	5.33	34.16	348	108 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2402.00	97.81	-----	-----	95.80	30.78	5.37	34.14	348	108 AVERAGE																																	

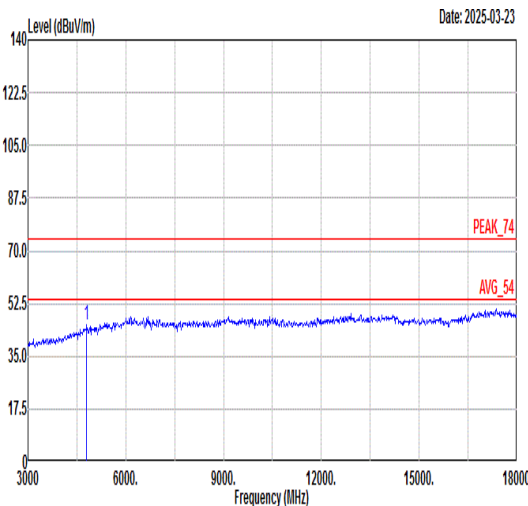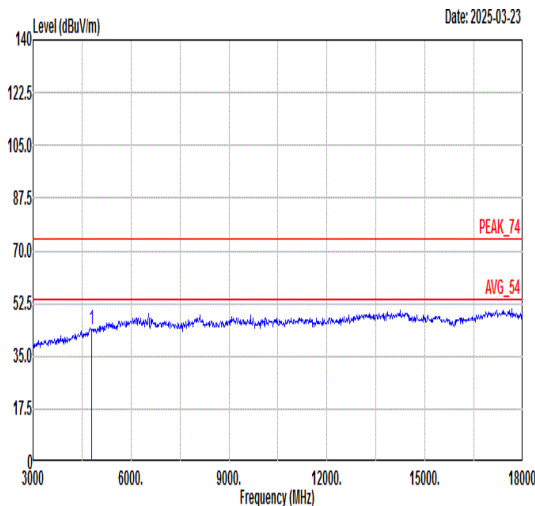

Mode	1																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																											
ANT	12																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>64.82</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	45.31	74.00	-28.69	64.82	36.39	8.94	64.84	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>43.72</td><td>74.00</td><td>-30.28</td><td>63.23</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	43.72	74.00	-30.28	63.23	36.39	8.94	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4804.00	45.31	74.00	-28.69	64.82	36.39	8.94	64.84	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4804.00	43.72	74.00	-30.28	63.23	36.39	8.94	64.84	---	---	Peak																																																																																	



Mode	2																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																											
ANT	12																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz)						Level (dBuV/m) Date: 2025-03-23 Frequency (MHz)																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>43.95</td><td>74.00</td><td>-30.05</td><td>63.55</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>63.61</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	43.95	74.00	-30.05	63.55	36.51	8.71	64.82	---	---	Peak	2	7320.00	45.67	74.00	-28.33	63.61	36.88	10.18	65.00	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>63.71</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.44</td><td>74.00</td><td>-28.56</td><td>63.38</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	44.11	74.00	-29.89	63.71	36.51	8.71	64.82	---	---	Peak	2	7320.00	45.44	74.00	-28.56	63.38	36.88	10.18	65.00	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4880.00	43.95	74.00	-30.05	63.55	36.51	8.71	64.82	---	---	Peak																																																																																																	
2	7320.00	45.67	74.00	-28.33	63.61	36.88	10.18	65.00	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4880.00	44.11	74.00	-29.89	63.71	36.51	8.71	64.82	---	---	Peak																																																																																																	
2	7320.00	45.44	74.00	-28.56	63.38	36.88	10.18	65.00	---	---	Peak																																																																																																	



Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																									
ANT	12																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.62</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>44.40</td><td>30.80</td><td>5.46</td><td>34.11</td><td>202 33 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.62	46.55	74.00	-27.45	44.40	30.80	5.46	34.11	202 33 PEAK	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>104.74</td><td>-----</td><td>-----</td><td>102.59</td><td>30.80</td><td>5.46</td><td>34.11</td><td>202 33 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	104.74	-----	-----	102.59	30.80	5.46	34.11	202 33 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2483.62	46.55	74.00	-27.45	44.40	30.80	5.46	34.11	202 33 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	104.74	-----	-----	102.59	30.80	5.46	34.11	202 33 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.52</td><td>36.05</td><td>54.00</td><td>-17.95</td><td>33.90</td><td>30.80</td><td>5.46</td><td>34.11</td><td>202 33 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.52	36.05	54.00	-17.95	33.90	30.80	5.46	34.11	202 33 AVERAGE	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>103.45</td><td>-----</td><td>-----</td><td>101.30</td><td>30.80</td><td>5.46</td><td>34.11</td><td>202 33 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	103.45	-----	-----	101.30	30.80	5.46	34.11	202 33 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2483.52	36.05	54.00	-17.95	33.90	30.80	5.46	34.11	202 33 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	103.45	-----	-----	101.30	30.80	5.46	34.11	202 33 AVERAGE																																																																		



Mode	3																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																								
ANT	12																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-03-23 PEAK_BE_74					Level (dBuV/m) Date: 2025-03-23 PEAK_74																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2484.34</td><td>45.05</td><td>74.00</td><td>-28.95</td><td>42.90</td><td>30.80</td><td>5.46</td><td>34.11</td><td>348</td><td>108 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2484.34	45.05	74.00	-28.95	42.90	30.80	5.46	34.11	348	108 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>102.11</td><td>-----</td><td>-----</td><td>99.96</td><td>30.80</td><td>5.46</td><td>34.11</td><td>348</td><td>108 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	102.11	-----	-----	99.96	30.80	5.46	34.11	348
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2484.34	45.05	74.00	-28.95	42.90	30.80	5.46	34.11	348	108 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2480.00	102.11	-----	-----	99.96	30.80	5.46	34.11	348	108 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-03-23 AVG_BE_54					Level (dBuV/m) Date: 2025-03-23 AVG_54																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.84</td><td>35.23</td><td>54.00</td><td>-18.77</td><td>33.08</td><td>30.80</td><td>5.46</td><td>34.11</td><td>348</td><td>108 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.84	35.23	54.00	-18.77	33.08	30.80	5.46	34.11	348	108 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>100.83</td><td>-----</td><td>-----</td><td>98.68</td><td>30.80</td><td>5.46</td><td>34.11</td><td>348</td><td>108 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	100.83	-----	-----	98.68	30.80	5.46	34.11	348
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2483.84	35.23	54.00	-18.77	33.08	30.80	5.46	34.11	348	108 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2480.00	100.83	-----	-----	98.68	30.80	5.46	34.11	348	108 AVERAGE																																																																																



Mode	3																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																															
ANT	12																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-03-23 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>44.15</td><td>74.00</td><td>-29.85</td><td>63.86</td><td>36.64</td><td>8.46 64.81</td></tr><tr><td>2</td><td>7440.00</td><td>45.80</td><td>74.00</td><td>-28.20</td><td>63.84</td><td>36.76</td><td>10.17 64.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	44.15	74.00	-29.85	63.86	36.64	8.46 64.81	2	7440.00	45.80	74.00	-28.20	63.84	36.76	10.17 64.97	Level (dBuV/m) Date: 2025-03-23 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>43.59</td><td>74.00</td><td>-30.41</td><td>63.30</td><td>36.64</td><td>8.46 64.81</td></tr><tr><td>2</td><td>7440.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>63.83</td><td>36.76</td><td>10.17 64.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	43.59	74.00	-30.41	63.30	36.64	8.46 64.81	2	7440.00	45.79	74.00	-28.21	63.83	36.76	10.17 64.97
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	44.15	74.00	-29.85	63.86	36.64	8.46 64.81																																																																																									
2	7440.00	45.80	74.00	-28.20	63.84	36.76	10.17 64.97																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	43.59	74.00	-30.41	63.30	36.64	8.46 64.81																																																																																									
2	7440.00	45.79	74.00	-28.21	63.83	36.76	10.17 64.97																																																																																									





Mode	4																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																							
ANT	12																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2359.14</td><td>43.77</td><td>74.00</td><td>-30.23</td><td>41.83</td><td>30.77</td><td>5.33</td><td>34.16</td><td>300</td><td>7 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2359.14	43.77	74.00	-30.23	41.83	30.77	5.33	34.16	300	7 PEAK	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>104.60</td><td>-----</td><td>-----</td><td>102.59</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>7 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	104.60	-----	-----	102.59	30.78	5.37	34.14	300	7 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2359.14	43.77	74.00	-30.23	41.83	30.77	5.33	34.16	300	7 PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2404.00	104.60	-----	-----	102.59	30.78	5.37	34.14	300	7 PEAK																																																																														
Avg	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.34</td><td>37.28</td><td>54.00</td><td>-16.72</td><td>35.32</td><td>30.77</td><td>5.34</td><td>34.15</td><td>300</td><td>7 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2363.34	37.28	54.00	-16.72	35.32	30.77	5.34	34.15	300	7 AVERAGE	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>102.65</td><td>-----</td><td>-----</td><td>100.64</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>7 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	102.65	-----	-----	100.64	30.78	5.37	34.14	300	7 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2363.34	37.28	54.00	-16.72	35.32	30.77	5.34	34.15	300	7 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2404.00	102.65	-----	-----	100.64	30.78	5.37	34.14	300	7 AVERAGE																																																																														





Mode	4																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																											
ANT	12																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.39</td><td>43.76</td><td>74.00</td><td>-30.24</td><td>41.80</td><td>30.77</td><td>5.34</td><td>34.15</td><td>300</td><td>88</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2364.39	43.76	74.00	-30.24	41.80	30.77	5.34	34.15	300	88	PEAK	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>103.02</td><td>-----</td><td>-----</td><td>101.01</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>88</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	103.02	-----	-----	101.01	30.78	5.37	34.14	300	88	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2364.39	43.76	74.00	-30.24	41.80	30.77	5.34	34.15	300	88	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2404.00	103.02	-----	-----	101.01	30.78	5.37	34.14	300	88	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2344.23</td><td>35.39</td><td>54.00</td><td>-18.61</td><td>33.46</td><td>30.77</td><td>5.32</td><td>34.16</td><td>300</td><td>88</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2344.23	35.39	54.00	-18.61	33.46	30.77	5.32	34.16	300	88	AVERAGE	Level (dBuV/m) Date: 2025-03-23 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>101.12</td><td>-----</td><td>-----</td><td>99.11</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>88</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	101.12	-----	-----	99.11	30.78	5.37	34.14	300	88	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2344.23	35.39	54.00	-18.61	33.46	30.77	5.32	34.16	300	88	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2404.00	101.12	-----	-----	99.11	30.78	5.37	34.14	300	88	AVERAGE																																																																																	



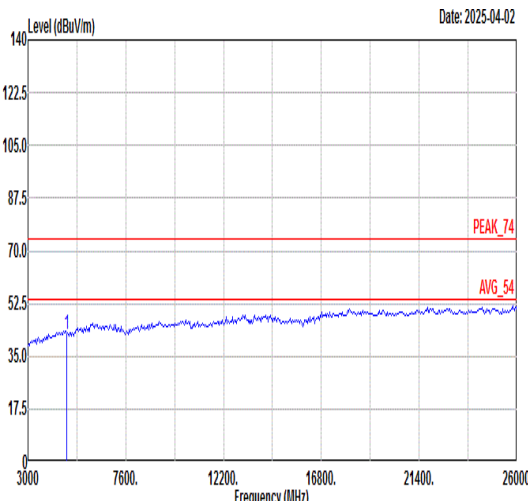
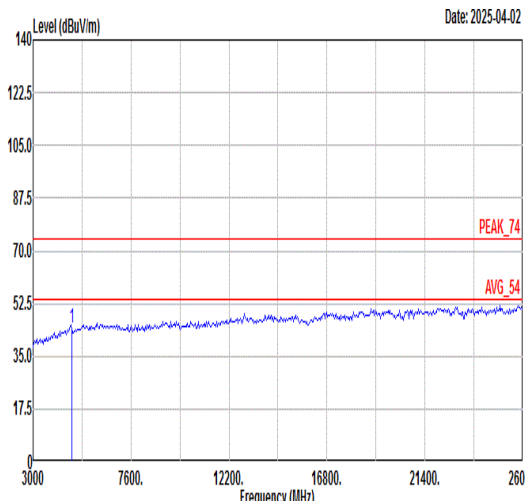


Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																											
ANT	12																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>42.24</td><td>74.00</td><td>-31.76</td><td>61.77</td><td>36.39</td><td>8.92</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4808.00	42.24	74.00	-31.76	61.77	36.39	8.92	64.84	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>64.05</td><td>36.39</td><td>8.92</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4808.00	44.52	74.00	-29.48	64.05	36.39	8.92	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4808.00	42.24	74.00	-31.76	61.77	36.39	8.92	64.84	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4808.00	44.52	74.00	-29.48	64.05	36.39	8.92	64.84	---	---	Peak																																																																																	



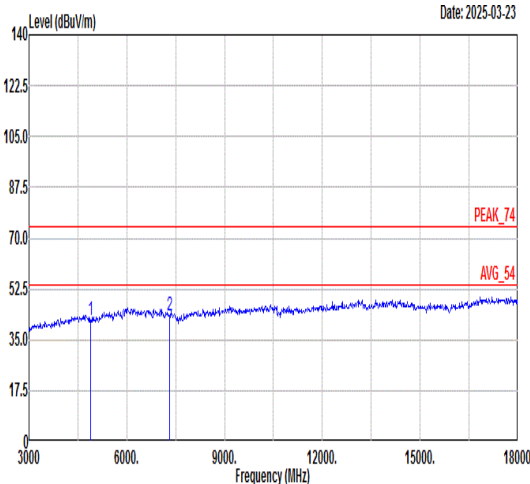
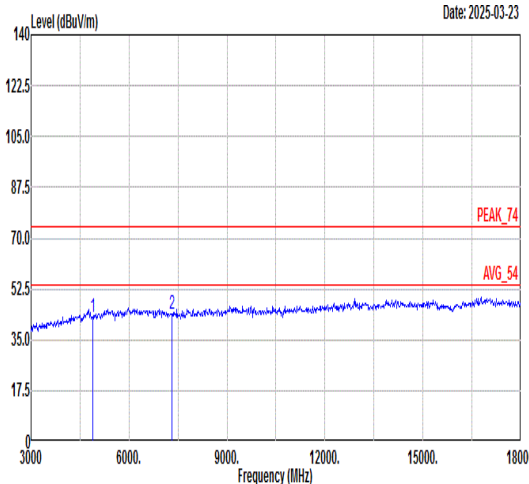


Mode	5																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																															
ANT	12																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.79</td><td>74.00</td><td>-32.21</td><td>61.39</td><td>36.51</td><td>8.71</td></tr><tr><td>2</td><td>7320.00</td><td>43.38</td><td>74.00</td><td>-30.62</td><td>61.32</td><td>36.88</td><td>10.18</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	41.79	74.00	-32.21	61.39	36.51	8.71	2	7320.00	43.38	74.00	-30.62	61.32	36.88	10.18	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>42.91</td><td>74.00</td><td>-31.09</td><td>62.51</td><td>36.51</td><td>8.71</td></tr><tr><td>2</td><td>7320.00</td><td>43.75</td><td>74.00</td><td>-30.25</td><td>61.69</td><td>36.88</td><td>10.18</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	42.91	74.00	-31.09	62.51	36.51	8.71	2	7320.00	43.75	74.00	-30.25	61.69	36.88	10.18
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4880.00	41.79	74.00	-32.21	61.39	36.51	8.71																																																																																									
2	7320.00	43.38	74.00	-30.62	61.32	36.88	10.18																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	4880.00	42.91	74.00	-31.09	62.51	36.51	8.71																																																																																									
2	7320.00	43.75	74.00	-30.25	61.69	36.88	10.18																																																																																									
<table><thead><tr><th></th><th>cm</th><th>deg</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>									cm	deg	Remark	1	---	---	Peak	2	---	---	Peak	<table><thead><tr><th></th><th>cm</th><th>deg</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>									cm	deg	Remark	1	---	---	Peak	2	---	---	Peak																																																									
	cm	deg	Remark																																																																																													
1	---	---	Peak																																																																																													
2	---	---	Peak																																																																																													
	cm	deg	Remark																																																																																													
1	---	---	Peak																																																																																													
2	---	---	Peak																																																																																													

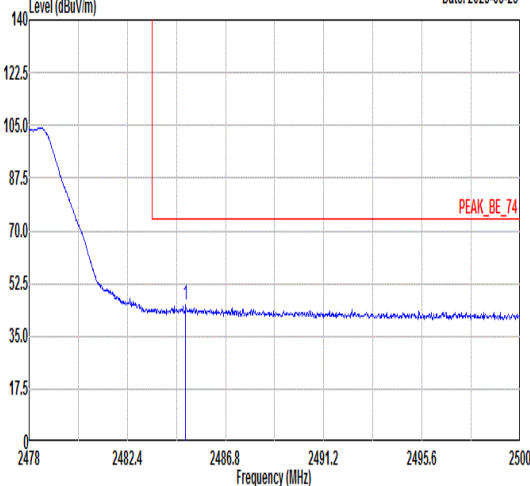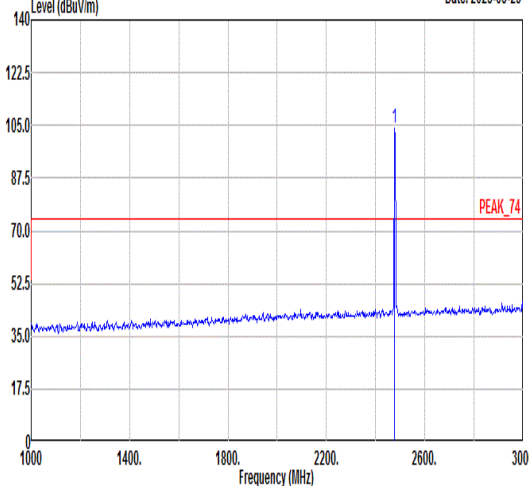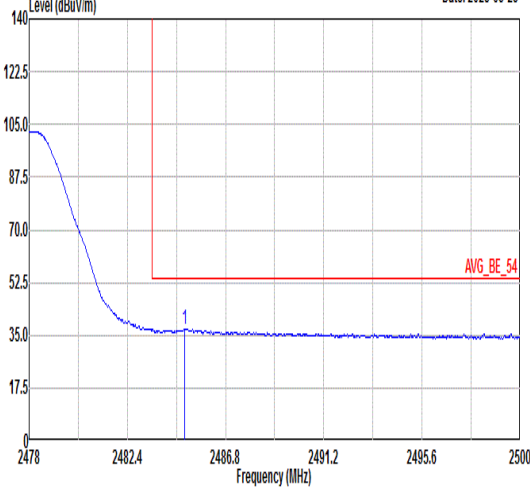
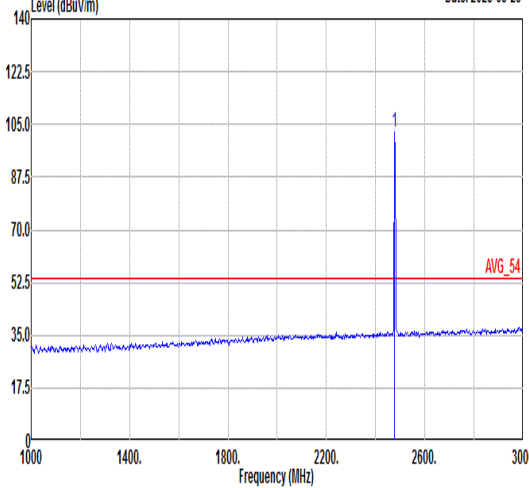


Mode	6									
	Band Edge									
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz									
ANT	12									
Pol.	Horizontal					Fundamental				
Peak	Level (dBuV/m) Date: 2025-03-23  PEAK_BE_74 Freq Level Limit Margin Read Ant Cable Preamp APos TPos Remark MHz dBuV/m dBuV/m (dB) dBuV dB/m dB dB cm deg 1 2485.02 45.39 74.00 -28.61 43.24 30.80 5.46 34.11 206 0 PEAK					Level (dBuV/m) Date: 2025-03-23  PEAK_74 Freq Level Limit Margin Read Ant Cable Preamp APos TPos Remark MHz dBuV/m dBuV/m (dB) dBuV dB/m dB dB cm deg 1 2478.00 104.32 ----- 102.18 30.80 5.45 34.11 206 0 PEAK				
	Level (dBuV/m) Date: 2025-03-23  AVG_BE_54 Freq Level Limit Margin Read Ant Cable Preamp APos TPos Remark MHz dBuV/m dBuV/m (dB) dBuV dB/m dB dB cm deg 1 2484.97 37.16 54.00 -16.84 35.01 30.80 5.46 34.11 206 0 AVERAGE					Level (dBuV/m) Date: 2025-03-23  AVG_54 Freq Level Limit Margin Read Ant Cable Preamp APos TPos Remark MHz dBuV/m dBuV/m (dB) dBuV dB/m dB dB cm deg 1 2478.00 102.43 ----- 100.29 30.80 5.45 34.11 206 0 AVERAGE				

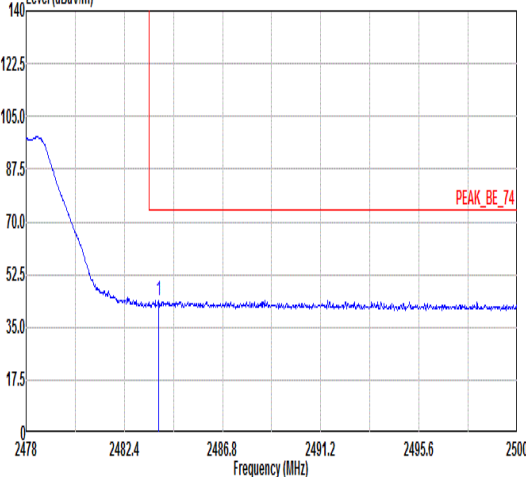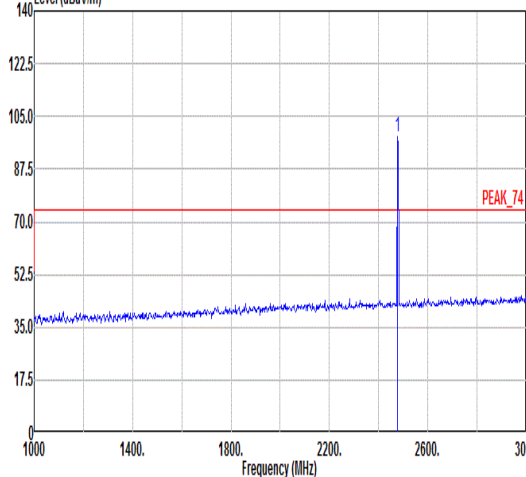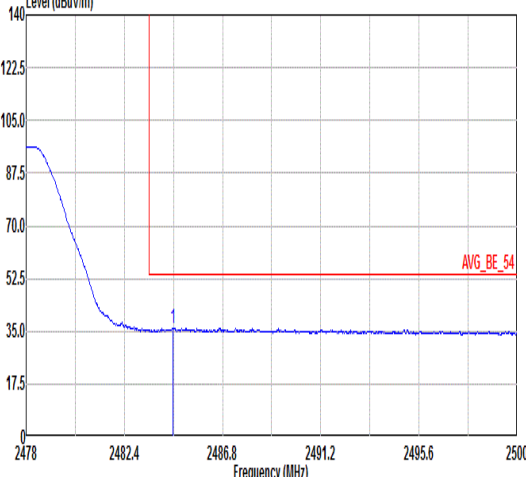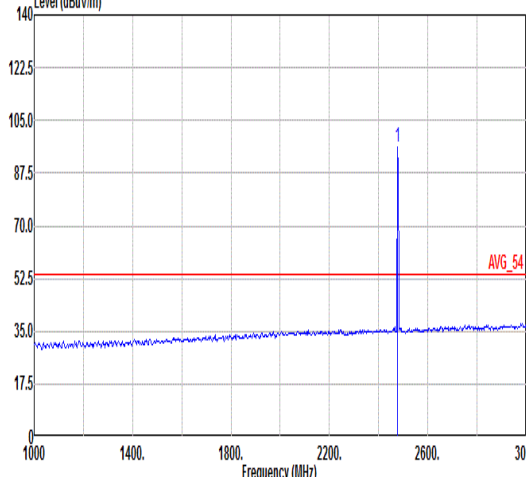

Mode	6																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																											
ANT	12																																																																																											
Pol.	Vertical					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-03-23  PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.94</td><td>43.95</td><td>74.00</td><td>-30.05</td><td>41.80</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>88 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.94	43.95	74.00	-30.05	41.80	30.80	5.46	34.11	300	88 PEAK	Level (dBuV/m) Date: 2025-03-23  PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>98.26</td><td>-----</td><td>-----</td><td>96.12</td><td>30.80</td><td>5.45</td><td>34.11</td><td>300</td><td>88 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	98.26	-----	-----	96.12	30.80	5.45	34.11	300	88 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.94	43.95	74.00	-30.05	41.80	30.80	5.46	34.11	300	88 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2478.00	98.26	-----	-----	96.12	30.80	5.45	34.11	300	88 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-03-23  AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.58</td><td>36.18</td><td>54.00</td><td>-17.82</td><td>34.03</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>88 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.58	36.18	54.00	-17.82	34.03	30.80	5.46	34.11	300	88 AVERAGE	Level (dBuV/m) Date: 2025-03-23  AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>96.25</td><td>-----</td><td>-----</td><td>94.11</td><td>30.80</td><td>5.45</td><td>34.11</td><td>300</td><td>88 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	96.25	-----	-----	94.11	30.80	5.45	34.11	300	88 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2484.58	36.18	54.00	-17.82	34.03	30.80	5.46	34.11	300	88 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2478.00	96.25	-----	-----	94.11	30.80	5.45	34.11	300	88 AVERAGE																																																																																		

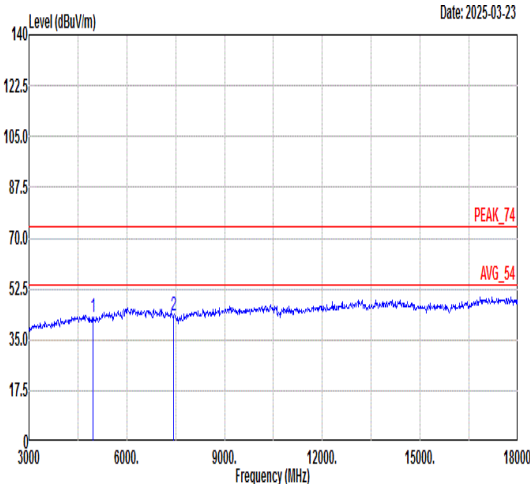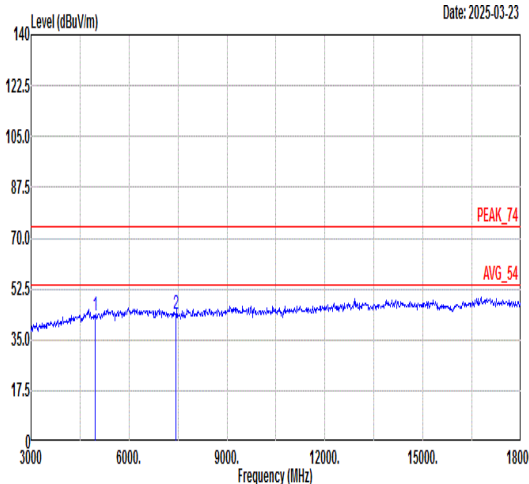





Mode	6																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																											
ANT	12																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak Avg																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>42.58</td><td>74.00</td><td>-31.42</td><td>62.28</td><td>36.63</td><td>8.48</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>61.45</td><td>36.77</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4956.00	42.58	74.00	-31.42	62.28	36.63	8.48	64.81	---	---	Peak	2	7434.00	43.42	74.00	-30.58	61.45	36.77	10.17	64.97	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>63.01</td><td>36.63</td><td>8.48</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>43.73</td><td>74.00</td><td>-30.27</td><td>61.76</td><td>36.77</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4956.00	43.31	74.00	-30.69	63.01	36.63	8.48	64.81	---	---	Peak	2	7434.00	43.73	74.00	-30.27	61.76	36.77	10.17	64.97	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4956.00	42.58	74.00	-31.42	62.28	36.63	8.48	64.81	---	---	Peak																																																																																																	
2	7434.00	43.42	74.00	-30.58	61.45	36.77	10.17	64.97	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4956.00	43.31	74.00	-30.69	63.01	36.63	8.48	64.81	---	---	Peak																																																																																																	
2	7434.00	43.73	74.00	-30.27	61.76	36.77	10.17	64.97	---	---	Peak																																																																																																	







Mode	7																																																																																																																																																																																																									
	LF																																																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF-LF_CH01_2404MHz																																																																																																																																																																																																									
ANT	12																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak	Level (dBuV/m) Date: 2025-03-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>22.10</td><td>40.00</td><td>-17.90</td><td>27.78</td><td>25.29</td><td>0.53</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>155.13</td><td>21.05</td><td>43.50</td><td>-22.45</td><td>34.59</td><td>16.78</td><td>1.27</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>291.90</td><td>28.11</td><td>46.00</td><td>-17.89</td><td>38.61</td><td>19.30</td><td>1.78</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>559.62</td><td>27.31</td><td>46.00</td><td>-18.69</td><td>29.07</td><td>27.02</td><td>2.48</td><td>31.26</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>782.72</td><td>30.01</td><td>46.00</td><td>-15.99</td><td>29.36</td><td>28.81</td><td>2.91</td><td>31.07</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>966.05</td><td>33.71</td><td>54.00</td><td>-20.29</td><td>29.52</td><td>31.73</td><td>3.26</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	22.10	40.00	-17.90	27.78	25.29	0.53	31.50	---	---	Peak	2	155.13	21.05	43.50	-22.45	34.59	16.78	1.27	31.59	---	---	Peak	3	291.90	28.11	46.00	-17.89	38.61	19.30	1.78	31.58	---	---	Peak	4	559.62	27.31	46.00	-18.69	29.07	27.02	2.48	31.26	---	---	Peak	5	782.72	30.01	46.00	-15.99	29.36	28.81	2.91	31.07	---	---	Peak	6	966.05	33.71	54.00	-20.29	29.52	31.73	3.26	30.80	---	---	Peak	Level (dBuV/m) Date: 2025-03-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>39.70</td><td>27.02</td><td>40.00</td><td>-12.98</td><td>37.94</td><td>20.17</td><td>0.61</td><td>31.70</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>158.04</td><td>26.17</td><td>43.50</td><td>-17.33</td><td>39.85</td><td>16.62</td><td>1.28</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>288.02</td><td>25.17</td><td>46.00</td><td>-20.83</td><td>35.84</td><td>19.15</td><td>1.76</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>557.68</td><td>27.10</td><td>46.00</td><td>-18.90</td><td>28.90</td><td>26.99</td><td>2.48</td><td>31.27</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>750.71</td><td>30.00</td><td>46.00</td><td>-16.00</td><td>29.37</td><td>28.78</td><td>2.85</td><td>31.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>981.57</td><td>33.03</td><td>54.00</td><td>-20.97</td><td>29.36</td><td>31.15</td><td>3.28</td><td>30.76</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	39.70	27.02	40.00	-12.98	37.94	20.17	0.61	31.70	---	---	Peak	2	158.04	26.17	43.50	-17.33	39.85	16.62	1.28	31.58	---	---	Peak	3	288.02	25.17	46.00	-20.83	35.84	19.15	1.76	31.58	---	---	Peak	4	557.68	27.10	46.00	-18.90	28.90	26.99	2.48	31.27	---	---	Peak	5	750.71	30.00	46.00	-16.00	29.37	28.78	2.85	31.00	---	---	Peak	6	981.57	33.03	54.00	-20.97	29.36	31.15	3.28	30.76	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	30.00	22.10	40.00	-17.90	27.78	25.29	0.53	31.50	---	---	Peak																																																																																																																																																																																															
2	155.13	21.05	43.50	-22.45	34.59	16.78	1.27	31.59	---	---	Peak																																																																																																																																																																																															
3	291.90	28.11	46.00	-17.89	38.61	19.30	1.78	31.58	---	---	Peak																																																																																																																																																																																															
4	559.62	27.31	46.00	-18.69	29.07	27.02	2.48	31.26	---	---	Peak																																																																																																																																																																																															
5	782.72	30.01	46.00	-15.99	29.36	28.81	2.91	31.07	---	---	Peak																																																																																																																																																																																															
6	966.05	33.71	54.00	-20.29	29.52	31.73	3.26	30.80	---	---	Peak																																																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	39.70	27.02	40.00	-12.98	37.94	20.17	0.61	31.70	---	---	Peak																																																																																																																																																																																															
2	158.04	26.17	43.50	-17.33	39.85	16.62	1.28	31.58	---	---	Peak																																																																																																																																																																																															
3	288.02	25.17	46.00	-20.83	35.84	19.15	1.76	31.58	---	---	Peak																																																																																																																																																																																															
4	557.68	27.10	46.00	-18.90	28.90	26.99	2.48	31.27	---	---	Peak																																																																																																																																																																																															
5	750.71	30.00	46.00	-16.00	29.37	28.78	2.85	31.00	---	---	Peak																																																																																																																																																																																															
6	981.57	33.03	54.00	-20.97	29.36	31.15	3.28	30.76	---	---	Peak																																																																																																																																																																																															



For Co-location mode:

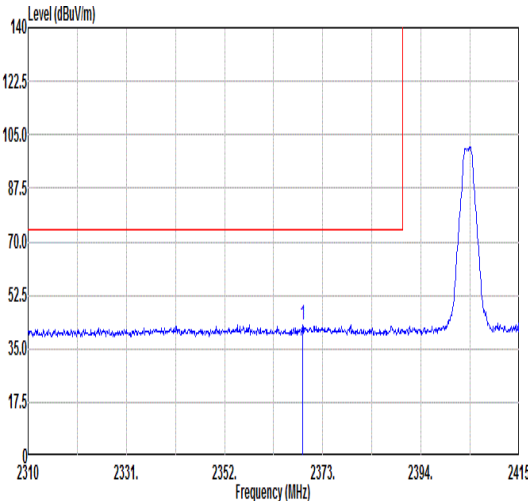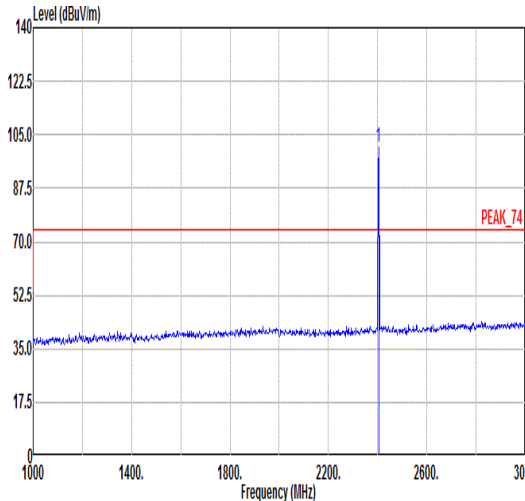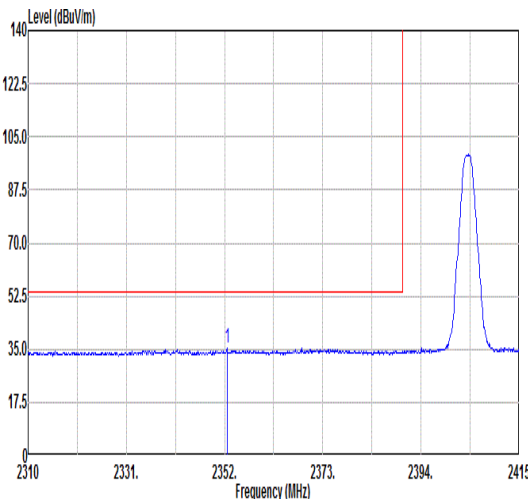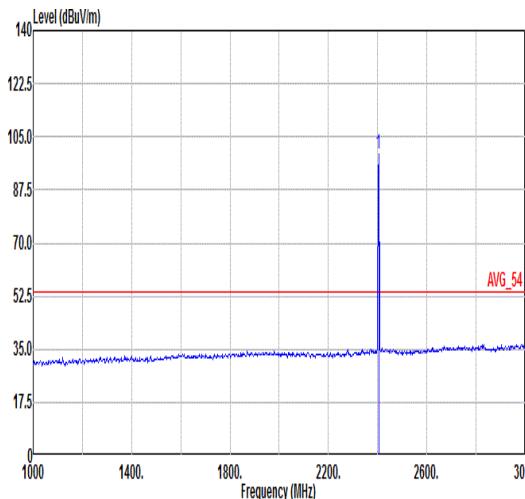Mode	8																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz+LTE B13 Link CO_TX																																																																																									
ANT	12																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2368.70</td><td>42.98</td><td>74.00</td><td>-31.02</td><td>41.02</td><td>30.77</td><td>5.34</td><td>34.15</td><td>349</td><td>0</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2368.70	42.98	74.00	-31.02	41.02	30.77	5.34	34.15	349	0	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>100.87</td><td>-----</td><td>-----</td><td>98.86</td><td>30.78</td><td>5.37</td><td>34.14</td><td>349</td><td>0</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	100.87	-----	-----	98.86	30.78	5.37	34.14	349	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2368.70	42.98	74.00	-31.02	41.02	30.77	5.34	34.15	349	0	Peak																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2404.00	100.87	-----	-----	98.86	30.78	5.37	34.14	349	0	Peak																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2352.53</td><td>35.51</td><td>54.00</td><td>-18.49</td><td>33.57</td><td>30.77</td><td>5.33</td><td>34.16</td><td>349</td><td>0</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2352.53	35.51	54.00	-18.49	33.57	30.77	5.33	34.16	349	0	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>99.07</td><td>-----</td><td>-----</td><td>97.06</td><td>30.78</td><td>5.37</td><td>34.14</td><td>349</td><td>0</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	99.07	-----	-----	97.06	30.78	5.37	34.14	349	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2352.53	35.51	54.00	-18.49	33.57	30.77	5.33	34.16	349	0	Average																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2404.00	99.07	-----	-----	97.06	30.78	5.37	34.14	349	0	Average																																																																															

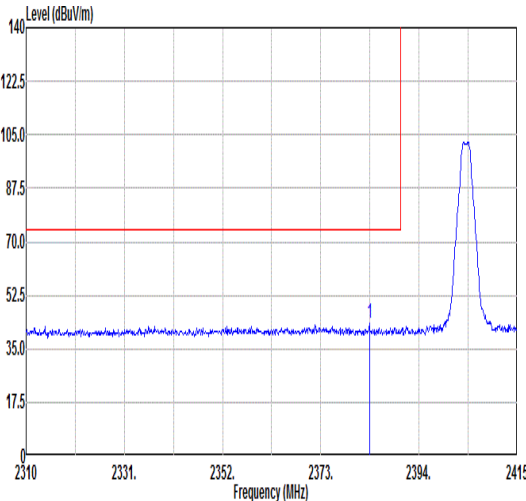
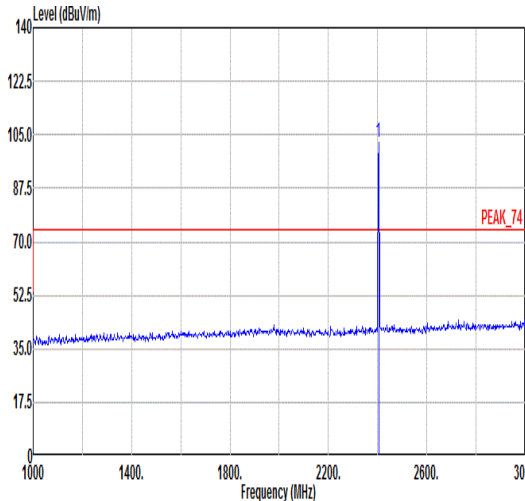
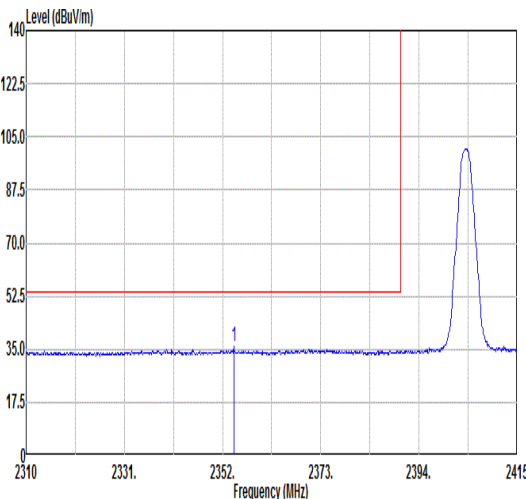
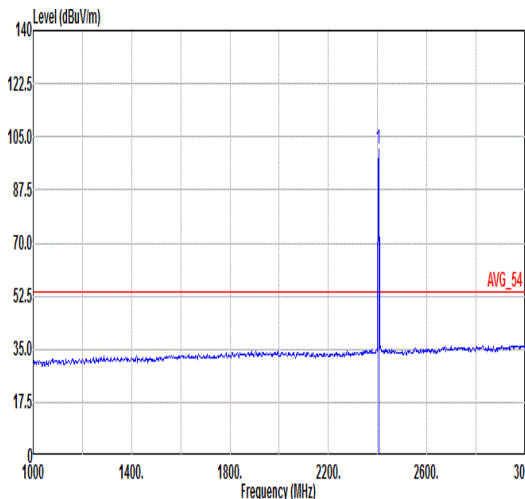


Mode	8																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz+LTE B13 Link CO_TX																																																																																								
ANT	12																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2383.40</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>41.10</td><td>30.78</td><td>5.35</td><td>34.15</td><td>359</td><td>64</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2383.40	43.08	74.00	-30.92	41.10	30.78	5.35	34.15	359	64	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>102.56</td><td>-----</td><td>-----</td><td>100.55</td><td>30.78</td><td>5.37</td><td>34.14</td><td>359</td><td>64</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2404.00	102.56	-----	-----	100.55	30.78	5.37	34.14	359	64
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2383.40	43.08	74.00	-30.92	41.10	30.78	5.35	34.15	359	64	Peak																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2404.00	102.56	-----	-----	100.55	30.78	5.37	34.14	359	64	Peak																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2354.42</td><td>35.99</td><td>54.00</td><td>-18.01</td><td>34.05</td><td>30.77</td><td>5.33</td><td>34.16</td><td>359</td><td>64</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2354.42	35.99	54.00	-18.01	34.05	30.77	5.33	34.16	359	64	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>100.81</td><td>-----</td><td>-----</td><td>98.80</td><td>30.78</td><td>5.37</td><td>34.14</td><td>359</td><td>64</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	2404.00	100.81	-----	-----	98.80	30.78	5.37	34.14	359	64
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2354.42	35.99	54.00	-18.01	34.05	30.77	5.33	34.16	359	64	Average																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																		
1	2404.00	100.81	-----	-----	98.80	30.78	5.37	34.14	359	64	Average																																																																														







Mode	8											
	Harmonic											
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz+LTE B13 Link CO_TX											
ANT	12											
Pol.	Horizontal						Vertical					
Peak Avg	Data: 1 Level (dBuV/m)											

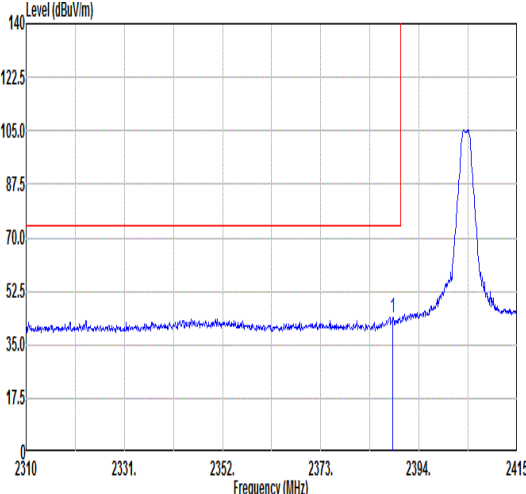
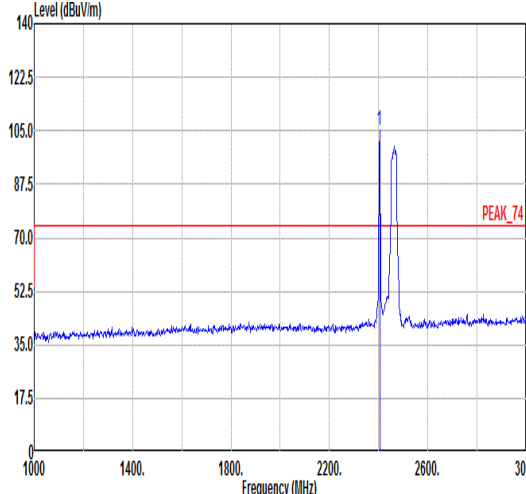
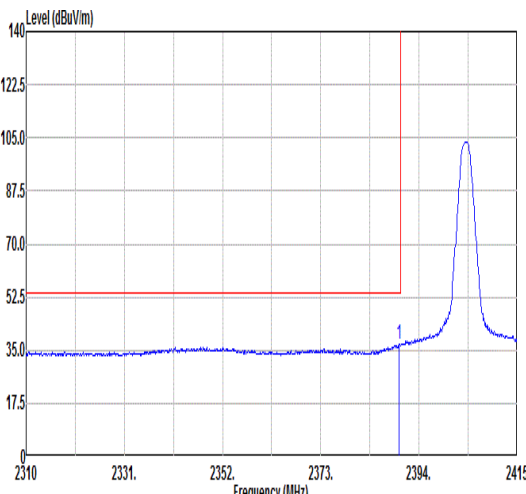
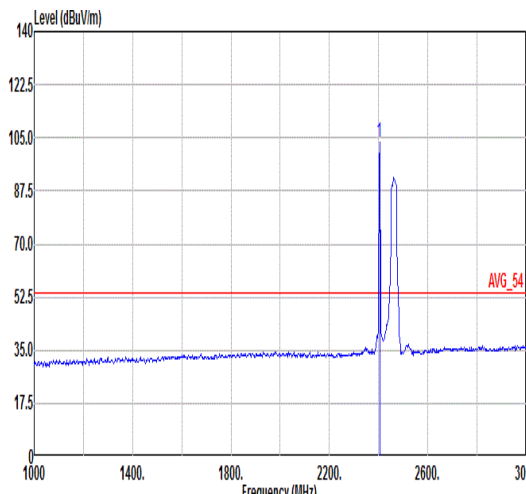


Mode	9																																																																																													
	Band Edge																																																																																													
	2400-2483.5_802.11ax HE20_CH11_2462MHz+BLE 2M CH01 +LTE B13 Link CO_TX																																																																																													
ANT	CDD 12+7																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.44</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>41.85</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>117</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2388.44	43.85	74.00	-30.15	41.85	30.78	5.36	34.14	100	117	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>105.18</td><td>-----</td><td>-----</td><td>103.17</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>117</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	105.18	-----	-----	103.17	30.78	5.37	34.14	100	117
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2388.44	43.85	74.00	-30.15	41.85	30.78	5.36	34.14	100	117	Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2404.00	105.18	-----	-----	103.17	30.78	5.37	34.14	100	117	Peak																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.80</td><td>36.90</td><td>54.00</td><td>-17.10</td><td>34.90</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>117</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.80	36.90	54.00	-17.10	34.90	30.78	5.36	34.14	100	117	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>103.51</td><td>-----</td><td>-----</td><td>101.50</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>117</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	103.51	-----	-----	101.50	30.78	5.37	34.14	100	117
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.80	36.90	54.00	-17.10	34.90	30.78	5.36	34.14	100	117	Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2404.00	103.51	-----	-----	101.50	30.78	5.37	34.14	100	117	Average																																																																																			

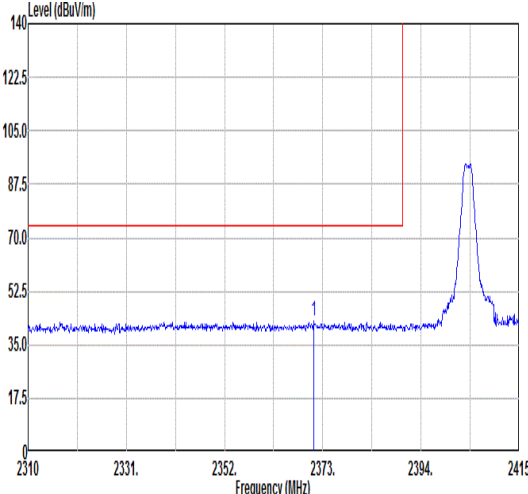
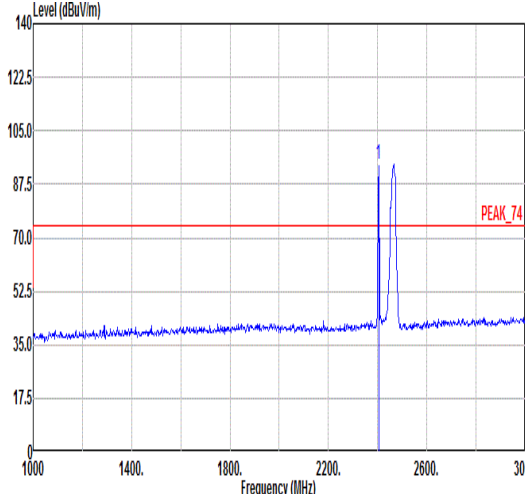
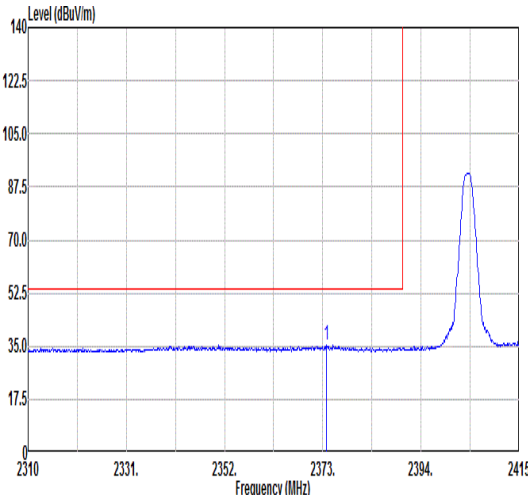
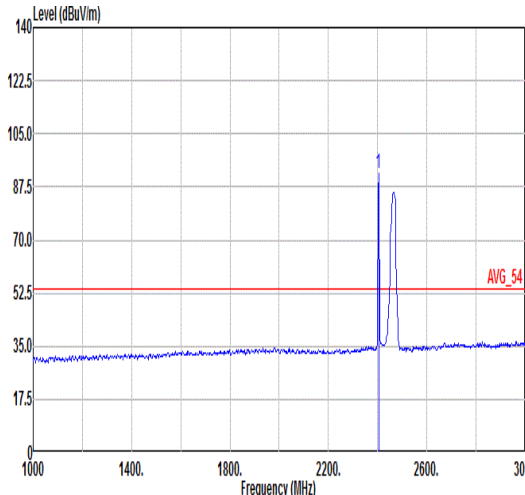


		9																																																																																																		
Mode		Band Edge																																																																																																		
		2400-2483.5_802.11ax HE20_CH11_2462MHz+BLE 2M CH01 +LTE B13 Link CO_TX																																																																																																		
ANT		CDD 12+7																																																																																																		
Pol.		Vertical					Fundamental																																																																																													
Peak																																																																																																				
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2371.01</td><td>42.65</td><td>74.00</td><td>-31.35</td><td>40.69</td><td>30.77</td><td>5.34</td><td>34.15</td><td>103</td><td>307</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2371.01	42.65	74.00	-31.35	40.69	30.77	5.34	34.15	103	307	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>93.95</td><td>-----</td><td>-----</td><td>91.94</td><td>30.78</td><td>5.37</td><td>34.14</td><td>103</td><td>307</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	93.95	-----	-----	91.94	30.78	5.37	34.14	103	307
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2371.01	42.65	74.00	-31.35	40.69	30.77	5.34	34.15	103	307	Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2404.00	93.95	-----	-----	91.94	30.78	5.37	34.14	103	307	Peak																																																																																									
Avg																																																																																																				
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.74</td><td>35.48</td><td>54.00</td><td>-18.52</td><td>33.51</td><td>30.77</td><td>5.35</td><td>34.15</td><td>103</td><td>307</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.74	35.48	54.00	-18.52	33.51	30.77	5.35	34.15	103	307	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>91.97</td><td>-----</td><td>-----</td><td>89.96</td><td>30.78</td><td>5.37</td><td>34.14</td><td>103</td><td>307</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	91.97	-----	-----	89.96	30.78	5.37	34.14	103	307
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2373.74	35.48	54.00	-18.52	33.51	30.77	5.35	34.15	103	307	Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2404.00	91.97	-----	-----	89.96	30.78	5.37	34.14	103	307	Average																																																																																									

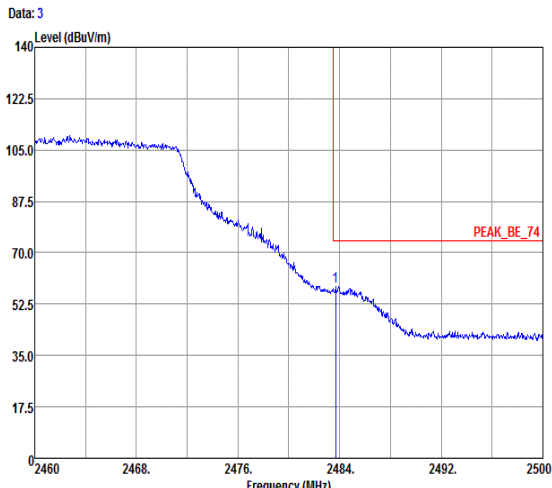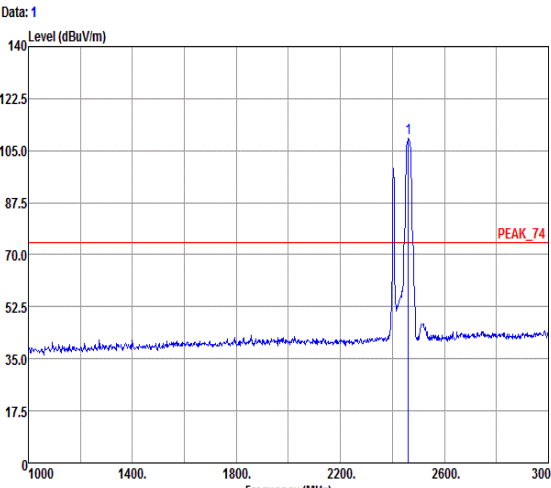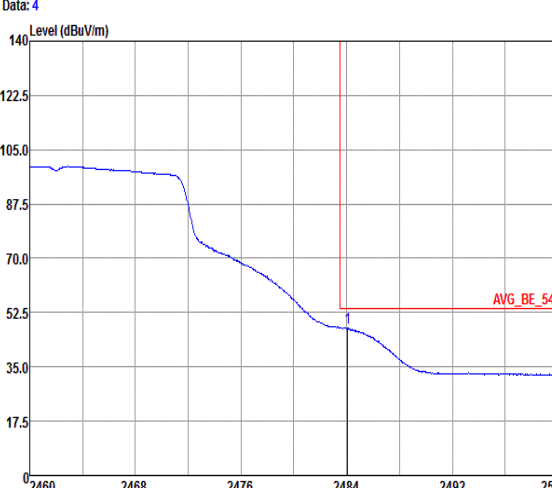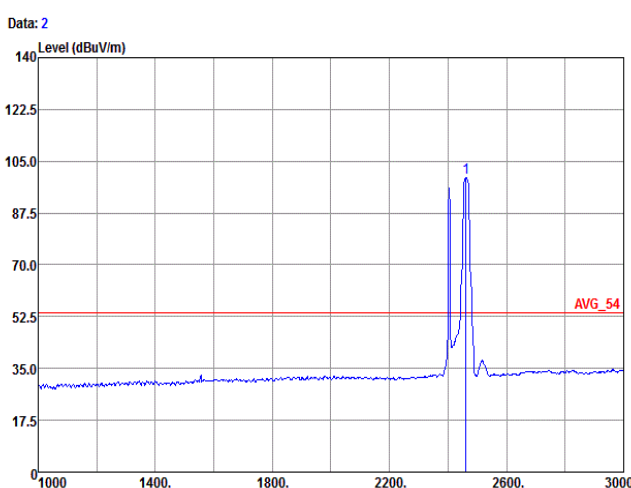

Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz+11ax HE20_CH11 +LTE B13 Link CO_TX																																																																																	
ANT	12																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Data: 3  <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2483.68</td><td>58.53</td><td>-15.47</td><td>74.00</td><td>56.38</td><td>30.80</td><td>5.46</td><td>34.11</td><td>104</td><td>325</td><td>Peak</td></tr></table>					Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2483.68	58.53	-15.47	74.00	56.38	30.80	5.46	34.11	104	325	Peak	Data: 1  <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>109.03</td><td>35.03</td><td>74.00</td><td>106.95</td><td>30.79</td><td>5.41</td><td>34.12</td><td>104</td><td>325</td><td>Peak</td></tr></table>					Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	109.03	35.03	74.00	106.95	30.79	5.41	34.12	104	325	Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 * 2483.68	58.53	-15.47	74.00	56.38	30.80	5.46	34.11	104	325	Peak																																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 * 2462.00	109.03	35.03	74.00	106.95	30.79	5.41	34.12	104	325	Peak																																																																								
Avg	Data: 4  <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.08</td><td>47.63</td><td>-6.37</td><td>54.00</td><td>45.48</td><td>30.80</td><td>5.46</td><td>34.11</td><td>104</td><td>325</td><td>Average</td></tr></table>					Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 2484.08	47.63	-6.37	54.00	45.48	30.80	5.46	34.11	104	325	Average	Data: 2  <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>99.46</td><td>45.46</td><td>54.00</td><td>97.38</td><td>30.79</td><td>5.41</td><td>34.12</td><td>104</td><td>325</td><td>Average</td></tr></table>					Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	99.46	45.46	54.00	97.38	30.79	5.41	34.12	104	325	Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 2484.08	47.63	-6.37	54.00	45.48	30.80	5.46	34.11	104	325	Average																																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 * 2462.00	99.46	45.46	54.00	97.38	30.79	5.41	34.12	104	325	Average																																																																								

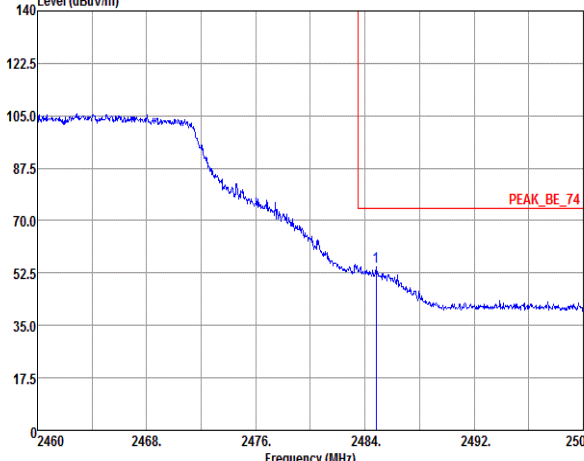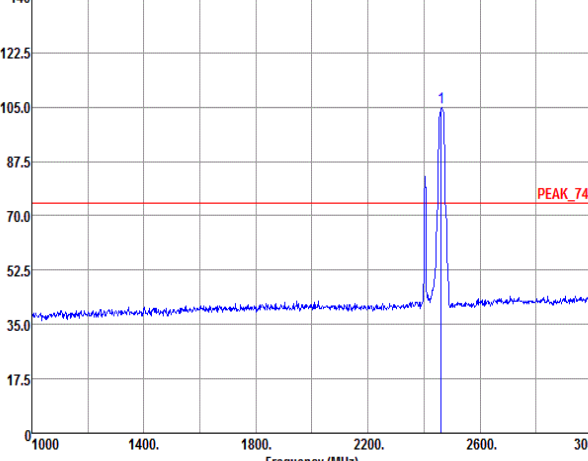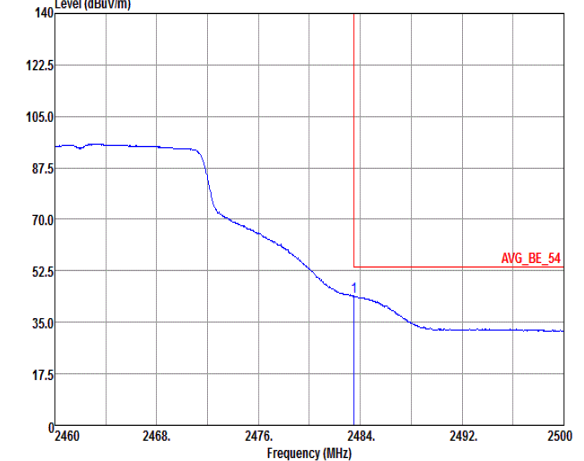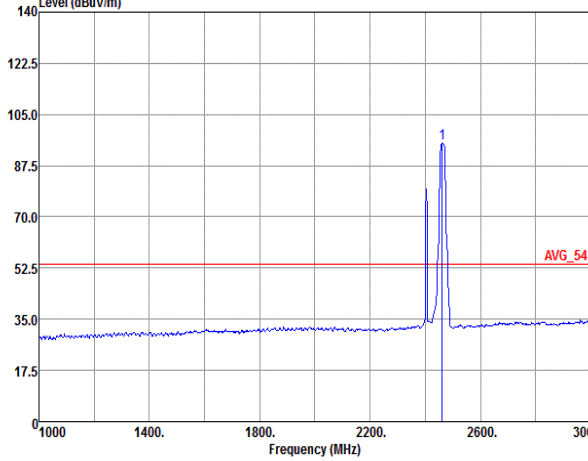

Mode	9																																																															
	Band Edge																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz+11ax HE20_CH11 +LTE B13 Link CO_TX																																																															
ANT	12																																																															
Pol.	Vertical					Fundamental																																																										
Peak	Data: 7  <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2484.80</td><td>54.49</td><td>-19.51</td><td>74.00</td><td>52.34</td><td>30.80</td><td>5.46</td><td>34.11</td><td>372 245 Peak</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2484.80	54.49	-19.51	74.00	52.34	30.80	5.46	34.11	372 245 Peak	Data: 5  <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>104.71</td><td>30.71</td><td>74.00</td><td>102.63</td><td>30.79</td><td>5.41</td><td>34.12</td><td>372 245 Peak</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	104.71	30.71	74.00	102.63	30.79	5.41	34.12	372 245 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																							
1 * 2484.80	54.49	-19.51	74.00	52.34	30.80	5.46	34.11	372 245 Peak																																																								
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1 * 2462.00	104.71	30.71	74.00	102.63	30.79	5.41	34.12	372 245 Peak																																																								
Avg	Data: 8  <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.52</td><td>43.75</td><td>-10.25</td><td>54.00</td><td>41.60</td><td>30.80</td><td>5.46</td><td>34.11</td><td>372 245 Average</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 2483.52	43.75	-10.25	54.00	41.60	30.80	5.46	34.11	372 245 Average	Data: 6  <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>95.23</td><td>41.23</td><td>54.00</td><td>93.15</td><td>30.79</td><td>5.41</td><td>34.12</td><td>372 245 Average</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	95.23	41.23	54.00	93.15	30.79	5.41	34.12	372 245 Average
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																							
1 2483.52	43.75	-10.25	54.00	41.60	30.80	5.46	34.11	372 245 Average																																																								
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1 * 2462.00	95.23	41.23	54.00	93.15	30.79	5.41	34.12	372 245 Average																																																								




Mode	9																																																																																																																																																		
	Harmonic																																																																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_2462MHz+BLE 2M CH01 +LTE B13 Link CO_TX																																																																																																																																																		
ANT	CDD 12+7																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																												
Peak Avg																																																																																																																																																			
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4808.00	42.67	74.00	-31.33	62.20	36.39	8.92	64.84	152	360	Peak	2	4924.00	42.71	74.00	-31.29	62.38	36.58	8.57	64.82	---	---	Peak	3	7386.00	43.86	74.00	-30.14	61.85	36.81	10.18	64.98	---	---	Peak			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4808.00	42.68	74.00	-31.32	62.21	36.39	8.92	64.84	148	0	Peak	2	4924.00	42.81	74.00	-31.19	62.48	36.58	8.57	64.82	---	---	Peak	3	7386.00	44.52	74.00	-29.48	62.51	36.81	10.18	64.98	---	---	Peak					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																										
1	4808.00	42.67	74.00	-31.33	62.20	36.39	8.92	64.84	152	360	Peak																																																																																																																																								
2	4924.00	42.71	74.00	-31.29	62.38	36.58	8.57	64.82	---	---	Peak																																																																																																																																								
3	7386.00	43.86	74.00	-30.14	61.85	36.81	10.18	64.98	---	---	Peak																																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																										
1	4808.00	42.68	74.00	-31.32	62.21	36.39	8.92	64.84	148	0	Peak																																																																																																																																								
2	4924.00	42.81	74.00	-31.19	62.48	36.58	8.57	64.82	---	---	Peak																																																																																																																																								
3	7386.00	44.52	74.00	-29.48	62.51	36.81	10.18	64.98	---	---	Peak																																																																																																																																								

Note: For all the above plots, the frequency points over limit line are fundamental signals, which can be ignored.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 2Mbps	31.94	0.200	5.000	10KHz
Bluetooth LE 125kbps	82.41	3.096	0.323	1KHz

Bluetooth – LE 2Mbps

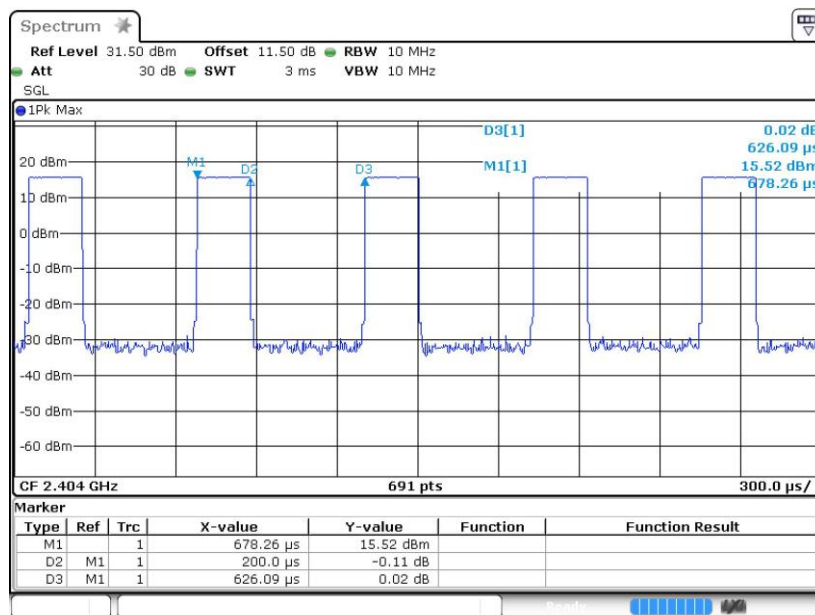



Bluetooth – LE 125kbps

