

RF EVALUATION TEST REPORT

Applicant..... : Dongguan Aiue Electronics Technology Co., LTD

Address..... : Room 103, NO.42, Yanhedong Street, Ailingkan, Dalingshan Town, Dongguan,
Guangdong, China

Manufacturer..... : Dongguan Aiue Electronics Technology Co., LTD

Address..... : Room 103, NO.42, Yanhedong Street, Ailingkan, Dalingshan Town, Dongguan,
Guangdong, China

Factory..... : Dongguan Aiue Electronics Technology Co., LTD

Address..... : Room 103, NO.42, Yanhedong Street, Ailingkan, Dalingshan Town, Dongguan,
Guangdong, China

Product Name..... : SOUND TABLE SPEAKER

Brand Name..... : 

Model No. : AT600, AT600R, AT710, TC101
(For model difference refer to section 2.)

FCC ID..... : 2A65MAU600B

Measurement Standard..... : 47 CFR PART 2, Section 2.1091

Receipt Date of Samples.... : March 15, 2024

Date of Tested..... : March 15, 2024 to April 07, 2024

Date of Report..... : April 10, 2024

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Rose Hu / Project Engineer



Iori Fan / Authorized Signatory

Table of Contents

1. General Description of EUT	4
2. Test Facility and Location	6
3. Test Modes Detail	7
4. Configuration of EUT	7
5. Modification of EUT	7
6. Description of Support Device.....	8
7. Deviations and Abnormalities from Standard Conditions	8
8. Applicable Standards and References.....	8
9. Measurement Uncertainty	9
10. Maximum Permissible Exposure.....	10
11. Test Equipment List	14
12. Test Photos	15

Revision History

Report Number	Description	Issued Date
NTC2403206F-1	Initial Issue	2024-04-10

1. General Description of EUT

Product Information	
Product Name:	SOUND TABLE SPEAKER
Main Model Name:	AT600
Additional Model Name:	AT600R, AT710, TC101
Model Difference:	These models have the same circuit schematic, structure, PCB Layout and critical components. The difference is model number due to trading purpose.
S/N:	2403-1174
Brand Name:	
Hardware Version:	VER01
Software Version:	V01
Rating:	DC 15V 1.5A come from adapter; DC 7.4V come from li-ion battery
Typical Arrangement:	Floor-standing
I/O Port:	Refer to user manual
Accessories Information	
Adapter:	Manufacturer: Shenzhen Jiuzhou Power Technology Co., Ltd. Model: JZB024-1501500UX Input: AC 100-240V, 50/60Hz, 1.0A Output: DC 15V 1.5A 22.5W
Cable:	DC line(adapter): 1.50m, unshielded, undetachable
Other:	N/A
Additional Information	
Note:	According to the model difference and manufacturer's requirements, all tests were performed on model AT600.
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Frequency Range:	110.5-205KHz
Modulation Type:	FSK
Antenna Type:	Coil antenna
Output power for coil:	5W, 7.5W, 10W


2. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2024 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2025 Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417 Listed by Industry Canada, June 08, 2017 The Certificate Registration Number. Is 46405-9743A
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

3. Test Modes Detail

Test Mode	Test Setup Configuration	Remark
1.	Wireless Charging 5W	Full Load, Half Load, Empty Load
2.	Wireless Charging 7.5W	Full Load, Half Load, Empty Load
3.	Wireless Charging 10W	Full Load, Half Load, Empty Load

4. Configuration of EUT

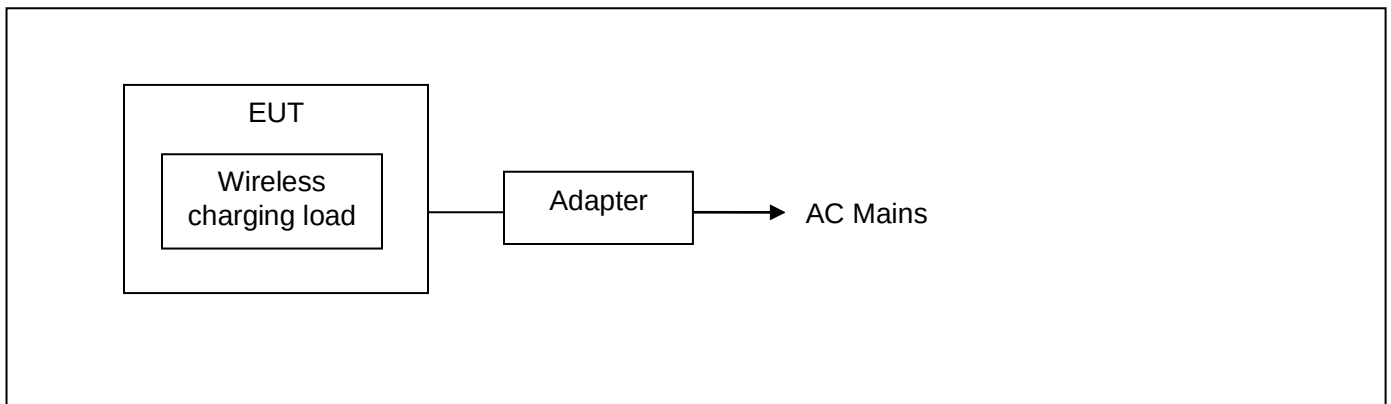

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has tested as an independent unit together with other necessary accessories or support units. The following support units or accessories used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Wireless Charging Load	YBZ	001	---	---	Provided by the Lab.

7. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 1, 1.1307(b) and 1.1310

KDB 680106 D01v04

9. Measurement Uncertainty

No.	Test Item	Uncertainty	Remarks
1.	Magnetic Field Emissions	± 0.15 dB	---
2.	Electric Field Emissions	± 0.36 dB	---
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.			

10. Maximum Permissible Exposure

LIMIT

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,00	/	/	1.0	30

F=frequency in MHz


*=Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz: 614V/m,1.63A/m).

Per KDB 680106 D01v04, RF exposure evaluation at 20cm surrounding the device and 20cm above the top surface. Emission between 50 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 1.63/Am and aggregate H-field strengths from all simultaneous transmitting coils are demonstrated to be less than MPE limit.


BLOCK DIAGRAM OF TEST SETUP

For Mobile:

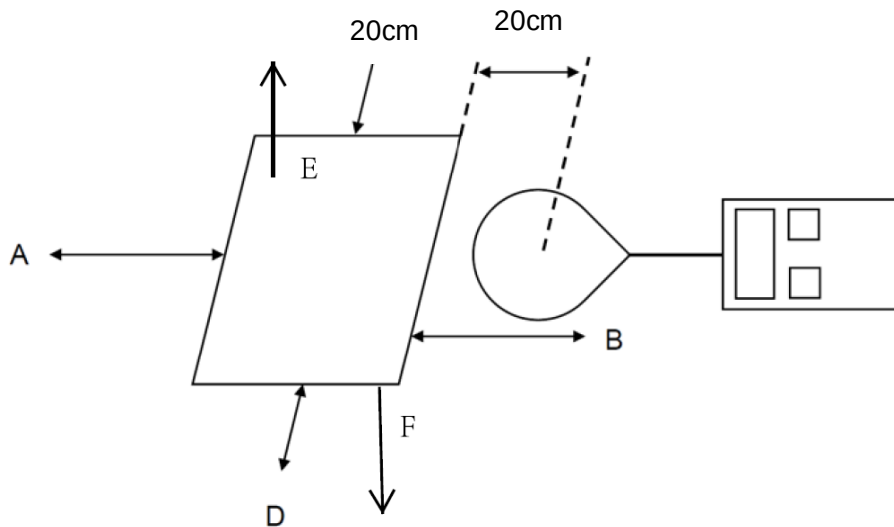

Note: The distance of the points A/B/C/D/E and F(if necessary) is 20cm.

For Portable:

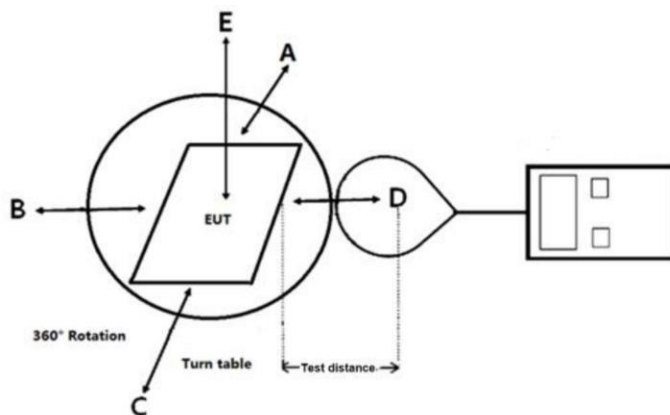

Note: The distance of the points A/B/C/D/E is 2,4,6,8,10,12,14,16,18, 20cm.

TEST PROCEDURES

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber;
- b. E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the EUT of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 D01v04.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber;
- b. E and H-field measurements should be made with the probe at 0cm for all sides of the EUT.
- c. The highest emission level was recorded and compared with limit.

For portable exposure conditions:

Perform H-field measurements for each edge/top surface of the host/client pair at every 2cm, starting from as close as possible out to 20cm.

TEST RESULTS

PASS

Please refer to the following pages of the worst case.

5W, Test Mode 1, Full load					
Test Distance (cm)	Test Position	Mobile Measure Result (V/m)	Mobile Measure Result (A/m)	Limit (V/m)	Limit (A/m)
20	Side A	0.272	0.22	614	1.63
	Side B	0.285	0.23	614	1.63
	Side C	0.287	0.23	614	1.63
	Side D	0.259	0.21	614	1.63
	Side E	0.278	0.22	614	1.63

When Bluetooth and WPT work together:



Ratio BT	Ratio WPT	Ratio Total	Ratio Limits
0.000339869	0.1411	0.141440	1

11. Test Equipment List



Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic field probe 100cm ²	Narda	ETL-400 Probe 1Hz-400KHz (r=6.2cm)	O-0167	June 28, 2023	1 Year
2.	E-Field Probe	Narda	EP-601	611WX70729	Mar. 23, 2024	1 Year

12. Test Photos



Side A: Test distance 20cm

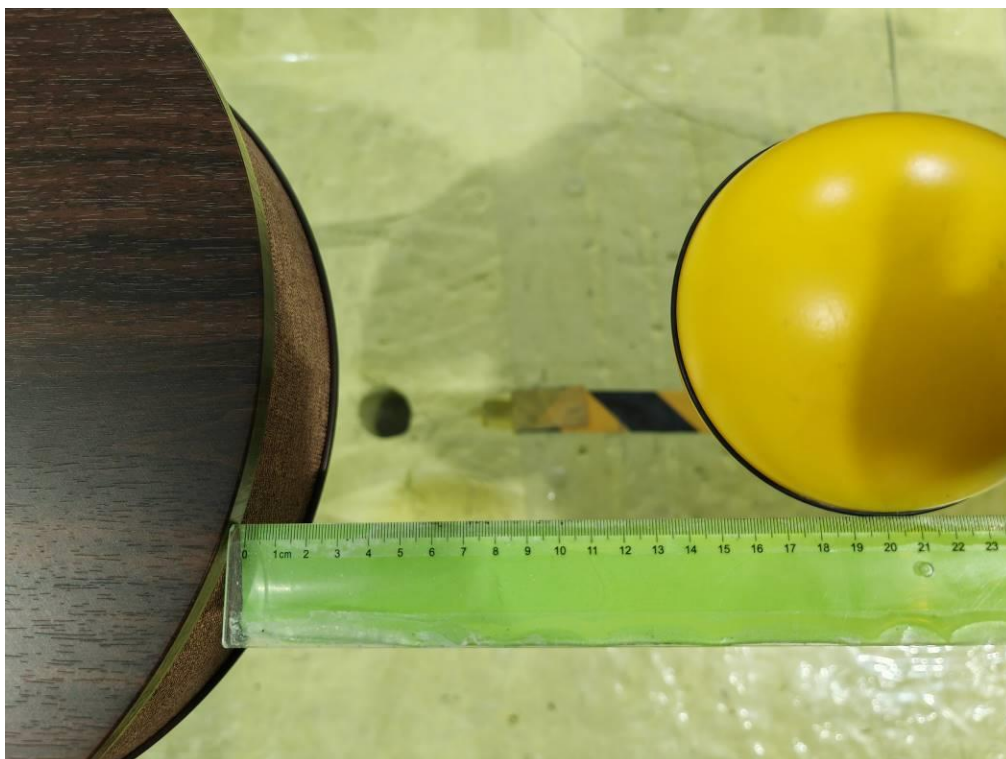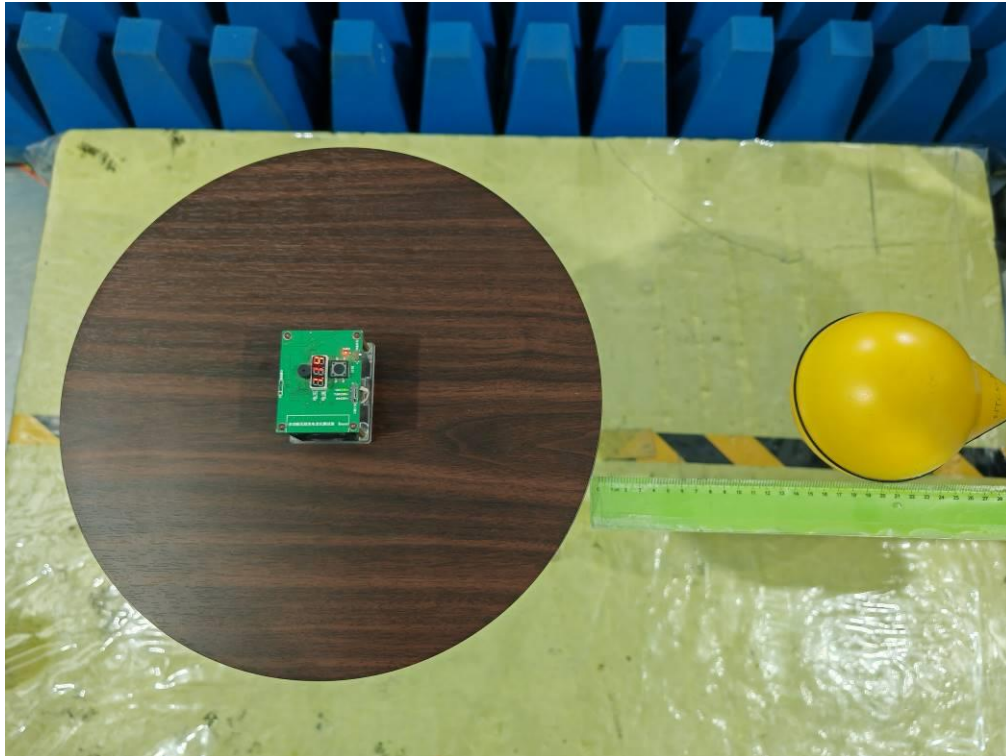



Side B: Test distance 20cm

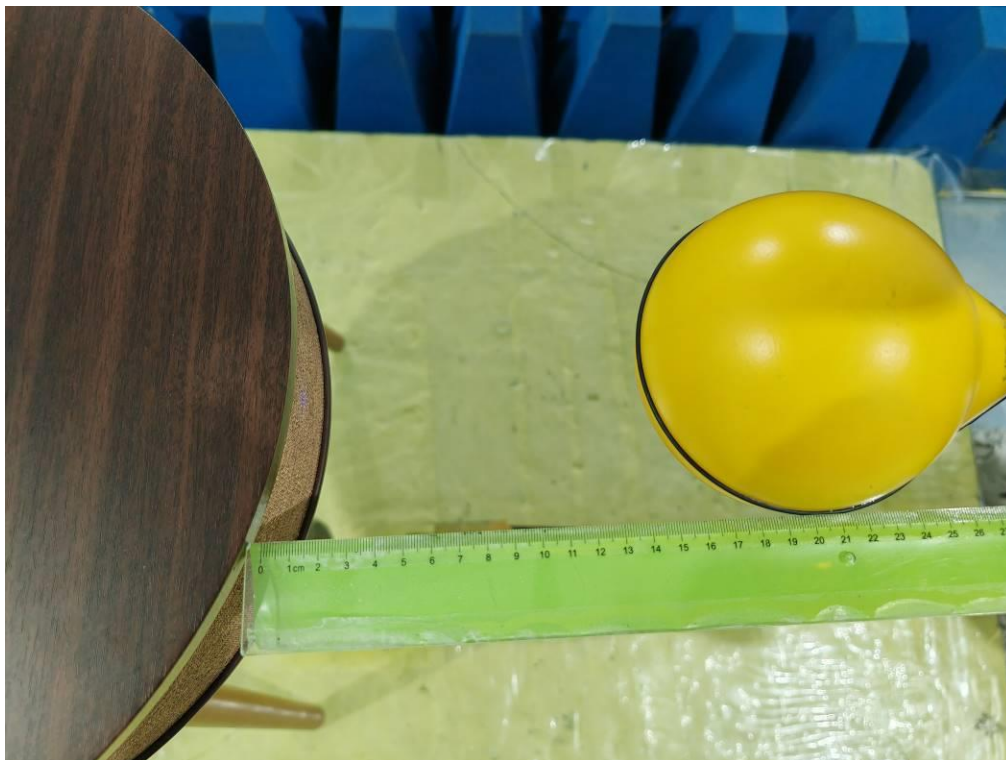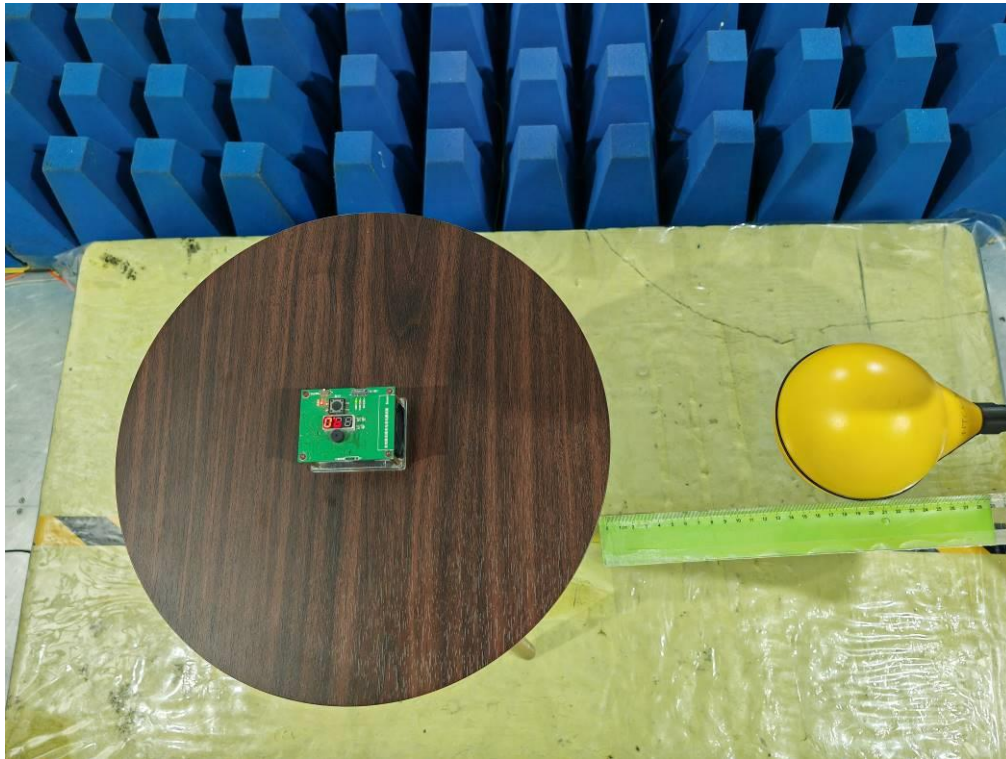


Side C: Test distance 20cm

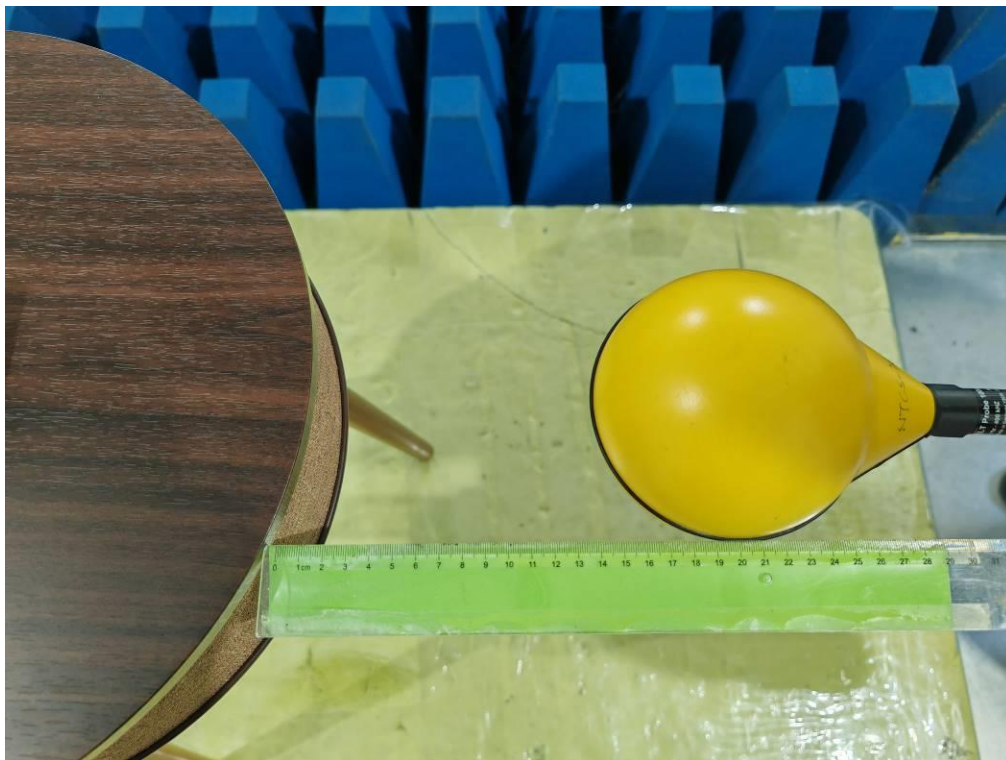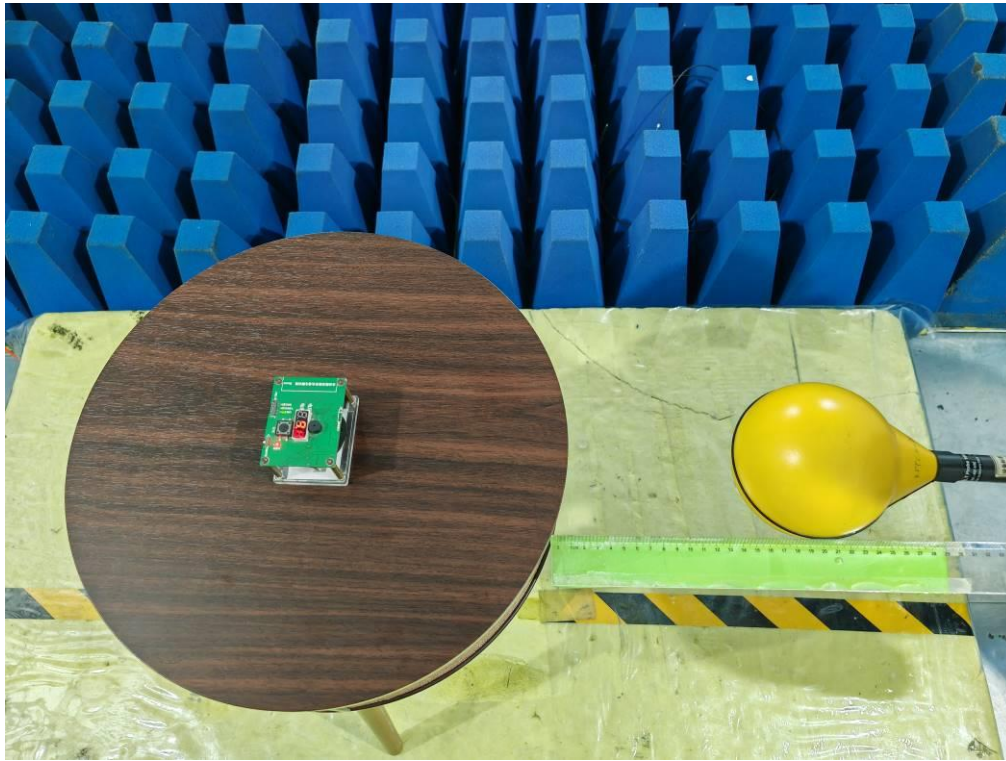

Side D: Test distance 20cm

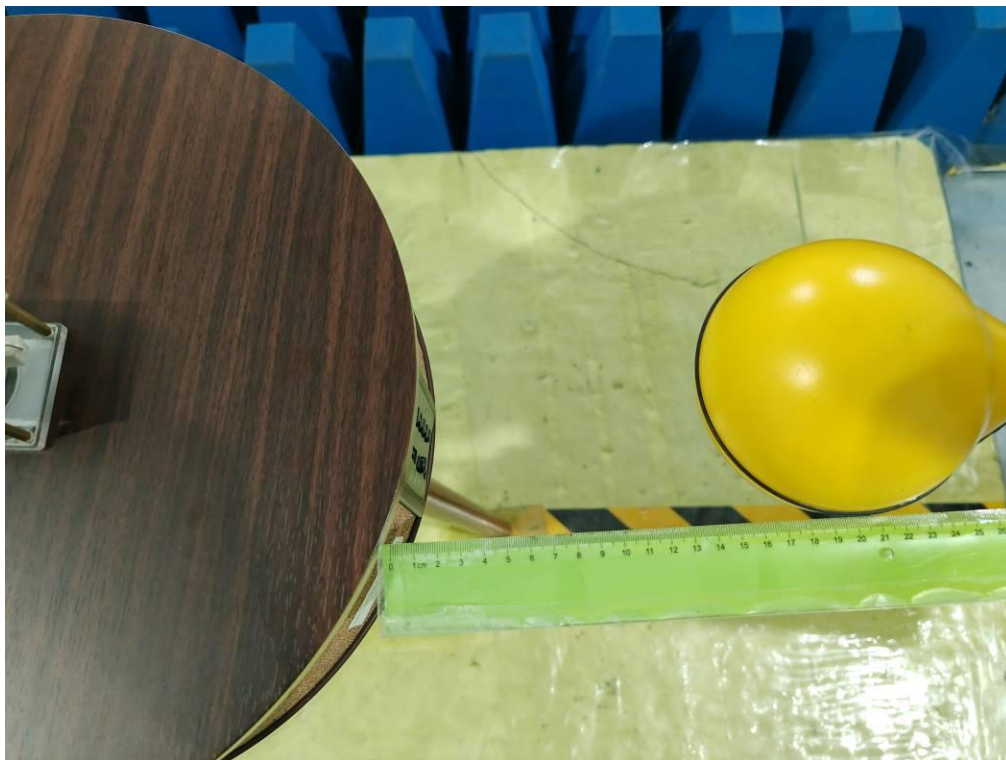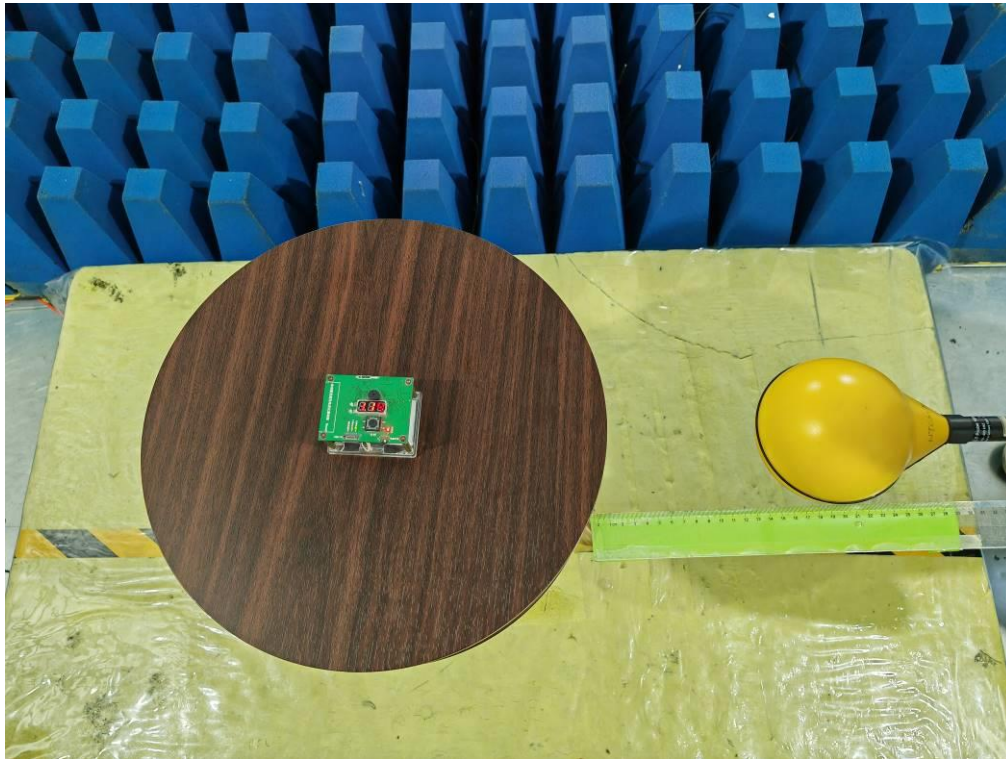

Side E: Test distance 20cm

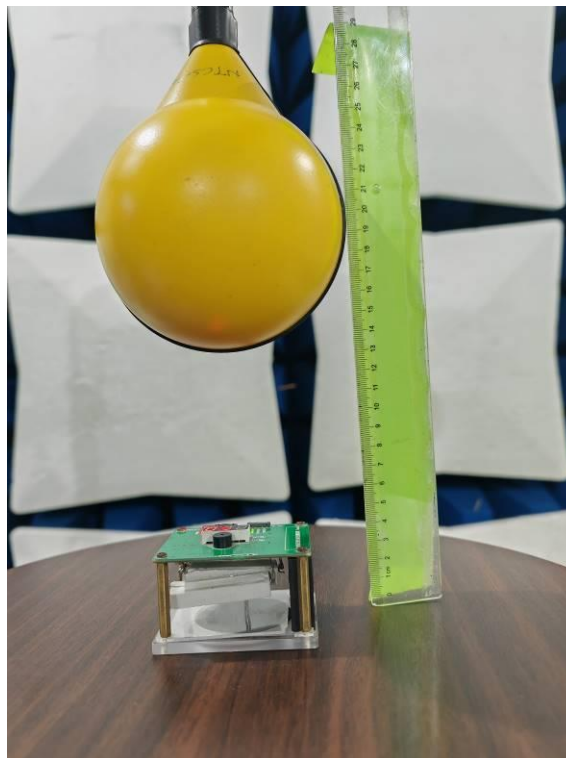

---End---