


TEST REPORT

Applicant: MediaTek Inc.
Address: No. 1, Dusing 1st Rd., Hsinchu Science Park
Hsinchu City 30078, Taiwan
Equipment Type: 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Model Name: MT7922A12L
Brand Name: MediaTek
FCC ID: RAS-MT7922A12L
Test Standard: FCC 47 CFR Part 2.1093
(refer to section 3.1)
Maximum PD: 4.68 W/m²
Sample Arrival Date: Jul. 24, 2023
Test Date: Aug. 11, 2023 - Aug. 12, 2023
Date of Issue: Sep. 06, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Lining



Checked by: Xu Rui



Approved by: Tolan Tu
(Testing Director)



Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Sep. 06, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
1.3	Test Environment Condition.....	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Ancillary Equipment.....	7
2.5	Technical Information	7
3	SUMMARY OF TEST RESULT	8
3.1	Test Standards	8
3.2	Device Category and SAR Limit	9
3.3	Test Result Summary	10
3.4	Test Uncertainty	11
4	MEASUREMENT SYSTEM	12
4.1	DASY Power Density System	12
5	SYSTEM VERIFICATION	17
5.1	Purpose of System Check	17
5.2	System Check Setup	17
6	POWER DENSITY MEASUREMENT PROCEDURE.....	18
6.1	Computation of the Electric Field Polarization Ellipse	18
6.2	Total Field and Power Flux Density Reconstruction.....	19
6.3	Power Flux Density Averaging.....	19

6.4	Measurement Workflow: Incident Power Density Measurements with cDASY6 Module mmWave 19	
7	CONDUCTED RF OUPUT POWER	20
7.1	WIFI.....	20
8	ANTENNA LOCATION	25
8.1	Tablet Mode antenna location sketch	25
9	TEST RESULT OF POWER DENSITY	26
9.1	WIFI 6GHz Body SAR (Without Handle)	27
9.2	WIFI 6GHz PD (Without Handle)	29
9.3	WIFI 6GHz Body SAR (Strap Handle)	30
9.4	WIFI 6GHz PD (Strap Handle)	32
10	SIMULTANEOUS TRANSMISSION.....	33
10.1	Simultaneous Transmission Mode Considerations	34
10.2	RF Exposure Simultaneous Transmission Evaluation.....	34
11	TEST EQUIPMENTS LIST	35
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	36
ANNEX B	POWER DENDITY TEST DATA.....	41
ANNEX C	POWER DENSITY TEST SETUP PHOTOS.....	49
ANNEX D	POWER DENSITY CALIBRATION REPORT	49

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MediaTek Inc.
Address	No. 1, Dusing 1st Rd., Hsinchu Science Park Hsinchu City 30078, Taiwan

2.2 Manufacturer Information

Manufacturer	MediaTek Inc.
Address	No. 1, Dusing 1st Rd., Hsinchu Science Park Hsinchu City 30078, Taiwan

2.3 General Description for Equipment under Test (EUT)

EUT Name	2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Model Name Under Test	MT7922A12L
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.3.1 Host Information:

Product Name	Handheld Console PC
Model Name	Legion Go 8APU1
Barnd Name	Lenovo

2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufact urer	Antenna Type	Antenna Gain (dBi)					
				2.4 GHz	5.15- 5.25 GHz	5.25- 5.35 GHz	5.47- 5.725 GHz	5.725- 5.85 GHz	5.945- 6.425 GHz
Main Antenna	F002C45121 90001	INNOWA VE	PIFA	1.21	0.86	1.51	1.19	1.35	1.61
Auxiliary Antenna	F002C45125 90002		PIFA	1.68	1.17	1.13	1.37	1.82	2.24
Main Antenna	3.6.04.0157	HUBBLE	PIFA	1.11	1.78	2.07	2.57	2.46	2.03
Auxiliary Antenna	3.6.04.0158		PIFA	-1.15	-0.98	-1.39	0.67	-0.45	0.29
Note: The report only shown the antenna which matches the antenna with the highest antenna gain.									

2.4 Ancillary Equipment

Note: Not application.

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, VHT20/40, 802.11ac and 802.11ax Band 1/2/3, 5.8G SRD, 6G SRD
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	6G WLAN	
Frequency Range	802.11a /ax(HE20/HE40/ HE80/HE160)	5925 MHz ~ 6425 MHz
		6425 MHz ~ 6525 MHz
		6525 MHz ~ 6875 MHz
		6875 MHz ~ 7125 MHz
Antenna Type	WLAN: PIFA Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radio frequency radiation exposure evaluation: portable devices
2	47 CFR Part 1.1310	Radiofrequency radiation exposure limits
3	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
4	KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	KDB 865664 D02 v01r02	RF Exposure Reporting
6	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
7	KDB 616217 D04v01r02	SAR for laptop and tablets
8	IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
9	IEC TR 63170:2018	Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz
10	IEC/IEEE 63195-1:2022	ASSESSMENT OF POWER DENSITY OF HUMAN EXPOSURE TO RADIO FREQUENCY FIELDS FROM WIRELESS DEVICES IN CLOSE PROXIMITY TO THE HEAD AND BODY (Frequency range of 6 GHz to 300 GHz) – Part 1: Measurement procedure

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is power density for frequencies between 1.5GHz and 100 GHz is $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$

Table of Exposure Limits:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW / cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30
<i>f = frequency in MHz * = Plane-wave equivalent power density</i>				

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest Power Density

Equipment Class	Band	Antenna	Maximum Scaled PD (W/m ²)	Maximum Report PD (W/m ²)
			Body	Body
U-NII-5/6/7/8	6G WLAN	Aux.	4.68	4.68
		Main	4.45	
Limit (W/m ²)			10	
Verdict			Pass	

3.3.2 Highest Total Exposure Ratio

Test Mode	Position	Mode	Power Density		1g SAR		Total Exposure Ratio
			(W/m²)	TER	(W/kg)	TER	
Body (Separation 0 mm)							
Tablet	Left Edge	Bluetooth (Auxiliary Antenna) (MT7922A12L)	/	/	0.626	0.391	0.993
		6G WLAN (Main Antenna)	0	0	0	0	
		6G WLAN (Auxiliary Antenna)	0.963	0.602	4.675	0.468	
		Bluetooth (AC6956C)	/	/	0	0	
Note: The simultaneous transmission detail please refer to section 10.							

3.4 Test Uncertainty


For PTP measurement method: DASY6 uncertainty budget in compliance with IEC/IEEE 63195-1 for the cases indicated in the reference table.

source of uncertainty	Unc.±dB	Prob. Dist.	Div.	ci	Standard uncertainty ± dB	vi or veff
Uncertainty terms dependent on the measurement system						
Calibration	0.49	N	1	1	0.49	∞
Frequency response	0.2	R	$\sqrt{3}$	1	0.12	∞
Isotropy	0.5	R	$\sqrt{3}$	1	0.29	∞
System linearity error	0.2	R	$\sqrt{3}$	1	0.12	∞
Probe positioning offset	0.3	R	$\sqrt{3}$	1	0.17	∞
Probe positioning repeatability	0.04	N	1	1	0.02	∞
Amplitude and phase noise	0.03	N	1	1	0.03	∞
Data acquisition	0.03	N	1	1	0.02	∞
Field reconstruction	2	R	$\sqrt{3}$	1	1.15	∞
System detection limits	0.04	R	$\sqrt{3}$	1	0.02	∞
Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06	∞
Calibration	0.49	N	1	1	0.49	∞
Frequency response	0.2	R	$\sqrt{3}$	1	0.12	∞
Uncertainty terms dependent on the DUT and environmental factor						
Modulation response	0.4	R	$\sqrt{3}$	1	0.23	∞
Device holder influence	0.1	R	$\sqrt{3}$	1	0.06	∞
DUT alignment	0.04	R	$\sqrt{3}$	1	0.02	∞
RF ambient conditions	0.04	R	$\sqrt{3}$	1	0.02	∞
DUT drift	0.1	R	$\sqrt{3}$	1	0.06	∞
Combined Standard Uncertainty	/	/	RSS		1.33	/
Expanded Uncertainty (95% Confidence interval)	/	k	2		2.66	/

4 MEASUREMENT SYSTEM

4.1 DASY Power Density System

4.1.1 DASY PD System Diagram

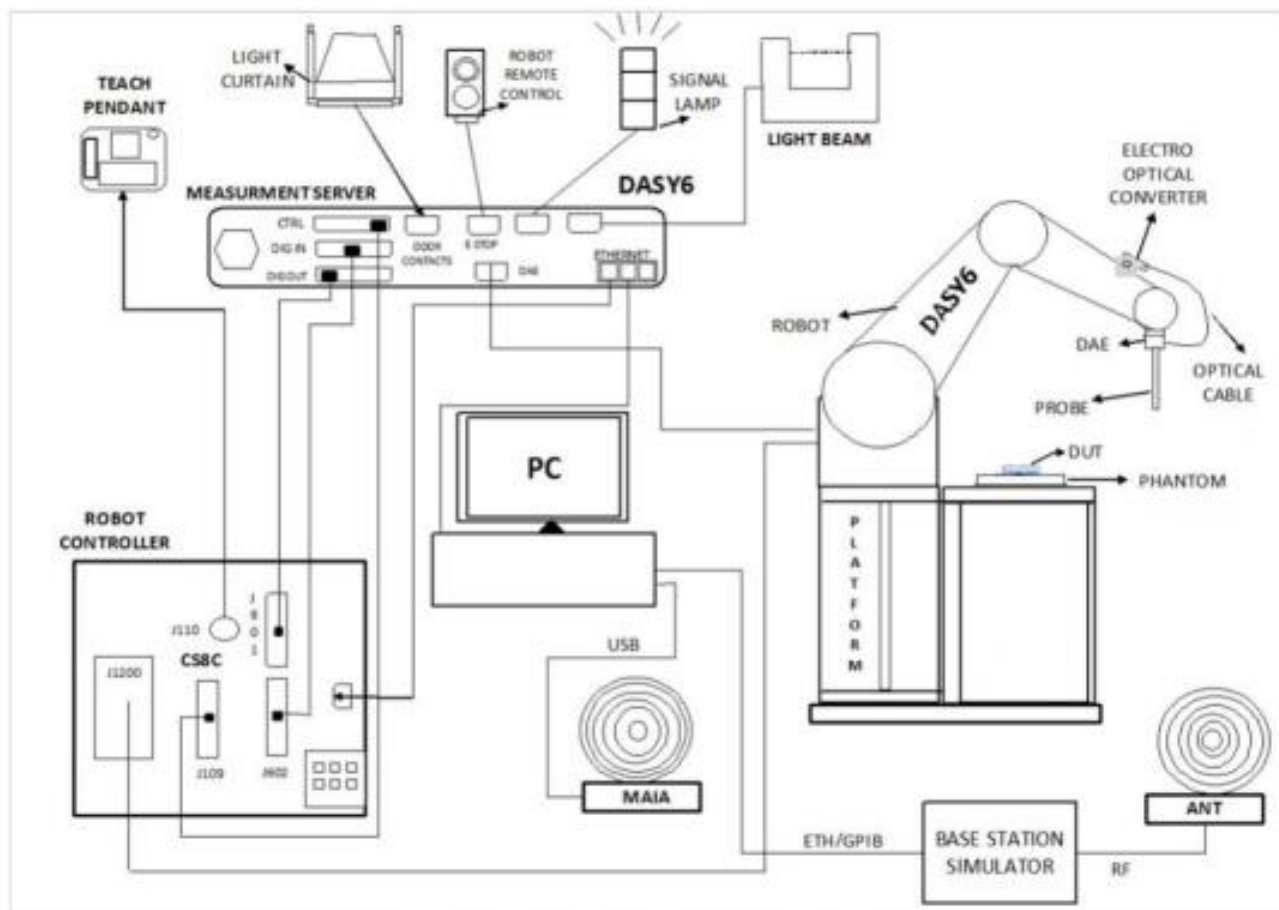

The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.

8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.1.2 Robot


The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.1.3 EUmmWave Probe / E-Field 5G Probe

The EUmmWave3 probe design allows measurements at distances as small as 2mm

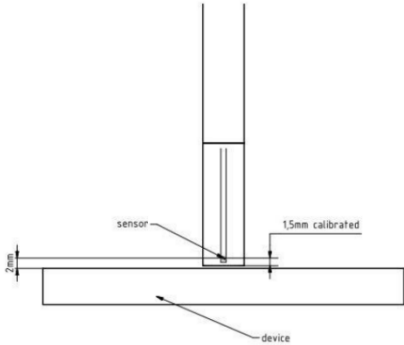Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m – 10000 V/m with PRE-10 (min < 50 V/m – 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher
 	

4.1.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB

5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal Power Density measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

6 POWER DENSITY MEASUREMENT PROCEDURE

6.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two

extreme cases, i.e. circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for

the description of the incident field.

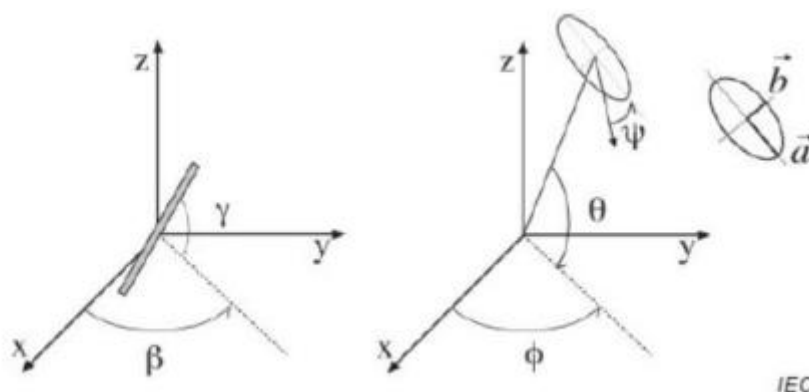


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space

For the construction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be express as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the numbers of three parameters is reduced from five to three, which means that least three sensors readings are necessary to gain sufficient information for the reconstruction of ellipse parameters.

However, to suppress the noise and increase the reconstruction accuracy, it is desirable to have an over determined system of equations. The solution to use a probe consisting of two sensors angled by γ_1 and γ_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e. at β_1 , β_2 and β_3 , results in over determination of two. If there is a need for more information or increased accuracy, more rotation angles can be added.

The reconstruction of ellipse parameters can be separated into linear and non-linear parts that are best solved by the givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a 90° shift ($\gamma_1 = \gamma_2 + 90^\circ$), and, to simplify, the first rotation angle of the probe (β_1) can be set to 0° .

6.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. The SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-Field polarization ellipse information obtained with the EUMmWV2 probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E-field and H-field, as well as of the power density, on measurement planes located as near as $\lambda/5$ away.

6.3 Power Flux Density Averaging

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1cm². The computed peak average value

is displayed in the box at the top right. Note that the average is evaluated only for grid points where the averaging circle is completely filled with values; for points at the edge where the averaging circle is only partly filled with values, the average power density is set to zero. Two average power density values are computed.

6.4 Measurement Workflow: Incident Power Density Measurements with cDASY6 Module mmWave

The incident power density must be measured for the test configuration producing the highest SAR value. The

measurement procedure is summarized below:

1. Perform a system performance check at 10 GHz.
2. Determine the optimal grid resolution to be used for subsequent measurements.
3. Assess the incident power for the configuration to be tested.
4. Calculate the additional reconstruction uncertainty at 2mm and compute the total measurement uncertainty.
5. Adjust the incident psPD results by the amount that the measurement uncertainty exceeds 30%

7 CONDUCTED RF OUPUT POWER

7.1 WIFI

7.1.1 6G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6 (5.925~7.125)	802.11a	1	5955	0.97	1.00	No
		45	6175	0.88	1.00	No
		93	6415	0.95	1.00	No
		97	6435	0.78	1.00	No
		105	6475	0.85	1.00	No
		113	6515	1.21	1.50	No
		117	6535	0.99	1.00	No
		153	6715	0.81	1.00	No
		181	6855	1.49	1.50	No
		185	6875	1.47	1.50	No
		213	7015	0.53	1.00	No
		233	7115	0.63	1.00	No
	802.11ax(HE20)	1	5955	0.60	1.00	No
		45	6175	0.51	1.00	No
		93	6415	1.13	1.50	No
		97	6435	1.47	1.50	No
		105	6475	1.27	1.50	No
		113	6515	1.44	1.50	No
		117	6535	1.29	1.50	No
		153	6715	0.91	1.00	No
		181	6855	0.63	1.00	No
		185	6875	0.54	1.00	No
		213	7015	0.61	1.00	No
		233	7115	0.98	1.00	No
	802.11ax(HE40)	3	5965	4.40	4.50	No
		43	6165	4.04	4.50	No
		91	6405	4.30	4.50	No
		99	6445	4.13	4.50	No
		107	6485	4.34	4.50	No
		115	6525	4.35	4.50	No
		123	6565	4.36	4.50	No
		155	6725	4.02	4.50	No
		179	6845	4.25	4.50	No

		187	6885	4.35	4.50	No
		211	7005	4.28	4.50	No
		227	7085	4.00	4.50	No
802.11ax(HE80)		7	5985	6.97	7.00	No
		39	6145	6.78	7.00	No
		87	6385	6.78	7.00	No
		103	6465	6.86	7.00	No
		119	6545	6.77	7.00	No
		135	6625	6.87	7.00	No
		151	6705	6.91	7.00	No
		167	6785	6.99	7.00	No
		183	6865	6.68	7.00	No
		199	6945	6.78	7.00	No
		215	7025	6.70	7.00	No
802.11ax(HE160)		15	6025	9.49	9.50	Yes
		47	6185	9.34	9.50	Yes
		79	6345	9.39	9.50	Yes
		111	6505	9.38	9.50	Yes
		143	6665	9.00	9.50	Yes
		175	6825	9.48	9.50	Yes
		207	6985	9.03	9.50	Yes
RU-26/0		1	5955	-7.42	-7.00	No
RU-26/8		93	6415	-7.22	-7.00	No
RU-26/0		97	6435	-7.41	-7.00	No
RU-26/0		117	6535	-7.18	-7.00	No
RU-26/8		181	6855	-7.40	-7.00	No
RU-26/8		213	7015	-7.25	-7.00	No
RU-52/37		1	5955	-4.17	-4.00	No
RU-52/40		93	6415	-4.18	-4.00	No
RU-52/37		97	6435	-4.10	-4.00	No
RU-52/37		117	6535	-4.23	-4.00	No
RU-52/40		181	6855	-4.05	-4.00	No
RU-52/40		213	7015	-4.21	-4.00	No
RU-106/53		1	5955	-1.30	-1.00	No
RU-106/54		93	6415	-1.16	-1.00	No
RU-106/53		97	6435	-1.13	-1.00	No
RU-106/53		117	6535	-1.28	-1.00	No
RU-106/54		181	6855	-1.42	-1.00	No
RU-106/54		213	7015	-1.30	-1.00	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

7.1.26G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6 (5.925~7.125)	802.11a	1	5955	-0.05	1.00	No
		45	6175	0.55	1.00	No
		93	6415	0.64	1.00	No
		97	6435	0.94	1.00	No
		105	6475	0.80	1.00	No
		113	6515	0.79	1.00	No
		117	6535	0.82	1.00	No
		153	6715	0.97	1.00	No
		181	6855	0.67	1.00	No
		185	6875	0.87	1.00	No
		213	7015	0.71	1.00	No
		233	7115	0.97	1.00	No
	802.11ax(HE20)	1	5955	0.98	1.00	No
		45	6175	0.70	1.00	No
		93	6415	0.68	1.00	No
		97	6435	1.41	1.50	No
		105	6475	0.53	1.00	No
		113	6515	1.30	1.50	No
		117	6535	1.38	1.50	No
		153	6715	1.33	1.50	No
		181	6855	0.57	1.00	No
		185	6875	1.03	1.50	No
		213	7015	1.96	2.00	No
		233	7115	1.57	2.00	No
	802.11ax(HE40)	3	5965	4.11	4.50	No
		43	6165	4.49	4.50	No
		91	6405	4.02	4.50	No
		99	6445	4.22	4.50	No
		107	6485	4.47	4.50	No
		115	6525	4.27	4.50	No
		123	6565	4.29	4.50	No
		155	6725	4.05	4.50	No
		179	6845	4.45	4.50	No
		187	6885	4.38	4.50	No
		211	7005	4.46	4.50	No
		227	7085	4.18	4.50	No


	802.11ax(HE80)	7	5985	6.53	7.00	No
		39	6145	6.59	7.00	No
		87	6385	6.60	7.00	No
		103	6465	6.91	7.00	No
		119	6545	6.81	7.00	No
		135	6625	6.97	7.00	No
		151	6705	6.54	7.00	No
		167	6785	6.57	7.00	No
		183	6865	6.90	7.00	No
		199	6945	6.92	7.00	No
		215	7025	6.87	7.00	No
	802.11ax(HE160)	15	6025	9.11	9.50	Yes
		47	6185	9.10	9.50	Yes
		79	6345	9.45	9.50	Yes
		111	6505	9.01	9.50	Yes
		143	6665	9.14	9.50	Yes
		175	6825	9.40	9.50	Yes
		207	6985	9.38	9.50	Yes
	RU-26/0	1	5955	-7.25	-7.00	No
	RU-26/8	93	6415	-7.38	-7.00	No
	RU-26/0	97	6435	-7.02	-7.00	No
	RU-26/0	117	6535	-7.24	-7.00	No
	RU-26/8	181	6855	-7.36	-7.00	No
	RU-26/8	213	7015	-7.48	-7.00	No
	RU-52/37	1	5955	-4.08	-4.00	No
	RU-52/40	93	6415	-4.19	-4.00	No
	RU-52/37	97	6435	-4.01	-4.00	No
	RU-52/37	117	6535	-4.48	-4.00	No
	RU-52/40	181	6855	-4.16	-4.00	No
	RU-52/40	213	7015	-4.02	-4.00	No
	RU-106/53	1	5955	-1.20	-1.00	No
	RU-106/54	93	6415	-1.42	-1.00	No
	RU-106/53	97	6435	-1.09	-1.00	No
	RU-106/53	117	6535	-1.36	-1.00	No
	RU-106/54	181	6855	-1.09	-1.00	No
	RU-106/54	213	7015	-1.41	-1.00	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

8 ANTENNA LOCATION

8.1 Tablet Mode antenna location sketch

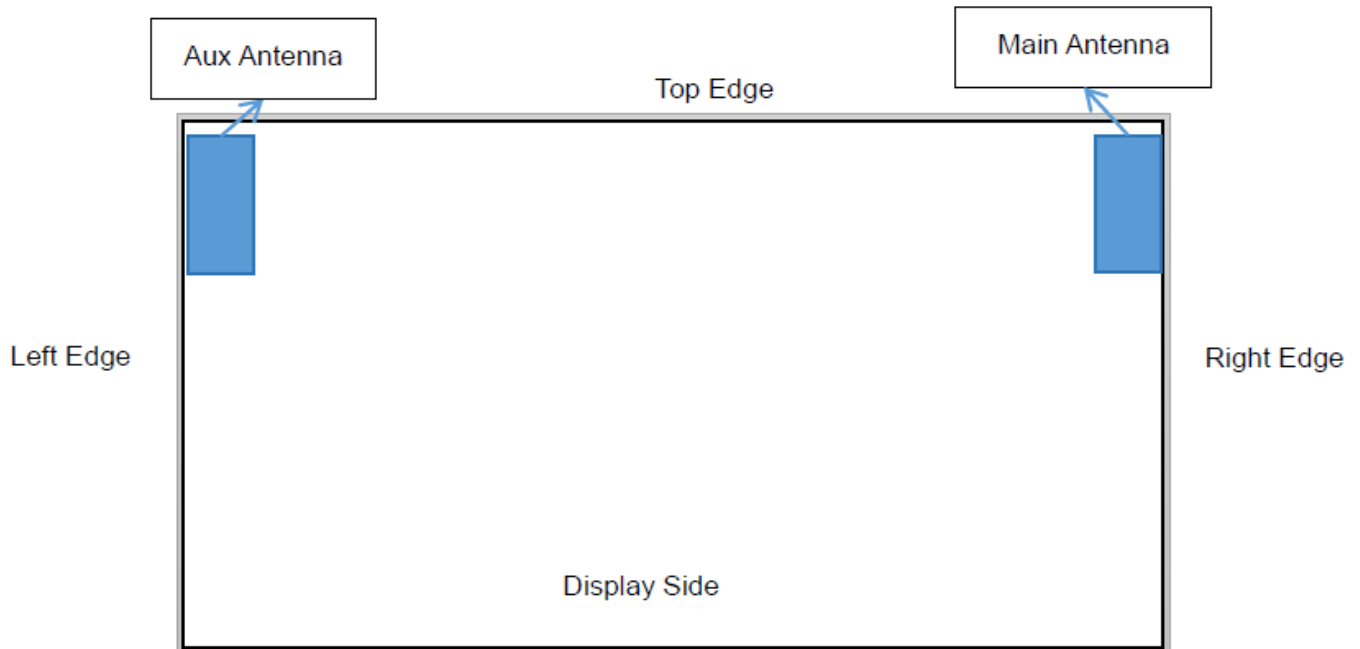

Antenna	Support Bands
Antenna Aux.	WLAN 6G
Antenna Main	WLAN 6G

9 TEST RESULT OF POWER DENSITY

General Note:

1. The reported PD is the measured Total PD value adjusted for maximum tune-up tolerance and duty cycle factor.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For PD testing of WLAN signal with non-100% duty cycle, the measured PD is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
2. The most conservative test distance of 2mm was applied to PD measurement.
3. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
5. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.66 dB (84.5%) was used to determine the psPD measurement scaling factor.
6. According to TCBC workshop in October 2018 that 4cm² averaging area may now be considered.

9.1 WIFI 6GHz Body SAR (Without Handle)

Fre. Band	Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)
Body															
6G	802.11 ax (HE160)	HUBBLE	Aux.	Front Side	0	79	6345	-0.19	0.072	9.45	9.50	1.012	80.28	1.246	0.091
				Back Side	0	79	6345	-0.16	0.152	9.45	9.50	1.012	80.28	1.246	0.192
				Left Edge	0	79	6345	0.12	0.490	9.45	9.50	1.012	80.28	1.246	0.618
				Left Edge Tilt	0	79	6345	0.03	0.326	9.45	9.50	1.012	87.91	1.138	0.375
				Top Edge	0	79	6345	0.06	0.107	9.45	9.50	1.012	80.28	1.246	0.135
				Left Edge	0	15	5025	0.17	0.602	9.11	9.50	1.094	80.28	1.246	0.821
				Left Edge	0	47	6185	-0.06	0.603	9.10	9.50	1.096	80.28	1.246	0.823
				Left Edge	0	111	6505	0.15	0.469	9.01	9.50	1.119	80.28	1.246	0.654
				Left Edge	0	143	6665	-0.02	0.480	9.14	9.50	1.086	80.28	1.246	0.650
				Left Edge	0	175	6825	0.01	0.408	9.40	9.50	1.023	80.28	1.246	0.520
				Left Edge	0	207	6985	-0.03	0.323	9.38	9.50	1.028	80.28	1.246	0.414
		INNOWAVE	Aux.	Front Side	0	79	6345	0.19	0.144	9.45	9.50	1.012	80.28	1.246	0.182
				Back Side	0	79	6345	0.09	0.116	9.45	9.50	1.012	80.28	1.246	0.146
				Left Edge	0	79	6345	0.03	0.569	9.45	9.50	1.012	80.28	1.246	0.717
				Left Edge Tilt	0	79	6345	0.03	0.447	9.45	9.50	1.012	87.91	1.138	0.515
				Top Edge	0	79	6345	0.17	0.243	9.45	9.50	1.012	80.28	1.246	0.306
				Left Edge	0	15	5025	0.00	0.659	9.11	9.50	1.094	80.28	1.246	0.898
				Left Edge	0	47	6185	-0.01	0.452	9.10	9.50	1.096	80.28	1.246	0.617
				Left Edge	0	111	6505	-0.06	0.689	9.01	9.50	1.119	80.28	1.246	0.961
				Left Edge	0	143	6665	-0.02	0.535	9.14	9.50	1.086	80.28	1.246	0.724
				Left Edge	0	175	6825	-0.11	0.649	9.40	9.50	1.023	80.28	1.246	0.827
				Left Edge	0	207	6985	-0.05	0.752	9.38	9.50	1.028	80.28	1.246	0.963
		HUBBLE	Main	Front Side	0	15	6025	0.16	0.116	9.49	9.50	1.002	80.28	1.246	0.145
				Back Side	0	15	6025	-0.16	0.252	9.49	9.50	1.002	80.28	1.246	0.315
				Right Edge	0	15	6025	-0.09	0.766	9.49	9.50	1.002	80.28	1.246	0.956
				Right Edge Tilt	0	15	6025	-0.19	0.744	9.49	9.50	1.002	80.28	1.246	0.929
				Top Edge	0	15	6025	0.10	0.090	9.49	9.50	1.002	80.28	1.246	0.112
				Right Edge	0	47	6185	0.10	0.730	9.34	9.50	1.038	80.28	1.246	0.944
				Right Edge	0	79	6345	-0.04	0.547	9.39	9.50	1.026	80.28	1.246	0.699
				Right Edge	0	111	6505	-0.18	0.484	9.38	9.50	1.028	80.28	1.246	0.620
				Right Edge	0	143	6665	-0.10	0.263	9.00	9.50	1.122	80.28	1.246	0.368
				Right Edge	0	175	6825	-0.01	0.303	9.48	9.50	1.005	80.28	1.246	0.379
				Right Edge	0	207	6985	0.08	0.214	9.03	9.50	1.114	80.28	1.246	0.297

		INNOWAVE	Main	Front Side	0	15	6025	-0.19	0.096	9.49	9.50	1.002	80.28	1.246	0.120
				Back Side	0	15	6025	0.05	0.208	9.49	9.50	1.002	80.28	1.246	0.260
				Right Edge	0	15	6025	-0.06	0.852	9.49	9.50	1.002	80.28	1.246	1.064
				Right Edge Tilt	0	15	6025	0.03	0.789	9.49	9.50	1.002	80.28	1.246	0.985
				Top Edge	0	15	6025	0.01	0.077	9.49	9.50	1.002	80.28	1.246	0.096
				Right Edge	0	47	6185	0.15	0.814	9.34	9.50	1.038	80.28	1.246	1.053
				Right Edge	0	79	6345	-0.18	0.635	9.39	9.50	1.026	80.28	1.246	0.812
				Right Edge	0	111	6505	0.04	0.628	9.38	9.50	1.028	80.28	1.246	0.804
				Right Edge	0	143	6665	-0.10	0.276	9.00	9.50	1.122	80.28	1.246	0.386
				Right Edge	0	175	6825	0.09	0.292	9.48	9.50	1.005	80.28	1.246	0.366
				Right Edge	0	207	6985	-0.19	0.188	9.03	9.50	1.114	80.28	1.246	0.261

Note:

1. In the testing process of front and back, because the structure of the handle would make the antenna position of the test sample unable to be close to the model basin, the handle test was removed in order to better simulate the actual use scenario.
2. Use factory test mode to control the power, and the power when the handle is removed is consistent with the power when the handle is put on.
3. Refer to ANNEX C for the detailed test data for each test configuration.

9.2 WIFI 6GHz PD (Without Handle)

Fre. Band	Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	Meas Total psPD [W/m2]	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	Meas. uncertai nty Scaling Factor	Scaled Total psPD [W/m2]	Meas. No.
Body																	
6G	802.11 ax (HE160)	INNOWAVE	Aux.	Front Side	2	79	6345	0.08	/	9.45	9.50	1.012	80.28	1.246	1.545	/	/
				Back Side	2	79	6345	-0.09	/	9.45	9.50	1.012	80.28	1.246	1.545	/	/
				Left Edge	2	79	6345	0.05	0.954	9.45	9.50	1.012	80.28	1.246	1.545	1.859	/
				Left Edge Tilt	2	79	6345	0.08	/	9.45	9.50	1.012	87.91	1.138	1.545	/	/
				Top Edge	2	79	6345	0.03	/	9.45	9.50	1.012	80.28	1.246	1.545	/	/
				Left Edge	2	15	5025	-0.19	0.907	9.11	9.50	1.094	80.28	1.246	1.545	1.910	/
				Left Edge	2	47	6185	-0.08	/	9.10	9.50	1.096	80.28	1.246	1.545	/	/
				Left Edge	2	111	6505	-0.02	2.170	9.01	9.50	1.119	80.28	1.246	1.545	4.675	1#
				Left Edge	2	143	6665	-0.10	/	9.14	9.50	1.086	80.28	1.246	1.545	/	/
				Left Edge	2	175	6825	-0.10	1.550	9.40	9.50	1.023	80.28	1.246	1.545	3.052	/
				Left Edge	2	207	6985	-0.01	1.850	9.38	9.50	1.028	80.28	1.246	1.545	3.661	/
		INNOWAVE	Main	Front Side	2	15	6025	-0.07	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Back Side	2	15	6025	-0.08	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Right Edge	2	15	6025	0.13	1.710	9.49	9.50	1.002	80.28	1.246	1.545	3.298	/
				Right Edge Tilt	2	15	6025	0.04	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Top Edge	2	15	6025	-0.10	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Right Edge	2	47	6185	0.18	2.150	9.34	9.50	1.038	80.28	1.246	1.545	4.296	/
				Right Edge	2	79	6345	0.18	/	9.39	9.50	1.026	80.28	1.246	1.545	/	/
				Right Edge	2	111	6505	0.13	2.250	9.38	9.50	1.028	80.28	1.246	1.545	4.453	2#
				Right Edge	2	143	6665	-0.12	/	9.00	9.50	1.122	80.28	1.246	1.545	/	/
				Right Edge	2	175	6825	-0.07	1.010	9.48	9.50	1.005	80.28	1.246	1.545	1.954	/
				Right Edge	2	207	6985	0.18	0.774	9.03	9.50	1.114	80.28	1.246	1.545	1.660	/
Note:																	
1. In the testing process of front and back, because the structure of the handle would make the antenna position of the test sample unable to be close to the model basin, the handle test was removed in order to better simulate the actual use scenario.																	
2. Use factory test mode to control the power, and the power when the handle is removed is consistent with the power when the handle is put on.																	
3. Refer to ANNEX C for the detailed test data for each test configuration.																	

9.3 WIFI 6GHz Body SAR (Strap Handle)

Fre. Band	Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)
Body															
6G	802.11 ax (HE160)	HUBBLE	Aux.	Front Side	0	79	6345	-0.02	0.055	9.45	9.50	1.012	80.28	1.246	0.069
				Back Side	0	79	6345	0.03	0.082	9.45	9.50	1.012	80.28	1.246	0.103
				Top Edge	0	79	6345	-0.14	0.087	9.45	9.50	1.012	80.28	1.246	0.110
				Top Edge	0	15	5025	0.12	0.108	9.11	9.50	1.094	80.28	1.246	0.147
				Top Edge	0	47	6185	-0.15	0.101	9.10	9.50	1.096	80.28	1.246	0.138
				Top Edge	0	111	6505	-0.16	0.109	9.01	9.50	1.119	80.28	1.246	0.152
				Top Edge	0	143	6665	0.00	0.095	9.14	9.50	1.086	80.28	1.246	0.129
				Top Edge	0	175	6825	-0.11	0.086	9.40	9.50	1.023	80.28	1.246	0.110
				Top Edge	0	207	6985	-0.10	0.050	9.38	9.50	1.028	80.28	1.246	0.064
		INNOWAVE	Aux.	Front Side	0	79	6345	0.08	0.082	9.45	9.50	1.012	80.28	1.246	0.103
				Back Side	0	79	6345	0.14	0.094	9.45	9.50	1.012	80.28	1.246	0.119
				Top Edge	0	79	6345	-0.16	0.163	9.45	9.50	1.012	80.28	1.246	0.206
				Top Edge	0	15	5025	-0.15	0.168	9.11	9.50	1.094	80.28	1.246	0.229
				Top Edge	0	47	6185	-0.02	0.146	9.10	9.50	1.096	80.28	1.246	0.199
				Top Edge	0	111	6505	-0.07	0.192	9.01	9.50	1.119	80.28	1.246	0.268
				Top Edge	0	143	6665	-0.05	0.087	9.14	9.50	1.086	80.28	1.246	0.118
				Top Edge	0	175	6825	-0.13	0.106	9.40	9.50	1.023	80.28	1.246	0.135
				Top Edge	0	207	6985	0.01	0.101	9.38	9.50	1.028	80.28	1.246	0.129
		HUBBLE	Main	Front Side	0	15	6025	-0.07	0.138	9.49	9.50	1.002	80.28	1.246	0.172
				Back Side	0	15	6025	0.15	0.269	9.49	9.50	1.002	80.28	1.246	0.336
				Top Edge	0	15	6025	-0.09	0.082	9.49	9.50	1.002	80.28	1.246	0.102
				Back Side	0	47	6185	-0.06	0.250	9.34	9.50	1.038	80.28	1.246	0.323
				Back Side	0	79	6345	0.05	0.182	9.39	9.50	1.026	80.28	1.246	0.233
				Back Side	0	111	6505	-0.10	0.212	9.38	9.50	1.028	80.28	1.246	0.272
				Back Side	0	143	6665	-0.07	0.115	9.00	9.50	1.122	80.28	1.246	0.161
				Back Side	0	175	6825	-0.14	0.121	9.48	9.50	1.005	80.28	1.246	0.152
				Back Side	0	207	6985	-0.14	0.088	9.03	9.50	1.114	80.28	1.246	0.122
		INNOWAVE	Main	Front Side	0	15	6025	0.14	0.118	9.49	9.50	1.002	80.28	1.246	0.147
				Back Side	0	15	6025	-0.13	0.241	9.49	9.50	1.002	80.28	1.246	0.301
				Top Edge	0	15	6025	0.00	0.086	9.49	9.50	1.002	80.28	1.246	0.107
				Back Side	0	47	6185	-0.14	0.299	9.34	9.50	1.038	80.28	1.246	0.387
				Back Side	0	79	6345	0.19	0.153	9.39	9.50	1.026	80.28	1.246	0.196
				Back Side	0	111	6505	-0.13	0.208	9.38	9.50	1.028	80.28	1.246	0.266

				Back Side	0	143	6665	-0.07	0.090	9.00	9.50	1.122	80.28	1.246	0.126
				Back Side	0	175	6825	0.00	0.104	9.48	9.50	1.005	80.28	1.246	0.130
				Back Side	0	207	6985	0.04	0.068	9.03	9.50	1.114	80.28	1.246	0.094

Note:

1. In the testing process of front and back, because the structure of the handle would make the antenna position of the test sample unable to be close to the model basin, the handle test was removed in order to better simulate the actual use scenario.

2. Use factory test mode to control the power, and the power when the handle is removed is consistent with the power when the handle is put on.

3. Refer to ANNEX C for the detailed test data for each test configuration.

9.4 WIFI 6GHz PD (Strap Handle)

Fre. Band	Mode	Antenna Manufacturer	Antenn a	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift(dB)	Meas Total psPD [W/m2]	Meas. Power (dBm)	Max. tune-up power(d Bm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	Meas. uncertai nty Scaling Factor	Scaled Total psPD [W/m2]	Meas. No.
Body																	
6G	802.11 ax (HE160)	INNOWAVE	Aux.	Front Side	2	79	6345	-0.17	/	9.45	9.50	1.012	80.28	1.246	1.545	/	/
				Back Side	2	79	6345	-0.02	/	9.45	9.50	1.012	80.28	1.246	1.545	/	/
				Top Edge	2	79	6345	0.11	0.437	9.45	9.50	1.012	80.28	1.246	1.545	0.851	/
				Top Edge	2	15	5025	-0.16	0.541	9.11	9.50	1.094	80.28	1.246	1.545	1.139	3#
				Top Edge	2	47	6185	-0.02	/	9.10	9.50	1.096	80.28	1.246	1.545	/	/
				Top Edge	2	111	6505	0.12	0.333	9.01	9.50	1.119	80.28	1.246	1.545	0.717	/
				Top Edge	2	143	6665	-0.12	/	9.14	9.50	1.086	80.28	1.246	1.545	/	/
				Top Edge	2	175	6825	0.01	0.341	9.40	9.50	1.023	80.28	1.246	1.545	0.672	/
				Top Edge	2	207	6985	-0.02	0.325	9.38	9.50	1.028	80.28	1.246	1.545	0.643	/
		INNOWAVE	Main	Front Side	2	15	6025	-0.08	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Back Side	2	15	6025	-0.05	/	9.49	9.50	1.002	80.28	1.246	1.545	/	/
				Top Edge	2	15	6025	0.12	0.905	9.49	9.50	1.002	80.28	1.246	1.545	1.746	/
				Back Side	2	47	6185	-0.17	1.140	9.34	9.50	1.038	80.28	1.246	1.545	2.278	4#
				Back Side	2	79	6345	0.03	/	9.39	9.50	1.026	80.28	1.246	1.545	/	/
				Back Side	2	111	6505	-0.1	0.782	9.38	9.50	1.028	80.28	1.246	1.545	1.548	/
				Back Side	2	143	6665	0.01	/	9.00	9.50	1.122	80.28	1.246	1.545	/	/
				Back Side	2	175	6825	-0.15	0.412	9.48	9.50	1.005	80.28	1.246	1.545	0.797	/
				Back Side	2	207	6985	0.02	0.273	9.03	9.50	1.114	80.28	1.246	1.545	0.585	/
Note:																	
1. In the testing process of front and back, because the structure of the handle would make the antenna position of the test sample unable to be close to the model basin, the handle test was removed in order to better simulate the actual use scenario.																	
2. Use factory test mode to control the power, and the power when the handle is removed is consistent with the power when the handle is put on.																	
3. Refer to ANNEX C for the detailed test data for each test configuration.																	

Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Grid Step(λ)	Ch.	IPDn	IPD ratio (≥1)
802.11 ax(HE160)	INNOWAVE	Main	Back Side	2	0.0625	47	1.14	3.07
802.11 ax(HE160)	INNOWAVE	Main	Back Side	12.13	0.0625	47	0.562	

10 SIMULTANEOUS TRANSMISSION

The fields generated by the antennas can be correlated or uncorrelated. At different frequencies, fields are always uncorrelated, and the aggregate power density contributions can be summed according to spatially averaged values of corresponding sources at any point in space, r , to determine the total exposure ratio (TER). Assuming I sources, the TER at each point in space is equal to

$$TER^{uncorr}(r) = \sum_{i=1}^I ER_i = \sum_{i=1}^I \frac{S_{av,i}(r, f_i)}{S_{lim}(f_i)}$$

Where $S_{av,i}$ is the power density for the source I operating at a frequency f_i and S_{lim} is the power density limit as specified by the relevant standard.

Exposure from transmitters operating above and below 6GHz, where 6GHz denotes the transmission frequency where the basic restrictions change from being defined in terms of SAR to being defined in terms of power density, therefore uncorrelated and the TER is determined as

$$TER^{uncorr}(r) = \sum_{i=1}^I ER_i = \sum_{i=1}^I \frac{S_{av,i}(r, f_i)}{S_{lim}(f_i)}$$

According to the FCC guidance in TCBC workshop and IEC TR 63170, the total exposure ratio calculated by taking ratio of maximum reported SAR divided by SAR limit and adding it to maximum measured power density by its limit. Numerical sum of the ratios should be less or equal to 1. Therefore the simultaneous transmission should be follows:

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_{n,limit}} + \sum_{n=1}^N \frac{S_{m,avg}}{S_{m,limit}} < 1$$

10.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Body
1	Bluetooth(MT7922A12L) + WLAN 6GHz (Antenna Auxiliary)+WLAN 6GHz (Antenna Main) + Bluetooth(AC6956C)	Yes

Note:

1. When stand-alone SAR is not required for a side of antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.
2. The maximum SAR summation is calculated based on the same configuration and test position.
3. The simultaneous transmission combinations of the more antennas contain combinations of less antennas, so only the worst simultaneous transmission combinations is shown in this report.
4. The maximum SAR of Bluetooth refers to the SAR report BL-EC2370717-703.

10.2 RF Exposure Simultaneous Transmission Evaluation

10.2.1 Highest Bluetooth and WLAN Body Exposure Ratio Simultaneous Transmission

State	Position		Highest Exposure Ratio(SAR&PD)				Total Exposure Ratio
			1	2	3	4	
			Bluetooth (MT7922A12L)	WLAN 6GHz (Antenna Auxiliary)	WLAN 6GHz (Antenna Main)	Bluetooth (AC6956C)	Sum SAR (1+2+3+4)
Body	Tablet	Front Side	0.198	0.114	0.091	0.005	0.408
		Back Side	0.143	0.163	0.228	0.005	0.539
		Left Edge	0.391	0.602	0.000	0.000	0.993
		Left Edge Tilt	0.341	0.322	0.000	0.000	0.663
		Right Edge	0.000	0.000	0.665	0.008	0.673
		Right Edge Tilt	0.000	0.000	0.616	0.011	0.627
		Top Edge	0.208	0.191	0.070	0.000	0.469

Note:

1. The maximum exposure ratio of Bluetooth refer to the SAR report BL-EC2370717-703.
2. The highest Total Exposure Ratio is $0.859 < 1.0$, so Simultaneous Transmission SAR test is not required.

11 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test System	Speag	cDASY6 mmWave	V2.4.2.62	N/A	N/A
Verification Source	Speag	10GHz	SN: 2010	2023/6/19	2024/6/18
EUmmW Probe	Speag	EUmmWV4	SN: 9565	2023/2/21	2024/2/20
Data Acquisition Electronicsr	Speag	DAE4	SN: 878	2023/03/23	2024/03/22
Signal Generator	R&S	SMB100A	177746	2023/05/10	2024/05/09
Power Meter	R&S	NRVD-B2	835843/014	2022/09/06	2023/09/05
Power Sensor	R&S	NRV-Z4	100381	2022/09/06	2023/09/05
Power Sensor	R&S	NRV-Z2	100211	2022/09/06	2023/09/05
Thermometer	Elitech	RC-4HC	EF7216002985	2022/11/18	2023/11/17
Power Amplifier	mini-circuits	ZVA-183W-S+	505102223	N/A	N/A

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the users manual and calibration facility recommendation.

Date	Freq. (GHz)	Meas. Forward Power (dBm)	Measured PD 4 cm ² (W/m ²)	Normalized PD 4 cm ² (W/m ²)	Target Forward PD 4 cm ² (W/m ²)	Deviation (dB)
2023.08.11	10	21.50	158.00	177.30	177.00	0.01
2023.08.12	10	21.50	163.00	182.90	177.00	0.14

Note1: The tolerance limit of System validation ± 0.66 dB.

Note2: According the verification source 10GHz calibration report the target forward power is 22.00dBm.

Note3: Normalized PD 4 cm²= Measured PD 4 cm² *10[^](0.1*(Target Forward power- Meas. Forward Power))

System Performance Check Data (10GHz)

Measurement Report for Device

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
5G Verification Source 10GHz, SPEAG	100.0 x 100.0 x 130.0	5G Verification Source 10GHz

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	Front, 10.00	10000.0Validation band, 10000	1.0	22.4

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1- 55GHz, 2023-02-21	DAE4 Sn878, 2023-03- 23

Scan Setup

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-11
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	157
psPDtot+ [W/m ²]	158
psPDmod+ [W/m ²]	163
E _{max} [V/m]	195
Power Drift [dB]	0.02

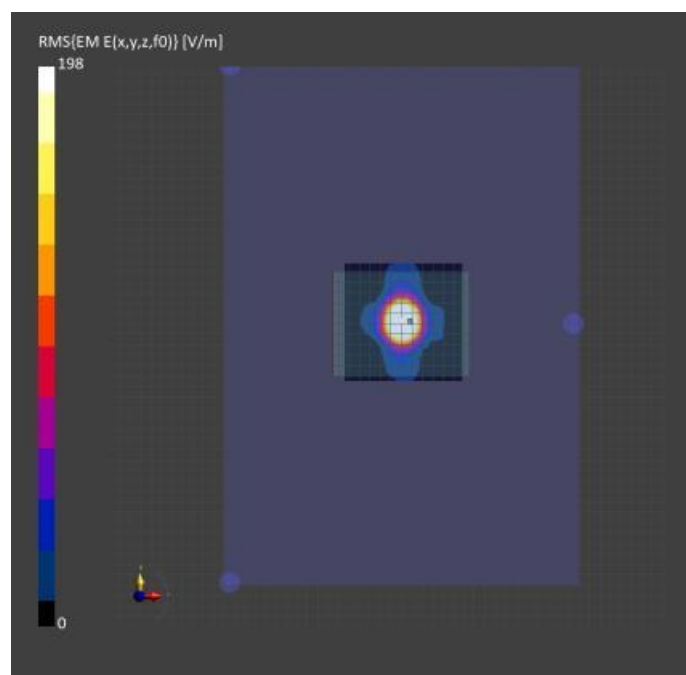

System Performance Check Data (10GHz)

Measurement Report for Device

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
5G Verification Source 10GHz, SPEAG	100.0 x 100.0 x 130.0	5G Verification Source 10GHz

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	Front, 10.00	10000.0Validation band, 10000	1.0	22.2

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1- 55GHz, 2023-02-21	DAE4 Sn878, 2023-03- 23

Scan Setup

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	162
psPDtot+ [W/m ²]	163
psPDmod+ [W/m ²]	165
E _{max} [V/m]	287
Power Drift [dB]	0.02

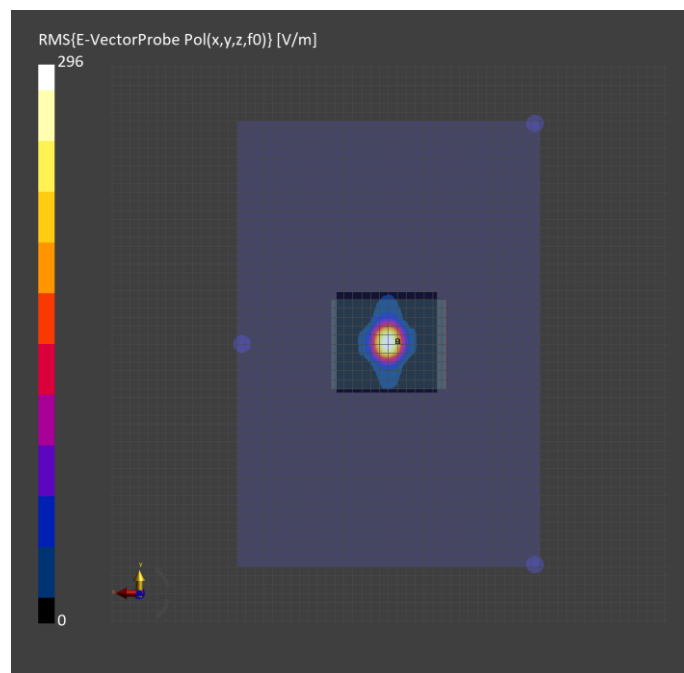

ANNEX B POWER DENSITY TEST DATA

Meas.1 Body Plane with Left Edge 2mm on 111 Channel in IEEE 802.11ax160 mode with Antenna Aux

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
N76080AA1(X80)	130.0 x 210.0 x 20.0	PAD

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	EDGE LEFT, 0.00	6505.0U-NII-6, 111	1.0	22.4

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1-55GHz, 2023-02-21	DAE4 Sn878, 2023-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-11
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.81
psPDtot+ [W/m ²]	2.17
psPDmod+ [W/m ²]	2.34
E _{max} [V/m]	38.3
Power Drift [dB]	-0.02

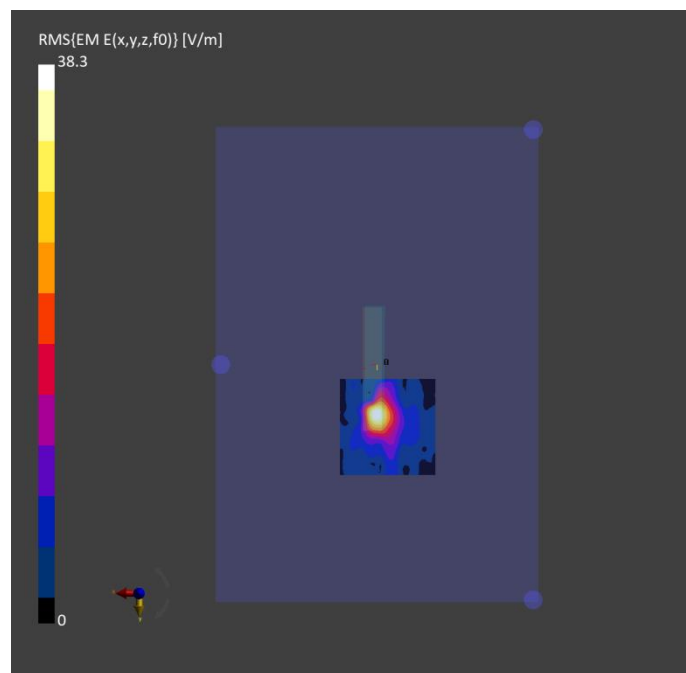

Meas.2 Body Plane with Right Edge 2mm on 111 Channel in IEEE 802.11ax160 mode with Antenna Main

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
N76080AA1(X80)	130.0 x 210.0 x 20.0	PAD

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	EDGE RIGHT, 0.00	6505.0U-NII-6, 111	1.0	22.4

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1-55GHz, 2023-02-21	DAE4 Sn878, 2023-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-11
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.96
psPDtot+ [W/m ²]	2.25
psPDmod+ [W/m ²]	2.48
E _{max} [V/m]	46.5
Power Drift [dB]	0.13

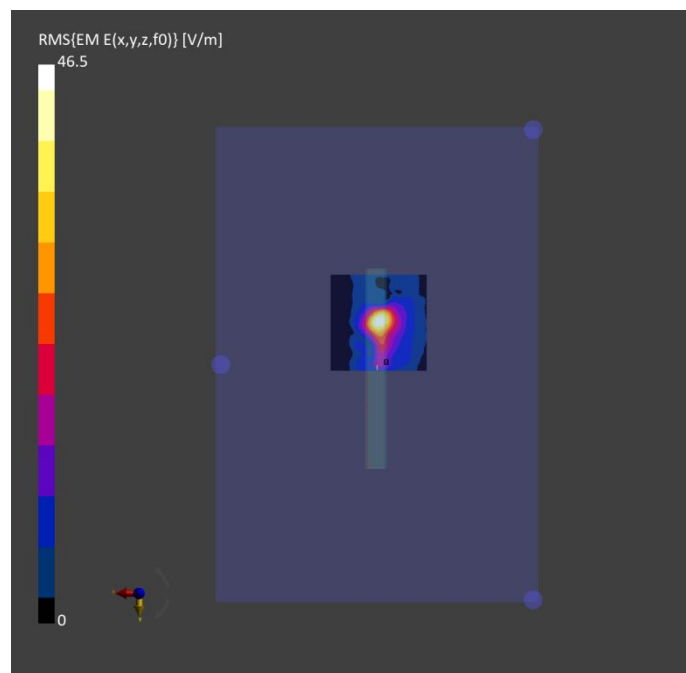

Meas.3 Body Plane with Top Edge 2mm on 15 Channel in IEEE 802.11ax160 mode with Antenna Aux**Device under Test Properties**

Model, Manufacturer	Dimensions [mm]	DUT Type
N76080AA1(X80)	210.0 x 130.0 x 20.0	PAD

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	EDGE TOP, 2.00	6025.0U-NII-5, 15	1.0	22.2

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1-55GHz, 2023-02-21	DAE4 Sn878, 2023-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.485
psPDtot+ [W/m ²]	0.541
psPDmod+ [W/m ²]	0.631
E _{max} [V/m]	19.5
Power Drift [dB]	-0.16

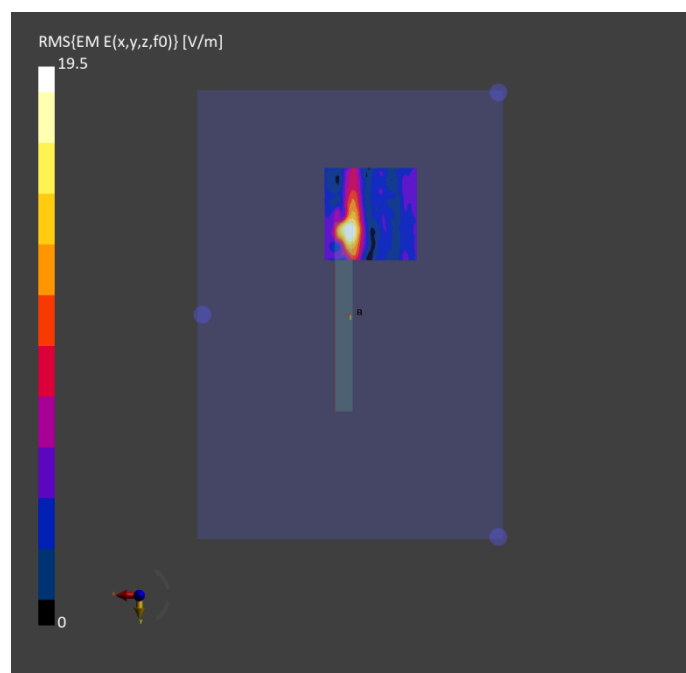

Meas.4 Body Plane with Back Side 2mm on 47 Channel in IEEE 802.11ax160 mode with Antenna Main**Device under Test Properties**

Model, Manufacturer	Dimensions [mm]	DUT Type
N76080AA1(X80)	210.0 x 130.0 x 20.0	PAD

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	Ambient temperature[°C]
5G Air	BACK SIDE, 2.00	6185.0U-NII-5, 47	1.0	22.2

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1083	---Air	EUmmWV4 - SN9565_F1-55GHz, 2023-02-21	DAE4 Sn878, 2023-03-23

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2023-08-12
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.909
psPDtot+ [W/m ²]	1.14
psPDmod+ [W/m ²]	1.26
E _{max} [V/m]	30.9
Power Drift [dB]	-0.17

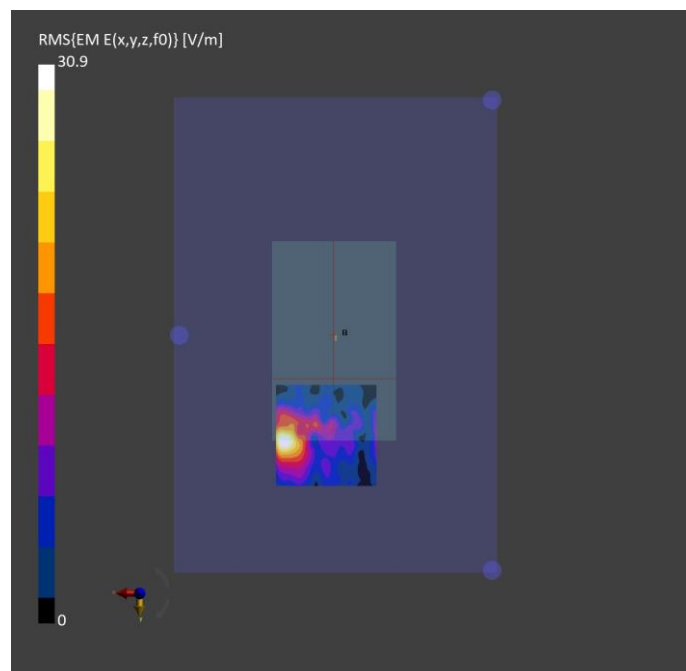

ANNEX C POWER DENSITY TEST SETUP PHOTOS

Please refer the document “BL-EC2370717-AS-2.pdf”.

ANNEX D POWER DENSITY CALIBRATION REPORT

Please refer the document “BL-EC2370717-AC-2.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--