

## Test Report

Applicant : MediaTek Inc.  
Applicant Address : No. 1, Dusing 1st Rd. Hsinchu Science Park Hsinchu City Taiwan 30078  
Product Name : 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card  
Trade Name : MediaTek  
Model Number : MT7922A22M  
Applicable Standard : 47 CFR Part §2.1093  
Received Date : Mar. 11, 2022  
Test Period : Mar. 24 ~ Mar. 30, 2022  
Issued Date : Apr. 15, 2022

Issued by

Approved By :

\_\_\_\_\_  
(Kris Pan)

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Test Firm MRA designation number: TW0010

**Note:**

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Revision History**

| Rev. | Issue Date    | Revisions     | Revised By |
|------|---------------|---------------|------------|
| 00   | Apr. 15, 2022 | Initial Issue | Nicole Chu |
|      |               |               |            |
|      |               |               |            |
|      |               |               |            |

## Contents

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>1. General Information .....</b>                          | <b>4</b>  |
| 1.1 Reference Testing Standards .....                        | 4         |
| <b>2. Description of Device Under Test (DUT).....</b>        | <b>5</b>  |
| <b>3. Summary of Maximum Value .....</b>                     | <b>7</b>  |
| <b>4. Introduction .....</b>                                 | <b>8</b>  |
| 4.1 SAR Definition .....                                     | 8         |
| 4.2 Power Density Definition .....                           | 8         |
| 4.3 RF Exposure Limits .....                                 | 9         |
| <b>5. System Description .....</b>                           | <b>10</b> |
| 5.1 SAR Measurement System .....                             | 10        |
| 5.2 Tissue Simulating Liquids (TSL) .....                    | 14        |
| 5.3 Power Density Measurement System .....                   | 18        |
| <b>6. System Verification .....</b>                          | <b>22</b> |
| 6.1 SAR System Verification .....                            | 22        |
| 6.2 Power Density System Verification .....                  | 23        |
| <b>7. Test Equipment List .....</b>                          | <b>26</b> |
| 7.1 SAR Test Equipment List .....                            | 26        |
| <b>8. Measurement Procedure .....</b>                        | <b>27</b> |
| 8.1 SAR Measurement Procedure .....                          | 27        |
| 8.2 Power Density Measurement Procedure .....                | 30        |
| <b>9. Measurement Uncertainty .....</b>                      | <b>31</b> |
| 9.1 SAR Measurement Uncertainty .....                        | 31        |
| 9.2 Power Density Measurement Uncertainty .....              | 34        |
| <b>10. Measurement Evaluation .....</b>                      | <b>35</b> |
| 10.1 Positioning of the DUT in Relation to the Phantom ..... | 35        |
| 10.2 SAR Testing with RF Transmitter .....                   | 36        |
| 10.3 Conducted Power Measurements .....                      | 37        |
| 10.4 Antenna location .....                                  | 37        |
| 10.5 Test Results .....                                      | 38        |
| 10.6 SAR Measurement Variability .....                       | 44        |
| 10.7 Simultaneous Transmission Evaluation .....              | 45        |
| 10.8 Requirements on the Uncertainty Evaluation .....        | 49        |
| <b>11. Conclusion .....</b>                                  | <b>49</b> |

**Appendix A - Conducted Power Measurements**

**Appendix B - System Performance Check Plots**

**Appendix C - Highest Measurement Plots**

**Appendix D - Calibration Certificates**

**Appendix E - Test Setup Photographs**

## 1. General Information

### 1.1 Reference Testing Standards

| Standard            | Description                                                                                                                                                                                                                                                                     | Version |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 47 CFR Part §2.1093 | Radiofrequency radiation exposure evaluation: portable devices                                                                                                                                                                                                                  | -       |
| IEC TR 63170        | Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz                                                                                           | 2018    |
| IEC/IEEE 62209-1528 | Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz) | 2020    |
| IEEE 1528           | Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques                                                                                                                              | 2013    |
| IEEE C95.1          | IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz                                                                                                                                               | 1992    |
| KDB 248227 D01      | SAR guidance for IEEE 802.11 (Wi-Fi) transmitters                                                                                                                                                                                                                               | v02r02  |
| KDB 447498 D04      | RF exposure procedures and equipment authorization policies for mobile and portable devices                                                                                                                                                                                     | v01     |
| KDB 616217 D04      | SAR evaluation considerations for laptop, notebook and tablet computers                                                                                                                                                                                                         | v01r02  |
| KDB 865664 D01      | SAR measurement requirement for 100 MHz to 6 GHz                                                                                                                                                                                                                                | v01r04  |
| KDB 865664 D02      | RF exposure compliance reporting and documentation considerations                                                                                                                                                                                                               | v01r02  |

## 2. Description of Device Under Test (DUT)

|                       |                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant             | MediaTek Inc.<br>No. 1, Dusing 1st Rd. Hsinchu Science Park Hsinchu City Taiwan 30078                                                                                                                                                                                                                                                                                                      |
| Product Name          | 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card                                                                                                                                                                                                                                                                                                                                                |
| Trade Name            | MediaTek                                                                                                                                                                                                                                                                                                                                                                                   |
| Model Number          | MT7922A22M                                                                                                                                                                                                                                                                                                                                                                                 |
| SN No.                | N2NTCVN0048407B                                                                                                                                                                                                                                                                                                                                                                            |
| FCC ID                | RAS-MT7922A22M                                                                                                                                                                                                                                                                                                                                                                             |
| Host Information      | Product Name: Zenbook<br>Trade Name: ASUS<br>Model Name: UN5401R, RN5401R<br>All models are electrically identical, different model names are for marketing purpose.                                                                                                                                                                                                                       |
| Frequency Range       | WLAN 2.4 GHz Band : 2412 - 2472 MHz<br>WLAN 5.2 GHz Band : 5180 - 5240 MHz<br>WLAN 5.3 GHz Band : 5260 - 5320 MHz<br>WLAN 5.6 GHz Band : 5500 - 5720 MHz<br>WLAN 5.8 GHz Band : 5745 - 5825 MHz<br>WLAN 6.2 GHz Band : 5955 - 6415 MHz<br>WLAN 6.5 GHz Band : 6435 - 6515 MHz<br>WLAN 6.7 GHz Band : 6535 - 6855 MHz<br>WLAN 7.0 GHz Band : 6875 - 7115 MHz<br>Bluetooth : 2402 - 2480 MHz |
| Supported Modulations | WLAN 2.4 GHz : 802.11 b / g / n / ax<br>HT20 / HT40 / VHT20 / VHT40 / HE20 / HE40                                                                                                                                                                                                                                                                                                          |
|                       | WLAN 5 GHz : 802.11 a / n / ac / ax<br>HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HE20 / HE40 / HE80 / HE160                                                                                                                                                                                                                                                                           |
|                       | WLAN 6 GHz : 802.11 a / ax<br>HE20 / HE40 / HE80 / HE160                                                                                                                                                                                                                                                                                                                                   |
|                       | Bluetooth : BR / EDR / LE                                                                                                                                                                                                                                                                                                                                                                  |
| Device Category       | Portable Device                                                                                                                                                                                                                                                                                                                                                                            |

Note:

- The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

**Antenna list:**

| Antenna Source | ANT     | Manufacturer | Part No.(Vendor) | Type         | Frequency   | Max. Gain (dBi) |       |
|----------------|---------|--------------|------------------|--------------|-------------|-----------------|-------|
|                |         |              |                  |              |             | NB              | PAD   |
| 1              | Chain 0 | AWAN         | AML6Y-100117     | PIFA Antenna | 2402 - 2480 | -0.49           | -1.09 |
|                |         |              |                  |              | 5150 - 5250 | 3.29            | 2.21  |
|                |         |              |                  |              | 5250 - 5350 | 3.39            | 1.89  |
|                |         |              |                  |              | 5470 - 5725 | 4.03            | 2.83  |
|                |         |              |                  |              | 5725 - 5850 | 4.23            | 3.07  |
|                |         |              |                  |              | 5925 - 6425 | 3.76            | 2.43  |
|                |         |              |                  |              | 6425 - 6525 | 2.03            | -0.59 |
|                |         |              |                  |              | 6525 - 6875 | 2.03            | 0.30  |
|                |         |              |                  |              | 6875 - 7125 | 2.56            | 0.34  |
|                | Chain 1 | AWAN         | AML6Y-100118     | PIFA Antenna | 2402 - 2480 | 0.74            | -1.40 |
|                |         |              |                  |              | 5150 - 5250 | 3.26            | -0.30 |
|                |         |              |                  |              | 5250 - 5350 | 3.26            | -0.20 |
|                |         |              |                  |              | 5470 - 5725 | 3.12            | 1.48  |
|                |         |              |                  |              | 5725 - 5850 | 3.78            | 1.87  |
|                |         |              |                  |              | 5925 - 6425 | 3.54            | 1.45  |
|                |         |              |                  |              | 6425 - 6525 | 2.42            | -0.60 |
|                |         |              |                  |              | 6525 - 6875 | 1.96            | 0.08  |
|                |         |              |                  |              | 6875 - 7125 | 2.15            | 1.29  |
| 2              | Chain 0 | INPAQ        | MDA-LE-02-002    | PIFA Antenna | 2402 - 2480 | 1.59            | -0.34 |
|                |         |              |                  |              | 5150 - 5250 | 3.54            | 3.55  |
|                |         |              |                  |              | 5250 - 5350 | 3.67            | 3.12  |
|                |         |              |                  |              | 5470 - 5725 | 4.13            | 3.05  |
|                |         |              |                  |              | 5725 - 5850 | 4.24            | 3.78  |
|                |         |              |                  |              | 5925 - 6425 | 4.77            | 2.78  |
|                |         |              |                  |              | 6425 - 6525 | 2.62            | 1.01  |
|                |         |              |                  |              | 6525 - 6875 | 4.45            | 2.20  |
|                |         |              |                  |              | 6875 - 7125 | 4.45            | 1.53  |
|                | Chain 1 | INPAQ        | MDA-LE-01-002    | PIFA Antenna | 2402 - 2480 | 2.01            | -0.90 |
|                |         |              |                  |              | 5150 - 5250 | 3.60            | 0.55  |
|                |         |              |                  |              | 5250 - 5350 | 3.54            | 0.55  |
|                |         |              |                  |              | 5470 - 5725 | 4.76            | 3.16  |
|                |         |              |                  |              | 5725 - 5850 | 4.89            | 3.30  |
|                |         |              |                  |              | 5925 - 6425 | 4.04            | 2.26  |
|                |         |              |                  |              | 6425 - 6525 | 3.87            | -0.22 |
|                |         |              |                  |              | 6525 - 6875 | 4.13            | 4.24  |
|                |         |              |                  |              | 6875 - 7125 | 3.87            | 2.95  |

Note :

- Antenna Source 1 (AWAN antenna) and Antenna Source 2 (INPAQ antenna) are the same type of antenna, only different in manufacturer.
- The Chain 1 is connected to AUX port / Chain 0 is connected to Main port of module.

### 3. Summary of Maximum Value

| Equipment Class | Mode                  | Highest Reported SAR                     |                                      | Highest Reported SAR                     |                                      |
|-----------------|-----------------------|------------------------------------------|--------------------------------------|------------------------------------------|--------------------------------------|
|                 |                       | Tablet/SKU 1                             |                                      | Notebook/SKU 2                           |                                      |
|                 |                       | Body standalone SAR <sub>1g</sub> (W/kg) | Simultaneous Transmission SAR (W/kg) | Body standalone SAR <sub>1g</sub> (W/kg) | Simultaneous Transmission SAR (W/kg) |
| DTS             | WLAN 2.4 GHz ANT Main | 1.06                                     | 1.29                                 | 1.06                                     | 1.29                                 |
|                 | WLAN 2.4 GHz ANT Aux  | 1.16                                     |                                      | 1.16                                     |                                      |
| NII             | WLAN 5 GHz ANT Main   | 1.01                                     | 1.39                                 | 0.73                                     | 1.39                                 |
|                 | WLAN 5 GHz ANT Aux    | 0.98                                     |                                      | 0.66                                     |                                      |
| 6XD             | WLAN 6 GHz ANT Main   | 0.25                                     | 0.69                                 | 0.25                                     | 0.58                                 |
|                 | WLAN 6 GHz ANT Aux    | 0.32                                     |                                      | 0.10                                     |                                      |
| DSS / DTS       | Bluetooth ANT Aux     | 0.27                                     | 1.29                                 | 0.23                                     | 1.29                                 |

| Equipment Class | Mode       | Highest Simultaneous Transmission |
|-----------------|------------|-----------------------------------|
|                 |            | Total Exposure Ratio              |
| 6XD             | WLAN 6 GHz | 0.62                              |

Note:

- The SAR limit for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
- The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 were employed and they specify the maximum exposure limit of tissue for portable devices being used within 20 cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.
- The evaluation requirements, as described in 47 CFR Part §1.310 were employed and they specify the maximum exposure limit for general population / uncontrolled exposure is 1.0 mW/cm<sup>2</sup> (equal to 10 W/m<sup>2</sup>) for 1.5 GHz to 100 GHz.
- According to the TCB Workshop Oct. 2018 notes, the average power density results are presented using averaging areas of 4 cm<sup>2</sup>.
- Total exposure ratio (TER) calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit. Numerical sum of the two ratios should be less than 1.
- This device has two kinds of SKU, SKU 1 is 360 convertible laptop computer, SKU 2 is laptop only. All circuit designs, circuit board and other related designs are electrically identical.

## 4. Introduction

### 4.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dw}{dm} \right) = \frac{d}{dt} \left( \frac{dw}{\rho dv} \right)$$

SAR measurement can be related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = RMS electric field strength (V/m)

SAR is expressed in units of Watts per kilogram (W/kg).

### 4.2 Power Density Definition

Power density (PD) is defined as the rates of energy transfer per area for an electromagnetic field.

According to the IEC TR 63170, the following formula is used to determine the local power density:

$$\mathbf{S} = \frac{1}{2} \Re(\mathbf{E} \times \mathbf{H}) \cdot \hat{n}$$

And the spatial-average power density distribution on the evaluate surface is determined as the following equation:

$$\mathbf{S}_{av} = \frac{1}{2A} \Re \cdot \left( \int \mathbf{E} \times \mathbf{H} \cdot \hat{n} dA \right)$$

Where:

$E$  is the complex electric field peak phasor and  $H$  is the complex conjugate magnetic field peak phasor, respectively.  $A$  is the spatial average area specified by the applicable exposure or regulatory requirement.

Power density is expressed in unit of watt per square meter (W/m<sup>2</sup>).

### 4.3 RF Exposure Limits

Table 1 Safety Limits for Controlled / Uncontrolled Environment Exposure

| SAR Exposure Limit                                               |                                                                                     |                                                                |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------|
|                                                                  | General Population /<br>Uncontrolled Exposure <sup>1</sup><br>(W/kg)                | Occupational /<br>Controlled Exposure <sup>2</sup><br>(W/kg)   |
| Spatial Peak SAR <sup>3</sup><br>(head or Body)                  | 1.60                                                                                | 8.00                                                           |
| Spatial Peak SAR <sup>4</sup><br>(Whole Body)                    | 0.08                                                                                | 0.40                                                           |
| Spatial Peak SAR <sup>5</sup><br>(Hands / Feet / Ankle / Wrist ) | 4.00                                                                                | 20.00                                                          |
| Power Density Exposure Limit<br>(1,500 - 100,000 MHz)            |                                                                                     |                                                                |
|                                                                  | General Population /<br>Uncontrolled Exposure<br>(mW/cm <sup>2</sup> ) <sup>6</sup> | Occupational /<br>Controlled Exposure<br>(mW/cm <sup>2</sup> ) |
| Power Density (S)                                                | 1.0                                                                                 | 5.0                                                            |


Notes :

- General Population / Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.
- Occupational / Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
- The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- The Spatial Average value of the SAR averaged over the whole body.
- The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 1 mW/cm<sup>2</sup> = 10 W/m<sup>2</sup>.

## 5. System Description

### 5.1 SAR Measurement System

The DASY6 system in cDASY6/DASY5 V5.2 SAR Configuration is shown below:

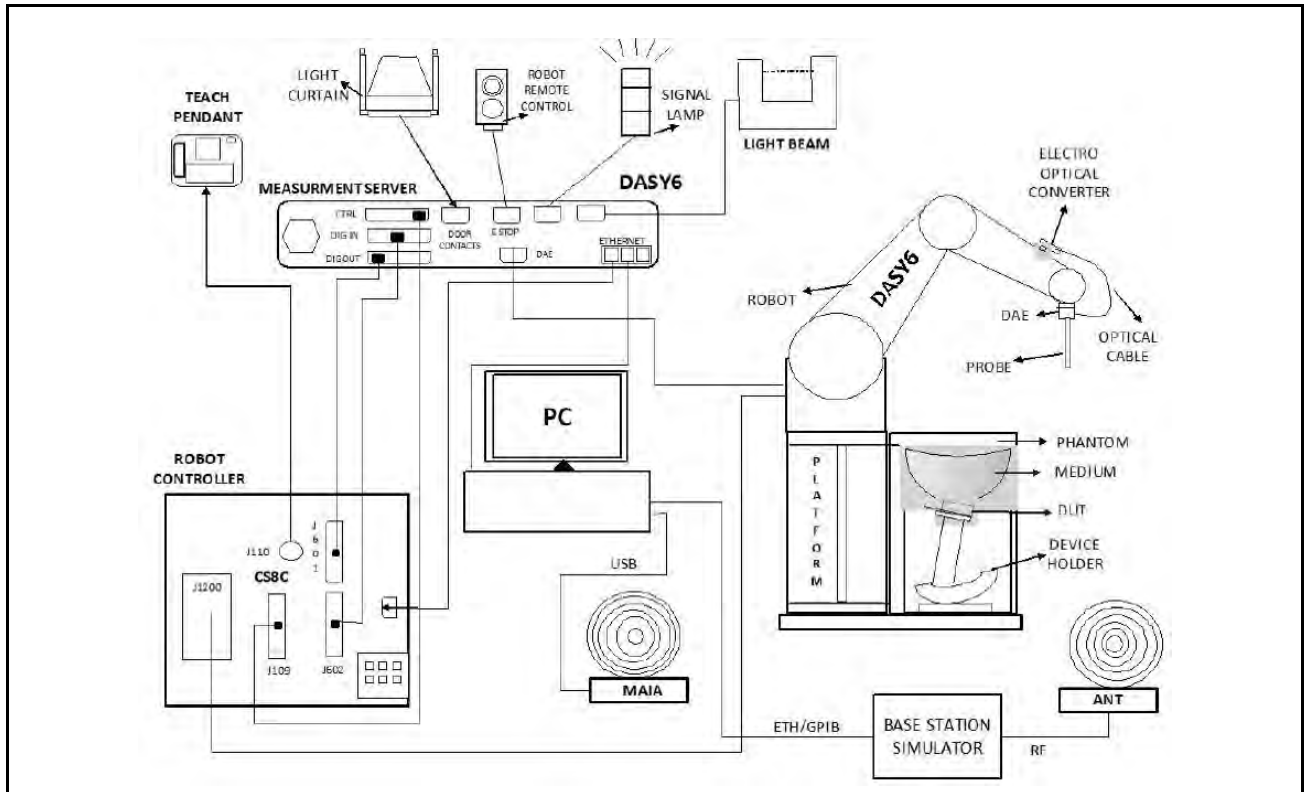

The system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. An isotropic field probe optimized and calibrated for the targeted measurements.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
7. A computer running Win7/Win8/Win10 professional operating system and the cDASY6 and DASY5 V5.2 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The phantom, the device holder and other accessories according to the targeted measurement.
10. Tissue simulating liquid mixed according to the given recipes.
11. The validation dipole has been calibrated within and the system performance check has been successful.

### <DASY E-Field Probe System>

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

|                                                                                                                                                                                       |                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>                                                                                                                                                                   | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| <b>Frequency</b>                                                                                                                                                                      | 4 MHz to 10 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 10 GHz)                                                                                               |
| <b>Directivity</b>                                                                                                                                                                    | $\pm 0.1$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                     |
| <b>Dimensions</b>                                                                                                                                                                     | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |
| <b>Calibration</b>                                                                                                                                                                    | ISO/IEC 17025 calibration service available                                                                                                                 |
| <div>   </div> |                                                                                                                                                             |
| <div> <div>EX3DV4 E-Field Probe</div> <div>Probe setup on robot</div> </div>                                                                                                          |                                                                                                                                                             |

#### <Data Acquisition Electronic (DAE) System>

|                             |                                                                                                                                                                                                                                                     |                                                                                     |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE4                                                                                                                                                                                                                                                |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                     |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)                                                                                                                                                                            |                                                                                     |
| <b>Input Offset Voltage</b> | < 5 $\mu$ V (with auto zero)                                                                                                                                                                                                                        |                                                                                     |
| <b>Input Bias Current</b>   | < 50 fA                                                                                                                                                                                                                                             |                                                                                     |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                     |

#### <Robot>

|                       |                         |                                                                                      |
|-----------------------|-------------------------|--------------------------------------------------------------------------------------|
| <b>Positioner</b>     | Stäubli Unimation Corp. |  |
| <b>Robot Model</b>    | TX90XL                  |                                                                                      |
| <b>Number of Axes</b> | 6                       |                                                                                      |
| <b>Nominal Load</b>   | 5 kg                    |                                                                                      |
| <b>Reach</b>          | 1450 mm                 |                                                                                      |
| <b>Repeatability</b>  | $\pm$ 0.035 mm          |                                                                                      |

#### <Device Holder>

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Device Holder 1                                                                     | Device Holder 2                                                                      |


### <Oval Flat Phantom – ELI>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528, IEC 62209-2 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

|                        |                            |                                                                                    |
|------------------------|----------------------------|------------------------------------------------------------------------------------|
| <b>Shell Thickness</b> | 2 ±0.2 mm                  |  |
| <b>Filling Volume</b>  | Approx. 30 liters          |                                                                                    |
| <b>Dimensions</b>      | 190×600×400 mm (H × L × W) |                                                                                    |

### <SAM Phantom>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528, IEC 62209-1 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
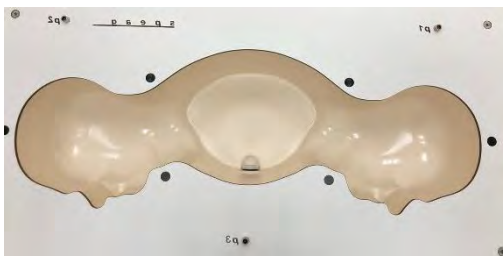
|                        |                                                             |                                                                                      |
|------------------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Shell Thickness</b> | 2 ±0.2 mm                                                   |  |
| <b>Filling Volume</b>  | Approx. 25 liters                                           |                                                                                      |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet |                                                                                      |

## 5.2 Tissue Simulating Liquids (TSL)

### <Tissue Dielectric Parameters in IEEE 1528-2013 and IEC/IEEE 62209-1528>


The following table incorporates the tissue dielectric parameters of head recommended by IEEE 1528-2013 and IEC/IEEE 62209-1528. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified are derived from the tissue dielectric parameters which computed by the 4-Cole-Cole equation according to the above-mentioned standards.

**Table 2 Dielectric properties of the tissue-equivalent liquid material**

| Frequency (MHz) | Relative Permittivity ( $\epsilon_r$ ) | Conductivity ( $\sigma$ ) |
|-----------------|----------------------------------------|---------------------------|
| 30              | 55.0                                   | 0.75                      |
| 150             | 52.3                                   | 0.76                      |
| 300             | 45.3                                   | 0.87                      |
| 450             | 43.5                                   | 0.87                      |
| 750             | 41.9                                   | 0.89                      |
| 835             | 41.5                                   | 0.90                      |
| 900             | 41.5                                   | 0.97                      |
| 1450            | 40.5                                   | 1.20                      |
| 1800            | 40.0                                   | 1.40                      |
| 1900            | 40.0                                   | 1.40                      |
| 1950            | 40.0                                   | 1.40                      |
| 2000            | 40.0                                   | 1.40                      |
| 2100            | 39.8                                   | 1.49                      |
| 2450            | 39.2                                   | 1.80                      |
| 2600            | 39.0                                   | 1.96                      |
| 3000            | 38.5                                   | 2.40                      |
| 3500            | 37.9                                   | 2.91                      |
| 4000            | 37.4                                   | 3.43                      |
| 4500            | 36.8                                   | 3.94                      |
| 5000            | 36.2                                   | 4.45                      |
| 5200            | 36.0                                   | 4.66                      |
| 5400            | 35.8                                   | 4.86                      |
| 5600            | 35.5                                   | 5.07                      |
| 5800            | 35.3                                   | 5.27                      |
| 6000            | 35.1                                   | 5.48                      |
| 6500            | 34.5                                   | 6.07                      |
| 7000            | 33.9                                   | 6.65                      |
| 7500            | 33.3                                   | 7.24                      |
| 8000            | 32.7                                   | 7.84                      |
| 8500            | 32.1                                   | 8.46                      |
| 9000            | 31.6                                   | 9.08                      |
| 9500            | 31.0                                   | 9.71                      |
| 10000           | 30.4                                   | 10.4                      |

#### <Liquid Depth>

The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm to ensure that the probe is immersed sufficiently in the tissue medium.

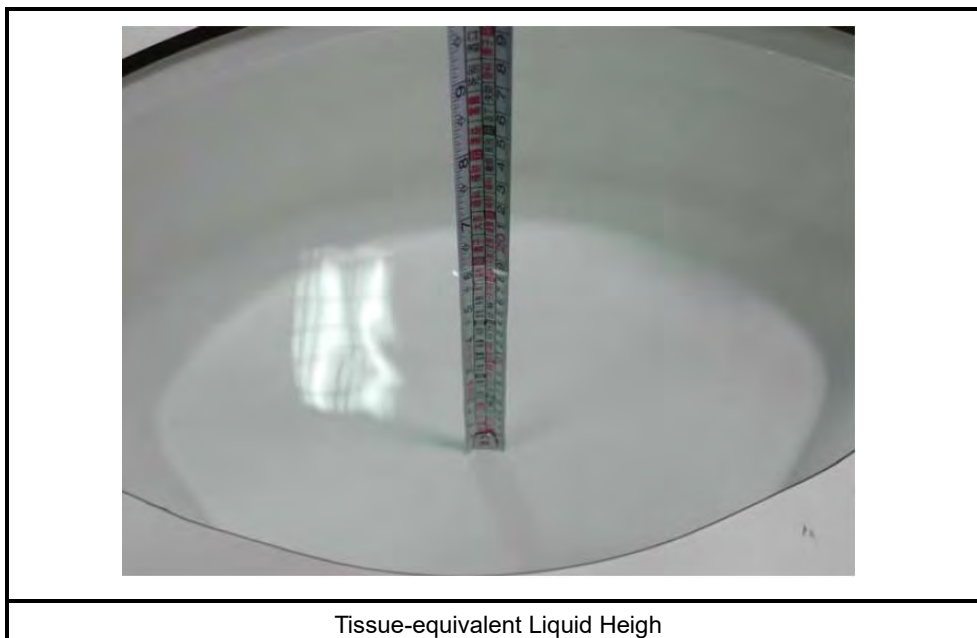

#### <Test Site Environment>

|                  |       |
|------------------|-------|
| Temperature (°C) | 21-23 |
|------------------|-------|

#### <Liquid Check>


1. The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAKS 3.5 Probe Kit.
2. The SAR testing with IEC tissue parameters as an alternative option to Head and body parameters. The head TSL were applied to body SAR tests with restrictions below:

| Tissue Temp (°C) | Head / Body | Frequency | Cond. $\sigma$ | Perm. $\epsilon_r$ | target Cond. $\sigma$ | target Perm. $\epsilon_r$ | $\sigma$ (Delta)(%) | $\epsilon_r$ (Delta)(%) | Limit (%) | Date          |
|------------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|-----------|---------------|
| 22.6             | Head        | 5180 MHz  | 4.59           | 36.61              | 4.64                  | 36.02                     | -1.10               | 1.64                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5190 MHz  | 4.61           | 36.57              | 4.65                  | 36.01                     | -0.91               | 1.57                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5200 MHz  | 4.62           | 36.53              | 4.66                  | 36.00                     | -0.79               | 1.48                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5220 MHz  | 4.65           | 36.50              | 4.68                  | 35.98                     | -0.60               | 1.45                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5230 MHz  | 4.67           | 36.47              | 4.69                  | 35.97                     | -0.50               | 1.39                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5240 MHz  | 4.68           | 36.46              | 4.70                  | 35.96                     | -0.50               | 1.39                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5250 MHz  | 4.69           | 36.45              | 4.71                  | 35.95                     | -0.41               | 1.40                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5260 MHz  | 4.70           | 36.42              | 4.72                  | 35.94                     | -0.41               | 1.32                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5270 MHz  | 4.70           | 36.41              | 4.73                  | 35.93                     | -0.56               | 1.34                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5280 MHz  | 4.71           | 36.42              | 4.74                  | 35.92                     | -0.57               | 1.39                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5290 MHz  | 4.72           | 36.44              | 4.75                  | 35.91                     | -0.74               | 1.47                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5300 MHz  | 4.72           | 36.45              | 4.76                  | 35.90                     | -0.79               | 1.52                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5310 MHz  | 4.74           | 36.46              | 4.77                  | 35.89                     | -0.63               | 1.58                    | ±5        | Mar. 24, 2022 |
| 22.6             | Head        | 5320 MHz  | 4.76           | 36.47              | 4.78                  | 35.88                     | -0.47               | 1.64                    | ±5        | Mar. 24, 2022 |
| 22.9             | Head        | 5500 MHz  | 4.96           | 36.18              | 4.97                  | 35.65                     | -0.20               | 1.49                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5510 MHz  | 4.96           | 36.16              | 4.98                  | 35.64                     | -0.33               | 1.46                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5530 MHz  | 4.97           | 36.12              | 5.00                  | 35.61                     | -0.51               | 1.43                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5550 MHz  | 4.98           | 36.04              | 5.02                  | 35.58                     | -0.70               | 1.29                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5570 MHz  | 4.99           | 35.98              | 5.04                  | 35.55                     | -1.03               | 1.20                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5580 MHz  | 4.99           | 35.95              | 5.05                  | 35.53                     | -1.10               | 1.18                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5610 MHz  | 5.01           | 35.84              | 5.08                  | 35.49                     | -1.41               | 0.97                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5620 MHz  | 5.02           | 35.81              | 5.09                  | 35.48                     | -1.32               | 0.92                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5630 MHz  | 5.04           | 35.78              | 5.10                  | 35.47                     | -1.18               | 0.87                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5660 MHz  | 5.12           | 35.65              | 5.13                  | 35.44                     | -0.14               | 0.58                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5670 MHz  | 5.16           | 35.60              | 5.14                  | 35.43                     | 0.28                | 0.48                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5690 MHz  | 5.22           | 35.49              | 5.16                  | 35.41                     | 1.19                | 0.21                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5700 MHz  | 5.25           | 35.46              | 5.17                  | 35.40                     | 1.58                | 0.16                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5710 MHz  | 5.27           | 35.46              | 5.18                  | 35.39                     | 1.79                | 0.18                    | ±5        | Mar. 25, 2022 |
| 22.9             | Head        | 5720 MHz  | 5.28           | 35.46              | 5.19                  | 35.38                     | 1.80                | 0.22                    | ±5        | Mar. 25, 2022 |
| 22.3             | Head        | 5745 MHz  | 5.29           | 35.46              | 5.22                  | 35.36                     | 1.38                | 0.29                    | ±5        | Mar. 26, 2022 |
| 22.3             | Head        | 5755 MHz  | 5.28           | 35.47              | 5.23                  | 35.35                     | 1.05                | 0.34                    | ±5        | Mar. 26, 2022 |
| 22.3             | Head        | 5775 MHz  | 5.27           | 35.50              | 5.25                  | 35.33                     | 0.48                | 0.47                    | ±5        | Mar. 26, 2022 |
| 22.3             | Head        | 5785 MHz  | 5.26           | 35.49              | 5.26                  | 35.32                     | 0.17                | 0.47                    | ±5        | Mar. 26, 2022 |
| 22.3             | Head        | 5795 MHz  | 5.26           | 35.47              | 5.27                  | 35.31                     | -0.16               | 0.45                    | ±5        | Mar. 26, 2022 |
| 22.3             | Head        | 5825 MHz  | 5.22           | 35.40              | 5.30                  | 35.28                     | -1.38               | 0.34                    | ±5        | Mar. 26, 2022 |

| Tissue Temp (°C) | Head / Body | Frequency | Cond. $\sigma$ | Perm. $\epsilon_r$ | target Cond. $\sigma$ | target Perm. $\epsilon_r$ | $\sigma$ (Delta)(%) | $\epsilon_r$ (Delta)(%) | Limit (%) | Date          |
|------------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|-----------|---------------|
| 22.1             | Head        | 2412 MHz  | 1.78           | 39.41              | 1.77                  | 39.27                     | 0.85                | 0.34                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2422 MHz  | 1.79           | 39.36              | 1.78                  | 39.25                     | 0.97                | 0.27                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2437 MHz  | 1.81           | 39.31              | 1.79                  | 39.22                     | 1.14                | 0.23                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2452 MHz  | 1.82           | 39.25              | 1.80                  | 39.20                     | 1.20                | 0.14                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2462 MHz  | 1.83           | 39.21              | 1.81                  | 39.18                     | 1.18                | 0.09                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2467 MHz  | 1.84           | 39.20              | 1.82                  | 39.18                     | 1.20                | 0.04                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2472 MHz  | 1.85           | 39.18              | 1.82                  | 39.17                     | 1.23                | 0.01                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2402 MHz  | 1.77           | 39.45              | 1.76                  | 39.28                     | 0.74                | 0.44                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2441 MHz  | 1.81           | 39.30              | 1.79                  | 39.22                     | 1.15                | 0.19                    | ±5        | Mar. 27, 2022 |
| 22.1             | Head        | 2480 MHz  | 1.85           | 39.15              | 1.83                  | 39.16                     | 1.23                | -0.04                   | ±5        | Mar. 27, 2022 |
| 22.9             | Head        | 6025 MHz  | 5.54           | 35.90              | 5.51                  | 35.07                     | 0.62                | 2.37                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6185 MHz  | 5.66           | 35.91              | 5.70                  | 34.88                     | -0.76               | 2.96                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6345 MHz  | 5.99           | 35.30              | 5.89                  | 34.69                     | 1.81                | 1.76                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6465 MHz  | 6.11           | 35.27              | 6.03                  | 34.54                     | 1.33                | 2.10                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6505 MHz  | 6.13           | 35.12              | 6.08                  | 34.49                     | 0.82                | 1.83                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6545 MHz  | 6.19           | 34.90              | 6.12                  | 34.45                     | 1.09                | 1.31                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6665 MHz  | 6.33           | 34.63              | 6.26                  | 34.30                     | 1.14                | 0.95                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6825 MHz  | 6.55           | 34.58              | 6.45                  | 34.11                     | 1.53                | 1.36                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6945 MHz  | 6.64           | 34.19              | 6.59                  | 33.97                     | 0.74                | 0.64                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 6985 MHz  | 6.67           | 34.09              | 6.63                  | 33.92                     | 0.62                | 0.50                    | ±5        | Mar. 29, 2022 |
| 22.9             | Head        | 7025 MHz  | 6.72           | 34.07              | 6.68                  | 33.87                     | 0.55                | 0.58                    | ±5        | Mar. 29, 2022 |

### 5.3 Power Density Measurement System

The DASY6 system in cDASY6 SAR Configuration is shown below:

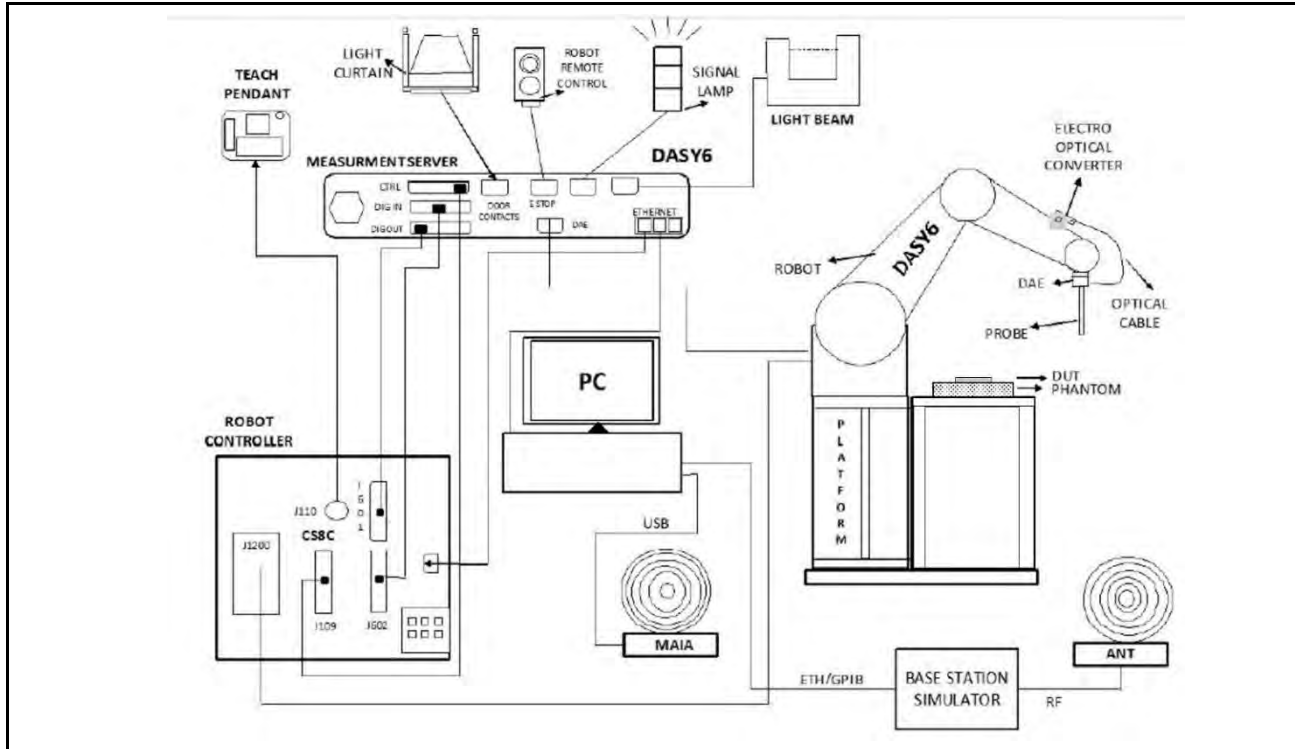


The DASY6 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer running Win7/Win8/Win10 professional operating system and the cDASY6 and DASY5 V5.2 software.
7. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
8. The mmWave phantom.
9. Validation dipole kits allowing validating the proper functioning of the system.


### <DASY E-Field Probe System>

The EUmmWV3 probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. It has two dipoles optimally arranged to obtain pseudo-vector information. It has minimum 3 measurements/point, 120° rotated around probe axis. Sensors (0.8 mm length) printed on glass substrate protected by high density foam. Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.
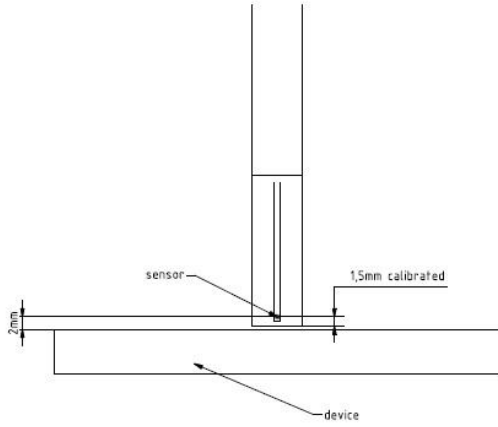
|                                                                                     |                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency Range</b>                                                              | 750 MHz - 110 GHz                                                                                                                                                                                                                                                            |
| <b>Dynamic Range</b>                                                                | < 20 V/m - 10'000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)                                                                                                                                                                                                                  |
| <b>Position Precision</b>                                                           | < 0.2 mm                                                                                                                                                                                                                                                                     |
| <b>Dimensions</b>                                                                   | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: encapsulation 8 mm (internal sensor < 1mm)<br>Distance from probe tip to dipole centers: < 2 mm<br>Sensor displacement to probe's calibration point: < 0.3 mm                                                           |
| <b>Applications</b>                                                                 | Electric field measurements of 5G devices and other mm-wave transmitters operating above 10 GHz in <2 mm distance from device (free-space)<br>Power density, magnetic field, and far-field analysis using total field reconstruction (cDASY6 5G or ICEy-mmW module required) |
| <b>compatibility</b>                                                                | cDASY6 + 5G-Module SW1.0 and higher                                                                                                                                                                                                                                          |
|  |                                                                                                                                                                                          |
|                                                                                     |                                                                                                                                                                                                                                                                              |
| <b>E-Field mm-Wave Probe</b>                                                        | <b>Sensor to DUT Surface</b>                                                                                                                                                                                                                                                 |

### <mmWave phantom>

The mmWave phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the radiofrequency (RF) field. It consists of a 40 mm thick Rohacell plate used as a test bed which has a loss tangent ( $\tan \delta$ )  $\leq 0.05$  and a relative permittivity ( $\epsilon_r$ )  $\leq 1.2$ . The high-performance RF absorbers are placed below the foam.

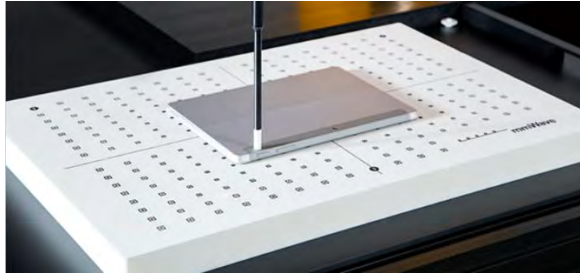

### <Data Acquisition Electronic (DAE)>

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The input impedance of DAE box is 200M $\Omega$ ; the inputs are symmetric and coating. Common mode rejection is above 80 dB.

|                             |                                                                                                                                                                                                                                                     |                                                                                     |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE4                                                                                                                                                                                                                                                |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                     |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)                                                                                                                                                                            |                                                                                     |
| <b>Input Offset Voltage</b> | < 5 $\mu$ V (with auto zero)                                                                                                                                                                                                                        |                                                                                     |
| <b>Input Bias Current</b>   | < 50 fA                                                                                                                                                                                                                                             |                                                                                     |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                     |


#### <Robot>

|                       |                         |                                                                                      |
|-----------------------|-------------------------|--------------------------------------------------------------------------------------|
| <b>Positioner</b>     | Stäubli Unimation Corp. |  |
| <b>Robot Model</b>    | TX90XL                  |                                                                                      |
| <b>Number of Axes</b> | 6                       |                                                                                      |
| <b>Nominal Load</b>   | 5 kg                    |                                                                                      |
| <b>Reach</b>          | 1450 mm                 |                                                                                      |
| <b>Repeatability</b>  | $\pm$ 0.035 mm          |                                                                                      |

## 6. System Verification

### 6.1 SAR System Verification

#### <Symmetric Dipoles for SAR System Verification>
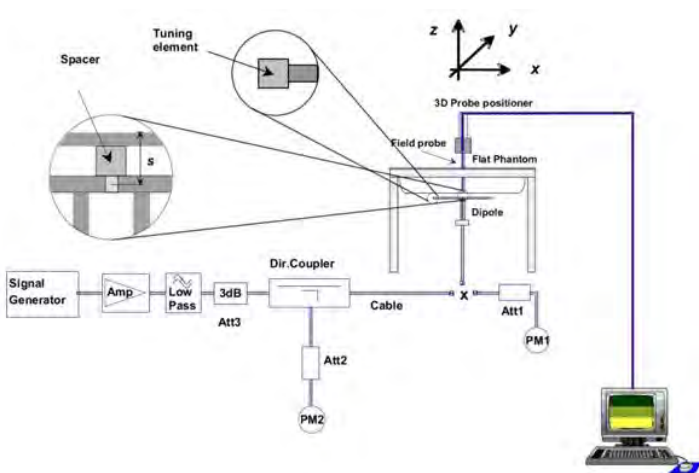
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Symmetrical dipole with $\lambda/4$ balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions. |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | > 20 dB at specified verification position.                                                                                                                                                                                                                                                                                                   |
| Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Dipoles for other frequencies or solutions and other calibration conditions are available upon request.                                                                                                                                                                                                                                       |
| <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>The diagram illustrates the system verification setup. It includes a Signal Generator connected to an Amplifier (Amp), followed by a Low Pass filter, a 3dB attenuator (Att3), and a Directional Coupler (Dir. Coupler). The Dir. Coupler is connected to a Cable, which leads to a Dipole antenna. The Dipole is positioned near a Flat Phantom. A 3D Probe positioner is used to move the Dipole. A Field probe is also shown. The setup is connected to a computer for data acquisition. A tuning element and spacer are shown in detail.</p> </div> <div style="text-align: center;">  <p>A photograph of the Validation Kit, showing a dipole antenna mounted on a tripod stand, connected to a cable.</p> </div> </div> |                                                                                                                                                                                                                                                                                                                                               |
| <div style="display: flex; justify-content: space-around;"> <div>System Verification Setup Diagram</div> <div>Validation Kit</div> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                               |

### 6.1.1 SAR Verification Summary

Prior to the assessment, the validation data compared to the original value provided by SPEAG should be within its specifications of  $\pm 10\%$ . The measured SAR will be normalized to 1 W input power. The result indicates the system check can meet the variation criterion and plots can be referred to Appendix B of this report.

| Mixture Type | Frequency (MHz) | Power  | Probe Model / Serial No. | Dipole Model / Serial No. | SAR1 g (W/kg) | 1 W Normalize SAR1 g (W/kg) | 1 W Target SAR1 g (W/kg) | SAR10 g (W/kg) | 1 W Normalize SAR10 g (W/kg) | 1 W Target SAR10 g (W/kg) | Deviation 1 g (%) | Deviation 10 g (%) | Date          |
|--------------|-----------------|--------|--------------------------|---------------------------|---------------|-----------------------------|--------------------------|----------------|------------------------------|---------------------------|-------------------|--------------------|---------------|
| Head         | 2450            | 250 mW | EX3DV4 – SN3977          | D2450V2 – SN869           | 12.5          | 50                          | 53.10                    | 5.83           | 23.32                        | 24.00                     | -5.8%             | -2.8%              | Mar. 27, 2022 |
| Head         | 5250            | 100 mW | EX3DV4 – SN3977          | D5250V2 – SN1145          | 7.81          | 78.1                        | 76.60                    | 2.14           | 21.4                         | 21.50                     | 2.0%              | -0.5%              | Mar. 24, 2022 |
| Head         | 5600            | 100 mW | EX3DV4 – SN3977          | D5600V2 – SN1145          | 8.16          | 81.6                        | 79.00                    | 2.2            | 22                           | 22.00                     | 3.3%              | 0.0%               | Mar. 25, 2022 |
| Head         | 5750            | 100 mW | EX3DV4 – SN3977          | D5750V2 – SN1145          | 7.64          | 76.4                        | 75.90                    | 2.07           | 20.7                         | 21.10                     | 0.7%              | -1.9%              | Mar. 26, 2022 |
| Head         | 6500            | 100 mW | EX3DV4 – SN7647          | D6500V2 – SN1016          | 30.4          | 304                         | 292.00                   | 5.59           | 55.9                         | 53.60                     | 4.1%              | 4.3%               | Mar. 29, 2022 |

### 6.2 Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The system check is successful if the difference between the normalized measured local power density and the numerically validated target value is within the reported expanded uncertainty of the measurement system.


The recommended settings for measurement of verification sources are listed in the following:


| Settings for Measurement of Verification Sources |                      |                      |                    |
|--------------------------------------------------|----------------------|----------------------|--------------------|
| Frequency [GHz]                                  | Grid step            | Grid extent X/Y [mm] | Measurement points |
| 10                                               | 0.25 ( $\lambda/4$ ) | 120 / 120            | 18 × 18            |
| 30                                               | 0.25 ( $\lambda/4$ ) | 60 / 60              | 26 × 26            |
| 45                                               | 0.25 ( $\lambda/4$ ) | 42 / 42              | 28 × 28            |
| 60                                               | 0.25 ( $\lambda/4$ ) | 32.5 / 32.5          | 28 × 28            |
| 90                                               | 0.25 ( $\lambda/4$ ) | 30 / 30              | 38 × 38            |

### <System Varification Souce>


The verification sources apply to system check or verification at specific mmWave frequencies. The sources comprise horn-antennas and very stable signal generators.

|                             |                                                                                                     |                                                                                     |
|-----------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Frequency accuracy</b>   | 10 GHz at 10 mm from the antenna                                                                    |  |
| <b>E-field polarization</b> | Linear                                                                                              |                                                                                     |
| <b>Input Power</b>          | Max. 20 W                                                                                           |                                                                                     |
| <b>Conector</b>             | SMA                                                                                                 |                                                                                     |
| <b>Weight</b>               | 700 g                                                                                               |                                                                                     |
| <b>Operation</b>            | requires a stable source with known forward power to perform system performance check or validation |                                                                                     |
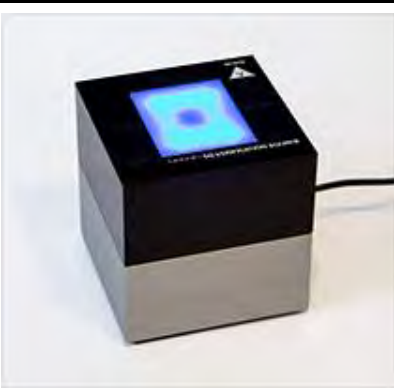
|                             |                                                                 |                                                                                      |
|-----------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Calibrated Frequency</b> | 30 GHz at 10mm from the antenna (5.55 mm from the case surface) |  |
| <b>Frequency accuracy</b>   | ± 100 MHz                                                       |                                                                                      |
| <b>E-field polarization</b> | Linear                                                          |                                                                                      |
| <b>Harmonics</b>            | -20 dBc                                                         |                                                                                      |
| <b>Total radiated power</b> | 14 dBm                                                          |                                                                                      |
| <b>Power stability</b>      | 0.05 dB                                                         |                                                                                      |
| <b>Power consumption</b>    | 5 W                                                             |                                                                                      |
| <b>Size</b>                 | 100 × 100 × 100 mm                                              |                                                                                      |
| <b>Weight</b>               | 1 kg                                                            |                                                                                      |
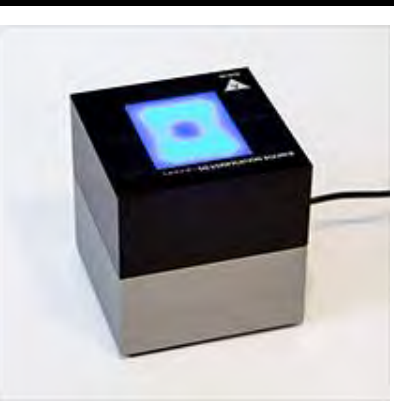
|                             |                                                                 |                                                                                       |
|-----------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Calibrated Frequency</b> | 60 GHz at 10mm from the antenna (5.55 mm from the case surface) |  |
| <b>Frequency accuracy</b>   | ± 100 MHz                                                       |                                                                                       |
| <b>E-field polarization</b> | ± 100 MHz                                                       |                                                                                       |
| <b>Harmonics</b>            | Linear                                                          |                                                                                       |
| <b>Total radiated power</b> | -20 dBc                                                         |                                                                                       |
| <b>Harmonics</b>            | 14 dBm                                                          |                                                                                       |
| <b>Power stability</b>      | 0.1 dB                                                          |                                                                                       |
| <b>Power consumption</b>    | 5 W                                                             |                                                                                       |
| <b>Size</b>                 | 100 × 100 × 100 mm                                              |                                                                                       |
| <b>Weight</b>               | 1 kg                                                            |                                                                                       |

### 6.2.1 Power Density Verification Summary

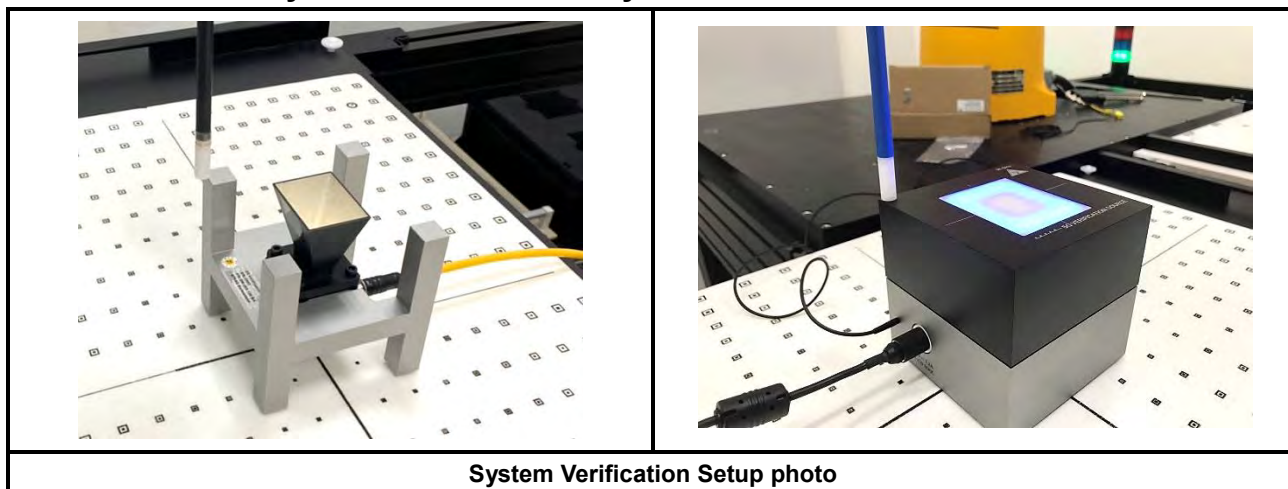

Prior to the assessment, the validation data compared to the original value provided by SPEAG should be within its specifications of  $\pm 0.66$  dB. The  $\pm 0.66$  dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The power density distribution was verified through visual inspection as per Nov. 2017 TCBC Workshop Notes, both spatially (shape) and numerically (level) have no noticeable differences. The following result indicates the system check can meet the variation criterion and plots can be referred to Appendix B of this report.

| Frequency (MHz) | Probe Model / Serial No. | Dipole Model / Serial No.            | Averaging Area [4 cm <sup>2</sup> ]<br>Measured Total PD (W/m <sup>2</sup> ) | Averaging Area [4 cm <sup>2</sup> ]<br>Target Total PD (W/m <sup>2</sup> ) | PD Deviation (%) | Date          |
|-----------------|--------------------------|--------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------|---------------|
| 10G             | EUmmWV3 – SN9403         | 5G Verification Source 10 GHz – 2003 | 158.67                                                                       | 154.00                                                                     | 3.0%             | Mar. 30, 2022 |

Note:

The measured total PD was the average of psPDn+, psPDtot+ and psPDmod+, which refers to the demonstration from calibration certificate.

## 7. Test Equipment List

### 7.1 SAR Test Equipment List

| Manufacturer  | Name of Equipment              | Type/Model        | Serial Number   | Calibration  |             |
|---------------|--------------------------------|-------------------|-----------------|--------------|-------------|
|               |                                |                   |                 | Cal. Date    | Cal. Period |
| SPEAG         | 2450 MHz System Validation Kit | D2450V2           | 869             | Jun 22, 2021 | 1 year      |
| SPEAG         | 5 GHz System Validation Kit    | D5GHzV2           | 1145            | Feb 15, 2022 | 1 year      |
| SPEAG         | 6.5 GHz System Validation Kit  | D6.5GHzV2         | 1016            | Aug 26, 2021 | 1 year      |
| SPEAG         | 5G Verification Source         | 10 GHz            | 2003            | Feb 28, 2022 | 1 year      |
| SPEAG         | Dosimetric E-Field Probe       | EUmmWV3           | 9403            | Sep 20, 2021 | 1 year      |
| SPEAG         | Dosimetric E-Field Probe       | EX3DV4            | 3977            | Jul 26, 2021 | 1 year      |
| SPEAG         | Dosimetric E-Field Probe       | EX3DV4            | 7647            | Apr 15, 2021 | 1 year      |
| SPEAG         | Data Acquisition Electronics   | DAE4              | 779             | Jul 30, 2021 | 1 year      |
| SPEAG         | Data Acquisition Electronics   | DAE4              | 1253            | Dec 30, 2021 | 1 year      |
| SPEAG         | Measurement Server             | SE UMS 011 BB     | 1241            | NCR          |             |
| SPEAG         | Device Holder                  | N/A               | N/A             | NCR          |             |
| SPEAG         | Phantom                        | ELI V4.0          | 1036            | NCR          |             |
| SPEAG         | Phantom                        | ELI V5.0          | 1175            | NCR          |             |
| SPEAG         | 5G Phantom                     | 5G                | OX-030          | NCR          |             |
| SPEAG         | Robot                          | Staubli TX90XL    | F16/54FTA1/A/01 | NCR          |             |
| SPEAG         | Robot                          | Staubli TX90XL    | F11/5G9EA1/A/01 | NCR          |             |
| SPEAG         | Software                       | cDASY6            | N/A             | NCR          |             |
|               |                                | V16.0.0.116       |                 |              |             |
| SPEAG         | Software                       | DASY52            | N/A             | NCR          |             |
|               |                                | V52.10.4.1535     |                 |              |             |
| SPEAG         | Software                       | SEMCAD X          | N/A             | NCR          |             |
|               |                                | V14.6.14(7501)    |                 |              |             |
| SPEAG         | Network Analyzer               | DAKS_VNA R140     | 0010318         | May 26, 2021 | 1 year      |
| SPEAG         | Dielectric Probe Kit           | DAKS-3.5          | 1101            | May 26, 2021 | 1 year      |
| HILA          | Digital Thermometer            | TM-906A           | 1500033         | Oct 29, 2021 | 1 year      |
| Agilent       | Power Sensor                   | 8481H             | 3318A20779      | May 26, 2021 | 1 year      |
| Agilent       | Power Meter                    | EDM Series E4418B | GB40206143      | May 26, 2021 | 1 year      |
| Keysight      | Signal Generator               | N5182B            | MY53052569      | Apr 20, 2021 | 1 year      |
| Agilent       | Spectrum Analyzer              | E4445A            | MY46181986      | Jun 07, 2021 | 1 year      |
| Mini-Circuits | Dual Directional Coupler       | ZCDC20-5R263-S+   | E69806          | NCR          |             |
| Mini-Circuits | Power Amplifier                | EMC014225P        | 980292          | NCR          |             |
| Mini-Circuits | Power Amplifier                | EMC2830P          | 980293          | NCR          |             |
| EMCI          | Power Amplifier                | EMC0618-P         | 980833          | NCR          |             |
| Attenuator    | INMET                          | 18AH-03           | S180301         | NCR          |             |
| Attenuator    | INMET                          | 18AH-10           | S181001         | NCR          |             |
| Attenuator    | INMET                          | 18AH-20           | S182001         | NCR          |             |

Testing Engineer: Ted Hsieh / Rocky Wang

## 8. Measurement Procedure

### 8.1 SAR Measurement Procedure

The measurement procedures are as follows:

1. The DUT is installed engineering testing software that provides continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

### 8.1.1 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution.

The measure settings are referred to KDB 865664 D01v01r04 :

|                                                                                                                                                                                                                                                                                       |                         |                                                                 | ≤ 3 GHz                                                                                                                                                                                                                                                           | > 3 GHz                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                                |                         |                                                                 | 5 mm ± 1 mm                                                                                                                                                                                                                                                       | ½·δ·ln(2) mm ± 0.5 mm                                          |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                             |                         |                                                                 | 30° ± 1°                                                                                                                                                                                                                                                          | 20° ± 1°                                                       |
| Maximum area scan spatial resolution: ΔxArea, ΔyArea                                                                                                                                                                                                                                  |                         |                                                                 | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm                       |
|                                                                                                                                                                                                                                                                                       |                         |                                                                 | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                |
| Maximum zoom scan spatial resolution: ΔxArea, ΔyArea                                                                                                                                                                                                                                  |                         |                                                                 | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm*                                                                                                                                                                                                                             | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm*                       |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                       | uniform grid: ΔzZoom(n) |                                                                 | ≤ 5 mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm    |
|                                                                                                                                                                                                                                                                                       | Graded grid             | ΔzZoom(1):<br>between 1st two points closest to phantom surface | ≤ 4 mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm  |
|                                                                                                                                                                                                                                                                                       |                         | ΔzZoom(n>1):<br>between subsequent points                       | ≤ 1.5·ΔzZoom(n-1) mm                                                                                                                                                                                                                                              |                                                                |
| Minimum zoom scan volume                                                                                                                                                                                                                                                              | x, y, z                 |                                                                 | ≥ 30 mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.                                                                                                                                                        |                         |                                                                 |                                                                                                                                                                                                                                                                   |                                                                |
| * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                         |                                                                 |                                                                                                                                                                                                                                                                   |                                                                |

### 8.1.2 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1 g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.1.3 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5 %, the SAR will be retested.

### 8.1.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values form the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1 g and 10 g

## 8.2 Power Density Measurement Procedure

### 8.2.1 Power Density Assessment Based on E-field

According to the IEC TR 63170, within a short distance from the transmitting source, power density is determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field are needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. The measurement points are chosen according to the requirements of the methodology used. The following procedure was used:

- (1) Measure the E-field on the measurement surface at a reference location where the field is well above the noise level. This reference level will be used at the end of this procedure to assess output power drift of the DUT during the measurement.
- (2) Scan the electric field on the measurement surface. The requirements of measurement surface dimensions and spatial resolution are dependent on the measurement system and assessment methodology applied. Measurements are therefore conducted according to the instructions provided by SPEAG user's manual.
- (3) Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. Planar scanners typically require a step size of less than  $\lambda/2$ .
- (4) Calculated H-field from measured field by using reconstruction algorithm since only E-field is directly measured on the evaluation surface. Reconstruction algorithms can also be used to obtain field information from the measured data. In substance, reconstruction algorithms are the set of algorithms, mathematical techniques and procedures that are applied to the measured field on the measurement surface to determine E- and H-field (amplitude and phase) on the evaluation surface.
- (5) Determine the spatial-average power density distribution on the evaluation surface by the following formula. The spatial averaging area, A, is specified by the applicable exposure limits or regulatory requirements. The circular shape recommended in IEC TR 63170 was applied.

$$S_{av} = \frac{1}{2A} \Re \cdot \left( \int \mathbf{E} \times \mathbf{H} \cdot \hat{\mathbf{n}} dA \right)$$

- (6) The maximum spatial-average and/or local power density on the evaluation surface is the final quantity to determine compliance against applicable limits. The spatial averaging area,  $4\text{cm}^2$ , is specified by the Oct. 2018 TCB Workshop notes requirements.
- (7) Measure the E-field on the measurement surface position at the reference location chosen in step A). The power drift of the DUT is estimated as the difference between the squared amplitude of the field values taken in steps a) and g). When the drift is smaller than  $\pm 5\%$ , this term should be considered in the uncertainty budget. Drifts larger than  $5\%$  due to the design and operating characteristics of the device should be accounted for or addressed according to regulatory requirements to determine compliance.

### 8.2.2 Total Field and Power Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. The manufacturer SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWV3 probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as  $\lambda/5$  away.

## 9. Measurement Uncertainty

### 9.1 SAR Measurement Uncertainty

| Measurement Uncertainty (0.3-6 GHz)                   |      |             |       |         |          |             |              |    |
|-------------------------------------------------------|------|-------------|-------|---------|----------|-------------|--------------|----|
| Uncertainty Component                                 | Tol. | Prob. Dist. | Div.  | Ci - 1g | Ci - 10g | ui - 1g (%) | ui - 10g (%) | vi |
| <b>Measurement System</b>                             |      |             |       |         |          |             |              |    |
| Probe calibration                                     | 12.0 | N           | 2     | 1       | 1        | 6.0         | 6.0          | ∞  |
| Probe Calibration Drift                               | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| Data acquisition                                      | 0.3  | N           | 1     | 1       | 1        | 0.3         | 0.3          | ∞  |
| Probe Linearity                                       | 4.7  | R           | 1.732 | 1       | 1        | 2.7         | 2.7          | ∞  |
| Broadband Signal                                      | 3.0  | R           | 1.732 | 1       | 1        | 1.7         | 1.7          | ∞  |
| Probe Isotropy                                        | 7.6  | R           | 1.732 | 1       | 1        | 4.4         | 4.4          | ∞  |
| RF Ambient                                            | 1.8  | N           | 1     | 1       | 1        | 1.8         | 1.8          | ∞  |
| Probe Positioning                                     | 0.2  | N           | 1     | 0.14    | 0.14     | 0.0         | 0.0          | ∞  |
| Data Processing                                       | 1.2  | N           | 1     | 1       | 1        | 1.2         | 1.2          | ∞  |
| <b>Phantom and Device Errors</b>                      |      |             |       |         |          |             |              |    |
| Conductivity (meas.)DAK                               | 2.5  | N           | 1     | 0.78    | 0.71     | 2.0         | 1.8          | ∞  |
| Conductivity (temp.)                                  | 3.3  | R           | 1.732 | 0.78    | 0.71     | 1.5         | 1.4          | ∞  |
| Phantom Shell Permittivity                            | 14   | R           | 1.732 | 0       | 0        | 0.0         | 0.0          | ∞  |
| Distance DUT - TSL                                    | 2    | N           | 1     | 2       | 2        | 4.0         | 4.0          | ∞  |
| Device Positioning                                    | 1    | N           | 1     | 1       | 1        | 1.0         | 1.0          | ∞  |
| Device Holder                                         | 3.6  | N           | 1     | 1       | 1        | 3.6         | 3.6          | ∞  |
| DUT Modulation                                        | 2.4  | R           | 1.732 | 1       | 1        | 1.4         | 1.4          | ∞  |
| Time-average SAR                                      | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| DUT Drift                                             | 2.5  | N           | 1     | 1       | 1        | 2.5         | 2.5          | ∞  |
| <b>Correction to the SAR Results</b>                  |      |             |       |         |          |             |              |    |
| Deviation to Target                                   | 1.9  | N           | 1     | 1       | 0.84     | 1.9         | 1.6          | ∞  |
| SAR scaling                                           | 0.0  | R           | 1.732 | 1       | 1        | 0.0         | 0.0          | ∞  |
| <b>Combined Standard Uncertainty</b>                  |      |             |       |         | RSS      | 11.0        | 10.9         |    |
| <b>Expanded Uncertainty (95% confidence interval)</b> |      |             |       |         | k =2     | 21.9        | 21.7         |    |

| Measurement Uncertainty (3-6 GHz)                     |      |             |       |         |          |             |              |    |
|-------------------------------------------------------|------|-------------|-------|---------|----------|-------------|--------------|----|
| Uncertainty Component                                 | Tol. | Prob. Dist. | Div.  | Ci - 1g | Ci - 10g | ui - 1g (%) | ui - 10g (%) | vi |
| <b>Measurement System</b>                             |      |             |       |         |          |             |              |    |
| Probe Calibration                                     | 13.1 | N           | 2     | 1       | 1        | 6.55        | 6.55         | ∞  |
| Probe Calibration Drift                               | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| Data Acquisition                                      | 0.3  | N           | 1     | 1       | 1        | 0.3         | 0.3          | ∞  |
| Probe Linearity                                       | 4.7  | R           | 1.732 | 1       | 1        | 2.7         | 2.7          | ∞  |
| Broadband Signal                                      | 2.6  | R           | 1.732 | 1       | 1        | 1.5         | 1.5          | ∞  |
| Probe Isotropy                                        | 7.6  | R           | 1.732 | 1       | 1        | 4.4         | 4.4          | ∞  |
| RF Ambient                                            | 1.8  | N           | 1     | 1       | 1        | 1.8         | 1.8          | ∞  |
| Probe Positioning                                     | 0.2  | N           | 1     | 0.33    | 0.33     | 0.1         | 0.1          | ∞  |
| Data Processing                                       | 2.3  | N           | 1     | 1       | 1        | 2.3         | 2.3          | ∞  |
| <b>Phantom and Device Errors</b>                      |      |             |       |         |          |             |              |    |
| Conductivity (meas.)DAK                               | 2.5  | N           | 1     | 0.78    | 0.71     | 2.0         | 1.8          | ∞  |
| Conductivity (temp.)                                  | 3.4  | R           | 1.732 | 0.78    | 0.71     | 1.5         | 1.4          | ∞  |
| Phantom Shell Permittivity                            | 14   | R           | 1.732 | 0.25    | 0.25     | 2.0         | 2.0          | ∞  |
| Distance DUT - TSL                                    | 2    | N           | 1     | 2       | 2        | 4.0         | 4.0          | ∞  |
| Device Positioning                                    | 1    | N           | 1     | 1       | 1        | 1.0         | 1.0          | ∞  |
| Device Holder                                         | 3.6  | N           | 1     | 1       | 1        | 3.6         | 3.6          | ∞  |
| DUT Modulation                                        | 2.4  | R           | 1.732 | 1       | 1        | 1.4         | 1.4          | ∞  |
| Time-average SAR                                      | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| DUT Drift                                             | 2.5  | N           | 1     | 1       | 1        | 2.5         | 2.5          | ∞  |
| <b>Correction to the SAR Results</b>                  |      |             |       |         |          |             |              |    |
| Deviation to Target                                   | 1.9  | N           | 1     | 1       | 0.84     | 1.9         | 1.6          | ∞  |
| SAR scaling                                           | 0.0  | R           | 1.732 | 1       | 1        | 0.0         | 0.0          | ∞  |
| <b>Combined Standard Uncertainty</b>                  |      |             |       |         | RSS      | 11.6        | 11.5         |    |
| <b>Expanded Uncertainty (95% confidence interval)</b> |      |             |       |         | k =2     | 23.2        | 23.0         |    |

| Measurement Uncertainty (6-10 GHz)                    |      |             |       |         |          |             |              |    |
|-------------------------------------------------------|------|-------------|-------|---------|----------|-------------|--------------|----|
| Uncertainty Component                                 | Tol. | Prob. Dist. | Div.  | Ci - 1g | Ci - 10g | ui - 1g (%) | ui - 10g (%) | vi |
| <b>Measurement System</b>                             |      |             |       |         |          |             |              |    |
| Probe Calibration                                     | 18.6 | N           | 2     | 1       | 1        | 9.3         | 9.3          | ∞  |
| Probe Calibration Drift                               | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| Data Acquisition                                      | 0.3  | N           | 1     | 1       | 1        | 0.3         | 0.3          | ∞  |
| Probe Linearity                                       | 4.7  | R           | 1.732 | 1       | 1        | 2.7         | 2.7          | ∞  |
| Broadband Signal                                      | 2.8  | R           | 1.732 | 1       | 1        | 1.6         | 1.6          | ∞  |
| Probe Isotropy                                        | 7.6  | R           | 1.732 | 1       | 1        | 4.4         | 4.4          | ∞  |
| RF Ambient Condition                                  | 1.8  | N           | 1     | 1       | 1        | 1.8         | 1.8          | ∞  |
| Probe Positioning                                     | 0.2  | N           | 1     | 0.67    | 0.67     | 0.1         | 0.1          | ∞  |
| Data Processing                                       | 3.5  | N           | 1     | 1       | 1        | 3.5         | 3.5          | ∞  |
| <b>Phantom and Device Errors</b>                      |      |             |       |         |          |             |              |    |
| Conductivity (meas.)DAK                               | 2.5  | N           | 1     | 0.78    | 0.71     | 2.0         | 1.8          | ∞  |
| Conductivity (temp.)                                  | 2.4  | R           | 1.732 | 0.78    | 0.71     | 1.1         | 1.0          | ∞  |
| Phantom Shell Permittivity                            | 14.0 | R           | 1.732 | 0.5     | 0.5      | 4.0         | 4.0          | ∞  |
| Distance DUT - TSL                                    | 2    | N           | 1     | 2       | 2        | 4.0         | 4.0          | ∞  |
| Device Positioning                                    | 1    | N           | 1     | 1       | 1        | 1.0         | 1.0          | ∞  |
| Device Holder                                         | 3.6  | N           | 1     | 1       | 1        | 3.6         | 3.6          | ∞  |
| DUT Modulation                                        | 2.4  | R           | 1.732 | 1       | 1        | 1.4         | 1.4          | ∞  |
| Time-average SAR                                      | 1.7  | R           | 1.732 | 1       | 1        | 1.0         | 1.0          | ∞  |
| DUT Drift                                             | 2.5  | N           | 1     | 1       | 1        | 2.5         | 2.5          | ∞  |
| <b>Correction to the SAR Results</b>                  |      |             |       |         |          |             |              |    |
| Deviation to Target                                   | 1.9  | N           | 1     | 1       | 0.84     | 1.9         | 1.6          | ∞  |
| SAR scaling                                           | 0.0  | R           | 1.732 | 1       | 1        | 0.0         | 0.0          | ∞  |
| <b>Combined Standard Uncertainty</b>                  |      |             |       |         | RSS      | 14.0        | 13.9         |    |
| <b>Expanded Uncertainty (95% confidence interval)</b> |      |             |       |         | k =2     | 28.0        | 27.9         |    |

## 9.2 Power Density Measurement Uncertainty

| Measurement Uncertainty for PD         |                                  |            |       |                   |                                        |                 |
|----------------------------------------|----------------------------------|------------|-------|-------------------|----------------------------------------|-----------------|
| Error Description                      | Uncertainty Value<br>( $\pm$ dB) | Prob Dist. | Div.  | (C <sub>i</sub> ) | Standard<br>Uncertainty<br>( $\pm$ dB) | V <sub>if</sub> |
| <b>Measurement System</b>              |                                  |            |       |                   |                                        |                 |
| Probe calibration                      | 0.49                             | N          | 1     | 1                 | 0.49                                   | $\infty$        |
| Isotropy                               | 0.50                             | R          | 1.732 | 1                 | 0.29                                   | $\infty$        |
| System Linearity                       | 0.20                             | R          | 1.732 | 1                 | 0.12                                   | $\infty$        |
| System Detection Limit                 | 0.04                             | R          | 1.732 | 1                 | 0.02                                   | $\infty$        |
| Amplitude and phase noise              | 0.04                             | R          | 1.732 | 1                 | 0.02                                   |                 |
| Data Acquisition                       | 0.03                             | N          | 1     | 1                 | 0.03                                   | $\infty$        |
| Probe Positioning Repeatability        | 0.04                             | R          | 1.732 | 1                 | 0.02                                   | $\infty$        |
| Probe Positioning Offset               | 0.30                             | R          | 1.732 | 1                 | 0.17                                   | $\infty$        |
| Field Reconstruction                   | 0.60                             | R          | 1.732 | 1                 | 0.35                                   | $\infty$        |
| <b>Test Sample Related</b>             |                                  |            |       |                   |                                        |                 |
| Power Drift of Measurement             | 0.21                             | R          | 1.732 | 1                 | 0.12                                   | $\infty$        |
| Modulation Response                    | 0.40                             | R          | 1.732 | 1                 | 0.23                                   | $\infty$        |
| Integration Time                       | 0                                | R          | 1.732 | 1                 | 0                                      | $\infty$        |
| Response Time                          | 0                                | R          | 1.732 | 1                 | 0                                      | $\infty$        |
| RF Ambient Noise                       | 0.04                             | R          | 1.732 | 1                 | 0.02                                   | $\infty$        |
| RF Ambient Reflection                  | 0.04                             | R          | 1.732 | 1                 | 0.02                                   | $\infty$        |
| <b>Combined Std. Uncertainty</b>       |                                  |            |       |                   | 0.76                                   |                 |
| <b>Expanded Std. Uncertainty (K=2)</b> |                                  |            |       |                   | 1.52                                   |                 |

## 10. Measurement Evaluation

### 10.1 Positioning of the DUT in Relation to the Phantom

According to KDB 616217 D04:

1. When antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard.
2. Some 2-in-1 tablets may operate with the display folded on top of the keyboard. Most recent tablets are designed with an interactive display that may not require a physical keyboard. Both configurations are used in similar manners and require SAR evaluation for the back surface and edges of the tablet. For keyboards that can be unfolded like a laptop, the procedures for laptop platform should also be applied.

According to KDB 616217 D04:

1. SAR evaluation is required for back (bottom) surface and side edges of the devices.
2. Some 2-in-1 tablets may operate with the display folded on top of the keyboard. Most recent tablets are designed with an interactive display that may not require a physical keyboard. Both configurations are used in similar manners and require SAR evaluation for the back surface and edges of the tablet. For keyboards that can be unfolded like a laptop, SAR evaluation is required for the bottom surface of the keyboard.
3. SAR evaluation for the front surface of tablet display screens are generally not necessary, except for tablets that are designed to require continuous operations with the hand(s) next to the antenna.
4. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

## 10.2 SAR Testing with RF Transmitter

### 10.2.1 SAR Testing with WLAN

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies.

For WLAN SAR testing, the DUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. And the RF signal utilized in SAR measurement has almost 100 % duty cycle and crest factor is 1.

- The card was operated utilizing proprietary software (QATool Dbg) and each channel was measured using a broadband power meter to determine the maximum average power.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - ✘ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - ✘ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - ✘ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered as the worst case position; thus used as the initial test position.

- After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following:
  - (1) The channel closest to mid-band frequency is selected for SAR measurement.
  - (2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s) selection.

WiFi6E SAR and Power Density measurements were implemented according to the U-NII 6-7 GHz Interim Procedures described in Oct. 2020 TCB workshop.

- The SAR evaluations using 6-7 GHz parameters were performed per IEC/IEEE 62209-1528, and the Absorbed Power Density (APD) were reported based on SAR measurements. According to DASY Application Note, the APD is evaluated numerically using the FDTD method of Sim4Life V5.2. For comparison with the basic restrictions, the APD is averaged over square surface areas of  $1\text{ cm}^2$  and  $4\text{ cm}^2$  in the lowermost voxel layer of a flat phantom at a frequency of 6.5 GHz. The phantom consists of a dielectric shell of 2 mm thickness and a relative permittivity  $\epsilon_r = 3.7$ . It is filled with a tissue-simulating liquid with  $\epsilon_r = 34.5$  and  $\sigma = 6.07\text{ S/m}$ .

### 10.3 Conducted Power Measurements

Refer to Appendix A.

### 10.4 Antenna location

Refer to Appendix E.

## 10.5 Test Results

### 10.5.1 SAR Test Result

| Index. | Band         | Modulation | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | Reported SAR <sub>1g</sub> (W/kg) | Antenna  | Antenna Manufacturer |
|--------|--------------|------------|---------|-----------------|------------------|--------------|--------------------------|-----------------------------|---------------|----------------|-----------------------------------|----------|----------------------|
| 1      | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Bottom of laptop | 0            | 0.943                    | 17.77                       | 18            | 99.69          | 1.00                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Bottom of laptop | 0            | 0.996                    | 17.73                       | 18            | 99.69          | 1.06                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Bottom of laptop | 0            | 0.977                    | 17.73                       | 18            | 99.69          | 1.04                              | ANT Main | AWAN                 |
|        | WLAN 2.4 GHz | 802.11b    | 11      | 2462            | Bottom of laptop | 0            | 0.809                    | 17.48                       | 17.5          | 99.69          | 0.82                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 12      | 2467            | Bottom of laptop | 0            | 0.468                    | 14.68                       | 15            | 99.69          | 0.51                              | ANT Main | INPAQ                |
| 2*     | WLAN 2.4 GHz | 802.11b    | 13      | 2472            | Bottom of laptop | 0            | 0.35                     | 13.25                       | 13.5          | 99.69          | 0.37                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Bottom Face      | 0            | 0.15                     | 17.77                       | 18            | 99.69          | 0.16                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 1           | 0            | 0.915                    | 17.77                       | 18            | 99.69          | 0.97                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Side 1           | 0            | 0.928                    | 17.73                       | 18            | 99.69          | 0.99                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 11      | 2462            | Side 1           | 0            | 0.827                    | 17.48                       | 17.5          | 99.69          | 0.83                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 12      | 2467            | Side 1           | 0            | 0.49                     | 14.68                       | 15            | 99.69          | 0.53                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 13      | 2472            | Side 1           | 0            | 0.374                    | 13.25                       | 13.5          | 99.69          | 0.40                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 2           | 0            | 0.252                    | 17.77                       | 18            | 99.69          | 0.27                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 3           | 0            | 0.01                     | 17.77                       | 18            | 99.69          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 4           | 0            | 0.08                     | 17.77                       | 18            | 99.69          | 0.08                              | ANT Main | INPAQ                |
|        |              |            |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Bottom of laptop | 0            | 0.878                    | 17.98                       | 18            | 99.66          | 0.88                              | ANT Aux  | INPAQ                |
| 3      | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Bottom of laptop | 0            | 1.14                     | 17.95                       | 18            | 99.66          | 1.16                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Bottom of laptop | 0            | 1.08                     | 17.95                       | 18            | 99.66          | 1.10                              | ANT Aux  | AWAN                 |
|        | WLAN 2.4 GHz | 802.11b    | 11      | 2462            | Bottom of laptop | 0            | 0.903                    | 17.47                       | 17.5          | 99.66          | 0.91                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 12      | 2467            | Bottom of laptop | 0            | 0.508                    | 14.93                       | 15            | 99.66          | 0.52                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 13      | 2472            | Bottom of laptop | 0            | 0.378                    | 13.19                       | 13.5          | 99.66          | 0.41                              | ANT Aux  | INPAQ                |
| 4*     | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Bottom Face      | 0            | 0.158                    | 17.98                       | 18            | 99.66          | 0.16                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 1           | 0            | 1.04                     | 17.98                       | 18            | 99.66          | 1.05                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 6       | 2437            | Side 1           | 0            | 1.11                     | 17.95                       | 18            | 99.66          | 1.13                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 11      | 2462            | Side 1           | 0            | 1.09                     | 17.47                       | 17.5          | 99.66          | 1.10                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 12      | 2467            | Side 1           | 0            | 0.627                    | 14.93                       | 15            | 99.66          | 0.64                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 13      | 2472            | Side 1           | 0            | 0.436                    | 13.19                       | 13.5          | 99.66          | 0.47                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 2           | 0            | 0.01                     | 17.98                       | 18            | 99.66          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 3           | 0            | 0.01                     | 17.98                       | 18            | 99.66          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 2.4 GHz | 802.11b    | 1       | 2412            | Side 4           | 0            | 0.125                    | 17.98                       | 18            | 99.66          | 0.13                              | ANT Aux  | INPAQ                |
|        |              |            |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |

Note: The index number with symbol "\*" is for SPLSR only.

| Index. | Band       | Modulation      | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | Reported SAR <sub>1g</sub> (W/kg) | Antenna  | Antenna Manufacturer |
|--------|------------|-----------------|---------|-----------------|------------------|--------------|--------------------------|-----------------------------|---------------|----------------|-----------------------------------|----------|----------------------|
| 5*     | Bluetooth  | GFSK            | 0       | 2402            | Bottom of laptop | 0            | 0.149                    | 10.69                       | 11.5          | 76.83          | 0.23                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 0       | 2402            | Bottom Face      | 0            | 0.01                     | 10.69                       | 11.5          | 76.83          | 0.02                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 0       | 2402            | Side 1           | 0            | 0.157                    | 10.69                       | 11.5          | 76.83          | 0.25                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 39      | 2441            | Side 1           | 0            | 0.162                    | 10.55                       | 11.5          | 76.83          | 0.26                              | ANT Aux  | INPAQ                |
| 6      | Bluetooth  | GFSK            | 78      | 2480            | Side 1           | 0            | 0.165                    | 10.51                       | 11.5          | 76.83          | 0.27                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 78      | 2480            | Side 1           | 0            | 0.125                    | 10.51                       | 11.5          | 76.83          | 0.20                              | ANT Aux  | AWAN                 |
|        | Bluetooth  | GFSK            | 0       | 2402            | Side 2           | 0            | 0.01                     | 10.69                       | 11.5          | 76.83          | 0.02                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 0       | 2402            | Side 3           | 0            | 0.01                     | 10.69                       | 11.5          | 76.83          | 0.02                              | ANT Aux  | INPAQ                |
|        | Bluetooth  | GFSK            | 0       | 2402            | Side 4           | 0            | 0.01                     | 10.69                       | 11.5          | 76.83          | 0.02                              | ANT Aux  | INPAQ                |
|        |            |                 |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |
| 7*     | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Bottom of laptop | 0            | 0.646                    | 10.6                        | 11            | 96.64          | 0.73                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Bottom Face      | 0            | 0.099                    | 10.6                        | 11            | 96.64          | 0.11                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 1           | 0            | 0.854                    | 10.6                        | 11            | 96.64          | 0.97                              | ANT Main | INPAQ                |
| 8      | WLAN 5 GHz | 802.11ac VHT80  | 58      | 5290            | Side 1           | 0            | 0.978                    | 10.98                       | 11            | 96.92          | 1.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 58      | 5290            | Side 1           | 0            | 0.943                    | 10.98                       | 11            | 96.92          | 0.98                              | ANT Main | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 2           | 0            | 0.01                     | 10.6                        | 11            | 96.64          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 3           | 0            | 0.01                     | 10.6                        | 11            | 96.64          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 4           | 0            | 0.01                     | 10.6                        | 11            | 96.64          | 0.01                              | ANT Main | INPAQ                |
|        |            |                 |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Bottom of laptop | 0            | 0.464                    | 10.61                       | 11            | 96.59          | 0.53                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Bottom Face      | 0            | 0.064                    | 10.61                       | 11            | 96.59          | 0.07                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 1           | 0            | 0.53                     | 10.61                       | 11            | 96.59          | 0.60                              | ANT Aux  | INPAQ                |
| 10     | WLAN 5 GHz | 802.11ac VHT80  | 58      | 5290            | Side 1           | 0            | 0.59                     | 10.97                       | 11            | 96.88          | 0.61                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 58      | 5290            | Side 1           | 0            | 0.512                    | 10.97                       | 11            | 96.88          | 0.53                              | ANT Aux  | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 2           | 0            | 0.01                     | 10.61                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 3           | 0            | 0.01                     | 10.61                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 50      | 5250            | Side 4           | 0            | 0.01                     | 10.61                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |

Note: The index number with symbol "\*" is for SPLSR only.

| Index. | Band       | Modulation      | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | Reported SAR <sub>1g</sub> (W/kg) | Antenna  | Antenna Manufacturer |
|--------|------------|-----------------|---------|-----------------|------------------|--------------|--------------------------|-----------------------------|---------------|----------------|-----------------------------------|----------|----------------------|
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Bottom of laptop | 0            | 0.557                    | 10.76                       | 11            | 96.64          | 0.61                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Bottom Face      | 0            | 0.129                    | 10.76                       | 11            | 96.64          | 0.14                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 1           | 0            | 0.815                    | 10.76                       | 11            | 96.64          | 0.89                              | ANT Main | INPAQ                |
| 12     | WLAN 5 GHz | 802.11ac VHT80  | 106     | 5530            | Side 1           | 0            | 0.87                     | 10.97                       | 11            | 96.92          | 0.90                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 106     | 5530            | Side 1           | 0            | 0.81                     | 10.97                       | 11            | 96.92          | 0.84                              | ANT Main | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 2           | 0            | 0.119                    | 10.76                       | 11            | 96.64          | 0.13                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 3           | 0            | 0.01                     | 10.76                       | 11            | 96.64          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 4           | 0            | 0.01                     | 10.76                       | 11            | 96.64          | 0.01                              | ANT Main | INPAQ                |
|        |            |                 |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Bottom of laptop | 0            | 0.486                    | 10.62                       | 11            | 96.59          | 0.55                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Bottom Face      | 0            | 0.093                    | 10.62                       | 11            | 96.59          | 0.11                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 1           | 0            | 0.759                    | 10.62                       | 11            | 96.59          | 0.86                              | ANT Aux  | INPAQ                |
| 14     | WLAN 5 GHz | 802.11ac VHT80  | 106     | 5530            | Side 1           | 0            | 0.833                    | 10.92                       | 11            | 96.88          | 0.88                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 106     | 5530            | Side 1           | 0            | 0.789                    | 10.92                       | 11            | 96.88          | 0.83                              | ANT Aux  | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 2           | 0            | 0.01                     | 10.62                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 3           | 0            | 0.01                     | 10.62                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT160 | 114     | 5570            | Side 4           | 0            | 0.01                     | 10.62                       | 11            | 96.59          | 0.01                              | ANT Aux  | INPAQ                |
|        |            |                 |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Bottom of laptop | 0            | 0.573                    | 10.96                       | 11            | 96.92          | 0.60                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Bottom Face      | 0            | 0.201                    | 10.96                       | 11            | 96.92          | 0.21                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Side 1           | 0            | 0.742                    | 10.96                       | 11            | 96.92          | 0.77                              | ANT Main | INPAQ                |
| 16     | WLAN 5 GHz | 802.11n HT40    | 151     | 5755            | Side 1           | 0            | 0.764                    | 10.93                       | 11            | 96.15          | 0.81                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11n HT40    | 151     | 5755            | Side 1           | 0            | 0.712                    | 10.93                       | 11            | 96.15          | 0.75                              | ANT Main | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Side 2           | 0            | 0.01                     | 10.96                       | 11            | 96.92          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Side 3           | 0            | 0.01                     | 10.96                       | 11            | 96.92          | 0.01                              | ANT Main | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80  | 155     | 5775            | Side 4           | 0            | 0.01                     | 10.96                       | 11            | 96.92          | 0.01                              | ANT Main | INPAQ                |

Note: The index number with symbol "\*" is for SPLSR only.

| Index. | Band       | Modulation     | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | Reported SAR <sub>1g</sub> (W/kg) | Antenna | Antenna Manufacturer |
|--------|------------|----------------|---------|-----------------|------------------|--------------|--------------------------|-----------------------------|---------------|----------------|-----------------------------------|---------|----------------------|
| 17*    | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Bottom of laptop | 0            | 0.599                    | 10.7                        | 11            | 96.88          | 0.66                              | ANT Aux | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Bottom Face      | 0            | 0.155                    | 10.7                        | 11            | 96.88          | 0.17                              | ANT Aux | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Side 1           | 0            | 0.837                    | 10.7                        | 11            | 96.88          | 0.93                              | ANT Aux | INPAQ                |
| 18     | WLAN 5 GHz | 802.11n HT40   | 151     | 5755            | Side 1           | 0            | 0.94                     | 10.98                       | 11            | 96.11          | 0.98                              | ANT Aux | INPAQ                |
|        | WLAN 5 GHz | 802.11n HT40   | 151     | 5755            | Side 1           | 0            | 0.857                    | 10.98                       | 11            | 96.11          | 0.90                              | ANT Aux | AWAN                 |
|        | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Side 2           | 0            | 0.01                     | 10.7                        | 11            | 96.88          | 0.01                              | ANT Aux | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Side 3           | 0            | 0.01                     | 10.7                        | 11            | 96.88          | 0.01                              | ANT Aux | INPAQ                |
|        | WLAN 5 GHz | 802.11ac VHT80 | 155     | 5775            | Side 4           | 0            | 0.01                     | 10.7                        | 11            | 96.88          | 0.01                              | ANT Aux | INPAQ                |

Note: The index number with symbol "\*" is for SPLSR only.

| Index. | Band       | Modulation     | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | Reported SAR <sub>1g</sub> (W/kg) | Antenna  | Antenna Manufacturer | APD W/m <sup>2</sup> (4cm <sup>2</sup> ) |
|--------|------------|----------------|---------|-----------------|------------------|--------------|--------------------------|-----------------------------|---------------|----------------|-----------------------------------|----------|----------------------|------------------------------------------|
| 53     | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Bottom of laptop | 0            | 0.13                     | 9.39                        | 9.5           | 96.53          | 0.14                              | ANT Main | INPAQ                | 0.901                                    |
| 50     | WLAN 6 GHz | 802.11ax HE160 | 15      | 6025            | Bottom of laptop | 0            | 0.22                     | 8.6                         | 9             | 96.53          | 0.25                              | ANT Main | INPAQ                | 1.38                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 15      | 6025            | Bottom of laptop | 0            | 0.191                    | 8.6                         | 9             | 96.53          | 0.22                              | ANT Main | AWAN                 | 1.1                                      |
|        | WLAN 6 GHz | 802.11ax HE160 | 47      | 6185            | Bottom of laptop | 0            | 0.211                    | 8.58                        | 9             | 96.53          | 0.24                              | ANT Main | INPAQ                | 1.18                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 79      | 6345            | Bottom of laptop | 0            | 0.212                    | 9.31                        | 9.5           | 96.53          | 0.23                              | ANT Main | INPAQ                | 0.961                                    |
| 51     | WLAN 6 GHz | 802.11ax HE160 | 111     | 6505            | Bottom of laptop | 0            | 0.114                    | 9.22                        | 9.5           | 96.53          | 0.13                              | ANT Main | INPAQ                | 0.647                                    |
| 52     | WLAN 6 GHz | 802.11ax HE160 | 143     | 6665            | Bottom of laptop | 0            | 0.163                    | 8.81                        | 9             | 96.53          | 0.18                              | ANT Main | INPAQ                | 1                                        |
|        | WLAN 6 GHz | 802.11ax HE160 | 175     | 6825            | Bottom of laptop | 0            | 0.142                    | 8.61                        | 9             | 96.53          | 0.16                              | ANT Main | INPAQ                | 1.01                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Bottom Face      | 0            | 0.039                    | 9.39                        | 9.5           | 96.53          | 0.04                              | ANT Main | INPAQ                | 0.216                                    |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 1           | 0            | 0.092                    | 9.39                        | 9.5           | 96.53          | 0.10                              | ANT Main | INPAQ                | 0.515                                    |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 2           | 0            | 0.066                    | 9.39                        | 9.5           | 96.53          | 0.07                              | ANT Main | INPAQ                | 0.318                                    |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 3           | 0            | 0.01                     | 9.39                        | 9.5           | 96.53          | 0.01                              | ANT Main | INPAQ                | 0.01                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 4           | 0            | 0.01                     | 9.39                        | 9.5           | 96.53          | 0.01                              | ANT Main | INPAQ                | 0.01                                     |
|        |            |                |         |                 |                  |              |                          |                             |               |                |                                   |          |                      |                                          |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Bottom of laptop | 0            | 0.097                    | 9.34                        | 9.5           | 96.50          | 0.10                              | ANT Aux  | INPAQ                | 0.717                                    |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Bottom Face      | 0            | 0.031                    | 9.34                        | 9.5           | 96.50          | 0.03                              | ANT Aux  | INPAQ                | 0.177                                    |
| 61     | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 1           | 0            | 0.104                    | 9.34                        | 9.5           | 96.50          | 0.11                              | ANT Aux  | INPAQ                | 0.662                                    |
| 58     | WLAN 6 GHz | 802.11ax HE160 | 15      | 6025            | Side 1           | 0            | 0.268                    | 8.86                        | 9             | 96.50          | 0.29                              | ANT Aux  | INPAQ                | 1.75                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 47      | 6185            | Side 1           | 0            | 0.201                    | 8.74                        | 9             | 96.50          | 0.22                              | ANT Aux  | INPAQ                | 1.41                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 79      | 6345            | Side 1           | 0            | 0.207                    | 9.17                        | 9.5           | 96.50          | 0.23                              | ANT Aux  | INPAQ                | 1.36                                     |
| 59     | WLAN 6 GHz | 802.11ax HE160 | 111     | 6505            | Side 1           | 0            | 0.289                    | 9.21                        | 9.5           | 96.50          | 0.32                              | ANT Aux  | INPAQ                | 1.87                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 111     | 6505            | Side 1           | 0            | 0.212                    | 9.21                        | 9.5           | 96.50          | 0.23                              | ANT Aux  | AWAN                 | 1.42                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 143     | 6665            | Side 1           | 0            | 0.164                    | 8.84                        | 9             | 96.50          | 0.18                              | ANT Aux  | INPAQ                | 0.976                                    |
| 60     | WLAN 6 GHz | 802.11ax HE160 | 175     | 6825            | Side 1           | 0            | 0.21                     | 8.69                        | 9             | 96.50          | 0.23                              | ANT Aux  | INPAQ                | 1.38                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 2           | 0            | 0.01                     | 9.34                        | 9.5           | 96.50          | 0.01                              | ANT Aux  | INPAQ                | 0.01                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 3           | 0            | 0.01                     | 9.34                        | 9.5           | 96.50          | 0.01                              | ANT Aux  | INPAQ                | 0.01                                     |
|        | WLAN 6 GHz | 802.11ax HE160 | 207     | 6985            | Side 4           | 0            | 0.045                    | 9.34                        | 9.5           | 96.50          | 0.05                              | ANT Aux  | INPAQ                | 0.01                                     |

Note: The index nuber with symbol "" is for SPLSR only.

### 10.5.2 Power Density Test Result

| Index. | Band       | Channel | Frequency (MHz) | Test Position    | sPDtot<br>4 cm <sup>2</sup><br>(W/m <sup>2</sup> ) | E peak<br>(V/m) | H peak<br>(A/m) | Meas.<br>Conducted<br>Power<br>(dBm) | Tune-up<br>(dBm) | Duty<br>Cycle<br>(%) | Scaling<br>sPDtot<br>4 cm <sup>2</sup><br>(W/m <sup>2</sup> ) | Antenna  | Antenna<br>Manufacturer |
|--------|------------|---------|-----------------|------------------|----------------------------------------------------|-----------------|-----------------|--------------------------------------|------------------|----------------------|---------------------------------------------------------------|----------|-------------------------|
| 66     | WLAN 6 GHz | 15      | 6025            | Bottom of laptop | 1.84                                               | 40.4            | 0.112           | 8.6                                  | 9                | 96.53                | 2.09                                                          | ANT Main | INPAQ                   |
| 67     | WLAN 6 GHz | 79      | 6345            | Bottom of laptop | 1.68                                               | 38.5            | 0.123           | 9.31                                 | 9.5              | 96.53                | 1.82                                                          | ANT Main | INPAQ                   |
| 68     | WLAN 6 GHz | 111     | 6505            | Bottom of laptop | 1.13                                               | 28.3            | 0.078           | 9.22                                 | 9.5              | 96.53                | 1.25                                                          | ANT Main | INPAQ                   |
| 69     | WLAN 6 GHz | 143     | 6665            | Bottom of laptop | 2.82                                               | 54.9            | 0.134           | 8.81                                 | 9                | 96.53                | 3.05                                                          | ANT Main | INPAQ                   |
| 70     | WLAN 6 GHz | 207     | 6985            | Bottom of laptop | 1.22                                               | 32.9            | 0.094           | 9.39                                 | 9.5              | 96.53                | 1.30                                                          | ANT Main | INPAQ                   |
|        | WLAN 6 GHz | 15      | 6025            | Side 1           | 1.51                                               | 34.5            | 0.116           | 8.6                                  | 9                | 96.53                | 1.72                                                          | ANT Main | INPAQ                   |
|        | WLAN 6 GHz | 79      | 6345            | Side 1           | 1.06                                               | 34.3            | 0.083           | 9.31                                 | 9.5              | 96.53                | 1.15                                                          | ANT Main | INPAQ                   |
|        | WLAN 6 GHz | 111     | 6505            | Side 1           | 1.11                                               | 27.6            | 0.079           | 9.22                                 | 9.5              | 96.53                | 1.23                                                          | ANT Main | INPAQ                   |
|        | WLAN 6 GHz | 143     | 6665            | Side 1           | 0.693                                              | 36.3            | 0.094           | 8.81                                 | 9                | 96.53                | 0.75                                                          | ANT Main | INPAQ                   |
|        | WLAN 6 GHz | 207     | 6985            | Side 1           | 0.907                                              | 26.6            | 0.078           | 9.39                                 | 9.5              | 96.53                | 0.96                                                          | ANT Main | INPAQ                   |
|        |            |         |                 |                  |                                                    |                 |                 |                                      |                  |                      |                                                               |          |                         |
|        | WLAN 6 GHz | 15      | 6025            | Bottom of laptop | 1.15                                               | 44.6            | 0.116           | 8.86                                 | 9                | 96.50                | 1.23                                                          | ANT Aux  | INPAQ                   |
|        | WLAN 6 GHz | 79      | 6345            | Bottom of laptop | 1.08                                               | 40.1            | 0.089           | 9.17                                 | 9.5              | 96.50                | 1.21                                                          | ANT Aux  | INPAQ                   |
|        | WLAN 6 GHz | 111     | 6505            | Bottom of laptop | 1.08                                               | 40.5            | 0.085           | 9.21                                 | 9.5              | 96.50                | 1.20                                                          | ANT Aux  | INPAQ                   |
|        | WLAN 6 GHz | 175     | 6825            | Bottom of laptop | 1.43                                               | 32.4            | 0.092           | 8.69                                 | 9                | 96.50                | 1.59                                                          | ANT Aux  | INPAQ                   |
|        | WLAN 6 GHz | 207     | 6985            | Bottom of laptop | 1.1                                                | 27.1            | 0.076           | 9.34                                 | 9.5              | 96.50                | 1.18                                                          | ANT Aux  | INPAQ                   |
| 81     | WLAN 6 GHz | 15      | 6025            | Side 1           | 1.48                                               | 47.1            | 0.094           | 8.86                                 | 9                | 96.50                | 1.58                                                          | ANT Aux  | INPAQ                   |
| 82     | WLAN 6 GHz | 79      | 6345            | Side 1           | 1.1                                                | 45.6            | 0.083           | 9.17                                 | 9.5              | 96.50                | 1.23                                                          | ANT Aux  | INPAQ                   |
| 83     | WLAN 6 GHz | 111     | 6505            | Side 1           | 1.44                                               | 47.2            | 0.11            | 9.21                                 | 9.5              | 96.50                | 1.59                                                          | ANT Aux  | INPAQ                   |
| 84     | WLAN 6 GHz | 175     | 6825            | Side 1           | 1.61                                               | 38.7            | 0.087           | 8.69                                 | 9                | 96.50                | 1.79                                                          | ANT Aux  | INPAQ                   |
| 85     | WLAN 6 GHz | 207     | 6985            | Side 1           | 1.12                                               | 31.7            | 0.067           | 9.34                                 | 9.5              | 96.50                | 1.20                                                          | ANT Aux  | INPAQ                   |

Note:

1. The test spacing is the distance between probe sensor and DUT surface.
2. The test duty cycle was approached 100 % to facilitate test measurements only. It was confirmed by the manufacturer that the device was not over driven at this test duty cycle, to facilitate linear scaling in the test report.
3.  $1.0 \text{ W/m}^2 = 0.1 \text{ mW/cm}^2$ .

## 10.6 SAR Measurement Variability

According to KDB 865664 D01v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required:

1. The original highest measured Reported SAR 1-g is  $\geq 0.80$  W/kg, repeated that measurement once.
2. Perform a second repeated measurement the ratio of the largest to the smallest SAR for the original and first repeated measurements is  $<1.2$  W/kg, or when the original or repeated measurement is  $\geq 1.45$  W/kg (~10% from the 1-g SAR limit).

| Band         | Modulation     | Channel | Frequency (MHz) | Test Position    | Spacing (mm) | Note            | Original SAR <sub>1g</sub> (W/kg) | First SAR <sub>1g</sub> (W/kg) | First Ratio SAR <sub>1g</sub> |
|--------------|----------------|---------|-----------------|------------------|--------------|-----------------|-----------------------------------|--------------------------------|-------------------------------|
| WLAN 2.4 GHz | 802.11b        | 6       | 2437            | Bottom of laptop | 0            | Index. #1_once  | 0.996                             | 0.951                          | 4.52%                         |
| WLAN 2.4 GHz | 802.11b        | 6       | 2437            | Bottom of laptop | 0            | Index. #3_once  | 1.14                              | 1.137                          | 0.26%                         |
| WLAN 5 GHz   | 802.11ac VHT80 | 58      | 5290            | Side 1           | 0            | Index. #8_once  | 0.978                             | 0.976                          | 0.20%                         |
| WLAN 5 GHz   | 802.11ac VHT80 | 106     | 5530            | Side 1           | 0            | Index. #12_once | 0.87                              | 0.833                          | 4.25%                         |
| WLAN 5 GHz   | 802.11ac VHT80 | 106     | 5530            | Side 1           | 0            | Index. #14_once | 0.833                             | 0.829                          | 0.48%                         |
| WLAN 5 GHz   | 802.11n HT40   | 151     | 5755            | Side 1           | 0            | Index. #18_once | 0.94                              | 0.932                          | 0.85%                         |

## 10.7 Simultaneous Transmission Evaluation

### 10.7.1 Simultaneous Transmission Configurations

| Condition(s) | Band                     |                         |                        |                       |                        |                       |           |
|--------------|--------------------------|-------------------------|------------------------|-----------------------|------------------------|-----------------------|-----------|
|              | WLAN 2.4 GHz<br>ANT Main | WLAN 2.4 GHz<br>ANT Aux | WLAN 5 GHz<br>ANT Main | WLAN 5 GHz<br>ANT Aux | WLAN 6 GHz<br>ANT Main | WLAN 6 GHz<br>ANT Aux | Bluetooth |
| 1            | V                        | V                       | -                      | -                     | -                      | -                     | -         |
| 2            | V                        | -                       | -                      | -                     | -                      | -                     | V         |
| 3            | -                        | -                       | V                      | V                     | -                      | -                     | -         |
| 4            | -                        | -                       | V                      | V                     | -                      | -                     | V         |
| 5            | -                        | -                       | V                      | -                     | -                      | -                     | V         |
| 6            | -                        | -                       | -                      | V                     | -                      | -                     | V         |
| 7            | -                        | -                       | -                      | -                     | V                      | V                     | -         |
| 8            | -                        | -                       | -                      | -                     | V                      | V                     | V         |
| 9            | -                        | -                       | -                      | -                     | V                      | -                     | V         |
| 10           | -                        | -                       | -                      | -                     | -                      | V                     | V         |

#### <Total Exposure Ratio (TER)>

According to IEC TR 63170 and TCBC workshop, total Exposure Ratio (TER) is calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit.

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_n, \text{ limit}} + \sum_{m=1}^M \frac{S_{m,avg}}{S_{lim, \text{ limit}}} < 1$$

Numerical sum of the two ratios should be less than 1.

The worst-case power density results for each test configuration among all antenna arrays were considered for Total Exposure Ratio (TER) analysis. The sum of TER were listed in the following subclause.

### 10.7.2 Simultaneous Transmission Result

When the sum of SAR<sub>1g</sub> of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

The sum of SAR<sub>1g</sub> results and TER results are shown as below.

#### <Sum of SAR<sub>1g</sub> Results>

| Exposure Position        | 1                        | 2                        | 3                        | 4                        | 5                        | 6                        | 7                        | 1+2                       | 1+7                       | 3+4                       | 3+7                       | 4+7                       | 3+4+7                     | 5+6                       | 5+7                       | 6+7                       | 5+6+7                     |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
|                          | WLAN 2.4 GHz ANT Main    | WLAN 2.4 GHz ANT Aux     | WLAN 5 GHz ANT Main      | WLAN 5 GHz ANT Aux       | WLAN 6 GHz ANT Main      | WLAN 6 GHz ANT Aux       | Bluetooth ANT Aux        | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) |
|                          | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) | SAR <sub>1g</sub> (W/kg) |                           |                           |                           |                           |                           |                           |                           |                           |                           |                           |
| Bottom of laptop at 0 mm | 1.06                     | 1.16                     | 0.73                     | 0.66                     | 0.25                     | 0.10                     | 0.23                     | 2.22                      | 1.29                      | 1.39                      | 0.96                      | 0.89                      | 1.62                      | 0.35                      | 0.48                      | 0.33                      | 0.58                      |
| Bottom Face at 0 mm      | 0.16                     | 0.16                     | 0.21                     | 0.17                     | 0.04                     | 0.03                     | 0.02                     | 0.32                      | 0.18                      | 0.38                      | 0.23                      | 0.19                      | 0.40                      | 0.07                      | 0.06                      | 0.05                      | 0.09                      |
| side 1 at 0 mm           | 0.99                     | 1.13                     | 1.01                     | 0.98                     | 0.10                     | 0.32                     | 0.27                     | 2.12                      | 1.26                      | 1.99                      | 1.28                      | 1.25                      | 2.26                      | 0.42                      | 0.37                      | 0.59                      | 0.69                      |
| side 2 at 0 mm           | 0.27                     | 0.01                     | 0.13                     | 0.01                     | 0.07                     | 0.01                     | 0.02                     | 0.28                      | 0.29                      | 0.14                      | 0.15                      | 0.03                      | 0.16                      | 0.08                      | 0.09                      | 0.03                      | 0.10                      |
| side 3 at 0 mm           | 0.01                     | 0.01                     | 0.01                     | 0.01                     | 0.01                     | 0.01                     | 0.02                     | 0.02                      | 0.03                      | 0.02                      | 0.03                      | 0.03                      | 0.04                      | 0.02                      | 0.03                      | 0.03                      | 0.04                      |
| side 4 at 0 mm           | 0.08                     | 0.13                     | 0.01                     | 0.01                     | 0.01                     | 0.05                     | 0.02                     | 0.21                      | 0.10                      | 0.02                      | 0.03                      | 0.03                      | 0.04                      | 0.06                      | 0.03                      | 0.07                      | 0.08                      |

#### <Total Exposure Ratio (TER) Results>

| Exposure Position | 8                            | 9                            | 10                | 8+9                  | 8+10                 | 9+10                 | 8+9+10               |
|-------------------|------------------------------|------------------------------|-------------------|----------------------|----------------------|----------------------|----------------------|
|                   | WLAN 6 GHz ANT Main          | WLAN 6 GHz ANT Aux           | Bluetooth ANT Aux | Total Exposure Ratio | Total Exposure Ratio | Total Exposure Ratio | Total Exposure Ratio |
|                   | Total PD (W/m <sup>2</sup> ) | Total PD (W/m <sup>2</sup> ) | 1g SAR (W/kg)     |                      |                      |                      |                      |
| Bottom of laptop  | 3.05                         | 1.73                         | 0.23              | 0.48                 | 0.45                 | 0.32                 | 0.62                 |
| side 1            | 1.72                         | 1.79                         | 0.27              | 0.35                 | 0.34                 | 0.35                 | 0.52                 |

Note: 1.0 W/m<sup>2</sup> = 0.1 mW/cm<sup>2</sup>.

### 10.7.3 SAR to peak location separation (SPLSR)

According to KDB 447498, when the sum of SAR is greater than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR), and the simultaneously transmitting antennas must be considered one pair at a time. The ratio is determined by  $(SAR_1 + SAR_2)^{1.5} / (\text{separation distance between the peak SAR locations for the antenna pair, mm})$ , round to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

The SPLSR hotspot combination procedure in TCB workshop Nov. 2019 was applied when simultaneous transmission SAR is  $> 1.6$  W/kg and antenna pair is co-located.

| #1_WLAN 2.4 GHz ANT Main + WLAN 2.4 GHz ANT Aux |                                            |                 |                  |          |                                |
|-------------------------------------------------|--------------------------------------------|-----------------|------------------|----------|--------------------------------|
| Index.                                          |                                            |                 | 1                | +        | 3                              |
| Band                                            | Modulation                                 | Frequency (MHz) | Test Position    | Antenna  | Peak location separation ratio |
| WLAN 2.4 GHz                                    | 802.11b                                    | 2437            | Bottom of laptop | ANT Main | 0.02                           |
| WLAN 2.4 GHz                                    | 802.11b                                    | 2437            | Bottom of laptop | ANT Aux  |                                |
| Reported SAR <sub>1g</sub> (W/kg)               | $\Sigma$ Reported SAR <sub>1g</sub> (W/Kg) | X (mm)          | Y (mm)           | Z (mm)   | Antenna pair (mm)              |
| 1.06                                            | 2.22                                       | -102.20         | 107.40           | 0.92     | 199.42                         |
| 1.16                                            |                                            | -99.20          | -92.00           | 0.85     |                                |

| #2_WLAN 2.4 GHz ANT Main + WLAN 2.4 GHz ANT Aux |                                            |                 |               |          |                                |
|-------------------------------------------------|--------------------------------------------|-----------------|---------------|----------|--------------------------------|
| Index.                                          |                                            |                 | 2*            | +        | 4*                             |
| Band                                            | Modulation                                 | Frequency (MHz) | Test Position | Antenna  | Peak location separation ratio |
| WLAN 2.4 GHz                                    | 802.11b                                    | 2437            | Side 1        | ANT Main | 0.02                           |
| WLAN 2.4 GHz                                    | 802.11b                                    | 2437            | Side 1        | ANT Aux  |                                |
| Reported SAR <sub>1g</sub> (W/kg)               | $\Sigma$ Reported SAR <sub>1g</sub> (W/Kg) | X (mm)          | Y (mm)        | Z (mm)   | Antenna pair (mm)              |
| 0.99                                            | 2.12                                       | -2.80           | 102.00        | 33.00    | 199.96                         |
| 1.13                                            |                                            | -2.80           | -95.20        | -0.09    |                                |

| #3_WLAN 5 GHz ANT Main + WLAN 5 GHz ANT Aux |                                             |                 |               |          |                                |
|---------------------------------------------|---------------------------------------------|-----------------|---------------|----------|--------------------------------|
| Index.                                      |                                             |                 | 8             | +        | 18                             |
| Band                                        | Modulation                                  | Frequency (MHz) | Test Position | Antenna  | Peak location separation ratio |
| WLAN 5 GHz                                  | 802.11ac VHT80                              | 5290.000        | Side 1        | ANT Main | 0.02                           |
| WLAN 5 GHz                                  | 802.11n HT40                                | 5755            | Side 1        | ANT Aux  |                                |
| Reported SAR <sub>1 g</sub> (W/kg)          | $\Sigma$ Reported SAR <sub>1 g</sub> (W/Kg) | X (mm)          | Y (mm)        | Z (mm)   | Antenna pair (mm)              |
| 1.01                                        | 1.99                                        | -3.00           | 97.40         | 0.96     | 183.50                         |
| 0.98                                        |                                             | -0.64           | -86.08        | -0.52    |                                |

| #4_WLAN 5 GHz ANT Main + WLAN 5 GHz + Bluetooth ANT Aux |                                             |                 |                  |          |                                |
|---------------------------------------------------------|---------------------------------------------|-----------------|------------------|----------|--------------------------------|
| Index.                                                  |                                             |                 | 7*               | +        | 17*+5*                         |
| Band                                                    | Modulation                                  | Frequency (MHz) | Test Position    | Antenna  | Peak location separation ratio |
| WLAN 5 GHz                                              | 802.11ac VHT160                             | 5250            | Bottom of laptop | ANT Main | 0.01                           |
| WLAN 5 GHz + Bluetooth                                  | 802.11ac VHT80 + GFSK                       | 5775+2402       | Bottom of laptop | ANT Aux  |                                |
| Reported SAR <sub>1 g</sub> (W/kg)                      | $\Sigma$ Reported SAR <sub>1 g</sub> (W/Kg) | X (mm)          | Y (mm)           | Z (mm)   | Antenna pair (mm)              |
| 0.73                                                    | 1.62                                        | -103.80         | 108.00           | 1.23     | 198.02                         |
| 0.89                                                    |                                             | -101.12         | -90.00           | 0.87     |                                |

| #5_WLAN 5 GHz ANT Main + WLAN 5 GHz + Bluetooth ANT Aux |                                             |                 |               |          |                                |
|---------------------------------------------------------|---------------------------------------------|-----------------|---------------|----------|--------------------------------|
| Index.                                                  |                                             |                 | 8             | +        | 18+6                           |
| Band                                                    | Modulation                                  | Frequency (MHz) | Test Position | Antenna  | Peak location separation ratio |
| WLAN 5 GHz                                              | 802.11ac VHT80                              | 5290            | Side 1        | ANT Main | 0.02                           |
| WLAN 5 GHz + Bluetooth                                  | 802.11n HT40 + GFSK                         | 5755+2480       | Side 1        | ANT Aux  |                                |
| Reported SAR <sub>1 g</sub> (W/kg)                      | $\Sigma$ Reported SAR <sub>1 g</sub> (W/Kg) | X (mm)          | Y (mm)        | Z (mm)   | Antenna pair (mm)              |
| 1.01                                                    | 2.26                                        | -3.00           | 97.40         | 0.96     | 183.50                         |
| 1.25                                                    |                                             | -0.64           | -86.08        | -0.52    |                                |

## 10.8 Requirements on the Uncertainty Evaluation

### 10.8.1 SAR Uncertainty Evaluation

Decision Rule

- ☒ Uncertainty is not included.  
☐ Uncertainty is included.

The highest measured 1-g SAR is less than 1.5 W/kg and the highest measured 10-g SAR is less than 3.75 W/kg.

Therefore, per KDB Publication 865664 D01, the extended measurement uncertainty analysis described in IEEE 1528-2013 and IEC/IEEE 62209-1528 is not required.

### 10.8.2 Power Density Uncertainty Evaluation

Decision Rule

- ☒ Uncertainty is not included.  
☐ Uncertainty is included.

According to IEC/IEEE 63195, if the total uncertainty exceeds 2 dB, the measurement results must be adjusted according to IEC 62479. The total measurement uncertainty for DASY system is 1.51 dB. Therefore, the adjustment is not required.

## 11. Conclusion

The SAR test values and PD test values found for the device are separately below the maximum limit of 1.6 W/kg and 1.0 mW/cm<sup>2</sup>.

---- END ----