

# SAR & Power Density Test Report

Report No. : SFBFLF-WTW-P22061090-3

Applicant : ASUSTeK COMPUTER INC.

Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Product : 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card

FCC ID : RAS-MT7922A22M

Brand : MediaTek

Model No. : MT7922A22M

FCC Rule Part : CFR §2.1093

Standards : IEC/IEEE 66209-1528:2020, IEC TR 63170:2018  
KDB 865664 D01 v01r04, KDB 865664 D02 v01r02,  
KDB 248227 D01 v02r02, KDB 447498 D01 v06 , KDB 616217 D04 v01r02

Sample Received Date : Jun. 30, 2022

Date of Testing : Jul. 15, 2022 ~ Jul. 20, 2022

Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch—Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :



Vera Huang / Specialist

Approved By :



Gordon Lin / Manager



FCC Accredited No.: TW0003

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

|                                                                                                        |    |
|--------------------------------------------------------------------------------------------------------|----|
| Release Control Record .....                                                                           | 3  |
| 1. Summary of Maximum SAR and Power Density Value .....                                                | 4  |
| 2. Description of Equipment Under Test .....                                                           | 5  |
| 3. SAR Measurement System .....                                                                        | 7  |
| 3.1 Definition of Specific Absorption Rate (SAR) .....                                                 | 7  |
| 3.2 SPEAG DASY6 System .....                                                                           | 7  |
| 3.2.1 Robot.....                                                                                       | 8  |
| 3.2.2 Probes.....                                                                                      | 9  |
| 3.2.3 Data Acquisition Electronics (DAE) .....                                                         | 9  |
| 3.2.4 Phantoms.....                                                                                    | 9  |
| 3.2.5 Device Holder.....                                                                               | 10 |
| 3.2.6 System Validation Dipoles.....                                                                   | 11 |
| 3.2.7 Power Source.....                                                                                | 11 |
| 3.2.8 Tissue Simulating Liquids.....                                                                   | 12 |
| 3.3 SAR System Verification .....                                                                      | 14 |
| 3.4 SAR Measurement Procedure .....                                                                    | 15 |
| 3.4.1 Area Scan and Zoom Scan Procedure .....                                                          | 15 |
| 3.4.2 Volume Scan Procedure.....                                                                       | 16 |
| 3.4.3 Power Drift Monitoring.....                                                                      | 17 |
| 3.4.4 Spatial Peak SAR Evaluation .....                                                                | 17 |
| 3.4.5 SAR Averaged Methods.....                                                                        | 17 |
| 4. Power Density Measurement System .....                                                              | 18 |
| 4.1 Definition of Power Density .....                                                                  | 18 |
| 4.2 SPEAG DASY6 System .....                                                                           | 18 |
| 4.2.1 Robot.....                                                                                       | 19 |
| 4.2.2 EUmmWV2 mm-Wave Probe.....                                                                       | 19 |
| 4.2.3 System Verification Sources.....                                                                 | 21 |
| 4.3 Power Density System Verification.....                                                             | 22 |
| 4.4 Power Density Measurement Procedure.....                                                           | 23 |
| 4.4.1 Computation of the Electric Field Polarization Ellipse .....                                     | 24 |
| 4.4.2 Total Field and Power Flux Density Reconstruction .....                                          | 25 |
| 4.4.3 Power Flux Density Averaging .....                                                               | 25 |
| 5. SAR Measurement Evaluation.....                                                                     | 26 |
| 5.1 EUT Configuration and Setting.....                                                                 | 26 |
| 5.2 EUT Testing Position .....                                                                         | 28 |
| 5.3 Tissue Verification .....                                                                          | 29 |
| 5.4 System Validation.....                                                                             | 29 |
| 5.5 System Verification.....                                                                           | 29 |
| 5.6 Maximum Output Power.....                                                                          | 29 |
| 5.6.1 Maximum Target Conducted Power .....                                                             | 29 |
| 5.6.2 Measured Conducted Power Result.....                                                             | 29 |
| 5.7 SAR Testing Results .....                                                                          | 30 |
| 5.7.1 SAR Test Reduction Considerations .....                                                          | 30 |
| 5.7.2 SAR & Power Density Results for Body Exposure Condition (Test Separation Distance is 0 mm) ..... | 31 |
| 5.7.3 SAR Measurement Variability.....                                                                 | 31 |
| 5.7.4 Simultaneous Multi-band Transmission Evaluation .....                                            | 31 |
| 6. Calibration of Test Equipment.....                                                                  | 32 |
| 7. Measurement Uncertainty.....                                                                        | 33 |
| 8. Information of the Testing Laboratories.....                                                        | 34 |
| Annex A. Plots of SAR System Verification                                                              |    |
| Annex B. Plots of SAR Measurement                                                                      |    |
| Annex C. Tissue & System Verification                                                                  |    |
| Annex D. Maximum Target Conducted Power                                                                |    |
| Annex E. Measured Conducted Power Result                                                               |    |
| Annex F. SAR and Power Density Test Result                                                             |    |
| Annex G. SAR Measurement Variability                                                                   |    |
| Annex H. Analysis of Simultaneous Transmission SAR                                                     |    |
| Annex I. SAR to Peak Location Separation Ratio Analysis                                                |    |
| Annex J. Calibration of Test Equipment List                                                            |    |
| Annex K. Considerations Related to Bluetooth for Setup and Testing                                     |    |
| Annex L. Verifying the Mechanism Operation of Gravity-sensor                                           |    |
| Annex Z. Calibration Certificate for Probe and Dipole                                                  |    |

## Release Control Record

| Report No.             | Reason for Change | Date Issued   |
|------------------------|-------------------|---------------|
| SFBFLF-WTW-P22061090-3 | Initial release   | Aug. 14, 2022 |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |
|                        |                   |               |

## SAR Test Report

### 1. Summary of Maximum SAR and Power Density Value

| Equipment Class | Mode      | Highest SAR <sub>1g</sub> Body<br>Tested at 0 mm<br>(W/kg) |
|-----------------|-----------|------------------------------------------------------------|
| DTS             | 2.4G WLAN | 1.15                                                       |
| NII             | 5.3G WLAN | 1.14                                                       |
|                 | 5.6G WLAN | 1.14                                                       |
|                 | 5.8G WLAN | 1.14                                                       |
| DSS             | Bluetooth | 0.39                                                       |
| 6XD             | 6G WLAN   | 0.61                                                       |

| Mode    | Highest Absorb Power Density<br>[W/m <sup>2</sup> ] | Highest PD<br>(W/m <sup>2</sup> ) |
|---------|-----------------------------------------------------|-----------------------------------|
| 6G WLAN | 4.84                                                | 3.45                              |

| Highest Simultaneous Transmission SAR | Highest SAR <sub>1g</sub> Body<br>Tested at 0 mm<br>(W/kg) |
|---------------------------------------|------------------------------------------------------------|
|                                       | 1.59                                                       |

#### Note:

- The SAR criteria (**Head & Body: SAR-1g 1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
- According to 47 CFR part 2.1093, the MPE limits specified in part 1.1310 apply to portable devices that transmit at frequencies above 6 GHz. The localized power density limit for general population exposure is **1.0 mW/cm<sup>2</sup> (equal to 10 W/m<sup>2</sup>)** for frequency up to 100 GHz.
- Per FCC interim guidance for near-field power density measurement, the power density was spatially averaged over a circular area of 4 cm<sup>2</sup>.

**Test Reference Guidance:** IEEE C95.1:1992

## SAR Test Report

### 2. Description of Equipment Under Test

|                                                |                                                                                                                                                         |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT Type                                       | 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card                                                                                                             |
| FCC ID                                         | RAS-MT7922A22M                                                                                                                                          |
| Brand Name                                     | MediaTek                                                                                                                                                |
| Model Name                                     | MT7922A22M                                                                                                                                              |
| Tx Frequency Bands<br>(Unit: MHz)              | WLAN : 2412 ~ 2472, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825<br>5955 ~ 6415, 6435 ~ 6545, 6555 ~ 6885, 6895 ~ 7115<br>Bluetooth : 2402 ~ 2480 |
| Uplink Modulations                             | 802.11b : DSSS<br>802.11a/g/n/ac : OFDM<br>802.11ax : OFDMA<br>Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK                                                 |
| Maximum Tune-up Conducted Power<br>(Unit: dBm) | Please refer to Annex D                                                                                                                                 |
| Antenna Type                                   | Refer to Note                                                                                                                                           |
| EUT Stage                                      | Engineering Sample                                                                                                                                      |

#### Note:

- The EUT is authorized for use in specific End-product. Please refer to below for more details. The model of B5602FB was chosen for final test.

|                         | Laptop + Tablet Mode | Laptop Mode           |
|-------------------------|----------------------|-----------------------|
| Brand                   | ASUS                 | ASUS                  |
| Model                   | B5602FB              | B5602CB               |
| Institution Description | Can flip the screen  | Can't flip the screen |

- The antenna information is listed as below.

| Ant. Type               |      | Brand          |              |              | Model                                                             |              |              |              |              |              |
|-------------------------|------|----------------|--------------|--------------|-------------------------------------------------------------------|--------------|--------------|--------------|--------------|--------------|
| PIFA                    |      | South-Star     |              |              | Main: DC33002QA00 (3.N201.0192) / Aux.: DC33002QA10 (3.N201.0193) |              |              |              |              |              |
| Antenna Peak Gain (dBi) |      |                |              |              |                                                                   |              |              |              |              |              |
| Tablet Mode             |      |                |              |              |                                                                   |              |              |              |              |              |
| Ant.                    | BT   | 2400-2483.5MHz | 5150-5250MHz | 5250-5350MHz | 5470-5725MHz                                                      | 5725-5850MHz | 5925-6425MHz | 6425-6525MHz | 6525-6875MHz | 6875-7125MHz |
| Main                    | 1.88 | 1.88           | 2.44         | 2.44         | 2.80                                                              | 2.96         | 3.86         | 3.88         | 3.91         | 3.43         |
| Aux.                    | -    | 1.18           | 2.89         | 2.98         | 2.83                                                              | 2.75         | 2.91         | 3.03         | 3.51         | 3.30         |
| Laptop Mode             |      |                |              |              |                                                                   |              |              |              |              |              |
| Main                    | 1.41 | 1.41           | 2.46         | 2.96         | 2.98                                                              | 2.98         | 3.96         | 3.91         | 3.94         | 3.95         |
| Aux.                    | -    | 2.15           | 2.87         | 2.73         | 2.95                                                              | 2.72         | 3.67         | 3.86         | 3.85         | 3.92         |

| Ant. Type               |      |                | Brand        |              |              | Model                                                     |              |              |              |              |
|-------------------------|------|----------------|--------------|--------------|--------------|-----------------------------------------------------------|--------------|--------------|--------------|--------------|
| PIFA                    |      |                | Pulse        |              |              | Main: DC33002Q900 (TZ2283D) / Aux.: DC33002Q910 (TZ2283E) |              |              |              |              |
| Antenna Peak Gain (dBi) |      |                |              |              |              |                                                           |              |              |              |              |
| Tablet Mode             |      |                |              |              |              |                                                           |              |              |              |              |
| Ant.                    | BT   | 2400-2483.5MHz | 5150-5250MHz | 5250-5350MHz | 5470-5725MHz | 5725-5850MHz                                              | 5925-6425MHz | 6425-6525MHz | 6525-6875MHz | 6875-7125MHz |
| Main                    | 1.77 | 1.77           | 2.31         | 2.40         | 2.50         | 2.64                                                      | 3.74         | 3.83         | 3.83         | 3.12         |
| Aux.                    | -    | 0.88           | 2.58         | 2.48         | 2.73         | 2.71                                                      | 2.39         | 2.29         | 3.42         | 3.19         |
| Laptop Mode             |      |                |              |              |              |                                                           |              |              |              |              |
| Main                    | 1.27 | 1.27           | 2.35         | 2.84         | 2.82         | 1.80                                                      | 3.77         | 3.88         | 3.72         | 3.39         |
| Aux.                    | -    | 2.03           | 2.60         | 2.41         | 2.68         | 2.68                                                      | 3.45         | 3.66         | 3.63         | 3.83         |

- Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

## SAR Test Report

---

### List of End-product Accessory:

|                 |              |                 |
|-----------------|--------------|-----------------|
| Battery (SKU 1) | Brand Name   | ASUS            |
|                 | Model Name   | C31N2005        |
|                 | Power Rating | 11.55 Vdc, 50WH |
|                 | Type         | Li-ion          |
| Battery (SKU 3) | Brand Name   | ASUS            |
|                 | Model Name   | C41N2111        |
|                 | Power Rating | 15.48 Vdc, 84WH |
|                 | Type         | Li-ion          |

### **3. SAR Measurement System**

#### **3.1 Definition of Specific Absorption Rate (SAR)**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

#### **3.2 SPEAG DASY6 System**

DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

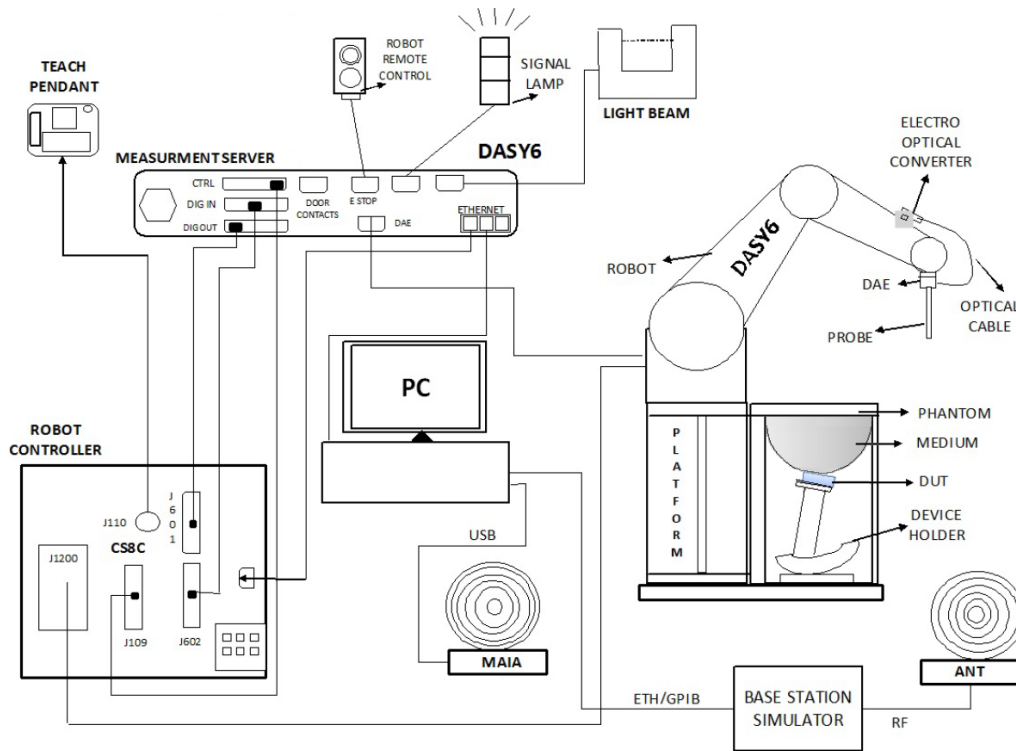

**Fig-3.1 SPEAG DASY6 System Setup**

## 3.2.1 Robot

The DASY6 system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 SPEAG DASY6 System**



## SAR Test Report

### 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

|                      |                                                                                                                                                          |                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                     |
| <b>Frequency</b>     | 4 MHz to 10 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.1$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                  |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                     |


### 3.2.3 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                     |                                                                                      |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                          |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                      |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                              |                                                                                      |
| <b>Input Offset Voltage</b> | $< 5\mu$ V (with auto zero)                                                                                                                                                                                                                         |                                                                                      |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                           |                                                                                      |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                      |

### 3.2.4 Phantoms

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>           | SAM-Twin Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                       |
| <b>Material</b>        | Vinylester, fiberglass reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                       |
| <b>Shell Thickness</b> | 2 $\pm$ 0.2 mm (6 $\pm$ 0.2 mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                       |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                       |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                       |

## SAR Test Report
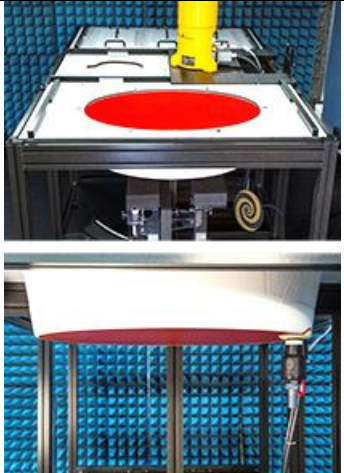
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <b>Construction</b>    | The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                     |
| <b>Material</b>        | Vinylester, fiberglass reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| <b>Shell Thickness</b> | 2.0 ± 0.2 mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                     |

### 3.2.5 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>        | MD4HHTV5 - Mounting Device for Hand-Held Transmitters                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| <b>Construction</b> | In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                      |
| <b>Material</b>     | Polyoxymethylene (POM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                      |

|                     |                                                                                                                                                                          |                                                                                       |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>        | MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters                                                                                                           |  |
| <b>Construction</b> | An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm. |                                                                                       |
| <b>Material</b>     | Polyoxymethylene (POM)                                                                                                                                                   |                                                                                       |

|                     |                                                                                                                                          |                                                                                       |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>        | MDA4SPV6 - Mounting Device Adaptor for Smart Phones                                                                                      |  |
| <b>Construction</b> | The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape. |                                                                                       |
| <b>Material</b>     | ROHACELL                                                                                                                                 |                                                                                       |

## SAR Test Report

|                     |                                                                                                                                                                                                                                              |                                                                                     |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters                                                                                                                                                                      |  |
| <b>Construction</b> | In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section. |                                                                                     |
| <b>Material</b>     | Polyoxymethylene (POM), PET-G, Foam                                                                                                                                                                                                          |                                                                                     |

### 3.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                      |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                      |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                      |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                      |
| <b>Power Capability</b> | > 100 W (f < 1GHz), > 40 W (f > 1GHz)                                                                                                                                |                                                                                      |

### 3.2.7 Power Source

|                              |                                                           |                                                                                       |
|------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                 | Powersource1                                              |  |
| <b>Signal Type</b>           | Continuous Wave                                           |                                                                                       |
| <b>Operating Frequencies</b> | 600 MHz to 5850 MHz                                       |                                                                                       |
| <b>Output Power</b>          | -5.0 dBm to +17.0 dBm                                     |                                                                                       |
| <b>Power Supply</b>          | 5V DC, via USB jack                                       |                                                                                       |
| <b>Power Consumption</b>     | <3 W                                                      |                                                                                       |
| <b>Applications</b>          | System performance check and validation with a CW signal. |                                                                                       |

## SAR Test Report

### 3.2.8 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10 % are listed in Table-3.1.

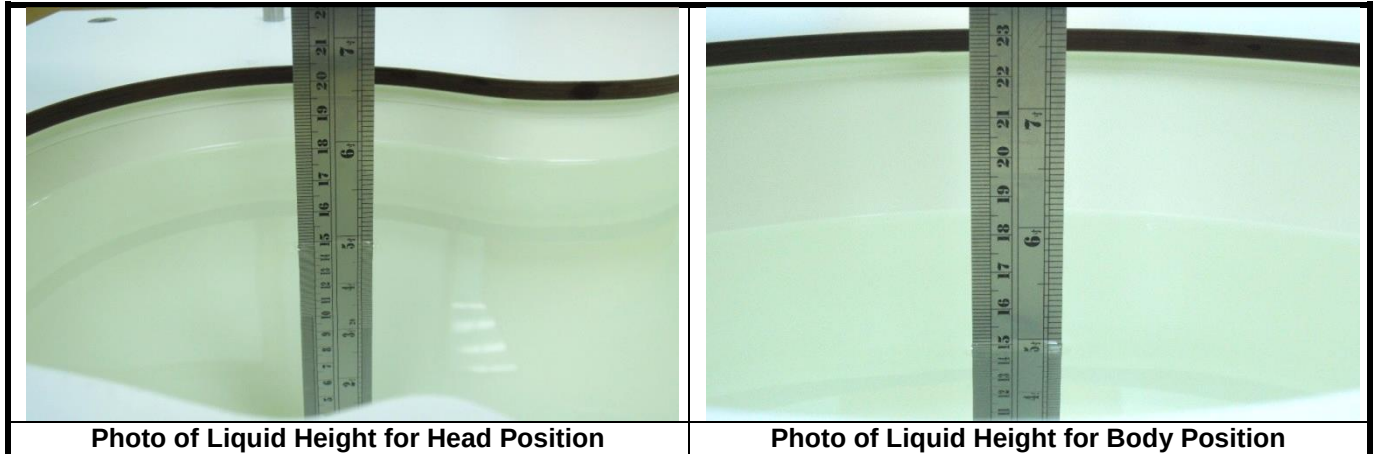


Table-3.1 Targets of Tissue Simulating Liquid

| Frequency (MHz) | Target Permittivity | Range of $\pm 10\%$ | Target Conductivity | Range of $\pm 10\%$ |
|-----------------|---------------------|---------------------|---------------------|---------------------|
| 450             | 43.5                | 39.2 ~ 47.9         | 0.87                | 0.78 ~ 0.96         |
| 750             | 41.9                | 37.7 ~ 46.1         | 0.89                | 0.80 ~ 0.98         |
| 835             | 41.5                | 37.4 ~ 45.7         | 0.90                | 0.81 ~ 0.99         |
| 900             | 41.5                | 37.4 ~ 45.7         | 0.97                | 0.87 ~ 1.07         |
| 1450            | 40.5                | 36.5 ~ 44.6         | 1.20                | 1.08 ~ 1.32         |
| 1500            | 40.4                | 36.4 ~ 44.4         | 1.23                | 1.11 ~ 1.35         |
| 1640            | 40.2                | 36.2 ~ 44.2         | 1.31                | 1.18 ~ 1.44         |
| 1750            | 40.1                | 36.1 ~ 44.1         | 1.37                | 1.23 ~ 1.51         |
| 1800            | 40.0                | 36.0 ~ 44.0         | 1.40                | 1.26 ~ 1.54         |
| 1900            | 40.0                | 36.0 ~ 44.0         | 1.40                | 1.26 ~ 1.54         |
| 2000            | 40.0                | 36.0 ~ 44.0         | 1.40                | 1.26 ~ 1.54         |
| 2100            | 39.8                | 35.8 ~ 43.8         | 1.49                | 1.34 ~ 1.64         |
| 2300            | 39.5                | 35.6 ~ 43.5         | 1.67                | 1.50 ~ 1.84         |
| 2450            | 39.2                | 35.3 ~ 43.1         | 1.80                | 1.62 ~ 1.98         |
| 2600            | 39.0                | 35.1 ~ 42.9         | 1.96                | 1.76 ~ 2.16         |
| 3000            | 38.5                | 34.7 ~ 42.4         | 2.40                | 2.16 ~ 2.64         |
| 3500            | 37.9                | 34.1 ~ 41.7         | 2.91                | 2.62 ~ 3.20         |
| 4000            | 37.4                | 33.7 ~ 41.1         | 3.43                | 3.09 ~ 3.77         |
| 4500            | 36.8                | 33.1 ~ 40.5         | 3.94                | 3.55 ~ 4.33         |
| 5000            | 36.2                | 32.6 ~ 39.8         | 4.45                | 4.01 ~ 4.90         |
| 5200            | 36.0                | 32.4 ~ 39.6         | 4.66                | 4.19 ~ 5.13         |
| 5400            | 35.8                | 32.2 ~ 39.4         | 4.86                | 4.37 ~ 5.35         |
| 5600            | 35.5                | 32.0 ~ 39.1         | 5.07                | 4.56 ~ 5.58         |
| 5800            | 35.3                | 31.8 ~ 38.8         | 5.27                | 4.74 ~ 5.80         |
| 6000            | 35.1                | 31.6 ~ 38.6         | 5.48                | 4.93 ~ 6.03         |
| 6500            | 34.5                | 31.1 ~ 38.0         | 6.07                | 5.46 ~ 6.68         |
| 7000            | 33.9                | 30.5 ~ 37.3         | 6.65                | 5.99 ~ 7.32         |

## SAR Test Report

The dielectric properties of the tissue simulating liquids are defined in IEC 62209-1 and IEC 62209-2. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Since the range of  $\pm 10\%$  of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction  $\Delta$  SAR has a negative sign.


The following table gives the recipes for tissue simulating liquids.

**Table-3.2 Recipes of Tissue Simulating Liquid**

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether | Oxidized Mineral Oil |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|----------------------|
| H750        | 0.2         | -    | 0.2 | 1.5  | 56.0    | -            | 42.1  | -                                 | -                    |
| H835        | 0.2         | -    | 0.2 | 1.5  | 57.0    | -            | 41.1  | -                                 | -                    |
| H900        | 0.2         | -    | 0.2 | 1.4  | 58.0    | -            | 40.2  | -                                 | -                    |
| H1450       | -           | 43.3 | -   | 0.6  | -       | -            | 56.1  | -                                 | -                    |
| H1640       | -           | 45.8 | -   | 0.5  | -       | -            | 53.7  | -                                 | -                    |
| H1750       | -           | 47.0 | -   | 0.4  | -       | -            | 52.6  | -                                 | -                    |
| H1800       | -           | 44.5 | -   | 0.3  | -       | -            | 55.2  | -                                 | -                    |
| H1900       | -           | 44.5 | -   | 0.2  | -       | -            | 55.3  | -                                 | -                    |
| H2000       | -           | 44.5 | -   | 0.1  | -       | -            | 55.4  | -                                 | -                    |
| H2300       | -           | 44.9 | -   | 0.1  | -       | -            | 55.0  | -                                 | -                    |
| H2450       | -           | 45.0 | -   | 0.1  | -       | -            | 54.9  | -                                 | -                    |
| H2600       | -           | 45.1 | -   | 0.1  | -       | -            | 54.8  | -                                 | -                    |
| H3500       | -           | 8.0  | -   | 0.2  | -       | 20.0         | 71.8  | -                                 | -                    |
| H5G         | -           | -    | -   | -    | -       | 17.2         | 65.5  | 17.3                              | -                    |
| H6G         | -           | -    | -   | -    | -       | -            | 56.0  | -                                 | 44.0                 |

## 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

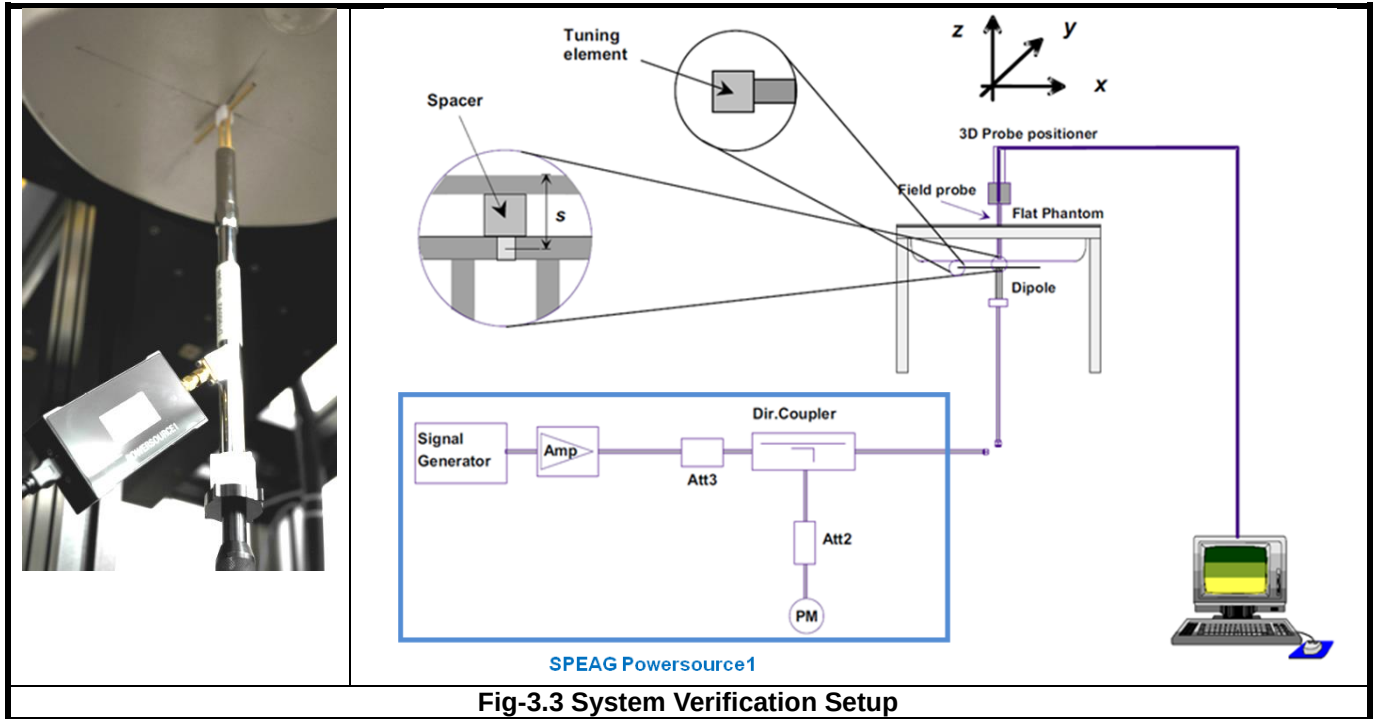

**Fig-3.3 System Verification Setup**

The SPEAG Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting SAR system checks and SAR system validation of DASY and is compatible with IEC 62209-1, IEC 62209-2 and IEEE Std 1528 standards. The Powersource1 has been calibrated by SPEAG's ISO/IEC 17025-accredited calibration center. When using Powersource1, the setup can be simplified, as shown in Fig-3.3. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit.

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The Powersource1 is adjusted for the desired forward power of 17 dBm at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.



## SAR Test Report

### 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

#### 3.4.1 Area Scan and Zoom Scan Procedure

First area scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an area scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, zoom scan is required. The zoom scan is performed around the highest E-field value to determine the averaged SAR-distribution.

Measure the local SAR at a test point at 1.4 mm of the inner surface of the phantom recommended by SEPAG. The area scan (two-dimensional SAR distribution) is performed cover at least an area larger than the projection of the EUT or antenna. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom scan volume. Following table provides the measurement parameters required for the area scan.

| Parameter                                                                                 | $f \leq 3 \text{ GHz}$                                                                | $3 \text{ GHz} < f \leq 6 \text{ GHz}$                                               |
|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Maximum distance from closest measurement point to phantom surface                        | $5 \pm 1$                                                                             | $\delta \ln(2)/2 \pm 0.5$                                                            |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$                                                                | $20^\circ \pm 1^\circ$                                                               |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$    | $\leq 2 \text{ GHz: } \leq 15 \text{ mm}$<br>$2 - 3 \text{ GHz: } \leq 12 \text{ mm}$ | $3 - 4 \text{ GHz: } \leq 12 \text{ mm}$<br>$4 - 6 \text{ GHz: } \leq 10 \text{ mm}$ |

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1.6 W/kg, 1 g limit; or 1.26 W/kg for 2 W/kg, 10 g limit).

## SAR Test Report

The zoom scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

| Parameter                                                                              |                                                     | $f \leq 3 \text{ GHz}$                                                              | $3 \text{ GHz} < f \leq 6 \text{ GHz}$                                                                                              |
|----------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ |                                                     | $\leq 2 \text{ GHz: } \leq 8 \text{ mm}$<br>$2 - 3 \text{ GHz: } \leq 5 \text{ mm}$ | $3 - 4 \text{ GHz: } \leq 5 \text{ mm}$<br>$4 - 6 \text{ GHz: } \leq 4 \text{ mm}$                                                  |
| Maximum zoom scan spatial resolution, normal to phantom surface                        | <i>uniform grid:</i> $\Delta z_{\text{zoom}}(n)$    | $\leq 5 \text{ mm}$                                                                 | $3 - 4 \text{ GHz: } \leq 4 \text{ mm}$<br>$4 - 5 \text{ GHz: } \leq 3 \text{ mm}$<br>$5 - 6 \text{ GHz: } \leq 2 \text{ mm}$       |
|                                                                                        | <i>graded grids:</i><br>$\Delta z_{\text{zoom}}(1)$ | $\leq 4 \text{ mm}$                                                                 | $3 - 4 \text{ GHz: } \leq 3.0 \text{ mm}$<br>$4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$<br>$5 - 6 \text{ GHz: } \leq 2.0 \text{ mm}$ |
|                                                                                        | $\Delta z_{\text{zoom}}(n>1)$                       | $\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1) \text{ mm}$                             |                                                                                                                                     |
| Minimum zoom scan volume (x, y, z)                                                     |                                                     | $\geq 30 \text{ mm}$                                                                | $3 - 4 \text{ GHz: } \geq 28 \text{ mm}$<br>$4 - 5 \text{ GHz: } \geq 25 \text{ mm}$<br>$5 - 6 \text{ GHz: } \geq 22 \text{ mm}$    |

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- (1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ( $\Delta x, \Delta y$ ). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance  $z_{M1}$ .
- (2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.



### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## 4. Power Density Measurement System

### 4.1 Definition of Power Density

The power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$S = \frac{1}{2} \text{Re}\{E \times H^*\} \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.

$$S_{av} = \frac{1}{2A} \Re \left( \int E \times H^* \cdot \hat{n} dA \right)$$

### 4.2 SPEAG DASY6 System

The SPEAG DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

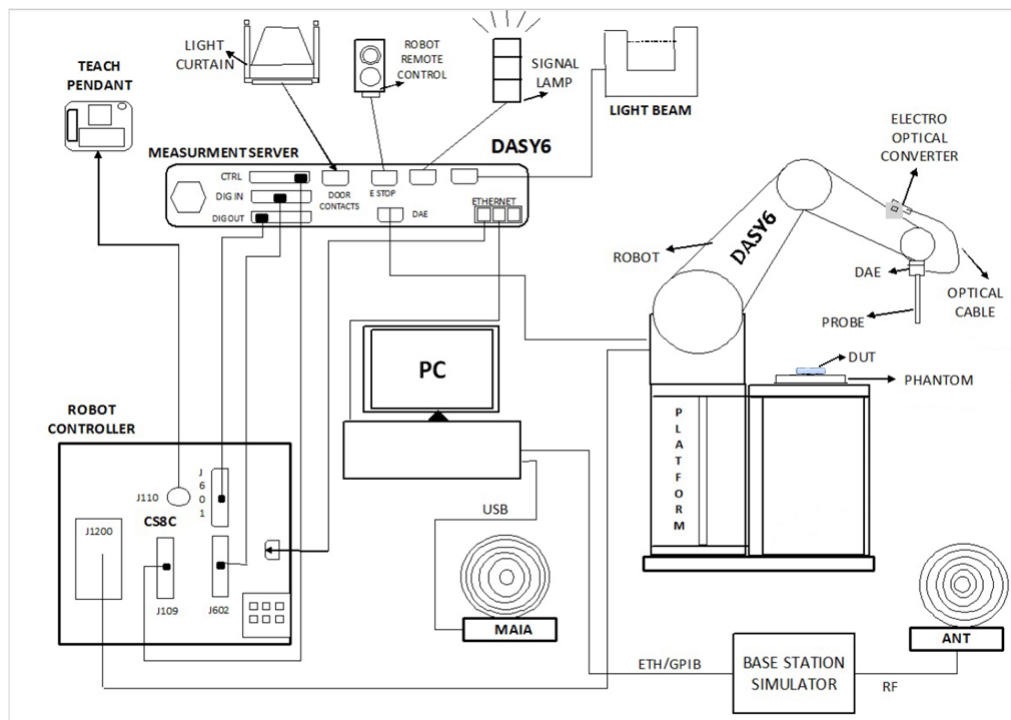


Fig-3.1 SPEAG DASY6 System Configuration

## SAR Test Report

### 4.2.1 Robot

The DASY6 system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version of CS8c from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 SPEAG DASY6 System

### 4.2.2 EUmmWV2 mm-Wave Probe

The EUmmWV2 probe is an electric (E) universal (U) field probe with two dipole sensors for field measurements at frequencies up to 110 GHz and as close as 2 mm from any field source or transmitter. The sensors consist of two diode-loaded small dipoles that provide the rectified voltage from the coupled E-field. From the voltages at three different orientations in the field at known angles, both the magnitude of the field component and the field polarization can be calculated. Due to the small size of the sensors, the probe can be used for measurements over an extremely wide frequency range from <1 GHz to 110 GHz. The probe sensors are protected by non-removable 8 mm high-density foam.


The EUmmWV2 probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. The design entails two small 0.8 mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9 mm wide and 0.12 mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields.

## SAR Test Report

The probe consists of two sensors with different angles arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. These probes are the most flexible and accurate probes currently available for measuring field amplitude.

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.


|                               |                                                                                                                                                                                                                    |                                                                                     |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                  | EUmmWV2                                                                                                                                                                                                            |  |
| <b>Frequency</b>              | 750 MHz to 110 GHz                                                                                                                                                                                                 |                                                                                     |
| <b>Dynamic Range</b>          | < 20 V/m - 10000 V/m with PRE-10<br>< 50 V/m - 3000 V/m minimum                                                                                                                                                    |                                                                                     |
| <b>Linearity</b>              | < $\pm 0.2$ dB                                                                                                                                                                                                     |                                                                                     |
| <b>Hemispherical Isotropy</b> | < 0.5 dB                                                                                                                                                                                                           |                                                                                     |
| <b>Position Precision</b>     | < 0.2 mm                                                                                                                                                                                                           |                                                                                     |
| <b>Dimensions</b>             | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: encapsulation 8 mm (internal sensor < 1mm)<br>Distance from probe tip to dipole centers: < 2 mm<br>Sensor displacement to probe's calibration point: < 0.3 mm |                                                                                     |

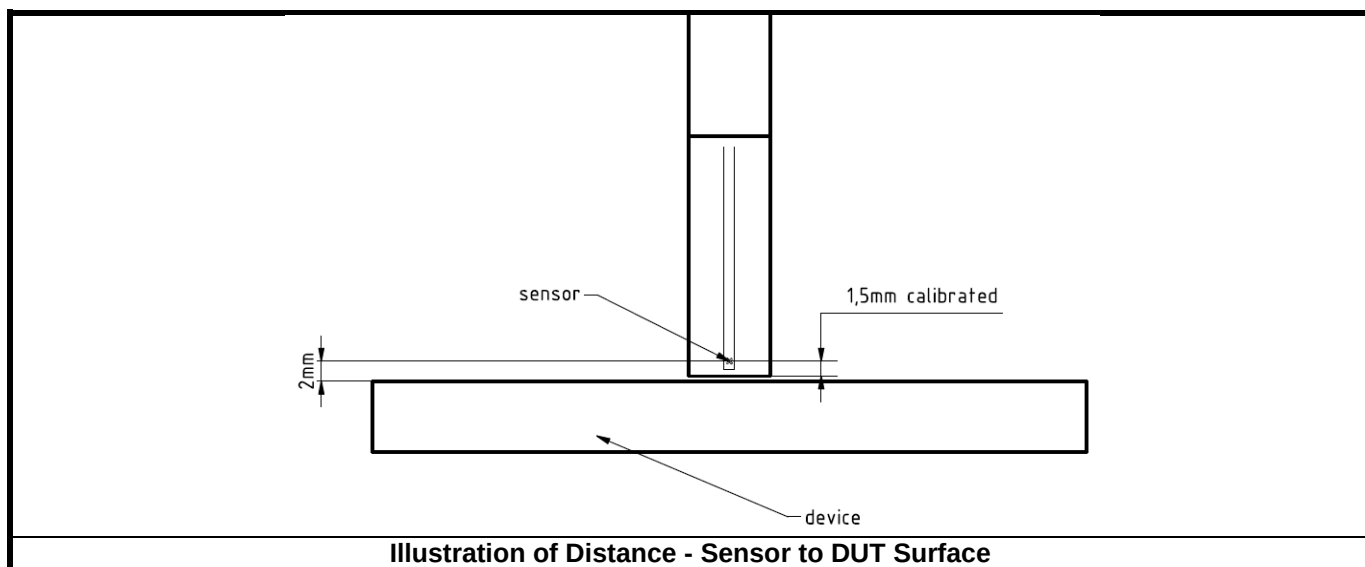



## SAR Test Report

### 4.2.3 System Verification Sources

System verification device consists of a horn antenna with corresponding gun oscillator packaged within a cube-shaped housing and power supply provided.

|                             |                                      |                                                                                     |
|-----------------------------|--------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                | System Verification for Ka-band      |  |
| <b>Calibrated Frequency</b> | 30 GHz at 10mm from the case surface |                                                                                     |
| <b>Frequency Accuracy</b>   | $\pm 100$ MHz                        |                                                                                     |
| <b>E-field Polarization</b> | Linear                               |                                                                                     |
| <b>Harmonics</b>            | -20 dBc                              |                                                                                     |
| <b>Total Radiated Power</b> | 14 dBm                               |                                                                                     |
| <b>Power Stability</b>      | 0.05 dB                              |                                                                                     |
| <b>Power Consumption</b>    | 5 W                                  |                                                                                     |
| <b>Size</b>                 | 100 x 100 x 100 mm                   |                                                                                     |
| <b>Weight</b>               | 1 kg                                 |                                                                                     |

|                             |                                      |                                                                                      |
|-----------------------------|--------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>                | System Verification for V-band       |  |
| <b>Calibrated Frequency</b> | 60 GHz at 10mm from the case surface |                                                                                      |
| <b>Frequency Accuracy</b>   | $\pm 100$ MHz                        |                                                                                      |
| <b>E-field Polarization</b> | Linear                               |                                                                                      |
| <b>Harmonics</b>            | -20 dBc                              |                                                                                      |
| <b>Total Radiated Power</b> | 20 dBm                               |                                                                                      |
| <b>Power Stability</b>      | 0.1 dB                               |                                                                                      |
| <b>Power Consumption</b>    | 5 W                                  |                                                                                      |
| <b>Size</b>                 | 100 x 100 x 100 mm                   |                                                                                      |
| <b>Weight</b>               | 1 kg                                 |                                                                                      |

|                             |                                      |                                                                                       |
|-----------------------------|--------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | System Verification for W-band       |  |
| <b>Calibrated Frequency</b> | 90 GHz at 10mm from the case surface |                                                                                       |
| <b>Frequency Accuracy</b>   | $\pm 150$ MHz                        |                                                                                       |
| <b>E-field Polarization</b> | Linear                               |                                                                                       |
| <b>Harmonics</b>            | -20 dBc                              |                                                                                       |
| <b>Total Radiated Power</b> | 16 dBm                               |                                                                                       |
| <b>Power Stability</b>      | 0.15 dB                              |                                                                                       |
| <b>Power Consumption</b>    | 5 W                                  |                                                                                       |
| <b>Size</b>                 | 100 x 100 x 100 mm                   |                                                                                       |
| <b>Weight</b>               | 1 kg                                 |                                                                                       |

## 4.3 Power Density System Verification

System check provides a fast and reliable method to routinely verify that the measurement system is operational with no system component failures, including probe defects, drifts or deviation from target performance requirements. A system check also verifies the repeatability of the measurement system before compliance testing.


The measurement of a verification source is started from 5G probe installed and the phantom taught. The verification source is placed on the 5G phantom. Due to the internal distance from the horn to the outer surface of the verification source, the measurement distance set in the software should be offset by -4.45 mm; e.g., for measurement of the verification source at 10 mm, the measurement distance set in the software should be 5.55 mm (10mm - 4.45 mm).

The system check is a complete measurement using simple well-defined reference sources. According to the DASY6 specification in the user's manual and SPEAG's recommendation, the deviation threshold of  $\pm 0.66$  dB represents the expanded standard uncertainty for system performance check. The system check is successful if the measured results are within  $\pm 0.66$  dB tolerances to the target value shown in the calibration certificate of the verification source. The instrumentation and procedures used for system check should ensure the system is ready for performing compliance tests.

System check using 10 GHz source to support 6-7GHz incident-PD results done with EUmWV probe, the test procedure was following by the SPEAG AppNote Procedures for Device Operating at 6 – 10GHz.

| Frequency [GHz] | Grid Step            | Grid Extent X/Y [mm] | Measurement Points |
|-----------------|----------------------|----------------------|--------------------|
| 10              | 0.25 ( $\lambda/4$ ) | 120 / 120            | 16 x 16            |

**Table-3.1 Settings for Measurement of Verification Sources**

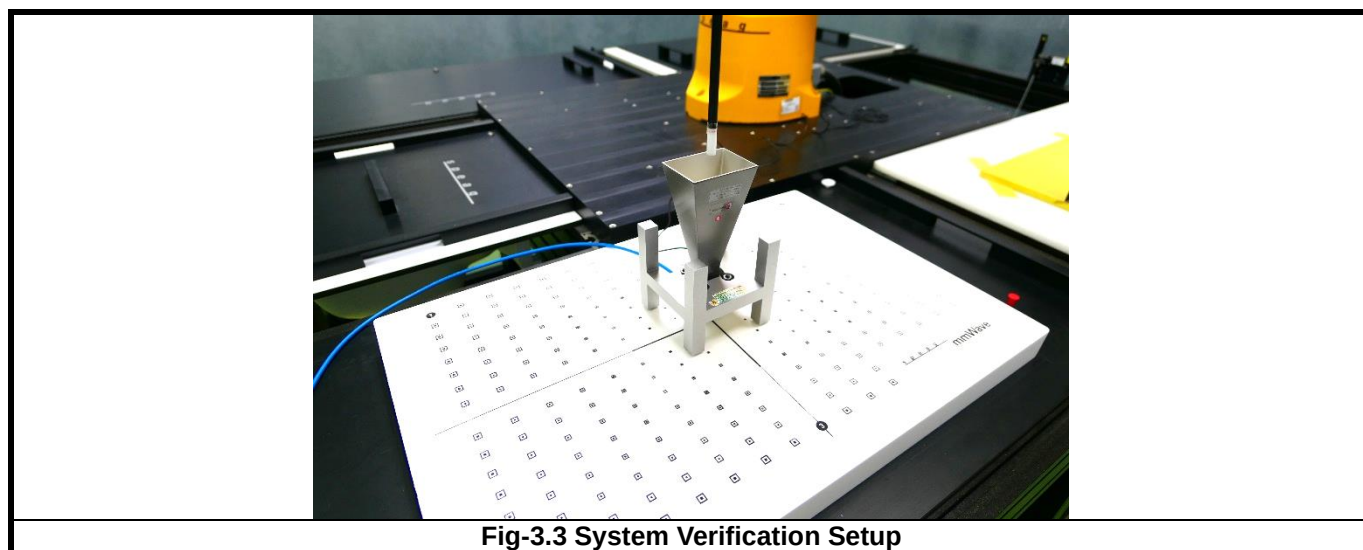

**Fig-3.3 System Verification Setup**

#### **4.4 Power Density Measurement Procedure**


Within a short distance from the transmitting source, power density is determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field are needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. When the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are necessary to project or transform the fields from the measurement surface to the evaluation surface. The general measurement approach is summarized in following:

- (a) Measure the E-field on the measurement surface at a reference location where the field is well above the noise level. This reference level will be used at the end of this procedure to assess output power drift of the DUT during the measurement.
- (b) Scan the electric field on the measurement surface. The requirements of measurement surface dimensions and spatial resolution are dependent on the measurement system and assessment methodology applied. Measurements are therefore conducted according to the instructions provided by the measurement system manufacturer.
- (c) Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. Planar scanners typically require a step size of less than  $\lambda / 2$ . When measurements are acquired in regions where evanescent modes are not negligible, smaller spatial resolution may be required. Similar criteria also apply to cylindrical scanning systems where the spatial resolution in the vertical direction should be less than  $\lambda / 2$ .
- (d) Since only E-field is measured on the measurement system, the H-field is calculated from the measured field using a reconstruction algorithm. As power density requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured data (e.g. the phase from the amplitude if only the amplitude is measured). The measurement involves two planes with three different probe rotations on two measurement planes separated by  $\lambda / 4$ . The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test entered by the user. In addition, when the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are employed to project or transform the fields from the measurement surface to the evaluation surface. In substance, reconstruction algorithms are the set of algorithms, mathematical techniques and procedures that are applied to the measured field on the measurement surface to determine E- and H-field (amplitude and phase) on the evaluation surface.
- (e) To determine the spatial-average power density distribution on the evaluation surface. The spatial averaging area,  $A$ , is specified by the applicable exposure limits or regulatory requirements. If the shape of the area is not provided by the relevant regulatory requirements, a circular shape is recommended.
- (f) Measure the E-field on the measurement surface position at the reference location chosen in step (a). The power drift of the DUT is estimated as the difference between the squared amplitude of the field values taken in steps (a) and (f). When the drift is smaller than  $\pm 5 \%$ , this term should be considered in the uncertainty budget. Drifts larger than  $5 \%$  due to the design and operating characteristics of the device should be accounted for or addressed according to regulatory requirements to determine compliance.



## 4.4.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis ( $a$ ), the semi-minor axis ( $b$ ), two angles describing the orientation of the normal vector of the ellipse ( $\Phi$ ,  $\theta$ ), and one angle describing the tilt of the semi-major axis ( $\psi$ ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only ( $a$ ,  $\Phi$ , and  $\theta$ ) are sufficient for the description of the incident field.

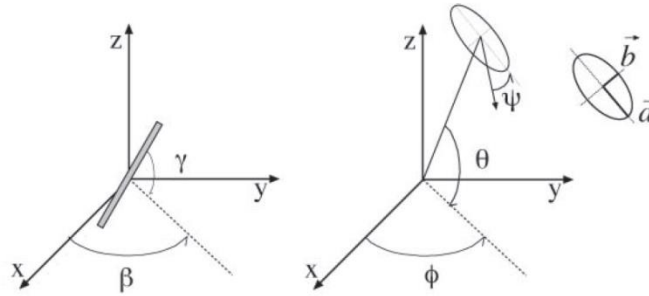

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles ( $\Phi$ ,  $\theta$ , and  $\psi$ ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over-determined. The solution use a probe consisting of two sensors angled by  $\gamma_1$  and  $\gamma_2$  toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at  $\beta_1$ ,  $\beta_2$ , and  $\beta_3$ , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added.

The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of  $90^\circ$  ( $\gamma_2 = \gamma_1 + 90^\circ$ ), and, to simplify, the first rotation angle of the probe ( $\beta_1$ ) can be set to  $0^\circ$ .



### 4.4.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. The SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWV2 probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as  $\lambda / 5$  away.

### 4.4.3 Power Flux Density Averaging

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1 cm<sup>2</sup>. The computed peak average value is displayed in the box at the top right. Note that the average is evaluated only for grid points where the averaging circle is completely filled with values; for points at the edge where the averaging circle is only partly filled with values, the average power density is set to zero. Two average power density values are computed:

- 1)  $|\text{Re}(S)|$  is the average total power density.
- 2)  $\vec{n} \cdot \text{Re}(S)$  is the average incident power density.

## **5. SAR Measurement Evaluation**

### **5.1 EUT Configuration and Setting**

#### **<Considerations Related to Gravity-Sensor>**

The device supports WLAN, and Bluetooth capabilities. It is designed with a G-sensor which can trigger WLAN power reduction for SAR compliance. The power levels for all wireless technologies and the power reduction please refer to section 5.6 of this report and operational description by manufacturer.

#### **<Per Nov. 2019TCB Workshop Gravity-Sensor Guidance >**

In accordance with the guidance, it applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction, the following steps verifying the power level and its power reduction when LCD angle changed.

The power verified by LCD angle changed please refer to Annex L.

#### **<Considerations Related to WLAN for Setup and Testing>**

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

#### **Initial Test Configuration**

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

## SAR Test Report

---

### Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

### SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

### Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.


- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

### <Considerations Related to Bluetooth for Setup and Testing>

Refer to Annex K.


## 5.2 EUT Testing Position

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

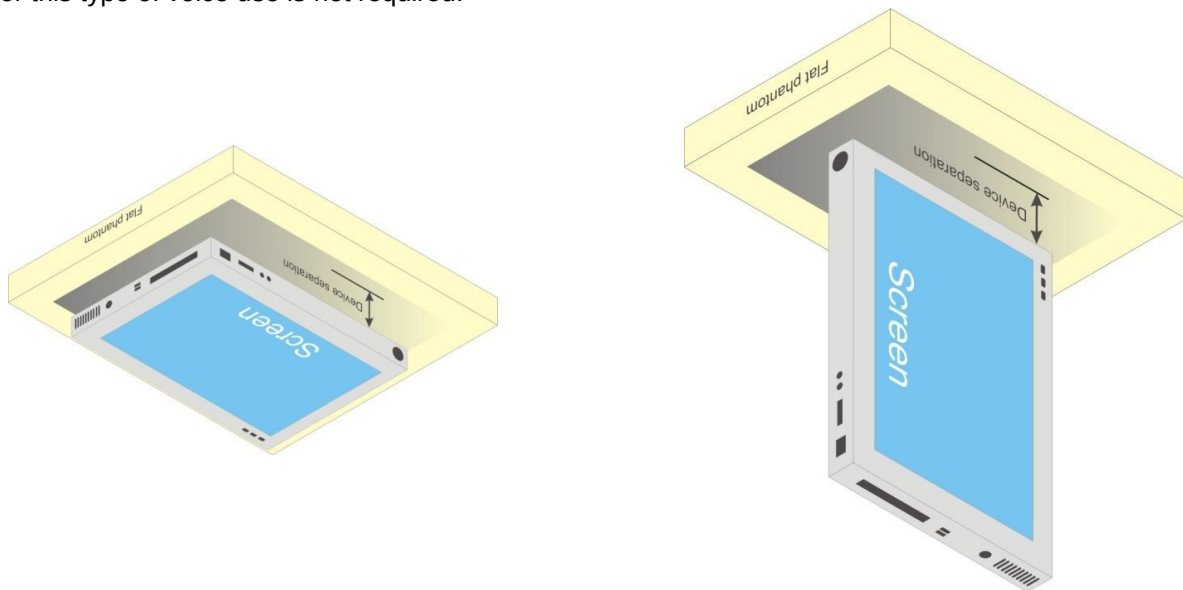

**Fig-4.1 Illustration for Tablet Setup**

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

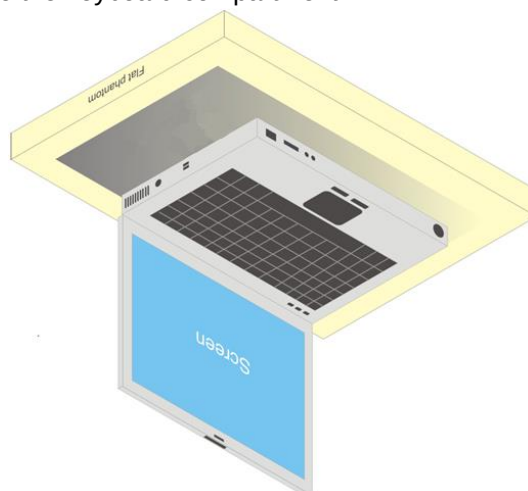

**Fig-4.2 Illustration for Laptop Setup**

### **5.3 Tissue Verification**

Refer to Annex C.

### **5.4 System Validation**

Refer to Annex C.

### **5.5 System Verification**

Refer to Annex C.

### **5.6 Maximum Output Power**

#### **5.6.1 Maximum Target Conducted Power**

Refer to Annex D.

#### **5.6.2 Measured Conducted Power Result**

Refer to Annex E.

## **5.7 SAR Testing Results**

### **5.7.1 SAR Test Reduction Considerations**

#### **<KDB 447498 D01, General RF Exposure Guidance>**

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1)  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- (2)  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3)  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance. The scaling factor for the tune-up power is defined as maximum tune-up limit (mW) / measured conducted power (mW). The reported SAR would be calculated by measured SAR x tune-up power scaling factor.

The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power. The scaling factor for the duty factor is defined as 100% / transmission duty cycle (%). The reported SAR would be calculated by measured SAR x tune-up power scaling factor x duty cycle scaling factor.

#### **<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>**

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4$  W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8$  W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
- (3) For WLAN 5GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

## SAR Test Report

---

### 5.7.2 SAR & Power Density Results for Body Exposure Condition (Test Separation Distance is 0 mm)

Refer to Annex F.

### 5.7.3 SAR Measurement Variability

Refer to Annex G.

### 5.7.4 Simultaneous Multi-band Transmission Evaluation

#### <SAR Summation Analysis>

Refer to Annex H.

#### <SAR to Peak Location Separation Ratio Analysis>

Refer to Annex I.

**Test Engineer :** Herry Chiu



## **6. Calibration of Test Equipment**

Refer to Annex J.

## SAR Test Report

### 7. Measurement Uncertainty

According to KDB 865664 D01, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, and  $\geq 3.75$  W/kg for 10-g SAR. The procedures described in IEEE Std 1528-2013 should be applied. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . When the highest measured SAR within a frequency band is  $< 1.5$  W/kg for 1-g and  $< 3.75$  W/kg for 10-g, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. Hence, the measurement uncertainty analysis is not required in this SAR report because the test result met the condition.

Applicable for Power Density Measurement:

| Source of Uncertainty                     | Uncertainty ( $\pm$ dB) | Probability Distribution | Divisor    | Ci | Standard Uncertainty ( $\pm$ dB) | Vi       |
|-------------------------------------------|-------------------------|--------------------------|------------|----|----------------------------------|----------|
| <b>Measurement System</b>                 |                         |                          |            |    |                                  |          |
| Probe Calibration                         | 0.49                    | Normal                   | 1          | 1  | 0.49                             | $\infty$ |
| Hemispherical Isotropy                    | 0.50                    | Rectangular              | $\sqrt{3}$ | 1  | 0.29                             | $\infty$ |
| Linearity                                 | 0.20                    | Rectangular              | $\sqrt{3}$ | 1  | 0.12                             | $\infty$ |
| System Detection Limits                   | 0.04                    | Rectangular              | $\sqrt{3}$ | 1  | 0.02                             | $\infty$ |
| Modulation Response                       | 0.40                    | Rectangular              | $\sqrt{3}$ | 1  | 0.23                             | $\infty$ |
| Readout Electronics                       | 0.03                    | Normal                   | 1          | 1  | 0.03                             | $\infty$ |
| Response Time                             | 0.00                    | Rectangular              | $\sqrt{3}$ | 1  | 0.00                             | $\infty$ |
| Integration Time                          | 0.00                    | Rectangular              | $\sqrt{3}$ | 1  | 0.00                             | $\infty$ |
| RF Ambient Conditions – Noise             | 0.20                    | Rectangular              | $\sqrt{3}$ | 1  | 0.12                             | $\infty$ |
| RF Ambient Conditions – Reflections       | 0.20                    | Rectangular              | $\sqrt{3}$ | 1  | 0.12                             | $\infty$ |
| Probe Positioner Mechanical Tolerance     | 0.04                    | Rectangular              | $\sqrt{3}$ | 1  | 0.02                             | $\infty$ |
| Probe Positioning with Respect to Phantom | 0.30                    | Rectangular              | $\sqrt{3}$ | 1  | 0.17                             | $\infty$ |
| Savg Reconstruction                       | 2.00                    | Rectangular              | $\sqrt{3}$ | 1  | 1.15                             | $\infty$ |
| <b>Test Sample Related</b>                |                         |                          |            |    |                                  |          |
| Power Drift of Measurement                | 0.20                    | Rectangular              | $\sqrt{3}$ | 1  | 0.12                             | $\infty$ |
| Input Power                               | 0.00                    | Normal                   | 1          | 1  | 0.00                             | $\infty$ |
| <b>Combined Standard Uncertainty</b>      |                         |                          |            |    | $\pm 1.34$                       |          |
| <b>Expanded Uncertainty (K=2)</b>         |                         |                          |            |    | $\pm 2.68$                       |          |

Uncertainty Budget for Wi-Fi 6E Power Density Measurement

## SAR Test Report

---

### 8. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan Huaya Lab:**

Add: No. 19, Huaya 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan

Tel: +886-(0)3-318-3232

Fax: +886-(0)3-211-5834

**Taiwan Linkou Lab:**

Add: No. 47-2, Baodoucuokeng, Linkou Dist., New Taipei City 244, Taiwan

Tel: +886-(0)2-2605-2180

Fax: +886-(0)2-2605-2943

**Taiwan Hsinchu Lab1:**

Add: E-2, No. 1, Lixing 1st Rd., East Dist., Hsinchu City 300, Taiwan

Tel: +886-(0)3-666-8565

Fax: +886-(0)3-666-8323

**Taiwan Hsinchu Lab2:**

Add: No. 49, Ln. 206, Wende Rd., Qionglin Township, Hsinchu County 307, Taiwan

Tel: +886-(0)3-512-0595

Fax: +886-(0)3-512-0568

**Taiwan Xindian Lab:**

Add: B2F., No. 215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel: +886-(0)2-8914-5882

Fax: +886-(0)2-8914-5840

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** <https://ee.bureauveritas.com.tw/BVInternet/Default>

The road map of all our labs can be found in our web site also.

---END---