

Test Report

Applicant : MediaTek Inc.
Applicant Address : No. 1, Dusing 1st Rd. Hsinchu Science Park Hsinchu City Taiwan 30078
Product Name : 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Trade Name : MediaTek
Model Number : MT7922A22M
Applicable Standard : 47 CFR §2.1093
Received Date : Oct. 04, 2022
Test Period : Oct. 22 ~ Oct. 30, 2022
Issued Date : Nov. 25, 2022

Issued by

Approved By :

(Kris Pan)

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issue Date	Revisions	Revised By
00	Nov. 25, 2022	Initial Issue	Yiying Chiang

Contents

1. General Information	4
1.1 Reference Testing Standards	4
1.2 Testing Location	4
2. Description of Device Under Test (DUT).....	5
3. Summary of Maximum Value.....	7
4. Introduction	8
4.1 SAR Definition.....	8
4.2 Power Density Definition	8
4.3 RF Exposure Limits	9
5. System Description.....	10
5.1 SAR Measurement System	10
5.2 Tissue Simulating Liquids (TSL).....	14
5.3 Power Density Measurement System	18
6. System Verification	22
6.1 SAR System Verification	22
6.2 Power Density System Verification.....	23
7. Test Equipment List	26
8. Measurement Procedure	27
8.1 SAR Measurement Procedure	27
8.2 Power Density Measurement Procedure.....	30
9. Measurement Uncertainty	31
9.1 SAR Measurement Uncertainty.....	31
9.2 Power Density Measurement Uncertainty	34
10. Measurement Evaluation	35
10.1 Positioning of the DUT in Relation to the Phantom	35
10.2 SAR Testing with RF Transmitter	36
10.3 Conducted Power Measurements	39
10.4 Antenna location.....	39
10.5 Test Results.....	40
10.6 SAR Measurement Variability.....	46
10.7 Simultaneous Transmission Evaluation.....	47
10.8 Requirements on the Uncertainty Evaluation	50
11. Conclusion.....	50

Appendix A - Conducted Power Measurements

Appendix B - System Performance Check Plots

Appendix C - Highest Measurement Plots

Appendix D - Calibration Certificates

Appendix E - Test Setup Photographs

1. General Information

1.1 Reference Testing Standards

Standard	Description	Version
47 CFR §2.1093	Radiofrequency radiation exposure evaluation: portable devices	-
IEC TR 63170	Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz	2018
IEC/IEEE 63195-1	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) – Part 1: Measurement procedure	2022
IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)	2020
IEEE 1528	Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	2013
IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz	1992
KDB 248227 D01	SAR guidance for IEEE 802.11 (Wi-Fi) transmitters	v02r02
KDB 447498 D04	RF exposure procedures and equipment authorization policies for mobile and portable devices	v01
KDB 616217 D04	SAR evaluation considerations for laptop, notebook and tablet computers	v01r02
KDB 865664 D01	SAR measurement requirement for 100 MHz to 6 GHz	v01r04
KDB 865664 D02	RF exposure compliance reporting and documentation considerations	v01r02

1.2 Testing Location

Site Name: Site Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

2. Description of Device Under Test (DUT)

Applicant	MediaTek Inc. No. 1, Dusing 1st Rd. Hsinchu Science Park Hsinchu City Taiwan 30078
Product Name	2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Trade Name	MediaTek
Model Number	MT7922A22M
SN No.	NANTKD00035140D
FCC ID	RAS-MT7922A22M
Host Information	Product Name: Notebook PC Trade Name: ASUS Model Name: GV302N, GV302NA, GV302NF, GV302NU, GV302X, GV302XA, GV302XF, GV302XJ, GV302XU, GV302XV, GV302XI All models are electrically identical, different model names are for marketing purpose.
Frequency Range	WLAN 2.4 GHz Band : 2412 - 2472 MHz WLAN 5.2 GHz Band : 5180 - 5240 MHz WLAN 5.3 GHz Band : 5260 - 5320 MHz WLAN 5.6 GHz Band : 5500 - 5720 MHz WLAN 5.8 GHz Band : 5745 - 5825 MHz WLAN 5.9 GHz Band : 5845 - 5885 MHz WLAN 6.2 GHz Band : 5955 - 6415 MHz WLAN 6.5 GHz Band : 6435 - 6515 MHz WLAN 6.7 GHz Band : 6535 - 6855 MHz WLAN 7.0 GHz Band : 6875 - 7115 MHz Bluetooth : 2402 - 2480 MHz
Supported Modulations	WLAN 2.4 GHz : 802.11 b / g / n / ax HT20 / HT40 / VHT20 / VHT40 / HE20 / HE40
	WLAN 5 GHz : 802.11 a / n / ac / ax HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HE20 / HE40 / HE80 / HE160
	WLAN 6 GHz : 802.11ax HE20 / HE40 / HE80 / HE160
	Bluetooth : BR / EDR / LE
Device Category	Portable Device
Module Name	Media-tek, MT7922A22M

Note:

1. The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Antenna list:

Antenna Source	ANT	Manufacturer	Type	Frequency	Max. Gain(dBi)	
					NB	PAD
1	Chain 0	LUXSHARE-ICT	PIFA Antenna	2402 - 2480	1.43	1.08
				5150 - 5250	4	4.5
				5250 - 5350	4	4.89
				5470 - 5725	4.85	4.85
				5725 - 5850	4.89	4.85
				5850 - 5925	4.7	4.63
				5945 - 6425	4.73	4.73
				6425 - 6525	4.21	4.21
				6525 - 6875	4.57	4.56
				6875 - 7125	4.06	4.05
2	Chain 1	LUXSHARE-ICT	PIFA Antenna	2402 - 2480	1.4	0.47
				5150 - 5250	2.49	2.38
				5250 - 5350	2.49	2.38
				5470 - 5725	3.59	1.98
				5725 - 5850	4.49	1.7
				5850 - 5925	4.16	2.06
				5945 - 6425	4.04	3.16
				6425 - 6525	2.02	2.28
				6525 - 6875	4.53	3.75
				6875 - 7125	3.82	3.78
2	Chain 0	AWAN	PIFA Antenna	2402 - 2480	1.32	0.87
				5150 - 5250	3.57	4.43
				5250 - 5350	3.57	4.6
				5470 - 5725	4.15	4.14
				5725 - 5850	4.72	4.61
				5850 - 5925	4.47	4.42
				5945 - 6425	4.36	4.48
				6425 - 6525	3.99	3.61
				6525 - 6875	4.26	3.73
				6875 - 7125	3.28	3.22
2	Chain 1	AWAN	PIFA Antenna	2402 - 2480	1.21	0.47
				5150 - 5250	2.24	1.98
				5250 - 5350	2.24	1.98
				5470 - 5725	3.04	1.52
				5725 - 5850	3.95	0.88
				5850 - 5925	4.01	1.64
				5945 - 6425	3.43	3.16
				6425 - 6525	1.57	1.87
				6525 - 6875	3.98	3.61
				6875 - 7125	3.42	3.61

Note:The Chain 0 is connected to Main port / Chain 1 is connected to AUX port of module

3. Summary of Maximum Value

Equipment Class	Mode	Highest Reported SAR	
		Body standalone SAR1g (W/kg)	Simultaneous Transmission SAR (W/kg)
DTS	WLAN 2.4 GHz ANT Main	1.02	1.02
	WLAN 2.4 GHz ANT Aux	0.91	
NII	WLAN 5 GHz ANT Main	1.00	1.46
	WLAN 5 GHz ANT Aux	0.95	
6XD	WLAN 6 GHz ANT Main	1.13	1.50
	WLAN 6 GHz ANT Aux	1.00	
DSS / DTS	Bluetooth ANT Aux	0.36	1.50

Equipment Class	Mode	Highest Standalone Transmission	Highest Simultaneous Transmission
		Averaging Area [4 cm ²] Total PD (mW/cm ²)	Total Exposure Ratio
6XD	WLAN 6 GHz	0.70	0.93

Note:

1. The SAR limit for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 were employed and they specify the maximum exposure limit of tissue for portable devices being used within 20 cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.
3. The evaluation requirements, as described in 47 CFR Part §1.310 were employed and they specify the maximum exposure limit for general population / uncontrolled exposure is 1.0 mW/cm² (equal to 10 W/m²) for 1.5 GHz to 100 GHz.
4. According to the TCB Worshop Oct. 2018 notes, the average power density results are presented using averaging areas of 4 cm².
5. Total exposure ratio (TER) calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit. Numerical sum of the two ratios should be less than 1.

4. Introduction

4.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

SAR measurement can be related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

SAR is expressed in units of Watts per kilogram (W/kg).

4.2 Power Density Definition

Power density (PD) is defined as the rates of energy transfer per area for an electromagnetic field.

According to the IEC TR 63170, the following formula is used to determine the local power density:

$$S = \frac{1}{2} \Re(\mathbf{E} \times \mathbf{H}) \cdot \hat{\mathbf{n}}$$

And the spatial-average power density distribution on the evaluate surface is determined as the following equation:

$$S_{av} = \frac{1}{2A} \Re \cdot \left(\int \mathbf{E} \times \mathbf{H} \cdot \hat{\mathbf{n}} dA \right)$$

Where:

E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor, respectively. A is the spatial average area specified by the applicable exposure or regulatory requirement.

Power density is expressed in unit of watt per square meter (W/m²).

4.3 RF Exposure Limits

Table 1 Safety Limits for Controlled / Uncontrolled Environment Exposure

SAR Exposure Limit		
	General Population / Uncontrolled Exposure ¹ (W/kg)	Occupational / Controlled Exposure ² (W/kg)
Spatial Peak SAR ³ (head or Body)	1.60	8.00
Spatial Peak SAR ⁴ (Whole Body)	0.08	0.40
Spatial Peak SAR ⁵ (Hands / Feet / Ankle / Wrist)	4.00	20.00
Power Density Exposure Limit (1,500 - 100,000 MHz)		
	General Population / Uncontrolled Exposure (mW/cm ²) ⁶	Occupational / Controlled Exposure (mW/cm ²)
Power Density (S)	1.0	5.0


Notes :

1. **General Population / Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.
2. **Occupational / Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
4. The Spatial Average value of the SAR averaged over the whole body.
5. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
6. 1 mW/cm² = 10 W/m².

5. System Description

5.1 SAR Measurement System

The DASY system in SAR Configuration is shown below:

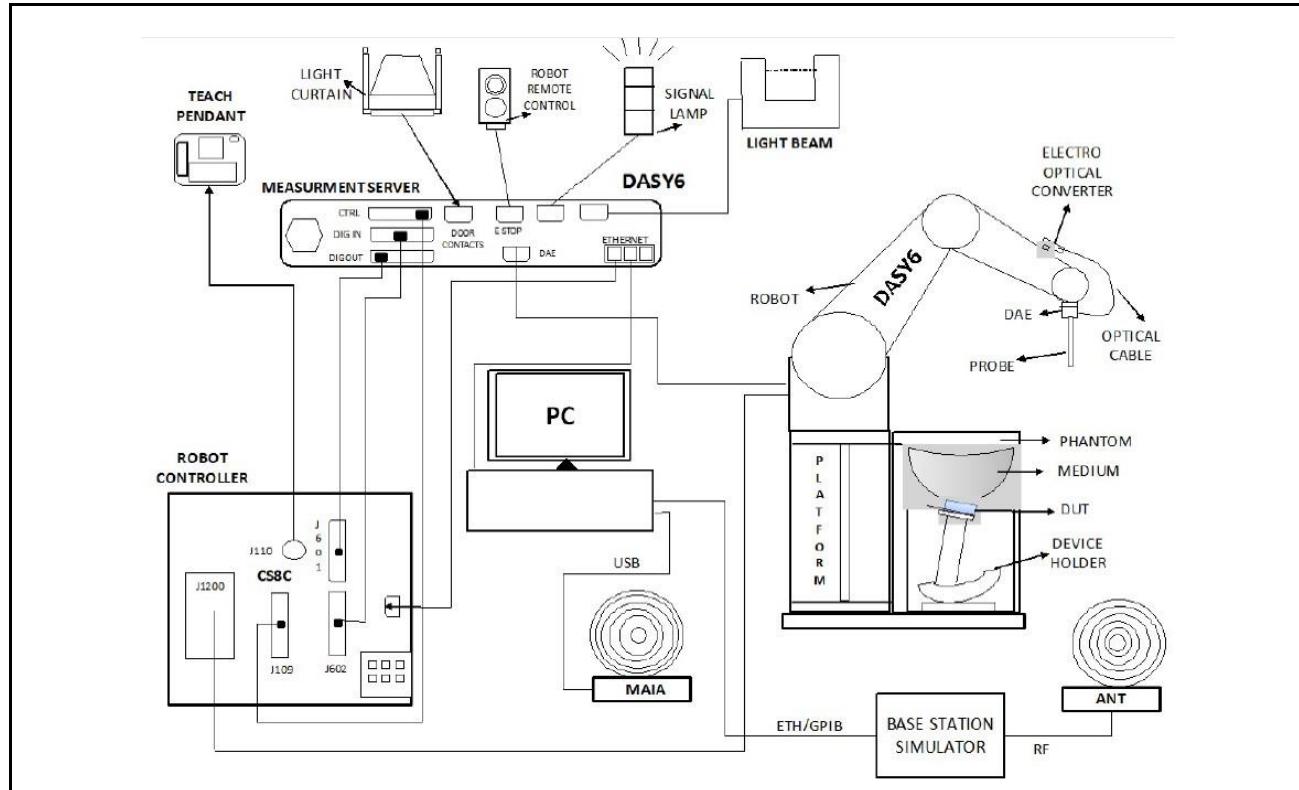

The system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. An isotropic field probe optimized and calibrated for the targeted measurements.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
7. A computer running Win7/Win8/Win10 professional operating system and DASY software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The phantom, the device holder and other accessories according to the targeted measurement.
10. Tissue simulating liquid mixed according to the given recipes.
11. The validation dipole has been calibrated within and the system performance check has been successful.

<DASY E-Field Probe System>

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	4 MHz to 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Calibration	ISO/IEC 17025 calibration service available
	
EX3DV4 E-Field Probe	Probe setup on robot

<Data Acquisition Electronic (DAE) System>

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

<Robot>

Positioner	Stäubli Unimation Corp.	
Robot Model	TX90XL	
Number of Axes	6	
Nominal Load	5 kg	
Reach	1450 mm	
Repeatability	\pm 0.035 mm	

<Device Holder>

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

	
Device Holder 1	Device Holder 2

<Oval Flat Phantom – ELI>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528, IEC 62209-2 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm	
Filling Volume	Approx. 30 liters	
Dimensions	190x600x400 mm (H x L x W)	

<SAM Phantom>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528, IEC 62209-1 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Shell Thickness	2 ±0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	

5.2 Tissue Simulating Liquids (TSL)

<Tissue Dielectric Parameters in IEEE 1528-2013 and IEC/IEEE 62209-1528>


The following table incorporates the tissue dielectric parameters of head recommended by IEEE 1528-2013 and IEC/IEEE 62209-1528. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified are derived from the tissue dielectric parameters which computed by the 4-Cole-Cole equation according to the above-mentioned standards.

Table 2 Dielectric properties of the tissue-equivalent liquid material

Frequency (MHz)	Relative Permittivity (ϵ_r)	Conductivity (σ)
30	55.0	0.75
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800	40.0	1.40
1900	40.0	1.40
1950	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65
7500	33.3	7.24
8000	32.7	7.84
8500	32.1	8.46
9000	31.6	9.08
9500	31.0	9.71
10000	30.4	10.4

<Liquid Depth>

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm to ensure that the probe is immersed sufficiently in the tissue medium.

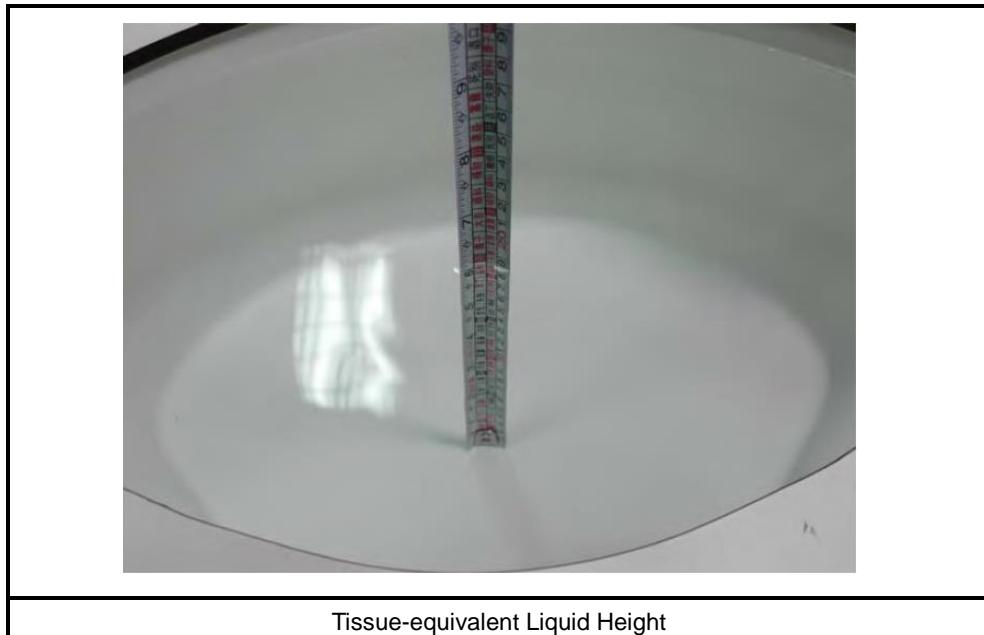

Tissue-equivalent Liquid Height

<Test Site Environment>

Item	Requirement	Actual
Temperature (°C)	18 - 25	21 - 23

<Liquid Check>


1. The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAKS 3.5 Probe Kit.
2. The SAR testing with IEC tissue parameters as an alternative option to Head and body parameters. The head TSL were applied to body SAR tests with restrictions below:

Tissue Temp (°C)	Head / Body	Frequency	Cond. σ	Perm. εr	target Cond. σ	target Perm. εr	σ (Delta)(%)	εr (Delta)(%)	Limit (%)	Date
22.1	Head	5180 MHz	4.61	35.79	4.64	36.02	-0.63	-0.65	±5	Oct. 22, 2022
22.1	Head	5190 MHz	4.62	35.77	4.65	36.01	-0.67	-0.67	±5	Oct. 22, 2022
22.1	Head	5200 MHz	4.63	35.75	4.66	36.00	-0.71	-0.69	±5	Oct. 22, 2022
22.1	Head	5220 MHz	4.64	35.71	4.68	35.98	-0.77	-0.75	±5	Oct. 22, 2022
22.1	Head	5230 MHz	4.65	35.68	4.69	35.97	-0.76	-0.79	±5	Oct. 22, 2022
22.1	Head	5240 MHz	4.67	35.66	4.70	35.96	-0.71	-0.84	±5	Oct. 22, 2022
22.1	Head	5250 MHz	4.68	35.64	4.71	35.95	-0.66	-0.87	±5	Oct. 22, 2022
22.1	Head	5260 MHz	4.69	35.62	4.72	35.94	-0.60	-0.90	±5	Oct. 22, 2022
22.1	Head	5270 MHz	4.70	35.60	4.73	35.93	-0.57	-0.91	±5	Oct. 22, 2022
22.1	Head	5280 MHz	4.71	35.59	4.74	35.92	-0.57	-0.92	±5	Oct. 22, 2022
22.1	Head	5290 MHz	4.72	35.58	4.75	35.91	-0.59	-0.93	±5	Oct. 22, 2022
22.1	Head	5300 MHz	4.73	35.56	4.76	35.90	-0.65	-0.96	±5	Oct. 22, 2022
22.1	Head	5310 MHz	4.74	35.54	4.77	35.89	-0.70	-0.99	±5	Oct. 22, 2022
22.1	Head	5320 MHz	4.75	35.51	4.78	35.88	-0.73	-1.03	±5	Oct. 22, 2022
22.5	Head	5500 MHz	4.96	35.71	4.97	35.65	-0.17	0.17	±5	Oct. 23, 2022
22.5	Head	5510 MHz	4.96	35.70	4.98	35.64	-0.24	0.16	±5	Oct. 23, 2022
22.5	Head	5530 MHz	4.98	35.65	5.00	35.61	-0.38	0.11	±5	Oct. 23, 2022
22.5	Head	5550 MHz	5.00	35.59	5.02	35.58	-0.38	0.02	±5	Oct. 23, 2022
22.5	Head	5570 MHz	5.03	35.54	5.04	35.55	-0.27	-0.02	±5	Oct. 23, 2022
22.5	Head	5580 MHz	5.04	35.53	5.05	35.53	-0.22	0.01	±5	Oct. 23, 2022
22.5	Head	5610 MHz	5.07	35.50	5.08	35.49	-0.25	0.02	±5	Oct. 23, 2022
22.5	Head	5620 MHz	5.08	35.48	5.09	35.48	-0.30	0.01	±5	Oct. 23, 2022
22.5	Head	5630 MHz	5.08	35.46	5.10	35.47	-0.34	-0.02	±5	Oct. 23, 2022
22.5	Head	5660 MHz	5.11	35.38	5.13	35.44	-0.33	-0.16	±5	Oct. 23, 2022
22.5	Head	5670 MHz	5.13	35.36	5.14	35.43	-0.30	-0.19	±5	Oct. 23, 2022
22.5	Head	5690 MHz	5.15	35.33	5.16	35.41	-0.25	-0.24	±5	Oct. 23, 2022
22.5	Head	5700 MHz	5.16	35.31	5.17	35.40	-0.26	-0.26	±5	Oct. 23, 2022
22.5	Head	5710 MHz	5.17	35.29	5.18	35.39	-0.28	-0.28	±5	Oct. 23, 2022
22.3	Head	5745 MHz	5.09	34.88	5.22	35.36	-2.41	-1.36	±5	Oct. 24, 2022
22.3	Head	5755 MHz	5.10	34.86	5.23	35.35	-2.43	-1.40	±5	Oct. 24, 2022
22.3	Head	5775 MHz	5.12	34.82	5.25	35.33	-2.41	-1.46	±5	Oct. 24, 2022
22.3	Head	5785 MHz	5.13	34.80	5.26	35.32	-2.38	-1.47	±5	Oct. 24, 2022
22.3	Head	5795 MHz	5.14	34.79	5.27	35.31	-2.36	-1.48	±5	Oct. 24, 2022
22.3	Head	5825 MHz	5.17	34.75	5.30	35.28	-2.43	-1.50	±5	Oct. 24, 2022
22.6	Head	5815 MHz	5.27	35.51	5.29	35.29	-0.28	0.63	±5	Oct. 25, 2022
22.6	Head	5835 MHz	5.29	35.48	5.31	35.27	-0.32	0.60	±5	Oct. 25, 2022
22.6	Head	5845 MHz	5.30	35.46	5.32	35.26	-0.30	0.57	±5	Oct. 25, 2022
22.6	Head	5855 MHz	5.31	35.44	5.33	35.25	-0.28	0.54	±5	Oct. 25, 2022
22.6	Head	5865 MHz	5.33	35.42	5.34	35.24	-0.23	0.52	±5	Oct. 25, 2022
22.6	Head	5875 MHz	5.34	35.41	5.35	35.23	-0.22	0.51	±5	Oct. 25, 2022
22.6	Head	5885 MHz	5.35	35.40	5.36	35.22	-0.20	0.51	±5	Oct. 25, 2022
22.6	Head	5905 MHz	5.37	35.37	5.38	35.20	-0.27	0.49	±5	Oct. 25, 2022
22.3	Head	2412 MHz	1.75	39.52	1.77	39.27	-0.76	0.64	±5	Oct. 26, 2022
22.3	Head	2422 MHz	1.77	39.48	1.78	39.25	-0.59	0.59	±5	Oct. 26, 2022
22.3	Head	2437 MHz	1.78	39.45	1.79	39.22	-0.35	0.58	±5	Oct. 26, 2022
22.3	Head	2452 MHz	1.80	39.41	1.80	39.20	-0.12	0.54	±5	Oct. 26, 2022
22.3	Head	2462 MHz	1.81	39.38	1.81	39.18	-0.05	0.52	±5	Oct. 26, 2022

Tissue Temp (°C)	Head / Body	Frequency	Cond. σ	Perm. εr	target Cond. σ	target Perm. εr	σ (Delta)(%)	εr (Delta)(%)	Limit (%)	Date
22.3	Head	2467 MHz	1.82	39.37	1.82	39.18	0.01	0.48	±5	Oct. 26, 2022
22.3	Head	2472 MHz	1.82	39.36	1.82	39.17	0.07	0.48	±5	Oct. 26, 2022
22.3	Head	2402 MHz	1.74	39.56	1.76	39.28	-0.93	0.72	±5	Oct. 26, 2022
22.3	Head	2441 MHz	1.79	39.44	1.79	39.22	-0.31	0.56	±5	Oct. 26, 2022
22.3	Head	2480 MHz	1.83	39.34	1.83	39.16	0.14	0.45	±5	Oct. 26, 2022
22.4	Head	6025 MHz	5.56	35.54	5.51	35.07	0.83	1.34	±5	Oct. 27, 2022
22.4	Head	6185 MHz	5.67	35.55	5.70	34.88	-0.55	1.92	±5	Oct. 27, 2022
22.4	Head	6345 MHz	6.01	34.94	5.89	34.69	2.01	0.71	±5	Oct. 27, 2022
22.4	Head	6465 MHz	6.12	34.90	6.03	34.54	1.53	1.05	±5	Oct. 27, 2022
22.4	Head	6505 MHz	6.14	34.76	6.08	34.49	1.03	0.78	±5	Oct. 27, 2022
22.4	Head	6545 MHz	6.20	34.54	6.12	34.45	1.29	0.26	±5	Oct. 27, 2022
22.4	Head	6665 MHz	6.35	34.26	6.26	34.30	1.34	-0.11	±5	Oct. 27, 2022
22.4	Head	6825 MHz	6.56	34.21	6.45	34.11	1.73	0.30	±5	Oct. 27, 2022
22.4	Head	6945 MHz	6.65	33.82	6.59	33.97	0.94	-0.43	±5	Oct. 27, 2022
22.4	Head	6985 MHz	6.69	33.73	6.63	33.92	0.82	-0.57	±5	Oct. 27, 2022
22.4	Head	7025 MHz	6.73	33.70	6.68	33.87	0.75	-0.49	±5	Oct. 27, 2022
22.2	Head	6025 MHz	5.55	34.58	5.51	35.07	0.74	-1.39	±5	Oct. 28, 2022
22.2	Head	6185 MHz	5.64	34.59	5.70	34.88	-1.02	-0.83	±5	Oct. 28, 2022
22.2	Head	6345 MHz	5.98	34.03	5.89	34.69	1.56	-1.91	±5	Oct. 28, 2022
22.2	Head	6465 MHz	6.12	33.98	6.03	34.54	1.56	-1.61	±5	Oct. 28, 2022
22.2	Head	6505 MHz	6.13	33.79	6.08	34.49	0.95	-2.03	±5	Oct. 28, 2022
22.2	Head	6545 MHz	6.20	33.61	6.12	34.45	1.32	-2.43	±5	Oct. 28, 2022
22.2	Head	6665 MHz	6.32	33.36	6.26	34.30	0.88	-2.75	±5	Oct. 28, 2022
22.2	Head	6825 MHz	6.53	33.27	6.45	34.11	1.23	-2.47	±5	Oct. 28, 2022
22.2	Head	6945 MHz	6.63	32.91	6.59	33.97	0.63	-3.13	±5	Oct. 28, 2022
22.2	Head	6985 MHz	6.66	32.76	6.63	33.92	0.44	-3.44	±5	Oct. 28, 2022
22.2	Head	7025 MHz	6.73	32.81	6.68	33.87	0.79	-3.13	±5	Oct. 28, 2022

5.3 Power Density Measurement System

The DASY system in Configuration is shown below:

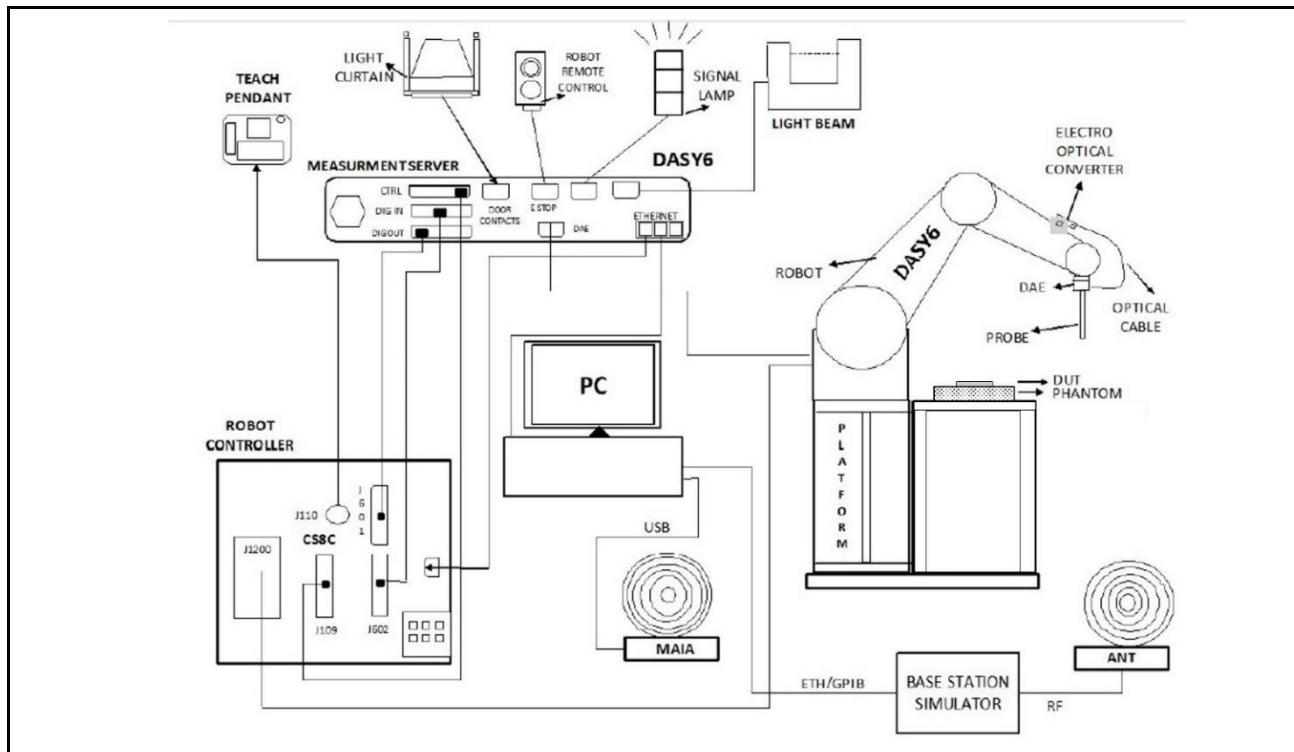


The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer running Win7/Win8/Win10 professional operating system and DASY software.
7. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
8. The mmWave phantom.
9. Validation dipole kits allowing validating the proper functioning of the system.


<DASY E-Field Probe System>

The EUmmWV3 probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. It has two dipoles optimally arranged to obtain pseudo-vector information. It has minimum 3 measurements/point, 120° rotated around probe axis. Sensors (0.8 mm length) printed on glass substrate protected by high density foam. Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.

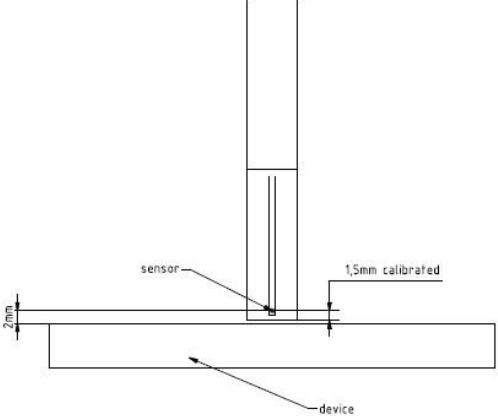Frequency Range	750 MHz - 110 GHz
Dynamic Range	< 20 V/m - 10'000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm
Applications	Electric field measurements of 5G devices and other mm-wave transmitters operating above 10 GHz in <2 mm distance from device (free-space) Power density, magnetic field, and far-field analysis using total field reconstruction (cDASY6 5G or ICEy-mmW module required)
compatibility	cDASY6 + 5G-Module SW1.0 and higher
E-Field mm-Wave Probe	
Sensor to DUT Surface	

<mmWave phantom>

The mmWave phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the radiofrequency (RF) field. It consists of a 40 mm thick Rohacell plate used as a test bed which has a loss tangent ($\tan \delta$) ≤ 0.05 and a relative permittivity (ϵ_r) ≤ 1.2 . The high-performance RF absorbers are placed below the foam.

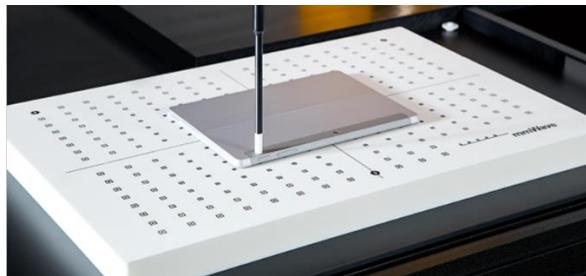**<Data Acquisition Electronic (DAE)>**

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The input impedance of DAE box is 200MOhm; the inputs are symmetric and floating. Common mode rejection is above 80 dB.

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	


<Robot>

Positioner	Stäubli Unimation Corp.	
Robot Model	TX90XL	
Number of Axes	6	
Nominal Load	5 kg	
Reach	1450 mm	
Repeatability	\pm 0.035 mm	

6. System Verification

6.1 SAR System Verification

<Symmetric Dipoles for SAR System Verification>

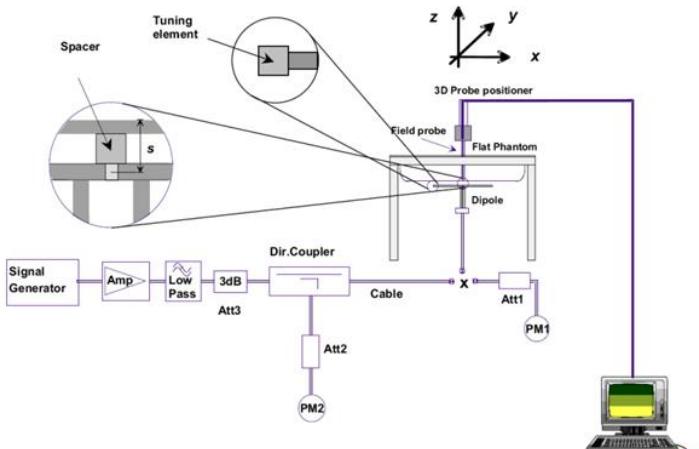Construction	Symmetrical dipole with $\lambda/4$ balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Return Loss	> 20 dB at specified verification position.
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request.
 <p>The diagram illustrates the system verification setup. It shows a signal generator connected to an amplifier, followed by a low-pass filter, a 3dB attenuator (Att3), a directional coupler, and an attenuator (Att2). The signal path then splits into two: one branch goes through a cable to an attenuator (Att1) and a photomultiplier tube (PM1); the other branch goes through a cable to an attenuator (Att2) and a photomultiplier tube (PM2). The system is connected to a flat phantom containing a dipole antenna, which is positioned under a 3D probe positioner. A field probe is used to measure the field at the dipole position. A tuning element and a spacer are also shown. A 3D coordinate system (x, y, z) is indicated above the phantom.</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Validation Kit</p> </div> </div>	

System Verification Setup Diagram

Validation Kit

6.1.1 SAR Verification Summary

Prior to the assessment, the validation data compared to the original value provided by SPEAG should be within its specifications of $\pm 10\%$. The measured SAR will be normalized to 1 W input power. The result indicates the system check can meet the variation criterion and plots can be referred to Appendix B of this report.

Mixture Type	Frequency (MHz)	Power (dBm)	Probe Model / Serial No.	Dipole Model / Serial No.	SAR1 g (W/kg)	1 W Normalize SAR1 g (W/kg)	1 W Target SAR1 g (W/kg)	SAR10 g (W/kg)	1 W Normalize SAR10 g (W/kg)	1 W Target SAR10 g (W/kg)	Deviation 1 g (%)	Deviation 10 g (%)	Date
Head	2450	17 dBm	EX3DV4 – SN3847	D2450V2 – SN712	2.52	50.28	52.80	1.21	24.14	24.40	-4.8%	-1.1%	Oct. 26, 2022
Head	5250	17 dBm	EX3DV4 – SN3847	D5250V2 – SN1021	3.65	72.83	78.10	1.06	21.15	22.10	-6.7%	-4.3%	Oct. 22, 2022
Head	5600	17 dBm	EX3DV4 – SN3847	D5600V2 – SN1021	3.78	75.42	82.00	1.08	21.55	23.20	-8.0%	-7.1%	Oct. 23, 2022
Head	5750	17 dBm	EX3DV4 – SN3847	D5750V2 – SN1021	3.99	79.61	77.30	1.11	22.15	21.50	3.0%	3.0%	Oct. 24, 2022
Head	5800	17 dBm	EX3DV4 – SN7756	D5800V2 – SN1040	3.8	75.82	79.00	1.09	21.75	22.20	-4.0%	-2.0%	Oct. 25, 2022
Head	6500	20 dBm	EX3DV4 – SN3847	D6500V2 – SN1016	28.6	286.00	291.00	5.33	53.30	53.70	-1.7%	-0.7%	Oct. 27, 2022
Head	6500	20 dBm	EX3DV4 – SN3847	D6500V2 – SN1016	28	280.00	291.00	5.25	52.50	53.70	-3.8%	-2.2%	Oct. 28, 2022

Mixture Type	Frequency (MHz)	Power	Probe Model / Serial No.	Dipole Model / Serial No.	1 W Normalize Meas. 4 cm ² PD (W/m ²)	Target 4 cm ² PD (W/m ²)	PD Deviation (%)	Date
Head	6500	20 dBm	EX3DV4 – SN3847	D6500V2 – SN1016	1270.00	1310.00	-3.1%	Oct. 27, 2022
Head	6500	20 dBm	EX3DV4 – SN3847	D6500V2 – SN1016	1280.00	1310.00	-2.3%	Oct. 28, 2022

6.2 Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The system check is successful if the difference between the normalized measured local power density and the numerically validated target value is within the reported expanded uncertainty of the measurement system.

The recommended settings for measurement of verification sources are listed in the following:

Settings for Measurement of Verification Sources			
Frequency[GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	0.125 ($\lambda/8$)	60 / 60	18 x 18
30	0.25 ($\lambda/4$)	60 / 60	26 x 26
45	0.25 ($\lambda/4$)	42 / 42	28 x 28
60	0.25 ($\lambda/4$)	32.5 / 32.5	28 x 28
90	0.25 ($\lambda/4$)	30 / 30	38 x 38


<System Verification Source>

The verification sources apply to system check or verification at specific mmWave frequencies. The sources comprise horn-antennas and very stable signal generators.


Frequency accuracy	10 GHz at 10 mm from the antenna
E-field polarization	Linear
Input Power	Max. 20 W
Conector	SMA
Weight	700 g
Operation	requires a stable source with known forward power to perform system performance check or validation





Calibrated Frequency	30 GHz at 10mm from the antenna (5.55 mm from the case surface)
Frequency accuracy	± 100 MHz
E-field polarization	Linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	100 x 100 x 100 mm
Weight	1 kg

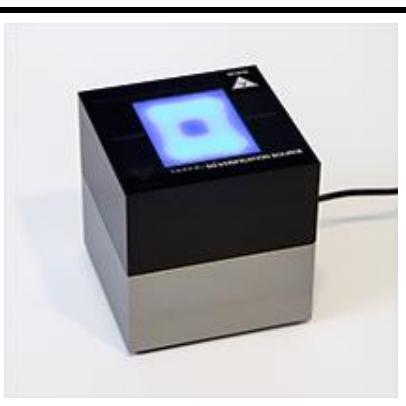

Calibrated Frequency	60 GHz at 10mm from the antenna (5.55 mm from the case surface)
Frequency accuracy	± 100 MHz
E-field polarization	± 100 MHz
Harmonics	Linear
Total radiated power	-20 dBc
Harmonics	14 dBm
Power stability	0.1 dB
Power consumption	5 W
Size	100 x 100 x 100 mm
Weight	1 kg

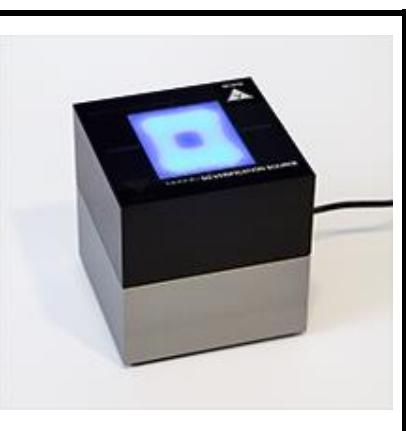

6.2.1 Power Density Verification Summary

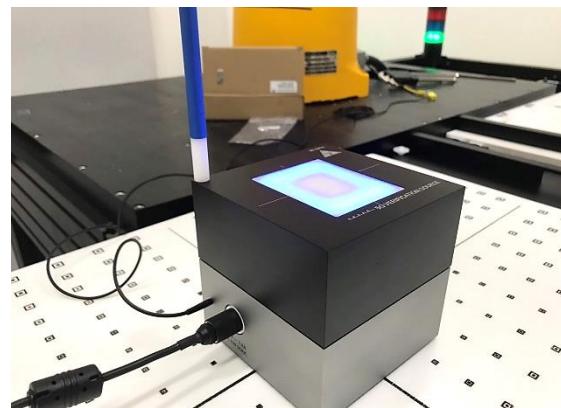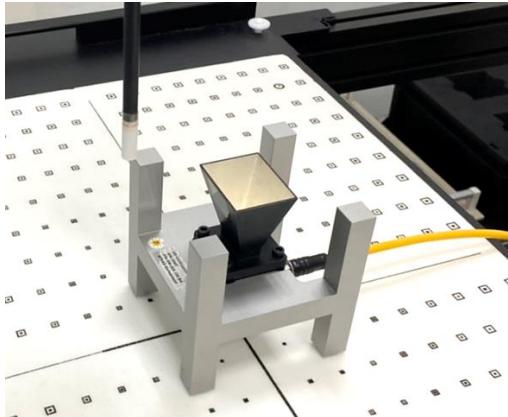

System Verification Setup photo

Prior to the assessment, the validation data compared to the original value provided by SPEAG should be within its specifications of ± 0.66 dB. The ± 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The power density distribution was verified through visual inspection as per Nov. 2017 TCBC Workshop Notes, both spatially (shape) and numerically (level) have no noticeable differences. The following result indicates the system check can meet the variation criterion and plots can be referred to Appendix B of this report.

Mixture Type	Frequency (MHz)	Probe Model / Serial No.	Dipole Model / Serial No.	Meas. 4 cm ² PD (W/m ²)	Target 4 cm ² PD (W/m ²)	PD Deviation (%)	Date
PD	10G	EUmmWV3 – SN9639	5G Verification Source 10 GHz – 2003	150.33	153.00	-1.7%	Oct. 29, 2022
PD	10G	EUmmWV3 – SN9639	5G Verification Source 10 GHz – 2003	152.33	153.00	-0.4%	Oct. 30, 2022

Note:

The measured total PD was the average of psPDn+, psPDtot+ and psPDmod+, which refers to the demonstration from calibration certificate.

7. Test Equipment List

SAR02-BD test site					
Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Cal. Date	Cal.Period
SPEAG	2450 MHz System Validation Kit	D2450V2	712	Jun. 30, 2022	1 year
SPEAG	5 GHz System Validation Kit	D5GHzV2	1040	Aug. 17, 2022	1 year
SPEAG	5 GHz System Validation Kit	D5GHzV2	1021	Jun. 30, 2022	1 year
SPEAG	6.5 GHz System Validation Kit	D6.5GHzV2	1016	Aug. 23, 2022	1 year
SPEAG	5G Verification Source	10 GHz	2003	Feb. 28, 2022	1 year
SPEAG	Dosimetric E-Field Probe	EUmmWV4	9639	Aug. 24, 2022	1 year
SPEAG	Dosimetric E-Field Probe	EX3DV4	3847	Mar. 24, 2022	1 year
SPEAG	Dosimetric E-Field Probe	EX3DV4	7756	Aug. 26, 2022	1 year
SPEAG	Data Acquisition Electronics	DAE4	541	Mar. 23, 2022	1 year
SPEAG	Measurement Server	SE UMS 028 BB	1488	NCR	
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Phantom	ELI V5.0	1175	NCR	
SPEAG	5G Phantom	5G	OX-030	NCR	
SPEAG	Robot	Staubli TX90XL	F16/54FTA1/A/01	NCR	
SPEAG	Software	cDASY6	N/A	NCR	
		V16.0.0.116			
SPEAG	Network Analyzer	DAKS_VNA R140	0010318	May. 23, 2022	1 year
SPEAG	Dielectric Probe Kit	DAKS-3.5	1101	May. 23, 2022	1 year
HILA	Digital Thermometer	TM-906A	1500033	Oct. 29, 2021	1 year
Agilent	Power Sensor	8481H	3318A20779	May. 26, 2022	1 year
Agilent	Power Meter	EDM Series E4418B	GB40206143	May. 26, 2022	1 year
Agilent	Power Sensor	N1921A	MY45241957	Dec. 06, 2021	1 year
Agilent	Power Meter	N1911A	MY45101619	Dec. 06, 2021	1 year
R&S	Power Sensor	NRP8S	111511	Dec. 17, 2021	1 year
R&S	Power Sensor	NRP8S	111512	Dec. 17, 2021	1 year
R&S	Power Sensor	NRP50S	101511	Dec. 22, 2021	1 year
Agilent	Signal Generator	E8257D	MY44320425	Feb. 15, 2022	1 year
Keysight	Spectrum Analyzer	N9010B	MY59071418	Mar. 16, 2022	1 year
Mini-Circuits	Dual Directional Coupler	ZCDC20-5R263-S+	E69806	NCR	
Mini-Circuits	Power Amplifier	EMC014225P	980292	NCR	
Mini-Circuits	Power Amplifier	EMC2830P	980293	NCR	
EMCI	Power Amplifier	EMC0618-P	980833	NCR	
EMCI	Power Amplifier	EMC2830-P	980880	NCR	
Attenuator	INMET	18AH-03	S180301	NCR	
Attenuator	INMET	18AH-10	S181001	NCR	
Attenuator	INMET	18AH-20	S182001	NCR	

Testing Engineer: Ted hsieh / Gary Chao

8. Measurement Procedure

8.1 SAR Measurement Procedure

The measurement procedures are as follows:

1. The DUT is installed engineering testing software that provides continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

8.1.1 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution.

The measure settings are referred to KDB 865664 D01v01r04 :

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	Graded grid Δz _{Zoom} (1): between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	Δz _{Zoom} (n>1): between subsequent points	≤ 1.5 · Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.			
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

8.1.2 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1 g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.1.3 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5 %, the SAR will be retested.

8.1.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values form the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1 g and 10 g

8.2 Power Density Measurement Procedure

8.2.1 Power Density Assessment Based on E-field

According to the IEEE/IEC 63195-1, within a short distance from the transmitting source, power density is determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field are needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. The measurement points are chosen according to the requirements of the methodology used. The following procedure was used:

- (1) Measure the E-field on the measurement surface at a reference location where the field is well above the noise level. This reference level will be used at the end of this procedure to assess output power drift of the DUT during the measurement.
- (2) Scan the electric field on the measurement surface. The requirements of measurement surface dimensions and spatial resolution are dependent on the measurement system and assessment methodology applied. Measurements are therefore conducted according to the instructions provided by SPEAG user's manual.
- (3) Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. Planar scanners typically require a step size of less than $\lambda/2$.
- (4) Calculated H-field from measured field by using reconstruction algorithm since only E-field is directly measured on the evaluation surface. Reconstruction algorithms can also be used to obtain field information from the measured data. In substance, reconstruction algorithms are the set of algorithms, mathematical techniques and procedures that are applied to the measured field on the measurement surface to determine E- and H-field (amplitude and phase) on the evaluation surface.
- (5) Determine the spatial-average power density distribution on the evaluation surface by the following formula. The spatial averaging area, A, is specified by the applicable exposure limits or regulatory requirements. The average area was specified according to regulatory requirements.

$$S_{av} = \frac{1}{2A} \Re \cdot \left(\int \mathbf{E} \times \mathbf{H} \cdot \hat{\mathbf{n}} dA \right)$$

- (6) The maximum spatial-average and/or local power density on the evaluation surface is the final quantity to determine compliance against applicable limits. The spatial averaging area, 4cm^2 , is specified by the Oct. 2018 TCB Workshop notes requirements.
- (7) Measure the E-field on the measurement surface position at the reference location chosen in step A). The power drift of the DUT is estimated as the difference between the squared amplitude of the field values taken in steps a) and g). When the drift is smaller than $\pm 5\%$, this term should be considered in the uncertainty budget. Drifts larger than 5 % due to the design and operating characteristics of the device should be accounted for or addressed according to regulatory requirements to determine compliance.

8.2.2 Total Field and Power Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. The manufacturer SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWV3 probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as $\lambda/5$ away.

9. Measurement Uncertainty

9.1 SAR Measurement Uncertainty

Measurement Uncertainty (0.3-6 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe calibration	12.0	N	2	1	1	6.0	6.0	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	0.7	N	1	1	1	0.7	0.7	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.006 mm	N	1	0.14	0.14	0.1	0.1	∞
Data Processing	1.2	N	1	1	1	1.2	1.2	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	3.3	R	1.732	0.78	0.71	1.5	1.4	∞
Phantom Shell Permittivity	14	R	1.732	0	0	0.0	0.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	11.0	10.9	
Expanded Uncertainty (95% confidence interval)					k =2	21.9	21.7	

Measurement Uncertainty (3-6 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe Calibration	13.1	N	2	1	1	6.55	6.55	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	1.2	N	1	1	1	1.2	1.2	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	2.6	R	1.732	1	1	1.5	1.5	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.005 mm	N	1	0.29	0.29	0.15	0.15	∞
Data Processing	2.3	N	1	1	1	2.3	2.3	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Phantom Shell Permittivity	14	R	1.732	0.25	0.25	2.0	2.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	11.6	11.6	
Expanded Uncertainty (95% confidence interval)					k =2	23.2	23.0	

Measurement Uncertainty (6-10 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe calibration	18.6	N	2	1	1	9.3	9.3	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	2.4	N	1	1	1	2.4	2.4	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	2.8	R	1.732	1	1	1.6	1.6	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient Condition	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.005mm	N	1	0.50	0.50	0.25	0.25	∞
Data Processing	3.5	N	1	1	1	3.5	3.5	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	2.4	R	1.732	0.78	0.71	1.1	1.0	∞
Phantom Shell Permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	14.2	14.1	
Expanded Uncertainty (95% confidence interval)					k =2	28.4	28.3	

9.2 Power Density Measurement Uncertainty

Measurement Uncertainty for PD						
Error Description	Uncertainty Value (\pm dB)	Prob Dist.	Div.	(C _i)	Standard Uncertainty (\pm dB)	V _{if}
Measurement System						
Probe calibration	0.49	N	1	1	0.49	∞
Isotropy	0.50	R	1.732	1	0.29	∞
System Linearity	0.20	R	1.732	1	0.12	∞
System Detection Limit	0.04	R	1.732	1	0.02	∞
Amplitude and phase noise	0.04	R	1.732	1	0.02	∞
Data Acquisition	0.03	N	1	1	0.03	∞
Probe Positioning Repeatability	0.04	R	1.732	1	0.02	∞
Probe Positioning Offset	0.30	R	1.732	1	0.17	∞
Field Reconstruction	0.60	R	1.732	1	0.35	∞
Test Sample Related						
Power Drift of Measurement	0.21	R	1.732	1	0.12	∞
Modulation Response	0.40	R	1.732	1	0.23	∞
Integration Time	0	R	1.732	1	0	∞
Response Time	0	R	1.732	1	0	∞
RF Ambient Noise	0.04	R	1.732	1	0.02	∞
RF Ambient Reflection	0.04	R	1.732	1	0.02	∞
Combined Std. Uncertainty						0.76
Expanded Std. Uncertainty (K=2)						1.52

10. Measurement Evaluation

10.1 Positioning of the DUT in Relation to the Phantom

According to KDB 616217 D04:

1. SAR evaluation is required for back (bottom) surface and side edges of the devices.
2. Some 2-in-1 tablets may operate with the display folded on top of the keyboard. Most recent tablets are designed with an interactive display that may not require a physical keyboard. Both configurations are used in similar manners and require SAR evaluation for the back surface and edges of the tablet. For keyboards that can be unfolded like a laptop, SAR evaluation is required for the bottom surface of the keyboard.
3. SAR evaluation for the front surface of tablet display screens are generally not necessary, except for tablets that are designed to require continuous operations with the hand(s) next to the antenna.
4. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

10.2 SAR Testing with RF Transmitter

10.2.1 SAR Testing with WLAN

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies.

For WLAN SAR testing, the DUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. And the RF signal utilized in SAR measurement has almost 100 % duty cycle and crest factor is 1.

- The card was operated utilizing proprietary software (QATool Dbg) and each channel was measured using a broadband power meter to determine the maximum average power.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4 \text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.

- $> 0.4 \text{ W/kg}$, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$ or all required test positions are tested.

※ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.

※ When it is unclear, all equivalent conditions must be tested.

- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required test channels are considered.

※ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is $\leq 1.2 \text{ W/kg}$, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered as the worst case position; thus used as the initial test position.

- After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following:
 - The channel closest to mid-band frequency is selected for SAR measurement.
 - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s) selection.

< U-NII 6-7 GHz SAR Testing Consideration>

WIFI6E SAR and Power Density measurements were implemented according to the U-NII 6-7 GHz Interim Procedures described in Oct. 2020 TCB workshop.

- A minimum of 5 test channels across full 5925 to 7125 MHz band were used.
- The SAR evaluations using 6-7 GHz parameters were performed per IEC/IEEE 62209-1528, and the Absorbed Power Density (APD) were reported based on SAR measurements.
According to DASY Application Note, the APD is evaluated numerically using the FDTD method of Sim4Life V5.2. For comparison with the basic restrictions, the APD is averaged over square surface areas of 1 cm² and 4 cm² in the lowermost voxel layer of a flat phantom at a frequency of 6.5 GHz. The phantom consists of a dielectric shell of 2 mm thickness and a relative permittivity $\epsilon_r = 3.7$. It is filled with a tissue-simulating liquid with $\epsilon_r = 34.5$ and $\sigma = 6.07$ S/m.

<IEEE 802.11ax RU SAR Testing Consideration>

According to TCB workshop Apr.2019, 802.11 ax is considered as the highest 802.11 mode for OFDM mode selection in KDB248227. Per TCB workshop guidance, if SAR testing for 802.11ax is required (e.g. maximum output power is highest for OFDMA scenarios), the maximum number of tones and the highest maximum output power should be selected. Otherwise, consider the fully allocated channel for SAR testing.

10.2.2 Gravity Sener (G-sensor) Consideration

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered as the worst case position; thus used as the initial test position.

- After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following:
 - The channel closest to mid-band frequency is selected for SAR measurement.
 - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.
 These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s) selection.

This device has built-in G-sensor which triggers power reduction in specified modes. The mechanism operation was verificated according to the guidance in TCB workshop Oct.2021. The results shows as follows.

Laptop mode																			
<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																			
 Move back by 5 degree, until close mode is reobtained.																			
<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps at least 5 degrees.																			
<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																			
Degree	0...	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210
Trigger	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Degree	220	230	240	250	260	270	280	290	300...	315	316	317	318	319	320	330	340	350...	360
Trigger	X	X	X	X	X	X	X	X	X	X	X	X	X	O	O	O	O	O	O
Range of trigger angle : 320																			

Note : O is Trigger

Tablet mode																			
<A> From close mode 0 degrees, open the screen in 10 degree step until laptop mode is obtained.																			
 Move back by 5 degree, until close mode is reobtained.																			
<C> Open the screen in 1 degree steps until laptop mode is reobtained and continue opening the screen in 1 degree steps at least 5 degrees.																			
<D> Then continue opening the screen in 10 degree steps until tablet mode is obtained.																			
Degree	360...	350	330	340	330	320	319	318	317	316	315...	300	290	280	270	260	250	240	230
Trigger	O	O	O	O	O	O	X	X	X	X	X	X	X	X	X	X	X	X	X
Degree	220	210	200	190	180	170	160	150	140	130	120	110	100	90	80	70	60	50...	0
Trigger	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Range of trigger angle : 320																			

Note : O is Trigger

10.3 Conducted Power Measurements

Refer to Appendix A.

10.4 Antenna location

Refer to Appendix E.

10.5 Test Results

10.5.1 SAR Test Result

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	SAR1 g (W/kg)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Reported SAR1 g (W/kg)	Antenna	Antenna Vendor
	WLAN 2.4 GHz	802.11b	11	2462	Bottom of laptop	0	0.151	13.98	14.5	99.46	0.17	ANT Main	ICT
2	WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	0	0.838	10.68	11.5	99.46	1.02	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	0	0.77	10.68	11.5	99.46	0.93	ANT Main	AWAN
	WLAN 2.4 GHz	802.11b	1	2412	Bottom Face	0	0.806	10.54	11.5	99.46	1.01	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	6	2437	Bottom Face	0	0.829	10.67	11.5	99.46	1.01	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Side 1	0	0.384	10.68	11.5	99.46	0.47	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Side 2	0	0.066	10.68	11.5	99.46	0.08	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Side 3	0	0.01	10.68	11.5	99.46	0.01	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Side 4	0	0.01	10.68	11.5	99.46	0.01	ANT Main	ICT
	WLAN 2.4 GHz	802.11b	1	2412	Bottom of laptop	0	0.046	13.97	14.5	99.49	0.05	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	1	2412	Bottom Face	0	0.705	10.69	11.5	99.49	0.85	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	6	2437	Bottom Face	0	0.702	10.63	11.5	99.49	0.86	ANT Aux	ICT
13	WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	0	0.718	10.49	11.5	99.49	0.91	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	0	0.661	10.49	11.5	99.49	0.84	ANT Aux	AWAN
	WLAN 2.4 GHz	802.11b	1	2412	Side 1	0	0.339	10.69	11.5	99.49	0.41	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	1	2412	Side 2	0	0.01	10.69	11.5	99.49	0.01	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	1	2412	Side 3	0	0.01	10.69	11.5	99.49	0.01	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	1	2412	Side 4	0	0.127	10.69	11.5	99.49	0.15	ANT Aux	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Bottom of laptop	0	0.177	16.74	17.5	99.58	0.21	ANT MIMO	ICT
20	WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	0	0.81	13.79	14.5	99.58	0.96	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Bottom Face	0	0.758	13.79	14.5	99.58	0.90	ANT MIMO	AWAN
	WLAN 2.4 GHz	802.11b	1	2412	Bottom Face	0	0.778	13.63	14.5	99.58	0.95	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	6	2437	Bottom Face	0	0.778	13.73	14.5	99.58	0.93	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Side 1	0	0.24	13.79	14.5	99.58	0.28	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Side 2	0	0.127	13.79	14.5	99.58	0.15	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Side 3	0	0.01	13.79	14.5	99.58	0.01	ANT MIMO	ICT
	WLAN 2.4 GHz	802.11b	11	2412	Side 4	0	0.113	13.79	14.5	99.58	0.13	ANT MIMO	ICT
	Bluetooth	GFSK	0	2402	Bottom of laptop	0	0.01	10.98	11.5	78.31	0.01	ANT Aux	ICT
	Bluetooth	GFSK	0	2402	Bottom Face	0	0.227	8.29	8.5	78.31	0.30	ANT Aux	ICT
	Bluetooth	GFSK	39	2441	Bottom Face	0	0.248	8.15	8.5	78.31	0.34	ANT Aux	ICT
31	Bluetooth	GFSK	78	2480	Bottom Face	0	0.25	7.98	8.5	78.31	0.36	ANT Aux	ICT
	Bluetooth	GFSK	78	2480	Bottom Face	0	0.185	7.98	8.5	78.31	0.27	ANT Aux	AWAN
	Bluetooth	GFSK	0	2402	Side 1	0	0.185	8.29	8.5	78.31	0.25	ANT Aux	ICT
	Bluetooth	GFSK	0	2402	Side 2	0	0.061	8.29	8.5	78.31	0.08	ANT Aux	ICT
	Bluetooth	GFSK	0	2402	Side 3	0	0.01	8.29	8.5	78.31	0.01	ANT Aux	ICT
	Bluetooth	GFSK	0	2402	Side 4	0	0.01	8.29	8.5	78.31	0.01	ANT Aux	ICT

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	SAR1 g (W/kg)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Reported SAR1 g (W/kg)	Antenna	Antenna Vendor
39	WLAN 5 GHz	802.11n HT40	62	5310	Bottom of laptop	0	0.149	14.27	15	97.06	0.18	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Bottom Face	0	0.661	9.26	10	95.38	0.82	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.673	8.94	10	98.30	0.87	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.642	8.94	10	98.30	0.83	ANT Main	AWAN
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 1	0	0.212	9.26	10	95.38	0.26	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 2	0	0.098	9.26	10	95.38	0.12	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 3	0	0.01	9.26	10	95.38	0.01	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 4	0	0.01	9.26	10	95.38	0.01	ANT Main	ICT
47	WLAN 5 GHz	802.11n HT40	62	5310	Bottom of laptop	0	0.147	14.24	15	97.10	0.18	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Bottom Face	0	0.771	8.42	8.5	95.41	0.82	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.78	7.98	8.5	98.33	0.89	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.751	7.98	8.5	98.33	0.86	ANT Aux	AWAN
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 1	0	0.413	8.42	8.5	95.41	0.44	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 2	0	0.01	8.42	8.5	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 3	0	0.01	8.42	8.5	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 4	0	0.115	8.42	8.5	95.41	0.12	ANT Aux	ICT
55	WLAN 5 GHz	802.11n HT40	62	5310	Bottom of laptop	0	0.147	17.33	18	97.23	0.18	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Bottom Face	0	0.74	11.71	12.3	95.32	0.89	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.796	10.95	12.3	98.42	1.10	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	58	5290	Bottom Face	0	0.76	10.95	12.3	98.42	1.05	ANT MIMO	AWAN
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 1	0	0.228	11.71	12.3	95.32	0.27	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 2	0	0.12	11.71	12.3	95.32	0.14	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 3	0	0.01	11.71	12.3	95.32	0.01	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	50	5250	Side 4	0	0.107	11.71	12.3	95.32	0.13	ANT MIMO	ICT
63	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom of laptop	0	0.149	11.99	13	98.30	0.19	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Bottom Face	0	0.651	7.03	8	95.38	0.85	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.714	7.23	8	98.30	0.87	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.689	7.23	8	98.30	0.84	ANT Main	AWAN
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 1	0	0.23	7.03	8	95.38	0.30	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 2	0	0.107	7.03	8	95.38	0.14	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 3	0	0.01	7.03	8	95.38	0.01	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 4	0	0.01	7.03	8	95.38	0.01	ANT Main	ICT
71	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom of laptop	0	0.183	12.2	13	98.33	0.22	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Bottom Face	0	0.575	7.12	8	95.41	0.74	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.714	7.33	8	98.33	0.85	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.7	7.33	8	98.33	0.83	ANT Aux	AWAN
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 1	0	0.424	7.12	8	95.41	0.54	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 2	0	0.01	7.12	8	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 3	0	0.01	7.12	8	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 4	0	0.117	7.12	8	95.41	0.15	ANT Aux	ICT
79	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom of laptop	0	0.157	15.27	16	98.42	0.19	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Bottom Face	0	0.611	9.97	11	95.32	0.81	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.714	10.19	11	98.42	0.87	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	106	5530	Bottom Face	0	0.679	10.19	11	98.42	0.83	ANT MIMO	AWAN
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 1	0	0.204	9.97	11	95.32	0.27	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 2	0	0.107	9.97	11	95.32	0.14	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 3	0	0.01	9.97	11	95.32	0.01	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	114	5570	Side 4	0	0.096	9.97	11	95.32	0.13	ANT MIMO	ICT
111	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom of laptop	0	0.144	11.94	13	98.30	0.19	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom Face	0	0.545	7.61	8.5	98.30	0.68	ANT Main	ICT
	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.624	7.83	8.5	97.06	0.75	ANT Main	ICT
	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.59	7.83	8.5	97.06	0.71	ANT Main	AWAN
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 1	0	0.224	7.61	8.5	98.30	0.28	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 2	0	0.104	7.61	8.5	98.30	0.13	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 3	0	0.01	7.61	8.5	98.30	0.01	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 4	0	0.01	7.61	8.5	98.30	0.01	ANT Main	ICT

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	SAR1 g (W/kg)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Reported SAR1 g (W/kg)	Antenna	Antenna Vendor
	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom of laptop	0	0.102	12.15	13	98.33	0.13	ANT Aux	
	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom Face	0	0.508	7.22	8	98.33	0.62	ANT Aux	ICT
119	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.632	7.38	8	97.10	0.75	ANT Aux	ICT
	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.596	7.38	8	97.10	0.71	ANT Aux	AWAN
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 1	0	0.269	7.22	8	98.33	0.33	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 2	0	0.01	7.22	8	98.33	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 3	0	0.01	7.22	8	98.33	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 4	0	0.074	7.22	8	98.33	0.09	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom of laptop	0	0.123	14.75	16	98.42	0.17	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Bottom Face	0	0.578	10.29	11.2	98.42	0.72	ANT MIMO	ICT
127	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.614	10.48	11.2	97.23	0.75	ANT MIMO	ICT
	WLAN 5 GHz	802.11n HT40	159	5795	Bottom Face	0	0.575	10.48	11.2	97.23	0.70	ANT MIMO	AWAN
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 1	0	0.17	10.29	11.2	98.42	0.21	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 2	0	0.09	10.29	11.2	98.42	0.11	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 3	0	0.01	10.29	11.2	98.42	0.01	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT80	155	5775	Side 4	0	0.08	10.29	11.2	98.42	0.10	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom of laptop	0	0.189	12.23	13	95.38	0.24	ANT Main	ICT
134	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.845	7.98	8.5	95.38	1.00	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.574	7.98	8.5	95.38	0.68	ANT Main	AWAN
	WLAN 5 GHz	802.11ac VHT80	171	5855	Bottom Face	0	0.604	7.92	8.5	98.30	0.70	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 1	0	0.265	7.98	8.5	95.38	0.31	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 2	0	0.123	7.98	8.5	95.38	0.15	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 3	0	0.01	7.98	8.5	95.38	0.01	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 4	0	0.01	7.98	8.5	95.38	0.01	ANT Main	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom of laptop	0	0.145	11.92	13	95.41	0.19	ANT Aux	ICT
142	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.777	7.33	8	95.41	0.95	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.748	7.33	8	95.41	0.91	ANT Aux	AWAN
	WLAN 5 GHz	802.11ac VHT80	171	5855	Bottom Face	0	0.682	7.19	8	98.33	0.84	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 1	0	0.411	7.33	8	95.41	0.50	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 2	0	0.01	7.33	8	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 3	0	0.01	7.33	8	95.41	0.01	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 4	0	0.113	7.33	8	95.41	0.14	ANT Aux	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom of laptop	0	0.172	15.05	16	95.32	0.22	ANT MIMO	ICT
150	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.797	10.61	11.2	95.32	0.96	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	0	0.765	10.61	11.2	95.32	0.92	ANT MIMO	AWAN
	WLAN 5 GHz	802.11ac VHT80	171	5855	Bottom Face	0	0.593	10.44	11.2	98.42	0.72	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 1	0	0.228	10.61	11.2	95.32	0.27	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 2	0	0.12	10.61	11.2	95.32	0.14	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 3	0	0.01	10.61	11.2	95.32	0.01	ANT MIMO	ICT
	WLAN 5 GHz	802.11ac VHT160	163	5815	Side 4	0	0.107	10.61	11.2	95.32	0.13	ANT MIMO	ICT

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	SAR1 g (W/kg)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Reported SAR1 g (W/kg)	Antenna	APD W/m ² (4cm ²)	Reported APD W/m ² (4cm ²)	Antenna Vendor
	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom of laptop	0	0.029	8.26	9	94.69	0.04	ANT Main	0.216	0.27	ICT
158	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	0	0.939	7.84	8	94.69	1.03	ANT Main	5.17	5.66	ICT
159	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	0	0.935	7.63	8	94.69	1.08	ANT Main	5.17	5.95	ICT
160	WLAN 6 GHz	802.11ax HE160	143	6665	Bottom Face	0	0.852	7.63	8	94.69	0.98	ANT Main	4.71	5.42	ICT
161	WLAN 6 GHz	802.11ax HE160	175	6825	Bottom Face	0	0.971	7.68	8	94.69	1.10	ANT Main	5.67	6.45	ICT
162	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	0	1.03	7.82	8	94.69	1.13	ANT Main	6.12	6.74	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	0	0.989	7.82	8	94.69	1.09	ANT Main	5.98	6.58	AWAN
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 1	0	0.26	7.84	8	94.69	0.28	ANT Main	1.03	1.13	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 2	0	0.01	7.84	8	94.69	0.01	ANT Main	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 3	0	0.01	7.84	8	94.69	0.01	ANT Main	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 4	0	0.01	7.84	8	94.69	0.01	ANT Main	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom of laptop	0	0.038	8.24	9	94.73	0.05	ANT Aux	0.21	0.26	ICT
169	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	0	0.762	8.24	8.5	94.73	0.85	ANT Aux	3.96	4.44	ICT
170	WLAN 6 GHz	802.11ax HE160	15	6025	Bottom Face	0	0.639	7.77	8.5	94.73	0.80	ANT Aux	3.41	4.26	ICT
171	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	0	0.62	7.76	8.5	94.73	0.78	ANT Aux	3.37	4.22	ICT
172	WLAN 6 GHz	802.11ax HE160	143	6665	Bottom Face	0	0.747	7.72	8.5	94.73	0.94	ANT Aux	4.04	5.11	ICT
173	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	0	0.871	8.12	8.5	94.73	1.00	ANT Aux	4.89	5.64	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	0	0.843	8.12	8.5	94.73	0.97	ANT Aux	4.52	5.21	AWAN
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 1	0	0.166	8.24	8.5	94.73	0.19	ANT Aux	1.13	1.27	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 2	0	0.01	8.24	8.5	94.73	0.01	ANT Aux	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 3	0	0.01	8.24	8.5	94.73	0.01	ANT Aux	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	111	6505	Side 4	0	0.01	8.24	8.5	94.73	0.01	ANT Aux	0	0.00	ICT

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	SAR1 g (W/kg)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Reported SAR1 g (W/kg)	Antenna	APD W/m ² (4cm ²)	Reported APD W/m ² (4cm ²)	Antenna Vendor
	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom of laptop	0	0.019	11.13	12	94.33	0.02	ANT MIMO	0	0.00	ICT
180	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	0	1.04	11.07	11.2	94.33	1.14	ANT MIMO	6.13	6.70	ICT
181	WLAN 6 GHz	802.11ax HE160	47	6185	Bottom Face	0	0.925	10.69	11.2	94.33	1.10	ANT MIMO	5.15	6.14	ICT
	WLAN 6 GHz	802.11ax HE160	47	6185	Bottom Face	0	0.897	10.69	11.2	94.33	1.07	ANT MIMO	5.01	5.97	AWAN
182	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	0	0.928	10.76	11.2	94.33	1.09	ANT MIMO	5.21	6.11	ICT
183	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	0	0.967	10.83	11.2	94.33	1.12	ANT MIMO	5.3	6.12	ICT
184	WLAN 6 GHz	802.11ax HE160	175	6825	Bottom Face	0	0.923	10.68	11.2	94.33	1.10	ANT MIMO	5.28	6.31	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Side 1	0	0.261	11.07	11.2	94.33	0.29	ANT MIMO	1.21	1.32	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Side 2	0	0.01	11.07	11.2	94.33	0.01	ANT MIMO	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Side 3	0	0.01	11.07	11.2	94.33	0.01	ANT MIMO	0	0.00	ICT
	WLAN 6 GHz	802.11ax HE160	207	6985	Side 4	0	0.01	11.07	11.2	94.33	0.01	ANT MIMO	0	0.00	ICT

10.5.2 Power Density Test Result

Index.	Band	Modulation	Channel	Frequency (MHz)	Test Position	Spacing (mm)	sPDtot 4 cm ² (W/m ²)	E peak (V/m)	H peak (A/m)	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	Scaling sPDtot 4 cm ² (W/m ²)	Antenna	Date
200	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	2	4.75	73.9	0.649	7.84	8	94.69	5.20	ANT Main	2022/10/29
201	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	2	3.9	66.7	0.359	7.63	8	94.69	4.48	ANT Main	2022/10/29
202	WLAN 6 GHz	802.11ax HE160	143	6665	Bottom Face	2	5.64	103	0.649	7.63	8	94.69	6.49	ANT Main	2022/10/29
203	WLAN 6 GHz	802.11ax HE160	175	6825	Bottom Face	2	5.47	94.5	0.767	7.68	8	94.69	6.22	ANT Main	2022/10/29
204	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	2	5.43	99.2	0.788	7.82	8	94.69	5.98	ANT Main	2022/10/29
205	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	2	2.51	53.3	0.51	8.24	8.5	94.73	2.81	ANT Aux	2022/10/29
206	WLAN 6 GHz	802.11ax HE160	15	6025	Bottom Face	2	2.19	56.9	0.614	7.77	8.5	94.73	2.74	ANT Aux	2022/10/29
207	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	2	1.94	56	0.726	7.76	8.5	94.73	2.43	ANT Aux	2022/10/29
208	WLAN 6 GHz	802.11ax HE160	143	6665	Bottom Face	2	1.56	60.8	0.405	7.72	8.5	94.73	1.97	ANT Aux	2022/10/29
209	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	2	2.53	82.2	0.728	8.12	8.5	94.73	2.92	ANT Aux	2022/10/29
210	WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	2	4.26	87.1	0.637	11.07	11.2	94.33	4.65	ANT MIMO	2022/10/30
211	WLAN 6 GHz	802.11ax HE160	47	6185	Bottom Face	2	4.6	77	0.733	10.69	11.2	94.33	5.48	ANT MIMO	2022/10/30
212	WLAN 6 GHz	802.11ax HE160	79	6345	Bottom Face	2	4.09	76.6	0.489	10.76	11.2	94.73	4.78	ANT MIMO	2022/10/30
213	WLAN 6 GHz	802.11ax HE160	111	6505	Bottom Face	2	5.33	79.2	0.703	10.83	11.2	94.33	6.15	ANT MIMO	2022/10/30
214	WLAN 6 GHz	802.11ax HE160	175	6825	Bottom Face	2	5.87	84.8	0.643	10.68	11.2	94.33	7.01	ANT MIMO	2022/10/30

Note:

1. The test spacing is the distance between probe sensor and DUT surface.
2. The test duty cycle was approached 100 % to facilitate test measurements only. It was confirmed by the manufacturer that the device was not over driven at this test duty cycle, to facilitate linear scaling in the test report.
3. 1.0 W/m² = 0.1 mW/cm².

10.6 SAR Measurement Variability

According to KDB 865664 D01v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required:

1. The original highest measured Reported SAR 1-g is ≥ 0.80 W/kg, repeated that measurement once.
2. Perform a second repeated measurement the ratio of the largest to the smallest SAR for the original and first repeated measurements is <1.2 W/kg, or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).

Band	Modulation	Channel	Frequency (MHz)	Test Position	Note	Original SAR1 g (W/kg)	First SAR1 g (W/kg)	First Ratio SAR1 g	Original APD (W/m ²)	First APD (W/m ²)	First Ratio APD (W/m ²)
WLAN 2.4 GHz	802.11b	11	2462	Bottom Face	Index. #2_once	0.838	0.802	4.30%	-	-	-
WLAN 2.4 GHz	802.11b	11	2412	Bottom Face	Index. #20_once	0.81	0.798	1.48%	-	-	-
WLAN 5 GHz	802.11ac VHT160	163	5815	Bottom Face	Index. #134_once	0.845	0.822	2.72%	-	-	-
WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	Index. #162_once	1.03	0.998	3.11%	6.12	5.97	2.45%
WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	Index. #173_once	0.871	0.844	3.10%	4.89	4.74	3.07%
WLAN 6 GHz	802.11ax HE160	207	6985	Bottom Face	Index. #180_once	1.04	0.996	4.23%	6.13	5.89	3.92%

10.7 Simultaneous Transmission Evaluation

10.7.1 Simultaneous Transmission Configurations

Condition(s)	Band				
	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT Aux
1	V	V			
2	V				V
3					V
4	V	V			V
5			V	V	
6			V		V
7				V	V
8			V	V	V

<Total Exposure Ratio (TER)>

According to IEC TR 63170 and TCBC workshop, total Exposure Ratio (TER) is calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit.

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_n, \text{ limit}} + \sum_{m=1}^M \frac{S_{m,avg}}{S_{lim}, \text{ limit}} < 1$$

Numerical sum of the two ratios should be less than 1.

The worst-case power density results for each test configuration among all antenna arrays were considered for Total Exposure Ratio (TER) analysis. The sum of TER were listed in the following subclause.

10.7.2 Simultaneous Transmission Result

When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

The sum of SAR_{1g} results and TER results are shown as below.

<Sum of SAR_{1g} Results>

Exposure Position	1	2	3	4	5	6	7	8	9	10	4+10	5+10	6+10	7+10	8+10	9+10
	WLAN 2.4 GHz ANT Main	WLAN 2.4 GHz ANT Aux	WLAN 2.4 GHz ANT MIMO	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 5 GHz ANT MIMO	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT MIMO	Bluetooth ANT Aux	$\sum \text{SAR1 g (W/kg)}$					
	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)						
Bottom Face at 0 mm	1.02	0.91	0.96	1.00	0.95	1.10	1.13	1.00	1.14	0.36	1.36	1.31	1.46	1.49	1.36	1.50
Side 1 at 0 mm	0.47	0.41	0.28	0.31	0.54	0.27	0.28	0.19	0.29	0.25	0.56	0.79	0.52	0.53	0.44	0.54
Side 2 at 0 mm	0.08	0.01	0.15	0.15	0.01	0.14	0.01	0.01	0.01	0.08	0.23	0.09	0.22	0.09	0.09	0.09
Side 3 at 0 mm	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02
Side 4 at 0 mm	0.01	0.15	0.13	0.01	0.15	0.13	0.01	0.01	0.01	0.01	0.02	0.16	0.14	0.02	0.02	0.02

Exposure Position	1	2	3	4	5	6	7	8	9	10	4+10	5+10	6+10	7+10	8+10	9+10
	WLAN 2.4 GHz ANT Main	WLAN 2.4 GHz ANT Aux	WLAN 2.4 GHz ANT MIMO	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 5 GHz ANT MIMO	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT MIMO	Bluetooth ANT Aux	$\sum \text{SAR1 g (W/kg)}$					
	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)	SAR1 g (W/kg)						
Bottom of laptop at 0 mm	0.17	0.05	0.21	0.24	0.22	0.22	0.04	0.05	0.02	0.01	0.25	0.23	0.23	0.05	0.06	0.03

<Total Exposure Ratio (TER) Results>

Exposure Position	1	2	3	4	1+4	2+4	3+4
	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	WLAN 6 GHz ANT MIMO	Bluetooth ANT Aux	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
	Total PD (W/m ²)	Total PD (W/m ²)	Total PD (W/m ²)	1g SAR (W/kg)			
Bottom Face	6.49	2.92	7.01	0.36	0.87	0.52	0.93

Note: 1.0 W/m² = 0.1 mW/cm².

10.7.3 SAR to peak location separation (SPLSR)

According to KDB 447498, when the sum of SAR is greater than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR), and the simultaneously transmitting antennas must be considered one pair at a time. The ratio is determined by **(SAR1+SAR2)^{1.5} / (separation distance between the peak SAR locations for the antenna pair, mm)**, round to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

The Hybrid SPLSR procedure in Nov. 2019 TCB workshop and the guidance in Apr. 2022 TCB workshop were applied to the circumstance that simultaneous transmission SAR is > 1.6 W/kg and antenna pair is co-located.

SPLSR analysis is not required in this report since the sum of SAR is under the SAR limit.

10.8 Requirements on the Uncertainty Evaluation

10.8.1 SAR Uncertainty Evaluation

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

The highest measured 1-g SAR is less than 1.5 W/kg and the highest measured 10-g SAR is less than 3.75 W/kg.

Therefore, per KDB Publication 865664 D01, the extended measurement uncertainty analysis described in IEEE 1528-2013 and IEC/IEEE 62209-1528 is not required.

10.8.2 Power Density Uncertainty Evaluation

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

According to IEC/IEEE 63195, if the total uncertainty exceeds 2 dB, the measurement results must be adjusted according to IEC 62479. The total measurement uncertainty for DASY system is 1.51 dB. Therefore, the adjustment is not required.

11. Conclusion

The SAR test values and PD test values found for the device are separately below the maximum limit of 1.6 W/kg and 1.0 mW/cm².

---- END ----