



FCC Radio Test Report

FCC ID: RAS-MT7925B22M

This report concerns: Class II Permissive Change

Project No. : 2410C388
Equipment : 2TX 11be (WiFi7)BW160 + BT/BLE Combo Card
Brand Name : MEDIATEK
Test Model : MT7925B22M
Series Model : N/A
Applicant : MediaTek Inc.
Address : No.1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, 30078 Taiwan
Manufacturer : MediaTek Inc.
Address : No.1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, 30078 Taiwan
Date of Receipt : Dec. 12, 2024
Date of Test : Dec. 12, 2024 ~ Jan. 24, 2025
Issued Date : Jan. 26, 2025
Report Version : R00
Test Sample : Sample No.: DG20241212233
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

A handwritten signature in black ink that appears to read 'Evan Yang'.

Prepared by : _____
Evan Yang

A handwritten signature in black ink that appears to read 'Chay Cai'.

Approved by : _____
Chay Cai

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 TEST MODES	11
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 SUPPORT UNITS	12
3.5 CUSTOMER INFORMATION DESCRIPTION	12
4 . AC POWER LINE CONDUCTED EMISSIONS	13
4.1 LIMIT	13
4.2 TEST PROCEDURE	13
4.3 DEVIATION FROM TEST STANDARD	13
4.4 TEST SETUP	14
4.5 EUT OPERATION CONDITIONS	14
4.6 TEST RESULTS	14
5 . RADIATED EMISSIONS	15
5.1 LIMIT	15
5.2 TEST PROCEDURE	17
5.3 DEVIATION FROM TEST STANDARD	18
5.4 TEST SETUP	18
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	20
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	20
5.8 TEST RESULTS - ABOVE 1000 MHZ	20
6 . MEASUREMENT INSTRUMENTS LIST	21
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	23
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	26
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	31

Table of Contents**Page**

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	34
--	-----------

34

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-5-2410C388	R00	Original Report.	Jan. 26, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 291074 D02 EMC Measurement v01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) Implementation in the following platform

Model name: RZ09-0528

Product name: Notebook PC

Brand name: RAZER™ or  or RAZER

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969
BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	51%	AC 120V/60Hz	Hayden Chen	Jan. 06, 2025
Radiated Emissions-9kHz to 30MHz	26°C	47%	AC 120V/60Hz	Hayden Chen	Jan. 06, 2025
Radiated Emissions-30MHz to 1000MHz	22°C	40%	AC 120V/60Hz	Jensen Zhou	Dec. 20, 2024
Radiated Emissions-Above 1000 MHz	24°C	59%	AC 120V/60Hz	Allen Tong	Dec. 23, 2024
	20°C	39%	AC 120V/60Hz	Calvin Wen	Jan. 04, 2025
	23°C	42%	AC 120V/60Hz	Drew Tan	Jan. 24, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	2TX 11be (WiFi7)BW160 + BT/BLE Combo Card
Brand Name	MEDIATEK
Test Model	MT7925B22M
Series Model	N/A
Model Difference(s)	N/A
Software Version	Windows 11
Hardware Version	APF24002_MB MB1
Power Source	1# DC voltage supplied from AC adapter. Model: ADP-280EB D 2# Supplied from battery. Model: RC30-0528
Power Rating	1# I/P: 100-240V~ 3.2A 50-60Hz O/P: 20.0V---14.0A 2# DC 15.56V 5494mAh 85.5Wh
Operation Frequency Band(s)	UNII-4: 5850 MHz ~ 5895 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 1733.4 Mbps IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 2882 Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

UNII-3+UNII-4	
IEEE 802.11a / IEEE 802.11n(HT20) / IEEE 802.11ac(VHT20) / IEEE 802.11ax(HE20) / IEEE 802.11be(EHT20)	
Channel	Frequency (MHz)
169	5845
UNII-4	
IEEE 802.11a / IEEE 802.11n(HT20) / IEEE 802.11ac(VHT20) / IEEE 802.11ax(HE20) / IEEE 802.11be(EHT20)	
Channel	Frequency (MHz)
173	5865
177	5885
UNII-3+UNII-4	
IEEE 802.11n(HT40) / IEEE 802.11ac(VHT40) / IEEE 802.11ax(HE40) / IEEE 802.11be(EHT40)	
Channel	Frequency (MHz)
167	5835
UNII-4	
IEEE 802.11n(HT40) / IEEE 802.11ac(VHT40) / IEEE 802.11ax(HE40) / IEEE 802.11be(EHT40)	
Channel	Frequency (MHz)
175	5875
UNII-3+UNII-4	
IEEE 802.11ac(VHT80) / IEEE 802.11ax(HE80) / IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)
171	5855
UNII-3+UNII-4	
IEEE 802.11ac(VHT160) / IEEE 802.11ax(HE160) / IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
163	5815

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	QUECTEL	Y4RRW0MA2AA	PIFA	I-PEX MHF4-L	3.44
2	QUECTEL	Y4RRW0MA2BA	PIFA	I-PEX MHF4-L	3.28

Note: Ant.1 refers to Main Antenna, Ant.2 refers to Aux Antenna.

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX BE(EHT80) Mode Channel 171


Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX BE(EHT80) Mode Channel 171

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 1	TX BE(EHT80) Mode Channel 171

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX BE(EHT80) Mode Channel 171

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

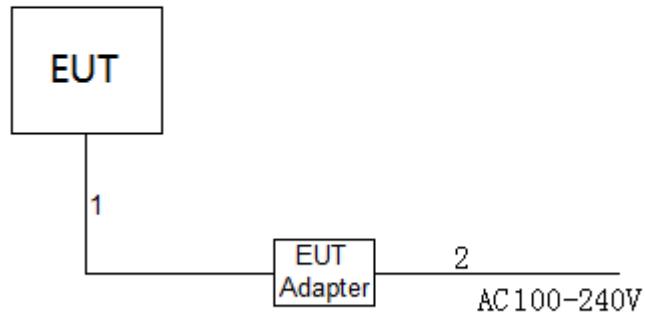

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5M
2	AC Cable	NO	NO	1.0M

3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

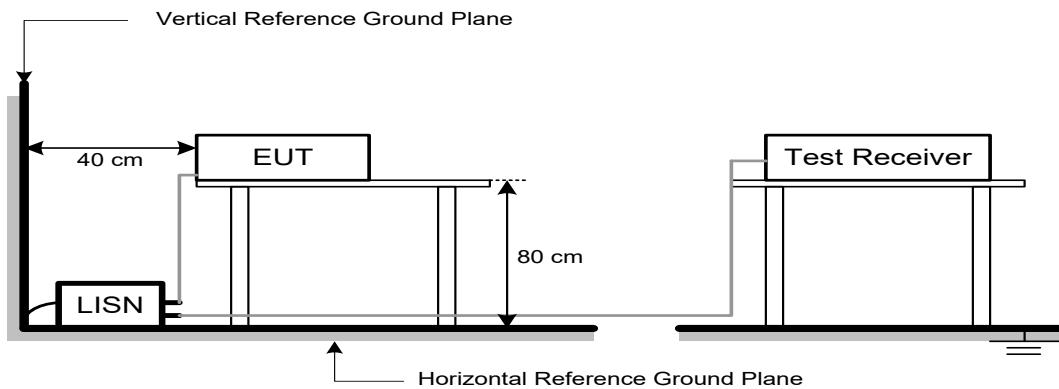

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dB μ V/m)	Harmonic at 1m (dB μ V/m)
5725-5850 NOTE (2)	15	110.2	119.7 (Note 5)
	-7	88.2	97.7 (Note 5)
	-5	90.2	99.7 (Note 5)
	-27	68.2	77.7 (Note 5)
	10	105.2	114.7 (Note 5)
	15.6	110.8	120.3 (Note 5)
	27	122.2	131.7 (Note 5)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30}P}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$


(2) According to 15.407(b)(5)(i), for an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.

According to 15.407(b)(5)(ii), for a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

According to 15.407(b)(5)(iii), for a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

(3) Unwanted emissions outside of restricted bands are measured with a RMS detector.

(4) Band Edge measurements made below 5725 MHz are to be made with a Peak detector. Band Edge measurements above 5895 MHz are to be made with a RMS detector. Band Edge measurements above 5895 MHz should also include Peak plots to show compliance with 15.35(b) where the peak emissions must be limited to no more than 20 dB above the average limit.

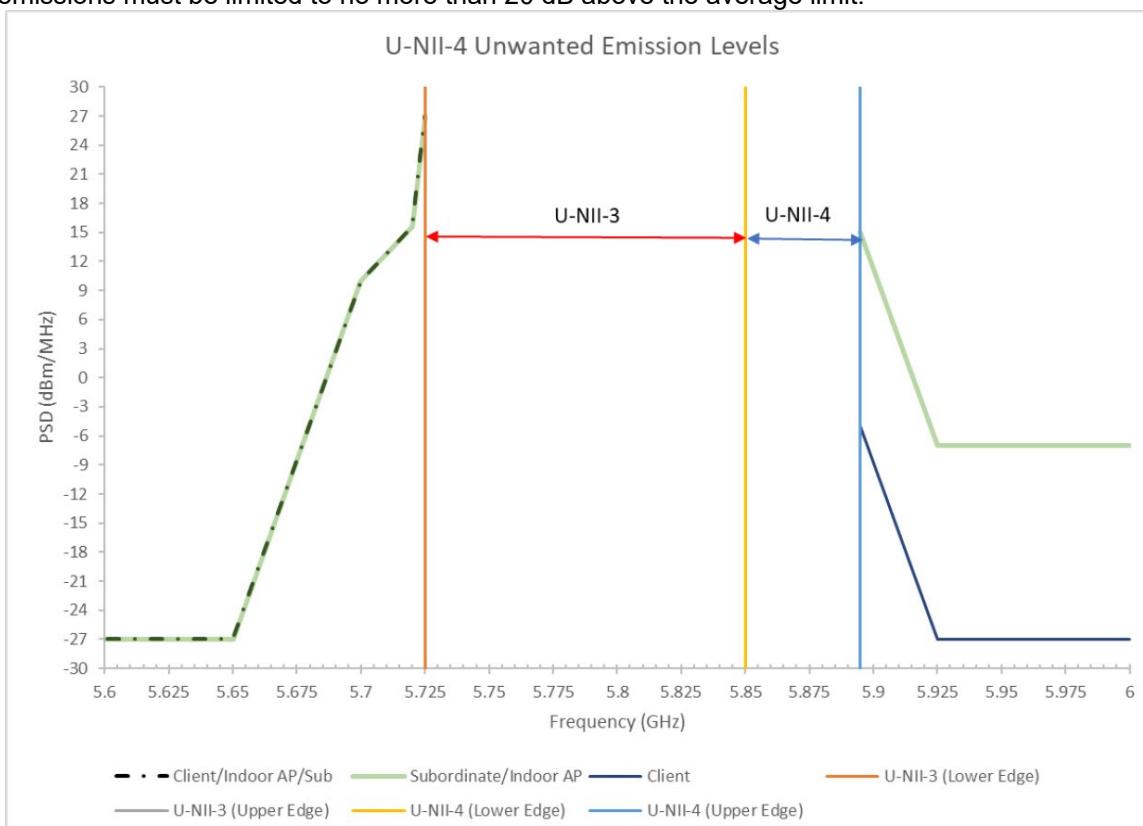

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$$

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

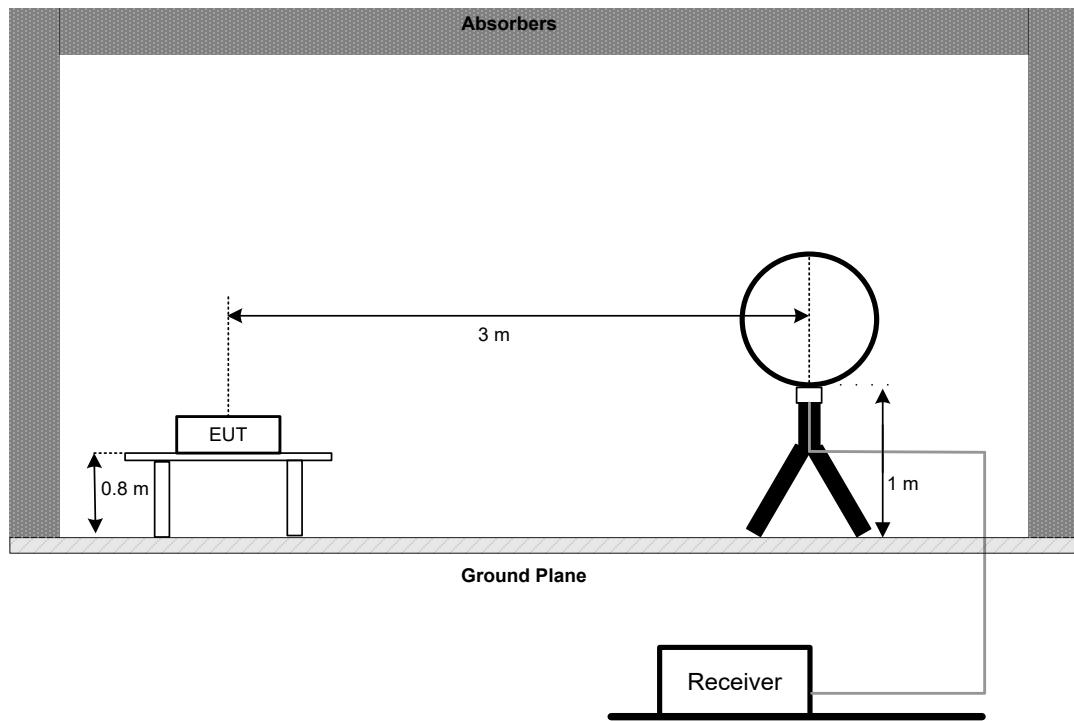


30 MHz to 1 GHz

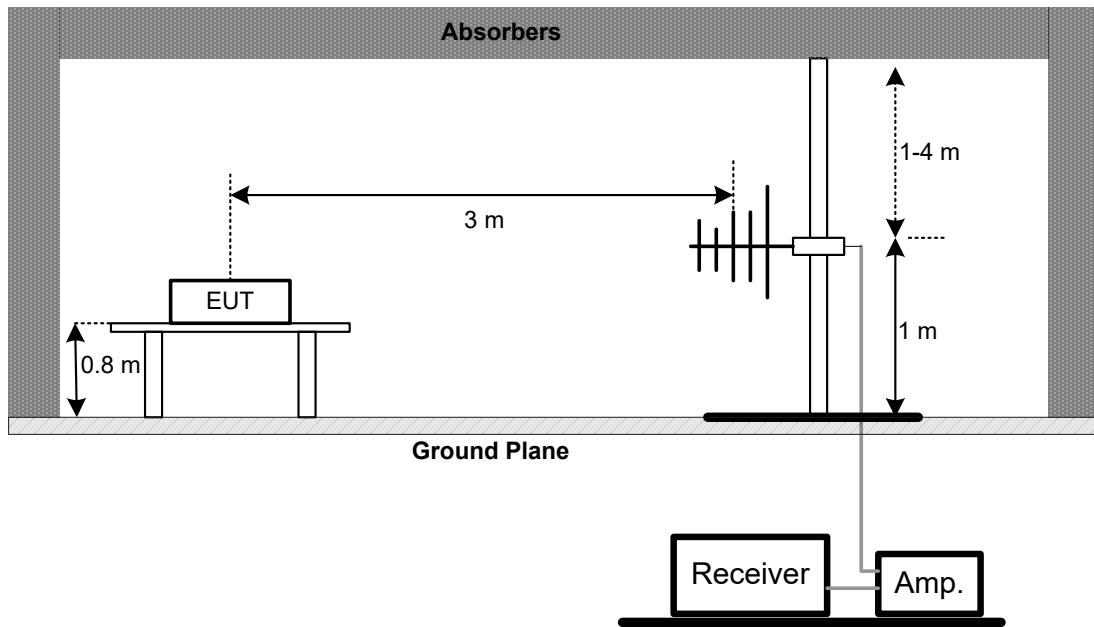


Above 1 GHz
Band edge

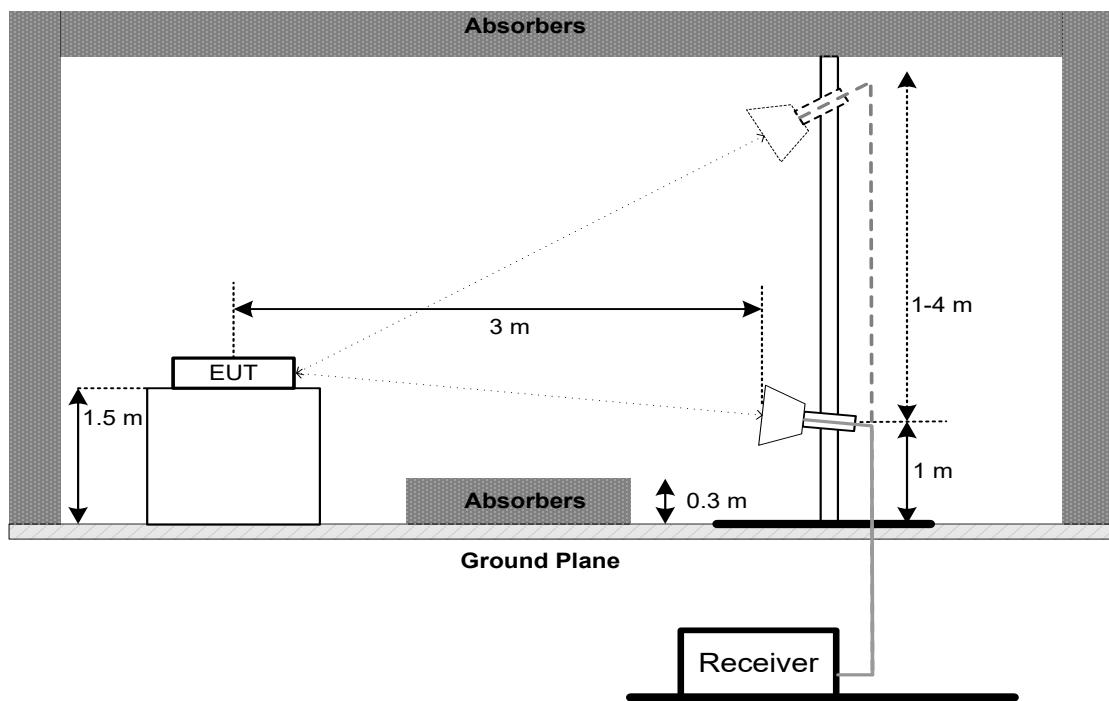

Harmonic (1 GHz to 18 GHz)

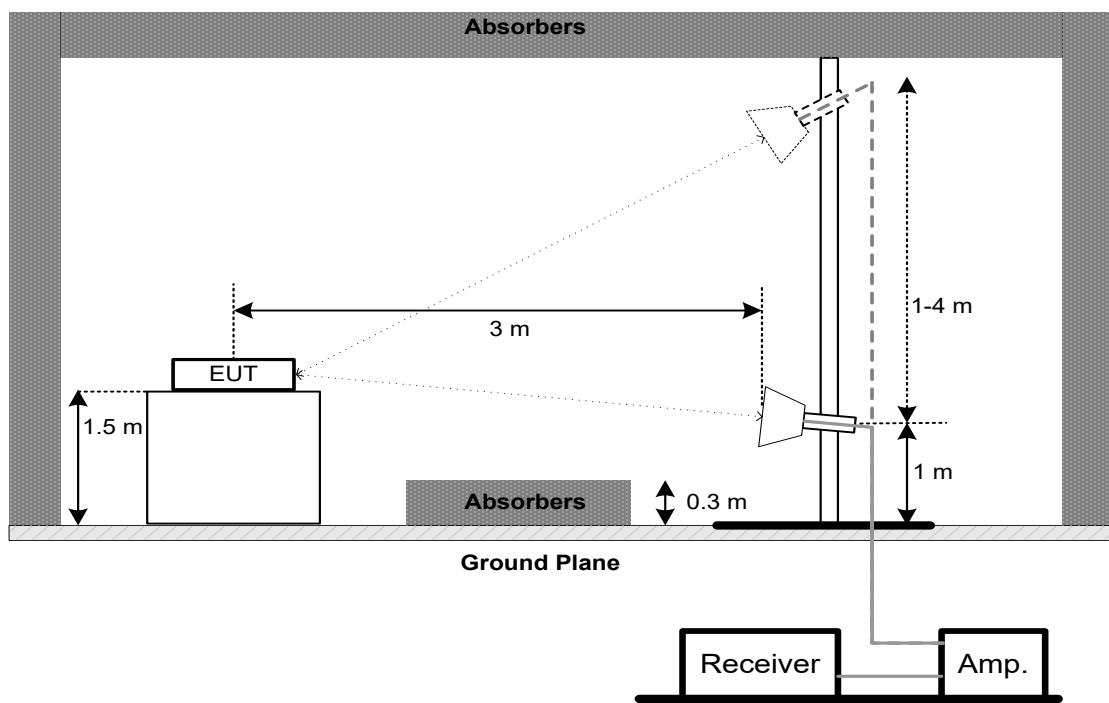

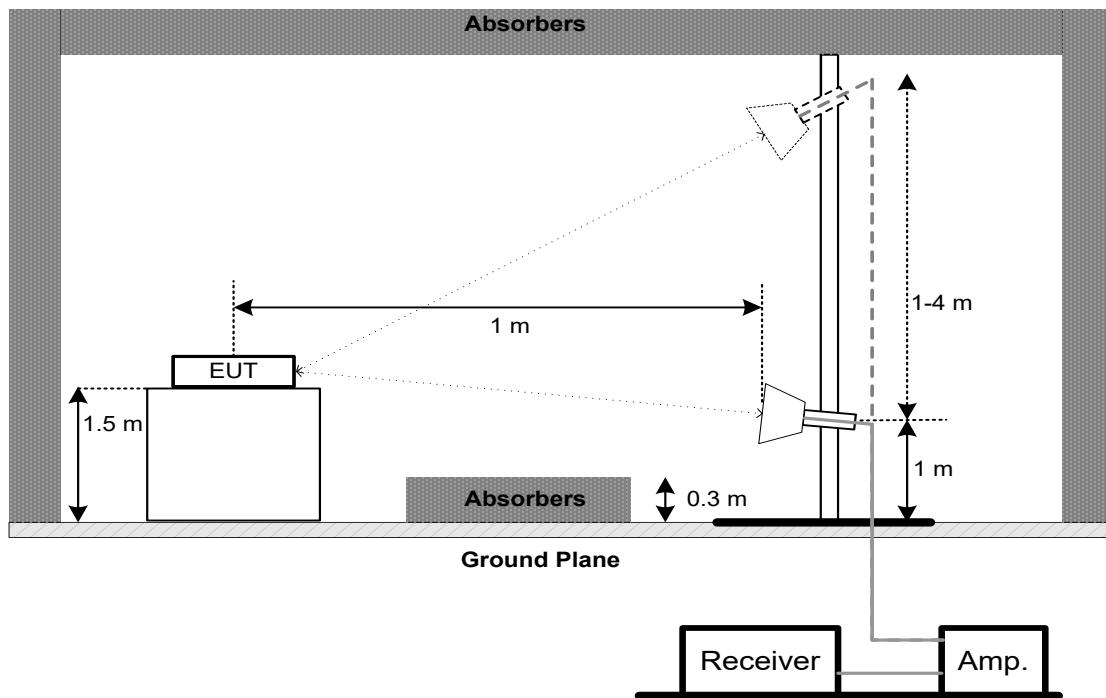Harmonic (18 GHz to 40 GHz)**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	587	May 12, 2025
2	Attenuator	SHX	TS2-6-6-A	240124196	May 12, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	MXE EMI Receiver	KEYSIGHT	N9038B	MY62210123	Oct. 29, 2025
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025


Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 29, 2025
3	Double Ridged Guide Antenna	ETS	3115	75789	Jun. 15, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jul. 03, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
6	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jul. 03, 2025
7	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jul. 03, 2025
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	May 31, 2025
12	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
13	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
14	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
15	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT80) Mode Channel 171	Phase	Line
-----------	-------------------------------	-------	------

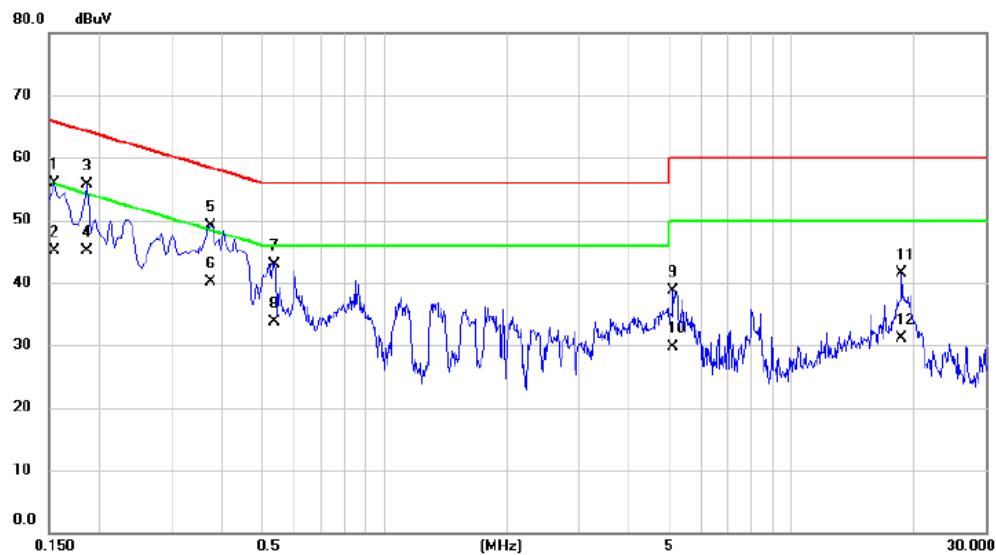


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1	0.1545	45.97	9.91	55.88	65.75	-9.87	QP	
2	0.1545	35.20	9.91	45.11	55.75	-10.64	AVG	
3	0.1860	45.82	9.91	55.73	64.21	-8.48	QP	
4	0.1860	35.20	9.91	45.11	54.21	-9.10	AVG	
5	0.3750	39.20	9.94	49.14	58.39	-9.25	QP	
6	*	30.10	9.94	40.04	48.39	-8.35	AVG	
7	0.5370	33.04	9.96	43.00	56.00	-13.00	QP	
8	0.5370	23.70	9.96	33.66	46.00	-12.34	AVG	
9	5.1180	28.03	10.72	38.75	60.00	-21.25	QP	
10	5.1180	18.90	10.72	29.62	50.00	-20.38	AVG	
11	18.6315	26.79	14.76	41.55	60.00	-18.45	QP	
12	18.6315	16.40	14.76	31.16	50.00	-18.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Phase	Neutral
-----------	-------------------------------	-------	---------

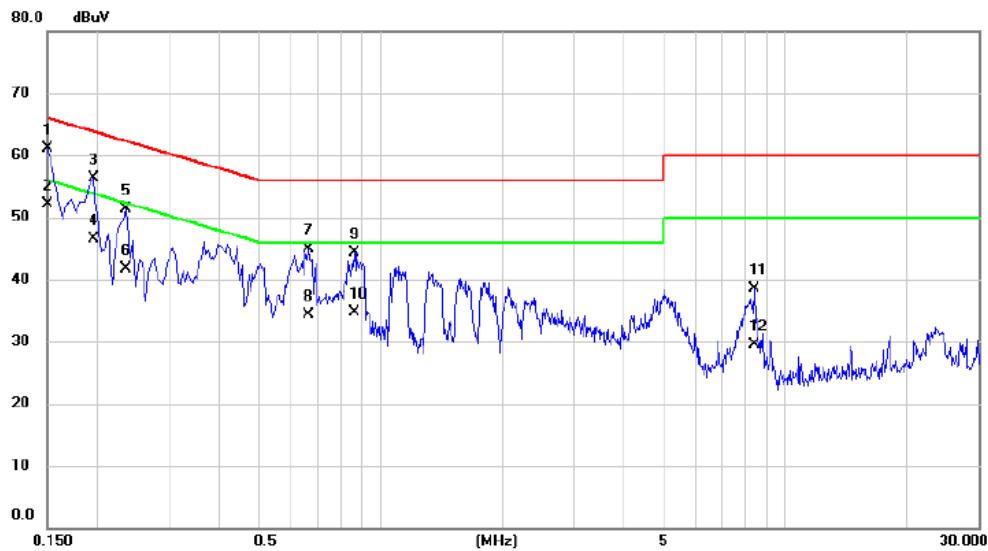


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		0.1500	51.21	9.97	61.18	66.00	-4.82	QP
2	*	0.1500	42.10	9.97	52.07	56.00	-3.93	AVG
3		0.1950	46.40	9.97	56.37	63.82	-7.45	QP
4		0.1950	36.50	9.97	46.47	53.82	-7.35	AVG
5		0.2355	41.36	9.98	51.34	62.25	-10.91	QP
6		0.2355	31.80	9.98	41.78	52.25	-10.47	AVG
7		0.6630	34.84	10.05	44.89	56.00	-11.11	QP
8		0.6630	24.30	10.05	34.35	46.00	-11.65	AVG
9		0.8610	34.30	10.08	44.38	56.00	-11.62	QP
10		0.8610	24.60	10.08	34.68	46.00	-11.32	AVG
11		8.3805	27.02	11.52	38.54	60.00	-21.46	QP
12		8.3805	17.90	11.52	29.42	50.00	-20.58	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

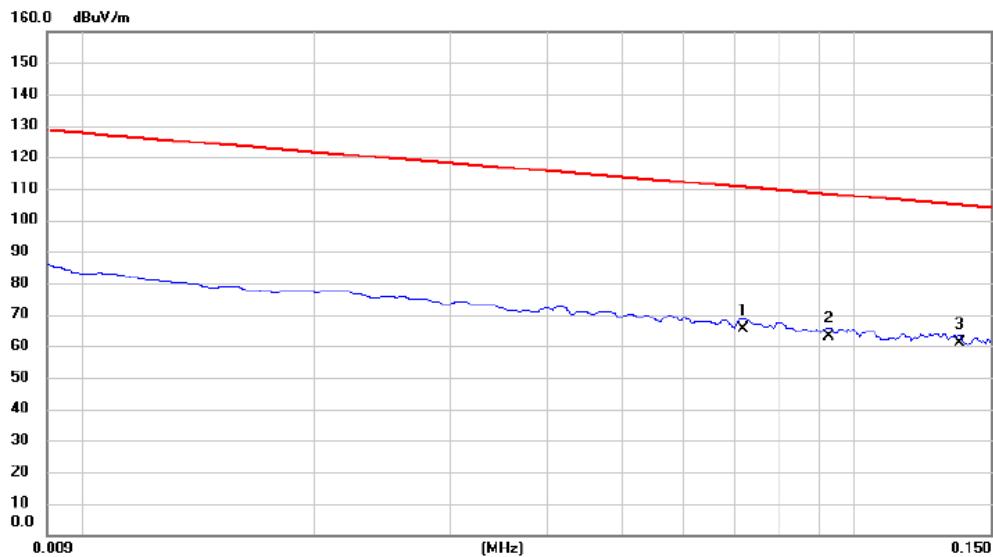


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0717	44.25	21.31	65.56	110.49	-44.93	AVG	
2		0.0926	41.68	21.34	63.02	108.27	-45.25	QP	
3	*	0.1370	39.79	21.28	61.07	104.87	-43.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

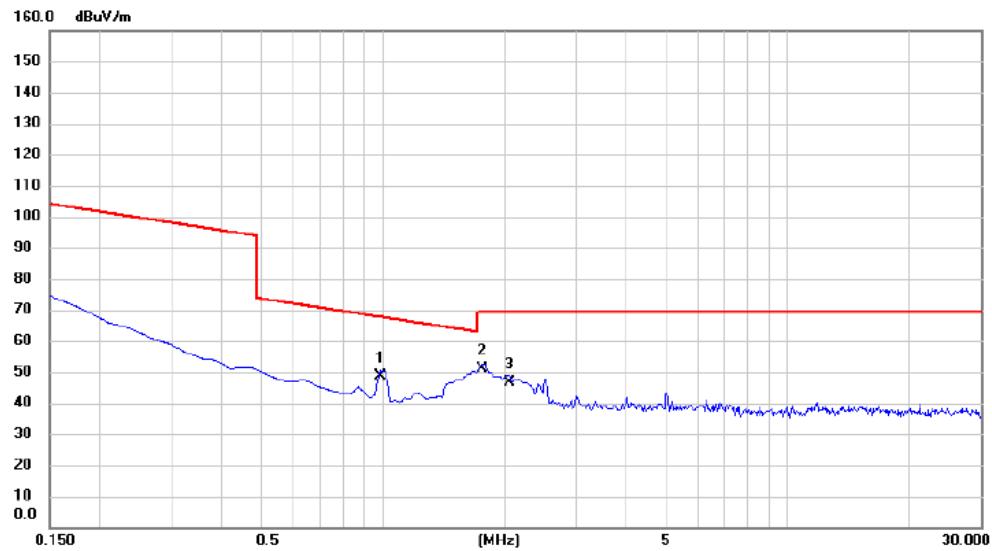


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.9858	27.47	21.20	48.67	67.73	-19.06	QP
2	*	1.7620	29.75	21.13	50.88	69.54	-18.66	QP
3		2.0604	25.63	21.11	46.74	69.54	-22.80	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

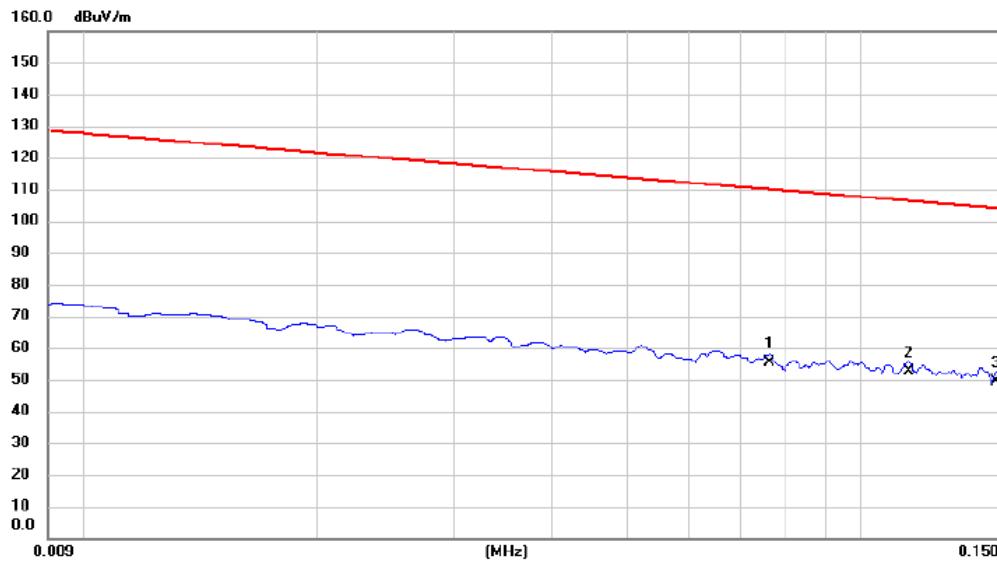


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0763	33.96	21.33	55.29	109.95	-54.66	AVG	
2	*	0.1150	31.42	21.32	52.74	106.39	-53.65	AVG	
3		0.1493	28.23	21.27	49.50	104.13	-54.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

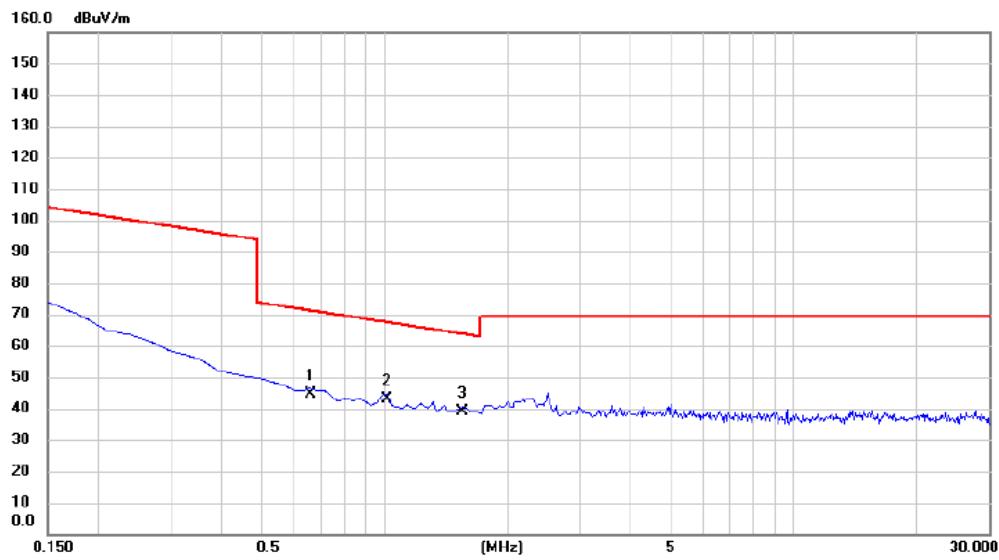


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.6574	23.43	21.11	44.54	71.25	-26.71	QP
2	*	1.0156	21.62	21.20	42.82	67.47	-24.65	QP
3		1.5530	17.87	21.15	39.02	63.78	-24.76	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Vertical
-----------	-------------------------------	--------------	----------

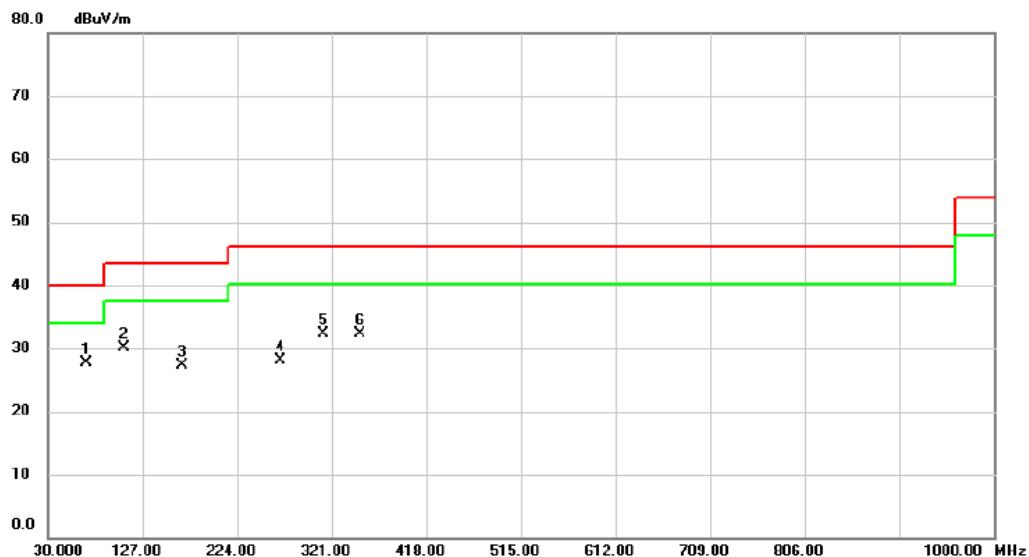


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	69.285	41.13	-13.39	27.74	40.00	-12.26	peak	
2		108.085	44.59	-14.58	30.01	43.52	-13.51	peak	
3		167.740	38.54	-11.15	27.39	43.52	-16.13	peak	
4		269.105	39.71	-11.56	28.15	46.02	-17.87	peak	
5		312.270	42.61	-10.26	32.35	46.02	-13.67	peak	
6		349.615	41.70	-9.44	32.26	46.02	-13.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

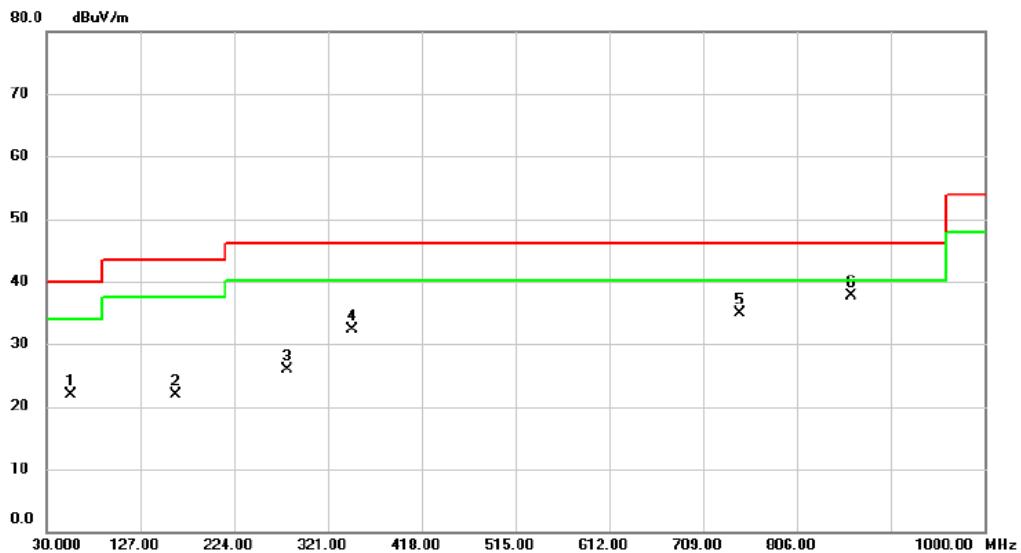


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		55.220	33.34	-11.48	21.86	40.00	-18.14	peak	
2		164.345	32.86	-11.01	21.85	43.52	-21.67	peak	
3		278.320	36.98	-11.13	25.85	46.02	-20.17	peak	
4		345.735	41.84	-9.48	32.36	46.02	-13.66	peak	
5		746.830	35.94	-1.13	34.81	46.02	-11.21	peak	
6 *		862.260	37.86	-0.22	37.64	46.02	-8.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

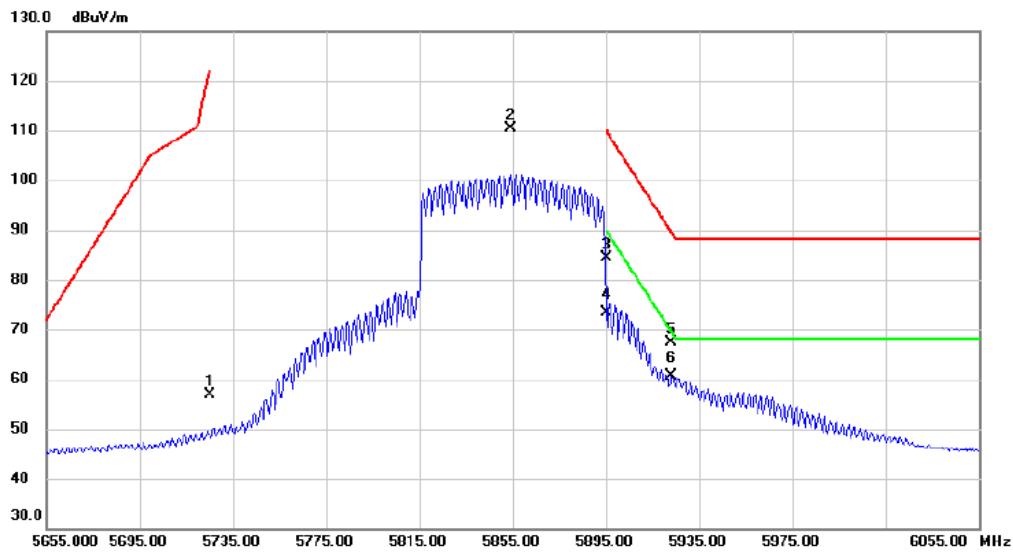


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level dBuV	Factor dB	ment dBuV/m				
1		5725.000	40.18	16.75	56.93	122.20	-65.27	peak	
2		5854.400	93.22	17.17	110.39			peak	
3		5895.000	66.98	17.29	84.27	110.20	-25.93	peak	
4		5895.000	56.18	17.29	73.47	90.20	-16.73	AVG	
5		5923.000	50.11	17.39	67.50	89.67	-22.17	peak	
6 *		5923.000	43.12	17.39	60.51	69.67	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

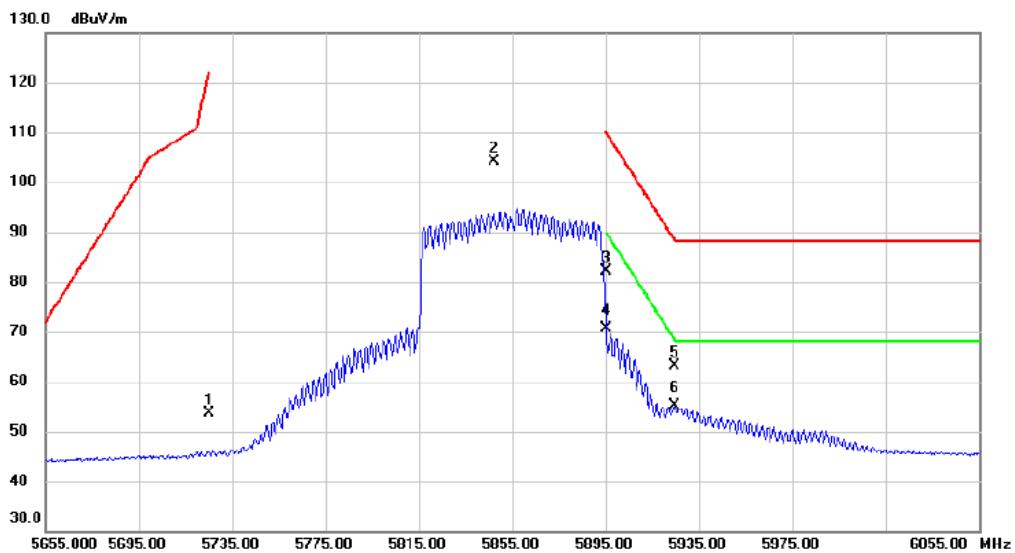


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5725.000	36.95	16.75	53.70	122.20	-68.50	peak	
2		5847.200	86.93	17.15	104.08			peak	
3		5895.000	64.74	17.29	82.03	110.20	-28.17	peak	
4		5895.000	53.44	17.29	70.73	90.20	-19.47	AVG	
5		5924.400	45.66	17.39	63.05	88.64	-25.59	peak	
6	*	5924.400	37.70	17.39	55.09	68.64	-13.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

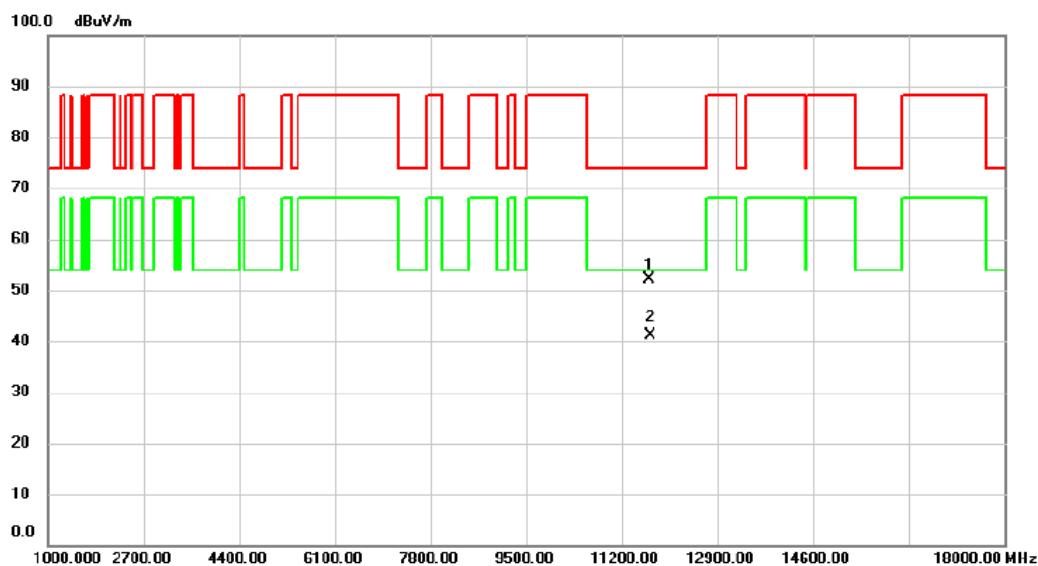


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		11680.100	42.39	9.65	52.04	74.00	-21.96 peak
2 *		11709.300	31.40	9.65	41.05	54.00	-12.95 AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

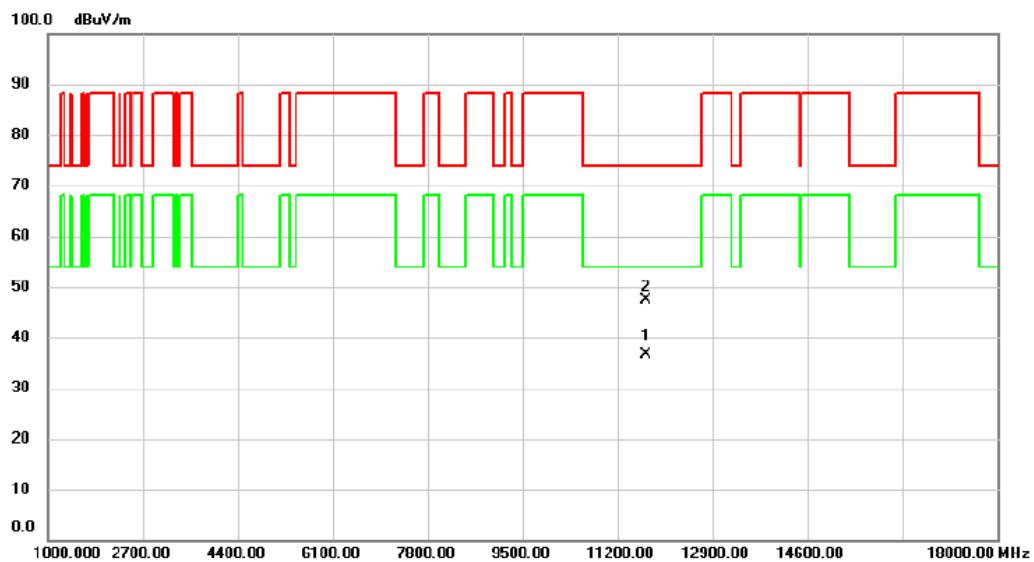


No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	11714.200	27.09	9.65	36.74	54.00	-17.26
2		11716.400	37.78	9.65	47.43	74.00	-26.57
							peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

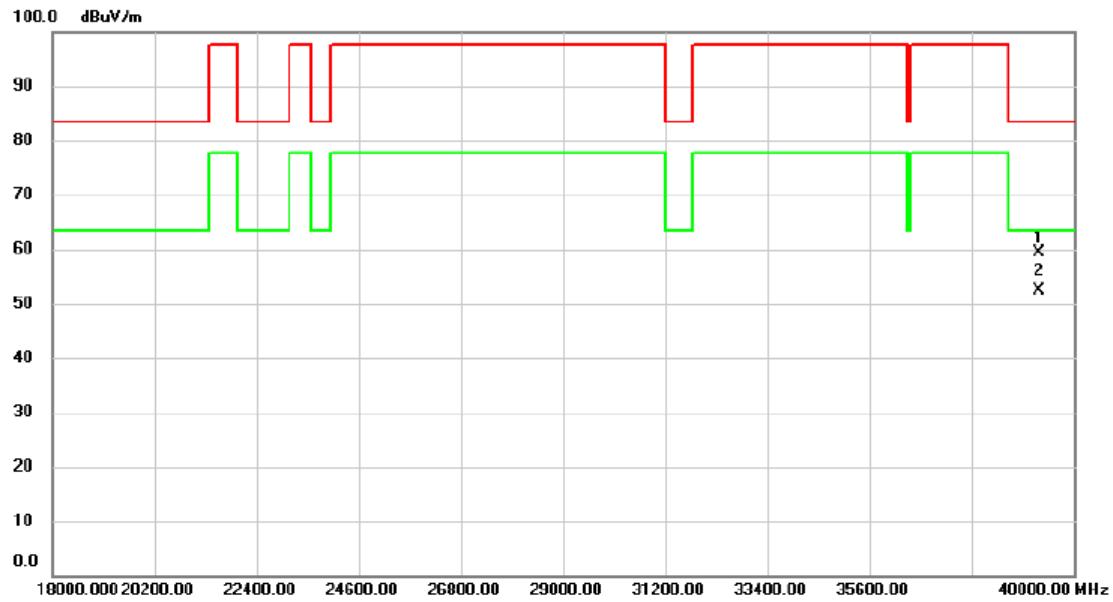


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		39263.000	48.23	11.11	59.34	83.50	-24.16	peak	
2	*	39263.000	41.26	11.11	52.37	63.50	-11.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode 5855 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

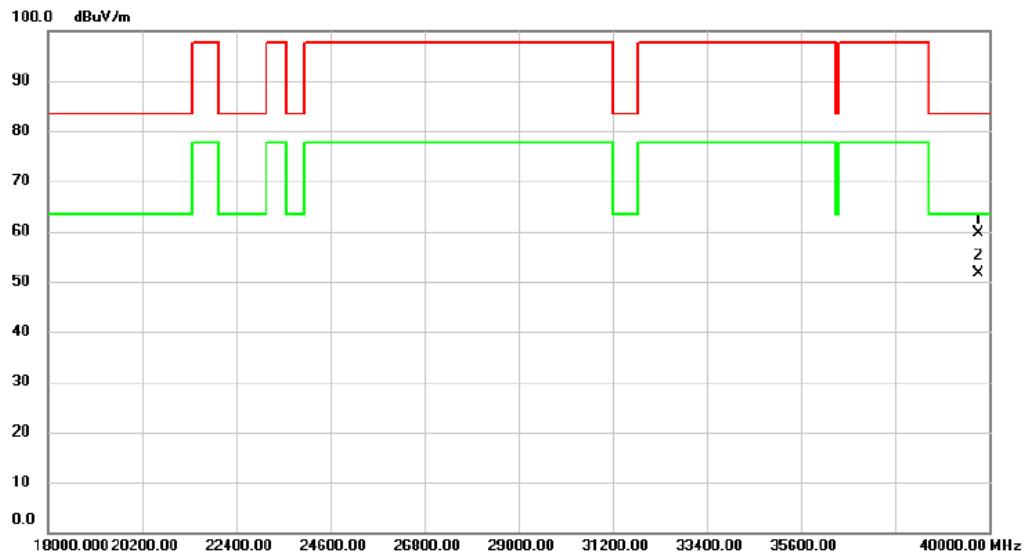

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector Comment
1		39758.000	48.67	10.88	59.55	83.50	-23.95 peak
2	*	39758.000	40.82	10.88	51.70	63.50	-11.80 AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report