



FCC TEST REPORT

FCC ID: 2A66L-TBGL2017A

On Behalf of

abone sagl

Android MiniPC Box

Model No.: TBGL2017A

Prepared for : abone sagl
Address : Via Alla Campagna 4, 6900 Lugano Switzerland

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2204065-C01-R07
Date of Receipt : April 25, 2022
Date of Test : April 26, 2022 – May 18, 2022
Date of Report : May 28, 2022
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results.....	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility.....	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output Power	12
3.1. Limit.....	12
3.2. Test Procedure	12
3.3. Test Setup.....	12
3.4. Test Result.....	12
4. Bandwidth	13
4.1. Limit.....	13
4.2. Test Procedure	13
4.3. Test Result.....	13
5. Carrier Frequency Separation	23
5.1. Limit.....	23
5.2. Test Procedure	23
5.3. Test Result.....	23
6. Number Of Hopping Channel	25
6.1. Limit.....	25
6.2. Test Procedure	25
6.3. Test Result.....	25
7. Dwell Time	27
7.1. Test limit.....	27
7.2. Test Procedure	27
7.3. Test Result.....	27
8. Radiated Emissions.....	44
8.1. Limit.....	44
8.2. Block Diagram of Test setup.....	45
8.3. Test Procedure	46
8.4. Test Result.....	46
9. Band Edge Compliance	57

9.1. Block Diagram of Test Setup	57
9.2. Limit	57
9.3. Test Procedure	57
9.4. Test Result	57
10. Power Line Conducted Emissions.....	64
10.1. Block Diagram of Test Setup	64
10.2. Limit	64
10.3. Test Procedure	64
10.4. Test Result	65
11. Antenna Requirements	68
11.1. Limit	68
11.2. Result	68
12. Test Setup Photo	69
12.1. Photo of Radiated emission	69
12.2. Photo of Conducted Emission test	70
13. EUT Photo	71

TEST REPORT DECLARATION

Applicant : abone sagl
Address : Via Alla Campagna 4, 6900 Lugano Switzerland
Manufacturer : Artway Technology International Co., Ltd.
Address : 621-622, B3 Block, NO.168, Baoyuan Road, Xixiang, Bao'an District,
SHENZHEN, CHINA
EUT Description : Android MiniPC Box
(A) Model No. : TBGL2017A
(B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247,
ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer



Approved by (name + signature).....: Simple Guan
Project Manager



Date of issue.....: May 28, 2022

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 28, 2022	Initial released Issue	Lucas Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P

Note:1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. General Information

2.1. Description of Device (EUT)

Description/PMN : Android MiniPC Box

Model : TBGL2017A

Number/HVIN(s)

Diff. : N/A

Trademark : N/A

Test Voltage : DC 5V from adapter with AC 120V/60Hz

Radio Technology : Bluetooth V5.0 EDR

Operation : 2402MHz-2480MHz
frequency

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel No. : 79 Channels

Channel Separation : 1MHz

Antenna Type : Internal Antenna, max gain 3.55dBi.
Antenna information is provided by applicant.

Software version : V1.0

Hardware version : V1.0

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for Bluetooth EDR function, and there is no other transmitter involved.


2.2. Accessories of Device (EUT)

Accessories	:	AC Adapter
Manufacturer	:	TEKA
Model	:	TEKA012-05020000EU
Ratings	:	Input: 100-240V~50/60Hz 0.35A MAX Output: 5.0V=2.0A 10.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	TV	TCL	32 inches	--	--
2.	USB disk	Kingston	16G	--	--
3.	Notebook PC	Thinkpad	E490	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

The test software “RFTestTool.app” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK/8DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK/8DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	25°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2021.08.25	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2021.08.25	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2021.08.25	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2021.08.25	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	N/A	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	N/A	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	N/A	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	N/A	RE1	2021.08.25	1Year
RF Cable	Resenberger	Cable 2	N/A	RE2	2021.08.25	1Year
RF Cable	Resenberger	Cable 3	N/A	CE1	2021.08.25	1Year
Pre-amplifier	HP	HP8347A	N/A	2834A00455	2021.08.25	1Year
Pre-amplifier	Agilent	8449B	N/A	3008A02664	2021.08.25	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	N/A	8126-466	2021.08.25	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	N/A	101043	2021.08.25	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	N/A	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	N/A	SK2018101801	2021.08.25	1 Year
Power Meter	Agilent	E9300A	N/A	MY41496628	2021.08.25	1 Year
Power Sensor	DARE	RPR3006W	N/A	15100041SNO91	2021.08.25	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000 -40-880	N/A	100631	2022.04.22	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	N/A	20140927-6	2021.08.25	1 Year
Adjustable attenuator	MWRFtest	N/A	N/A	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	N/A	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	farad	Alpha-3A1
CE	EZ-EMC	farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	2.0.0.0

3. Maximum Peak Output Power

3.1. Limit


Please refer FCC part 15.247 & RSS-247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	6.349	21	Pass
	2441	4.855	21	Pass
	2480	5.030	21	Pass
$\pi/4$ DQPSK	2402	7.186	21	Pass
	2441	8.101	21	Pass
	2480	5.857	21	Pass
8DPSK	2402	7.126	21	Pass
	2441	7.204	21	Pass
	2480	5.973	21	Pass
Conclusion: PASS				

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.839	0.934	/	Pass
NVNT	1-DH1	2441	Ant 1	0.867	0.904	/	Pass
NVNT	1-DH1	2480	Ant 1	0.841	1.014	/	Pass
NVNT	2-DH1	2402	Ant 1	1.131	1.22	/	Pass
NVNT	2-DH1	2441	Ant 1	1.123	1.196	/	Pass
NVNT	2-DH1	2480	Ant 1	1.119	1.172	/	Pass
NVNT	3-DH1	2402	Ant1	1.135	1.214	/	Pass
NVNT	3-DH1	2441	Ant1	1.139	1.234	/	Pass
NVNT	3-DH1	2480	Ant1	1.137	1.222	/	Pass

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

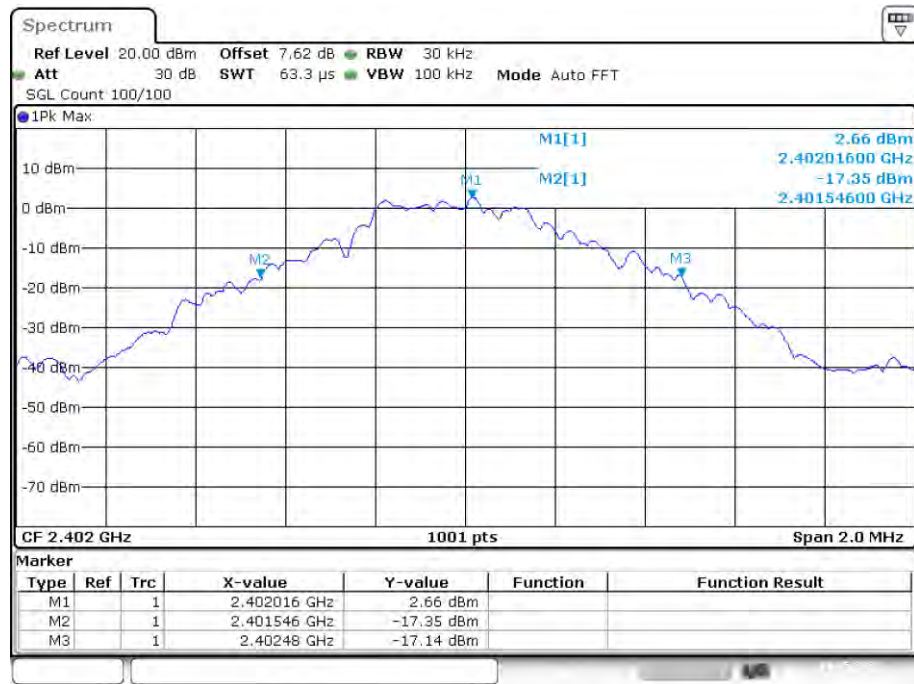


Date: 9.MAY.2022 10:12:33

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

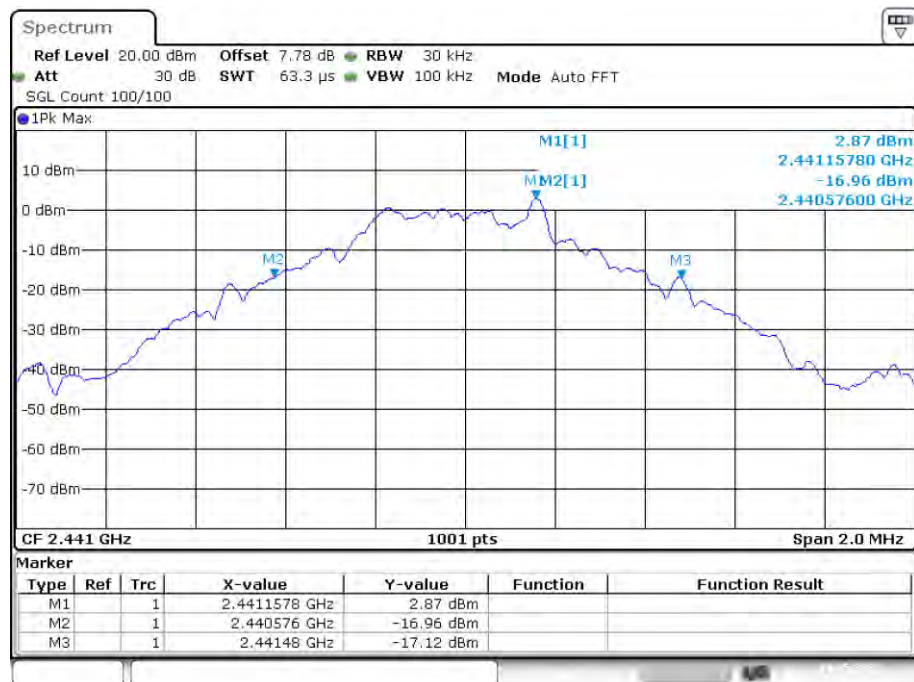


Date: 9.MAY.2022 10:14:39

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

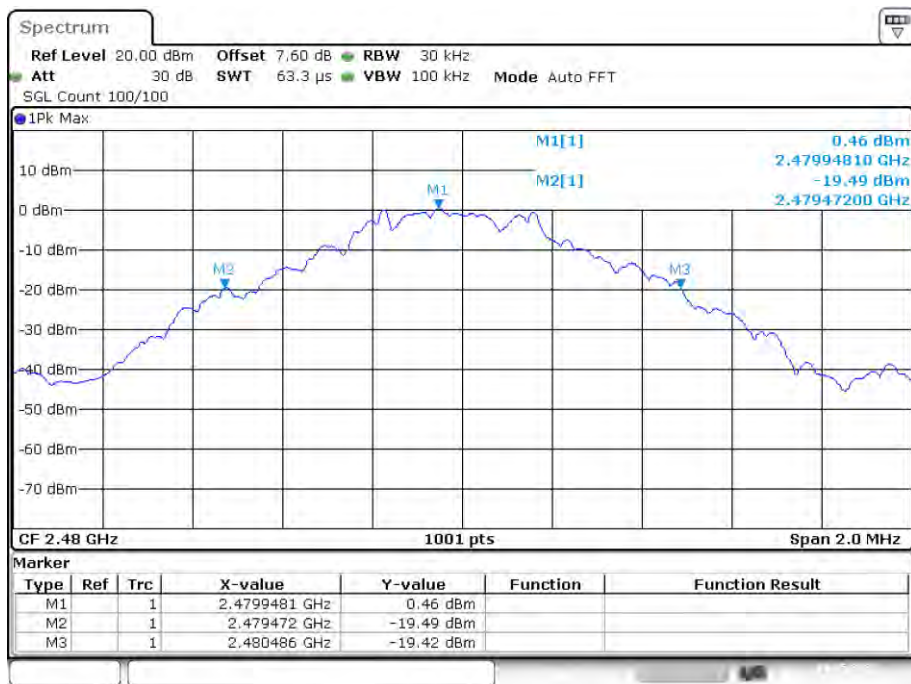


Date: 9.MAY.2022 10:17:36

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

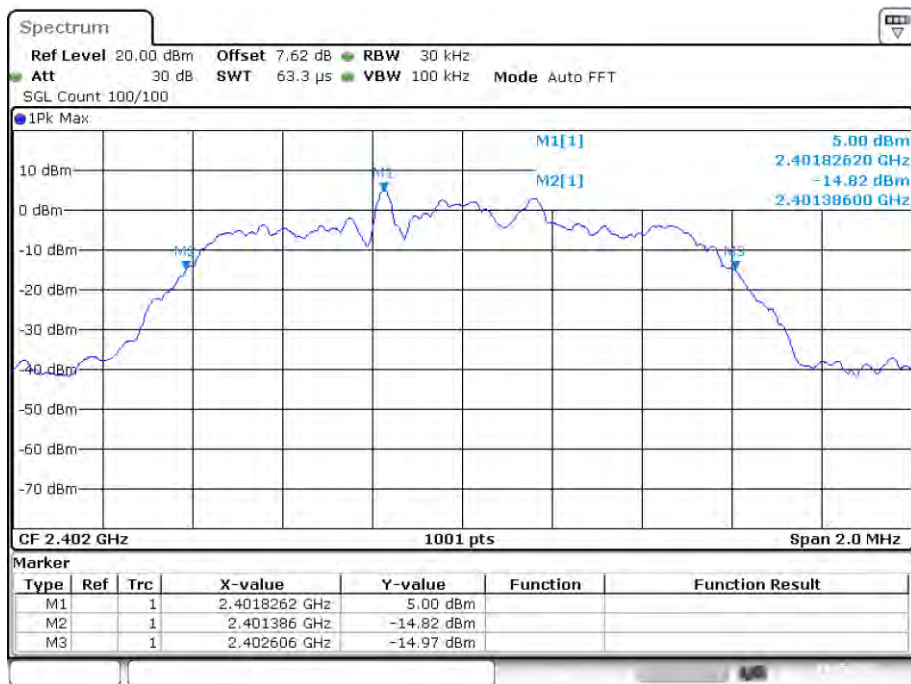


Date: 9.MAY.2022 10:26:11

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

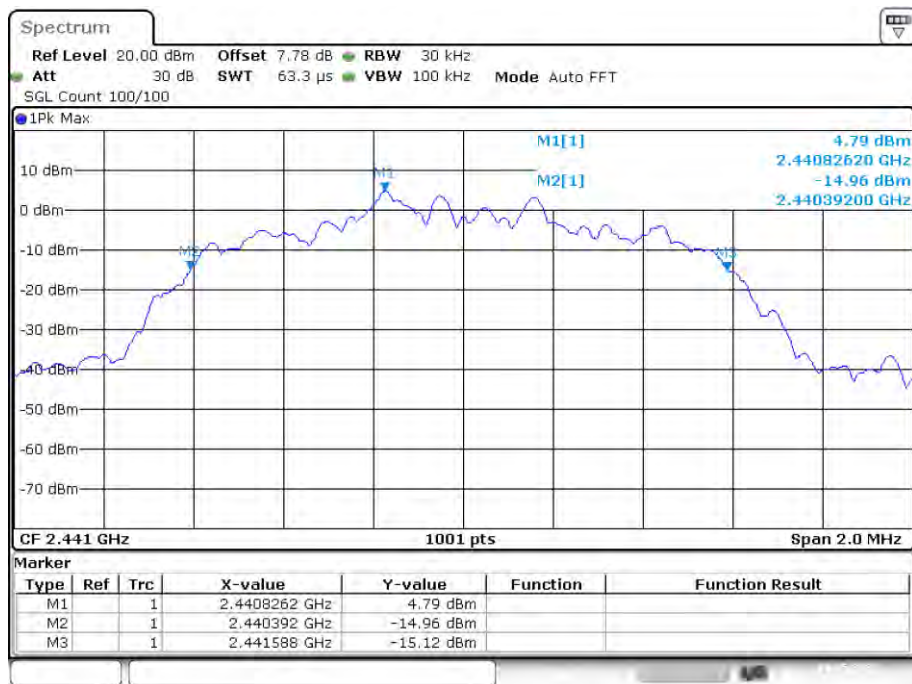


Date: 9.MAY.2022 10:24:09


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

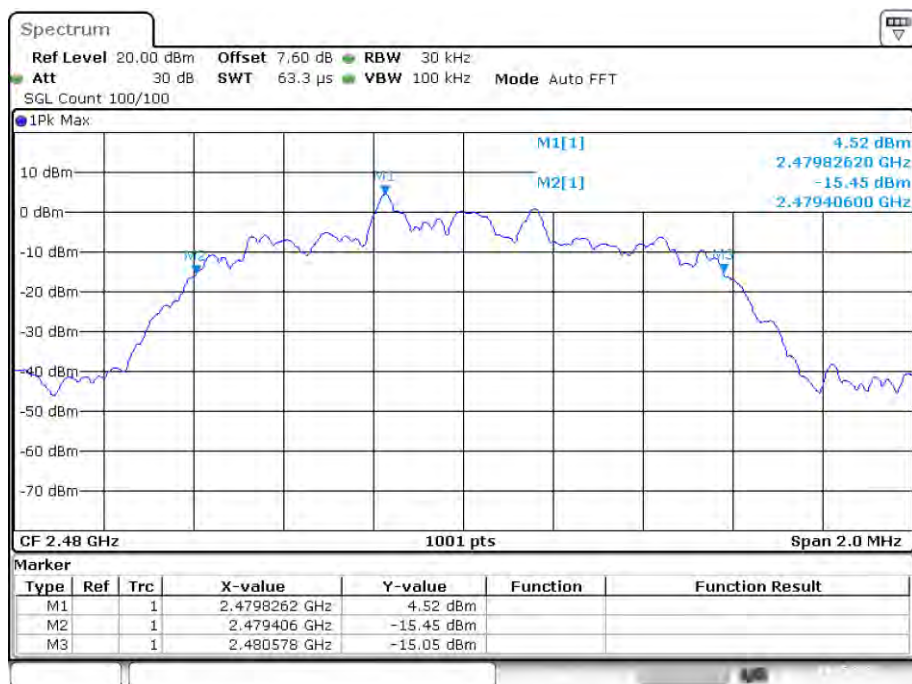

Date: 9.MAY.2022 10:30:18

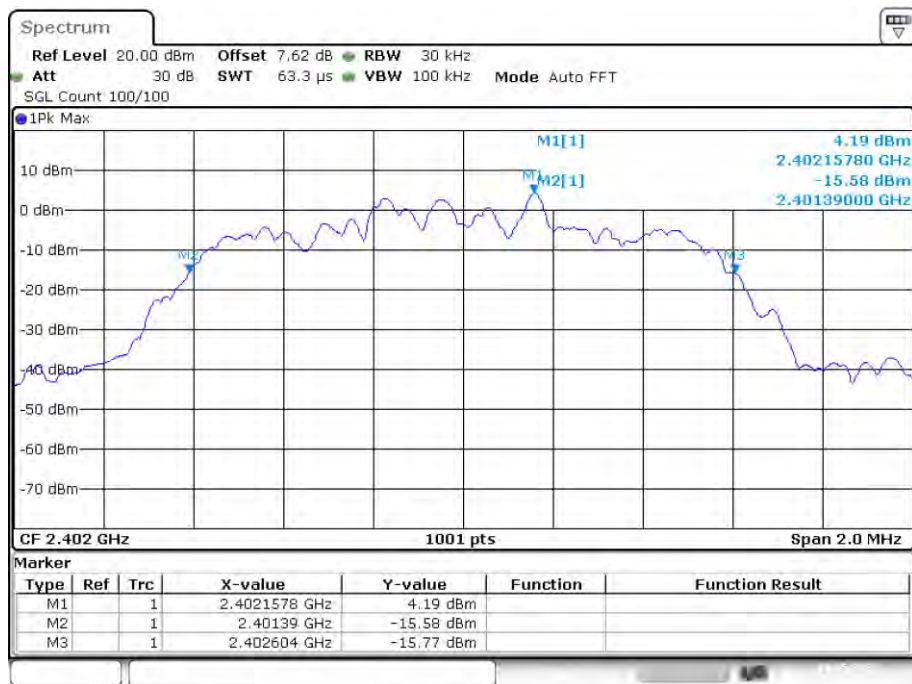
-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

Date: 9.MAY.2022 10:35:19

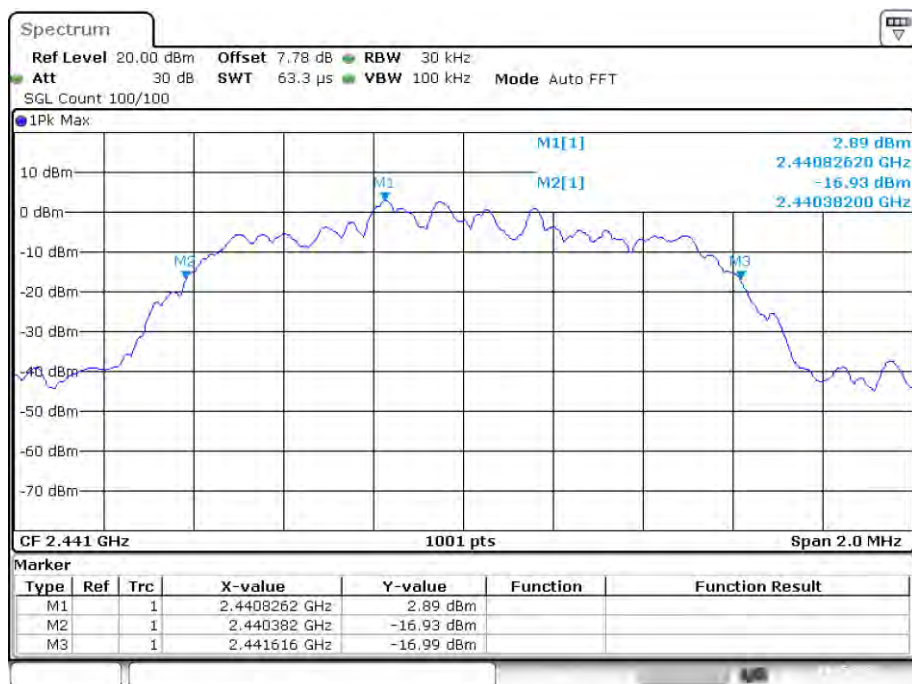
-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

Date: 9.MAY.2022 10:38:05


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

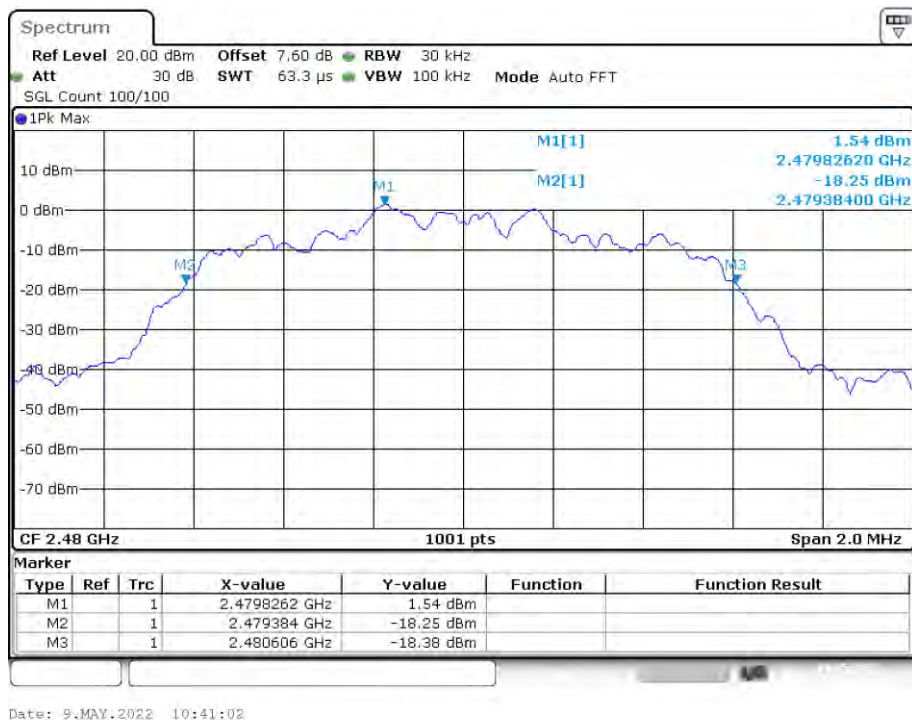

OBW NVNT 1-DH1 2402MHz Ant1

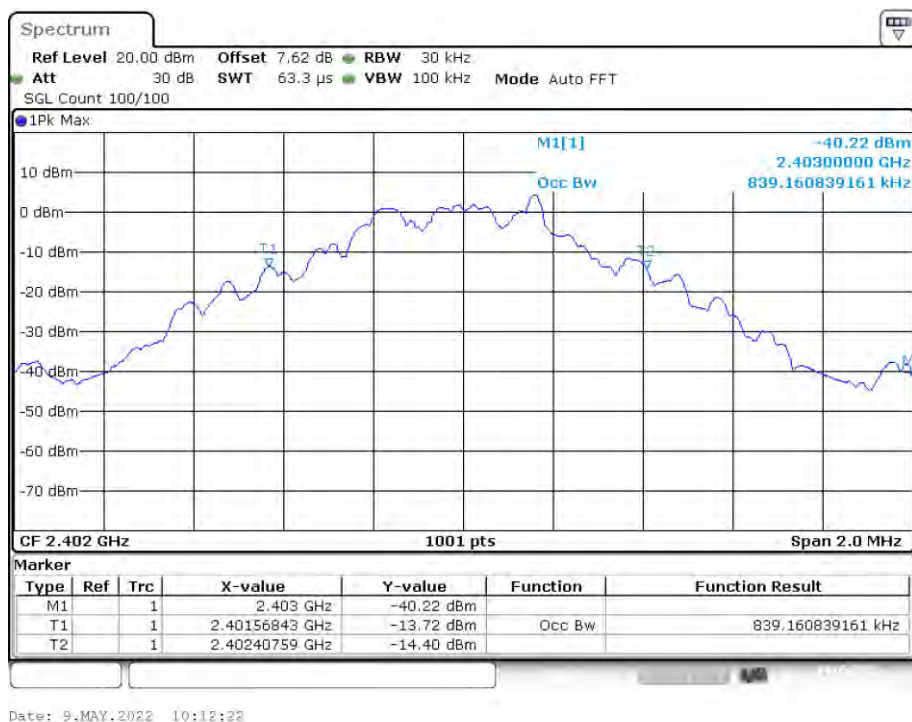


OBW NVNT 1-DH1 2441MHz Ant1

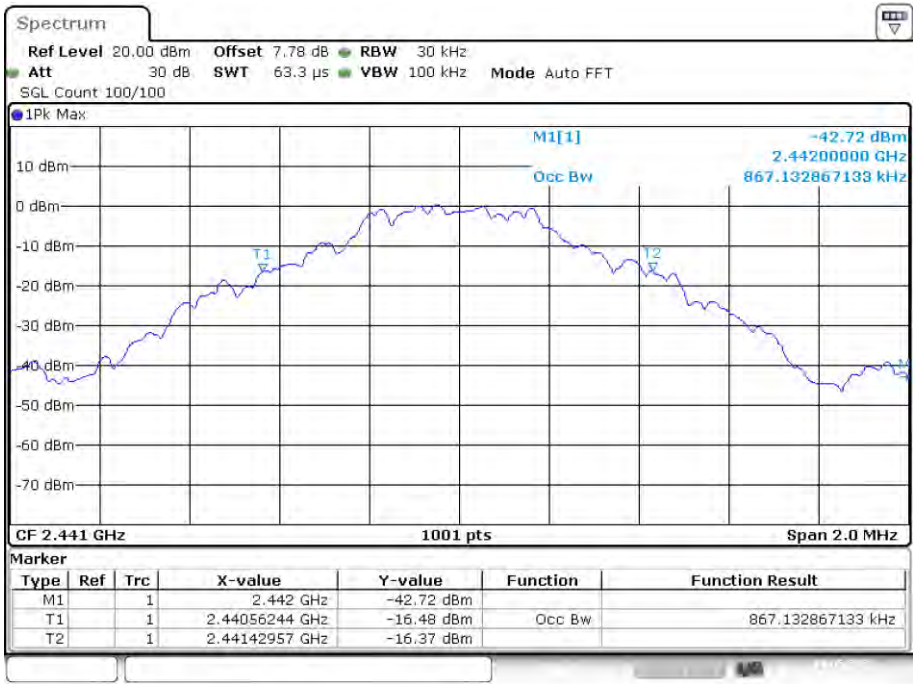


Date: 9.MAY.2022 10:14:27

OBW NVNT 1-DH1 2480MHz Ant1

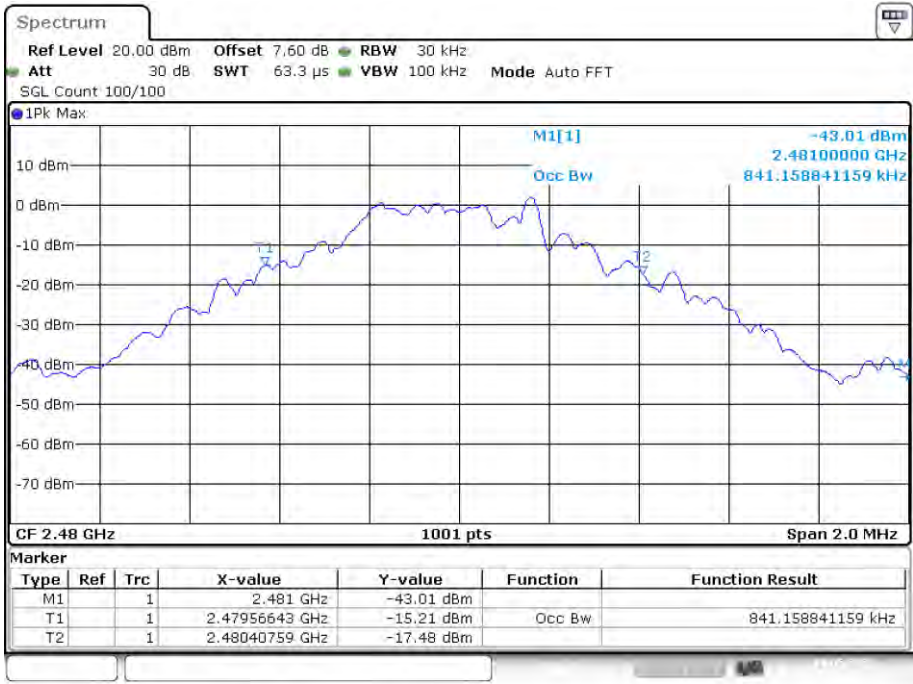


Date: 9.MAY.2022 10:17:24


OBW NVNT 2-DH1 2402MHz Ant1

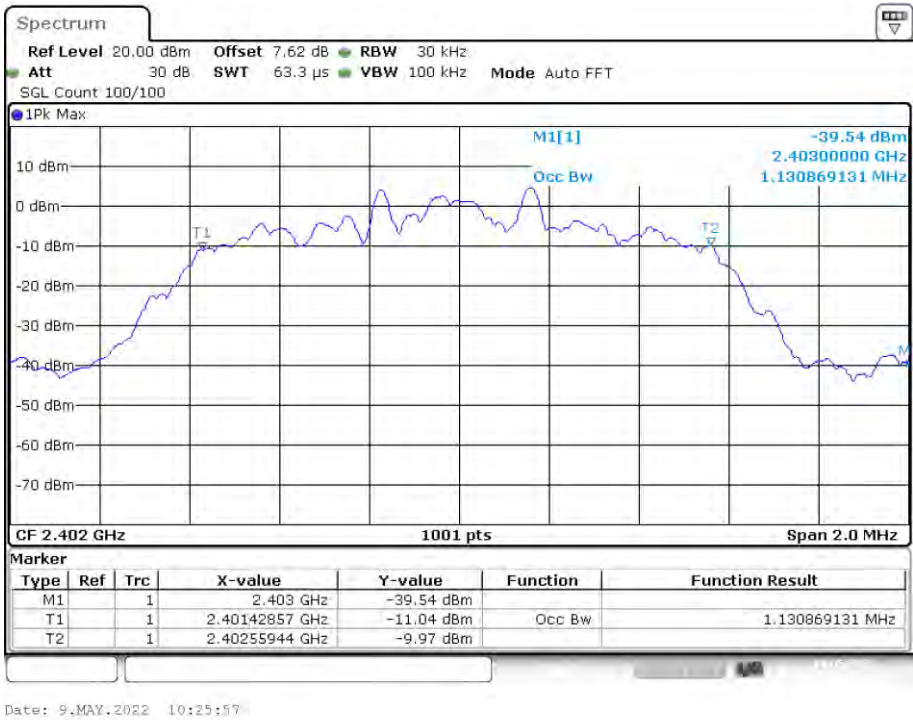


OBW NVNT 2-DH1 2441MHz Ant1

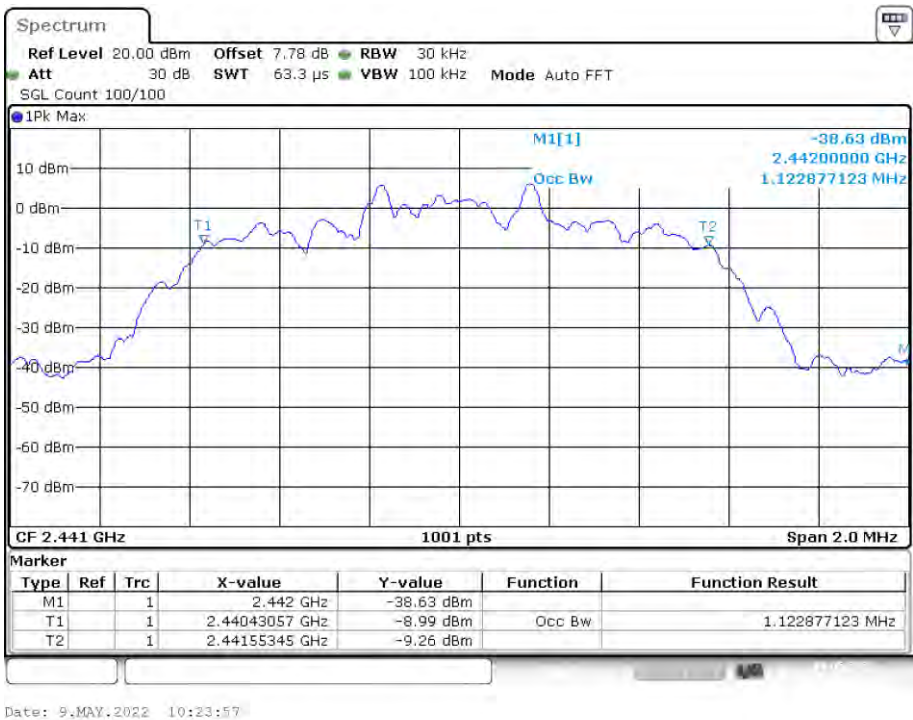


OBW NVNT 2-DH1 2480MHz Ant1

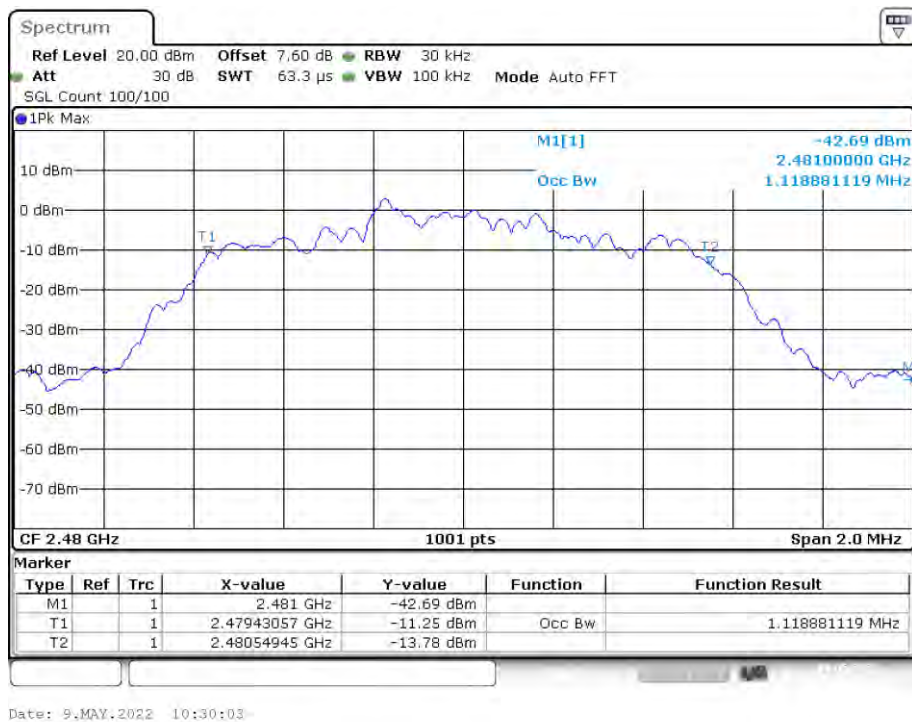


OBW NVNT 3-DH1 2402MHz Ant1

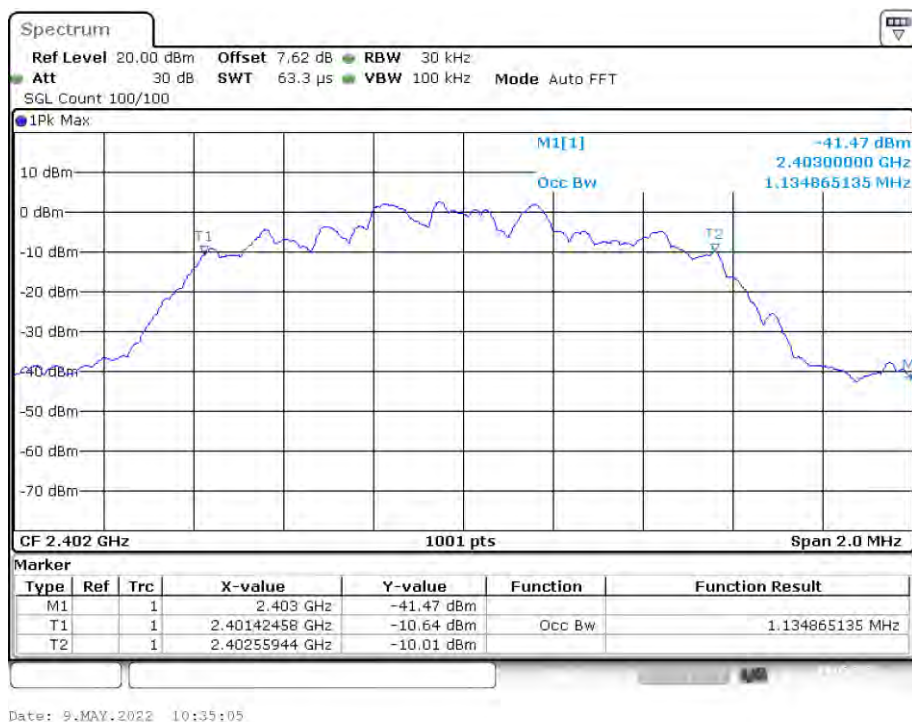

OBW NVNT 3-DH1 2441MHz Ant1

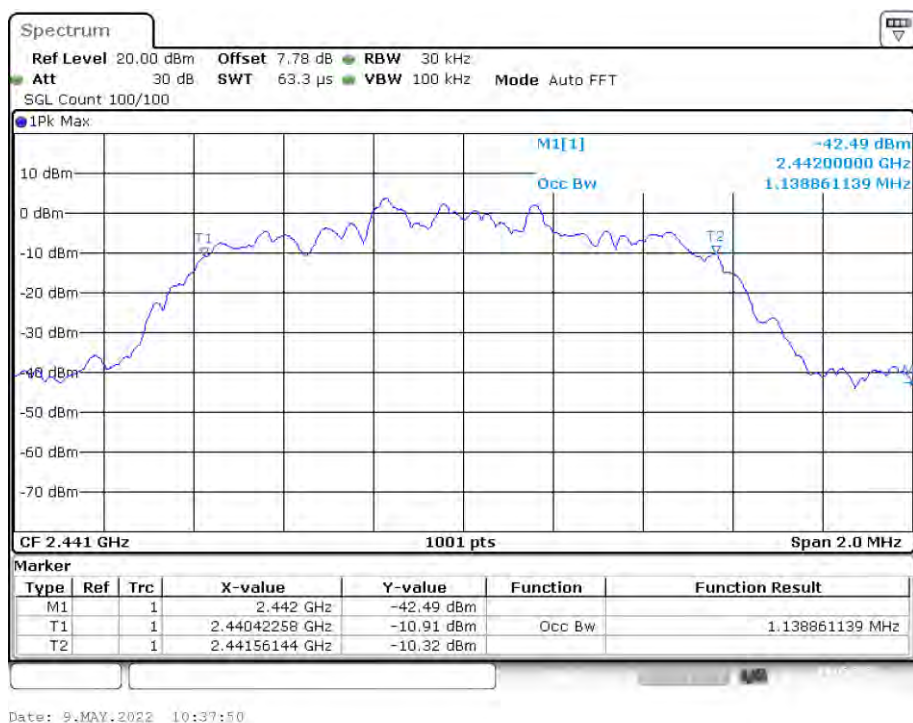

OBW NVNT 3-DH1 2480MHz Ant1

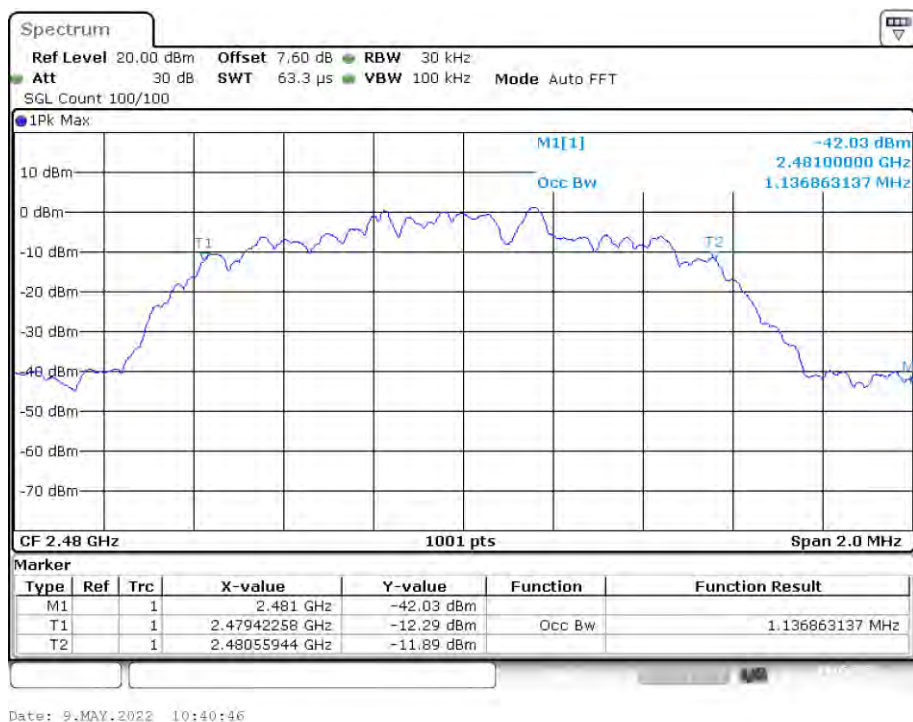

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2440.968	2441.977	1.009	0.025	Pass
NVNT	2-DH1	2440.686	2441.954	1.268	0.025	Pass
NVNT	3-DH1	2441.156	2442.158	1.002	0.025	Pass

CFS NVNT 1-DH1 2441MHz Ant1

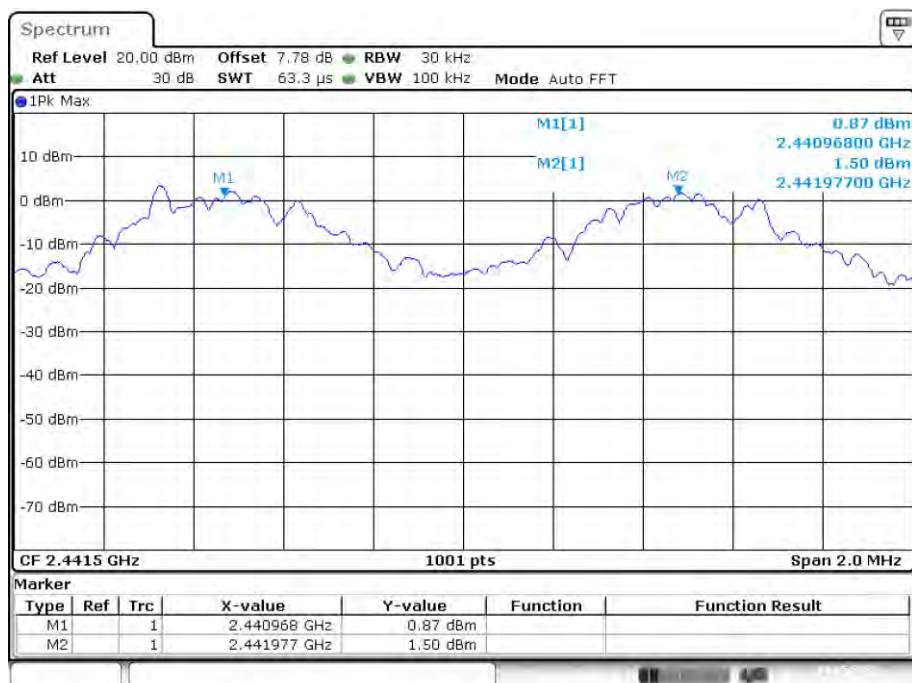


Date: 9.MAY.2022 09:37:08

CFS NVNT 2-DH1 2441MHz Ant1

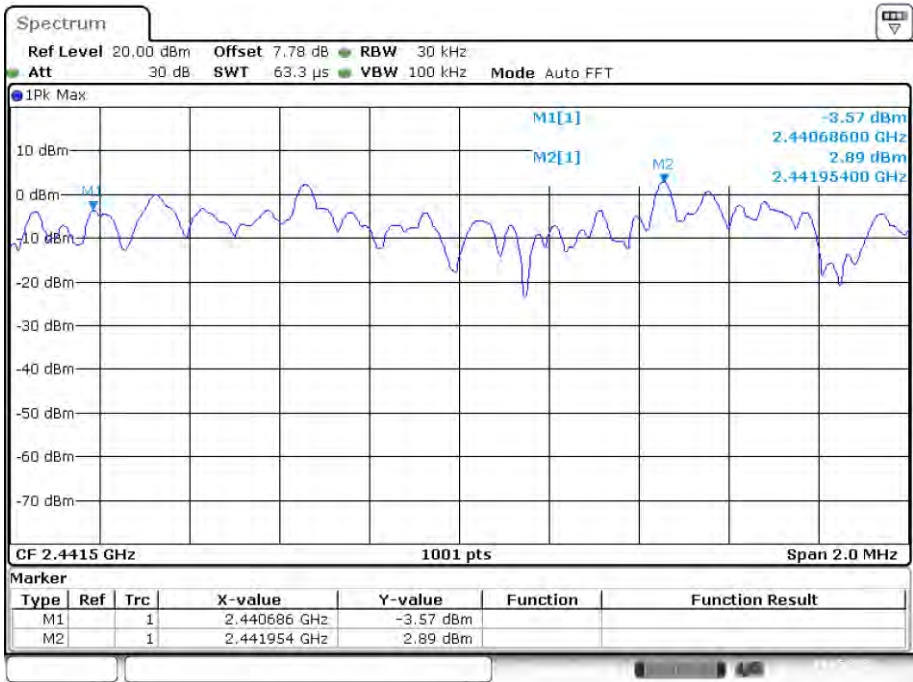

Date: 9.MAY.2022 09:43:23

CFS NVNT 3-DH1 2441MHz Ant1

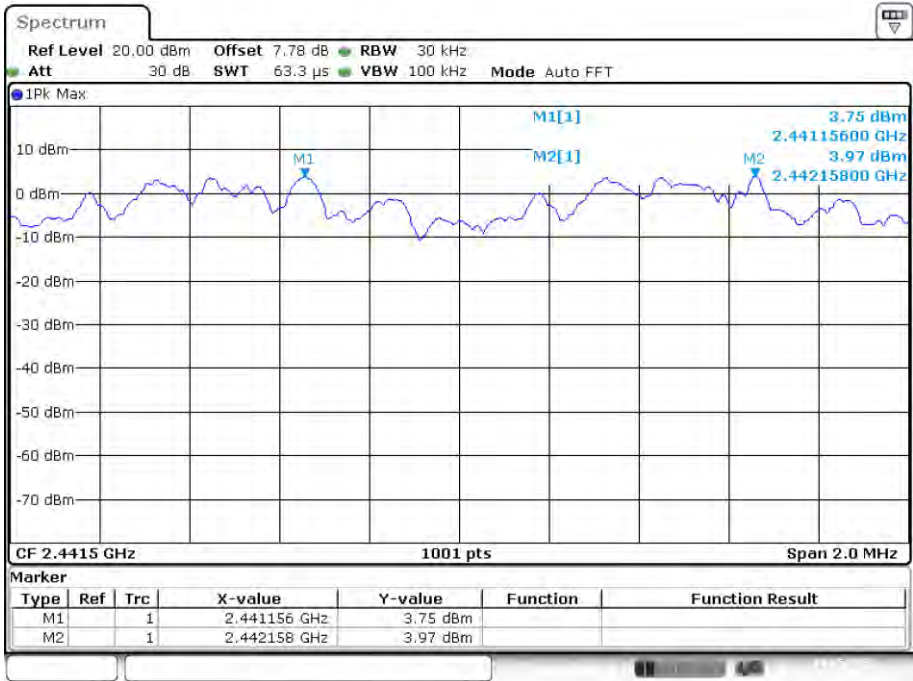

Date: 9.MAY.2022 10:05:36

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

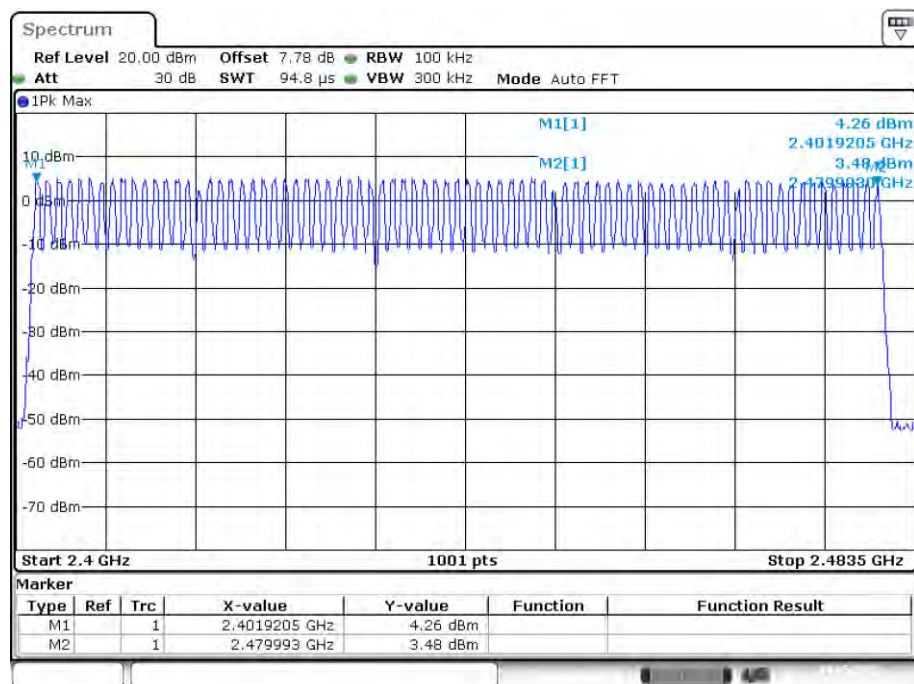


Date: 9.MAY.2022 09:32:23

Hopping No. NVNT 2-DH1 2441MHz Ant1

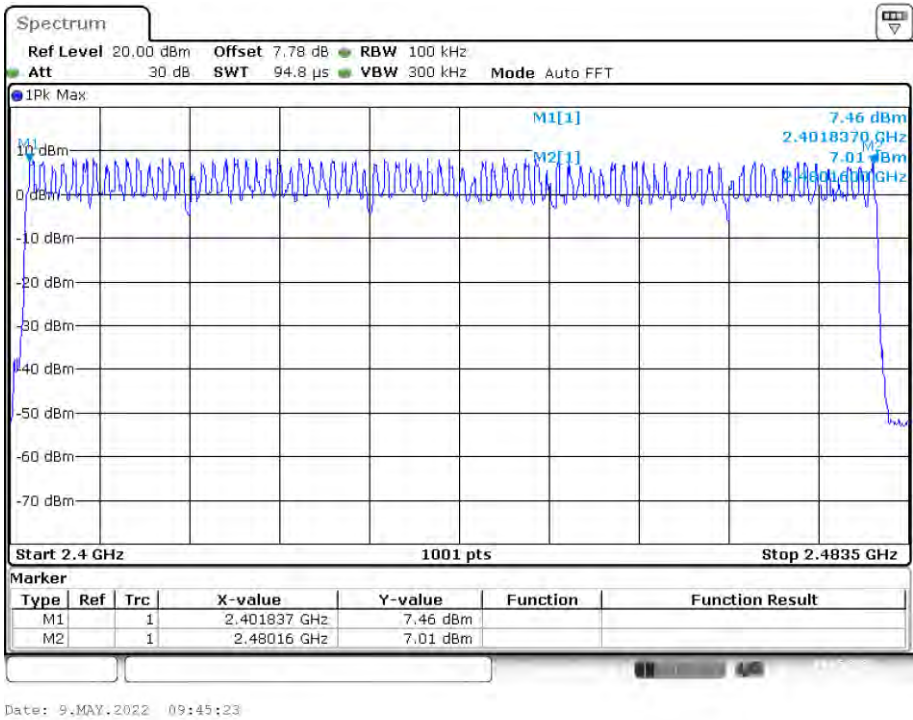

Hopping No. NVNT 3-DH1 2441MHz Ant1

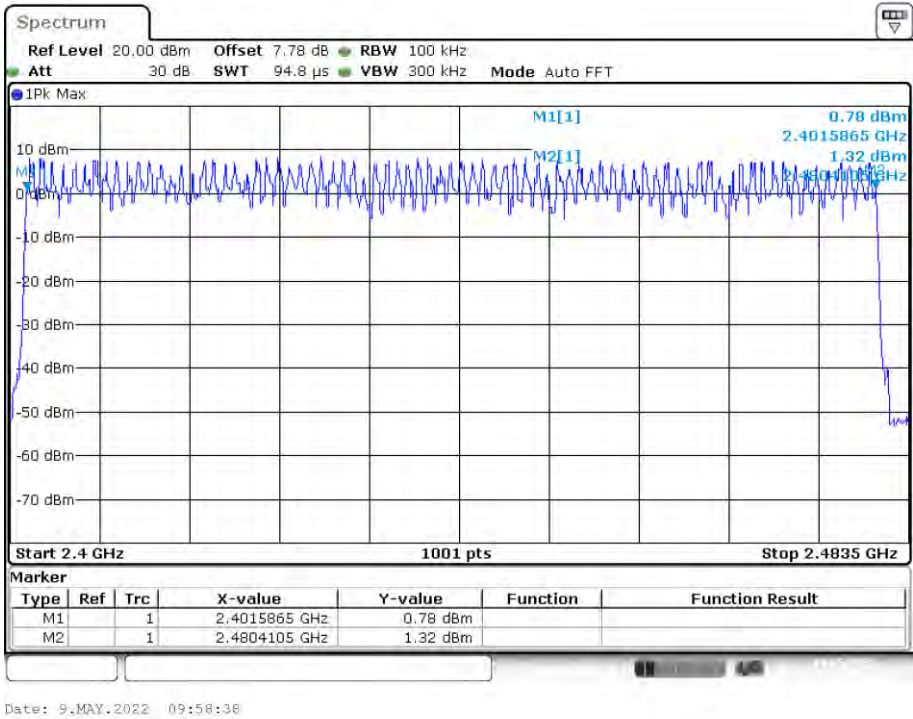

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result


PASS.

Detailed information please see the following page.

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.383	122.177	319	31600	400	Pass
NVNT	1-DH1	2441	Ant1	0.383	122.177	319	31600	400	Pass
NVNT	1-DH1	2480	Ant1	0.383	121.794	318	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.639	240.933	147	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.887	306.022	106	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.392	125.048	319	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.391	122.774	314	31600	400	Pass
NVNT	2-DH1	2480	Ant1	0.392	122.304	312	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.643	254.665	155	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	315.119	109	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.391	123.947	317	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.391	123.947	317	31600	400	Pass
NVNT	3-DH1	2480	Ant1	0.391	122.774	314	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.642	259.436	158	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.893	326.909	113	31600	400	Pass


Note: Total Dwell Time= Pulse Time*Burst Count

Dwell NVNT 1-DH1 2402MHz Ant1 One Burst

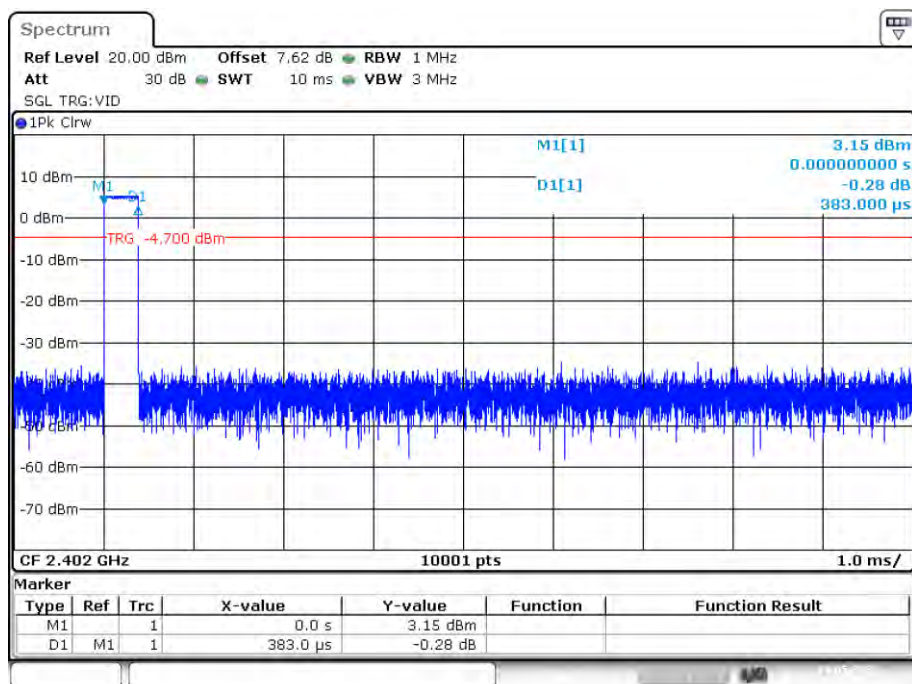


Date: 9.MAY.2022 09:25:41

Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated

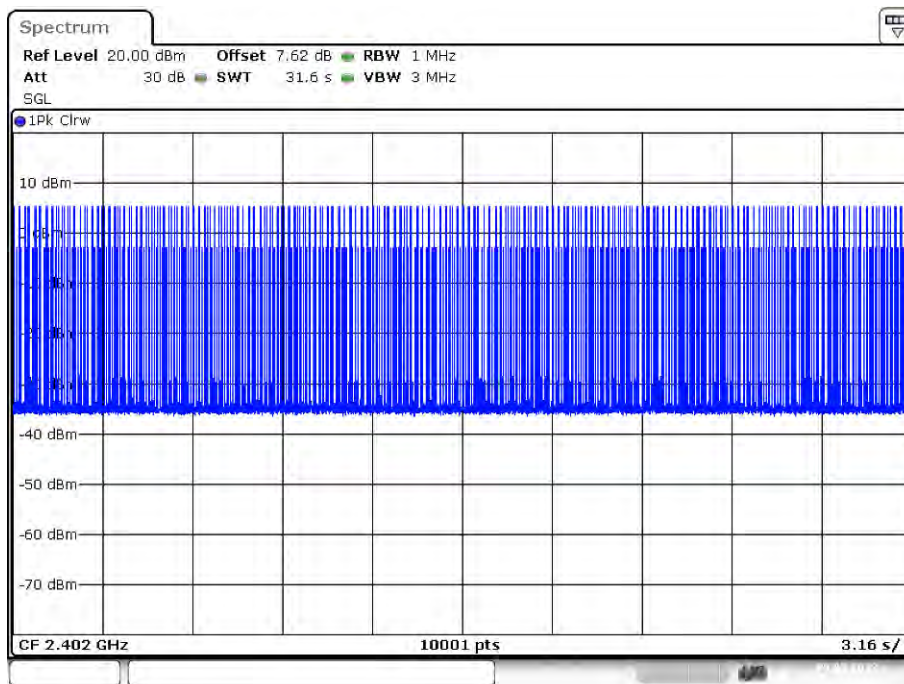


Date: 9.MAY.2022 09:26:15

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

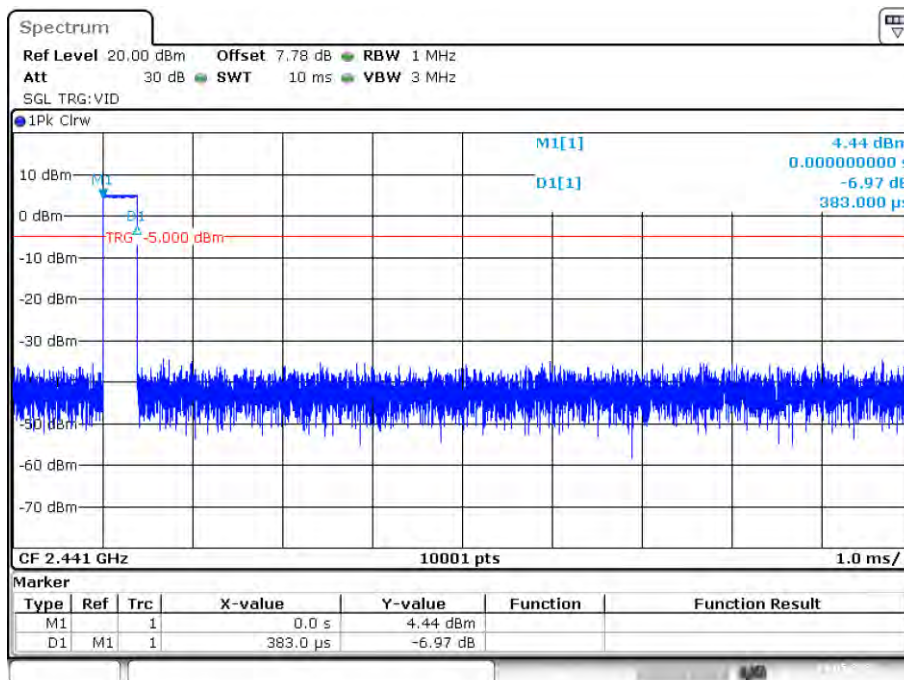


Date: 9.MAY.2022 09:32:31

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

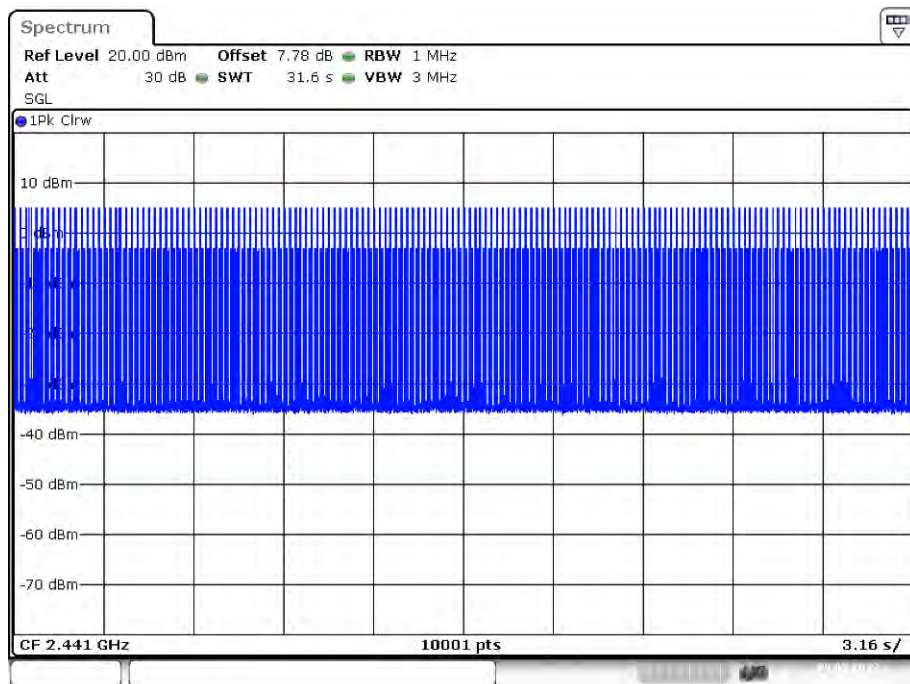


Date: 9.MAY.2022 09:33:05

Dwell NVNT 1-DH1 2480MHz Ant1 One Burst

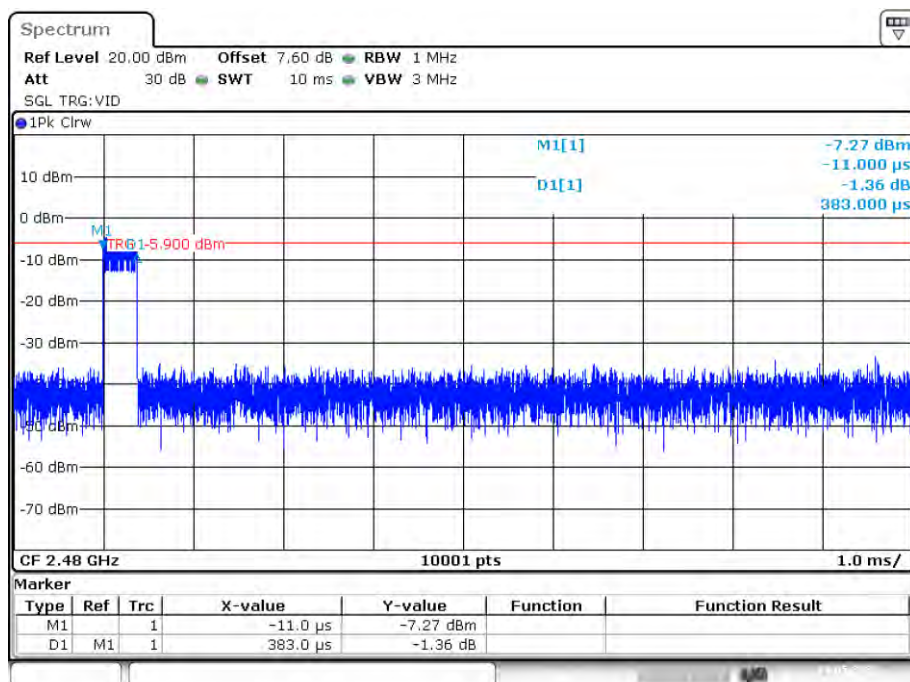


Date: 9.MAY.2022 09:33:51


Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated

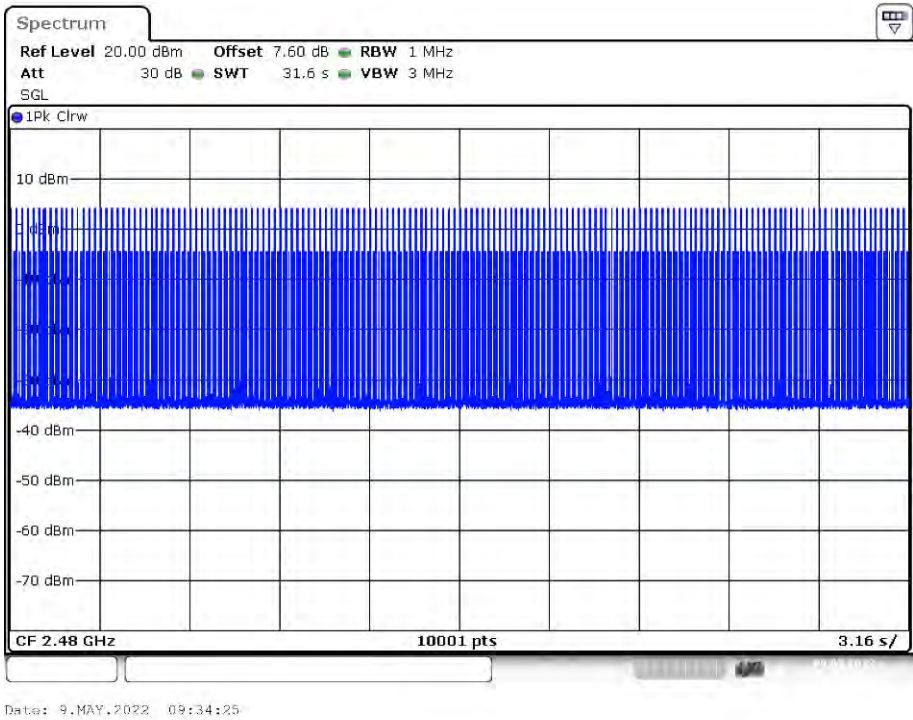


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

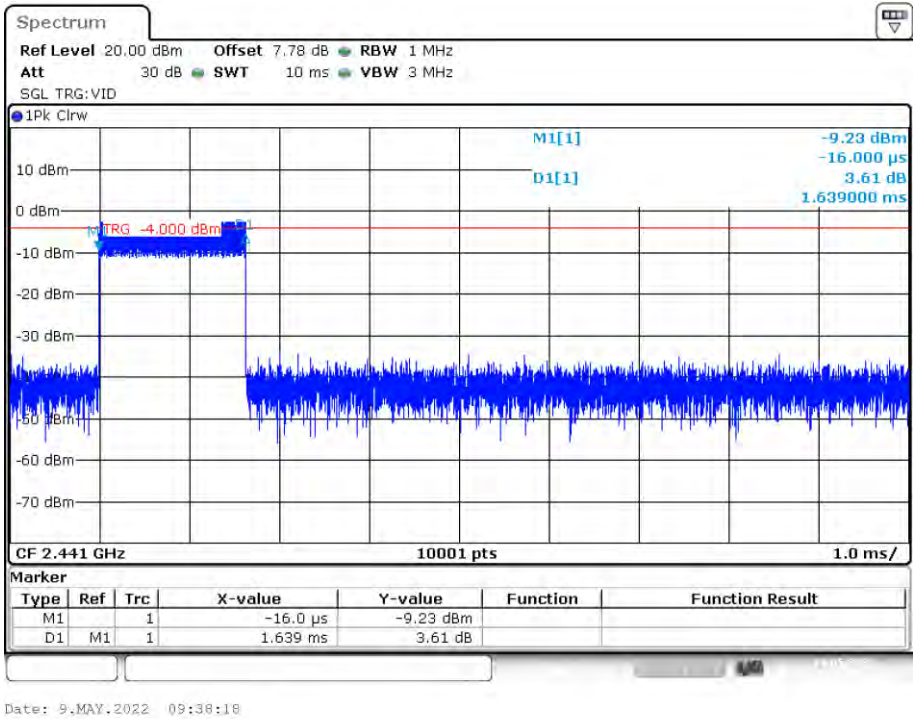


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

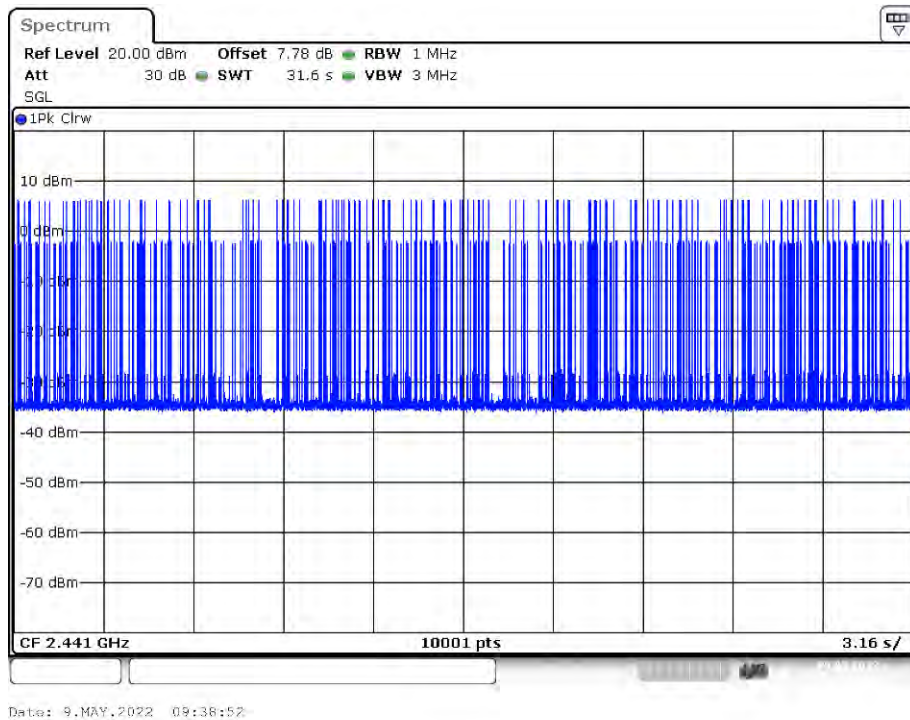


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

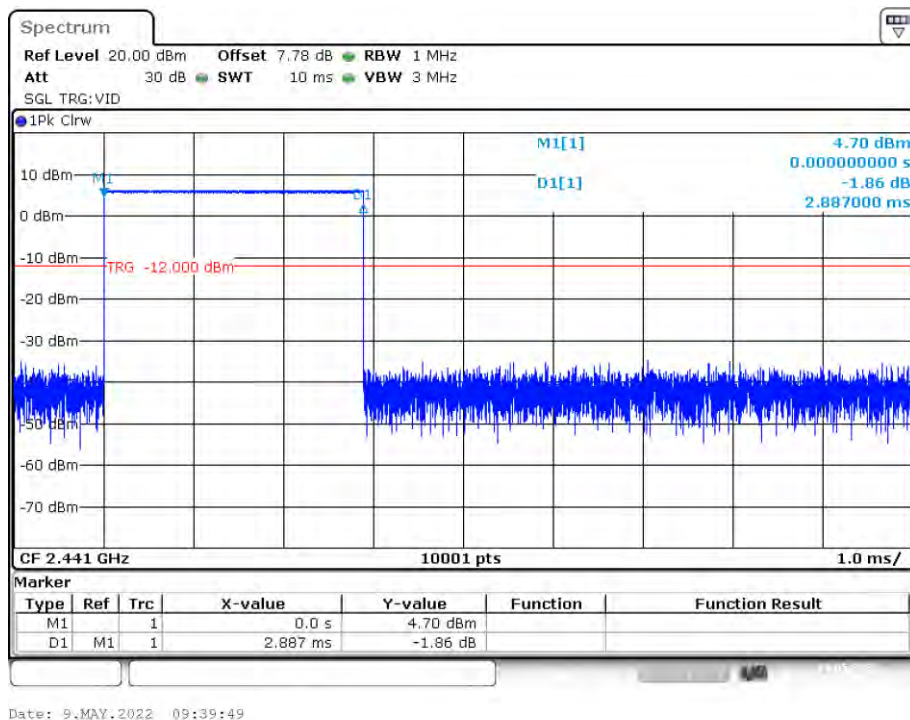


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

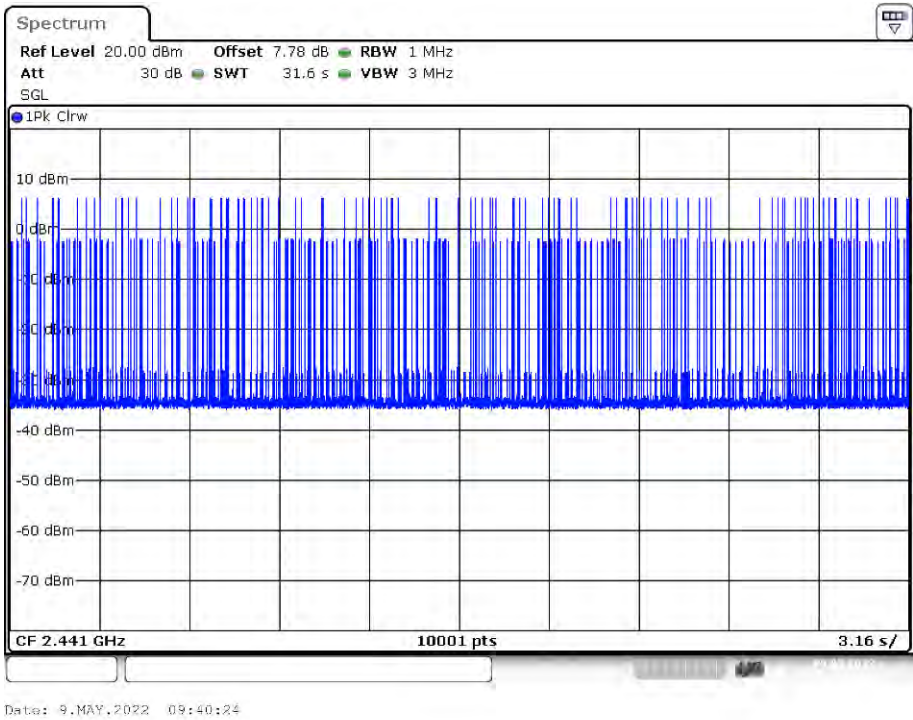


Dwell NVNT 2-DH1 2402MHz Ant1 One Burst

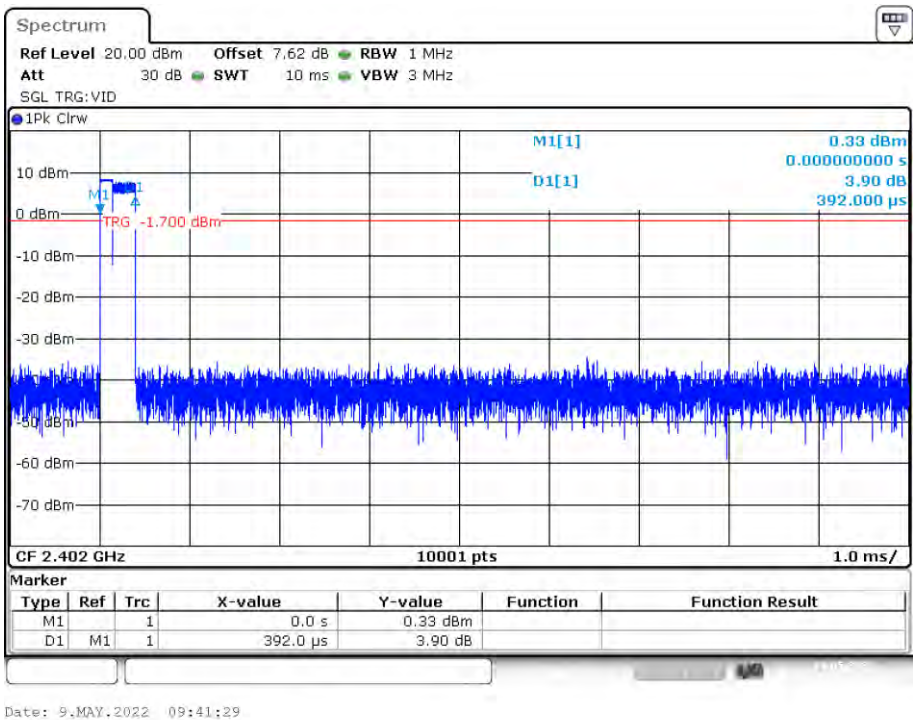


Dwell NVNT 2-DH1 2402MHz Ant1 Accumulated

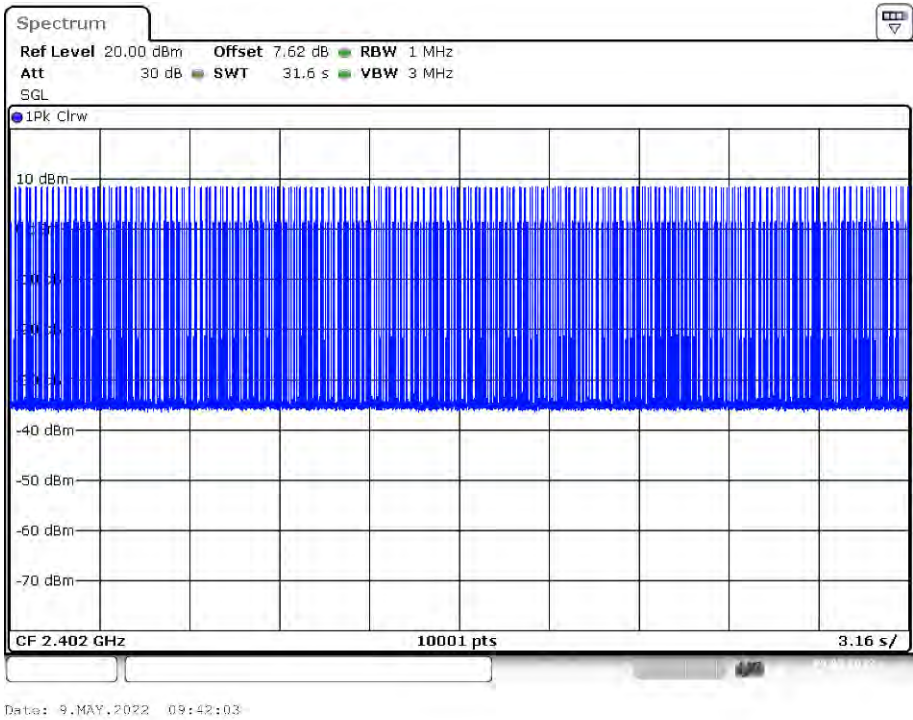

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

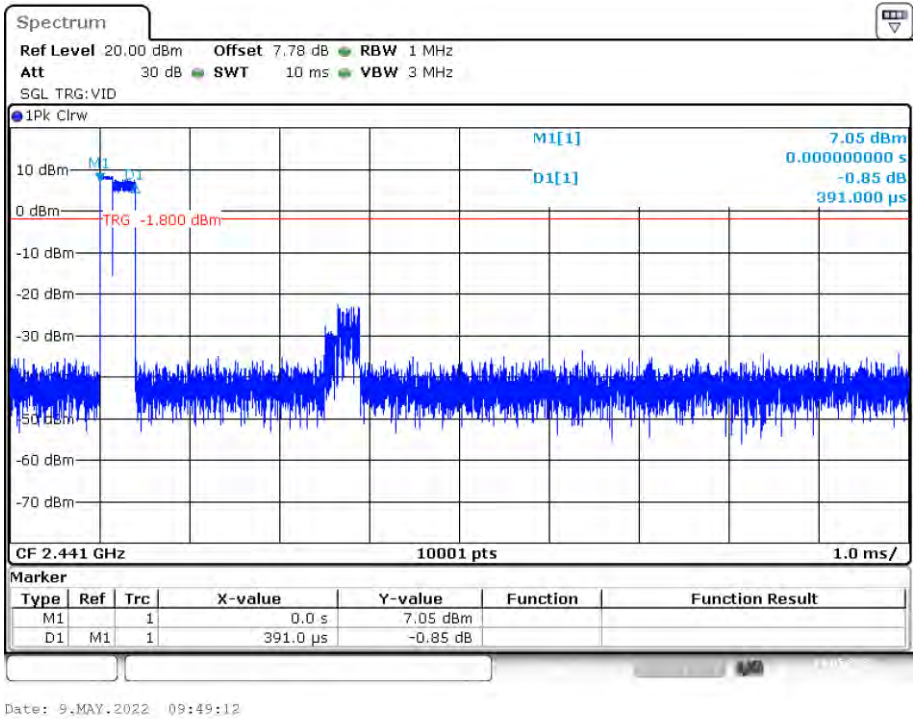


Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

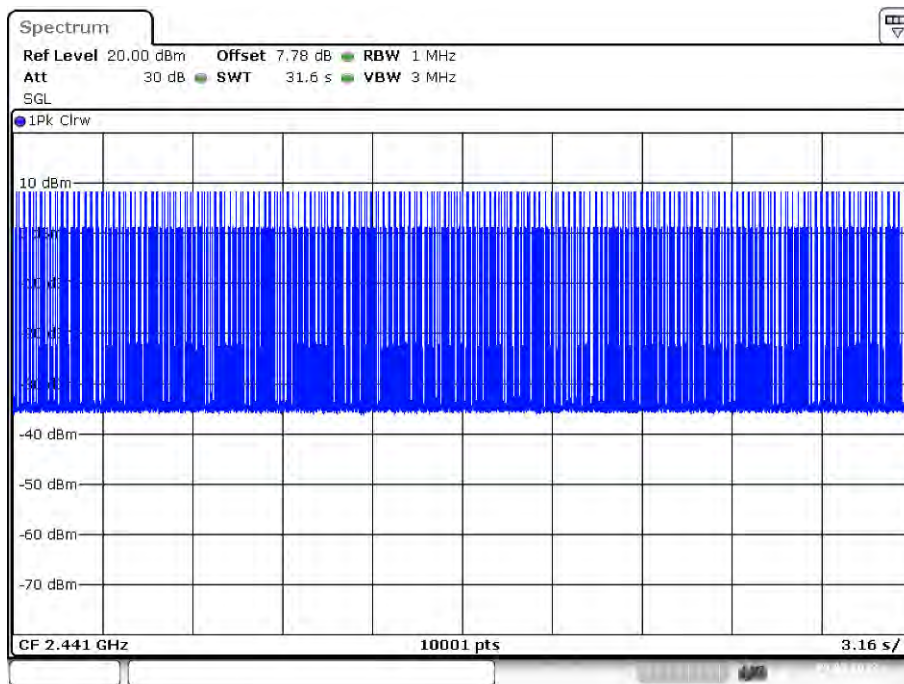


Date: 9.MAY.2022 09:49:46

Dwell NVNT 2-DH1 2480MHz Ant1 One Burst

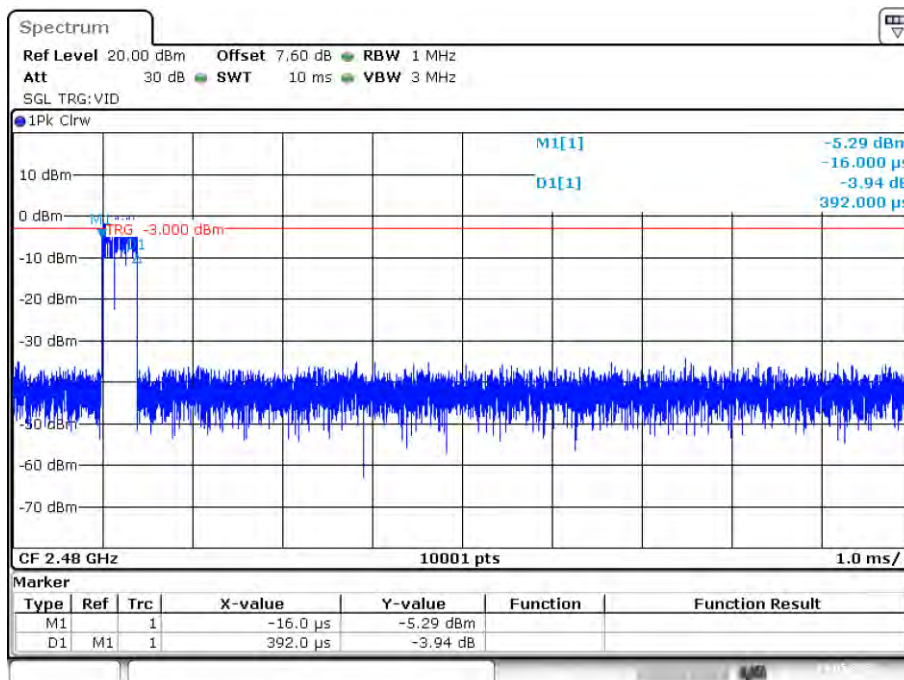


Date: 9.MAY.2022 09:46:57


Dwell NVNT 2-DH1 2480MHz Ant1 Accumulated

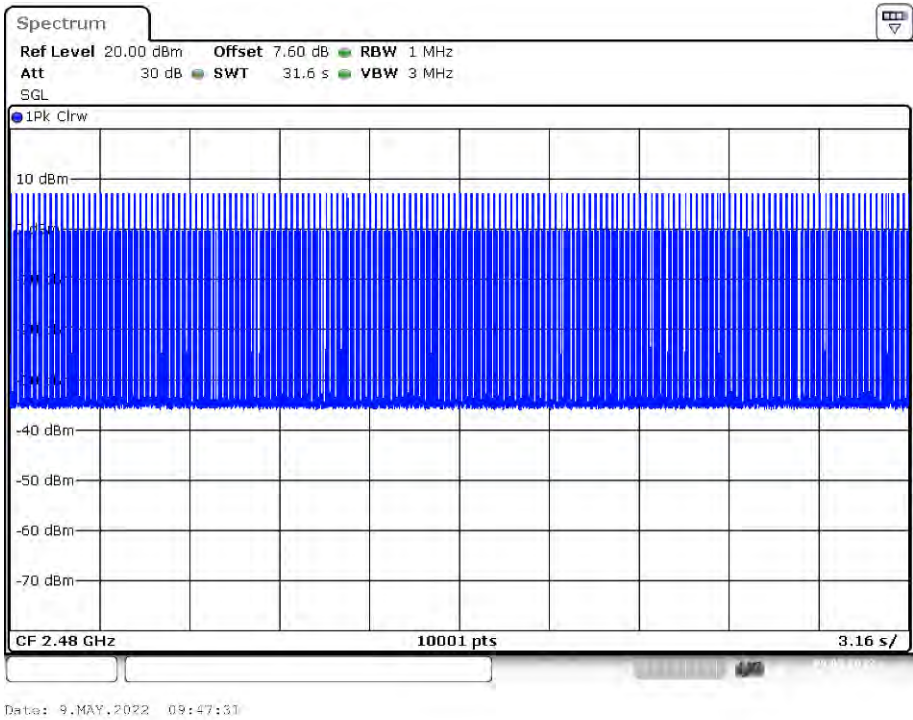

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

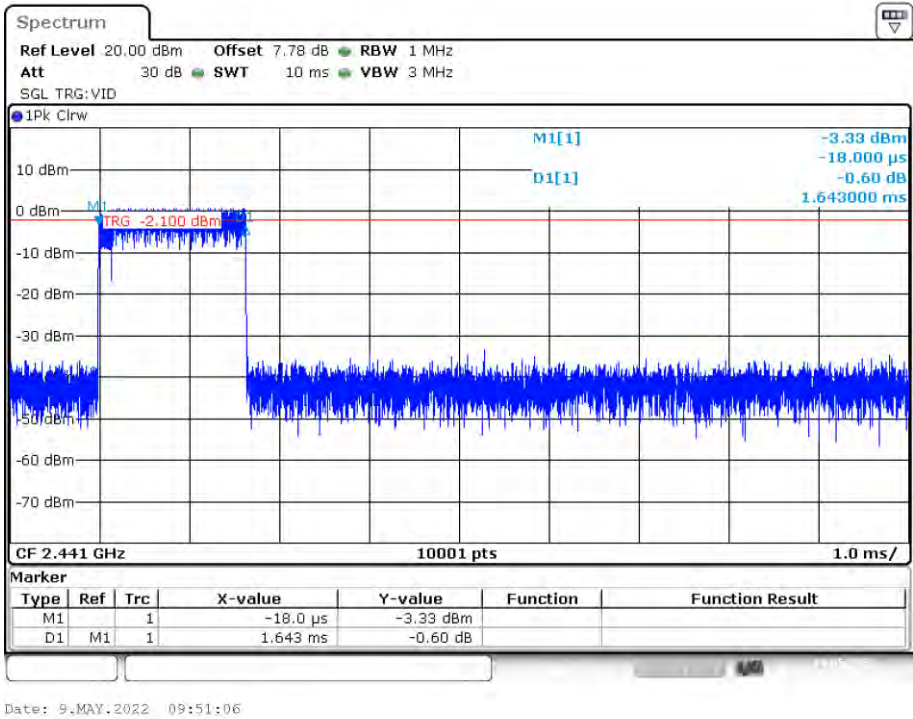


Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

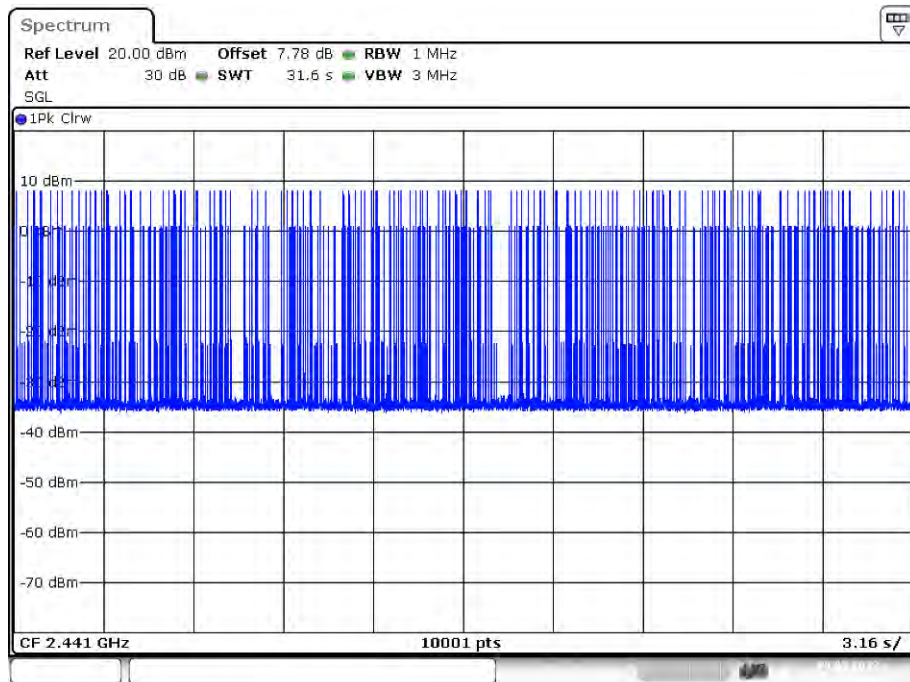


Date: 9.MAY.2022 09:51:40

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

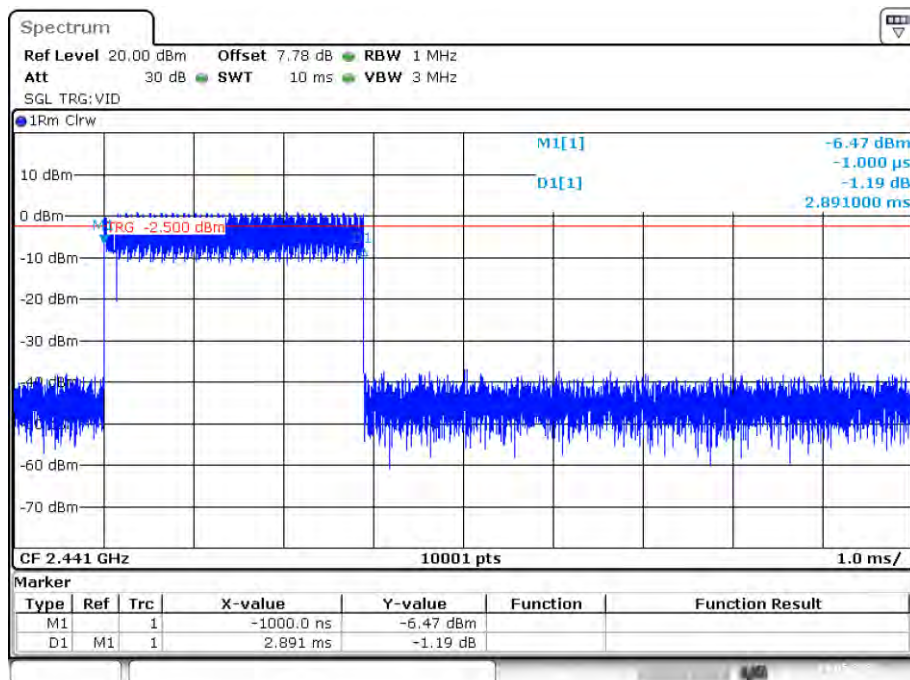


Date: 9.MAY.2022 09:52:31


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

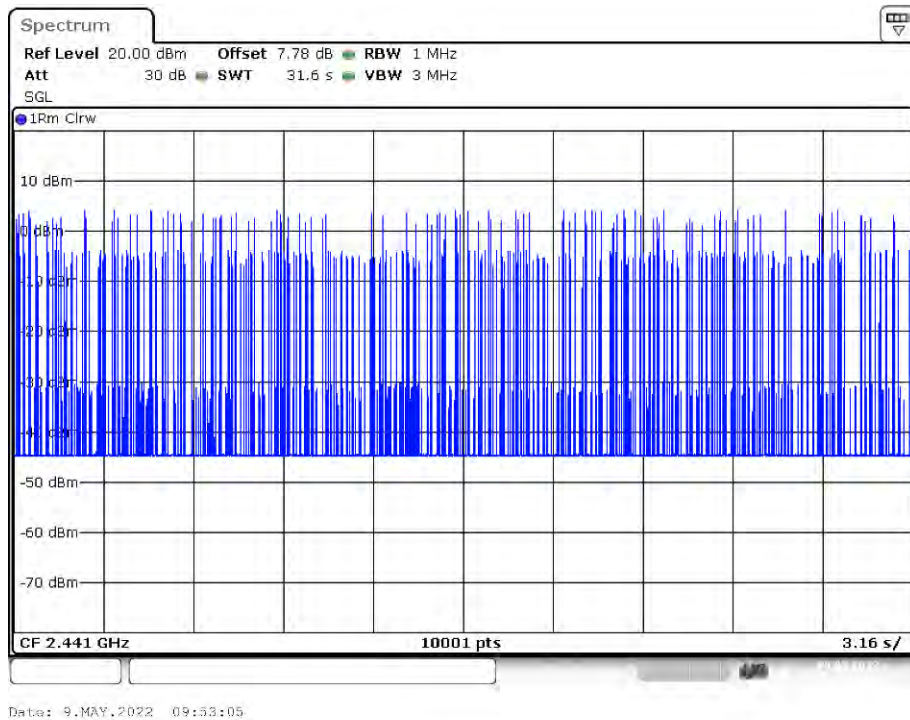

Dwell NVNT 3-DH1 2402MHz Ant1 One Burst

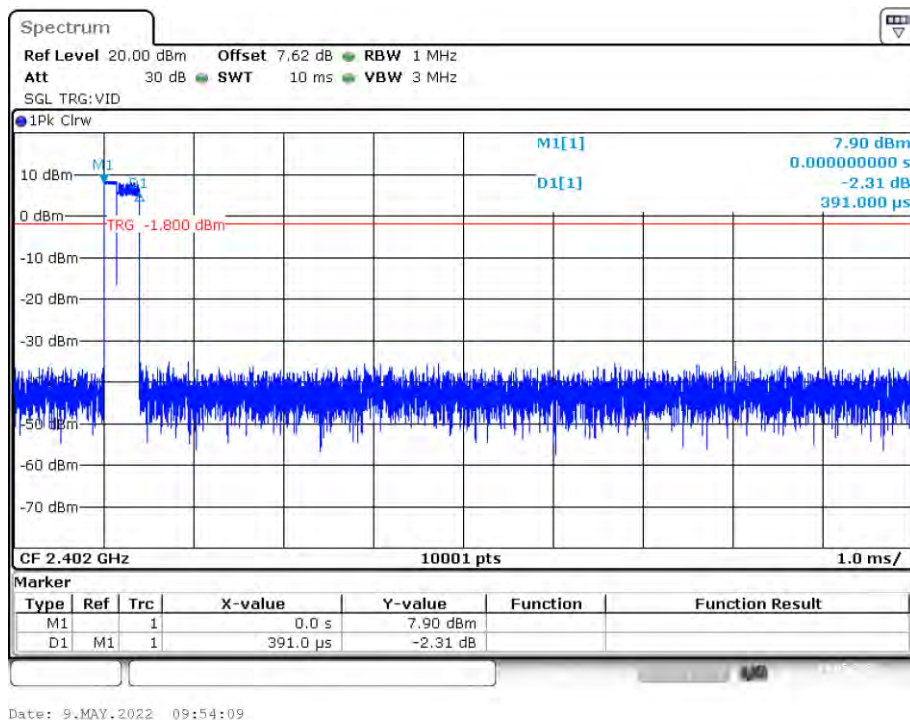


Dwell NVNT 3-DH1 2402MHz Ant1 Accumulated

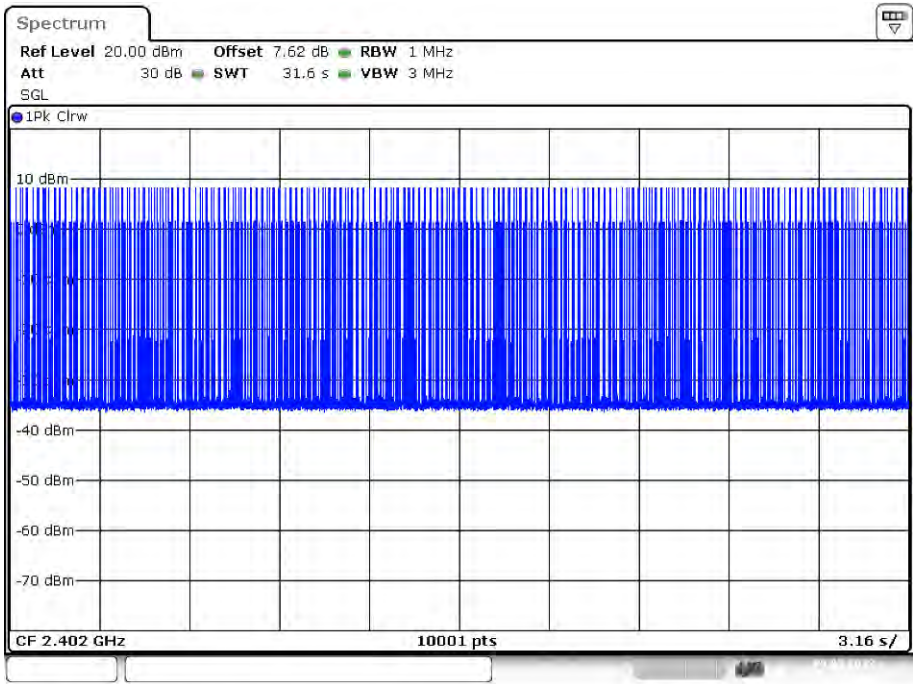


Date: 9.MAY.2022 09:54:44

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

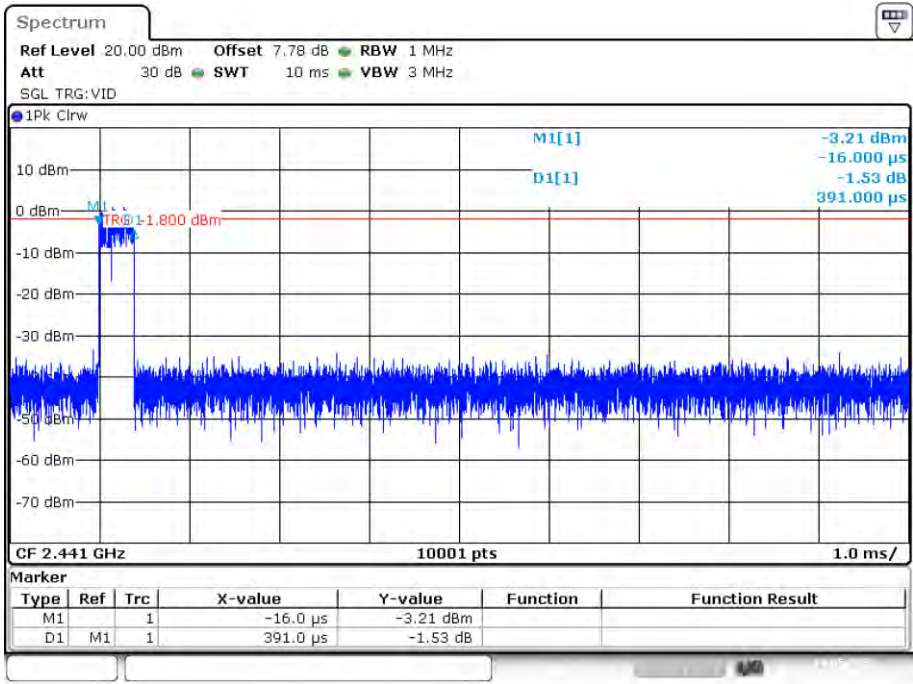


Date: 9.MAY.2022 09:58:49


Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

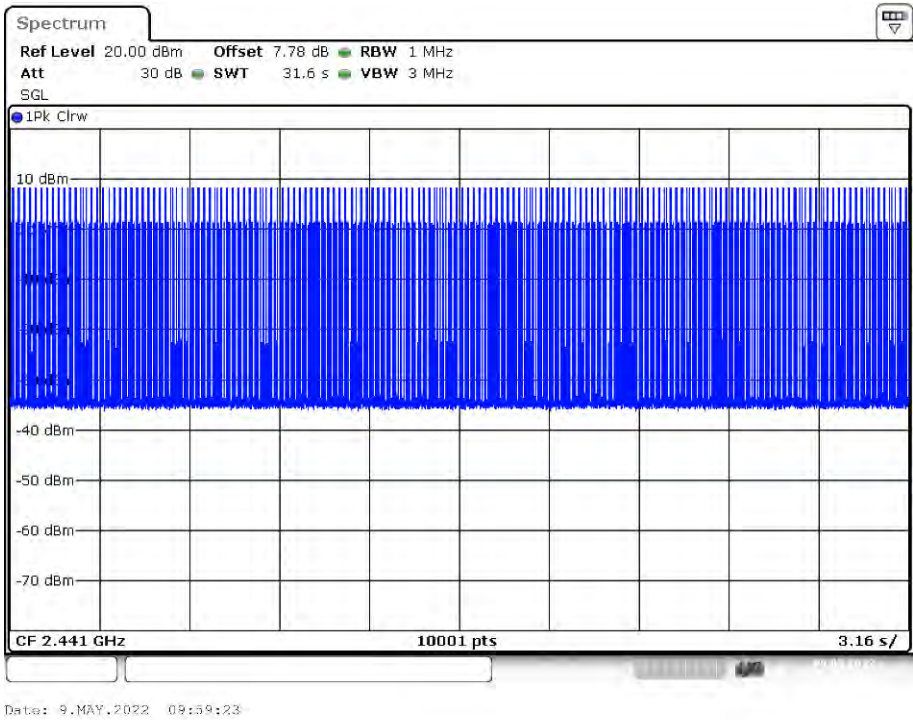

Dwell NVNT 3-DH1 2480MHz Ant1 One Burst

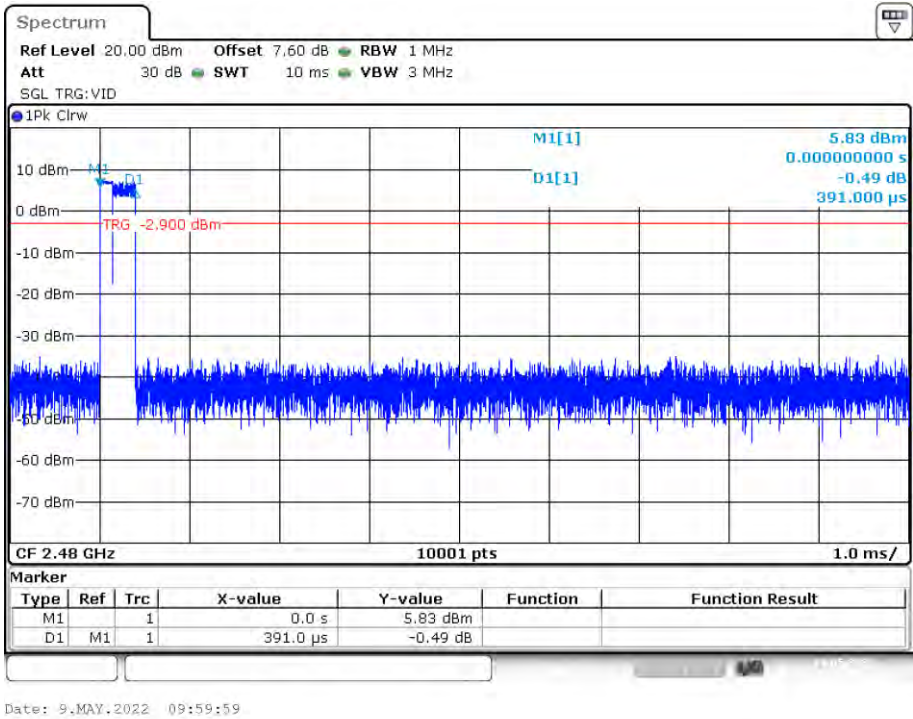


Dwell NVNT 3-DH1 2480MHz Ant1 Accumulated

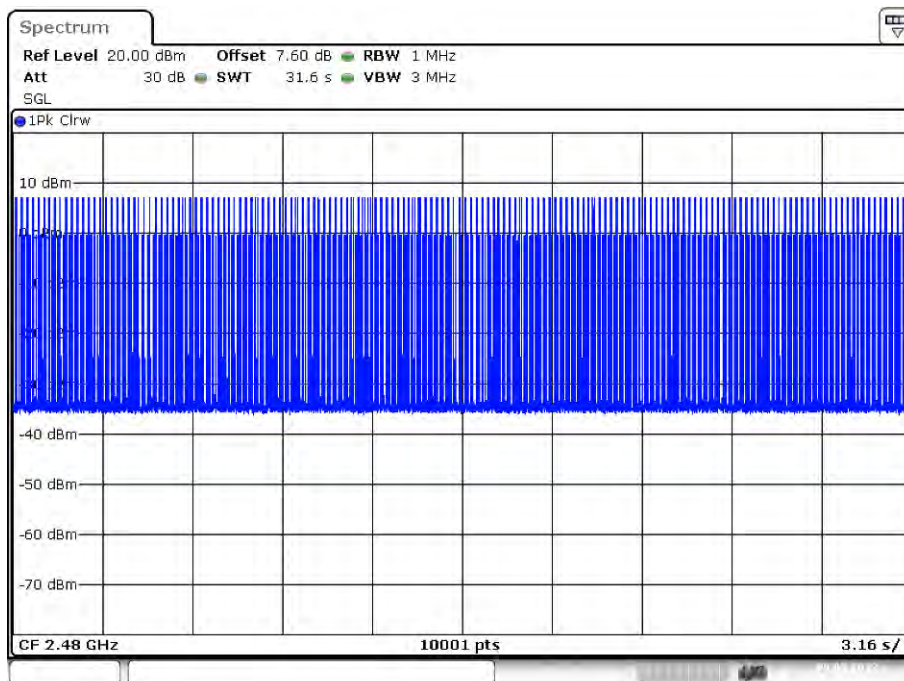


Date: 9.MAY.2022 10:00:33

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

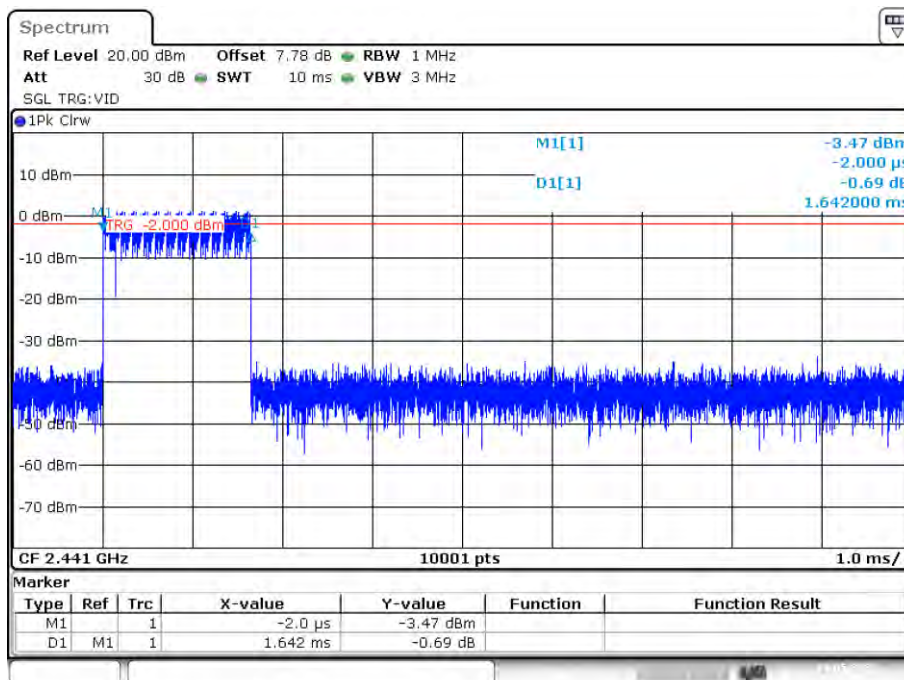


Date: 9.MAY.2022 10:07:03


Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

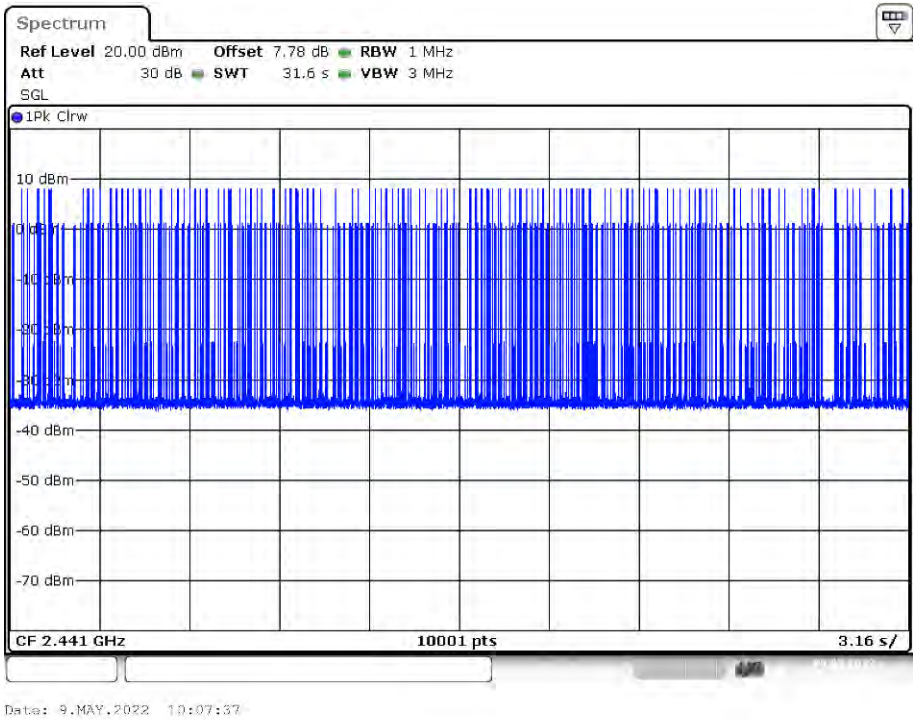

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

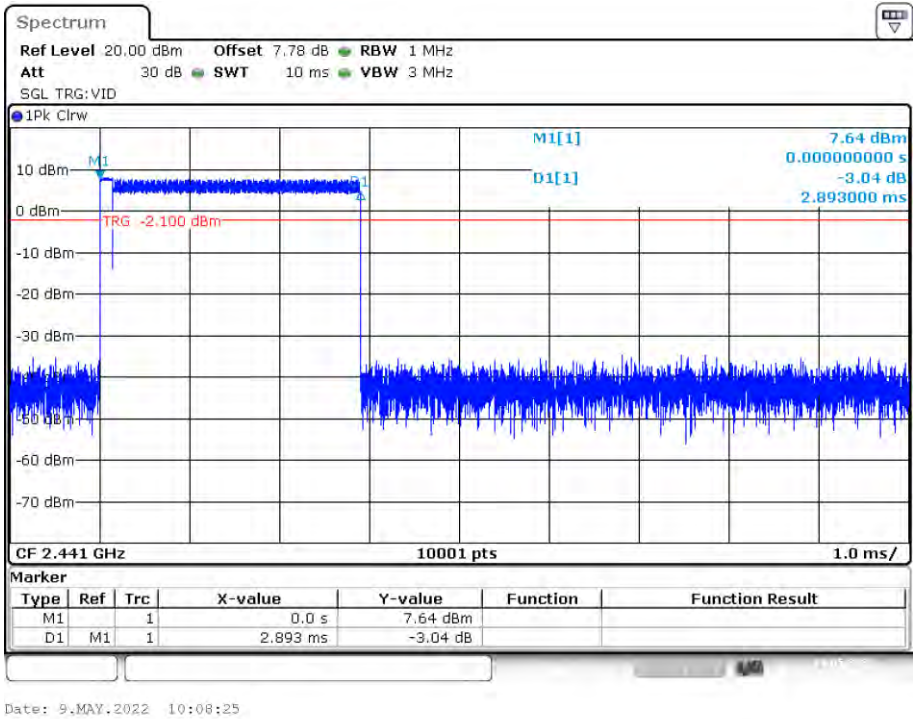

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

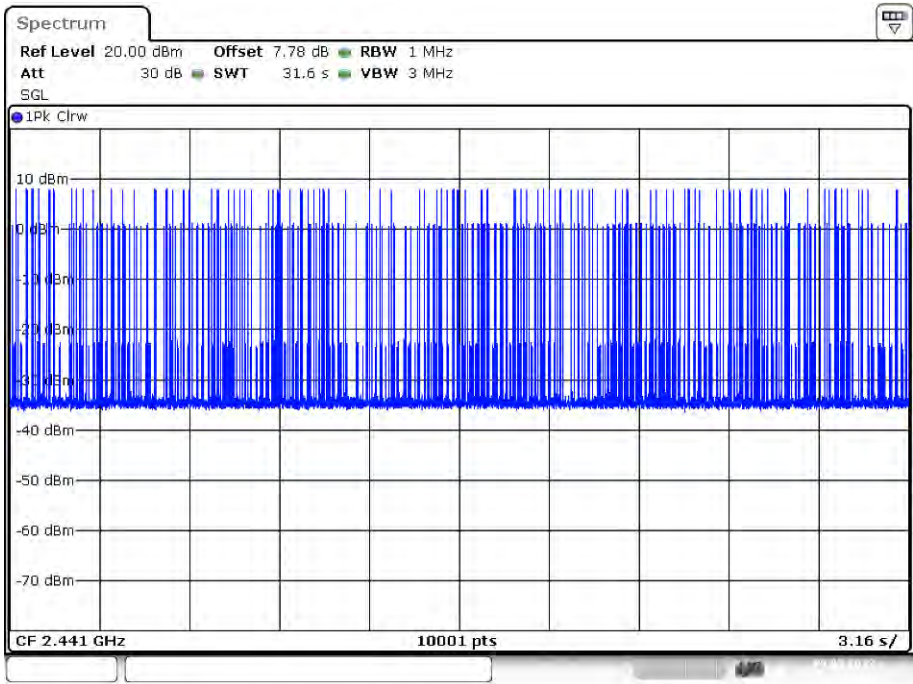

Date: 9.MAY.2022 10:08:59

8. Radiated Emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Note: The peak limit is 20 dB higher than the average limit

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

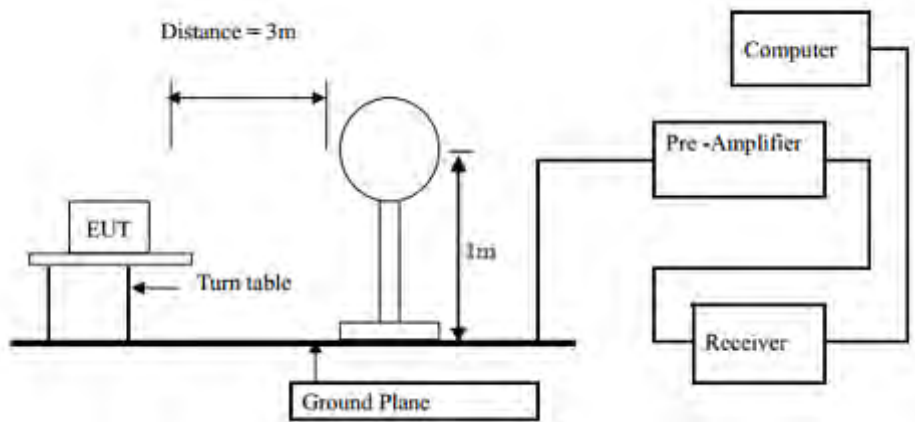

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

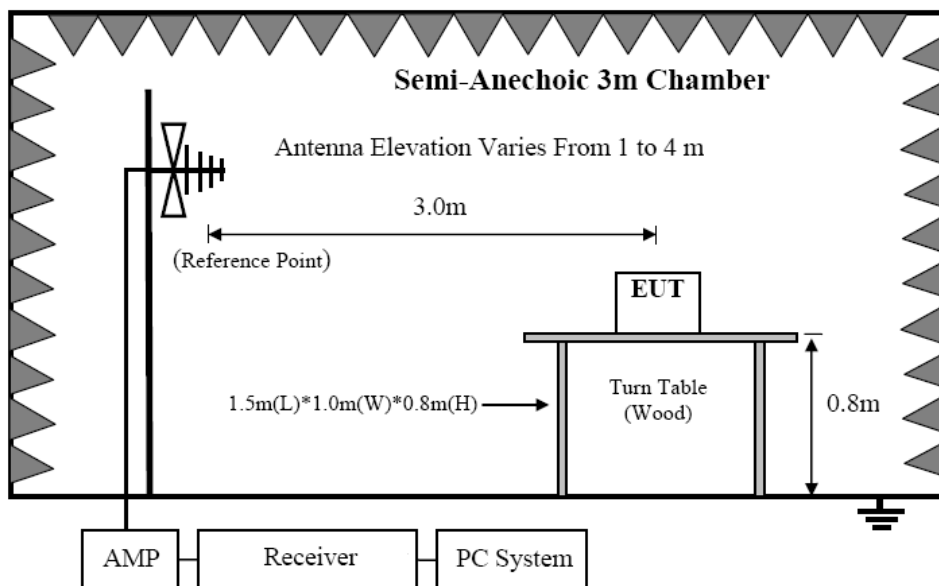

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

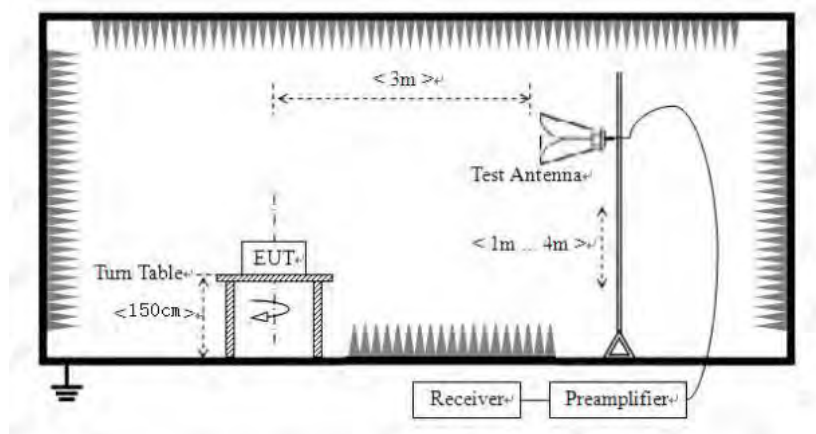

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

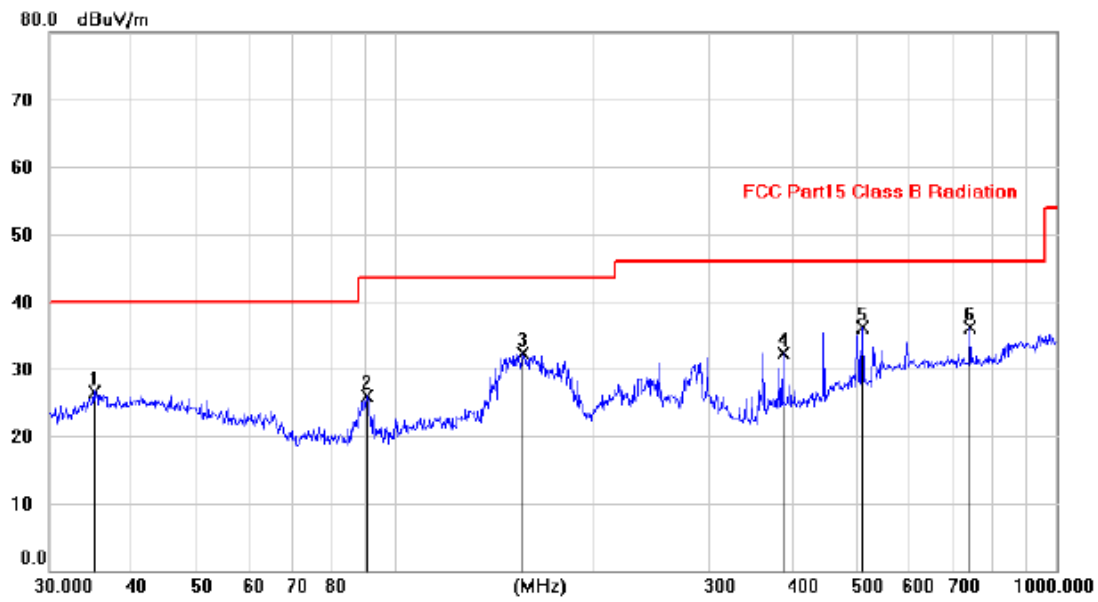

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		35.0334	12.86	13.74	26.60	40.00	-13.40	peak		
2		90.5477	15.71	10.13	25.84	43.50	-17.66	peak		
3		155.9100	17.32	15.05	32.37	43.50	-11.13	peak		
4		385.8662	16.32	16.01	32.33	46.00	-13.67	peak		
5		508.8525	17.73	18.36	36.09	46.00	-9.91	peak		
6	*	741.9981	13.88	22.29	36.17	46.00	-9.83	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

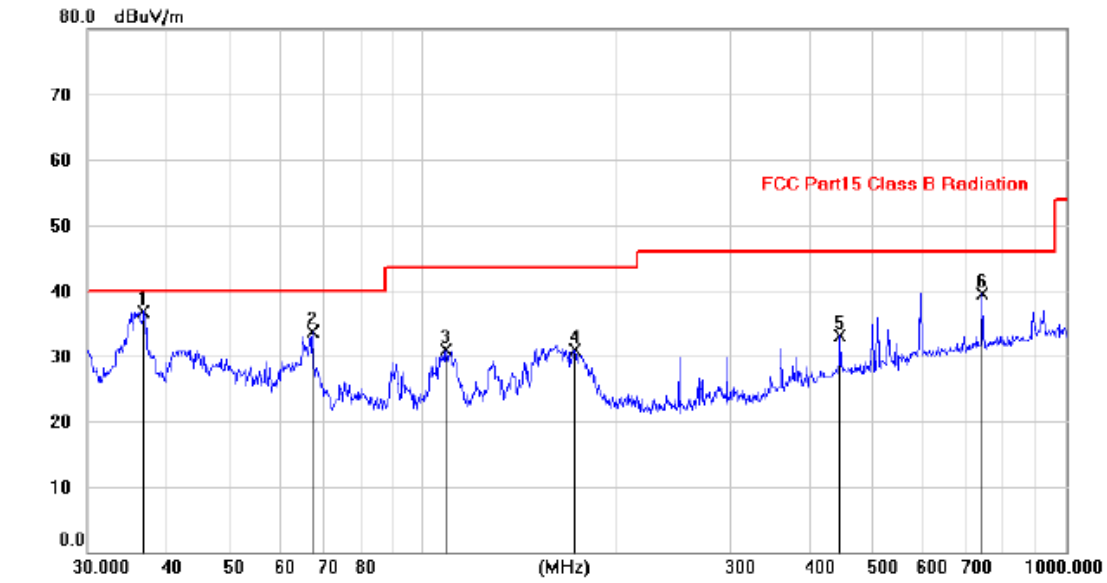Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
				dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	36.7017	22.80	14.00	36.80	40.00	-3.20	peak		
2		67.3122	21.88	11.78	33.66	40.00	-6.34	peak		
3		108.4184	19.15	11.68	30.83	43.50	-12.67	peak		
4		172.0147	17.04	13.80	30.84	43.50	-12.66	peak		
5		445.2676	15.63	17.45	33.08	46.00	-12.92	peak		
6		741.4782	17.20	22.28	39.48	46.00	-6.52	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz (AC 120V/ 60Hz) was listed in this report.

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.42	V	33.95	10.18	34.26	57.29	74	-16.71	PK
4804	34.65	V	33.95	10.18	34.26	44.52	54	-9.48	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	48.42	H	33.95	10.18	34.26	58.29	74	-15.71	PK
4804	33.56	H	33.95	10.18	34.26	43.43	54	-10.57	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	49.54	V	33.93	10.20	34.29	59.38	74	-14.62	PK
4882	36.15	V	33.93	10.20	34.29	45.99	54	-8.01	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.29	H	33.93	10.20	34.29	58.13	74	-15.87	PK
4882	34.57	H	33.93	10.20	34.29	44.41	54	-9.59	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	49.13	V	33.98	10.22	34.25	59.08	74	-14.92	PK
4960	35.73	V	33.98	10.22	34.25	45.68	54	-8.32	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	47.68	H	33.98	10.22	34.25	57.63	74	-16.37	PK
4960	35.03	H	33.98	10.22	34.25	44.98	54	-9.02	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.34	V	33.95	10.18	34.26	57.21	74	-16.79	PK
4804	35.05	V	33.95	10.18	34.26	44.92	54	-9.08	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	48.46	H	33.95	10.18	34.26	58.33	74	-15.67	PK
4804	33.56	H	33.95	10.18	34.26	43.43	54	-10.57	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	49.04	V	33.93	10.20	34.29	58.88	74	-15.12	PK
4882	35.54	V	33.93	10.20	34.29	45.38	54	-8.62	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.19	H	33.93	10.20	34.29	58.03	74	-15.97	PK
4882	34.56	H	33.93	10.20	34.29	44.40	54	-9.60	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	48.53	V	33.98	10.22	34.25	58.48	74	-15.52	PK
4960	35.32	V	33.98	10.22	34.25	45.27	54	-8.73	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	47.16	H	33.98	10.22	34.25	57.11	74	-16.89	PK
4960	34.32	H	33.98	10.22	34.25	44.27	54	-9.73	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.54	V	33.95	10.18	34.26	57.41	74	-16.59	PK
4804	35.47	V	33.95	10.18	34.26	45.34	54	-8.66	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	48.56	H	33.95	10.18	34.26	58.43	74	-15.57	PK
4804	33.39	H	33.95	10.18	34.26	43.26	54	-10.74	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	49.15	V	33.93	10.20	34.29	58.99	74	-15.01	PK
4882	35.38	V	33.93	10.20	34.29	45.22	54	-8.78	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.89	H	33.93	10.20	34.29	58.73	74	-15.27	PK
4882	35.25	H	33.93	10.20	34.29	45.09	54	-8.91	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	48.54	V	33.98	10.22	34.25	58.49	74	-15.51	PK
4960	35.77	V	33.98	10.22	34.25	45.72	54	-8.28	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	47.61	H	33.98	10.22	34.25	57.56	74	-16.44	PK
4960	34.82	H	33.98	10.22	34.25	44.77	54	-9.23	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

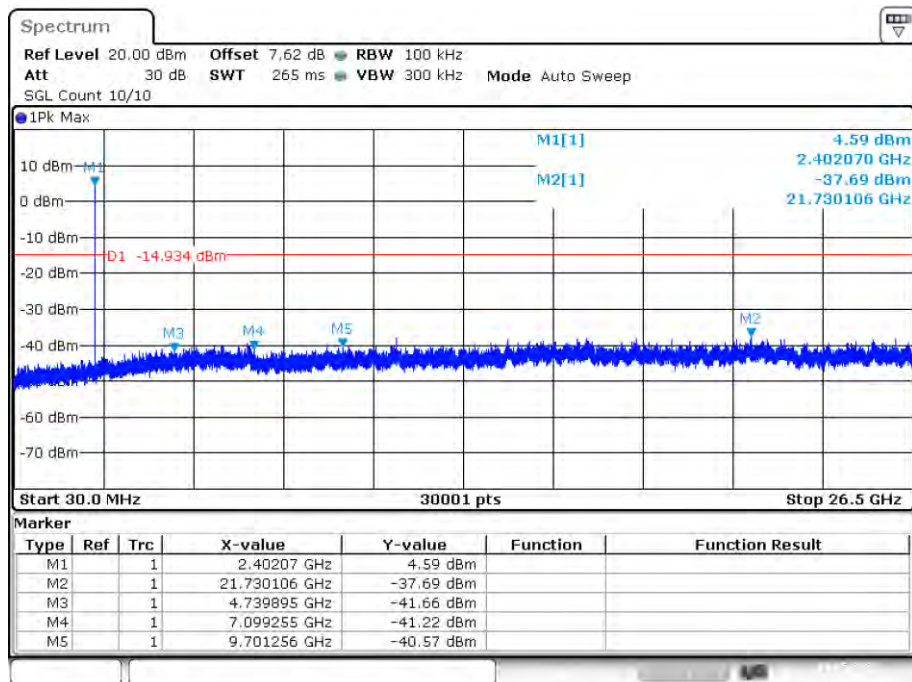
Conducted RF Spurious Emission**Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission**

Date: 9.MAY.2022 10:46:06

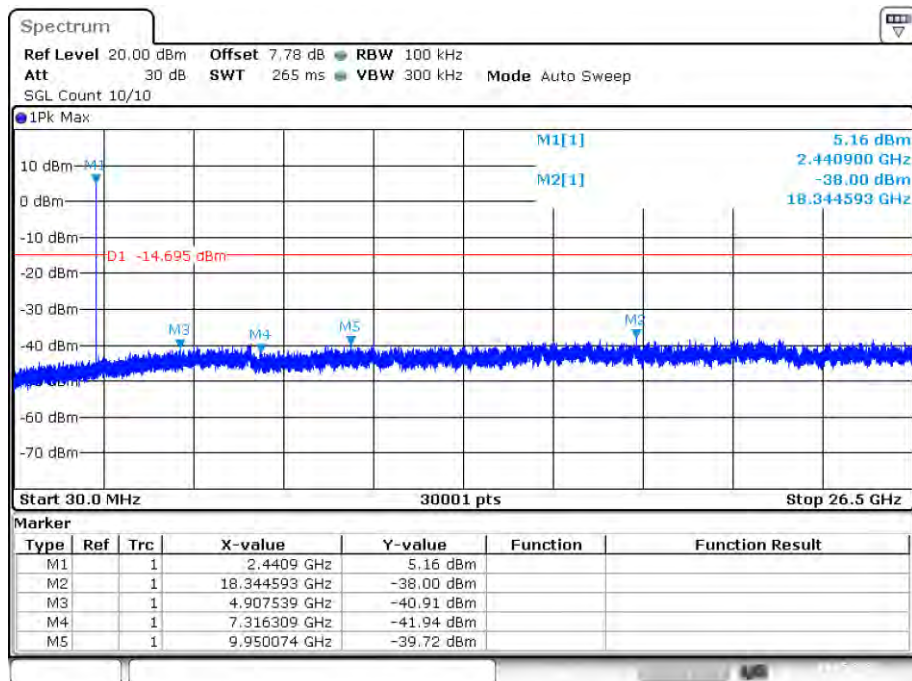Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission


Date: 9.MAY.2022 10:15:06

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

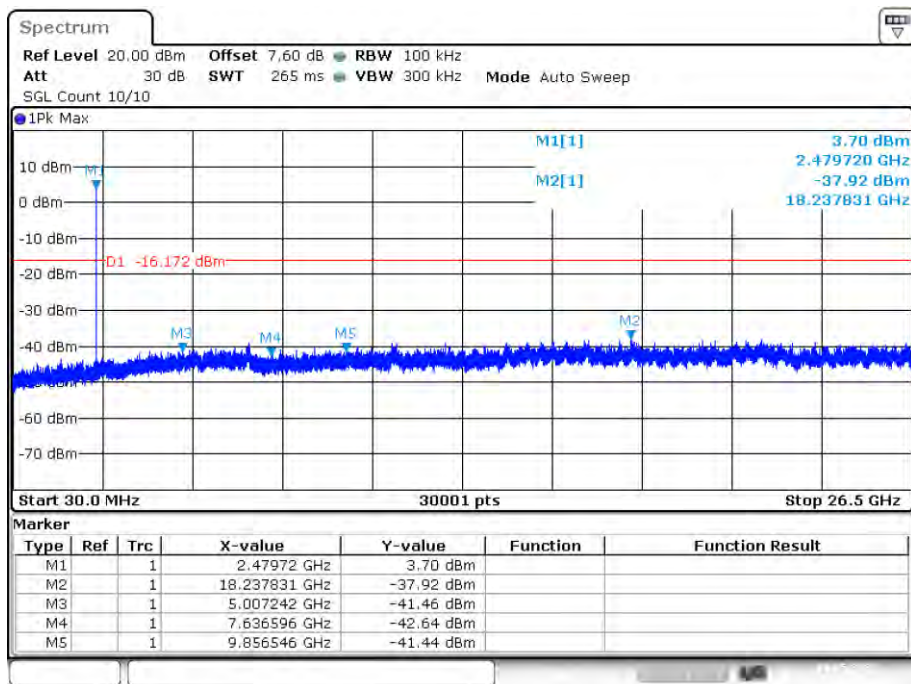


Date: 9.MAY.2022 10:18:21

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

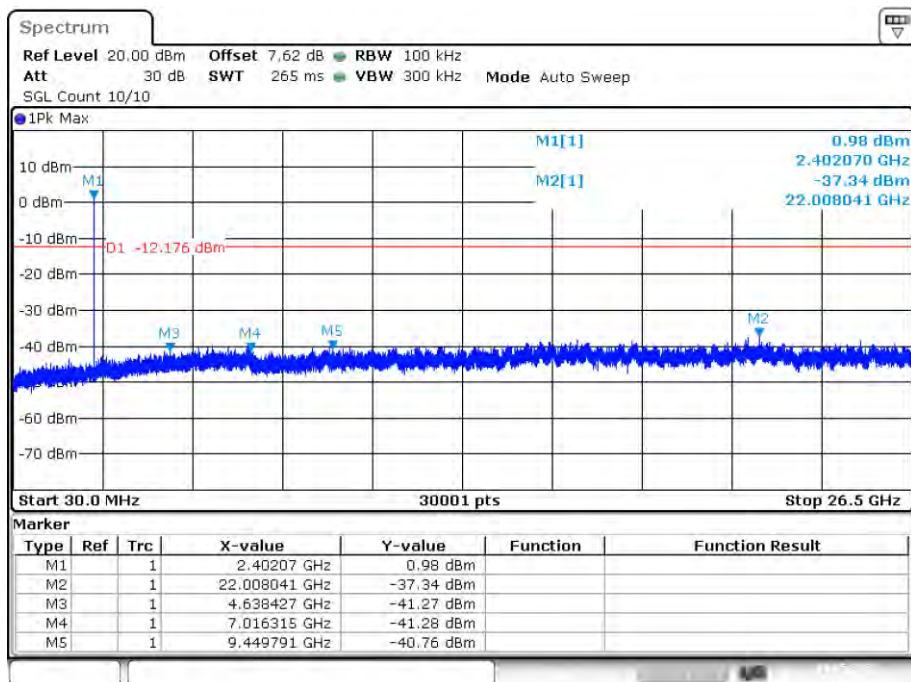


Date: 9.MAY.2022 10:26:58


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

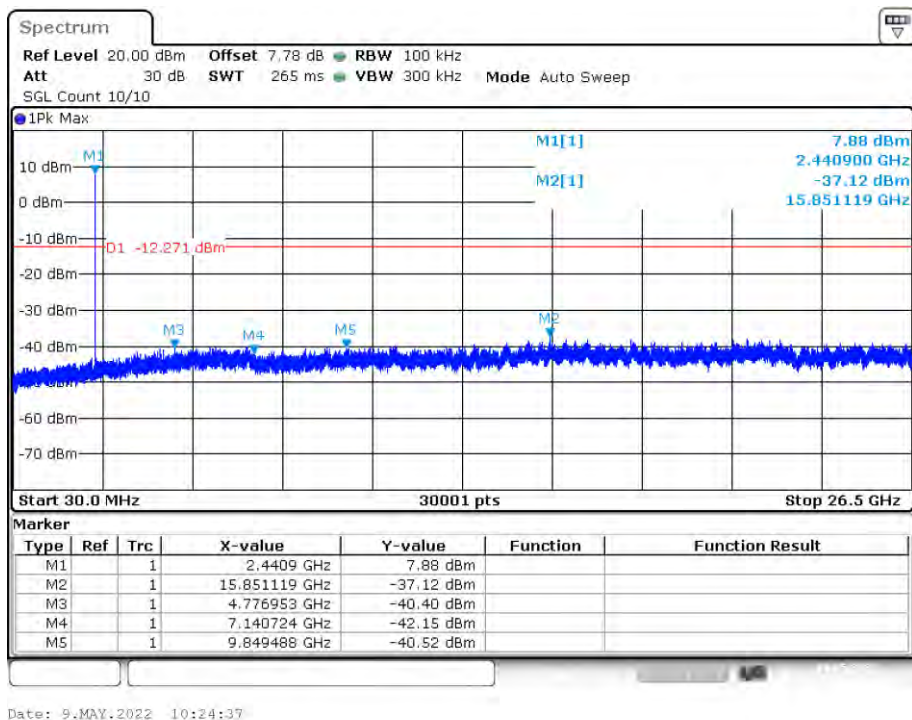

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

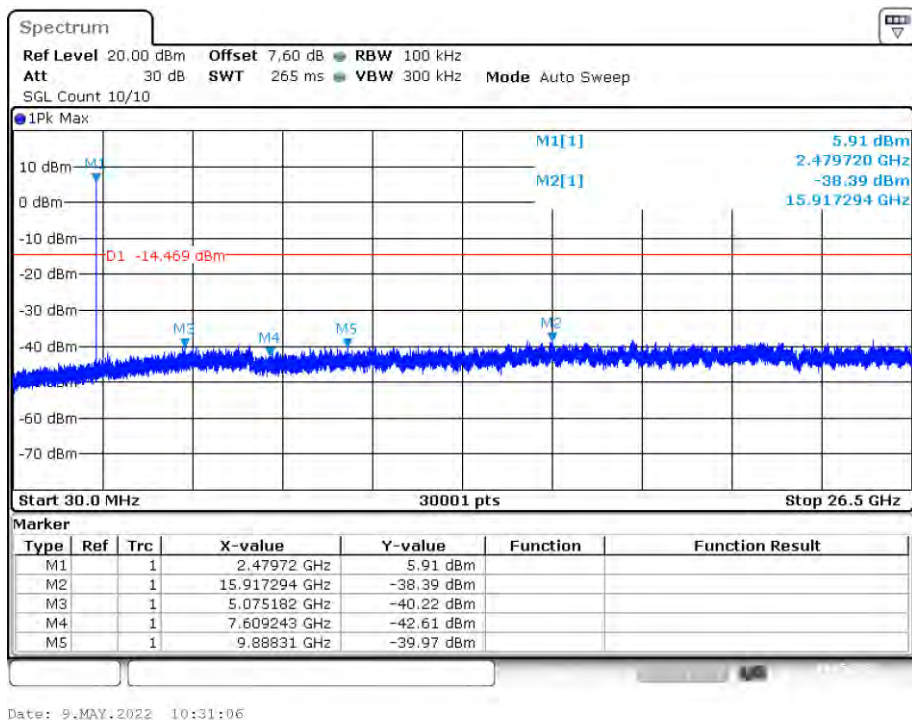


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

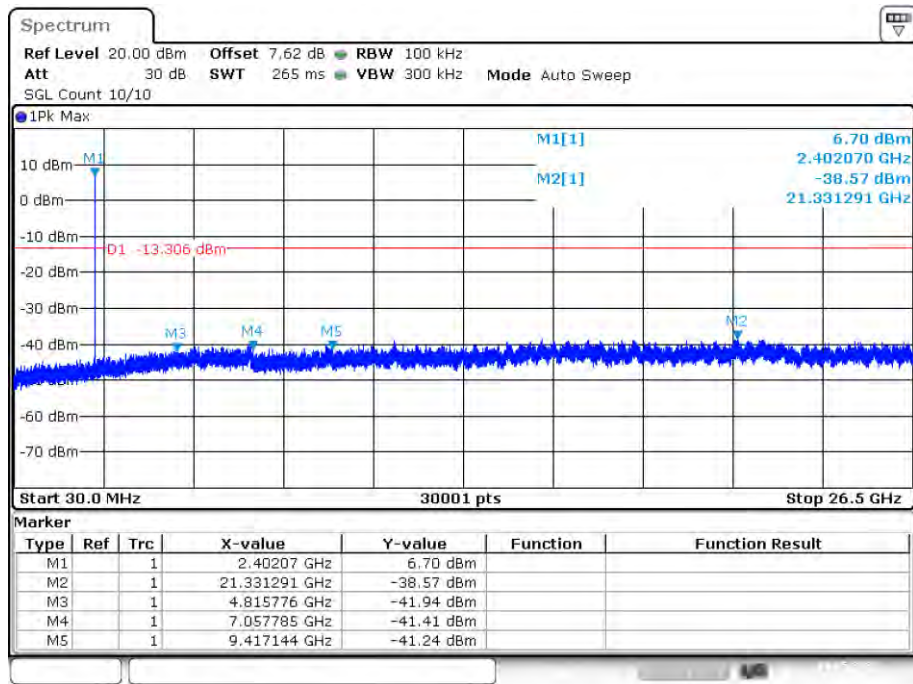


Date: 9.MAY.2022 10:36:09

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

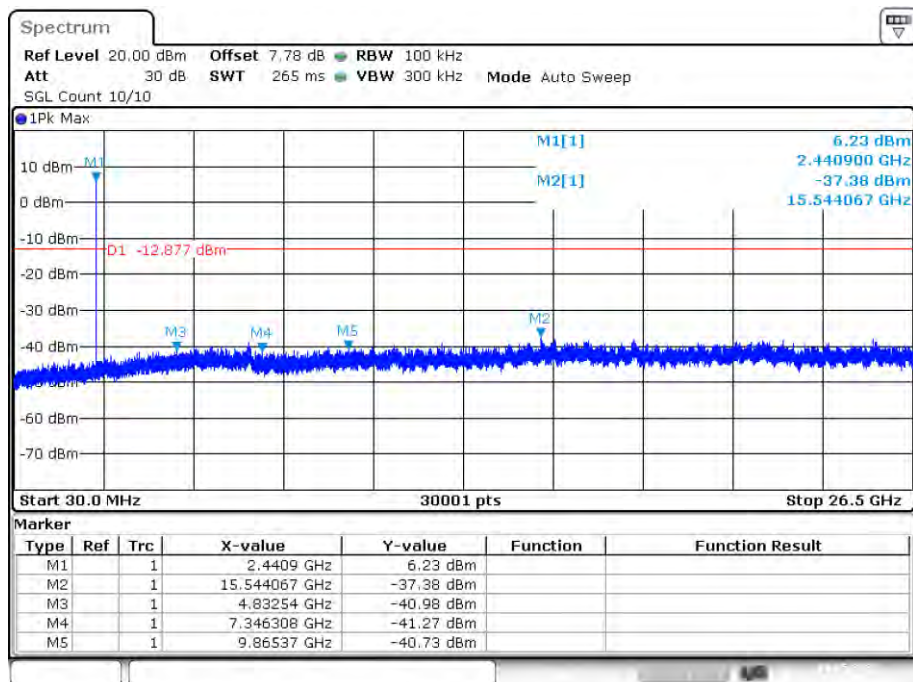

Date: 9.MAY.2022 10:38:37


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

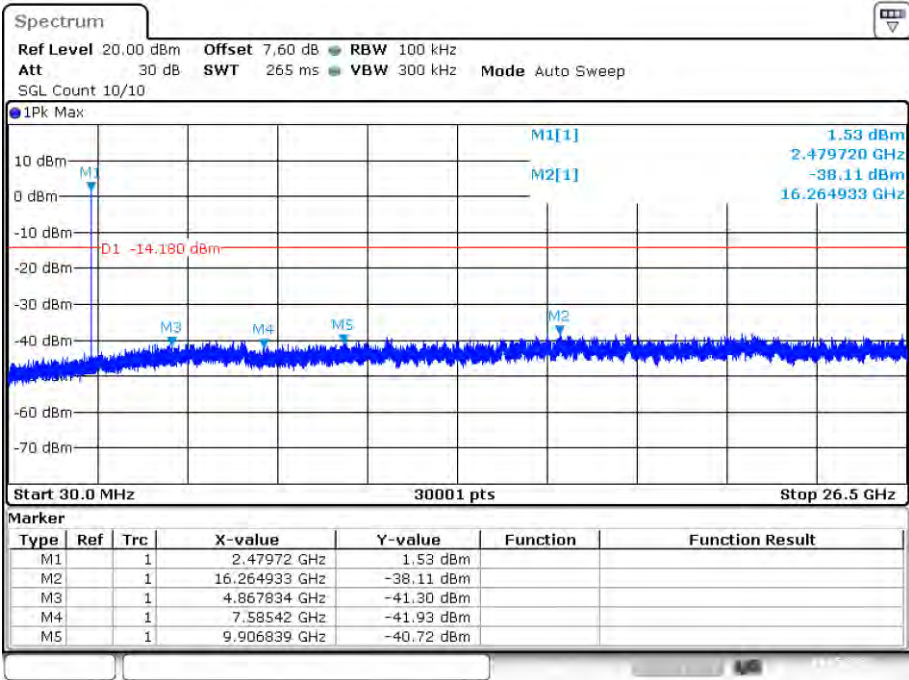

Date: 9.MAY.2022 10:41:56

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

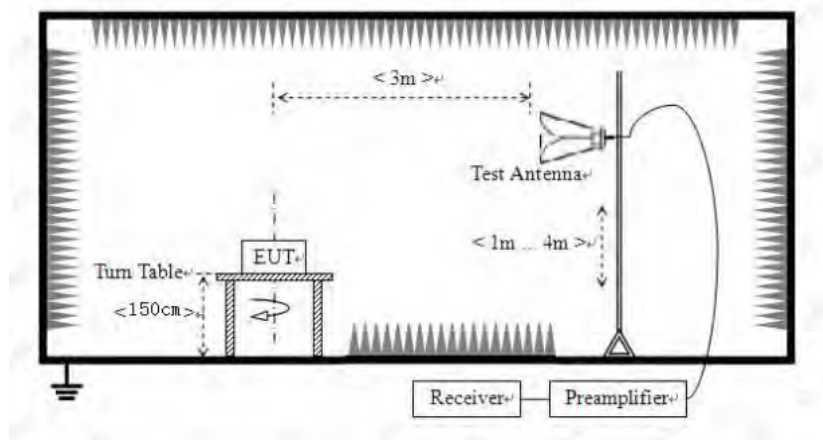

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209 and RSS-GEN, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 and RSS-GEN limits.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.



9.4. Test Result

PASS. (See below detailed test data)

Radiated Method:

Test Mode: GFSK-Low Hopping-off

Test Mode: GFSK-High Hopping-off

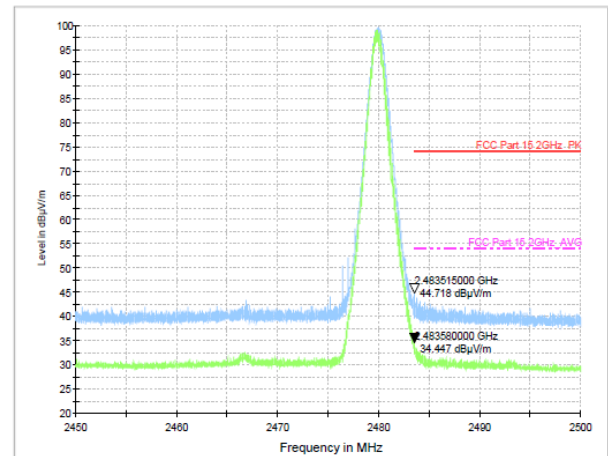
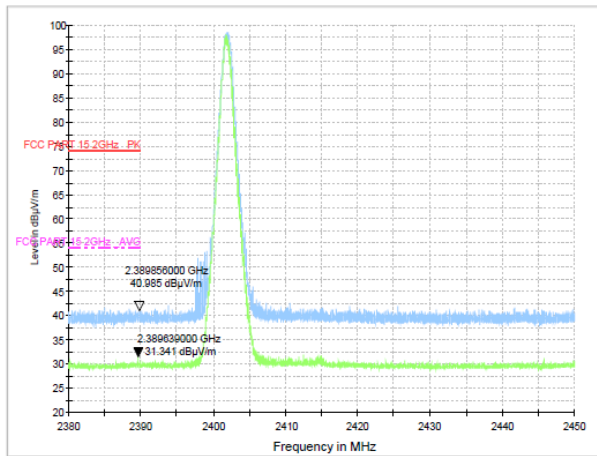


Test Mode: GFSK-Low Hopping-on

Test Mode: GFSK-High Hopping-on





Polarization: Vertical

Polarization: Horizontal

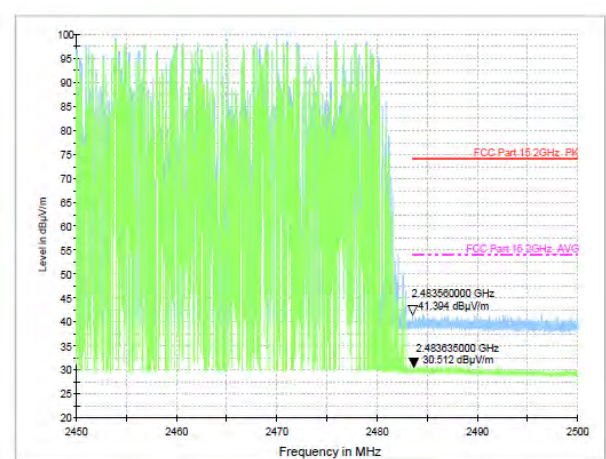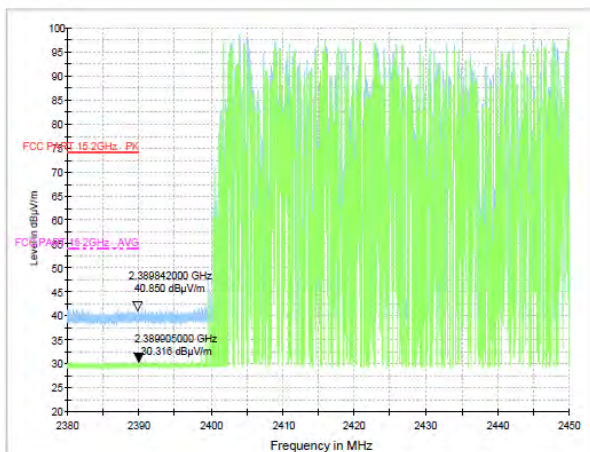

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

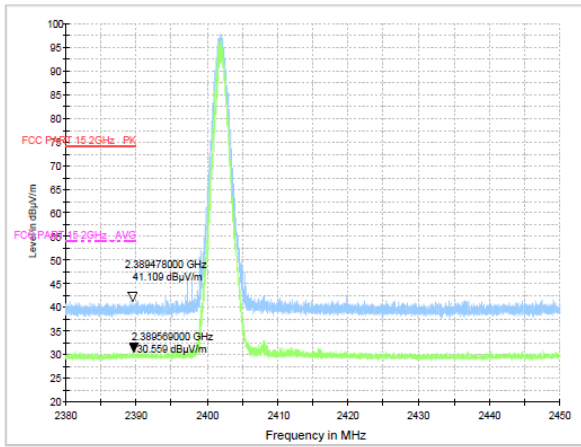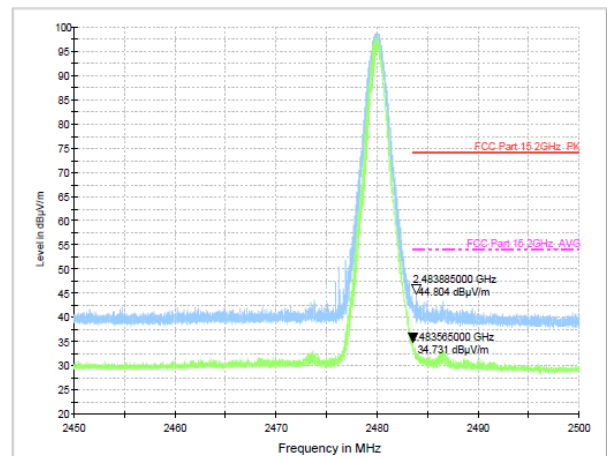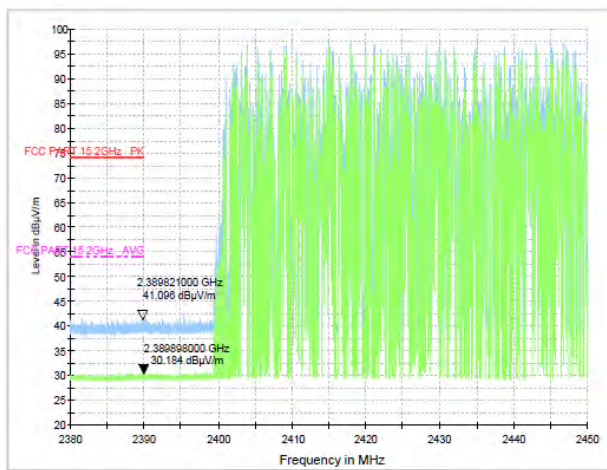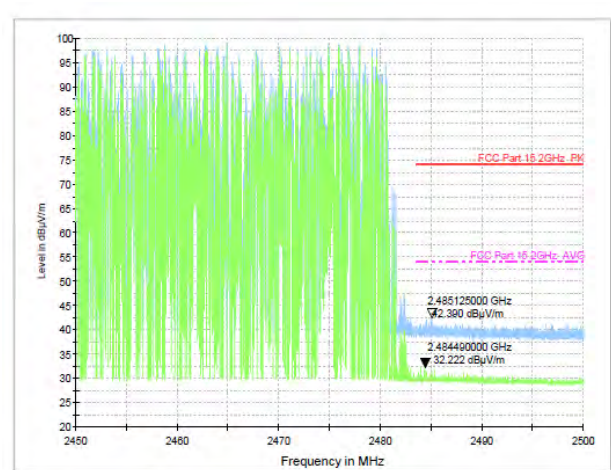Test Mode: $\pi/4$ DQPSK-Low Hopping-offTest Mode: $\pi/4$ DQPSK-High Hopping-offTest Mode: $\pi/4$ DQPSK-Low Hopping-onTest Mode: $\pi/4$ DQPSK-High Hopping-on


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

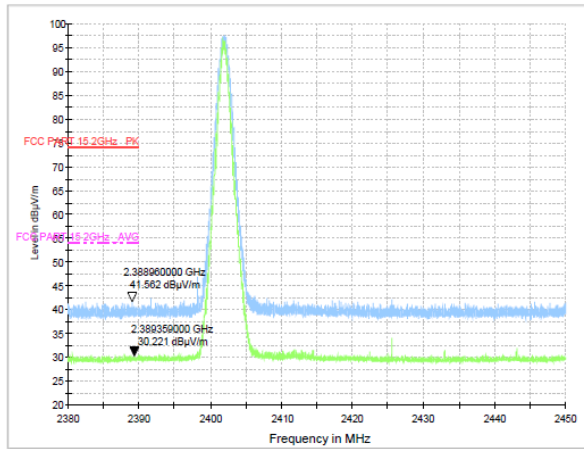


Test Mode: 8DPSK-High Hopping-off

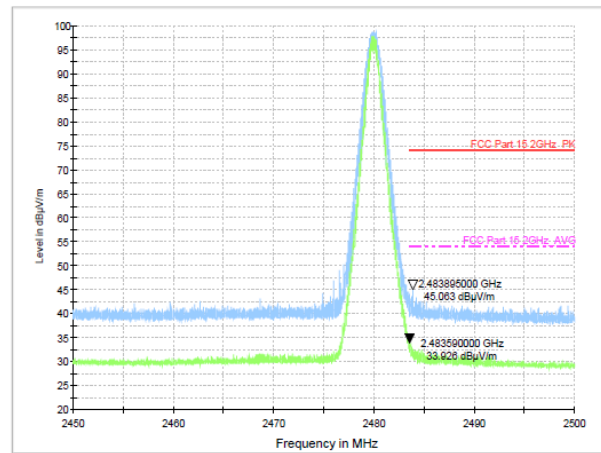

Test Mode: 8DPSK-Low Hopping-on

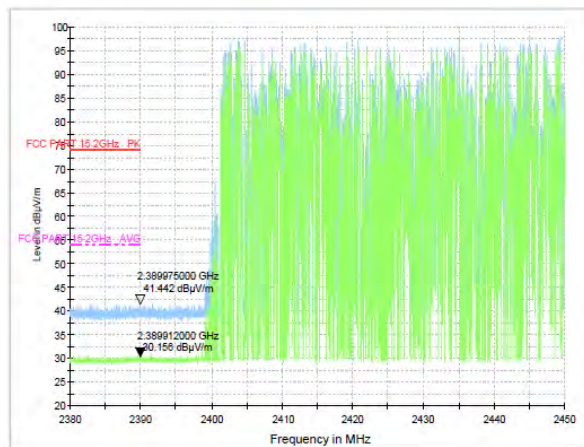

Test Mode: 8DPSK-High Hopping-on

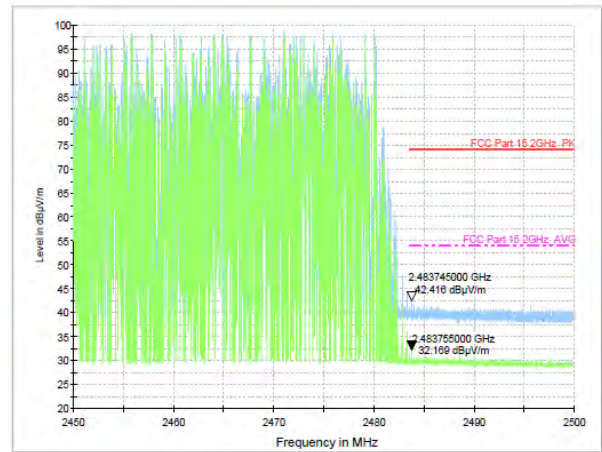

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Conducted Method


GFSK Mode:

Test channel:

Lowest channel

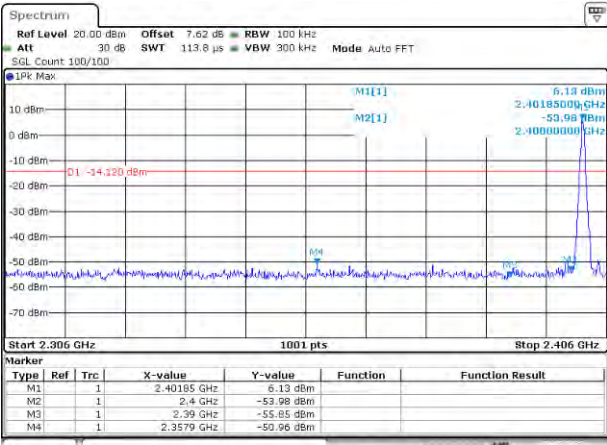


No-hopping mode

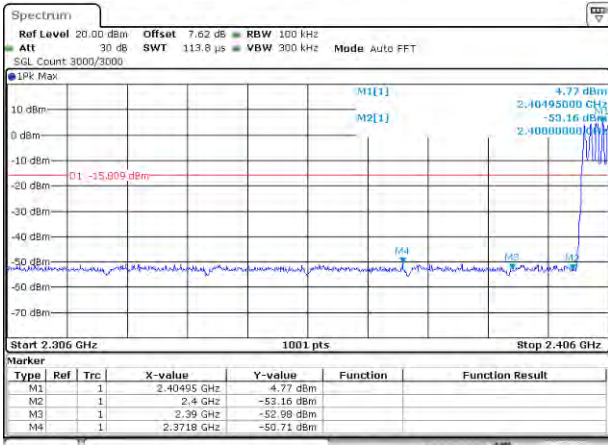


Hopping mode

Test channel:

Highest channel

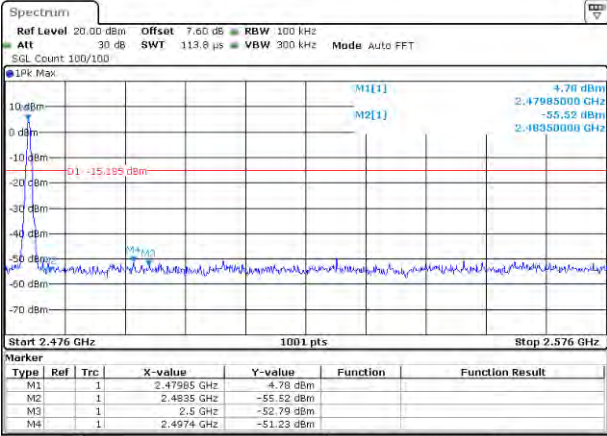


No-hopping mode

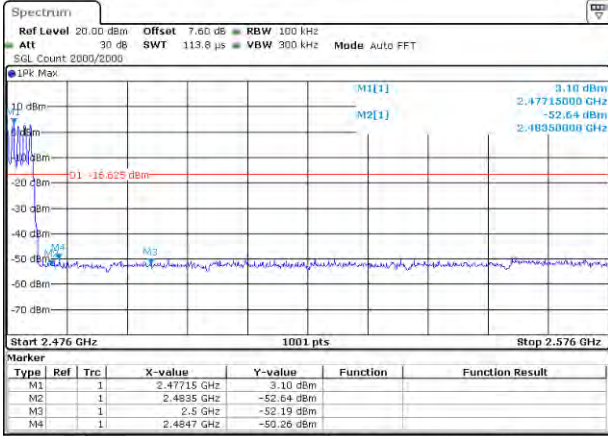

Hopping mode


$\pi/4$ DQPSK Mode:

Test channel:

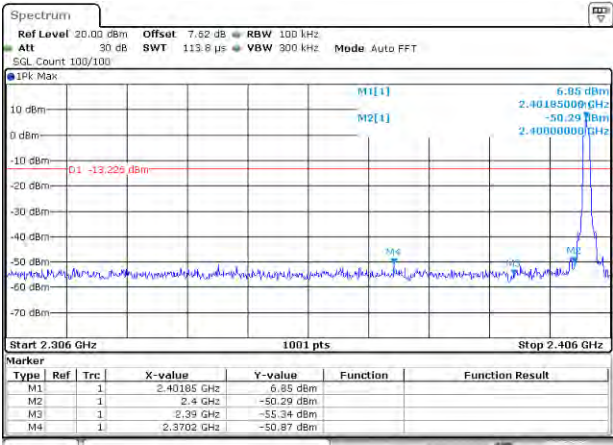


No-hopping mode

Lowest channel

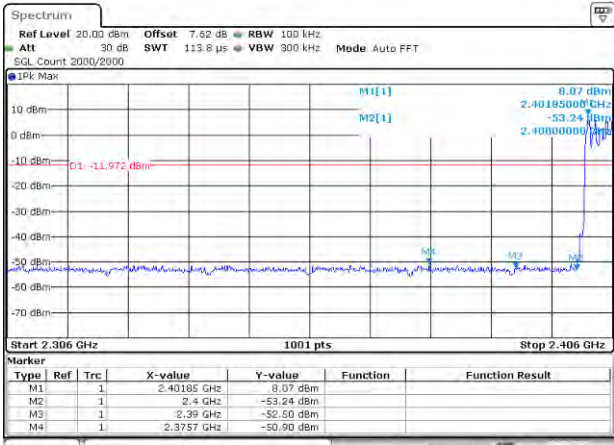


Hopping mode

Test channel:

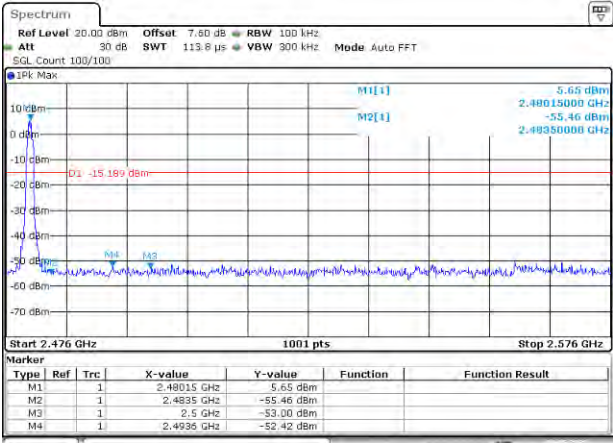

No-hopping mode

Highest channel

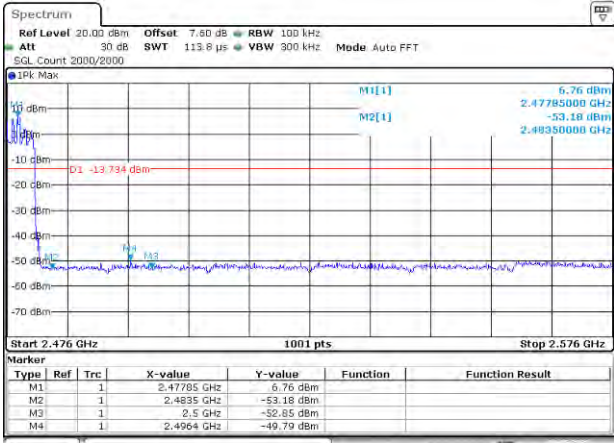

Hopping mode