

WA-P-LE-02-353 Specification

1. Explanation of part number:

WA - P - LE - 02 - 353
(1) (2) (3) (4) (5)

(1) Product Type: PCB Antenna

(2) Material: PCB+ Cable

(3) Frequency:2400-2500MHz&5150-5850MHz&5925-7125MHz

(4) Coaxial Cable Type:02

(5) Suffix :353

(6) Gain (Peak) : 2400-2500MHz: 4.78dBi; 5150-5850MHz: 5.45 dBi; 5925-7125MHz: 4.64 dBi

(7) Company address: INPAQ TECHNOLOGY(SUZHOU) CO, LTD. No. 5, Chunqiu

Road, Huangdai Town, Xiangcheng District, Suzhou City, Jiangsu Province, China

2. Storage Condition:

Temperature -40 to +70 °C
Humidity 65±20 % RH

3. Operating Condition:

Temperature -40 to +70 °C
Humidity 65±20 % RH

4. Electrical Specification:

Those specifications were specially defined for 迪芬尼 DH200 WIFI 2 model, and all characteristics were measured under the model's handset testing.

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 骆拓夫	CHECKED BY : 赵付辉		
DESIGNED BY : 陈光芒	APPROVED BY : 赵付辉		
TITLE : WA-P-LE-02-353 Specification		DOCUMENT NO.	PAGE REV. P3
PAGE 1 F 6			

4-1. Frequency Band:

Frequency Band	MHz
WIFI 6E	2400-2500MHz&5150-5850MHz&5925-7125MHz

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. Return Loss

4-4.1 Measuring Method

- 1.A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the Return Loss
2. Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and Return Loss value

Frequency (Unit MHz)		2400	2450	2500	5150	5850	7125
Return Loss	WIFI 6E	-14.98	-26.48	-24.52	-21.01	-10.57	-14.63

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY : 骆拓夫 CHECKED BY : 赵付辉

DESIGNED BY : 陈光芒 APPROVED BY : 赵付辉

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-P-LE-02-353 Specification

DOCUMENT
NO.

PAGE REV.
P3




4-5. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

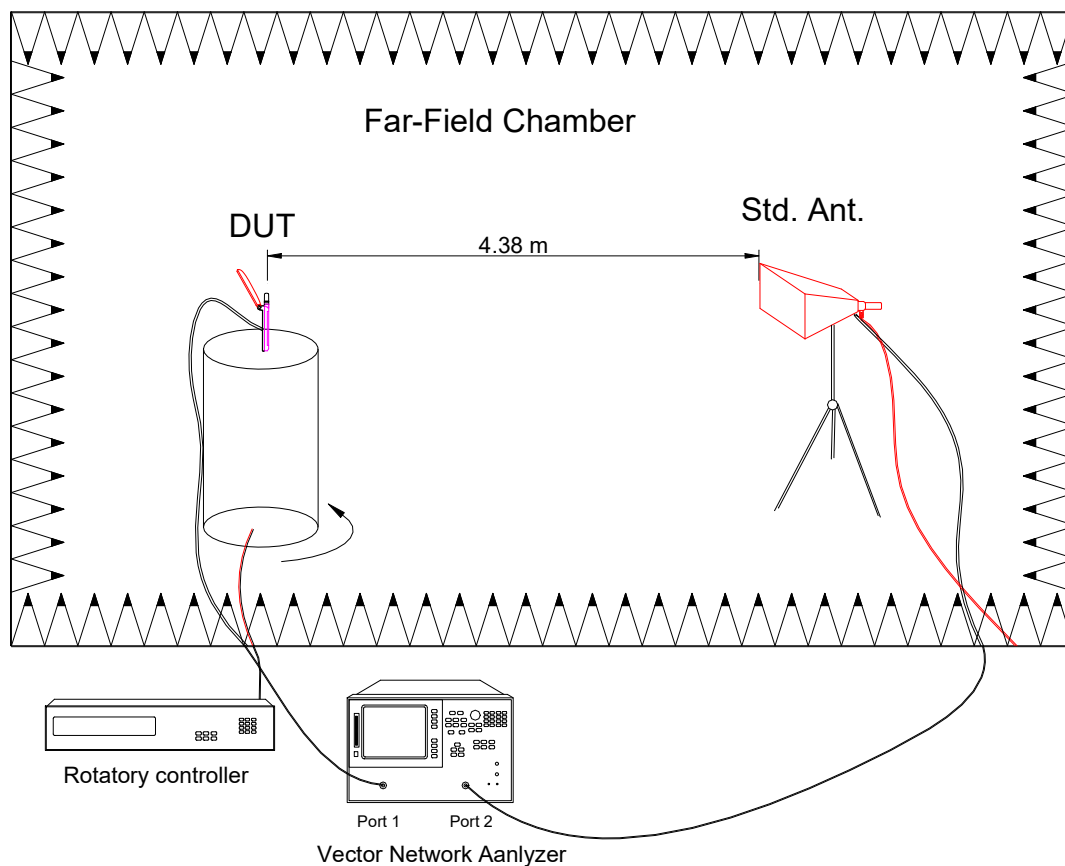

1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)



4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

Antenna type	PCB					
Frequency (MHz)	2400	2450	2500	5150	5850	7125
Efficiency (%)	65.31	62.66	62.23	60.72	61.38	61.25
Peak Gain (dBi)	4.78	3.92	3.7	3.37	4.53	2.92
Frequency (MHz)	2400~2500			5150~5850		5925~7125
Peak Gain (Max)	4.78dBi			5.45dBi		4.64dBi

4-6. 3D/2D Radiation Pattern Results

➤ 3D/2D Radiation Pattern Results WIFI

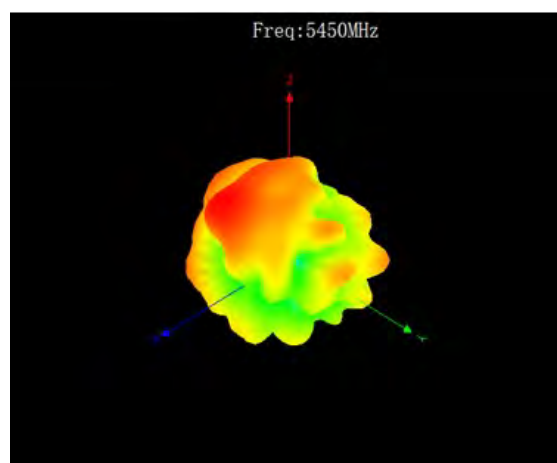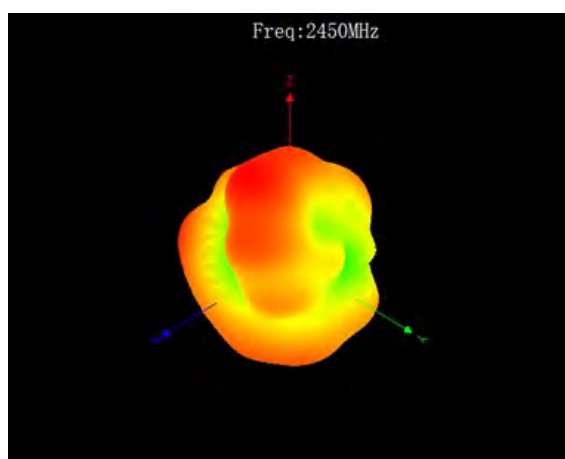

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY : 骆拓夫 CHECKED BY : 赵付辉


DESIGNED BY : 陈光芒 APPROVED BY : 赵付辉

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WA-P-LE-02-353 Specification

DOCUMENT
NO.


PAGE REV.
P3

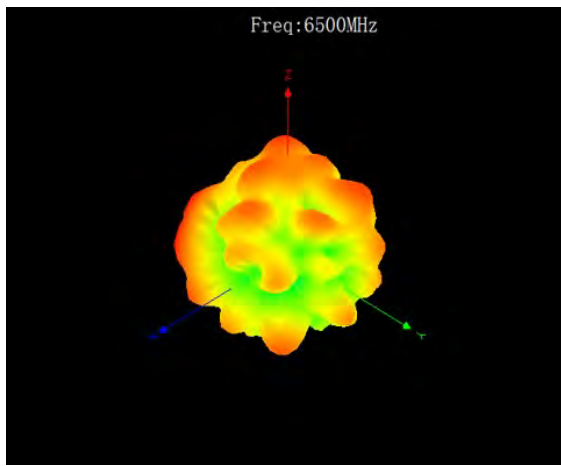

➤ 2D Radiation Pattern Results

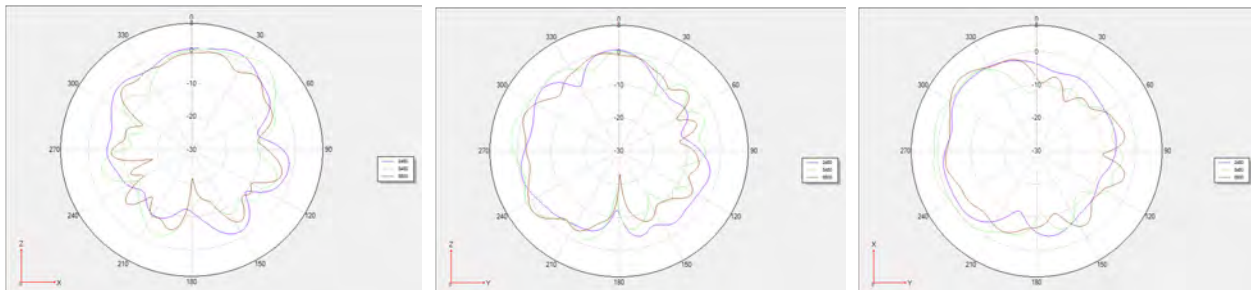

➤ Physical coordinate Image

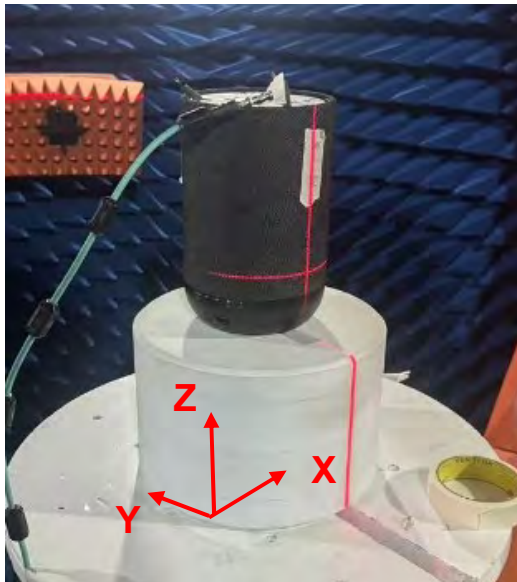

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 骆拓夫

CHECKED BY : 赵付辉

DESIGNED BY : 陈光芒

APPROVED BY : 赵付辉

TITLE : WA-P-LE-02-353 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

PAGE REV.
P3

5. Mechanical Specification:

5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

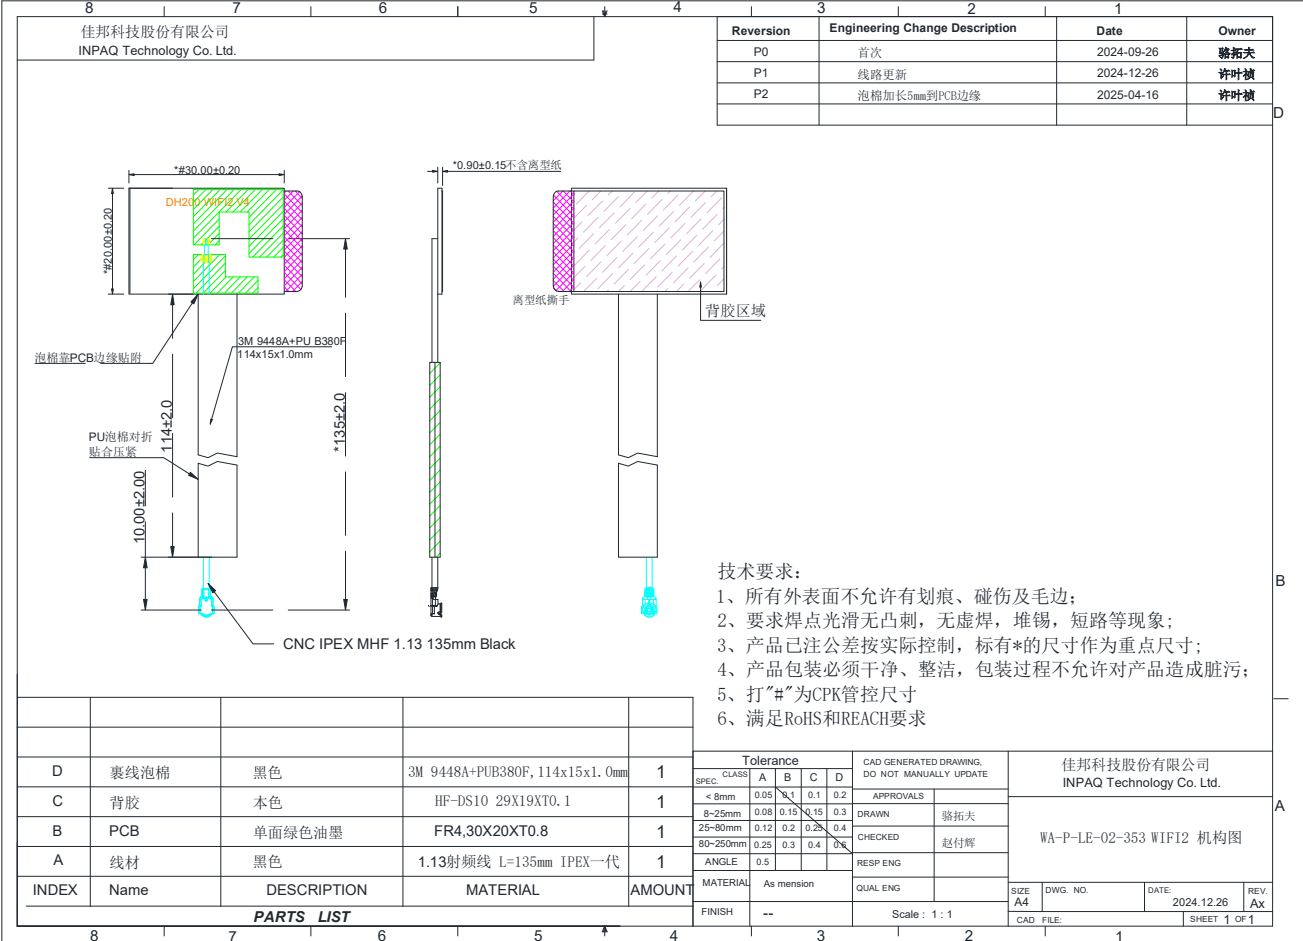

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 骆拓夫 CHECKED BY : 赵付辉

DESIGNED BY : 陈光芒 APPROVED BY : 赵付辉

TITLE : WA-P-LE-02-353 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P3