

# TEST REPORT

**Reference No.**..... : WTD22D05102931W001  
**FCC ID**..... : 2A66U-XZH001  
**Applicant** ..... : HUIZHOU XINZHIHUI INDUSTRY CO., LTD.  
**Address** ..... : Zhihui Park, Xinglong Village, Xiaojinkou District, Huizhou, Guangdong, China  
**Manufacturer** ..... : HUIZHOU XINZHIHUI INDUSTRY CO., LTD.  
**Address** ..... : Zhihui Park, Xinglong Village, Xiaojinkou District, Huizhou, Guangdong, China  
**Product** ..... : BT Speakers  
**Model(s)** ..... : BT2.1PT, Auricle, H211-PRFOM, XZH-H211  
**Standards** ..... : FCC 47CFR Part 15 Subpart C Section 15.247  
**Date of Receipt sample** .... : 2022-05-26  
**Date of Test** ..... : 2022-05-26 to 2022-06-02  
**Date of Issue** ..... : 2022-06-13  
**Test Result** ..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China  
Tel: +86-769-2267 6998  
Fax: +86-769-2267 6828

Compiled by:

*Estel Qian*

Estel Qian / Project Engineer

Approved by:



*Daniel Liu*

Daniel Liu / Designated Reviewer

## 2 Contents

|                                                    | Page      |
|----------------------------------------------------|-----------|
| <b>1 COVER PAGE.....</b>                           | <b>1</b>  |
| <b>2 CONTENTS .....</b>                            | <b>2</b>  |
| <b>3 REVISION HISTORY .....</b>                    | <b>4</b>  |
| <b>4 GENERAL INFORMATION.....</b>                  | <b>5</b>  |
| 4.1 GENERAL DESCRIPTION OF E.U.T.....              | 5         |
| 4.2 DETAILS OF E.U.T .....                         | 5         |
| 4.3 CHANNEL LIST .....                             | 5         |
| 4.4 TEST FACILITY .....                            | 6         |
| 4.5 SUBCONTRACTED .....                            | 7         |
| 4.6 ABNORMALITIES FROM STANDARD CONDITIONS .....   | 7         |
| 4.7 TEST MODE .....                                | 7         |
| <b>5 EQUIPMENT USED DURING TEST .....</b>          | <b>8</b>  |
| 5.1 EQUIPMENTS LIST .....                          | 8         |
| 5.2 DESCRIPTION OF SUPPORT UNITS .....             | 8         |
| 5.3 MEASUREMENT UNCERTAINTY .....                  | 9         |
| 5.4 TEST EQUIPMENT CALIBRATION .....               | 9         |
| <b>6 TEST SUMMARY .....</b>                        | <b>10</b> |
| <b>7 CONDUCTED EMISSION .....</b>                  | <b>11</b> |
| 7.1 E.U.T. OPERATION .....                         | 11        |
| 7.2 EUT SETUP.....                                 | 11        |
| 7.3 MEASUREMENT DESCRIPTION.....                   | 12        |
| 7.4 CONDUCTED EMISSION TEST RESULT .....           | 12        |
| <b>8 RADIATED EMISSIONS.....</b>                   | <b>14</b> |
| 8.1 EUT OPERATION .....                            | 14        |
| 8.2 TEST SETUP .....                               | 15        |
| 8.3 SPECTRUM ANALYZER SETUP.....                   | 16        |
| 8.4 TEST PROCEDURE .....                           | 17        |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION ..... | 17        |
| 8.6 SUMMARY OF TEST RESULTS .....                  | 18        |
| <b>9 BAND EDGE MEASUREMENT .....</b>               | <b>21</b> |
| 9.1 TEST PROCEDURE .....                           | 21        |
| 9.2 TEST SETUP .....                               | 21        |
| 9.3 TEST RESULT .....                              | 22        |
| <b>10 BANDWIDTH MEASUREMENT.....</b>               | <b>24</b> |
| 10.1 TEST PROCEDURE .....                          | 24        |
| 10.2 TEST SETUP .....                              | 24        |
| 10.3 TEST RESULT .....                             | 24        |
| <b>11 MAXIMUM PEAK OUTPUT POWER .....</b>          | <b>27</b> |
| 11.1 TEST PROCEDURE .....                          | 27        |
| 11.2 TEST SETUP .....                              | 27        |
| 11.3 TEST RESULT .....                             | 27        |
| <b>12 HOPPING CHANNEL SEPARATION .....</b>         | <b>30</b> |
| 12.1 TEST PROCEDURE .....                          | 30        |
| 12.2 TEST SETUP .....                              | 30        |

|           |                                                    |           |
|-----------|----------------------------------------------------|-----------|
| 12.3      | TEST RESULT .....                                  | 31        |
| <b>13</b> | <b>NUMBER OF HOPPING FREQUENCY .....</b>           | <b>34</b> |
| 13.1      | TEST PROCEDURE .....                               | 34        |
| 13.2      | TEST SETUP .....                                   | 34        |
| 13.3      | TEST RESULT .....                                  | 35        |
| <b>14</b> | <b>DWELL TIME .....</b>                            | <b>36</b> |
| 14.1      | TEST PROCEDURE .....                               | 36        |
| 14.2      | TEST SETUP .....                                   | 37        |
| 14.3      | TEST RESULT .....                                  | 37        |
| <b>15</b> | <b>ANTENNA REQUIREMENT .....</b>                   | <b>40</b> |
| <b>16</b> | <b>RF EXPOSURE.....</b>                            | <b>40</b> |
| <b>17</b> | <b>PHOTOGRAPHS –TEST SETUP AND EUT PHOTOS.....</b> | <b>40</b> |

### 3 Revision History

| Test Report No.    | Date of Receipt Sample | Date of Test                   | Date of Issue | Purpose  | Comment | Approved |
|--------------------|------------------------|--------------------------------|---------------|----------|---------|----------|
| WTD22D05102931W001 | 2022-05-26             | 2022-05-26<br>to<br>2022-06-02 | 2022-06-13    | Original | -       | Valid    |

## 4 General Information

### 4.1 General Description of E.U.T

|                               |                                                                                 |
|-------------------------------|---------------------------------------------------------------------------------|
| <b>Product:</b>               | BT Speakers                                                                     |
| <b>Model(s):</b>              | BT2.1PT, Auricle, H211-PRFOM, XZH-H211                                          |
| <b>Model difference:</b>      | All are the same except the model name.<br>The model of test sample is BT2.1PT. |
| <b>BT Version:</b>            | 5.0                                                                             |
| <b>Operation Frequency:</b>   | 2402-2480MHz, 79 Channels in total                                              |
| <b>Max. RF output power:</b>  | 3.18dBm                                                                         |
| <b>Antenna installation:</b>  | PCB Printed Antenna                                                             |
| <b>Antenna Gain:</b>          | 0.85dBi                                                                         |
| <b>Type of Modulation:</b>    | FHSS                                                                            |
| <b>Modulation Technology:</b> | GFSK, $\pi/4$ DQPSK                                                             |
| <b>Hardware Version:</b>      | B2K-MAIN-V1.0                                                                   |
| <b>Software Version:</b>      | V1.3                                                                            |

### 4.2 Details of E.U.T

|                 |                                                                              |
|-----------------|------------------------------------------------------------------------------|
| <b>Ratings:</b> | DC 5V 2A from Micro-USB port or<br>DC 7.4V by lithium-ion battery (build-in) |
|-----------------|------------------------------------------------------------------------------|

### 4.3 Channel List

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1           | 2402            | 2           | 2403            | 3           | 2404            | 4           | 2405            |
| 5           | 2406            | 6           | 2407            | 7           | 2408            | 8           | 2409            |
| 9           | 2410            | 10          | 2411            | 11          | 2412            | 12          | 2413            |
| 13          | 2414            | 14          | 2415            | 15          | 2416            | 16          | 2417            |
| 17          | 2418            | 18          | 2419            | 19          | 2420            | 20          | 2421            |
| 21          | 2422            | 22          | 2423            | 23          | 2424            | 24          | 2425            |
| 25          | 2426            | 26          | 2427            | 27          | 2428            | 28          | 2429            |
| 29          | 2430            | 30          | 2431            | 31          | 2432            | 32          | 2433            |
| 33          | 2434            | 34          | 2435            | 35          | 2436            | 36          | 2437            |
| 37          | 2438            | 38          | 2439            | 39          | 2440            | 40          | 2441            |
| 41          | 2442            | 42          | 2443            | 43          | 2444            | 44          | 2445            |
| 45          | 2446            | 46          | 2447            | 47          | 2448            | 48          | 2449            |
| 49          | 2450            | 50          | 2451            | 51          | 2452            | 52          | 2453            |
| 53          | 2454            | 54          | 2455            | 55          | 2456            | 56          | 2457            |
| 57          | 2458            | 58          | 2459            | 59          | 2460            | 60          | 2461            |
| 61          | 2462            | 62          | 2463            | 63          | 2464            | 64          | 2465            |
| 65          | 2466            | 66          | 2467            | 67          | 2468            | 68          | 2469            |
| 69          | 2470            | 70          | 2471            | 71          | 2472            | 72          | 2473            |
| 73          | 2474            | 74          | 2475            | 75          | 2476            | 76          | 2477            |
| 77          | 2478            | 78          | 2479            | 79          | 2480            | -           | -               |

**Frequency hopping systems (FHS):**

This transmitter device is frequency hopping device, and complies with FCC Part15.247 Requirements. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. The average time of occupancy on any channel is less than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels (79 channels) employed.

All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for FCC Part15.247.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 19, 56, 40, 18, 50, 09, 02, 23, 32, 41, 33, 31, 65, 73, 53, 69, 06, 22, 67, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 17, 60, 63, 54, 03, 00, 59, 64, 75, 35, 66, 43, 15, 45, 39, 77, 55, 71, 47, 61, 27, 30, 48, 72, 01, 14, 07, 25, 34, 12, 28, 44, 51, 16, 49, 74, 11, 05, 13, 37, 62 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

**4.4 Test Facility**

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

#### 4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

#### 4.6 Abnormalities from Standard Conditions

None.

#### 4.7 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode    | Low channel | Middle channel | High channel |
|--------------|-------------|----------------|--------------|
| Transmitting | 2402MHz     | 2441MHz        | 2480MHz      |

Note: The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst-case data were reported.

## 5 Equipment Used during Test

### 5.1 Equipments List

| Item                                                            | Equipment                 | Manufacturer | Model No.             | Serial No.      | Last Cal. Date | Valid |
|-----------------------------------------------------------------|---------------------------|--------------|-----------------------|-----------------|----------------|-------|
| <b>Conducted Emissions 1#</b>                                   |                           |              |                       |                 |                |       |
| 1                                                               | EMI Test Receiver         | R&S          | ESCI                  | 100947          | 2021-07-26     | 1Year |
| 2                                                               | LISN                      | R&S          | ENV216                | 100115          | 2021-07-26     | 1Year |
| 3                                                               | Cable                     | Top          | TYPE16(3.5M)          | -               | 2021-07-26     | 1Year |
| 4                                                               | Test software             | EZ-EMC       | RA-03A1-1             | -               | N/A            | N/A   |
| <b>Conducted Emissions 2#</b>                                   |                           |              |                       |                 |                |       |
| 1                                                               | EMI Test Receiver         | R&S          | ESCI                  | 101155          | 2021-07-26     | 1Year |
| 2                                                               | LISN                      | SCHWARZBECK  | NSLK 8128             | 8128-259        | 2021-07-26     | 1Year |
| 3                                                               | Pulse Limiter             | CYBERTEK     | EM5010                | 261115-001-0024 | 2021-07-26     | 1Year |
| 4                                                               | Cable                     | Laplace      | RF300                 | -               | 2021-07-26     | 1Year |
| 5                                                               | Test software             | EZ-EMC       | RA-03A1-1             | -               | N/A            | N/A   |
| <b>3m Semi-anechoic Chamber for Radiation Emissions (SAEMC)</b> |                           |              |                       |                 |                |       |
| 1                                                               | Spectrum Analyzer         | R&S          | FSP30                 | 100091          | 2022-04-28     | 1Year |
| 2                                                               | Amplifier                 | Agilent      | 8447D                 | 2944A10178      | 2021-07-26     | 1Year |
| 3                                                               | Tri-log Broadband Antenna | SCHWARZBECK  | VULB9163              | 336             | 2021-08-23     | 1Year |
| 4                                                               | Coaxial Cable             | Top          | TYPE16(13M)           | -               | 2022-04-28     | 1Year |
| 5                                                               | Broad-band Horn Antenna   | SCHWARZBECK  | BBHA 9120D            | 667             | 2022-04-28     | 1Year |
| 6                                                               | Broad-band Horn Antenna   | SCHWARZBECK  | BBHA 9170             | 335             | 2021-07-30     | 1Year |
| 7                                                               | Broadband Preamplifier    | COMPLIANCE   | PAP-1G18              | 2004            | 2021-07-26     | 1Year |
| 8                                                               | Coaxial Cable             | Top          | ZT26-NJ-NJ-8M/FA      | -               | 2022-04-28     | 1Year |
| 9                                                               | Microwave Amplifier       | SCHWARZBECK  | BBV 9721              | 100472          | 2021-07-26     | 1Year |
| 10                                                              | Coaxial Cable             | Top          | ZT40-2.92J-2.92J-2.0M | 17100919        | 2022-04-28     | 1Year |
| 11                                                              | Test software             | EZ-EMC       | RA-03A1-1             | -               | N/A            | N/A   |
| <b>3m Semi-anechoic Chamber for Radiation Emissions (TDK)</b>   |                           |              |                       |                 |                |       |
| 1                                                               | Test Receiver             | R&S          | ESCI                  | 101296          | 2022-04-28     | 1Year |
| 2                                                               | Trilog Broadband Antenna  | SCHWARZBECK  | VULB9160              | 9160-3325       | 2021-10-30     | 1Year |
| 3                                                               | Active Loop Antenna       | Com-Power    | AL-130R               | 10160007        | 2022-04-28     | 1Year |
| 4                                                               | Amplifier                 | ANRITSU      | MH648A                | M43381          | 2022-04-28     | 1Year |
| 5                                                               | Cable                     | HUBER+SUHNER | CBL2                  | 525178          | 2022-04-28     | 1Year |
| 6                                                               | Test software             | EZ-EMC       | RA-03A1-1             | -               | N/A            | N/A   |
| <b>RF Conducting</b>                                            |                           |              |                       |                 |                |       |
| 1                                                               | Spectrum Analyzer         | R&S          | FSP40                 | 100501          | 2021-07-26     | 1Year |
| 2                                                               | Spectrum Analyzer         | Agilent      | N9020A                | MY49100060      | 2021-07-26     | 1Year |

### 5.2 Description of Support Units

| Equipment | Manufacturer | Model No. | Series No. |
|-----------|--------------|-----------|------------|
| Adapter   | MI           | MDY-09-EK | /          |
| -         | -            | -         | -          |

### 5.3 Measurement Uncertainty

| Parameter                                        | Uncertainty                                 |
|--------------------------------------------------|---------------------------------------------|
| Conducted Emission                               | $\pm 3.64$ dB (AC mains 150KHz~30MHz)       |
| Radiated Spurious Emissions                      | $\pm 5.08$ dB (Bilog antenna 30M~1000MHz)   |
|                                                  | $\pm 5.47$ dB (Horn antenna 1000M~25000MHz) |
| Radio Frequency                                  | $\pm 1 \times 10^{-7}$ Hz                   |
| RF Power                                         | $\pm 0.42$ dB                               |
| RF Power Density                                 | $\pm 0.7$ dB                                |
| Conducted Spurious Emissions                     | $\pm 2.76$ dB (9kHz~26500MHz)               |
| Confidence interval: 95%. Confidence factor: k=2 |                                             |

### 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P. R. China.

## 6 Test Summary

| Test Items                                                                   | Test Requirement                 | Result |
|------------------------------------------------------------------------------|----------------------------------|--------|
| Conduct Emission                                                             | 15.207                           | Pass   |
| Radiated Spurious Emissions                                                  | 15.205(a)<br>15.209<br>15.247(d) | Pass   |
| Band edge                                                                    | 15.247(d)<br>15.205(a)           | Pass   |
| Bandwidth                                                                    | 15.247(a)(1)                     | Pass   |
| Maximum Peak Output Power                                                    | 15.247(b)(1)                     | Pass   |
| Frequency Separation                                                         | 15.247(a)(1)                     | Pass   |
| Number of Hopping Frequency                                                  | 15.247(a)(1)(iii)                | Pass   |
| Dwell time                                                                   | 15.247(a)(1)(iii)                | Pass   |
| Antenna Requirement                                                          | 15.203                           | Pass   |
| RF Exposure                                                                  | 1.1307(b)(1)                     | Pass   |
| Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable. |                                  |        |

## 7 Conducted Emission

Test Requirement: FCC 47CFR Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

| Frequency (MHz) | Conducted Limit (dB $\mu$ V) |           |
|-----------------|------------------------------|-----------|
|                 | Quasi-peak                   | Average   |
| 0.15 to 0.5     | 66 to 56*                    | 56 to 46* |
| 0.5 to 5.0      | 56                           | 46        |
| 5.0 to 30       | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

### 7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.4 °C

Humidity: 50.7 % RH


Atmospheric Pressure: 101.6kPa

Test Voltage: AC 120V, 60Hz

EUT Operation: The test was performed in Transmitting mode, the worst test data ( $\pi/4$ DQPSK modulation Low channel) were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

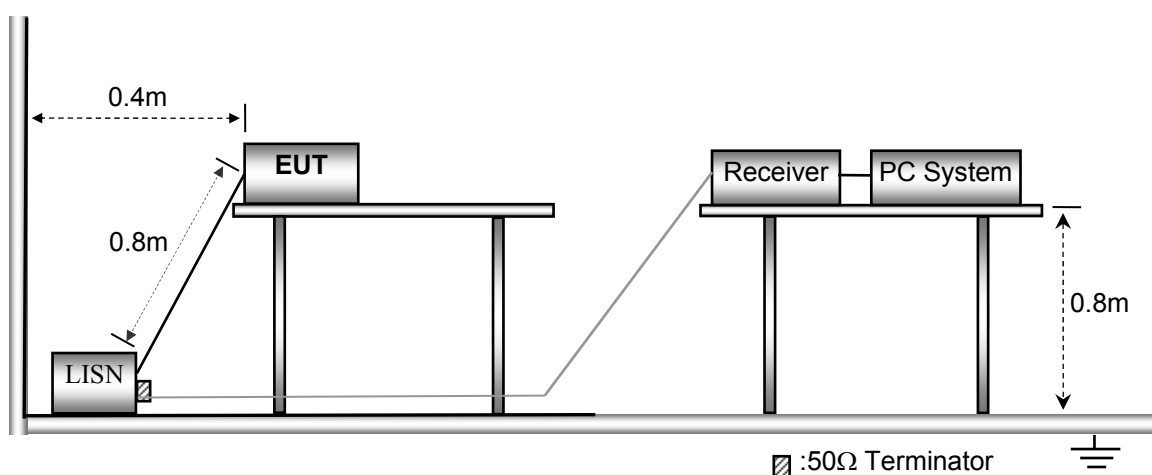


### 7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result


Remark: only the worst data ( $\pi/4$ DQPSK modulation High channel mode) were reported

Live line:

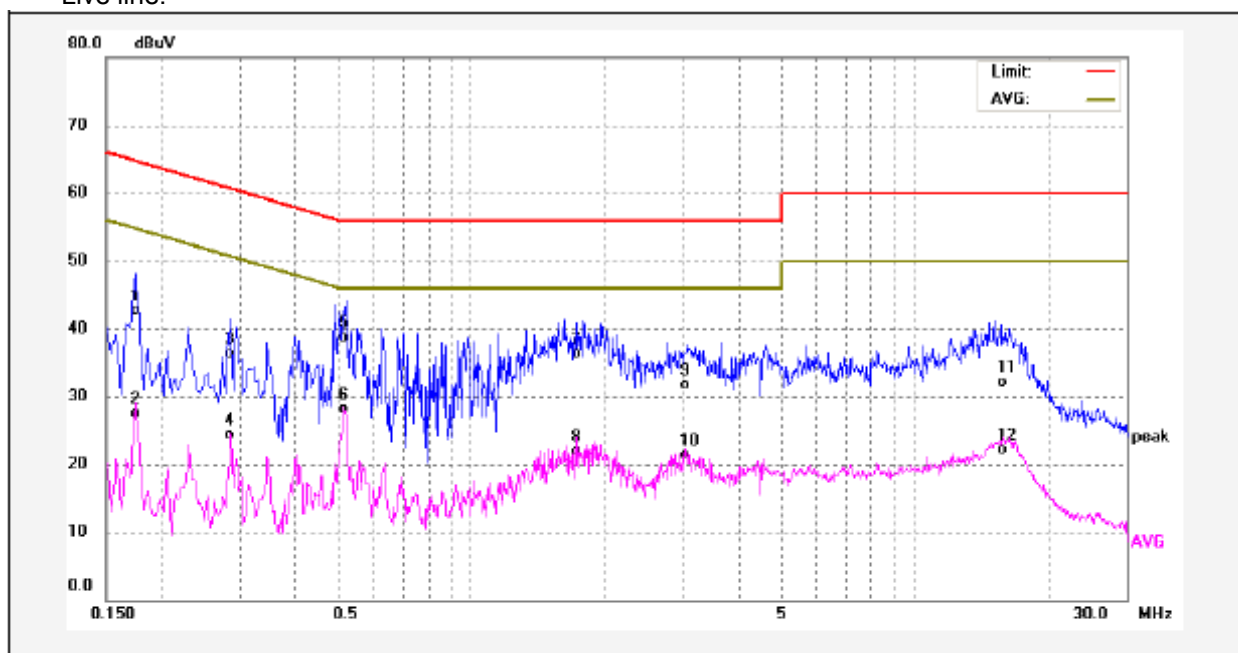

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1740      | 32.37          | 10.24       | 42.61         | 64.76      | -22.15      | QP       |        |
| 2   | 0.1740      | 17.32          | 10.24       | 27.56         | 54.76      | -27.20      | AVG      |        |
| 3   | 0.2860      | 26.06          | 10.21       | 36.27         | 60.64      | -24.37      | QP       |        |
| 4   | 0.2860      | 14.16          | 10.21       | 24.37         | 50.64      | -26.27      | AVG      |        |
| 5   | 0.5140      | 28.51          | 10.20       | 38.71         | 56.00      | -17.29      | QP       |        |
| 6   | 0.5140      | 17.91          | 10.20       | 28.11         | 46.00      | -17.89      | AVG      |        |
| 7   | 1.7340      | 25.94          | 10.31       | 36.25         | 56.00      | -19.75      | QP       |        |
| 8   | 1.7340      | 11.54          | 10.31       | 21.85         | 46.00      | -24.15      | AVG      |        |
| 9   | 3.0380      | 21.20          | 10.43       | 31.63         | 56.00      | -24.37      | QP       |        |
| 10  | 3.0380      | 10.78          | 10.43       | 21.21         | 46.00      | -24.79      | AVG      |        |
| 11  | 15.7220     | 21.55          | 10.58       | 32.13         | 60.00      | -27.87      | QP       |        |
| 12  | 15.7220     | 11.56          | 10.58       | 22.14         | 50.00      | -27.86      | AVG      |        |

Neutral line:

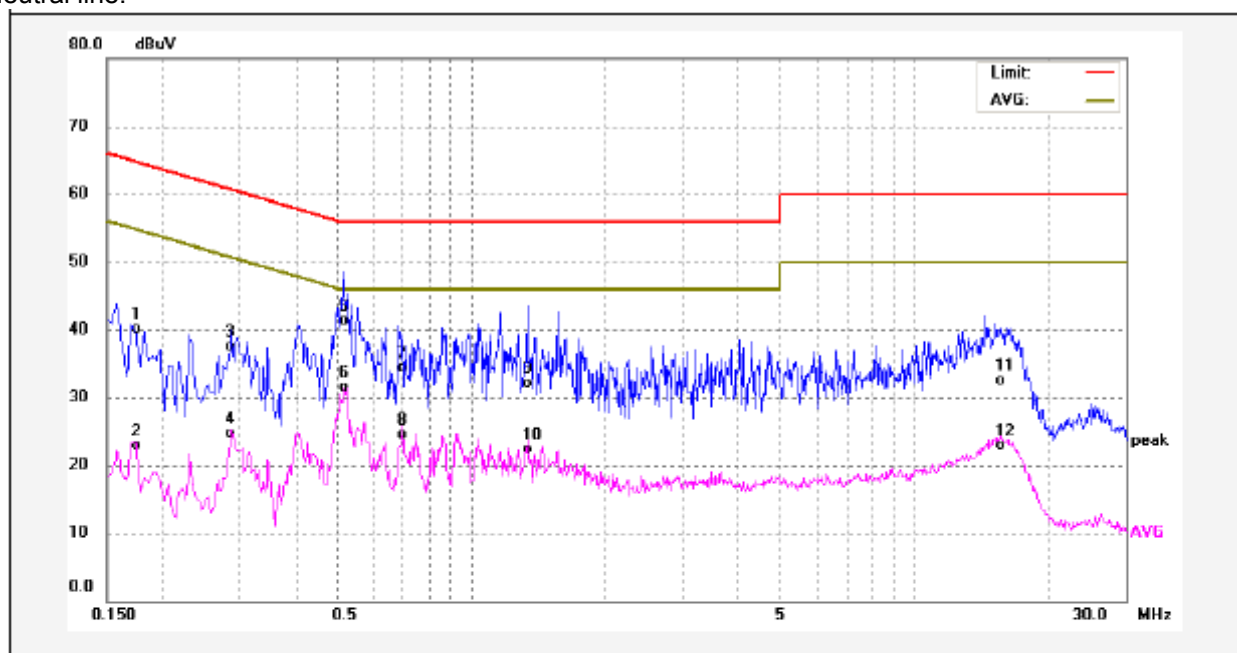

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-------------|----------|--------|
| 1   | 0.1740      | 29.78          | 10.24       | 40.02         | 64.76        | -24.74      | QP       |        |
| 2   | 0.1740      | 12.74          | 10.24       | 22.98         | 54.76        | -31.78      | AVG      |        |
| 3   | 0.2860      | 27.24          | 10.21       | 37.45         | 60.64        | -23.19      | QP       |        |
| 4   | 0.2860      | 14.53          | 10.21       | 24.74         | 50.64        | -25.90      | AVG      |        |
| 5   | 0.5140      | 31.10          | 10.20       | 41.30         | 56.00        | -14.70      | QP       |        |
| 6   | 0.5140      | 21.28          | 10.20       | 31.48         | 46.00        | -14.52      | AVG      |        |
| 7   | 0.6980      | 23.95          | 10.30       | 34.25         | 56.00        | -21.75      | QP       |        |
| 8   | 0.6980      | 14.21          | 10.30       | 24.51         | 46.00        | -21.49      | AVG      |        |
| 9   | 1.3340      | 21.76          | 10.30       | 32.06         | 56.00        | -23.94      | QP       |        |
| 10  | 1.3340      | 12.04          | 10.30       | 22.34         | 46.00        | -23.66      | AVG      |        |
| 11  | 15.5860     | 21.82          | 10.59       | 32.41         | 60.00        | -27.59      | QP       |        |
| 12  | 15.5860     | 12.23          | 10.59       | 22.82         | 50.00        | -27.18      | AVG      |        |

## 8 Radiated Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency<br>(MHz) | Field Strength        |                 | Field Strength Limit at 3m Measurement Dist |                                       |
|--------------------|-----------------------|-----------------|---------------------------------------------|---------------------------------------|
|                    | uV/m                  | Distance<br>(m) | uV/m                                        | dBuV/m                                |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$  | 300             | $10000 * 2400/F(\text{kHz})$                | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$ | 30              | $100 * 24000/F(\text{kHz})$                 | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30         | 30                    | 30              | $100 * 30$                                  | $20\log^{(30)} + 40$                  |
| 30 ~ 88            | 100                   | 3               | 100                                         | $20\log^{(100)}$                      |
| 88 ~ 216           | 150                   | 3               | 150                                         | $20\log^{(150)}$                      |
| 216 ~ 960          | 200                   | 3               | 200                                         | $20\log^{(200)}$                      |
| Above 960          | 500                   | 3               | 500                                         | $20\log^{(500)}$                      |

### 8.1 EUT Operation

Operating Environment:

Temperature: 21.3 °C

Humidity: 50.3 % RH

Atmospheric Pressure: 101.6kPa


Test Voltage: AC 120V, 60Hz

EUT Operation: The test was performed in Transmitting mode, the worst test data ( $\pi/4$ DQPSK modulation) were shown in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

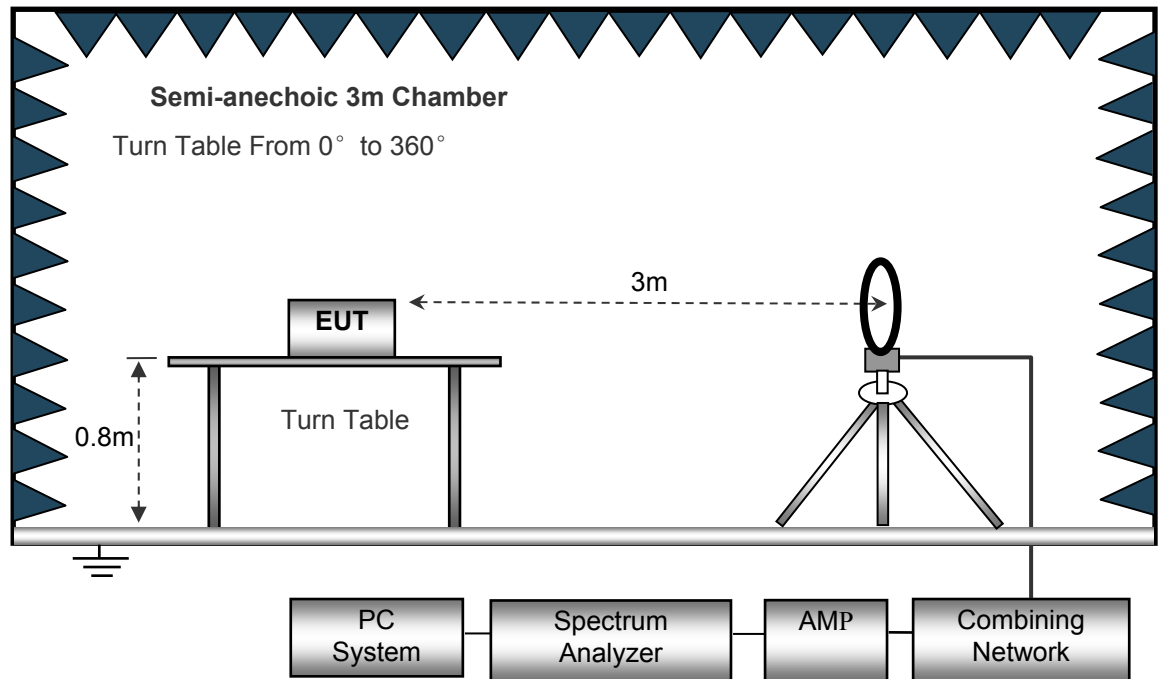

The test setup for emission measurement from 30 MHz to 1 GHz.

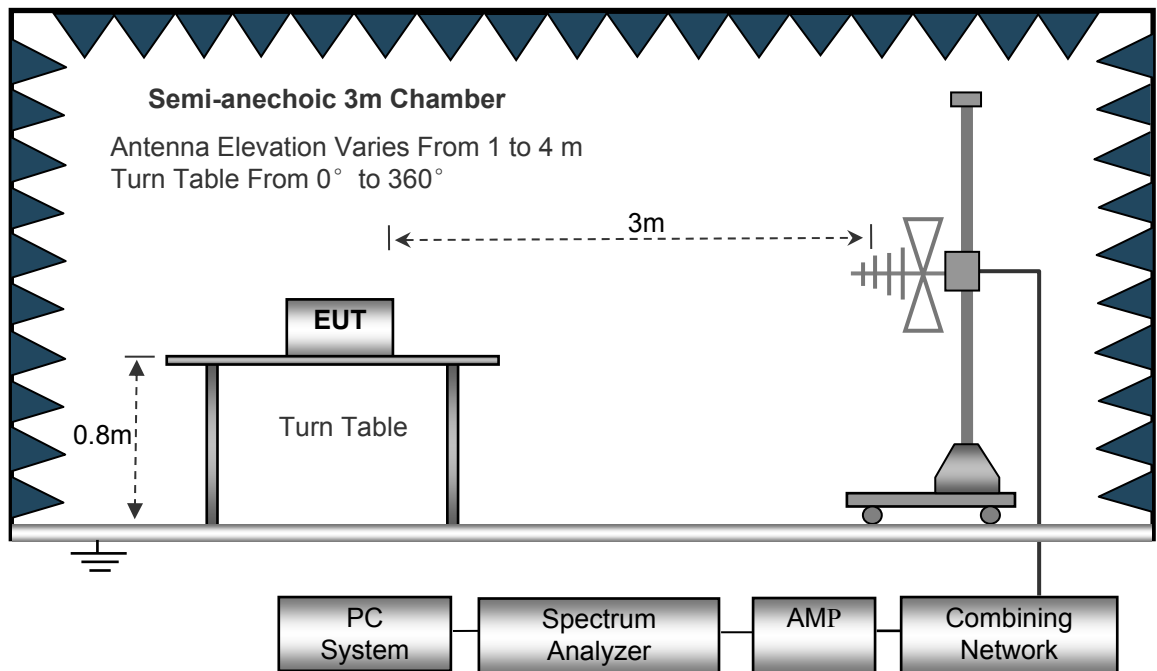

The test setup for emission measurement above 1 GHz.

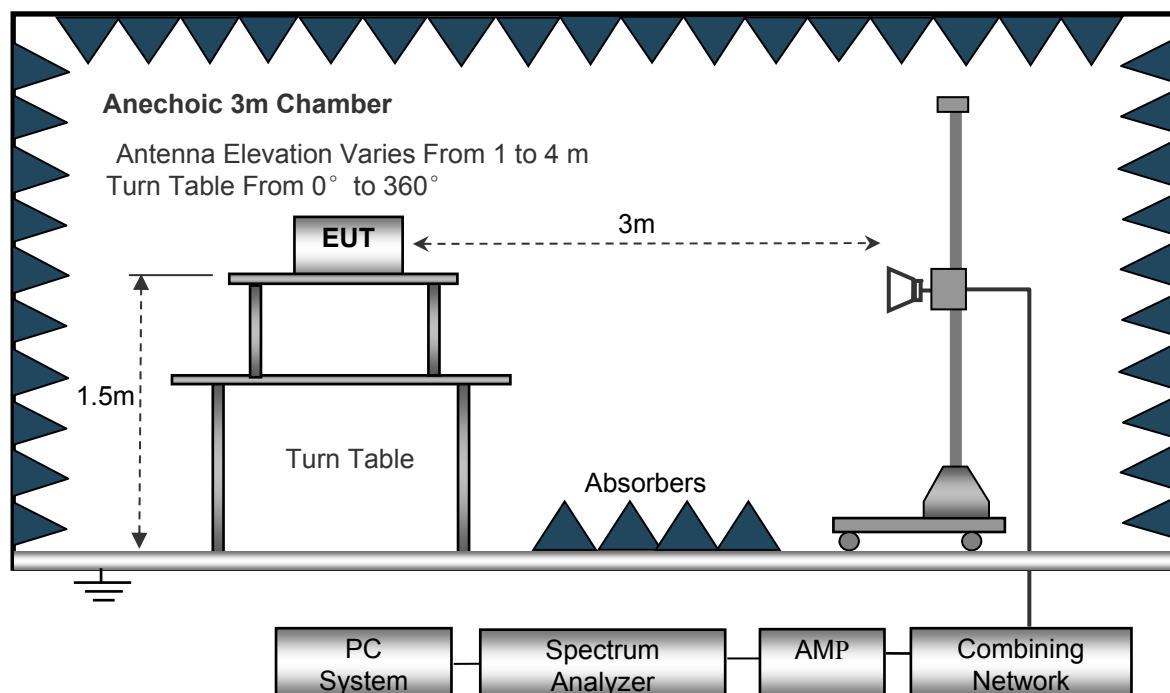

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth ..... 10 kHz  
 Video Bandwidth ..... 10 kHz  
 Resolution Bandwidth ..... 10 kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth ..... 100 kHz  
 Video Bandwidth ..... 300 kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth ..... 1 MHz  
 Video Bandwidth ..... 3 MHz  
 Detector ..... Ave.  
 Resolution Bandwidth ..... 1 MHz  
 Video Bandwidth ..... 10 Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

**Note:** Only the worst-case  $\pi/4$ DQPSK mode were record in the report.

### Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 8GHz

| Frequency                         | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|-----------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                                   |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                             | (dB $\mu$ V)     | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dB $\mu$ V/m)      | (dB $\mu$ V/m)          | (dB)   |
| $\pi/4$ DQPSK Low Channel 2402MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 215.38                            | 47.63            | QP          | 48               | 2.0        | H     | -16.25           | 31.38               | 46.00                   | -14.62 |
| 215.38                            | 51.51            | QP          | 184              | 1.3        | V     | -16.25           | 35.26               | 46.00                   | -10.74 |
| 4804.00                           | 54.69            | PK          | 193              | 1.3        | V     | -1.06            | 53.63               | 74.00                   | -20.37 |
| 4804.00                           | 43.85            | Ave         | 193              | 1.3        | V     | -1.06            | 42.79               | 54.00                   | -11.21 |
| 7206.00                           | 46.17            | PK          | 138              | 1.9        | H     | 1.33             | 47.50               | 74.00                   | -26.50 |
| 7206.00                           | 36.31            | Ave         | 138              | 1.9        | H     | 1.33             | 37.64               | 54.00                   | -16.36 |
| 2326.36                           | 46.30            | PK          | 147              | 1.2        | V     | -13.19           | 33.11               | 74.00                   | -40.89 |
| 2326.36                           | 37.05            | Ave         | 147              | 1.2        | V     | -13.19           | 23.86               | 54.00                   | -30.14 |
| 2380.18                           | 42.94            | PK          | 18               | 1.3        | H     | -13.14           | 29.80               | 74.00                   | -44.20 |
| 2380.18                           | 37.83            | Ave         | 18               | 1.3        | H     | -13.14           | 24.69               | 54.00                   | -29.31 |
| 2495.19                           | 44.80            | PK          | 58               | 1.7        | V     | -13.08           | 31.72               | 74.00                   | -42.28 |
| 2495.19                           | 38.56            | Ave         | 58               | 1.7        | V     | -13.08           | 25.48               | 54.00                   | -28.52 |

| Frequency                       | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|---------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                                 |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                           | (dBμV)           | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dBμV/m)            | (dBμV/m)                | (dB)   |
| π/4DQPSK Middle Channel 2441MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 215.38                          | 47.07            | QP          | 276              | 1.7        | H     | -16.25           | 30.82               | 46.00                   | -15.18 |
| 215.38                          | 51.28            | QP          | 144              | 1.2        | V     | -16.25           | 35.03               | 46.00                   | -10.97 |
| 4882.00                         | 53.74            | PK          | 57               | 1.4        | V     | -0.62            | 53.12               | 74.00                   | -20.88 |
| 4882.00                         | 42.66            | Ave         | 57               | 1.4        | V     | -0.62            | 42.04               | 54.00                   | -11.96 |
| 7323.00                         | 45.52            | PK          | 190              | 1.3        | H     | 2.21             | 47.73               | 74.00                   | -26.27 |
| 7323.00                         | 34.89            | Ave         | 190              | 1.3        | H     | 2.21             | 37.10               | 54.00                   | -16.90 |
| 2331.50                         | 45.82            | PK          | 132              | 1.8        | V     | -13.19           | 32.63               | 74.00                   | -41.37 |
| 2331.50                         | 35.62            | Ave         | 132              | 1.8        | V     | -13.19           | 22.43               | 54.00                   | -31.57 |
| 2385.11                         | 42.60            | PK          | 360              | 1.2        | H     | -13.14           | 29.46               | 74.00                   | -44.54 |
| 2385.11                         | 36.61            | Ave         | 360              | 1.2        | H     | -13.14           | 23.47               | 54.00                   | -30.53 |
| 2485.60                         | 44.67            | PK          | 199              | 1.2        | V     | -13.08           | 31.59               | 74.00                   | -42.41 |
| 2485.60                         | 37.29            | Ave         | 199              | 1.2        | V     | -13.08           | 24.21               | 54.00                   | -29.79 |

| Frequency                          | Receiver Reading | Detector    | Turn table Angle | RX Antenna |       | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 |        |
|------------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
|                                    |                  |             |                  | Height     | Polar |                  |                     | Limit                   | Margin |
| (MHz)                              | (dB $\mu$ V)     | (PK/QP/Ave) | Degree           | (m)        | (H/V) | (dB)             | (dB $\mu$ V/m)      | (dB $\mu$ V/m)          | (dB)   |
| $\pi$ /4DQPSK High Channel 2480MHz |                  |             |                  |            |       |                  |                     |                         |        |
| 215.38                             | 46.05            | QP          | 334              | 1.0        | H     | -16.25           | 29.80               | 46.00                   | -16.20 |
| 215.38                             | 50.83            | QP          | 206              | 1.6        | V     | -16.25           | 34.58               | 46.00                   | -11.42 |
| 4960.00                            | 52.42            | PK          | 218              | 1.6        | V     | -0.24            | 52.18               | 74.00                   | -21.82 |
| 4960.00                            | 41.79            | Ave         | 218              | 1.6        | V     | -0.24            | 41.55               | 54.00                   | -12.45 |
| 7440.00                            | 44.07            | PK          | 133              | 1.7        | H     | 2.84             | 46.91               | 74.00                   | -27.09 |
| 7440.00                            | 34.15            | Ave         | 133              | 1.7        | H     | 2.84             | 36.99               | 54.00                   | -17.01 |
| 2341.03                            | 44.52            | PK          | 159              | 1.1        | V     | -13.19           | 31.33               | 74.00                   | -42.67 |
| 2341.03                            | 34.40            | Ave         | 159              | 1.1        | V     | -13.19           | 21.21               | 54.00                   | -32.79 |
| 2386.42                            | 42.79            | PK          | 120              | 1.6        | H     | -13.14           | 29.65               | 74.00                   | -44.35 |
| 2386.42                            | 35.49            | Ave         | 120              | 1.6        | H     | -13.14           | 22.35               | 54.00                   | -31.65 |
| 2487.76                            | 43.84            | PK          | 0                | 1.0        | V     | -13.08           | 30.76               | 74.00                   | -43.24 |
| 2487.76                            | 36.68            | Ave         | 0                | 1.0        | V     | -13.08           | 23.60               | 54.00                   | -30.40 |

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.


## 9 Band Edge Measurement

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test Limit:       | Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
| Test Mode:        | Transmitting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100 kHz, VBW = 300 kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 9.2 Test Setup

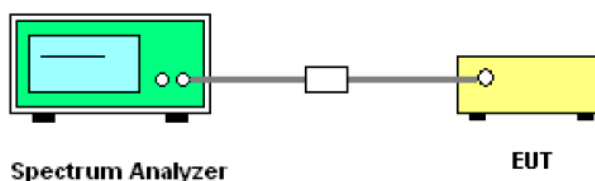


9.3 Test Result

Test plots


Modulation: GFSK

Transmitting Band edge-left side

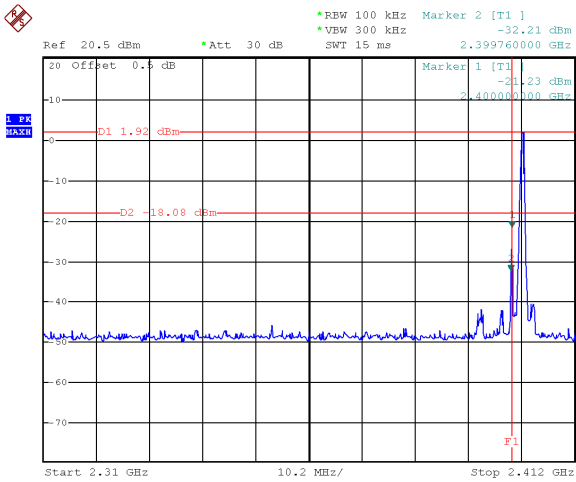


Date: 31.MAY.2022 16:41:32

Hopping Band edge-left side

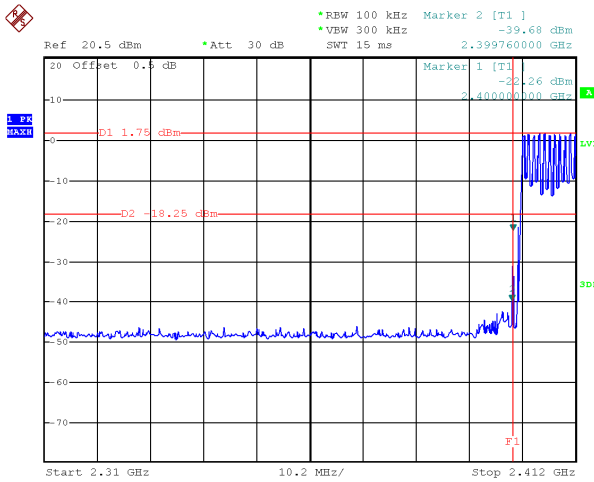


Date: 31.MAY.2022 16:43:25

Transmitting Band edge-right side

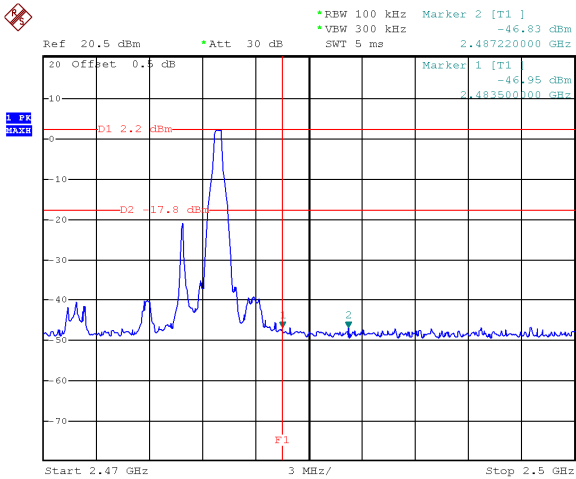

Date: 31.MAY.2022 17:03:12


Hopping Band edge-right side

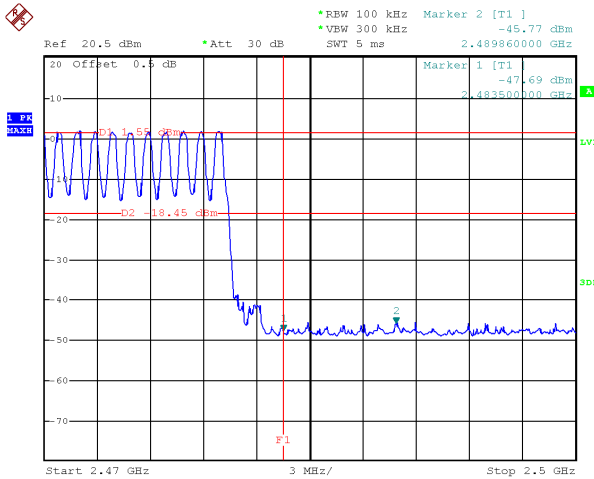

Date: 6.JUN.2022 12:43:37


Modulation:  $\pi/4$  DQPSK

Transmitting Band edge-left side

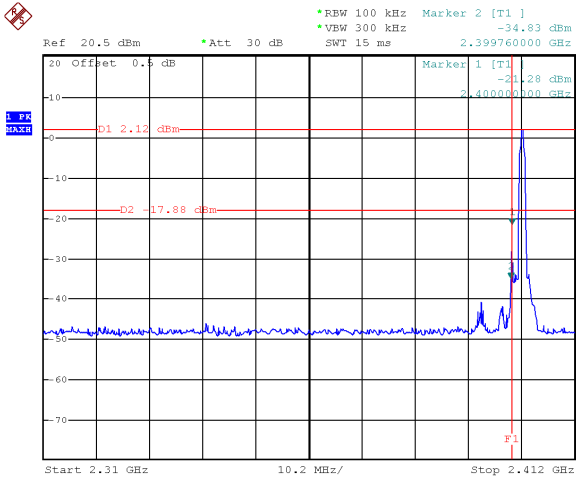


Date: 31.MAY.2022 16:40:50

Hopping Band edge-left side

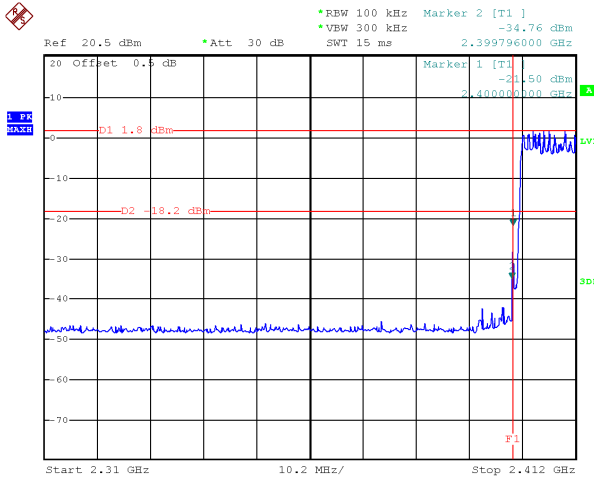


Date: 31.MAY.2022 16:58:40

Transmitting Band edge-right side

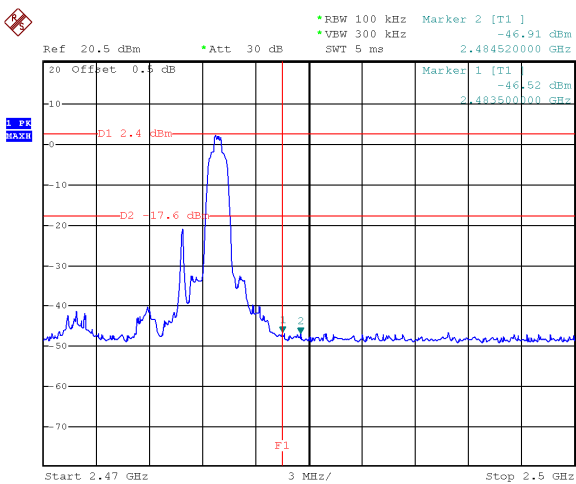

Date: 31.MAY.2022 17:01:12

Hopping Band edge-right side

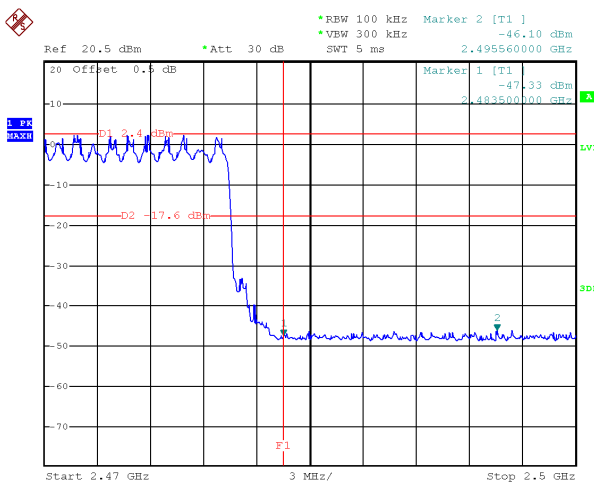

Date: 31.MAY.2022 17:09:28

## 10 Bandwidth Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (2)

Test Method: ANSI C63.10:2013


Test Limit: The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 10.2 Test Setup

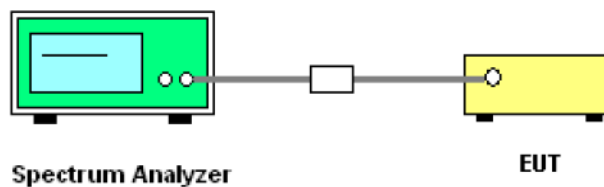

### 10.3 Test Result



| Modulation    | Test Channel | 20 dB Bandwidth<br>MHz | 99% Bandwidth<br>MHz |
|---------------|--------------|------------------------|----------------------|
| GFSK          | Low          | 1.082                  | 0.926                |
| GFSK          | Middle       | 1.096                  | 0.915                |
| GFSK          | High         | 1.063                  | 0.906                |
| $\pi/4$ DQPSK | Low          | 1.353                  | 1.226                |
| $\pi/4$ DQPSK | Middle       | 1.366                  | 1.220                |
| $\pi/4$ DQPSK | High         | 1.357                  | 1.215                |

Test plots


Modulation: GFSK

Low Channel

Middle Channel

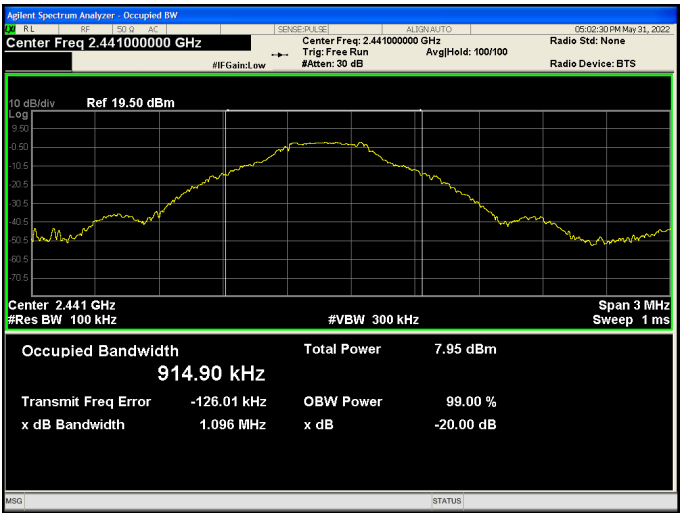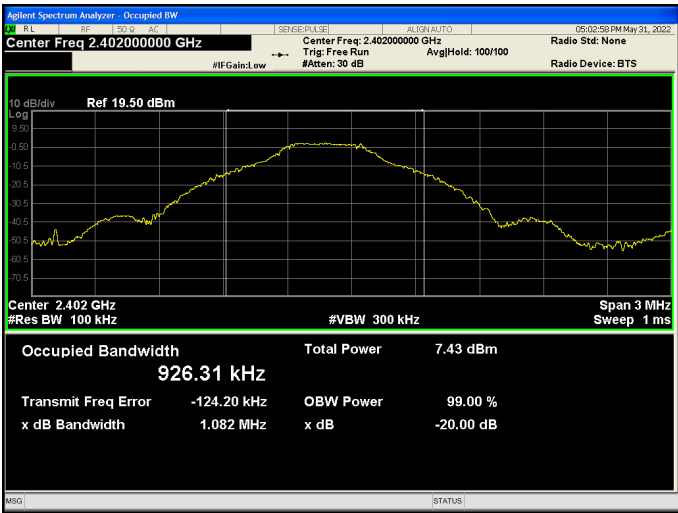



High Channel

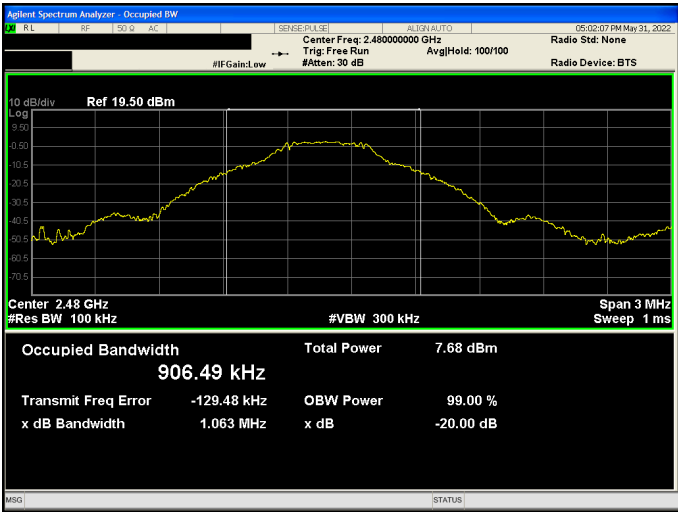


Modulation:  $\pi/4$  DQPSK

Low Channel

Middle Channel

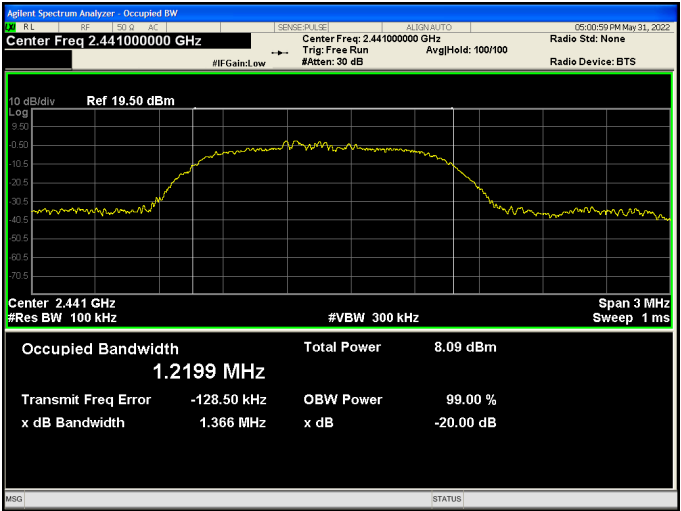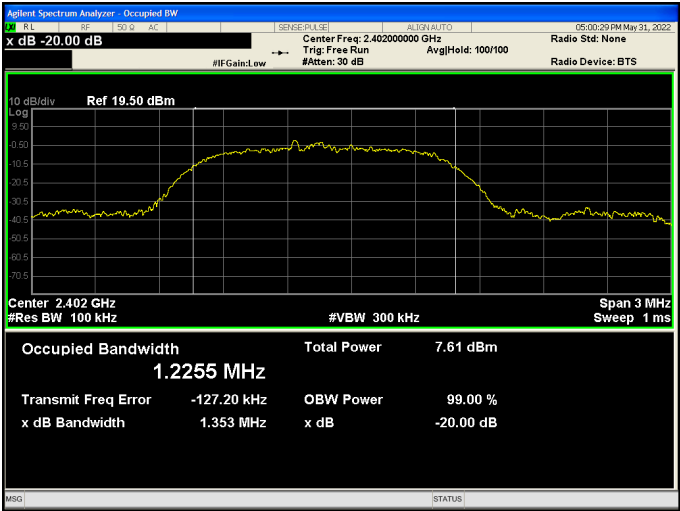

High Channel

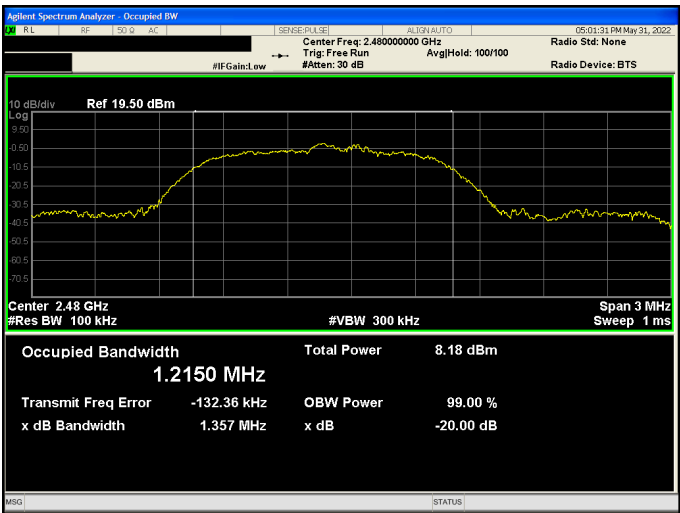

## 11 Maximum Peak Output Power

Test Requirement: FCC 47CFR Part 15 Section 15.247 (b)

Test Method: ANSI C63.10:2013


Test Limit: The maximum output power limit for DTS devices is specified as 1 W and is expressed in terms of either maximum peak conducted output power or maximum conducted output power.

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 11.2 Test Setup

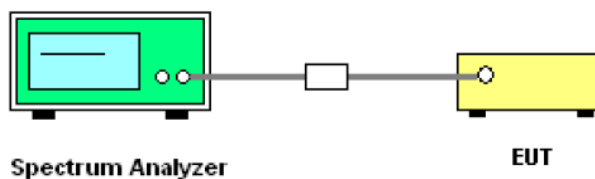


### 11.3 Test Result

| Test Mode     | Data Rate | Peak Power(dBm) |                |              | Limit (dBm) |
|---------------|-----------|-----------------|----------------|--------------|-------------|
|               |           | Low Channel     | Middle Channel | High Channel |             |
| GFSK          | 1Mbps     | 2.24            | 2.44           | 2.50         | 30          |
| $\pi/4$ DQPSK | 2Mbps     | 2.99            | 3.14           | <b>3.18</b>  | 30          |

Test plots


Modulation: GFSK

Low Channel

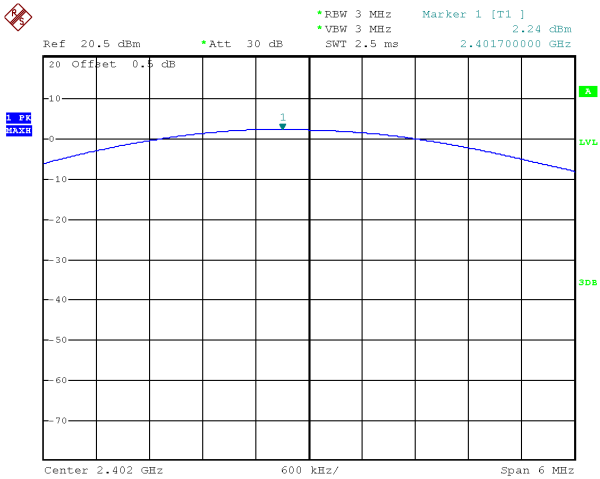


Date: 31.MAY.2022 16:10:28

Middle Channel

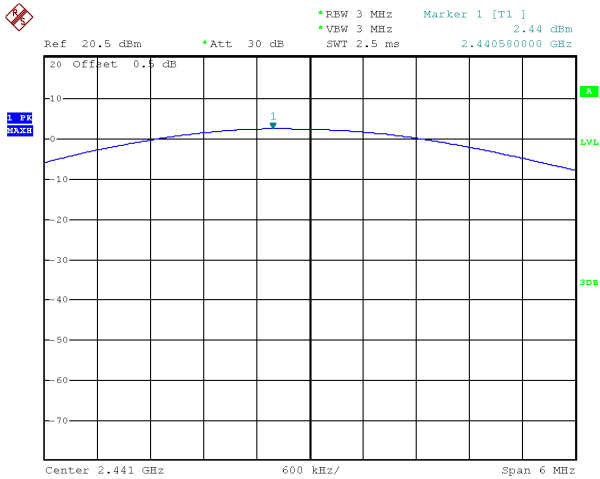

Date: 31.MAY.2022 16:09:32


High Channel

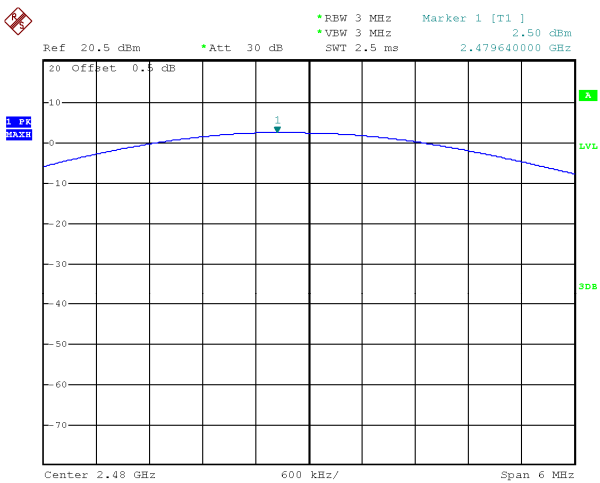

Date: 31.MAY.2022 16:08:53


Modulation:  $\pi/4$  DQPSK

Low Channel

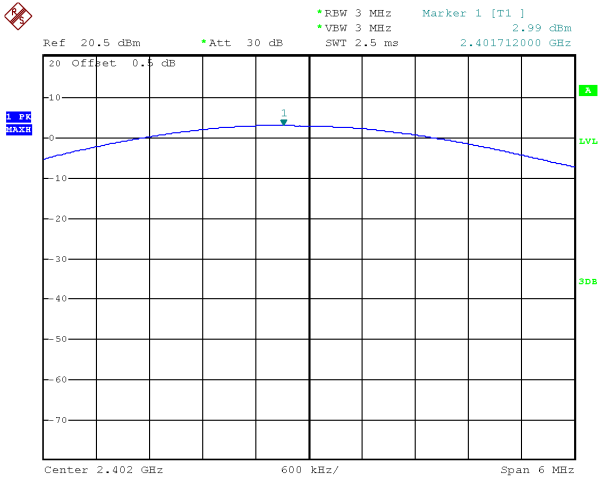


Date: 31.MAY.2022 16:00:34

Middle Channel

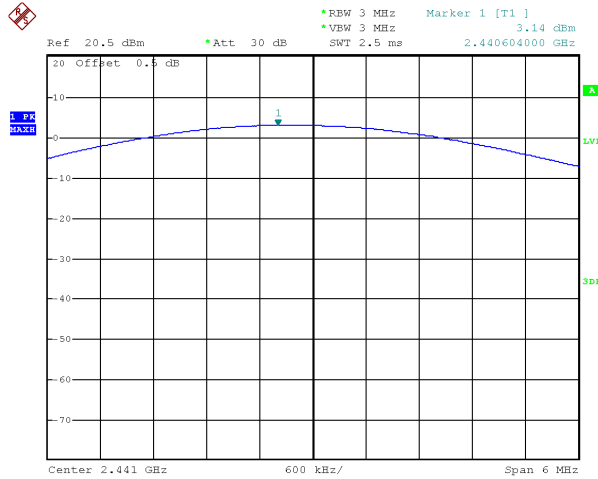

Date: 31.MAY.2022 16:08:05

High Channel

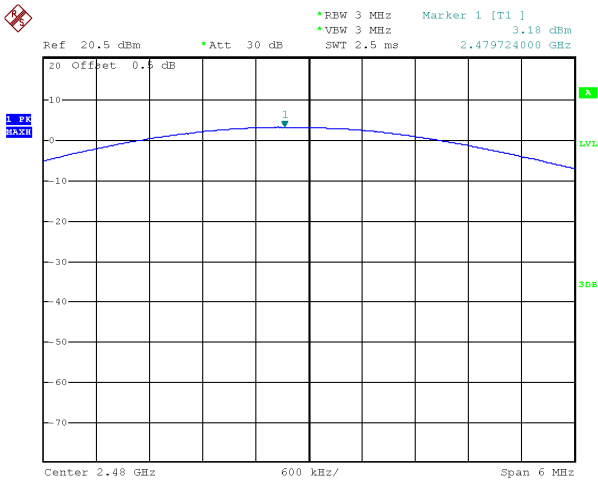

Date: 31.MAY.2022 16:08:28

## 12 Hopping Channel Separation

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1)

Test Method: ANSI C63.10:2013


Test Limit: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Mode: Test in hopping transmitting operating mode.

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30 kHz. VBW = 100 kHz, Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

### 12.2 Test Setup

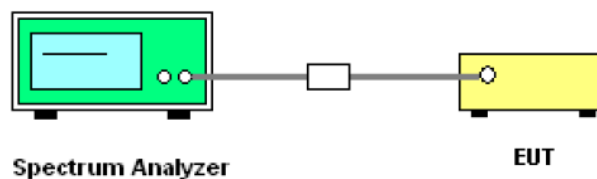

### 12.3 Test Result


Test result plot as follows:

| Modulation    | Test Channel | Test Result<br>MHz | 20dB Bandwidth<br>MHz | Limits (2/3 20dB Bandwidth)<br>MHz |
|---------------|--------------|--------------------|-----------------------|------------------------------------|
| GFSK          | Low          | 1.002              | 1.082                 | 0.721                              |
| GFSK          | Middle       | 1.002              | 1.096                 | 0.731                              |
| GFSK          | High         | 0.996              | 1.063                 | 0.709                              |
| $\pi/4$ DQPSK | Low          | 1.002              | 1.353                 | 0.902                              |
| $\pi/4$ DQPSK | Middle       | 1.008              | 1.366                 | 0.911                              |
| $\pi/4$ DQPSK | High         | 0.996              | 1.357                 | 0.905                              |

Test plots


Modulation: GFSK

Low Channel

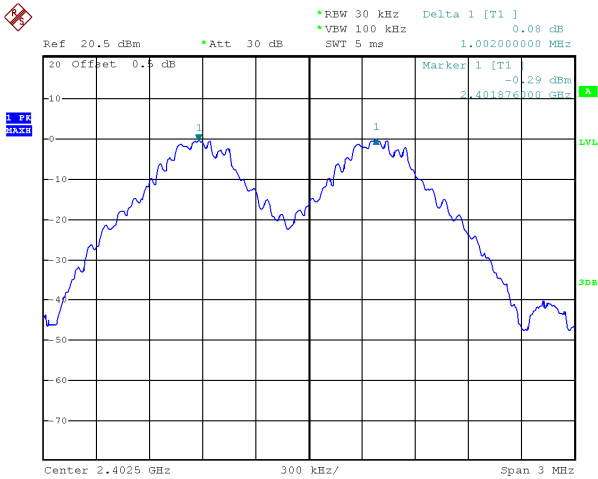


Date: 31.MAY.2022 16:33:28

Middle Channel

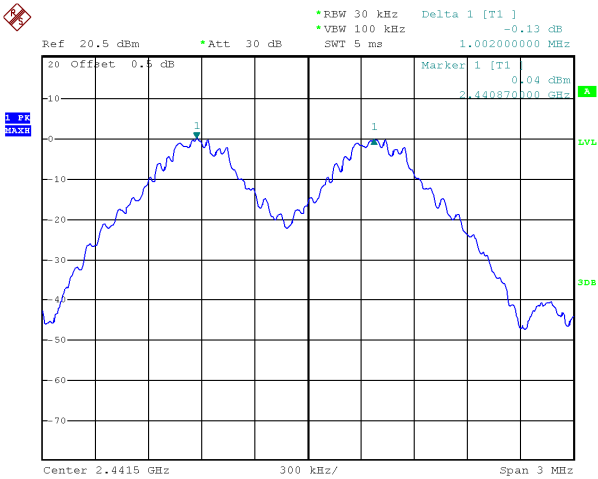

Date: 31.MAY.2022 16:32:15


High Channel

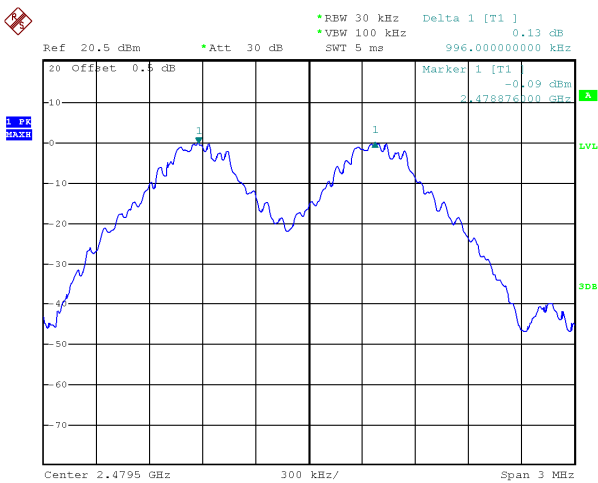

Date: 31.MAY.2022 16:27:11


Modulation:  $\pi/4$  DQPSK

Low Channel

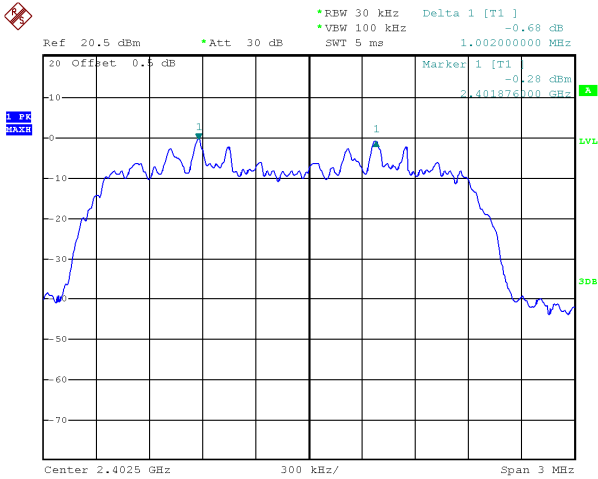


Date: 31.MAY.2022 16:39:00

Middle Channel

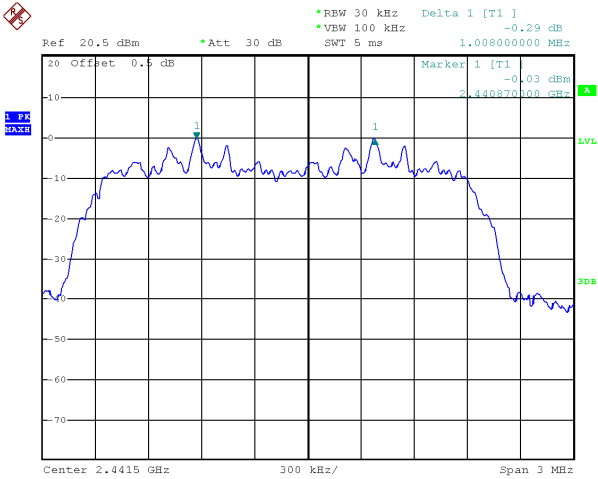

Date: 31.MAY.2022 16:31:20

High Channel

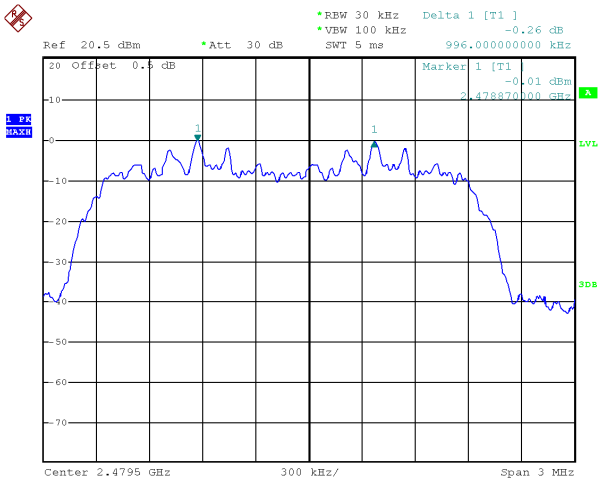

Date: 31.MAY.2022 16:30:28

## 13 Number of Hopping Frequency

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1) (iii)

Test Method: ANSI C63.10:2013


Test Limit: Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

### 13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 13.2 Test Setup

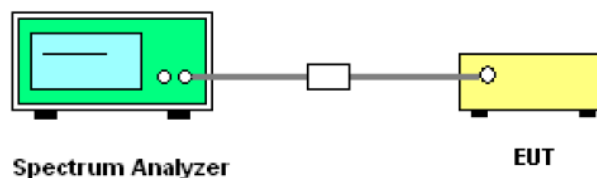


13.3 Test Result

Total Channels are 79 Channels.


Test Plot

Modulation: GFSK

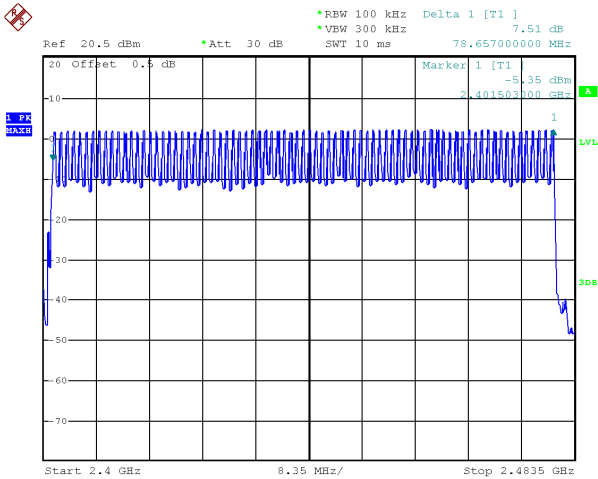

Date: 31.MAY.2022 17:28:52

Modulation:  $\pi/4$  DQPSK

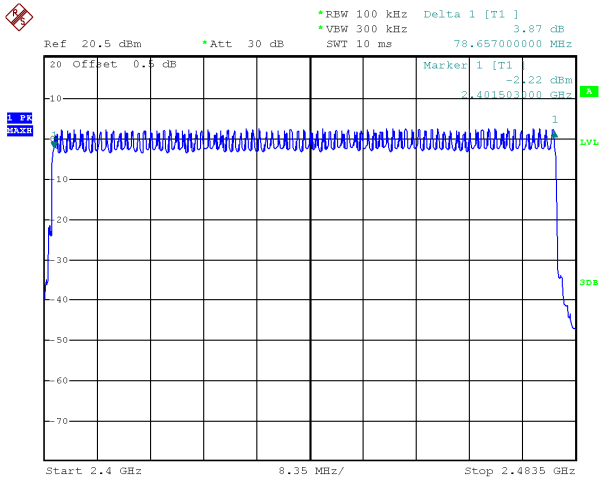

Date: 31.MAY.2022 17:48:59

## 14 Dwell Time

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1) (iii)

Test Method: ANSI C63.10:2013

Test Limit: Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

### 14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz. Centred on a hopping channel;
3. Set RBW = 1 MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

The test period:  $T = 0.4(s) \times 79 = 31.6(s)$

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX).

So, the Dwell Time can be calculated as follows:

| Data Packet | Dwell Time(s)                                         |
|-------------|-------------------------------------------------------|
| DH5         | $1600/79/6 \times 31.6 \times (\text{MkrDelta})/1000$ |
| DH3         | $1600/79/4 \times 31.6 \times (\text{MkrDelta})/1000$ |
| DH1         | $1600/79/2 \times 31.6 \times (\text{MkrDelta})/1000$ |
| Remark      | Mkr Delta is single pulse time.                       |

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

14.2 Test Setup

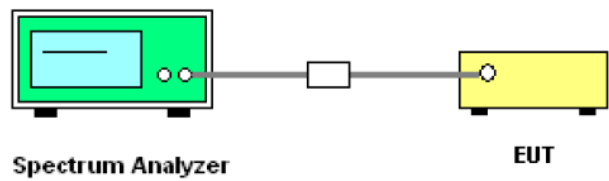

14.3 Test Result


| Modulation    | Data Packet | Channel | pulse time(ms) | Dwell Time(s) | Limits(s) |
|---------------|-------------|---------|----------------|---------------|-----------|
| GFSK          | DH5         | Low     | 2.900          | 0.309         | <0.4      |
|               |             | Middle  | 2.880          | 0.307         | <0.4      |
|               |             | High    | 2.900          | 0.309         | <0.4      |
| $\pi/4$ DQPSK | 2DH5        | Low     | 2.900          | 0.309         | <0.4      |
|               |             | Middle  | 2.900          | 0.309         | <0.4      |
|               |             | High    | 2.900          | 0.309         | <0.4      |

Test Plot

Modulation: GFSK


Data Packet: DH5

Low Channel

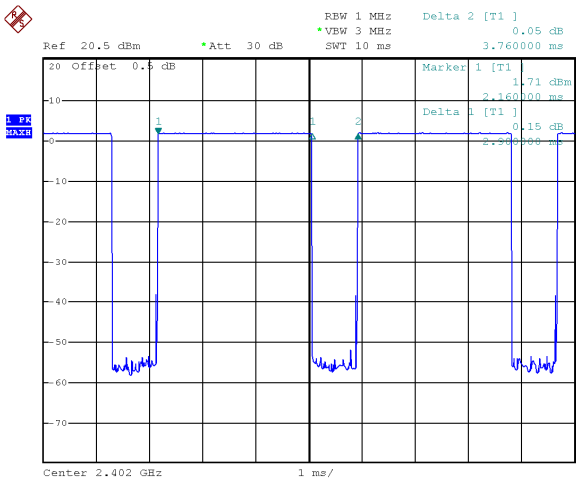


Date: 31.MAY.2022 16:17:17

Middle Channel

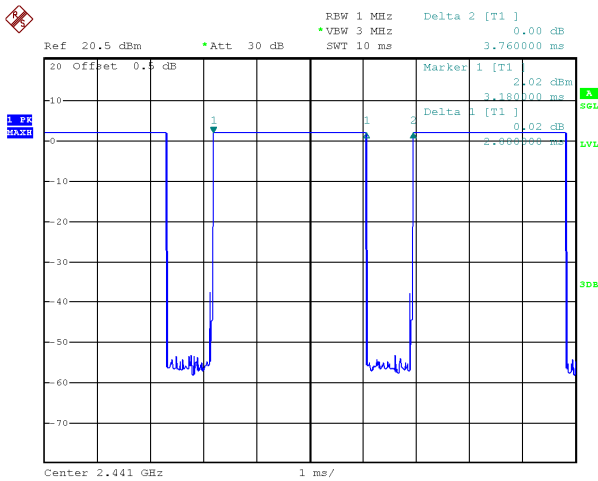

Date: 31.MAY.2022 16:16:27

High Channel

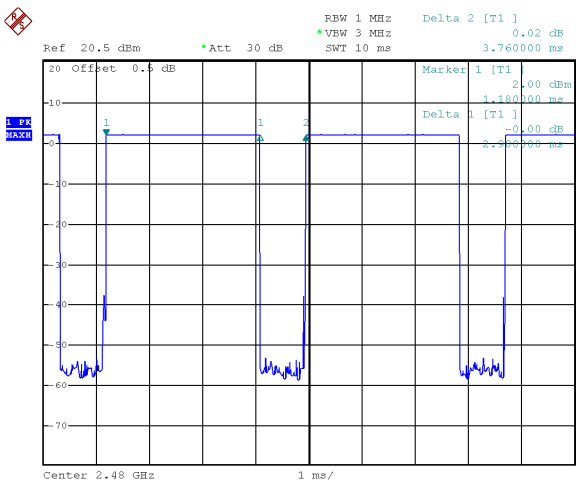


Date: 31.MAY.2022 16:15:41

Modulation:  $\pi/4$  DQPSK


Data Packet: 2DH5

Low Channel

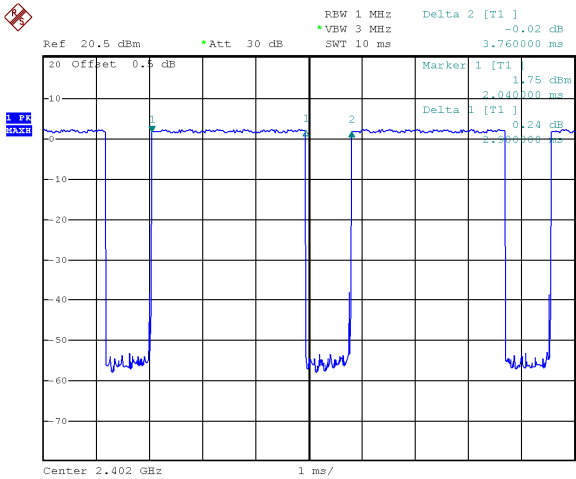


Date: 31.MAY.2022 16:18:04

Middle Channel

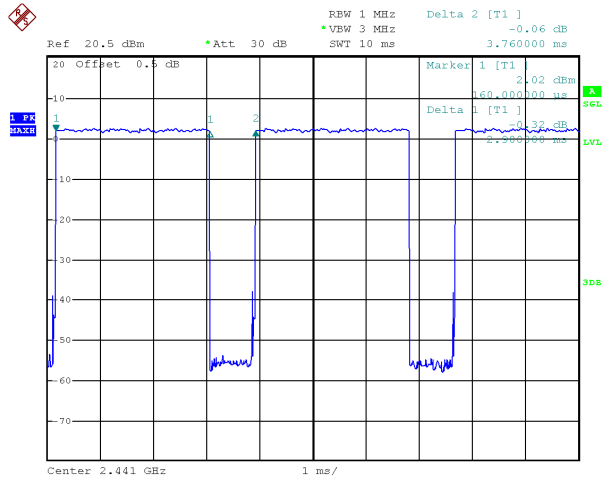

Date: 31.MAY.2022 16:23:24

High Channel

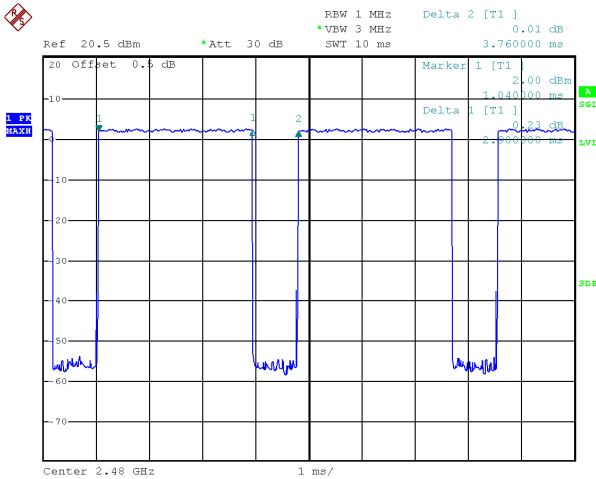

Date: 31.MAY.2022 16:24:05

## **15 Antenna Requirement**

According to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

This product has an integrated antenna fulfill the requirement of this section.

Note: Please refer to EUT photos for more details.

## **16 RF Exposure**

Note: Please refer to RF Exposure Report: WTD22D05102931W002\_FCC MPE report.

## **17 Photographs –Test Setup and EUT Photos**

Note: Please refer to appendix: Appendix- BT2.1PT-Photos.

=====End of Report=====