



# FCC RADIO TEST REPORT

**FCC ID** : RI7FN980  
**Equipment** : 5G/ LTE M.2 Data Card  
**Brand Name** : Telit  
**Model Name** : FN980  
**Maketing Name** : FN980  
**Applicant** : TELIT COMMUNICATIONS S.P.A.  
VIA STAZIONE DI PROSECCO 5B - SGONICO  
-TRIESTE - ITALY  
**Manufacturer** : TELIT COMMUNICATIONS S.P.A.  
VIA STAZIONE DI PROSECCO 5B - SGONICO  
-TRIESTE - ITALY  
**Standard** : FCC 47 CFR Part 2, 27

The case was received on Mar. 24, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>1 General Description .....</b>	<b>4</b>
1.1 Product Feature of Equipment Under Test.....	4
1.2 Modification of EUT .....	4
<b>Appendix A. Test Report</b>	

## History of this test report

### **Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

### Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Vivian Hsu



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR and GNSS.

Product Feature	
Antenna Type	<p><b>WWAN:</b> &lt;Ant. 0&gt; Dipole Antenna &lt;Ant. 1&gt; Dipole Antenna &lt;Ant. 2&gt; Dipole Antenna &lt;Ant. 3&gt; Dipole Antenna</p> <p><b>GNSS :</b> <b>&lt;1559 MHz ~ 1610 MHz&gt;:</b> &lt;Ant. 3&gt; Dipole Antenna &lt;Ant. 4&gt; Dipole Antenna <b>&lt;1164 MHz ~ 1215 MHz&gt;:</b> &lt;Ant. 2&gt; Dipole Antenna</p>

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. This is a variant report by adding 5G NR n77, n78 via software. All the test cases were performed on original report which can be referred to Sporton Report Number FG031715-08C.
3. The RF design is the electrically identical across all two models FN980 and FN980m except that FN980 does not support mmWave functions, please find the product equality letter as provided by manufacturer. The test has been performed with the selected model FN980m. Besides, the model FN980 has been verified consistency. Hence, the test data of FN980m can represent among all the two models in this test report. All the test cases were performed on test report which can be referred to Sporton Report Number FG031715-16B as Appendix A.

### 1.2 Modification of EUT

No modifications are made to the EUT during all test items



## **Appendix A. Test Report**

Please refer to Sporton report number FG031715-16B as below.



# FCC RADIO TEST REPORT

**FCC ID** : RI7FN980M  
**Equipment** : 5G/ LTE M.2 Data Card  
**Brand Name** : Telit  
**Model Name** : FN980m  
**Maketing Name** : FN980m  
**Applicant** : TELIT COMMUNICATIONS S.P.A.  
VIA STAZIONE DI PROSECCO 5B - SGONICO  
-TRIESTE - ITALY  
**Manufacturer** : TELIT COMMUNICATIONS S.P.A.  
VIA STAZIONE DI PROSECCO 5B - SGONICO  
-TRIESTE - ITALY  
**Standard** : FCC 47 CFR Part 2, 27

The product was received on Feb. 23, 2022 and testing was performed from Mar. 21, 2022 to May 26, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system .....	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels .....	9
<b>3 Conducted Test Items.....</b>	<b>10</b>
3.1 Measuring Instruments .....	10
3.2 Conducted Output Power and EIRP .....	11
3.3 Peak-to-Average Ratio .....	12
3.4 Occupied Bandwidth.....	13
3.5 Conducted Band Edge .....	14
3.6 Conducted Spurious Emission .....	15
3.7 Frequency Stability .....	16
<b>4 Radiated Test Items .....</b>	<b>17</b>
4.1 Measuring Instruments .....	17
4.2 Radiated Spurious Emission Measurement .....	19
<b>5 List of Measuring Equipment.....</b>	<b>20</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>21</b>

**Appendix A. Test Results of Conducted Test****Appendix B. Test Results of Radiated Test****Appendix C. Test Setup Photographs**



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)	Pass	
3.3	§27.50 (k)(4)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)	Pass	-
3.6	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)	Pass	-
3.7	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)	Pass	Under limit 15.91 dB at 13805.000 MHz

**Note:** This is a variant report by adding 5G NR n77, n78 via software. All the test cases were performed on original report which can be referred to Sporton Report Number FG031715-09C. Based on the original report, the test cases were verified.

### Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

### Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Vivian Hsu



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR and GNSS.

Product Feature	
Antenna Type	<p><b>WWAN:</b> &lt;Ant. 0&gt; Dipole Antenna &lt;Ant. 1&gt; Dipole Antenna &lt;Ant. 2&gt; Dipole Antenna &lt;Ant. 3&gt; Dipole Antenna</p> <p><b>GNSS :</b> <b>&lt;1559 MHz ~ 1610 MHz&gt;:</b> &lt;Ant. 3&gt; Dipole Antenna &lt;Ant. 4&gt; Dipole Antenna <b>&lt;1164 MHz ~ 1215 MHz&gt;:</b> &lt;Ant. 2&gt; Dipole Antenna</p>

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sportun Site No.</b> TH03-HY
<b>Test Engineer</b>	Luffy Lin
<b>Temperature (°C)</b>	23.5~24.1
<b>Relative Humidity (%)</b>	48~52
<b>Test Site</b>	Sportun International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> 03CH12-HY (TAF Code: 3786)
<b>Test Engineer</b>	Jack Cheng and Wilson Wu
<b>Temperature (°C)</b>	21.6~26.2
<b>Relative Humidity (%)</b>	56~68
<b>Remark</b>	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168


D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config (Horizontal and Vertical), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Ant. Vertical as worst plane.

Test Items	NR Band	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	v			-		-		-		v	v	v	v	v			v		v		v
	n78	v									v	v	v	v	v			v		v		v
26dB and 99% Bandwidth	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v			v		v		v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v		v
Conducted Band Edge	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Conducted Spurious Emission	n77	v			-		-		-		v							v		v	v	v
	n78	v									v							v		v	v	v
Frequency Stability	n77	v			-		-		-		v								v		v	v
	n78	v									v								v		v	v
E.I.R.P	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v	v	v	Max. Power				
	n78	v	v	v	v	v		v	v	v	v	v	v	v	v	v	v					
Radiated Spurious Emission	n77	Worst Case															v	v	v			
	n78	Covered by n77																				
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant.</li> <li>Test combination are EN-DC 2A_n77A, 5A_n77A, 7A_n77A, 12A_n77A, 13A_n77A, 14A_n77A, 30A_n77A, 66A_n77A.</li> </ol>																					



## 2.2 Connection Diagram of Test System

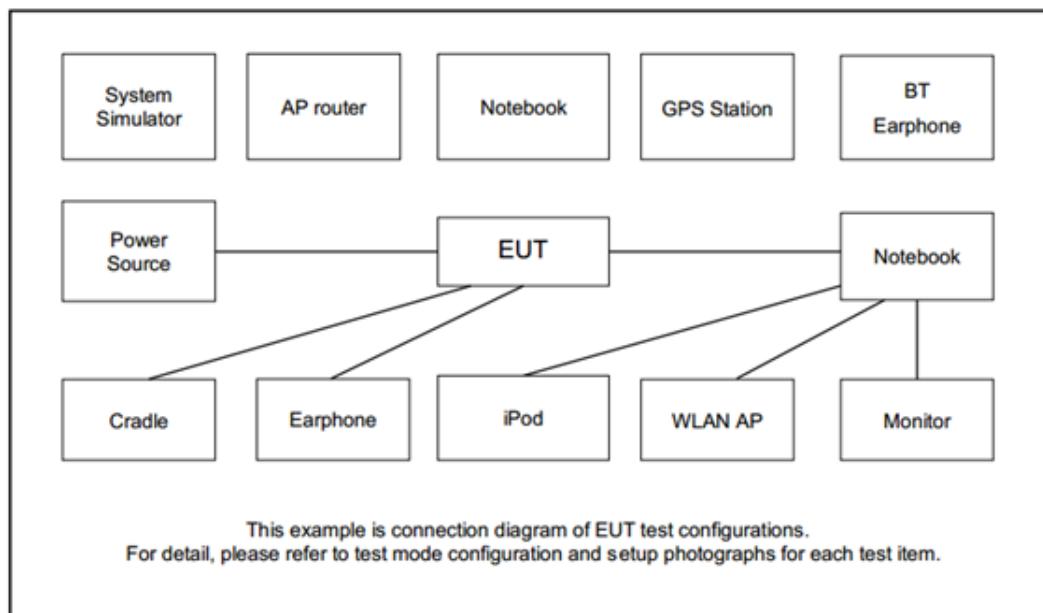

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GW Insteck	SPS-606	N/A	N/A	Unshielded, 1.8m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

5G NR Band n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540

5G NR n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

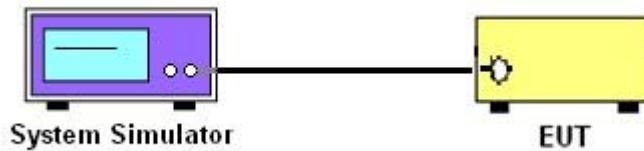

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

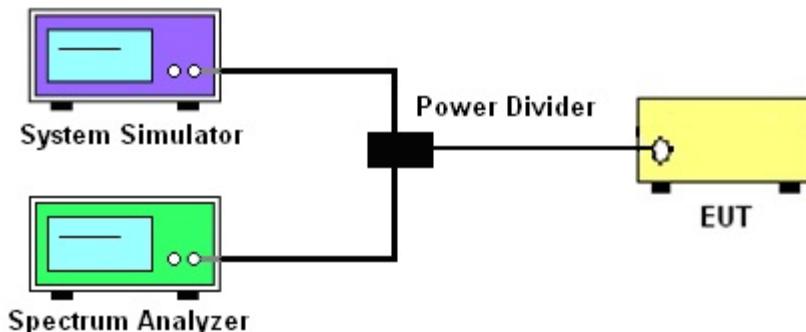

##### 3.1.4 Frequency Stability

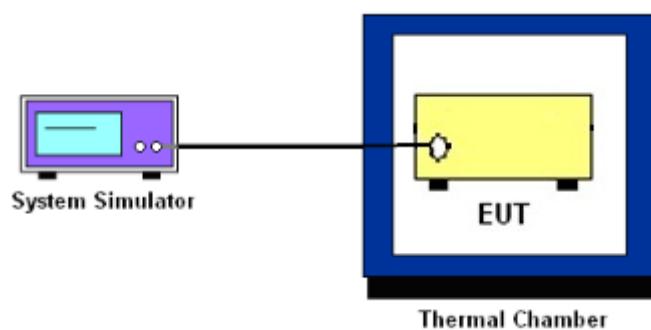

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and EIRP

### 3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_c$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_c$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.5 Conducted Band Edge

### 3.5.1 Description of Conducted Band Edge Measurement

27.53 (n)(2)

(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For  $EBW < 20\text{MHz}$ , set  $RBW \geq 1\% EBW$  in the 1MHz band immediately outside and adjacent to the band edge.
4. For  $EBW \geq 20\text{MHz}$ , set  $RBW = 200\text{kHz}$  in the 1MHz band immediately outside and adjacent to the band edge.
5. Between 1 ~5 MHz from the band edge,  $RBW=500\text{ kHz}$  was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

The limit line is derived from  $43 + 10\log(P)\text{dB}$  below the transmitter power  $P(\text{Watts})$



## 3.6 Conducted Spurious Emission

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 3.7 Frequency Stability

### 3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup

For radiated test below 30MHz

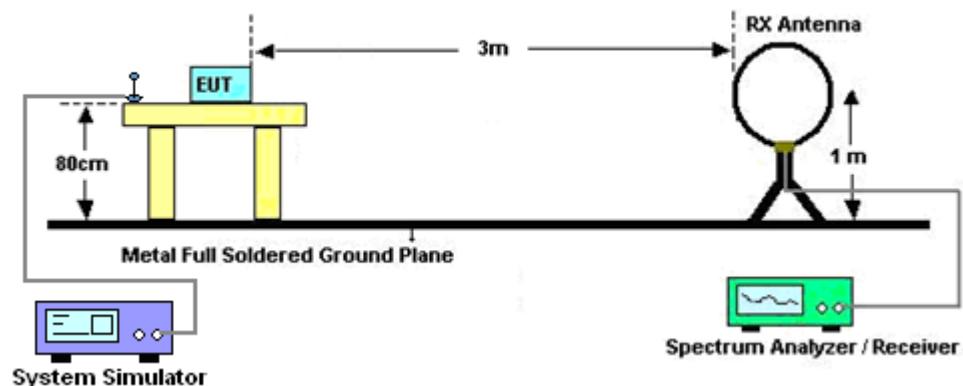


For radiated test from 30MHz to 1GHz

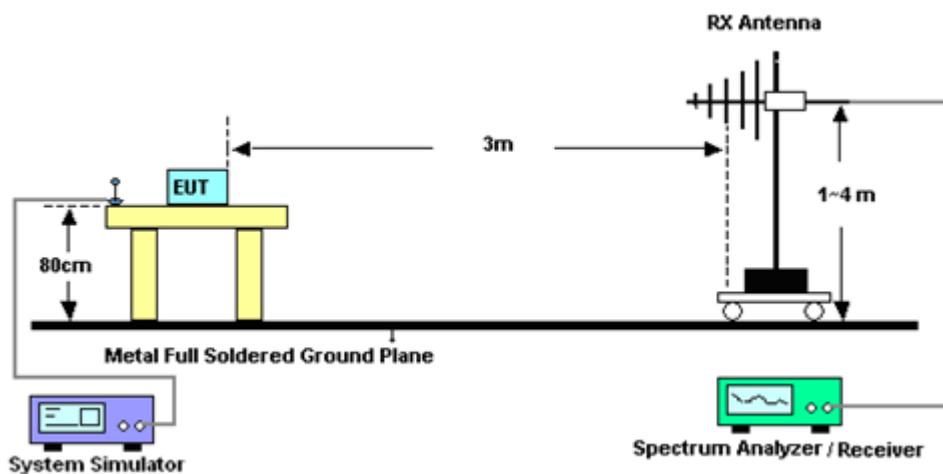




For radiated test from 1GHz to 18GHz

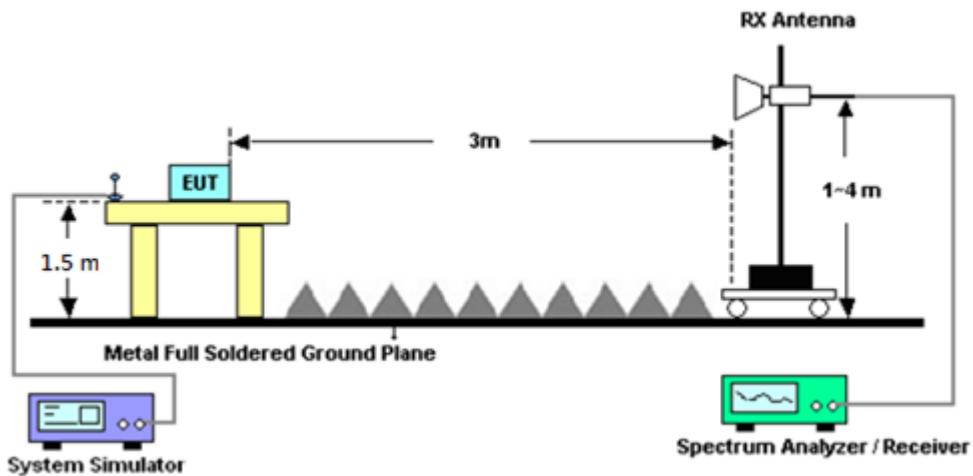

For radiated test above 18GHz

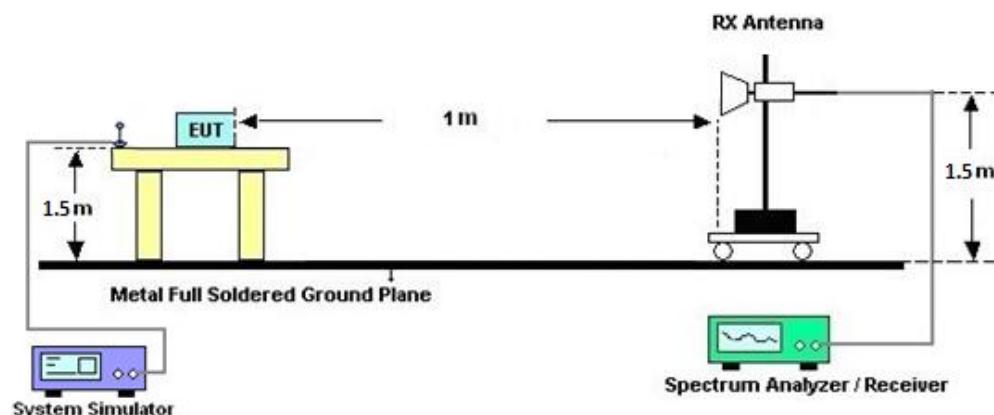

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

##### Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.2 Radiated Spurious Emission Measurement

### 4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	May 07, 2022~May 10, 2022	Sep. 06, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Oct. 09, 2021	May 07, 2022~May 10, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	May 07, 2022~May 10, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Dec. 03, 2021	May 07, 2022~May 10, 2022	Dec. 02, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	May 07, 2022~May 10, 2022	May 17, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	May 07, 2022~May 10, 2022	Nov. 29, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 21, 2021	May 07, 2022~May 10, 2022	May 20, 2022	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2022	May 07, 2022~May 10, 2022	Mar. 22, 2023	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 25, 2021	May 07, 2022~May 10, 2022	May 24, 2022	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-5 6-01-A70	EC1900270	1GHz-18GHz	Dec. 27, 2021	May 07, 2022~May 10, 2022	Dec. 26, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	May 07, 2022~May 10, 2022	Dec. 23, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY53470118	10Hz~44GHz	Jan. 12, 2022	May 07, 2022~May 10, 2022	Jan. 11, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	May 07, 2022~May 10, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	May 07, 2022~May 10, 2022	Dec. 09, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	May 07, 2022~May 10, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Mar. 08, 2022	May 07, 2022~May 10, 2022	Mar. 07, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 16, 2022	May 07, 2022~May 10, 2022	Mar. 15, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872.5-6 750-18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 16, 2022	May 07, 2022~May 10, 2022	Mar. 15, 2023	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	May 07, 2022~May 10, 2022	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 07, 2022~May 10, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 07, 2022~May 10, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 07, 2022~May 10, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 07, 2022~May 10, 2022	N/A	Radiation (03CH12-HY)
Programmable Power Supply	GW Insteck	PSS-2005	EL890001	50Hz~60Hz	Oct. 06, 2021	Mar. 21, 2022~May 26, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Hygrometer	Testo	608-H11	34893240	NA	Nov. 17, 2021	Mar. 21, 2022~May 26, 2022	Nov. 16, 2022	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 09, 2021	Mar. 21, 2022~May 26, 2022	Sep. 08, 2022	Conducted (TH03-HY)
Temperature Chamber	ESPEC	LHU-113	1012005860	-20°C ~85°C	Dec. 09, 2021	Mar. 21, 2022~May 26, 2022	Dec. 08, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6261849015	LTE	Oct. 06, 2021	Mar. 21, 2022~May 26, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Oct. 29, 2021	Mar. 21, 2022~May 26, 2022	Oct. 28, 2022	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.10 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.39 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.34 dB
---	---------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power (Average power and EIRP)

NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.18	26.04	25.84	29.68	0.9290
20	1	49		26.06	25.74	25.84		
20	25	12		25.99	25.89	25.83		
20	1	0		22.72	22.74	22.48		
20	1	50		22.66	22.49	22.55		
20	50	0		25.54	25.55	25.43		
20	1	1		26.05	26.11	25.51		
20	1	49		25.93	25.56	25.75		
20	25	12		25.99	25.78	25.74		
20	1	0		22.75	22.76	22.38		
20	1	50		22.68	22.45	22.56		
20	50	0		25.16	24.95	24.85		
20	1	1	16-QAM	25.12	24.85	25.51	29.01	0.7962
20	1	1	64-QAM	23.75	23.75	23.41		
20	1	1	256-QAM	21.79	21.75	21.48		
Limit	EIRP < 1W			Result			Pass	

NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.04	26.06	25.68	29.62	0.9162
30	1	76		26.09	25.51	25.94		
30	36	18		26.12	25.93	25.76		
30	1	0		22.85	23.01	22.49		
30	1	77		22.93	22.64	22.80		
30	75	0		25.84	25.61	25.43		
30	1	1		26.10	25.88	25.62		
30	1	76		25.87	25.34	25.89		
30	36	18		25.92	25.74	25.67		
30	1	0		22.88	22.84	22.52		
30	1	77		22.94	22.51	22.77		
30	75	0		25.17	24.90	24.84		
30	1	1	16-QAM	25.02	24.83	24.62	28.52	0.7112
30	1	1	64-QAM	23.62	23.32	23.25		
30	1	1	256-QAM	21.59	21.87	21.53		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B

NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.86	26.15	24.56	29.65	0.9226
40	1	104		25.93	22.65	25.83		
40	50	25		26.01	25.69	25.55		
40	1	0		22.91	23.01	22.54		
40	1	105		23.04	22.55	22.73		
40	100	0		25.86	25.53	25.18		
40	1	1		26.14	26.15	25.64		
40	1	104		26.05	25.38	26.03		
40	50	25		26.07	25.85	25.53		
40	1	0		22.96	23.05	22.65		
40	1	105	QPSK	23.01	22.55	22.75	28.71	0.7430
40	100	0		25.29	25.02	24.74		
40	1	1		24.80	25.21	24.63		
40	1	1		23.93	24.02	23.68		
40	1	1		21.88	21.93	21.56		
Limit	EIRP < 1W			Result			Pass	

NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	25.95	25.91	26.01	29.60	0.9120
60	1	160		25.54	25.46	25.86		
60	81	40		25.91	25.78	25.45		
60	1	0		22.64	22.62	22.75		
60	1	161		22.38	22.32	22.49		
60	162	0		25.15	25.46	25.46		
60	1	1		26.10	25.84	26.05		
60	1	160		25.69	25.38	25.82		
60	81	40		25.93	25.69	25.54		
60	1	0		22.68	22.56	22.75		
60	1	161	QPSK	22.45	22.26	22.52	28.64	0.7311
60	162	0		25.12	24.98	25.45		
60	1	1		25.14	24.84	24.75		
60	1	1		23.62	23.65	23.87		
60	1	1		21.59	21.59	21.82		
Limit	EIRP < 1W			Result			Pass	



NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.05	25.93	26.09	29.59	0.9099
80	1	215		25.59	25.71	25.82		
80	108	54		25.89	25.77	25.67		
80	1	0		22.75	22.63	22.65		
80	1	216		22.21	22.34	22.43		
80	216	0		25.58	25.52	25.52		
80	1	1		26.02	25.95	26.05		
80	1	215		25.46	25.65	25.84		
80	108	54		25.81	25.66	25.56		
80	1	0		22.69	22.58	22.65		
80	1	216	QPSK	22.26	22.36	22.48	28.63	0.7295
80	216	0		25.01	24.98	25.01		
80	1	1		24.86	25.13	24.95		
80	1	1		23.75	23.54	23.65		
80	1	1		21.75	21.65	21.62		
Limit	EIRP < 1W			Result			Pass	

NR n77 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	26.09	-	29.59	0.9099
100	1	271		-	25.91	-		
100	135	67		-	25.72	-		
100	1	0		-	22.69	-		
100	1	272		-	22.48	-		
100	270	0		-	25.52	-		
100	1	1		-	26.09	-		
100	1	271		-	25.77	-		
100	135	67		-	25.57	-		
100	1	0		-	22.68	-		
100	1	272	QPSK	-	22.46	-	28.60	0.7244
100	270	0		-	24.96	-		
100	1	1		-	25.10	-		
100	1	1		-	23.74	-		
100	1	1		-	21.74	-		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.12	23.14	22.83	26.64	0.4613
20	1	49		23.02	22.75	22.83		
20	25	12		22.92	22.98	22.73		
20	1	0		22.78	22.75	22.31		
20	1	50		22.64	22.39	22.49		
20	50	0		22.49	22.46	22.77		
20	1	1		22.95	23.12	22.54		
20	1	49		22.87	22.68	22.71		
20	25	12		22.86	22.85	22.74		
20	1	0		22.01	22.16	21.62		
20	1	50	QPSK	21.92	21.78	21.85	25.75	0.3758
20	50	0		21.98	21.90	21.78		
20	1	1		22.25	22.12	22.03		
20	1	1		20.87	20.53	20.55		
20	1	1		18.84	18.56	18.49		
Limit	EIRP < 1W			Result			Pass	

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.35	23.48	22.94	26.98	0.4989
30	1	76		23.32	23.05	23.33		
30	36	18		23.22	23.25	23.11		
30	1	0		22.90	22.98	22.49		
30	1	77		22.91	22.56	22.81		
30	75	0		22.61	22.59	22.47		
30	1	1		23.10	23.08	22.72		
30	1	76		23.11	22.85	23.04		
30	36	18		22.95	22.98	22.85		
30	1	0		22.14	22.28	21.92		
30	1	77	QPSK	22.15	21.94	22.14	25.99	0.3972
30	75	0		22.15	22.09	21.95		
30	1	1		22.49	22.35	22.16		
30	1	1		20.99	20.95	20.68		
30	1	1		18.98	18.98	18.63		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.43	23.52	23.16	27.04	0.5058
40	1	104		23.54	23.05	23.28		
40	50	25		23.35	23.27	22.98		
40	1	0		22.98	23.05	22.70		
40	1	105		22.96	22.54	22.74		
40	100	0		22.66	22.67	22.35		
40	1	1		23.16	23.26	22.91		
40	1	104		23.01	22.69	22.88		
40	50	25		23.05	22.95	22.77		
40	1	0		22.21	22.15	21.95		
40	1	105	QPSK	22.29	21.79	22.09	26.13	0.4102
40	100	0		22.16	22.07	21.90		
40	1	1		16-QAM	22.63	22.46		
40	1	1		64-QAM	21.06	21.02		
40	1	1		256-QAM	18.99	18.98		
Limit	EIRP < 1W			Result			Pass	

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	23.10	23.08	23.02	26.66	0.4638
50	1	131		22.89	22.52	22.76		
50	64	32		23.16	23.01	22.68		
50	1	0		22.62	22.57	22.46		
50	1	132		22.35	22.03	22.25		
50	128	0		22.41	22.35	22.11		
50	1	1		22.84	22.82	22.69		
50	1	131		22.75	21.47	22.54		
50	64	32		22.78	22.84	22.46		
50	1	0		21.89	21.85	21.87		
50	1	132	QPSK	21.76	21.49	21.61	25.74	0.3750
50	128	0		21.95	21.85	21.64		
50	1	1		16-QAM	22.24	22.16		
50	1	1		64-QAM	20.69	20.65		
50	1	1		256-QAM	18.75	18.65		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	23.17	23.09	23.27	26.77	0.4753
	1	160		22.91	22.68	22.89		
	81	40		23.19	22.98	22.85		
	1	0		22.70	22.66	22.79		
	1	161		22.28	22.15	22.35		
	162	0		22.36	22.32	22.20		
	1	1		22.85	22.92	22.94		
	1	160		22.52	22.42	22.68		
	81	40		22.89	22.81	22.57		
	1	0		22.04	22.05	22.02		
	1	161		21.62	21.58	21.73		
	162	0		21.94	21.85	21.68		
60	1	1	16-QAM	22.26	22.12	23.24	26.74	0.4721
60	1	1	64-QAM	20.74	20.75	23.19		
60	1	1	256-QAM	18.70	18.64	21.73		
Limit	EIRP < 1W			Result			Pass	

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	23.16	23.12	23.36	26.86	0.4853
	1	187		22.65	22.80	23.01		
	90	45		23.13	23.01	22.95		
	1	0		22.64	22.57	22.68		
	1	188		22.17	22.31	22.54		
	180	0		22.32	22.35	22.30		
	1	1		22.82	22.76	22.81		
	1	187		22.35	22.47	22.78		
	90	45		22.82	22.71	22.67		
	1	0		21.89	21.98	21.94		
	1	188		21.47	21.63	21.93		
	180	0		21.85	21.84	21.86		
70	1	1	16-QAM	22.18	22.06	22.19	25.69	0.3707
70	1	1	64-QAM	20.76	20.59	20.74		
70	1	1	256-QAM	18.63	18.61	18.63		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	23.15	23.07	23.15	26.69	0.4667
80	1	215		22.71	22.83	22.96		
80	108	54		23.19	23.01	22.92		
80	1	0		22.64	22.58	22.57		
80	1	216		22.23	22.34	22.43		
80	216	0		22.38	22.34	22.35		
80	1	1		22.89	22.73	22.85		
80	1	215		22.51	22.56	22.65		
80	108	54		22.82	22.76	22.61		
80	1	0		21.98	21.93	21.96		
80	1	216		21.55	21.68	21.80		
80	216	0		21.82	21.83	21.76		
80	1	1	16-QAM	22.21	22.19	22.18	25.71	0.3724
80	1	1	64-QAM	20.75	20.60	20.55		
80	1	1	256-QAM	18.74	18.62	18.60		
Limit	EIRP < 1W			Result			Pass	

NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	23.26	23.13	23.11	26.76	0.4742
90	1	243		22.81	22.92	23.01		
90	120	60		23.03	23.01	23.02		
90	1	0		22.79	22.67	22.61		
90	1	244		22.30	22.40	22.54		
90	243	0		22.31	22.35	22.34		
90	1	1		22.92	22.81	22.86		
90	1	243		22.45	22.68	22.70		
90	120	60		22.75	22.74	22.77		
90	1	0		22.01	21.94	21.89		
90	1	244		21.62	21.79	21.89		
90	243	0		21.73	21.75	21.79		
90	1	1	16-QAM	22.35	22.25	22.11	25.85	0.3846
90	1	1	64-QAM	20.74	20.73	20.65		
90	1	1	256-QAM	18.81	18.76	18.65		
Limit	EIRP < 1W			Result			Pass	

**FCC RADIO TEST REPORT**

Report No. : FG031715-16B


NR n78 Maximum Average Power [dBm] (GT - LC = 3.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	23.14	-	26.64	0.4613
100	1	271		-	22.90	-		
100	135	67		-	22.96	-		
100	1	0		-	22.84	-		
100	1	272		-	22.53	-		
100	270	0		-	22.44	-		
100	1	1		-	23.14	-		
100	1	271	QPSK	-	22.91	-	25.58	0.3614
100	135	67		-	22.93	-		
100	1	0		-	22.15	-		
100	1	272		-	21.80	-		
100	270	0		-	21.89	-		
100	1	1	16-QAM	-	22.08	-	25.58	0.3614
100	1	1	64-QAM	-	20.56	-		
100	1	1	256-QAM	-	18.58	-		
Limit	EIRP < 1W			Result			Pass	



## FR1 n77

**Peak-to-Average Ratio**


Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.10	4.78	5.82	6.18	PASS
Mode	FR1 n77 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.58				PASS

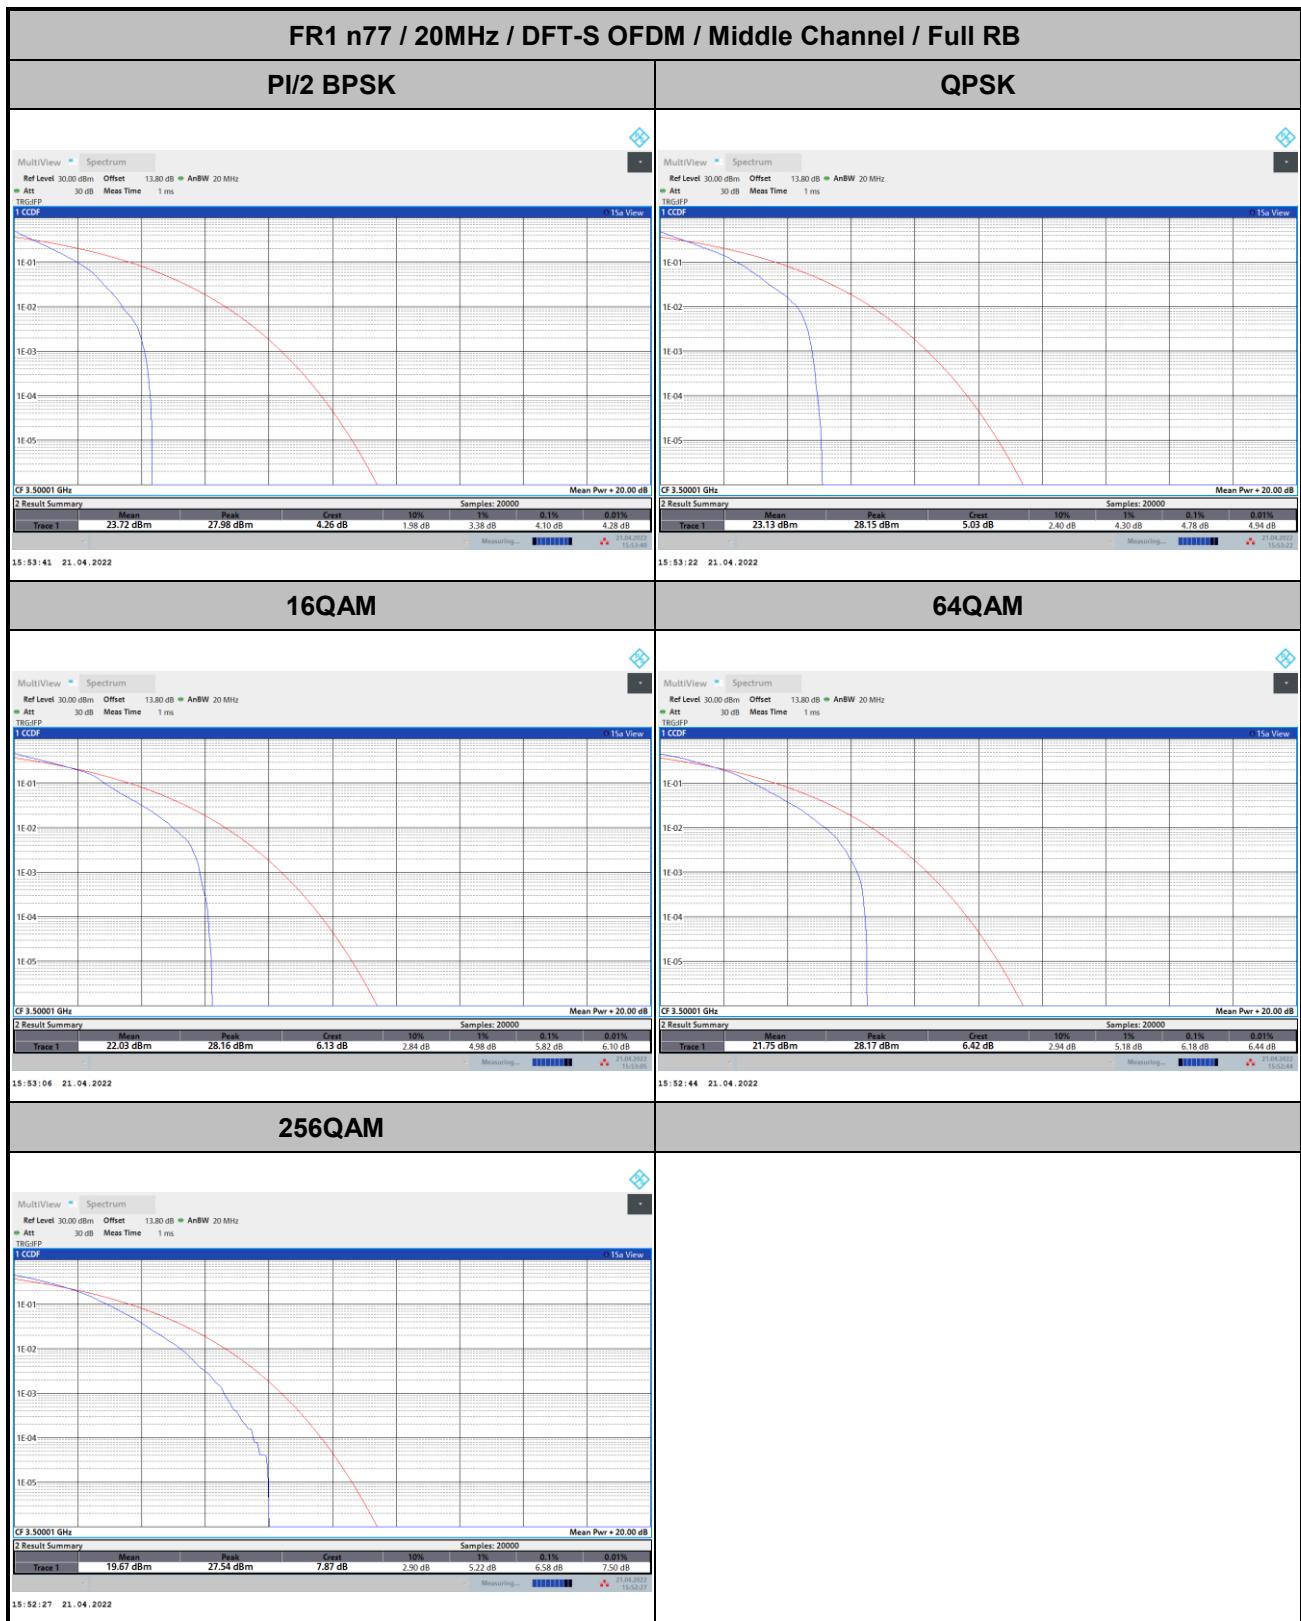



**26dB Bandwidth**


Mode	FR1 n77 : 26dB BW(MHz) / DFT-S OFDM							
BW	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz	80MHz	90MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	18.70	27.81	38.12	-	60.42	-	80.08	-
BW	100MHz							
Mod.	PI/2 BPSK							
Middle CH	99.50							


Mode	FR1 n77 : 26dB BW(MHz) / CP OFDM							
BW	20MHz		30MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	19.14	19.30	28.77	28.95	40.36	40.36	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	19.26	19.14	28.83	28.95	40.44	40.52	-	-
BW	60MHz		70MHz		80MHz		90MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	60.42	60.54	-	-	80.40	80.24	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	60.42	60.42	-	-	80.24	80.24	-	-
BW	100MHz							
Mod.	QPSK	16QAM						
Middle CH	100.70	100.30						
Mod.	64QAM	256QAM						
Middle CH	100.50	100.50						

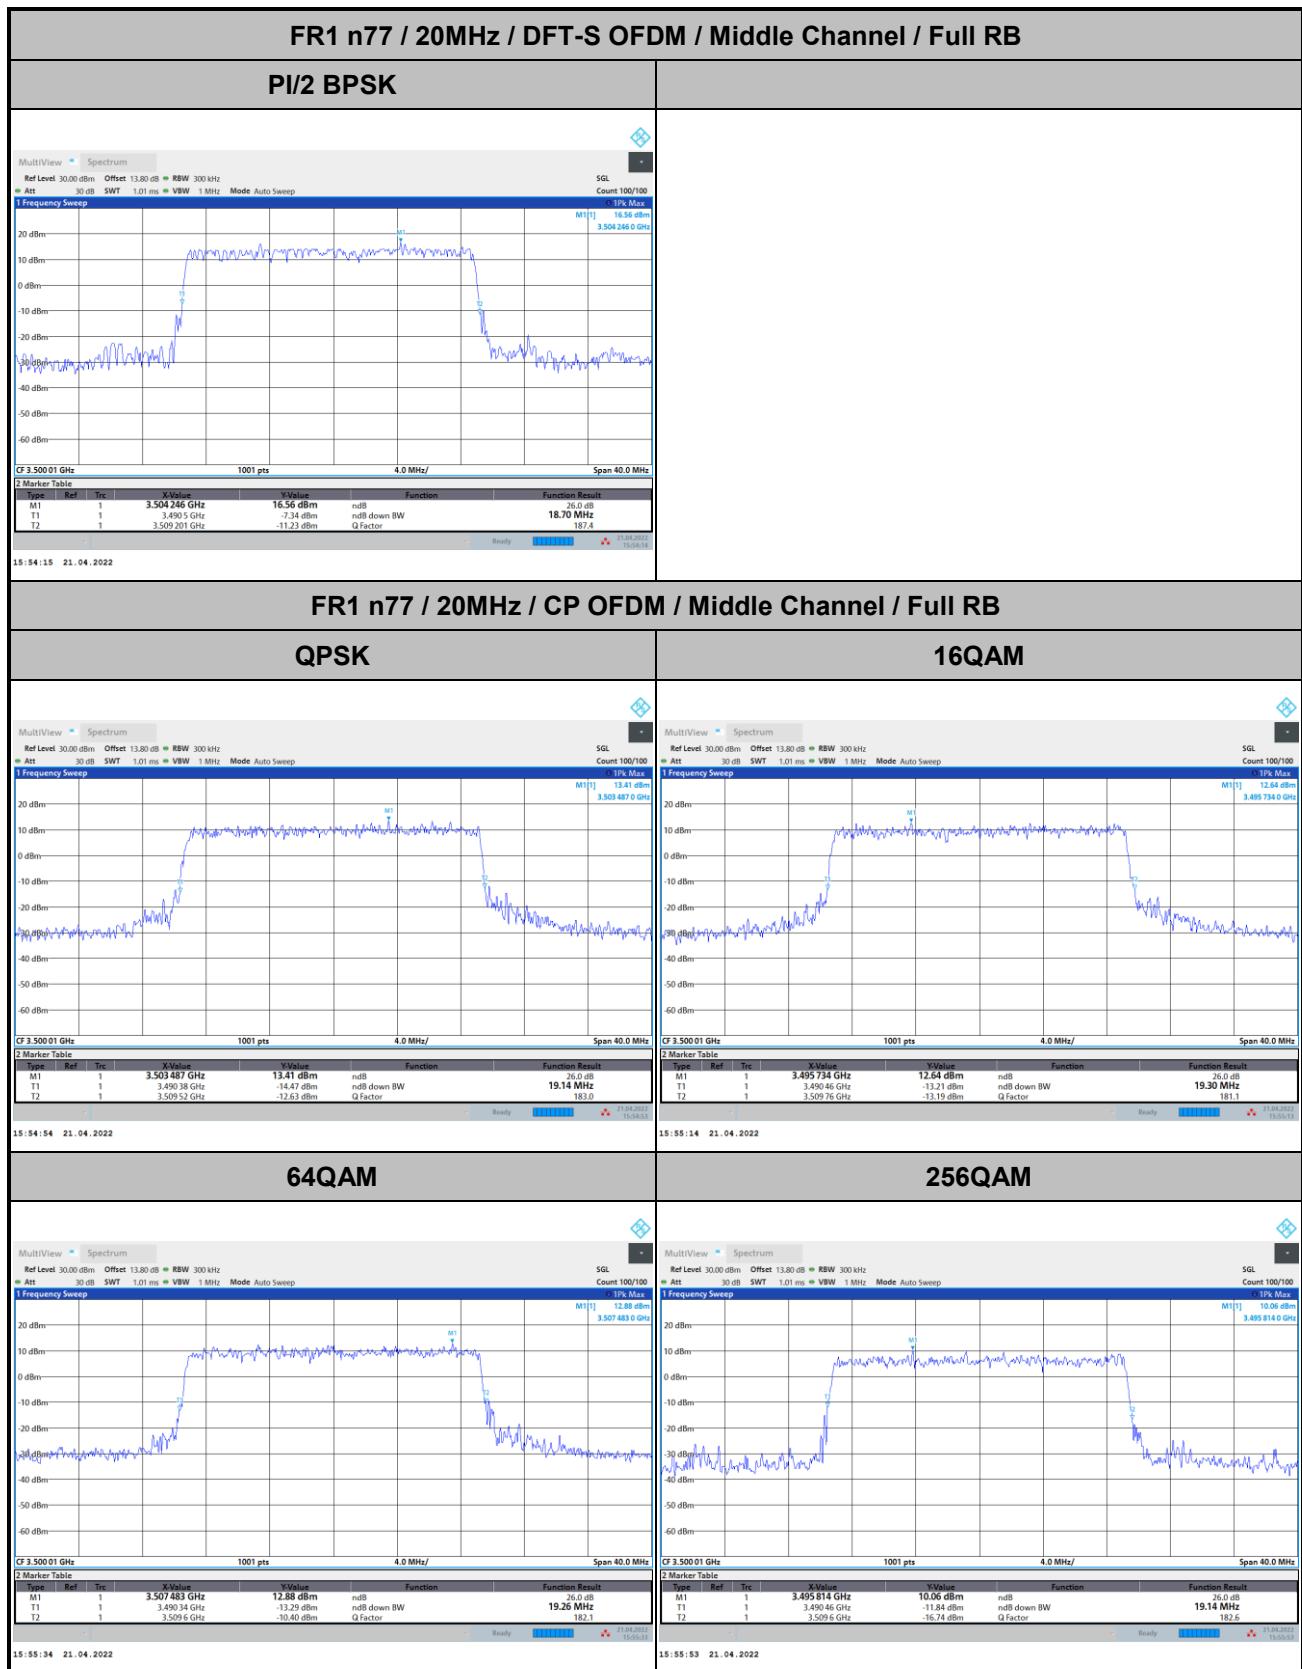


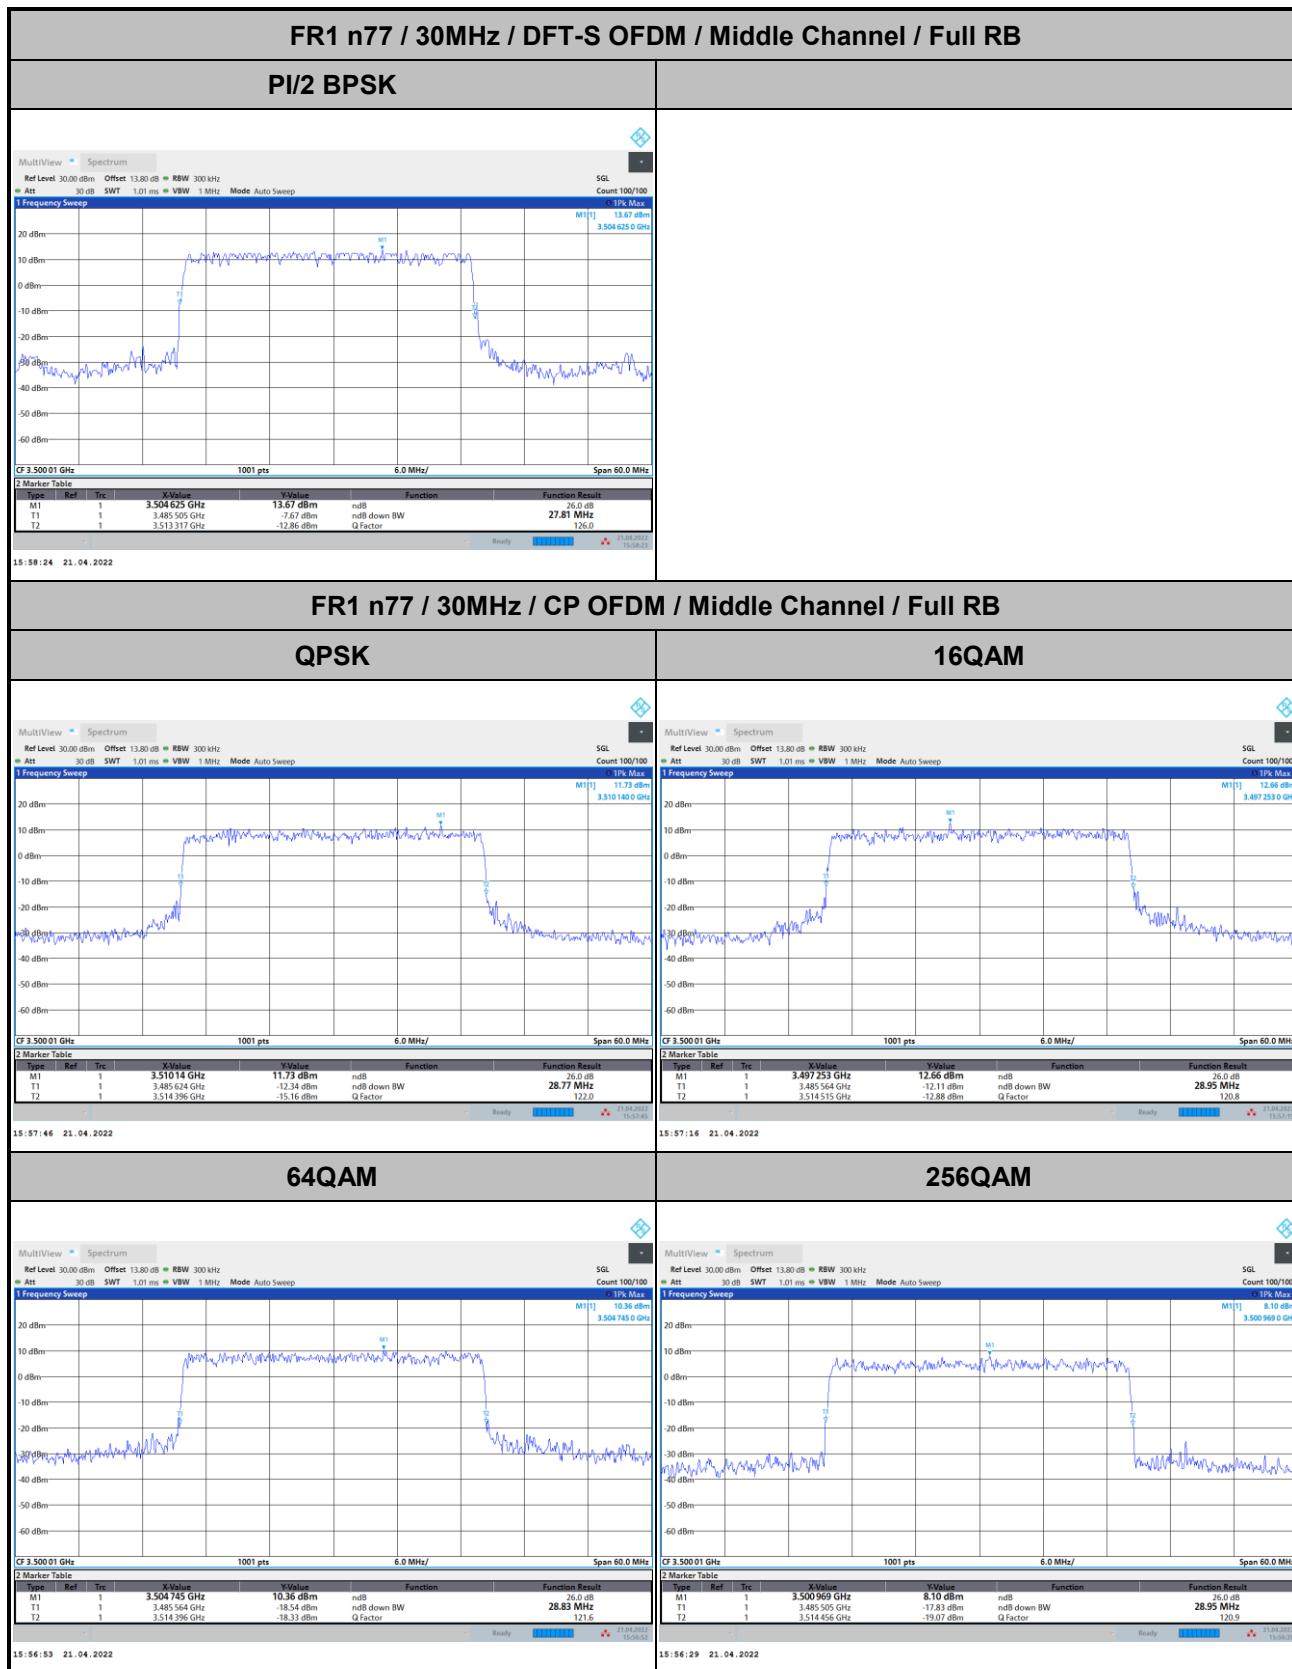

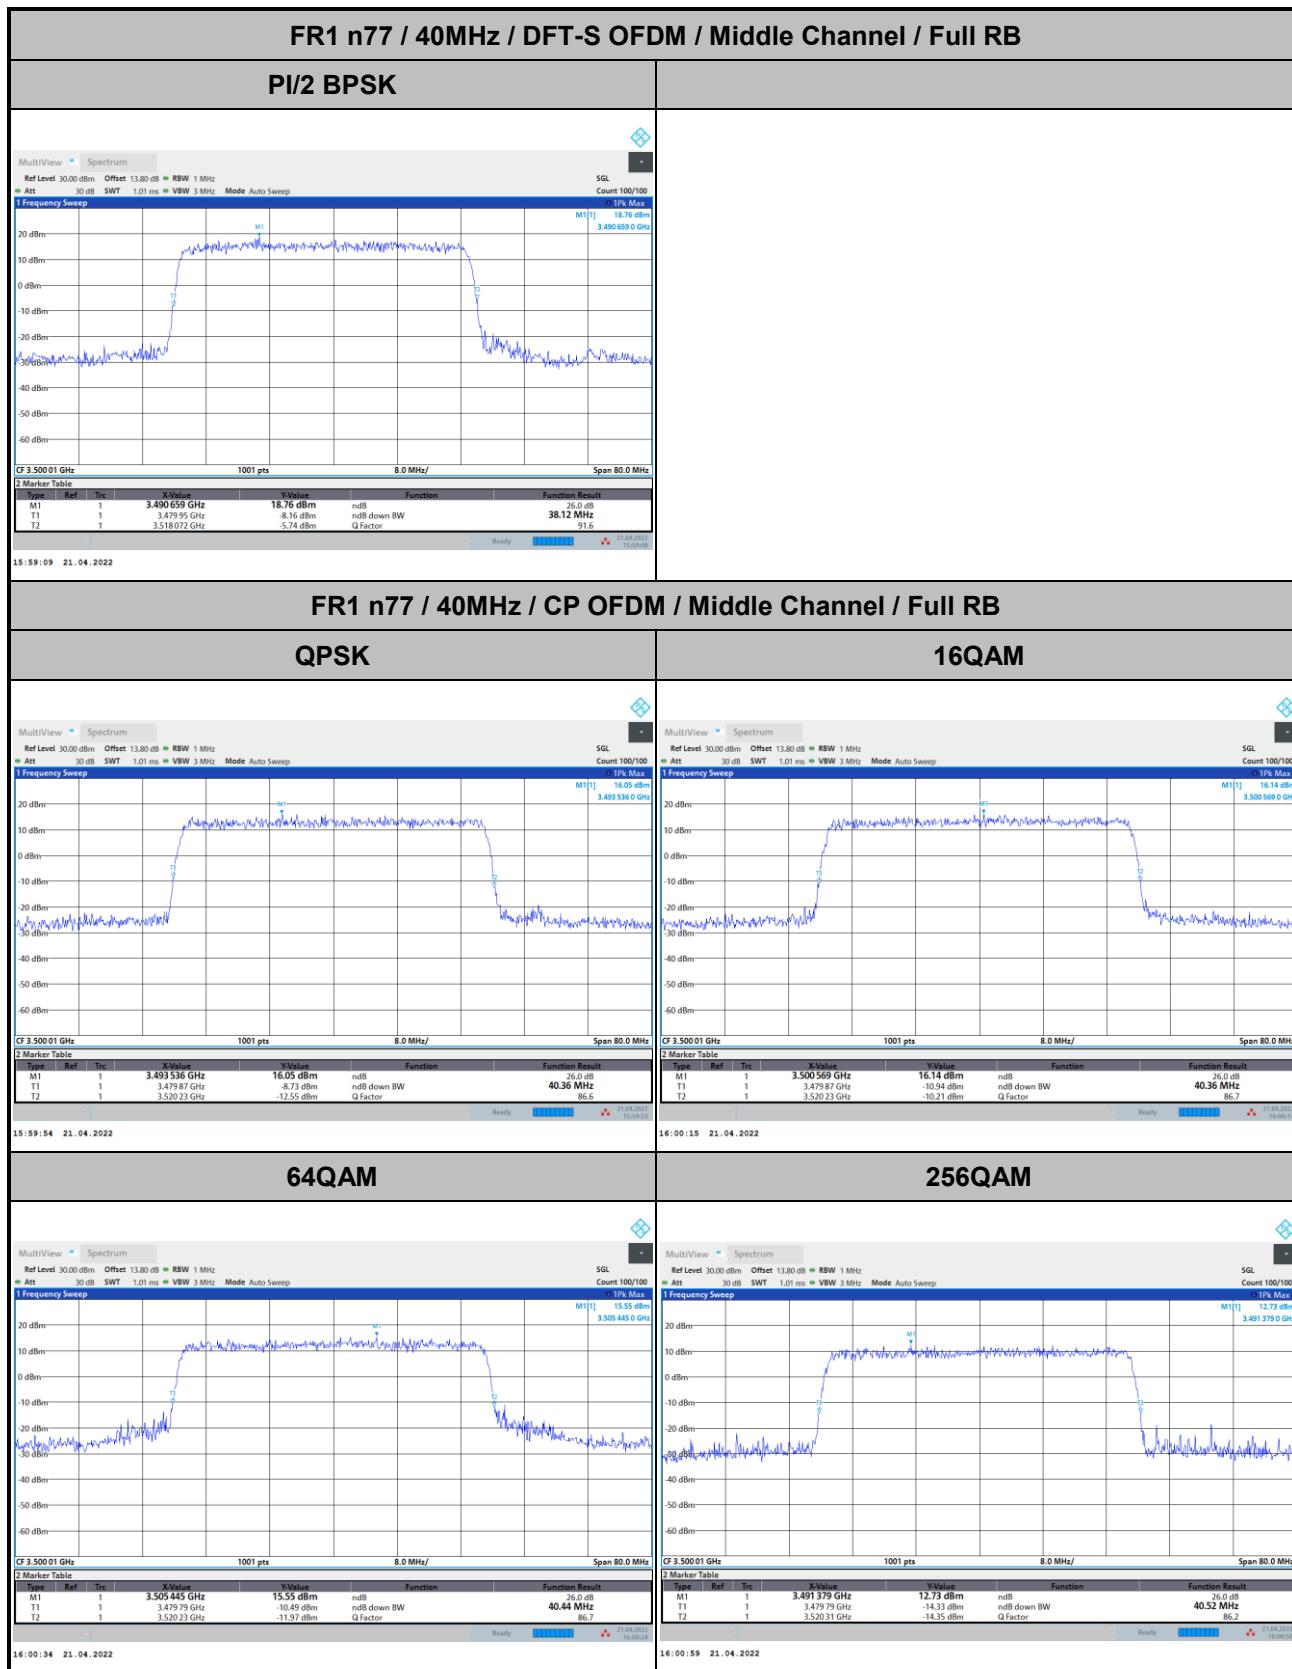

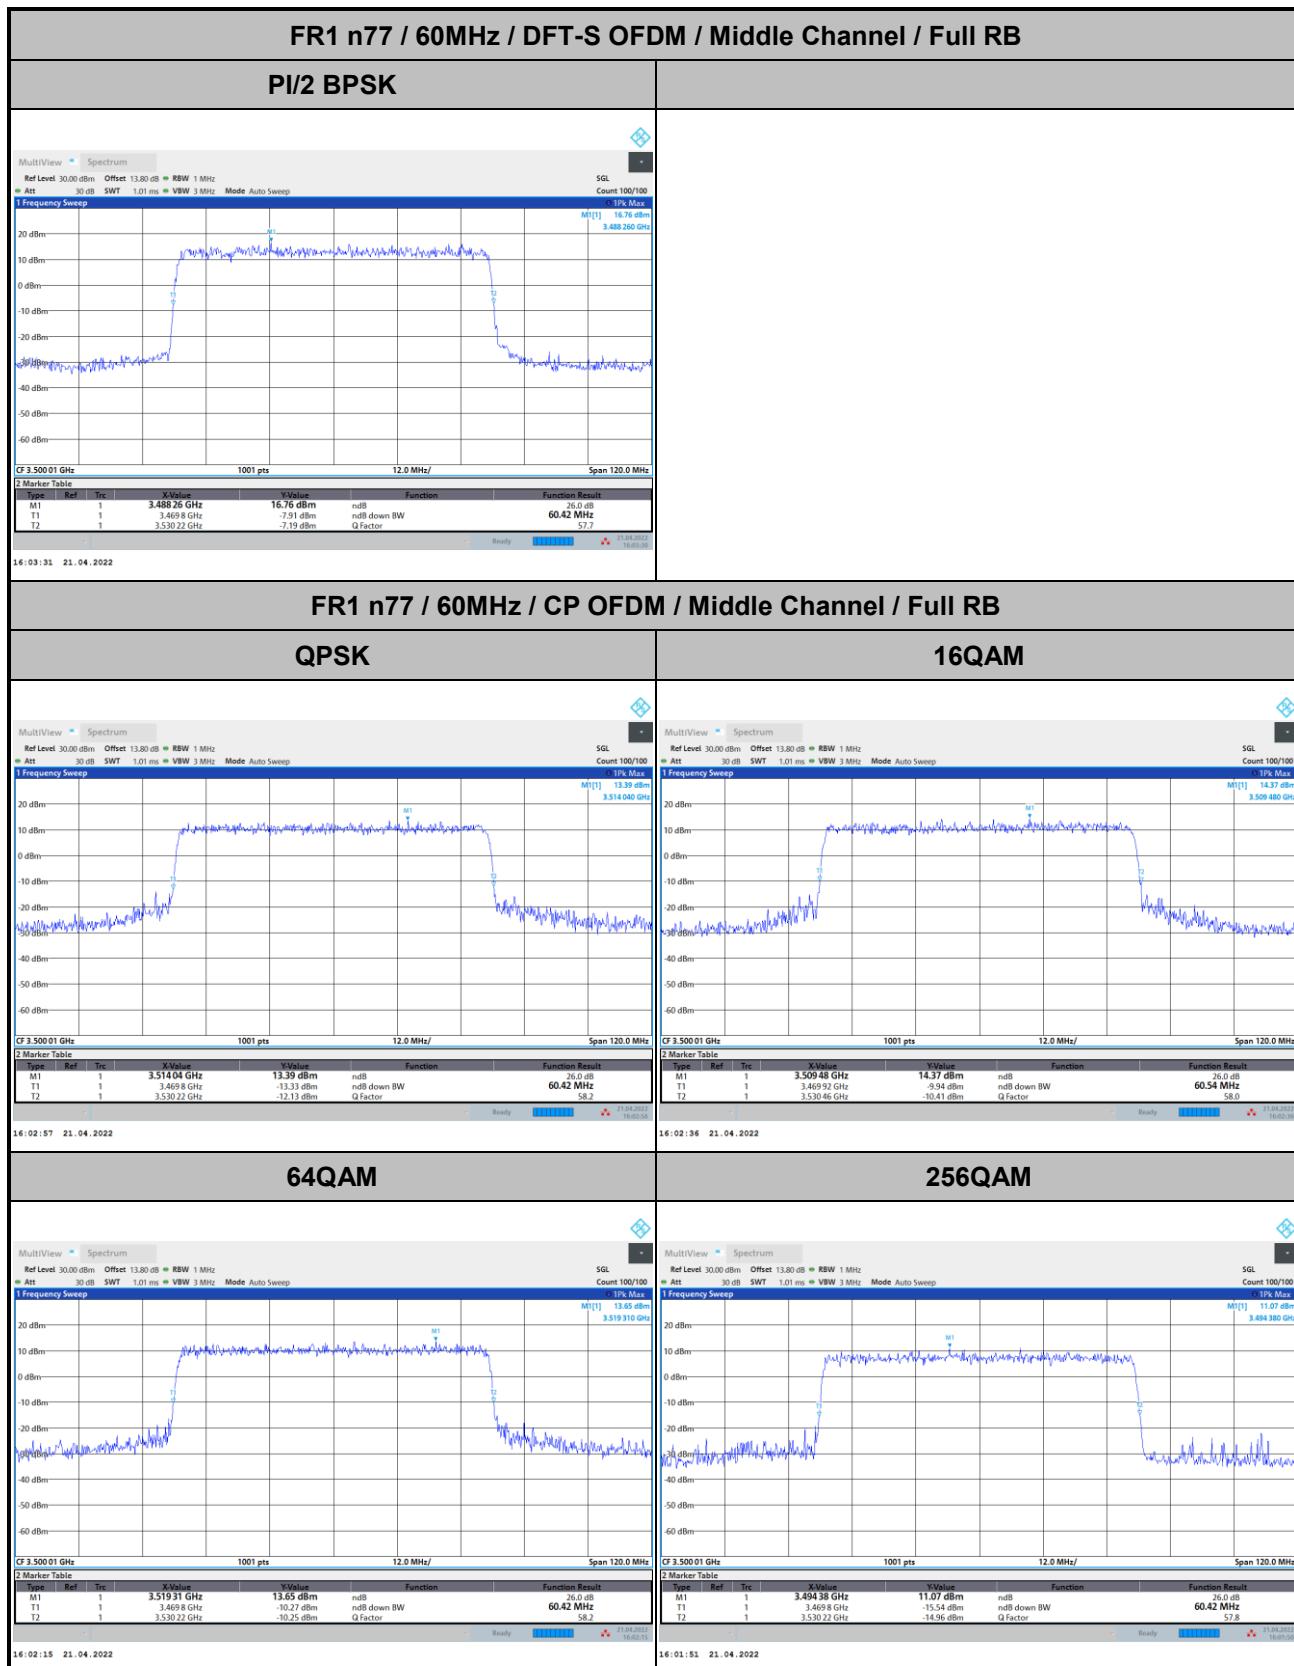

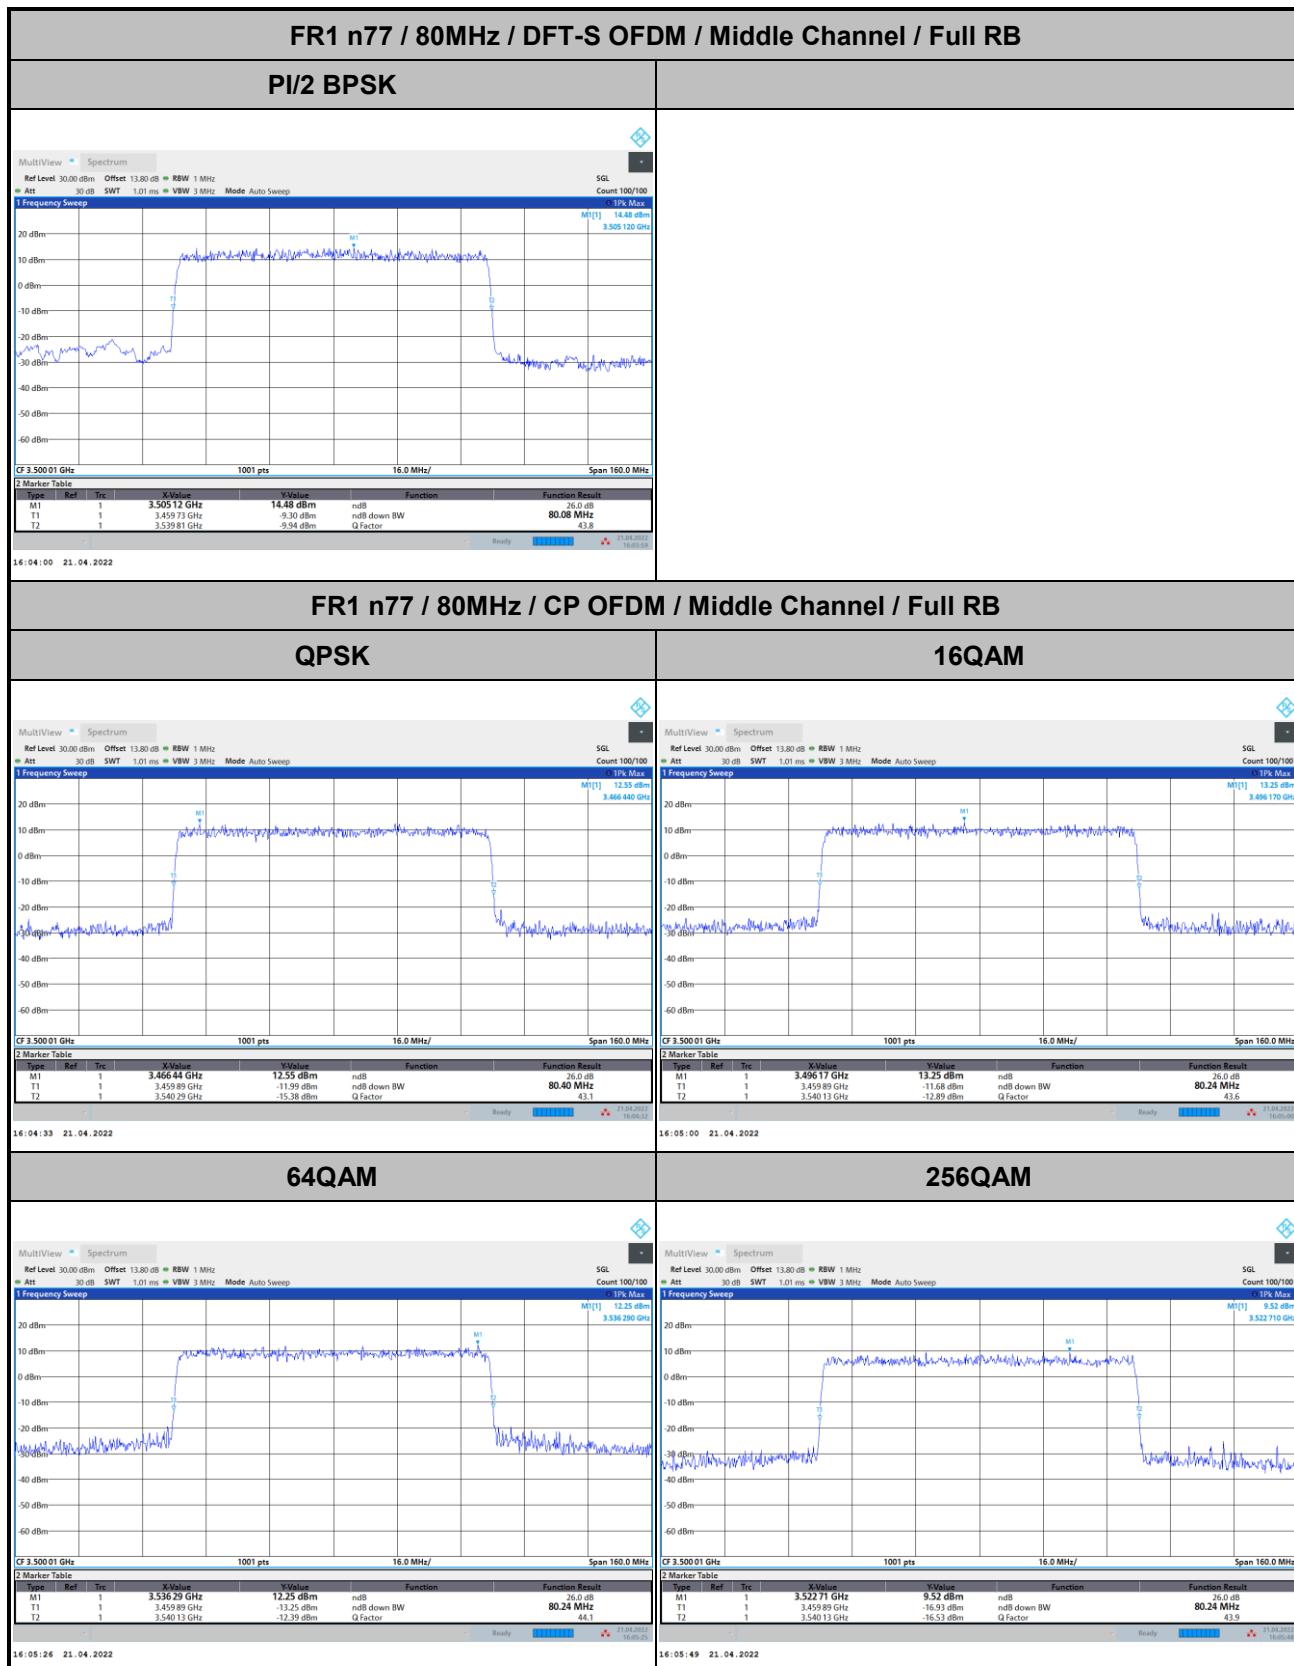


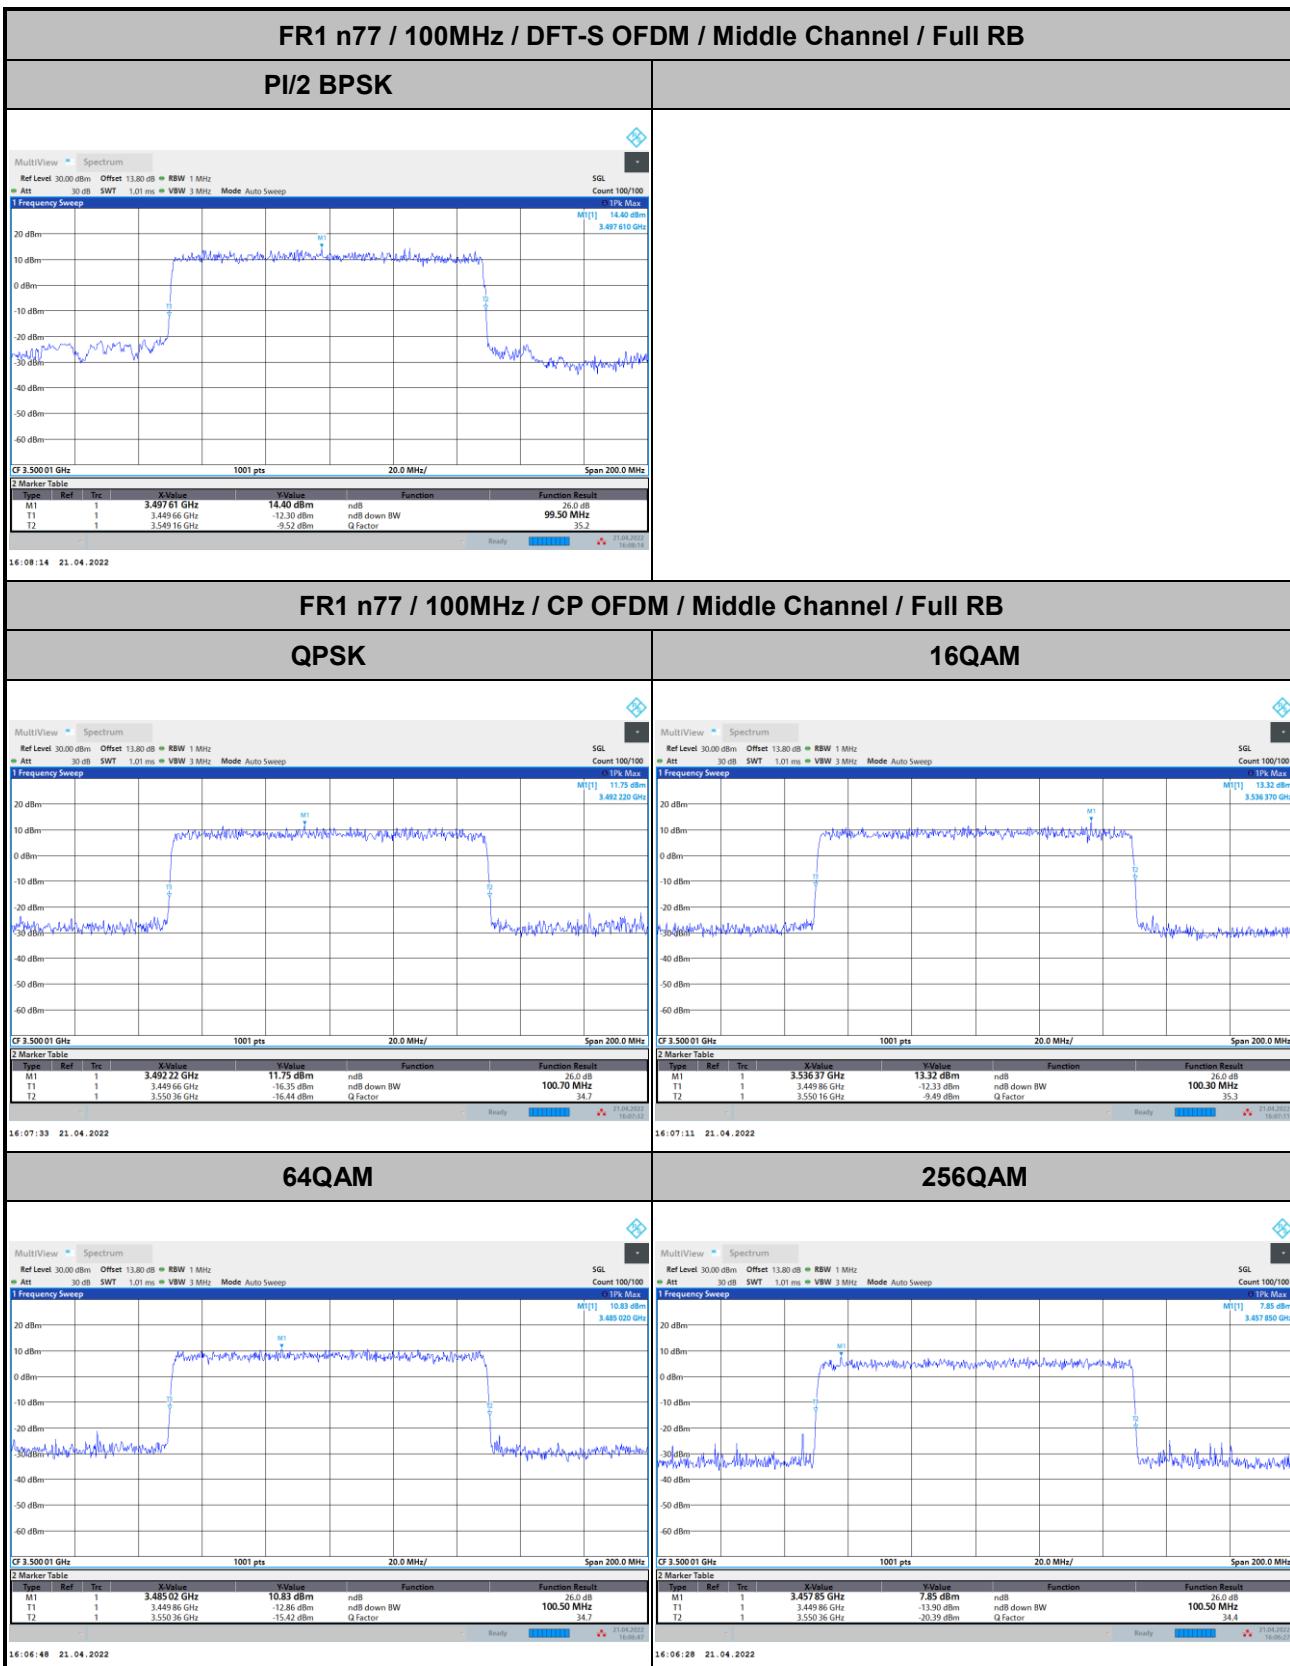



**Occupied Bandwidth**

Mode	FR1 n77 : OB BW(MHz) / DFT-S OFDM							
BW	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz	80MHz	90MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	17.85	26.79	35.75	-	57.81	-	77.06	-
BW	100MHz							
Mod.	PI/2 BPSK							
Middle CH	96.07							

Mode	FR1 n77 : OB BW(MHz) / CP OFDM							
BW	20MHz		30MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	18.25	18.24	27.72	27.81	38.03	38.00	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	18.26	18.19	27.93	27.86	37.91	37.97	-	-
BW	60MHz		70MHz		80MHz		90MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	57.86	57.81	-	-	77.37	77.19	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	57.74	57.75	-	-	77.22	77.29	-	-
BW	100MHz							
Mod.	QPSK	16QAM						
Middle CH	97.11	97.21						
Mod.	64QAM	256QAM						
Middle CH	97.04	97.38						

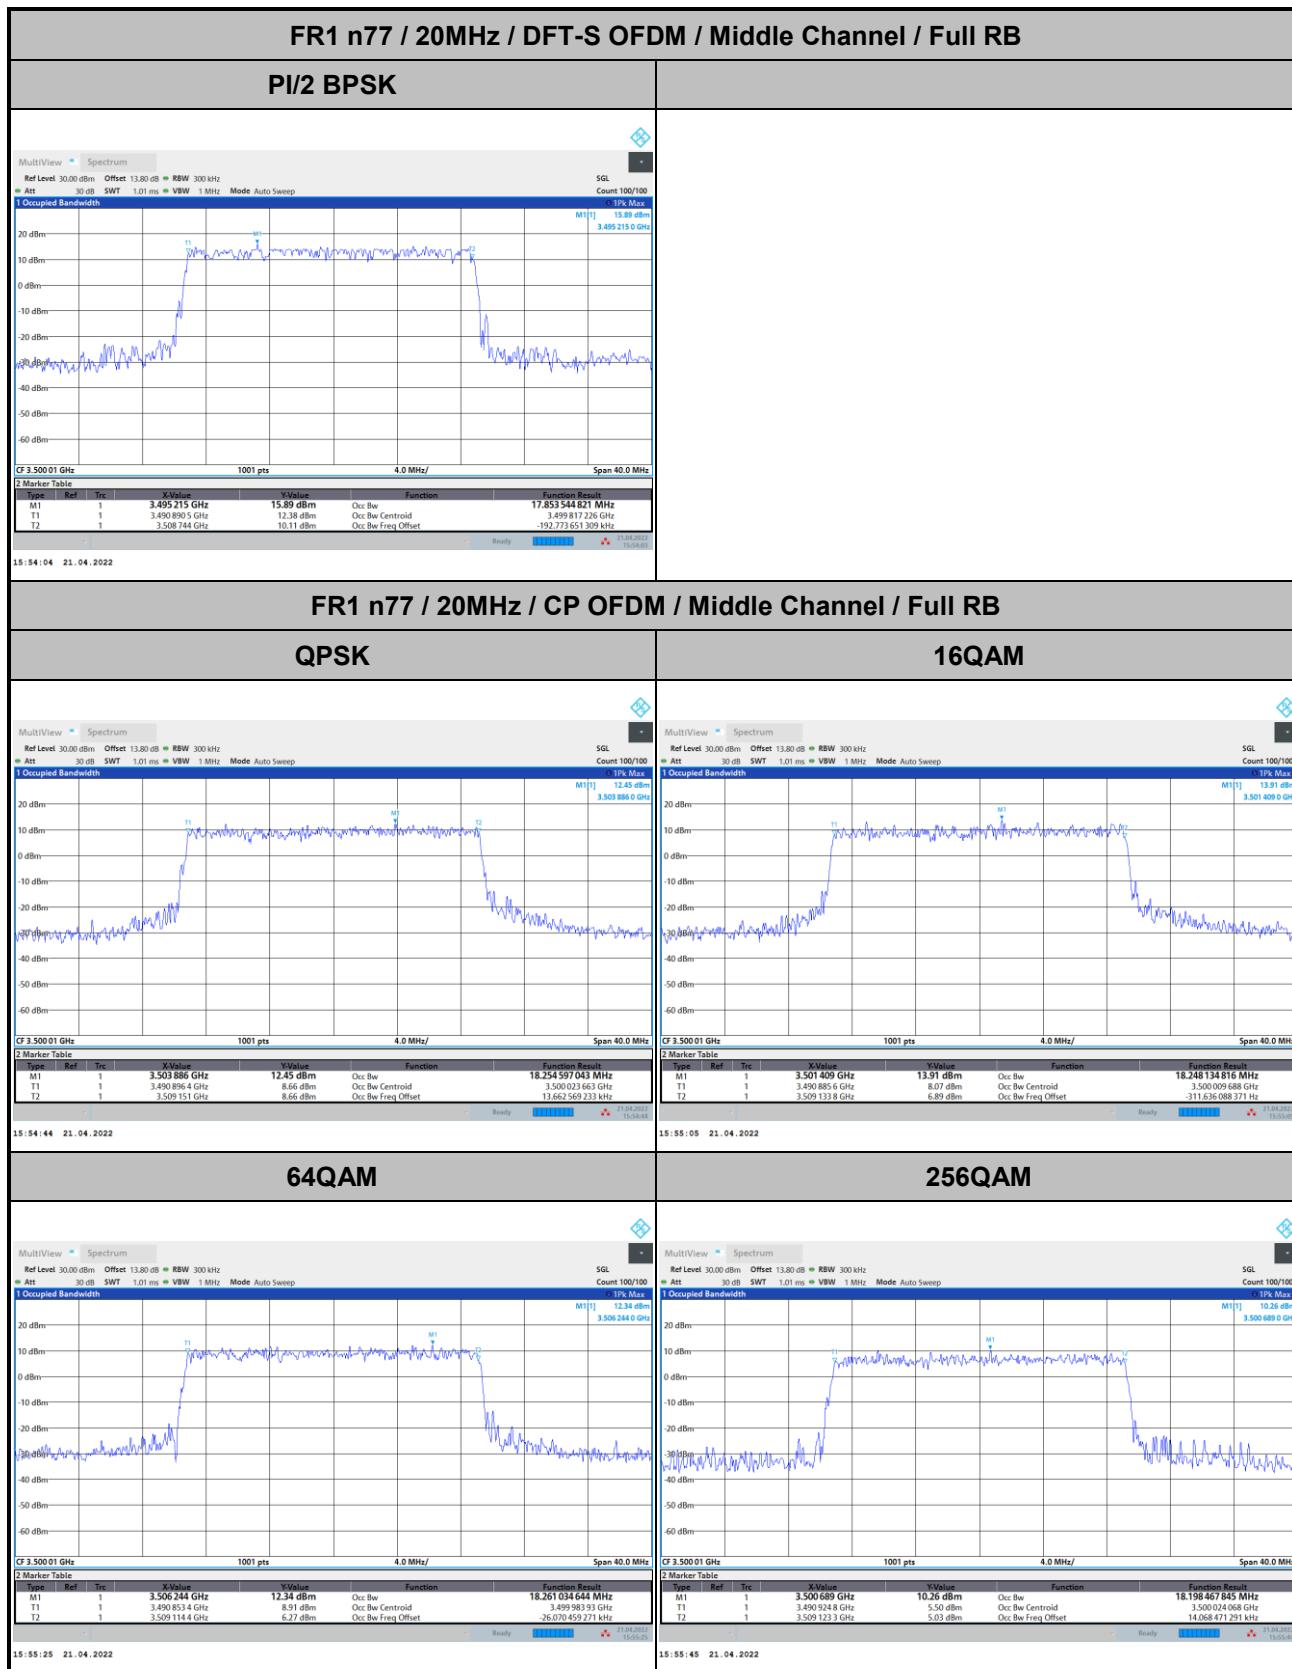

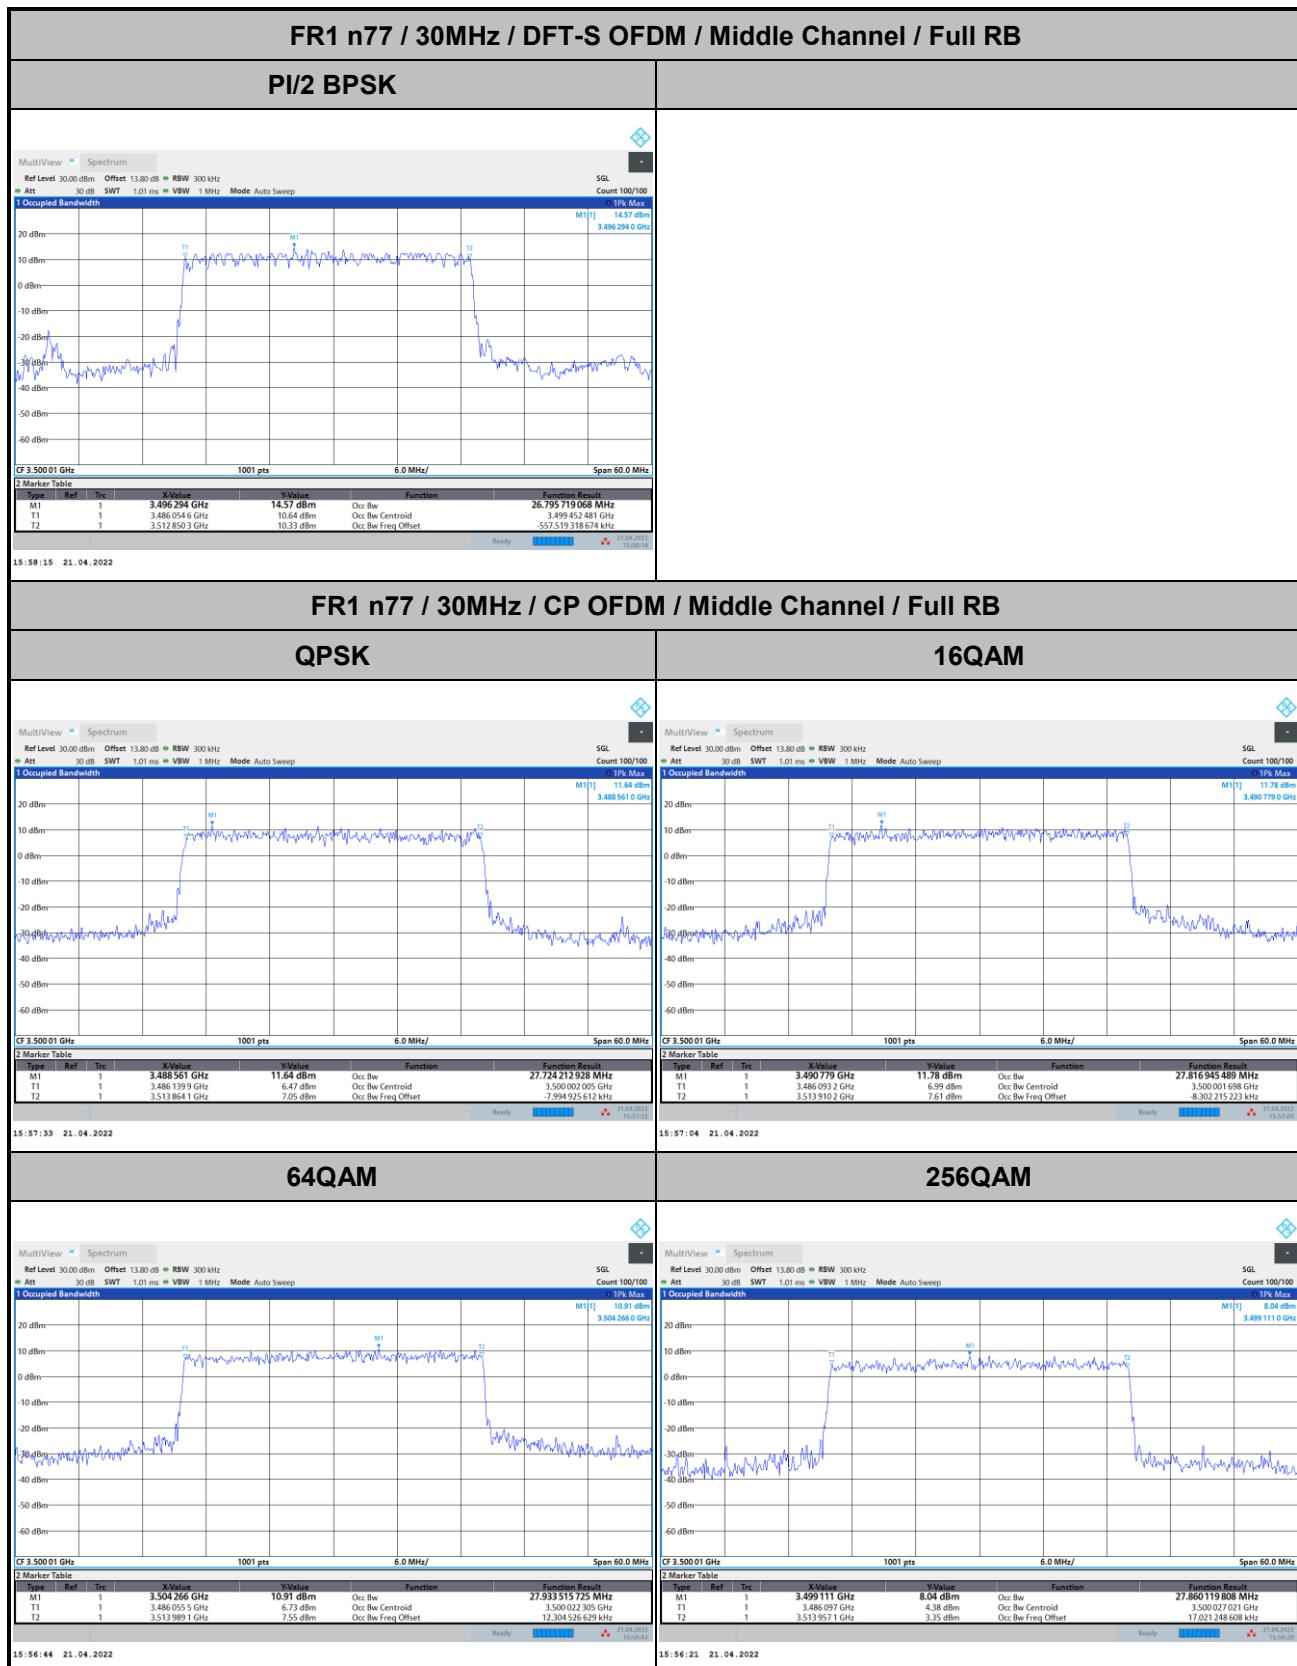


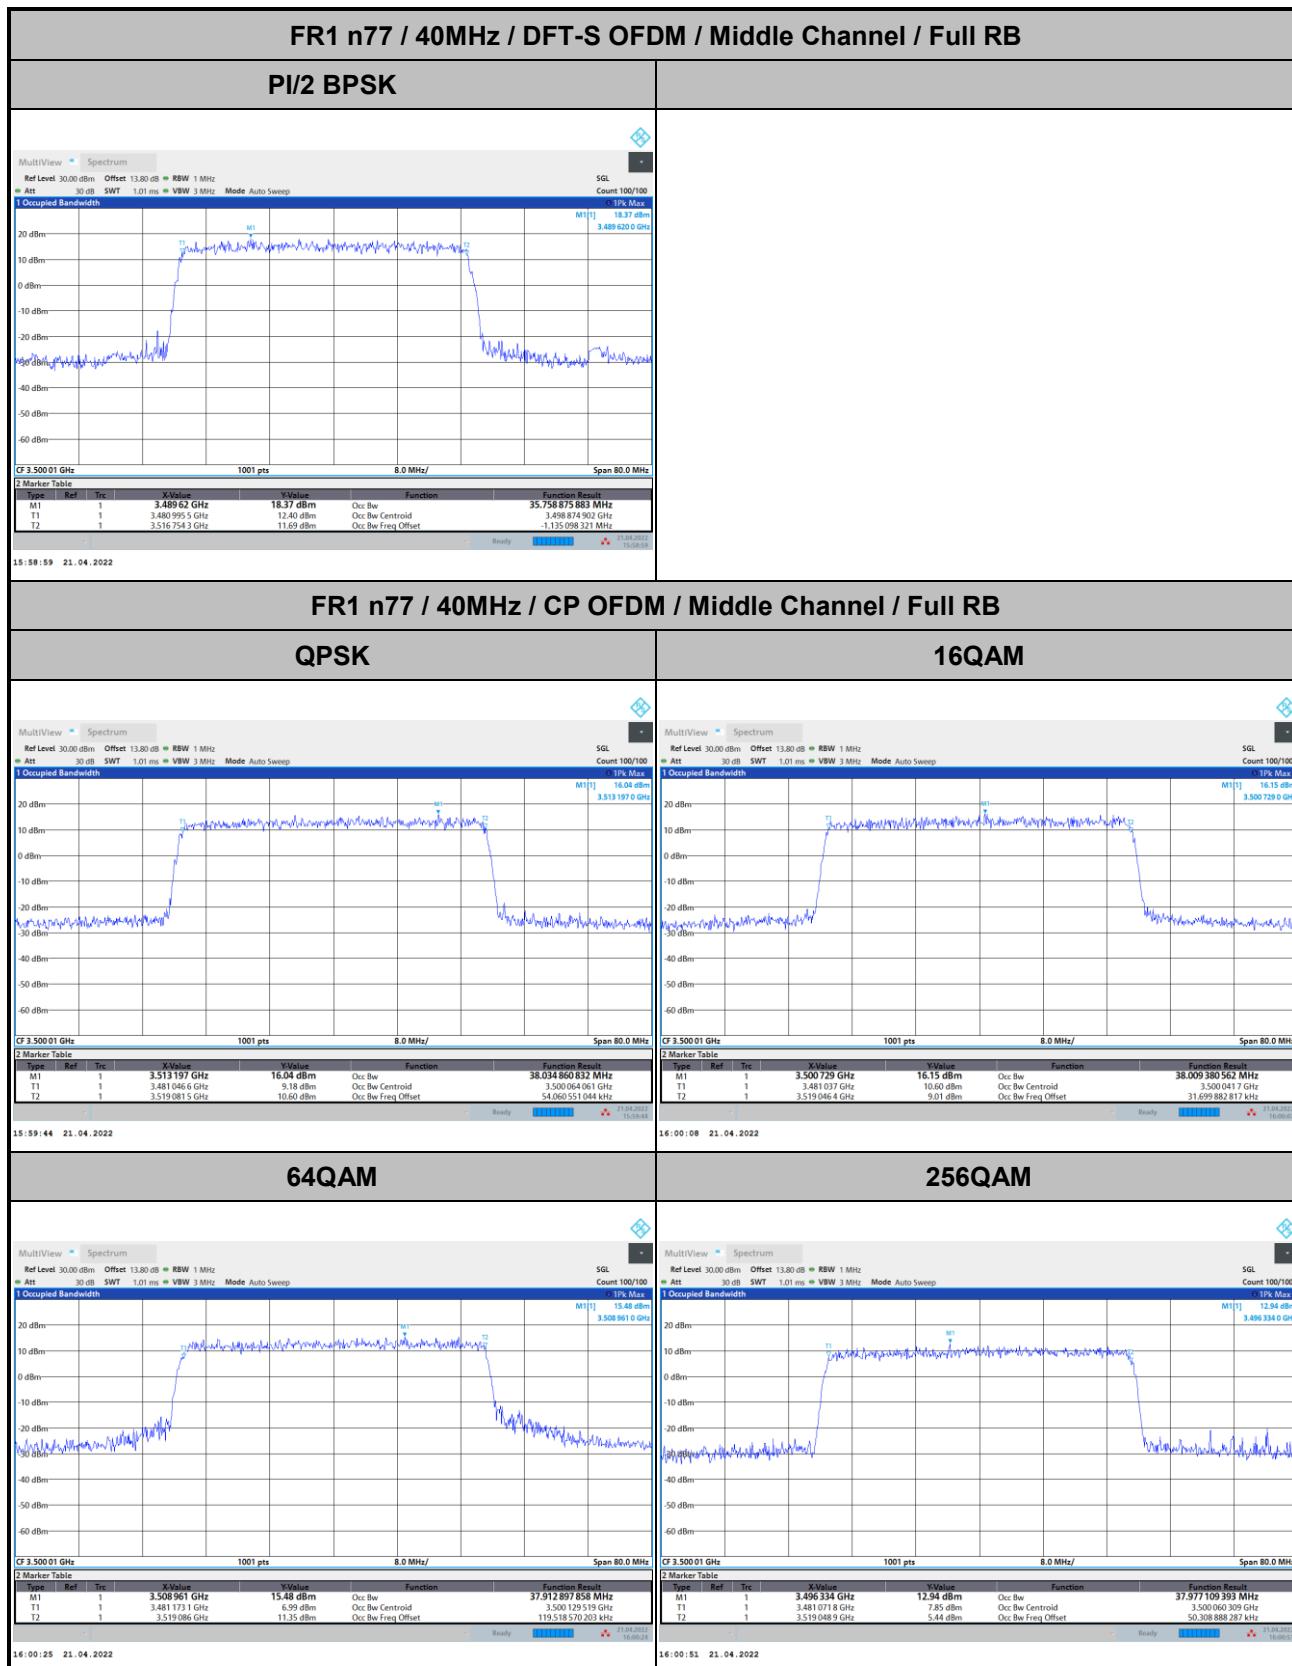



## FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB


## PI/2 BPSK

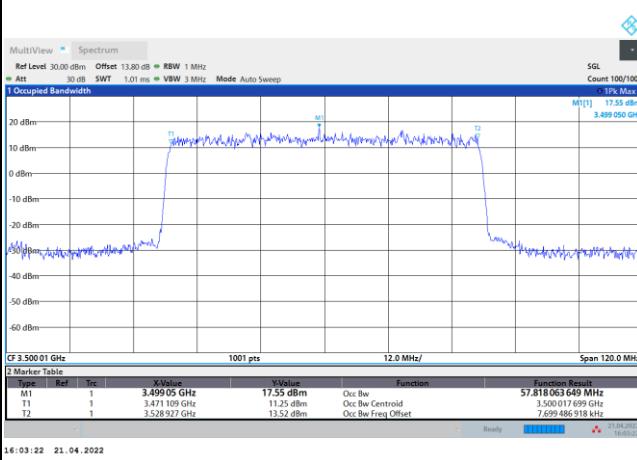

## FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


## QPSK


## 16QAM

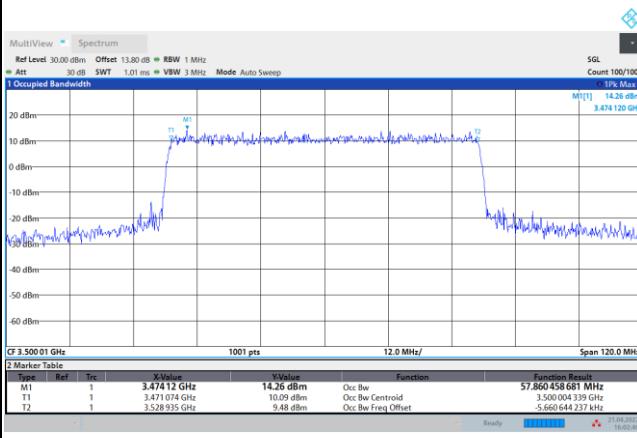


## 64QAM

## 256QAM

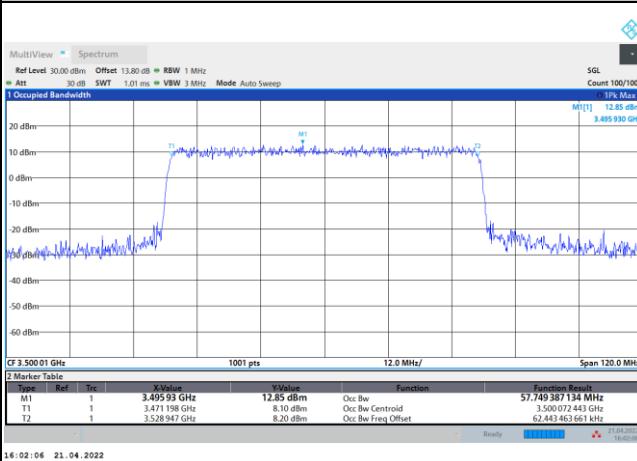

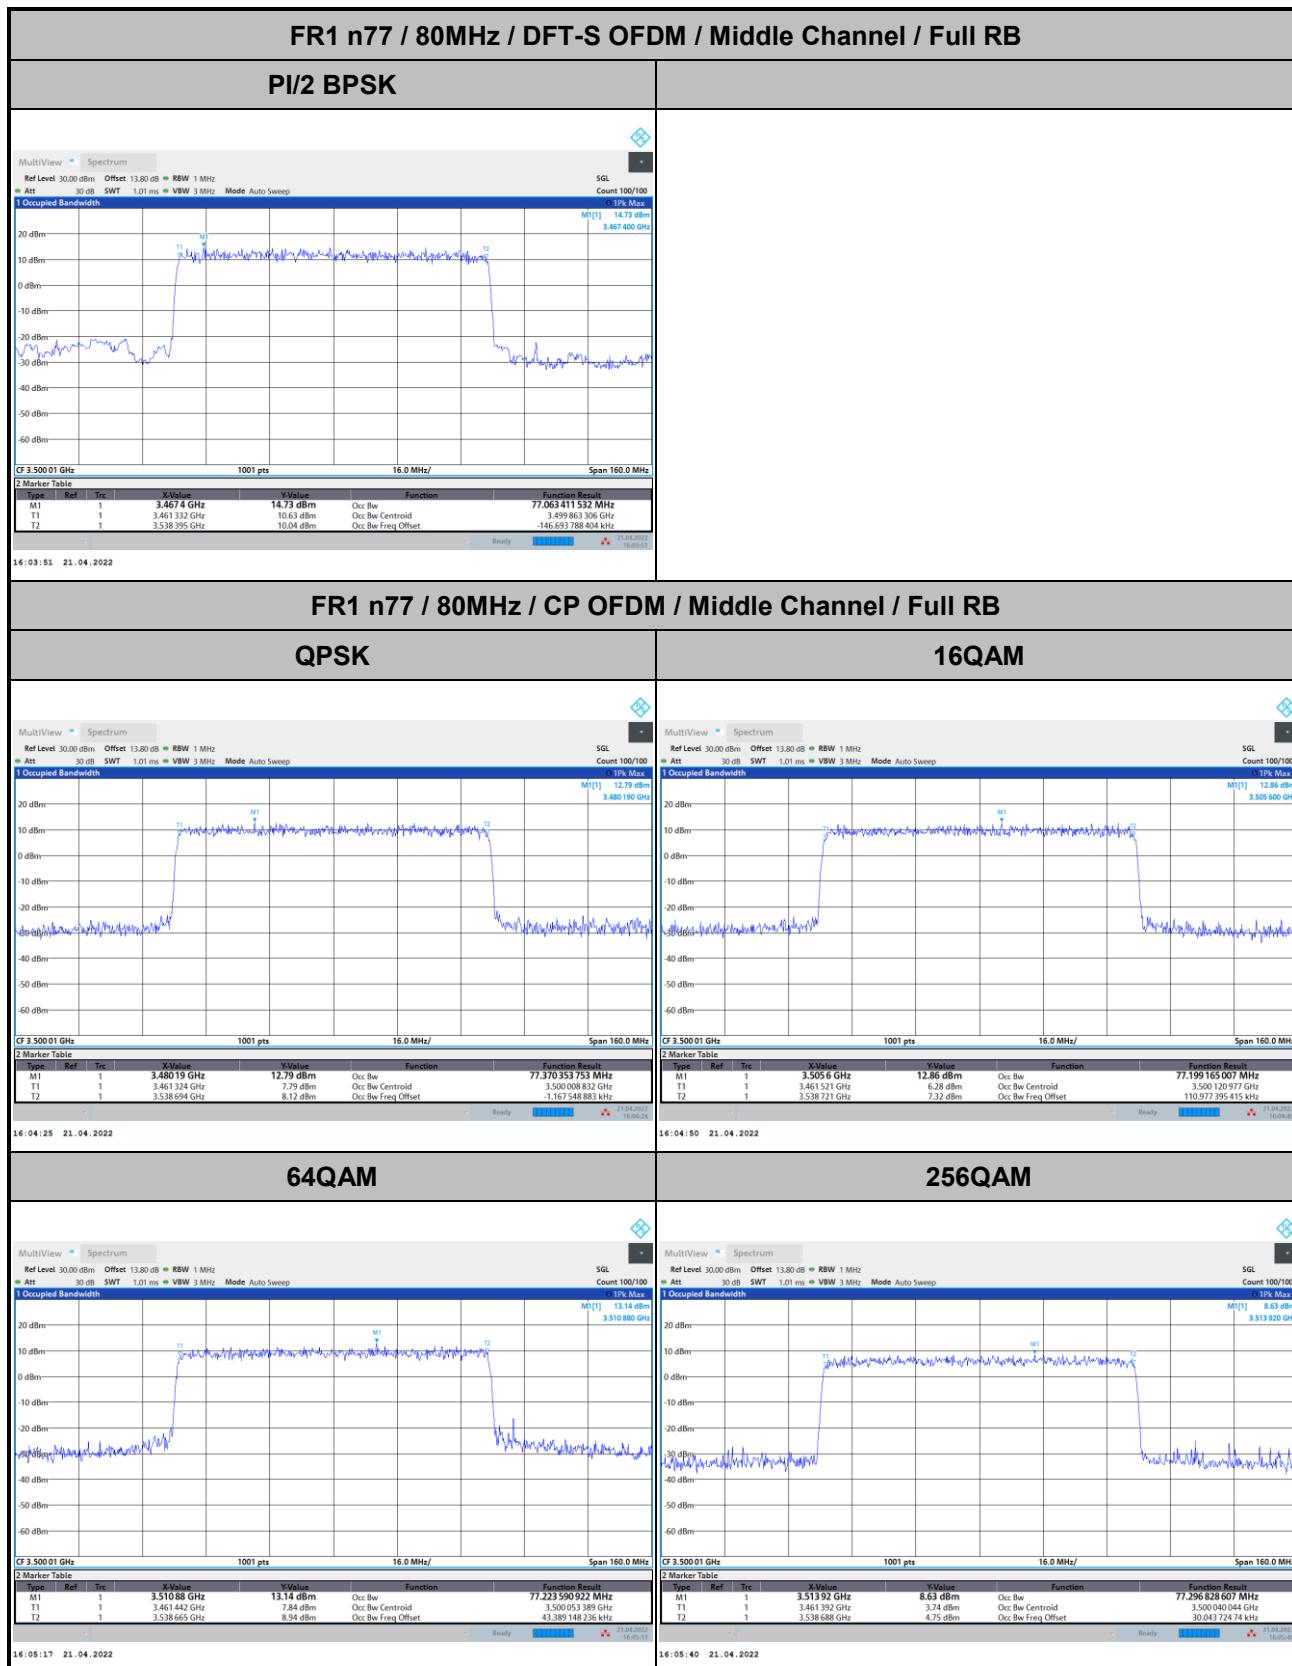

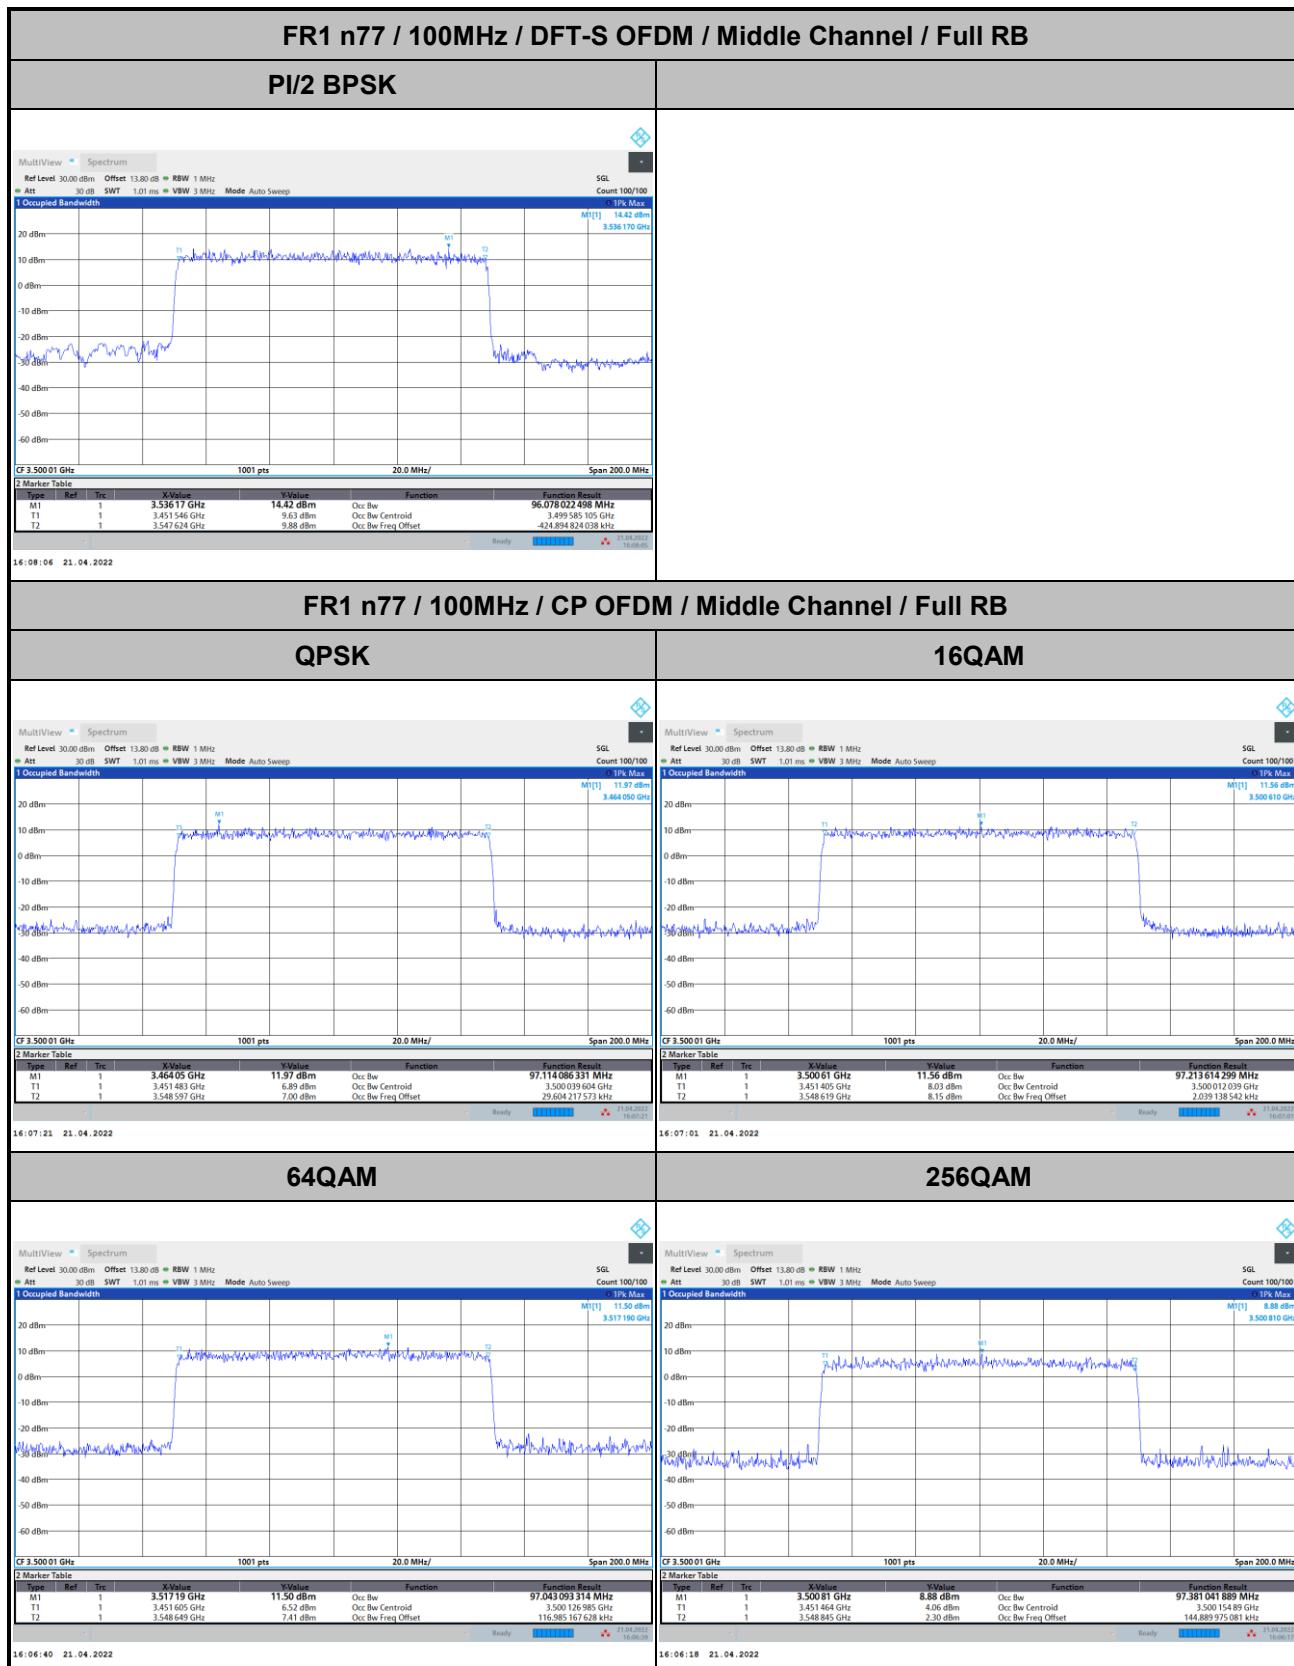




## Conducted Band Edge

### FR1 n77 / 20MHz / DFT-S OFDM / PI/2 BPSK

#### Lowest Band Edge / 1RB0

#### Highest Band Edge / 1RBmax

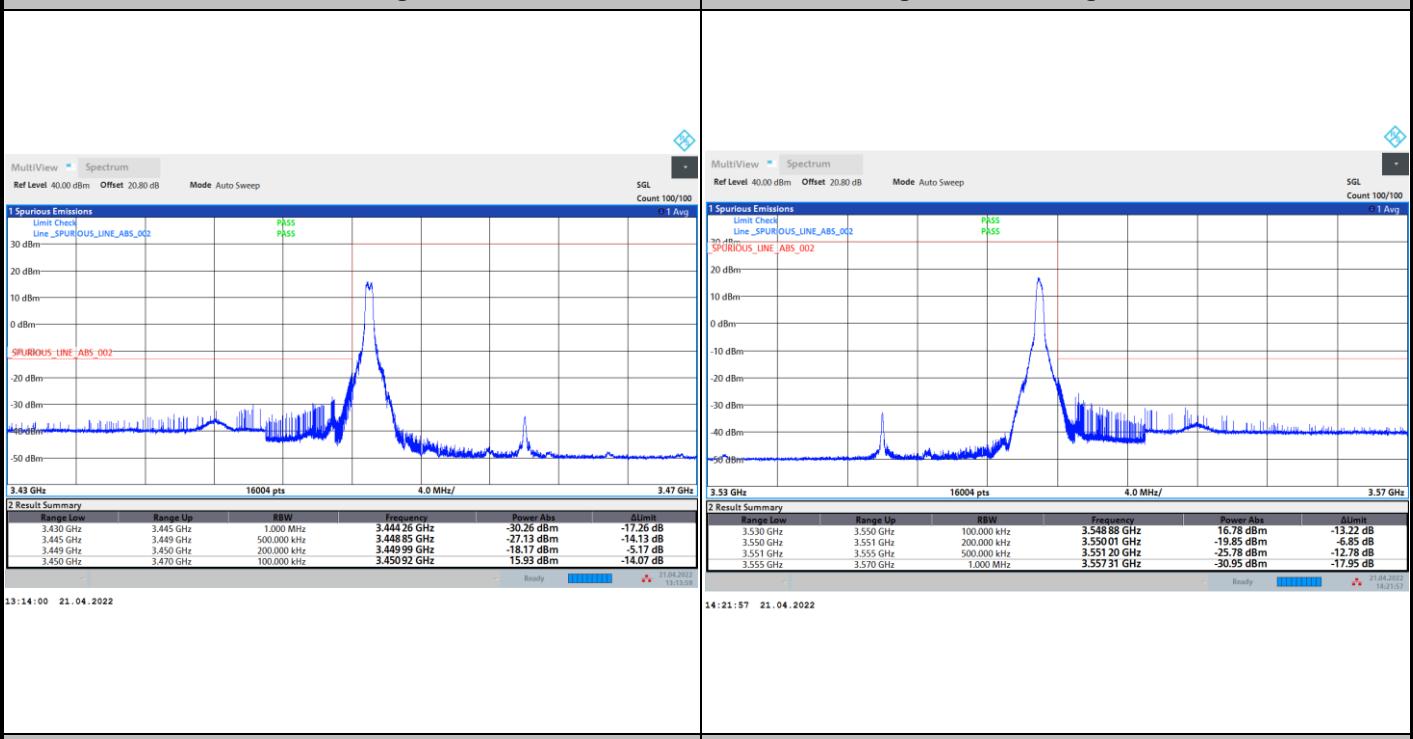

#### Lowest Band Edge / Full RB

#### Highest Band Edge / Full RB

