

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

1.1.1 B2_1.4MHz_EIRP

Band: 2 / Bandwidth: 1.4MHz / NTV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1850.7	1	0	22.98	2.17	25.15	<=33.01	Pass
			5	22.95	2.17	25.12	<=33.01	Pass
		6	0	22.09	2.17	24.26	<=33.01	Pass
	1880	1	0	23.01	2.17	25.18	<=33.01	Pass
			5	22.99	2.17	25.16	<=33.01	Pass
		6	0	22.02	2.17	24.19	<=33.01	Pass
	1909.3	1	0	22.88	2.17	25.05	<=33.01	Pass
			5	23.04	2.17	25.21	<=33.01	Pass
		6	0	21.88	2.17	24.05	<=33.01	Pass
16QAM	1850.7	1	0	22.31	2.17	24.48	<=33.01	Pass
			5	22.29	2.17	24.46	<=33.01	Pass
		6	0	21.20	2.17	23.37	<=33.01	Pass
	1880	1	0	22.07	2.17	24.24	<=33.01	Pass
			5	22.10	2.17	24.27	<=33.01	Pass
		6	0	21.01	2.17	23.18	<=33.01	Pass
	1909.3	1	0	21.66	2.17	23.83	<=33.01	Pass
			5	21.85	2.17	24.02	<=33.01	Pass
		6	0	20.96	2.17	23.13	<=33.01	Pass
Note1: EIRP=Conducted Power+Antenna Gain								

1.1.2 B2_3MHz_EIRP

Band: 2 / Bandwidth: 3MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1851.5	1	0	22.81	2.17	24.98	<=33.01	Pass
			14	22.78	2.17	24.95	<=33.01	Pass
		15	0	21.96	2.17	24.13	<=33.01	Pass
	1880	1	0	22.97	2.17	25.14	<=33.01	Pass
			14	22.75	2.17	24.92	<=33.01	Pass
		15	0	21.95	2.17	24.12	<=33.01	Pass
	1908.5	1	0	22.51	2.17	24.68	<=33.01	Pass
			14	22.85	2.17	25.02	<=33.01	Pass
		15	0	21.70	2.17	23.87	<=33.01	Pass
16QAM	1851.5	1	0	22.25	2.17	24.42	<=33.01	Pass
			14	22.15	2.17	24.32	<=33.01	Pass
		15	0	21.00	2.17	23.17	<=33.01	Pass
	1880	1	0	22.03	2.17	24.20	<=33.01	Pass
			14	21.85	2.17	24.02	<=33.01	Pass
		15	0	20.99	2.17	23.16	<=33.01	Pass
	1908.5	1	0	21.29	2.17	23.46	<=33.01	Pass
			14	21.69	2.17	23.86	<=33.01	Pass
		15	0	20.82	2.17	22.99	<=33.01	Pass
Note1: EIRP=Conducted Power+Antenna Gain								

1.1.3 B2_5MHz_EIRP

Band: 2 / Bandwidth: 5MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1852.5	1	0	23.08	2.17	25.25	<=33.01	Pass
			24	23.00	2.17	25.17	<=33.01	Pass
		25	0	22.08	2.17	24.25	<=33.01	Pass
	1880	1	0	23.19	2.17	25.36	<=33.01	Pass
			24	22.85	2.17	25.02	<=33.01	Pass
		25	0	22.07	2.17	24.24	<=33.01	Pass
	1907.5	1	0	22.63	2.17	24.80	<=33.01	Pass
			24	22.99	2.17	25.16	<=33.01	Pass
		25	0	21.75	2.17	23.92	<=33.01	Pass
16QAM	1852.5	1	0	22.37	2.17	24.54	<=33.01	Pass
			24	22.36	2.17	24.53	<=33.01	Pass
		25	0	21.20	2.17	23.37	<=33.01	Pass
	1880	1	0	22.39	2.17	24.56	<=33.01	Pass
			24	22.09	2.17	24.26	<=33.01	Pass
		25	0	21.17	2.17	23.34	<=33.01	Pass
	1907.5	1	0	21.92	2.17	24.09	<=33.01	Pass
			24	22.25	2.17	24.42	<=33.01	Pass
		25	0	20.90	2.17	23.07	<=33.01	Pass
Note1: EIRP=Conducted Power+Antenna Gain								

1.1.4 B2_10MHz_EIRP

Band: 2 / Bandwidth: 10MHz / NTVN								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1855	1	0	23.18	2.17	25.35	<=33.01	Pass
			49	23.14	2.17	25.31	<=33.01	Pass
		50	0	22.09	2.17	24.26	<=33.01	Pass
	1880	1	0	23.52	2.17	25.69	<=33.01	Pass
			49	22.84	2.17	25.01	<=33.01	Pass
		50	0	22.22	2.17	24.39	<=33.01	Pass
	1905	1	0	23.55	2.17	25.72	<=33.01	Pass
			49	23.25	2.17	25.42	<=33.01	Pass
		50	0	22.12	2.17	24.29	<=33.01	Pass
16QAM	1855	1	0	22.48	2.17	24.65	<=33.01	Pass
			49	22.47	2.17	24.64	<=33.01	Pass
	1880	1	0	22.58	2.17	24.75	<=33.01	Pass
			49	22.07	2.17	24.24	<=33.01	Pass
	1905	1	0	22.51	2.17	24.68	<=33.01	Pass
			49	22.14	2.17	24.31	<=33.01	Pass
Note1: EIRP=Conducted Power+Antenna Gain								

1.1.5 B2_15MHz_EIRP

Band: 2 / Bandwidth: 15MHz / NTN								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1857.5	1	0	23.20	2.17	25.37	<=33.01	Pass
			74	23.28	2.17	25.45	<=33.01	Pass
		75	0	22.17	2.17	24.34	<=33.01	Pass
	1880	1	0	23.41	2.17	25.58	<=33.01	Pass
			74	22.89	2.17	25.06	<=33.01	Pass
		75	0	22.28	2.17	24.45	<=33.01	Pass
	1902.5	1	0	23.75	2.17	25.92	<=33.01	Pass
			74	23.14	2.17	25.31	<=33.01	Pass
		75	0	22.34	2.17	24.51	<=33.01	Pass
16QAM	1857.5	1	0	22.17	2.17	24.34	<=33.01	Pass
			74	22.23	2.17	24.40	<=33.01	Pass
	1880	1	0	22.55	2.17	24.72	<=33.01	Pass
			74	21.99	2.17	24.16	<=33.01	Pass
	1902.5	1	0	22.78	2.17	24.95	<=33.01	Pass
			74	22.07	2.17	24.24	<=33.01	Pass

Note1: EIRP=Conducted Power+Antenna Gain

1.1.6 B2_20MHz_EIRP

Band: 2 / Bandwidth: 20MHz / NTN								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	1860	1	0	23.21	2.17	25.38	<=33.01	Pass
			99	23.29	2.17	25.46	<=33.01	Pass
		100	0	22.45	2.17	24.62	<=33.01	Pass
	1880	1	0	23.26	2.17	25.43	<=33.01	Pass
			99	22.94	2.17	25.11	<=33.01	Pass
		100	0	22.30	2.17	24.47	<=33.01	Pass
	1900	1	0	23.46	2.17	25.63	<=33.01	Pass
			99	22.96	2.17	25.13	<=33.01	Pass
		100	0	22.58	2.17	24.75	<=33.01	Pass
16QAM	1860	1	0	22.75	2.17	24.92	<=33.01	Pass
			99	22.82	2.17	24.99	<=33.01	Pass
	1880	1	0	22.88	2.17	25.05	<=33.01	Pass
			99	22.50	2.17	24.67	<=33.01	Pass
	1900	1	0	22.94	2.17	25.11	<=33.01	Pass
			99	22.39	2.17	24.56	<=33.01	Pass

Note1: EIRP=Conducted Power+Antenna Gain

2. Frequency Stability

2.1 Test Result

2.1.1 B2_10MHz

Band: 2 / Bandwidth: 10MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1880	50	0	20	3.40	-2.503	-0.0013	-2.5 to 2.5	Pass
					3.80	-0.315	-0.0002	-2.5 to 2.5	Pass
					4.20	-0.257	-0.0001	-2.5 to 2.5	Pass
				-30	3.80	-0.887	-0.0005	-2.5 to 2.5	Pass
				-20	3.80	0.186	0.0001	-2.5 to 2.5	Pass
				-10	3.80	-0.429	-0.0002	-2.5 to 2.5	Pass
				0	3.80	-1.144	-0.0006	-2.5 to 2.5	Pass
				10	3.80	-1.073	-0.0006	-2.5 to 2.5	Pass
				30	3.80	-1.531	-0.0008	-2.5 to 2.5	Pass
				40	3.80	0.286	0.0002	-2.5 to 2.5	Pass
				50	3.80	1.245	0.0007	-2.5 to 2.5	Pass

3. 99% & 26dB Bandwidth

3.1 Test Result

3.1.1 Band2_OBW


Band: 2 / NTN							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		99% Occupied Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
1.4	QPSK	1880	6	0	1.108	/	Pass
	16QAM	1880	6	0	1.108	/	Pass
3	QPSK	1880	15	0	2.745	/	Pass
	16QAM	1880	15	0	2.743	/	Pass
5	QPSK	1880	25	0	4.563	/	Pass
	16QAM	1880	25	0	4.545	/	Pass
10	QPSK	1880	50	0	9.070	/	Pass
	16QAM	1880	27	0	5.150	/	Pass
15	QPSK	1880	75	0	13.643	/	Pass
	16QAM	1880	27	0	5.537	/	Pass
20	QPSK	1880	100	0	18.129	/	Pass
	16QAM	1880	27	0	5.705	/	Pass

3.1.2 Band2_XDB


Band: 2 / NTN							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		26dB Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
1.4	QPSK	1880	6	0	1.322	/	Pass
	16QAM	1880	6	0	1.319	/	Pass
3	QPSK	1880	15	0	3.076	/	Pass
	16QAM	1880	15	0	3.080	/	Pass
5	QPSK	1880	25	0	5.104	/	Pass
	16QAM	1880	25	0	5.078	/	Pass
10	QPSK	1880	50	0	10.247	/	Pass
	16QAM	1880	27	0	6.360	/	Pass
15	QPSK	1880	75	0	15.613	/	Pass
	16QAM	1880	27	0	7.046	/	Pass
20	QPSK	1880	100	0	20.588	/	Pass
	16QAM	1880	27	0	7.697	/	Pass

3.2 Test Graph


3.2.1 Band2_OBW

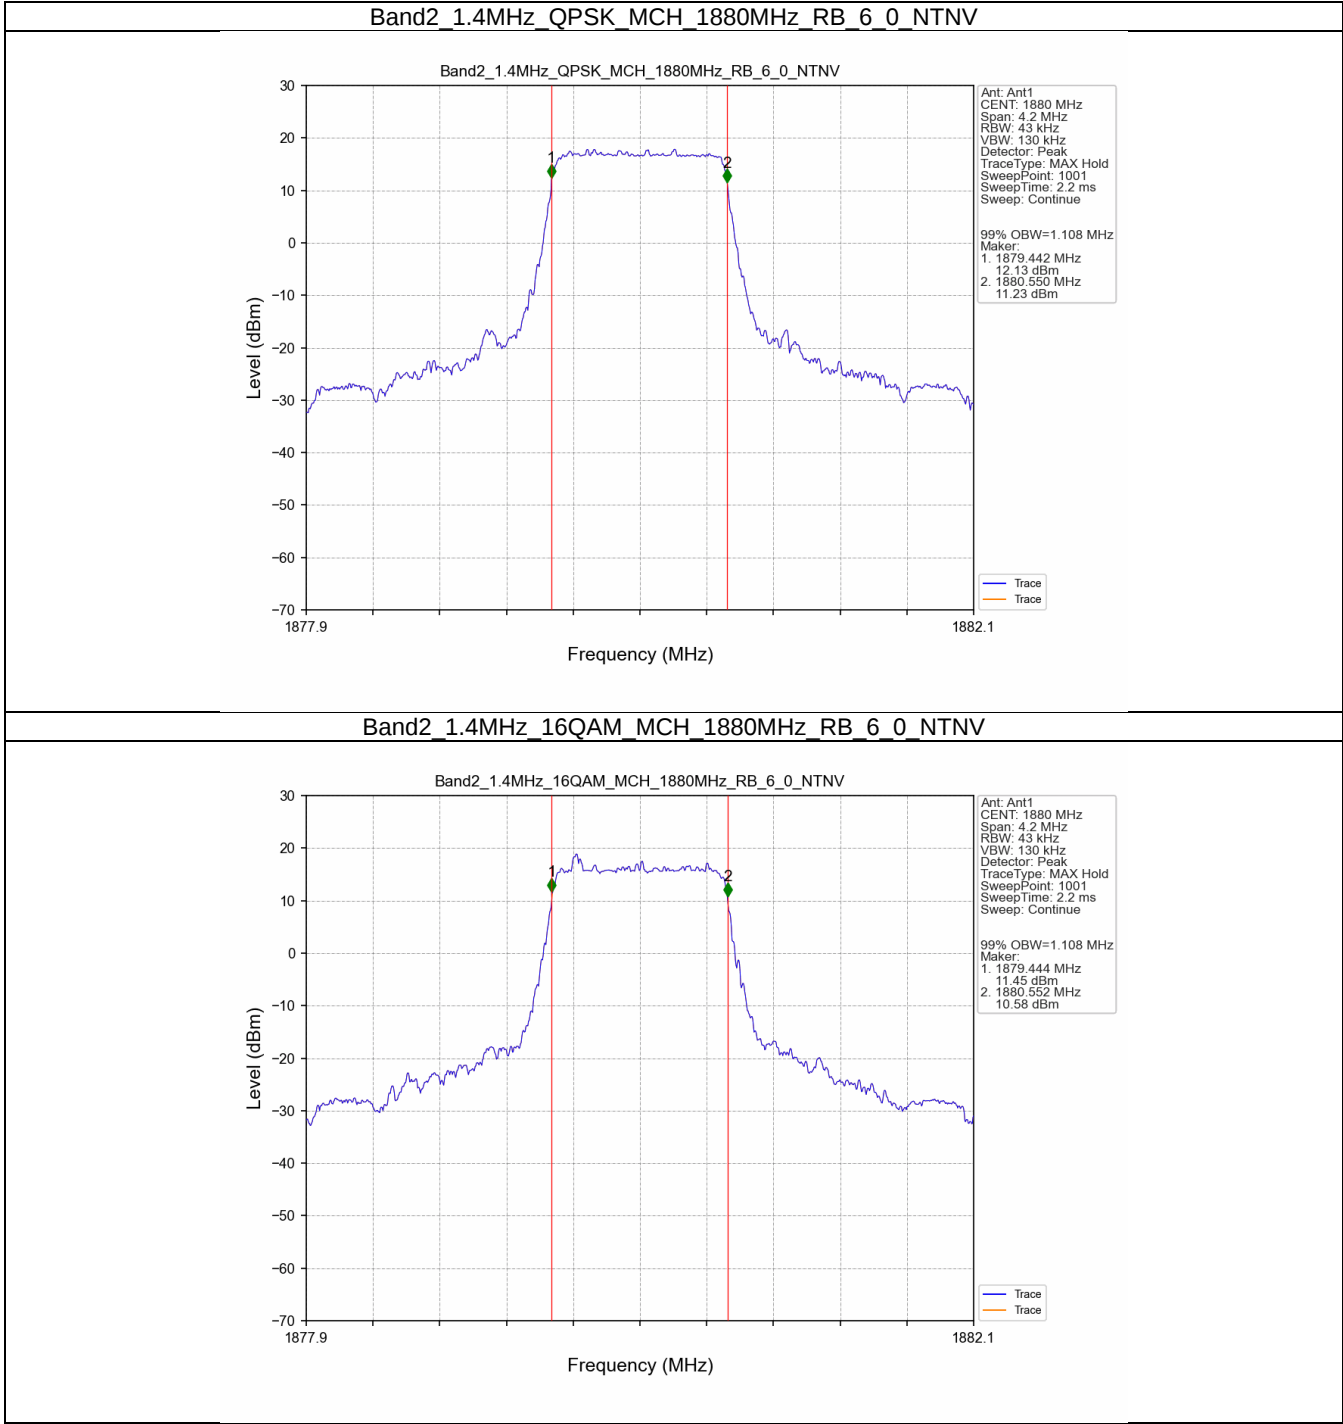


Band2_3MHz_QPSK_MCH_1880MHz_RB_15_0_NTNV

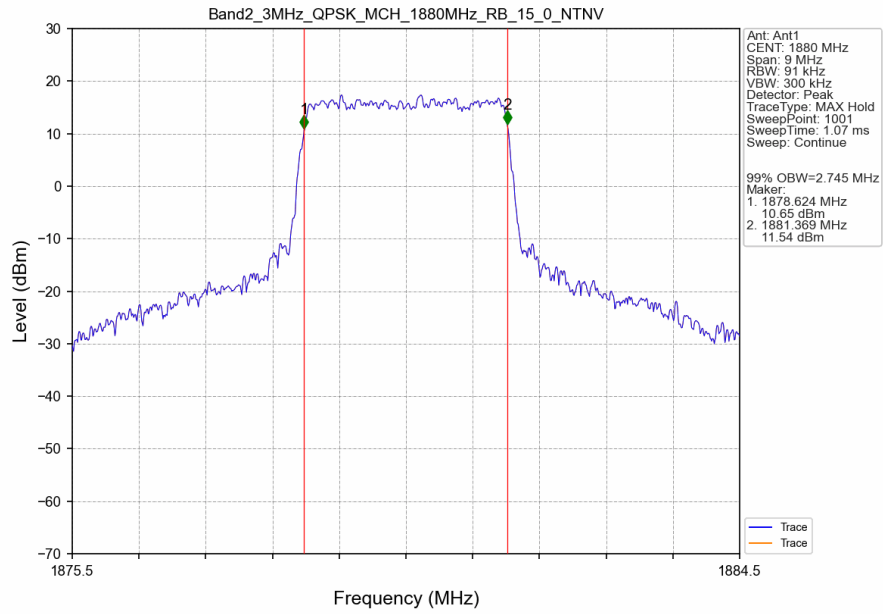


Band2_3MHz_16QAM_MCH_1880MHz_RB_15_0_NTNV

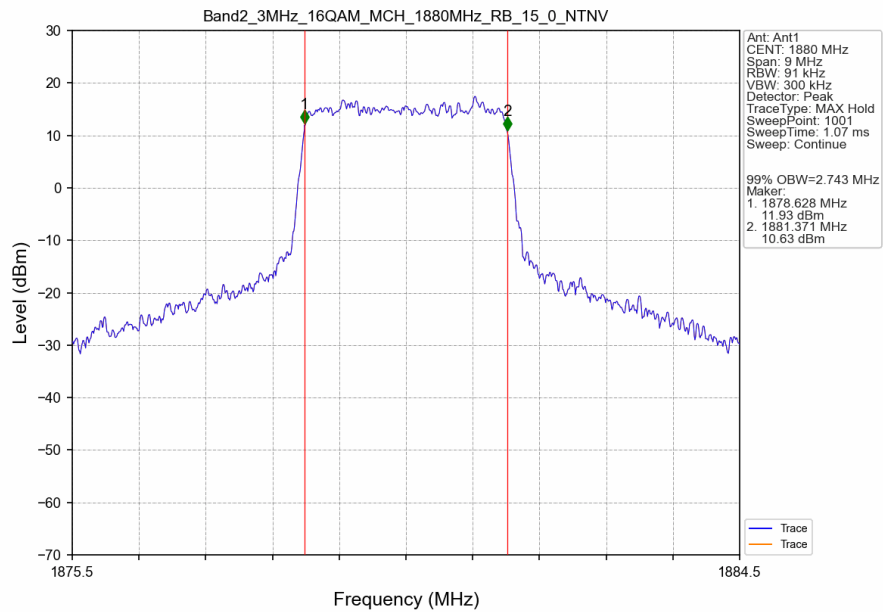


Band2_5MHz_QPSK_MCH_1880MHz_RB_25_0_NTNV

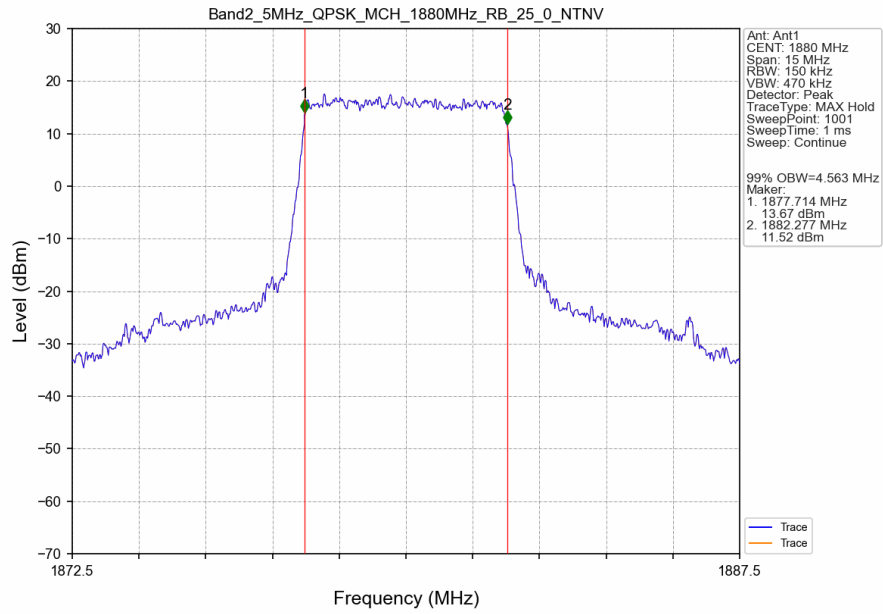


Band2_5MHz_16QAM_MCH_1880MHz_RB_25_0_NTNV

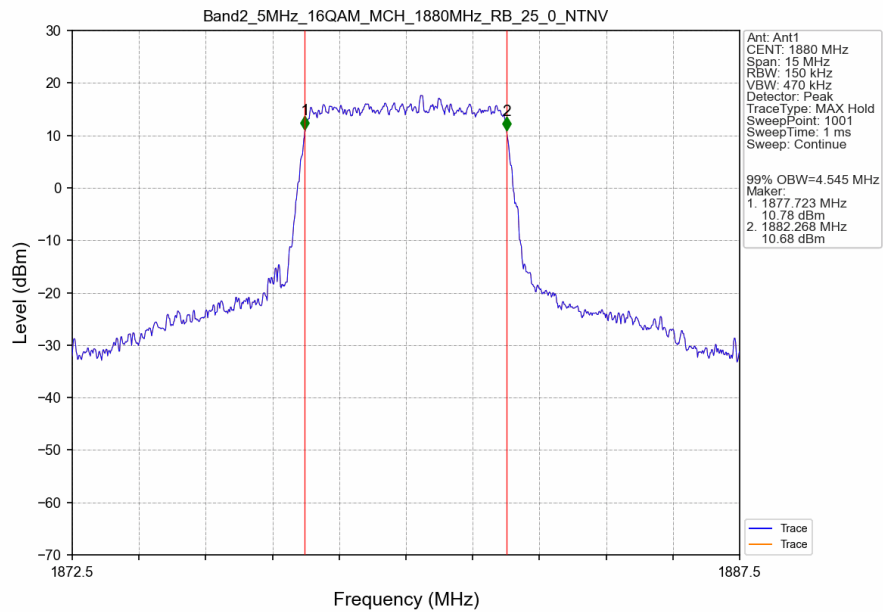


Band2_10MHz_QPSK_MCH_1880MHz_RB_50_0_NTNV

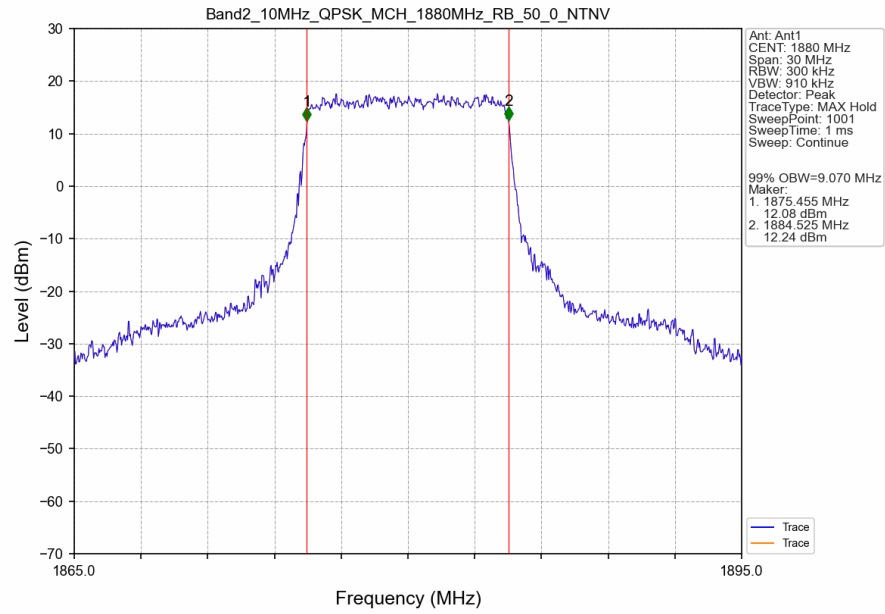


Band2_10MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

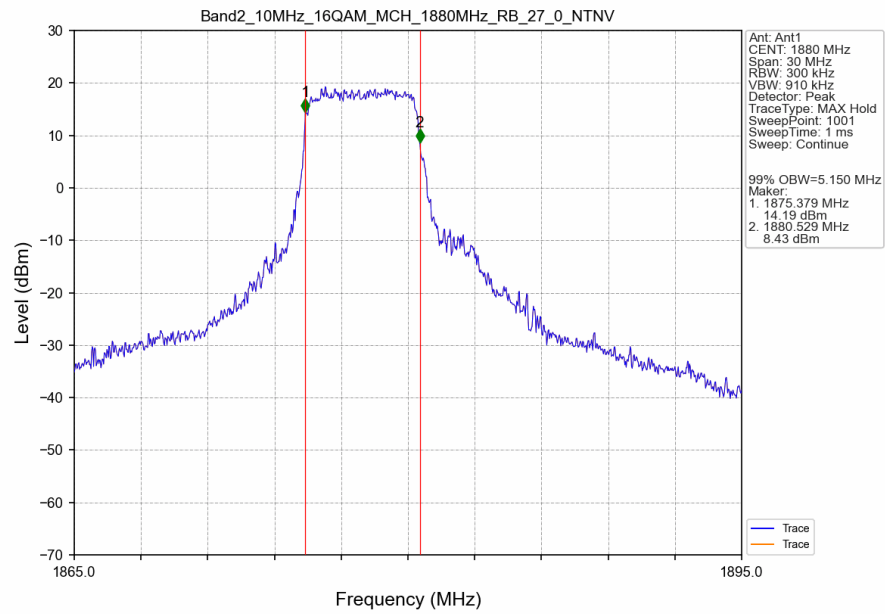


Band2_15MHz_QPSK_MCH_1880MHz_RB_75_0_NTNV

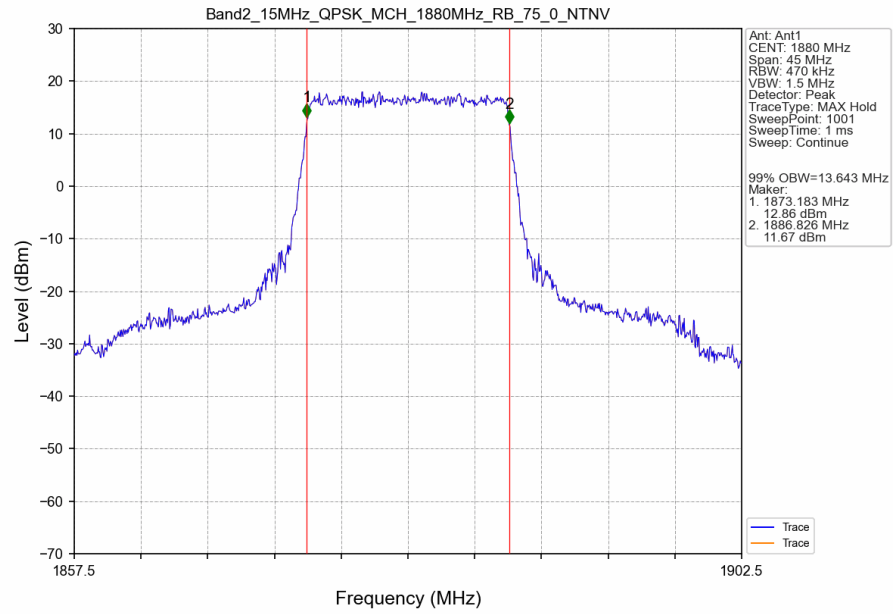


Band2_15MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

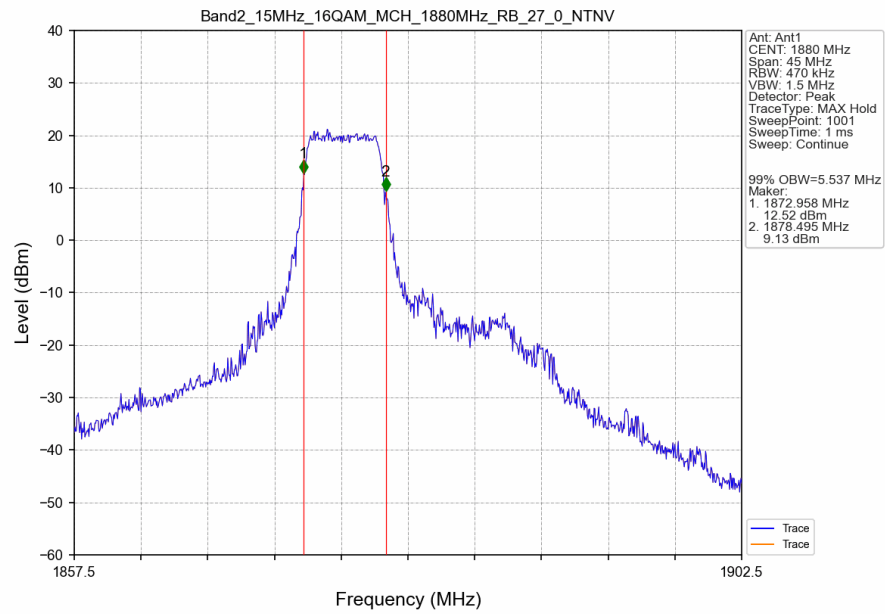


Band2_20MHz_QPSK_MCH_1880MHz_RB_100_0_NTNV

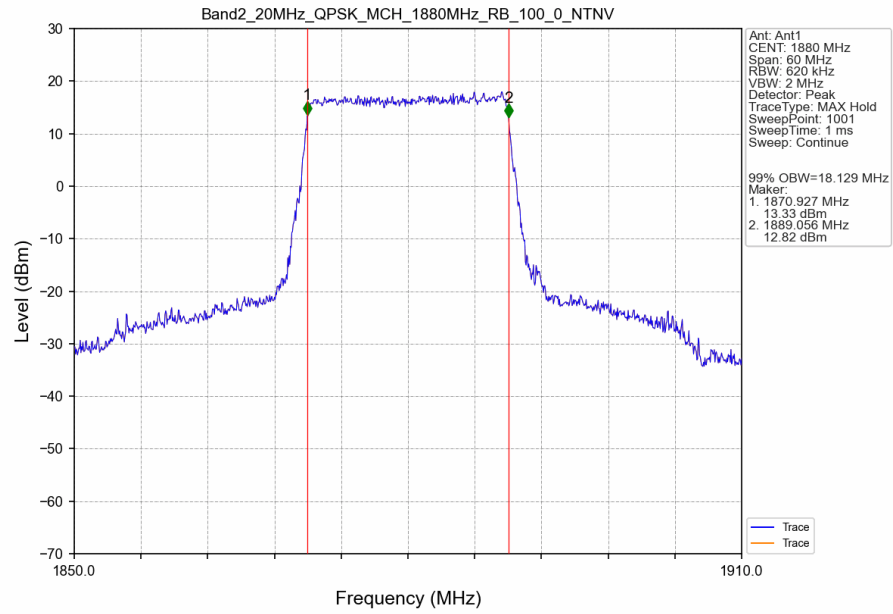


Band2_20MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

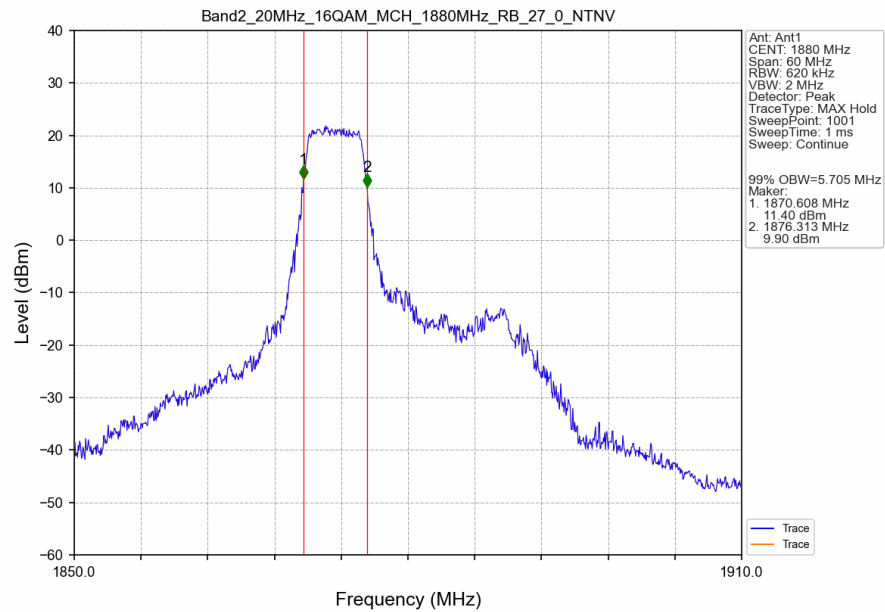


3.2.2 Band2_XDB

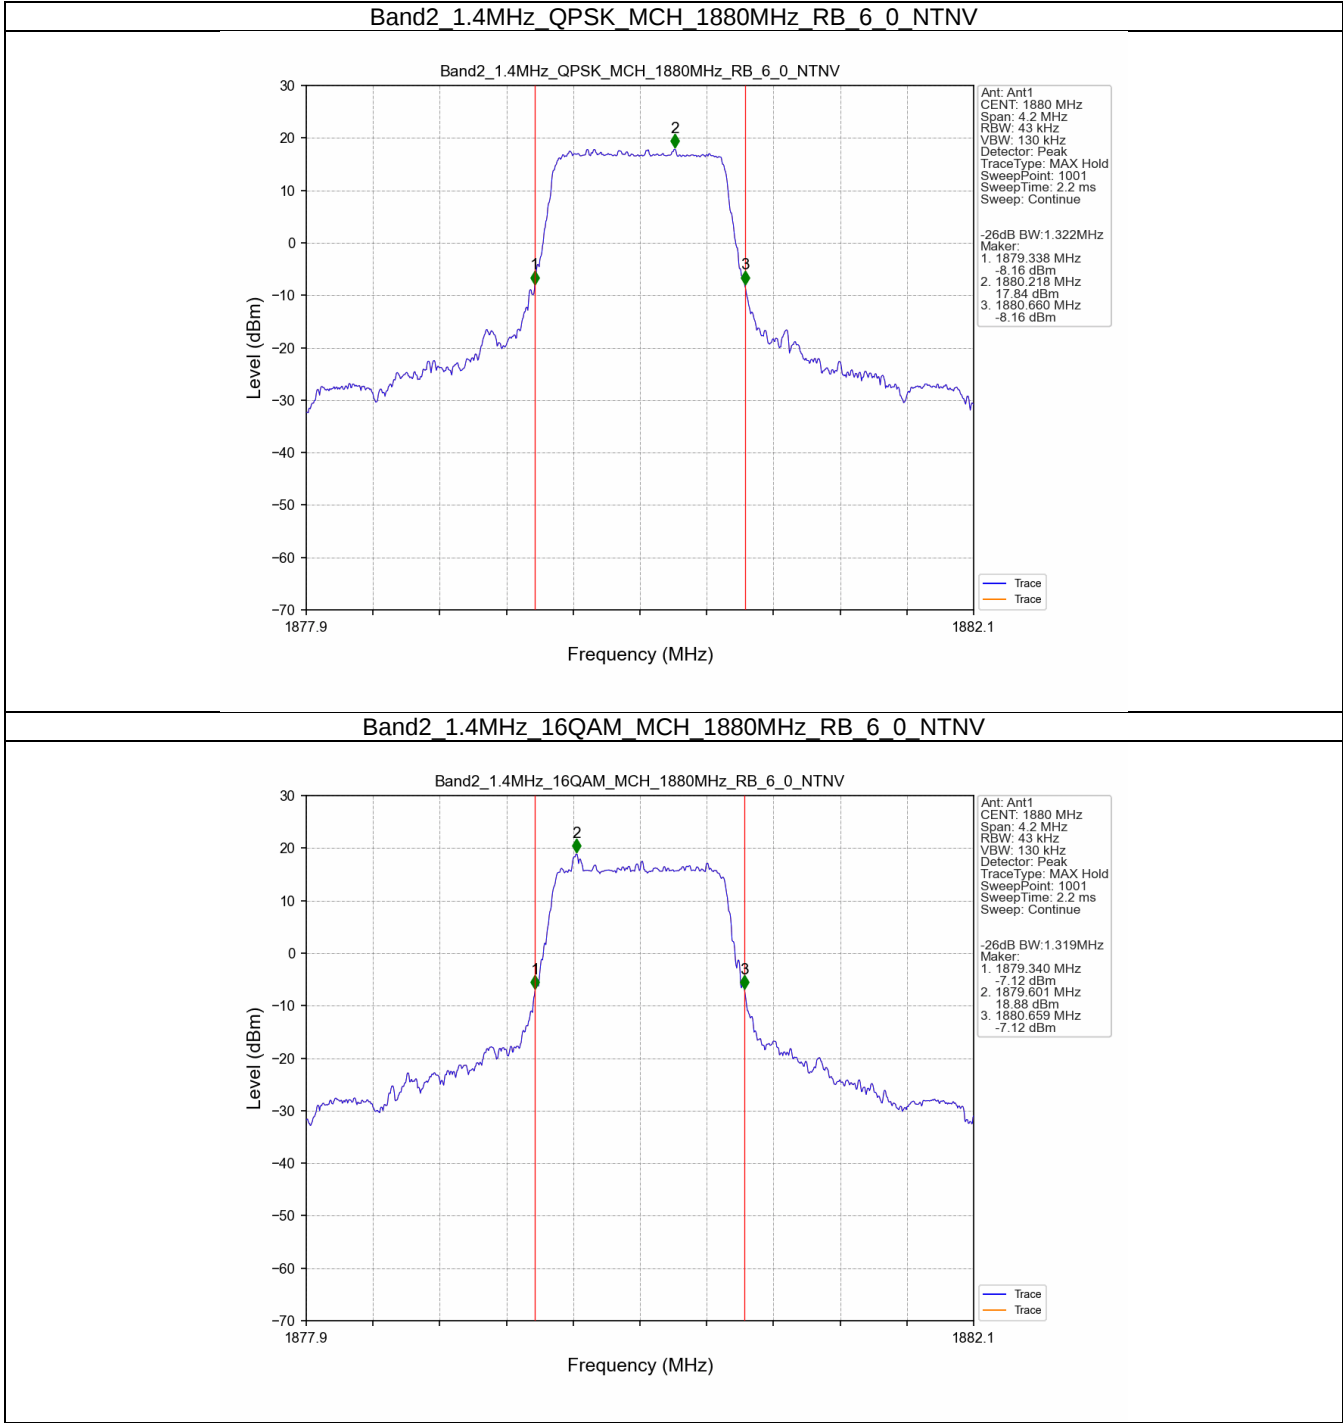


Band2_3MHz_QPSK_MCH_1880MHz_RB_15_0_NTNV

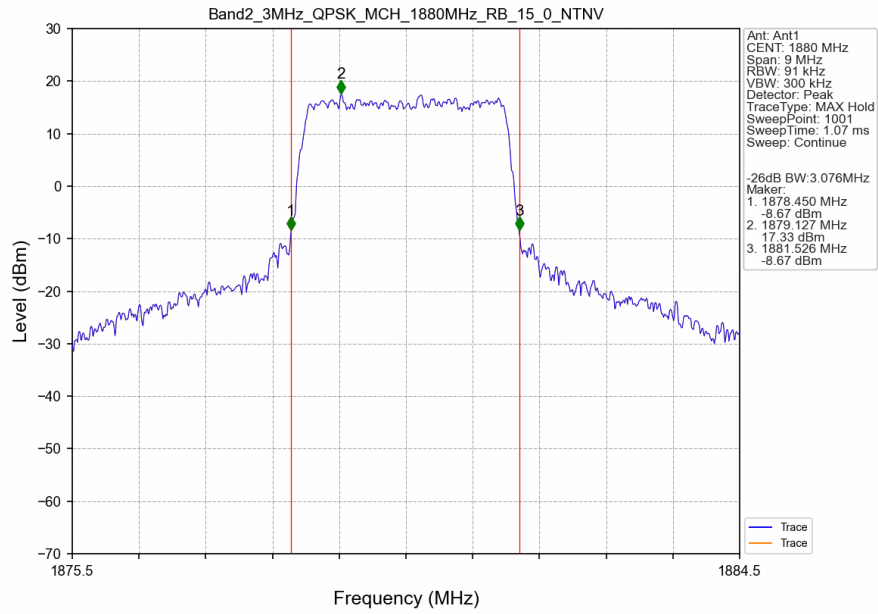


Band2_3MHz_16QAM_MCH_1880MHz_RB_15_0_NTNV

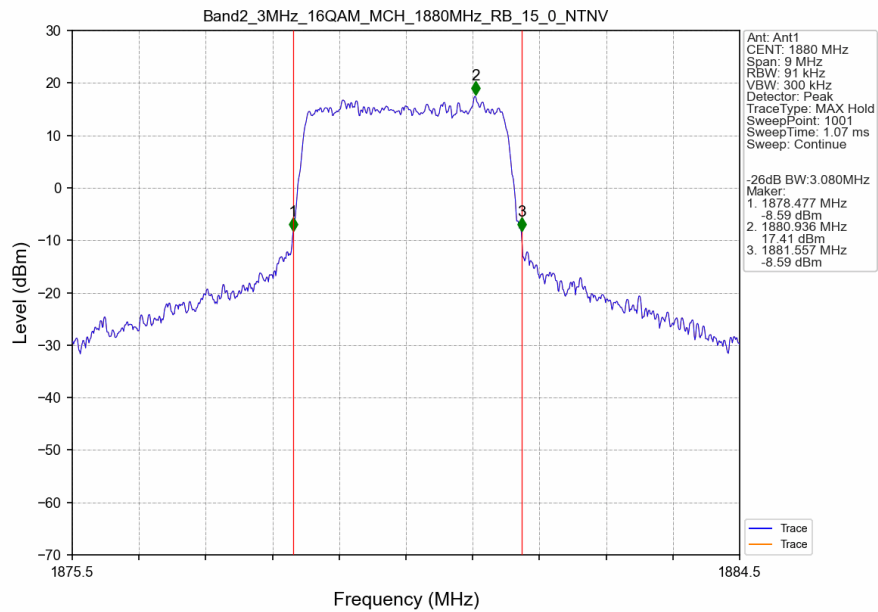


Band2_5MHz_QPSK_MCH_1880MHz_RB_25_0_NTNV

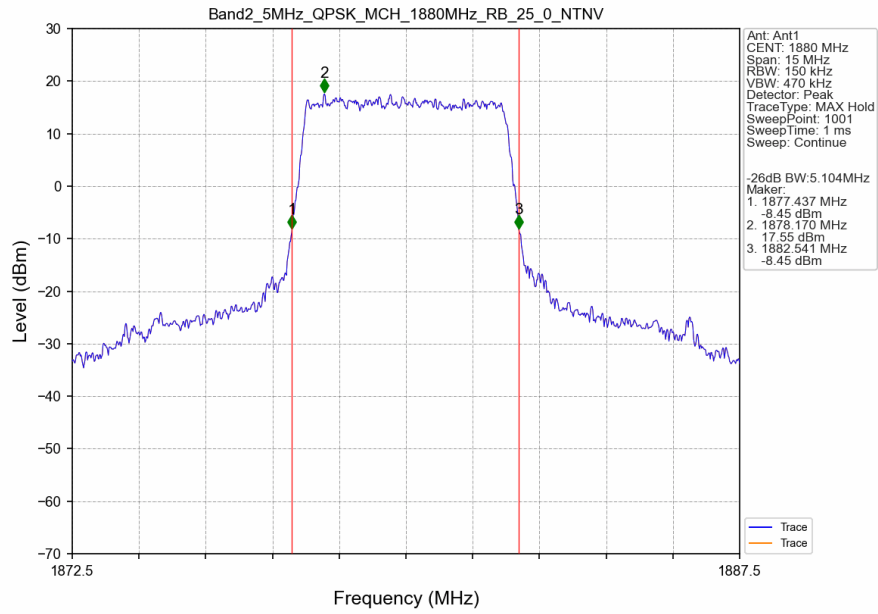


Band2_5MHz_16QAM_MCH_1880MHz_RB_25_0_NTNV

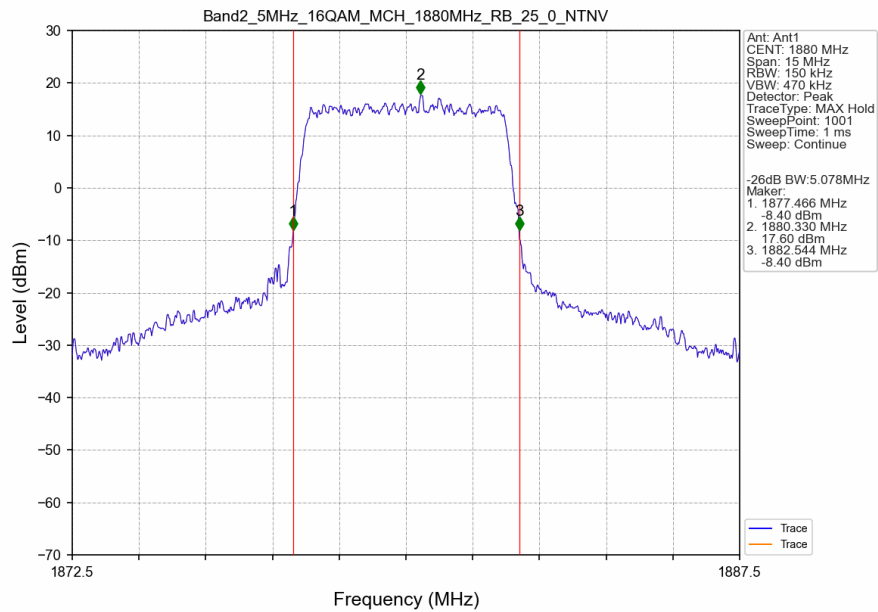


Band2_10MHz_QPSK_MCH_1880MHz_RB_50_0_NTNV

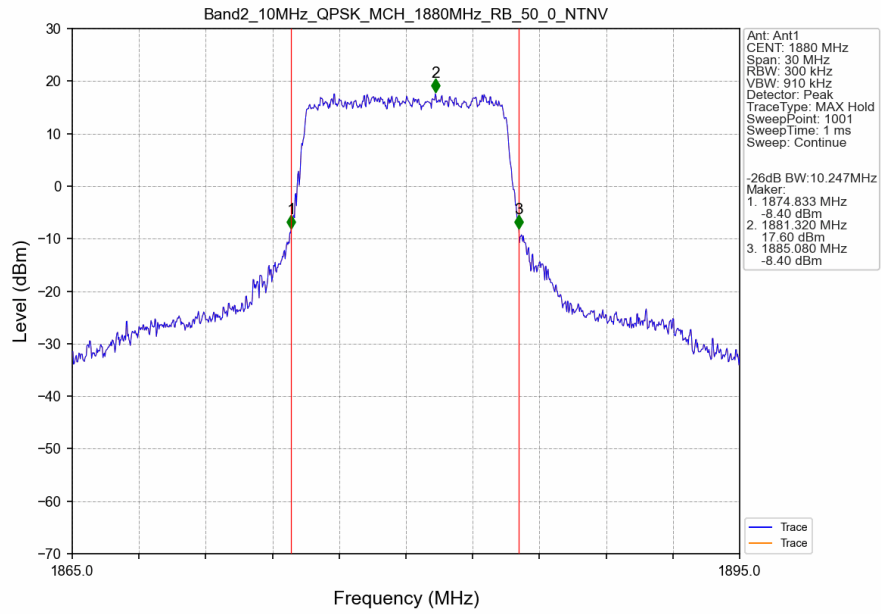


Band2_10MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

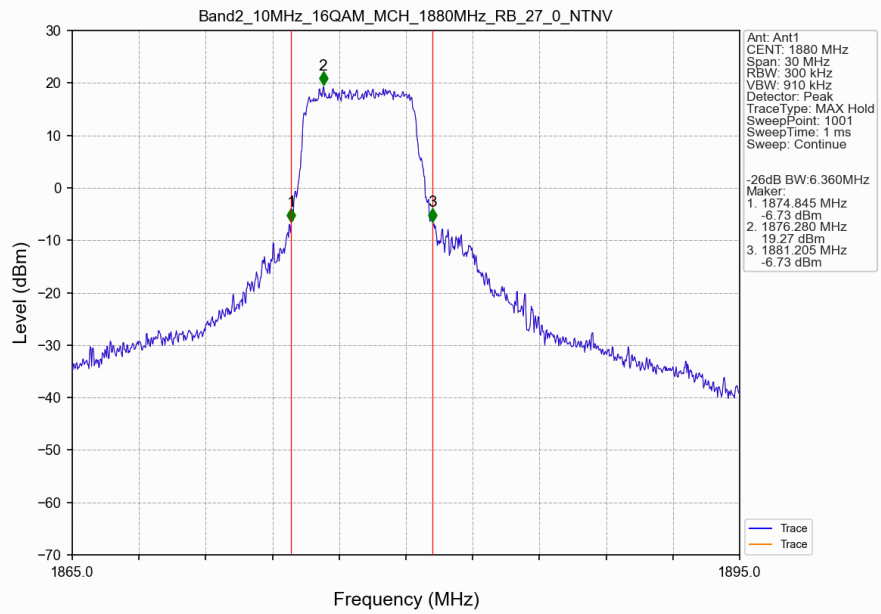


Band2_15MHz_QPSK_MCH_1880MHz_RB_75_0_NTNV

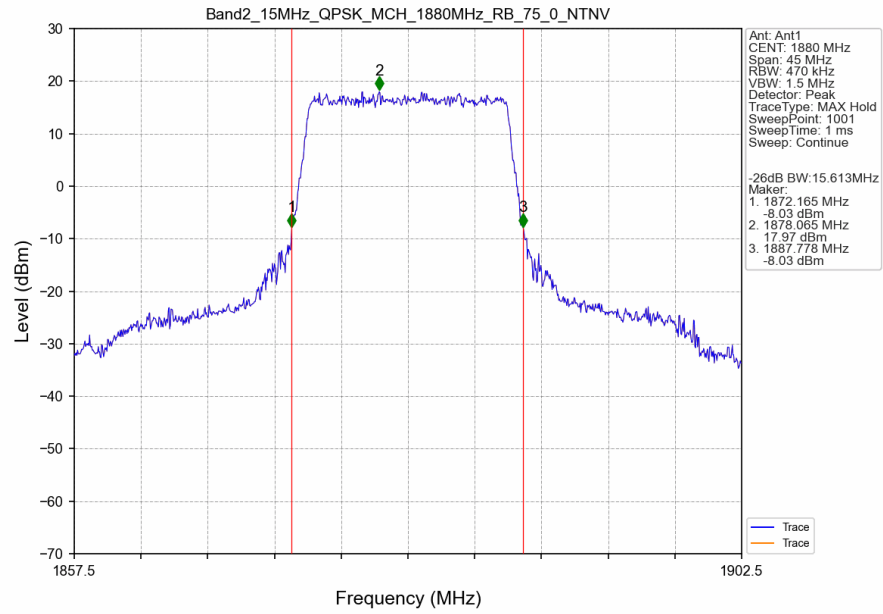


Band2_15MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

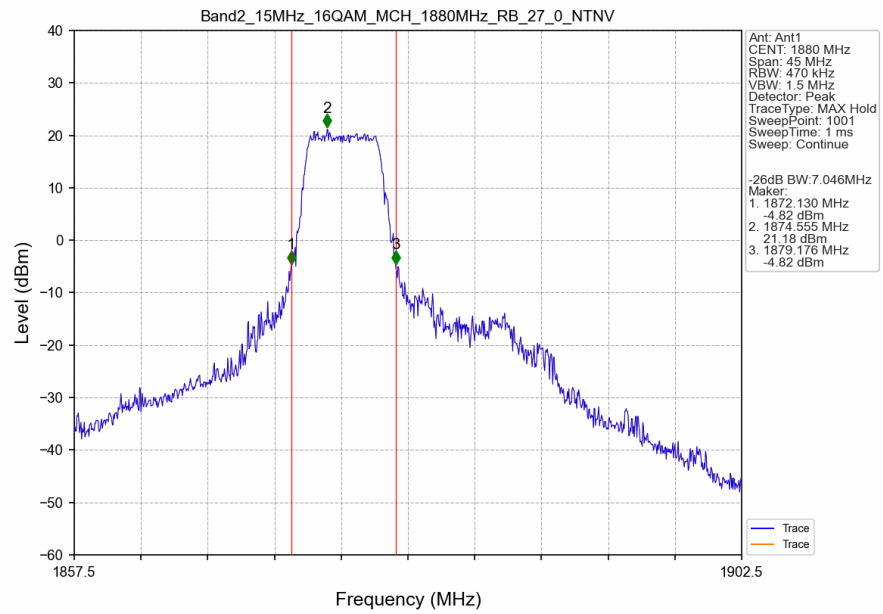

Band2_20MHz_QPSK_MCH_1880MHz_RB_100_0_NTNV

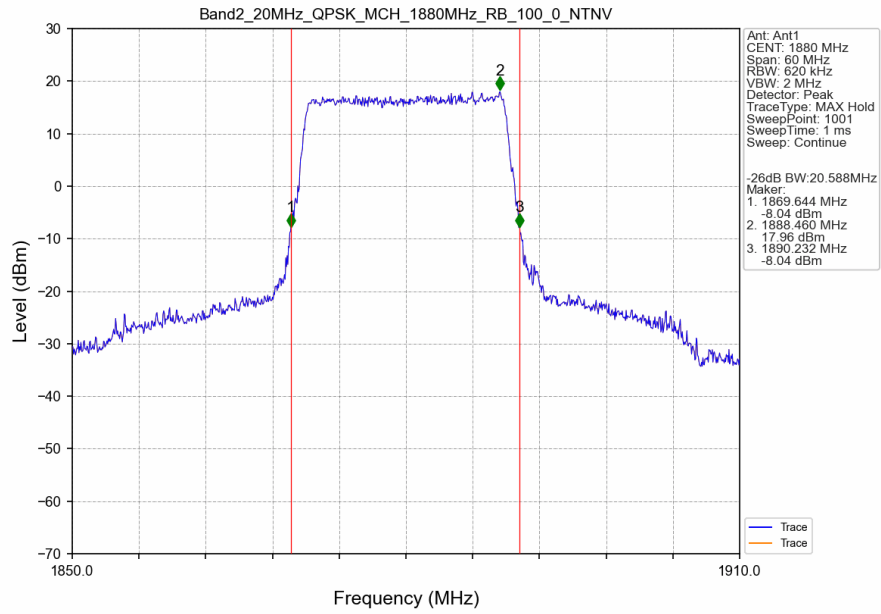

Band2_20MHz_16QAM_MCH_1880MHz_RB_27_0_NTNV

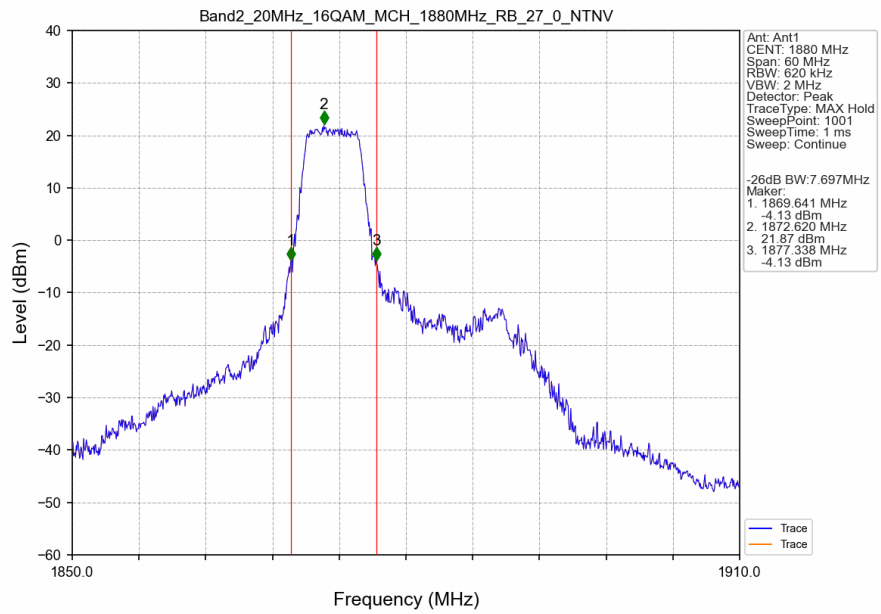

4. Peak-Average Ratio


4.1 Test Result

4.1.1 B2_20MHz

Band: 2 / Bandwidth: 20MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	1880	100	0	5.86	<=13	Pass
16QAM	1880	27	0	6.55	<=13	Pass

4.2 Test Graph

4.2.1 B2_20MHz

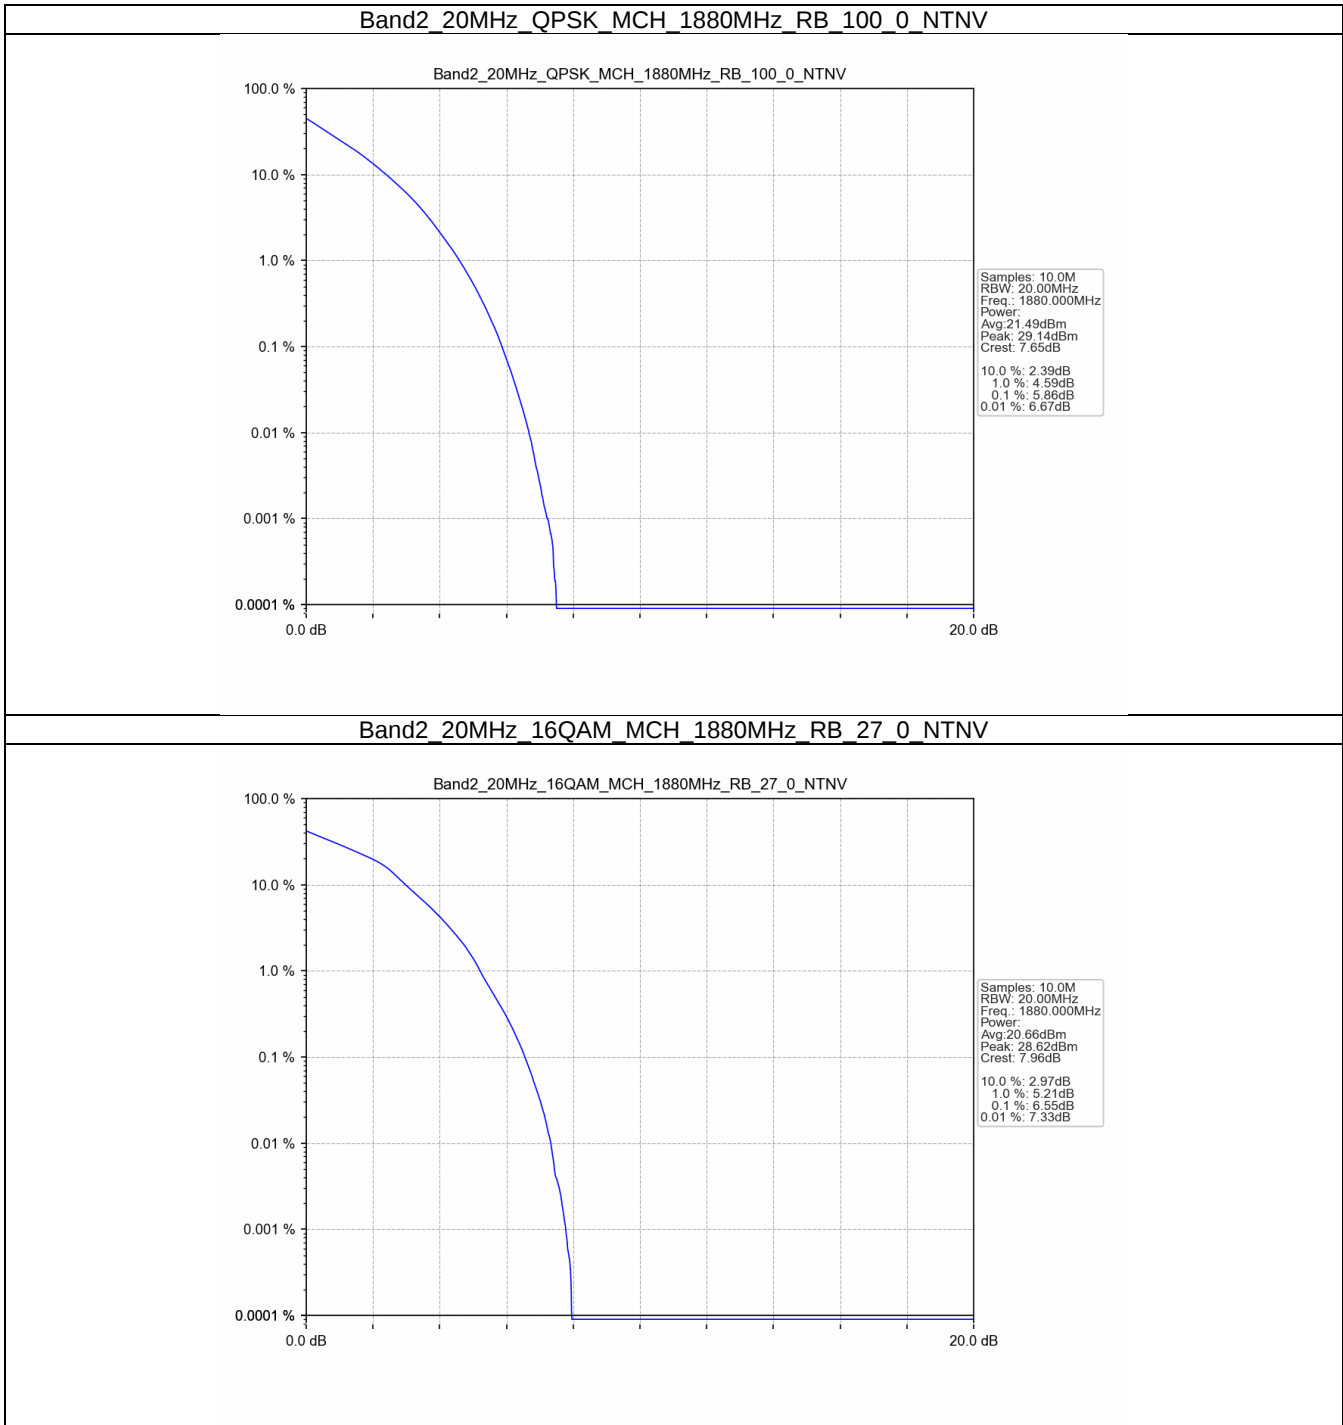

5. Spurious Emission

5.1 Test Result

5.1.1 B2_1.4MHz

Band: 2 / Bandwidth: 1.4MHz / NTVN						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1850.7	1	0	Refer To Test Graph		Pass
		6	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
			0	Refer To Test Graph		Pass
	1909.3	1	5	Refer To Test Graph		Pass
		6	0	Refer To Test Graph		Pass

5.1.2 B2_3MHz

Band: 2 / Bandwidth: 3MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1851.5	1	0	Refer To Test Graph		Pass
		15	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
	1908.5	1	0	Refer To Test Graph		Pass
			14	Refer To Test Graph		Pass
		15	0	Refer To Test Graph		Pass

5.1.3 B2_5MHz

Band: 2 / Bandwidth: 5MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1852.5	1	0	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
	1907.5	1	0	Refer To Test Graph		Pass
			24	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass

5.1.4 B2_10MHz

Band: 2 / Bandwidth: 10MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1855	1	0	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
	1905	1	0	Refer To Test Graph		Pass
			49	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass

5.1.5 B2_15MHz


Band: 2 / Bandwidth: 15MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1857.5	1	0	Refer To Test Graph		Pass
		75	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
	1902.5	1	0	Refer To Test Graph		Pass
			74	Refer To Test Graph		Pass
		75	0	Refer To Test Graph		Pass

5.1.6 B2_20MHz


Band: 2 / Bandwidth: 20MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	1860	1	0	Refer To Test Graph		Pass
		100	0	Refer To Test Graph		Pass
	1880	1	0	Refer To Test Graph		Pass
	1900	1	0	Refer To Test Graph		Pass
			99	Refer To Test Graph		Pass
		100	0	Refer To Test Graph		Pass

5.2 Test Graph


5.2.1 B2_1.4MHz

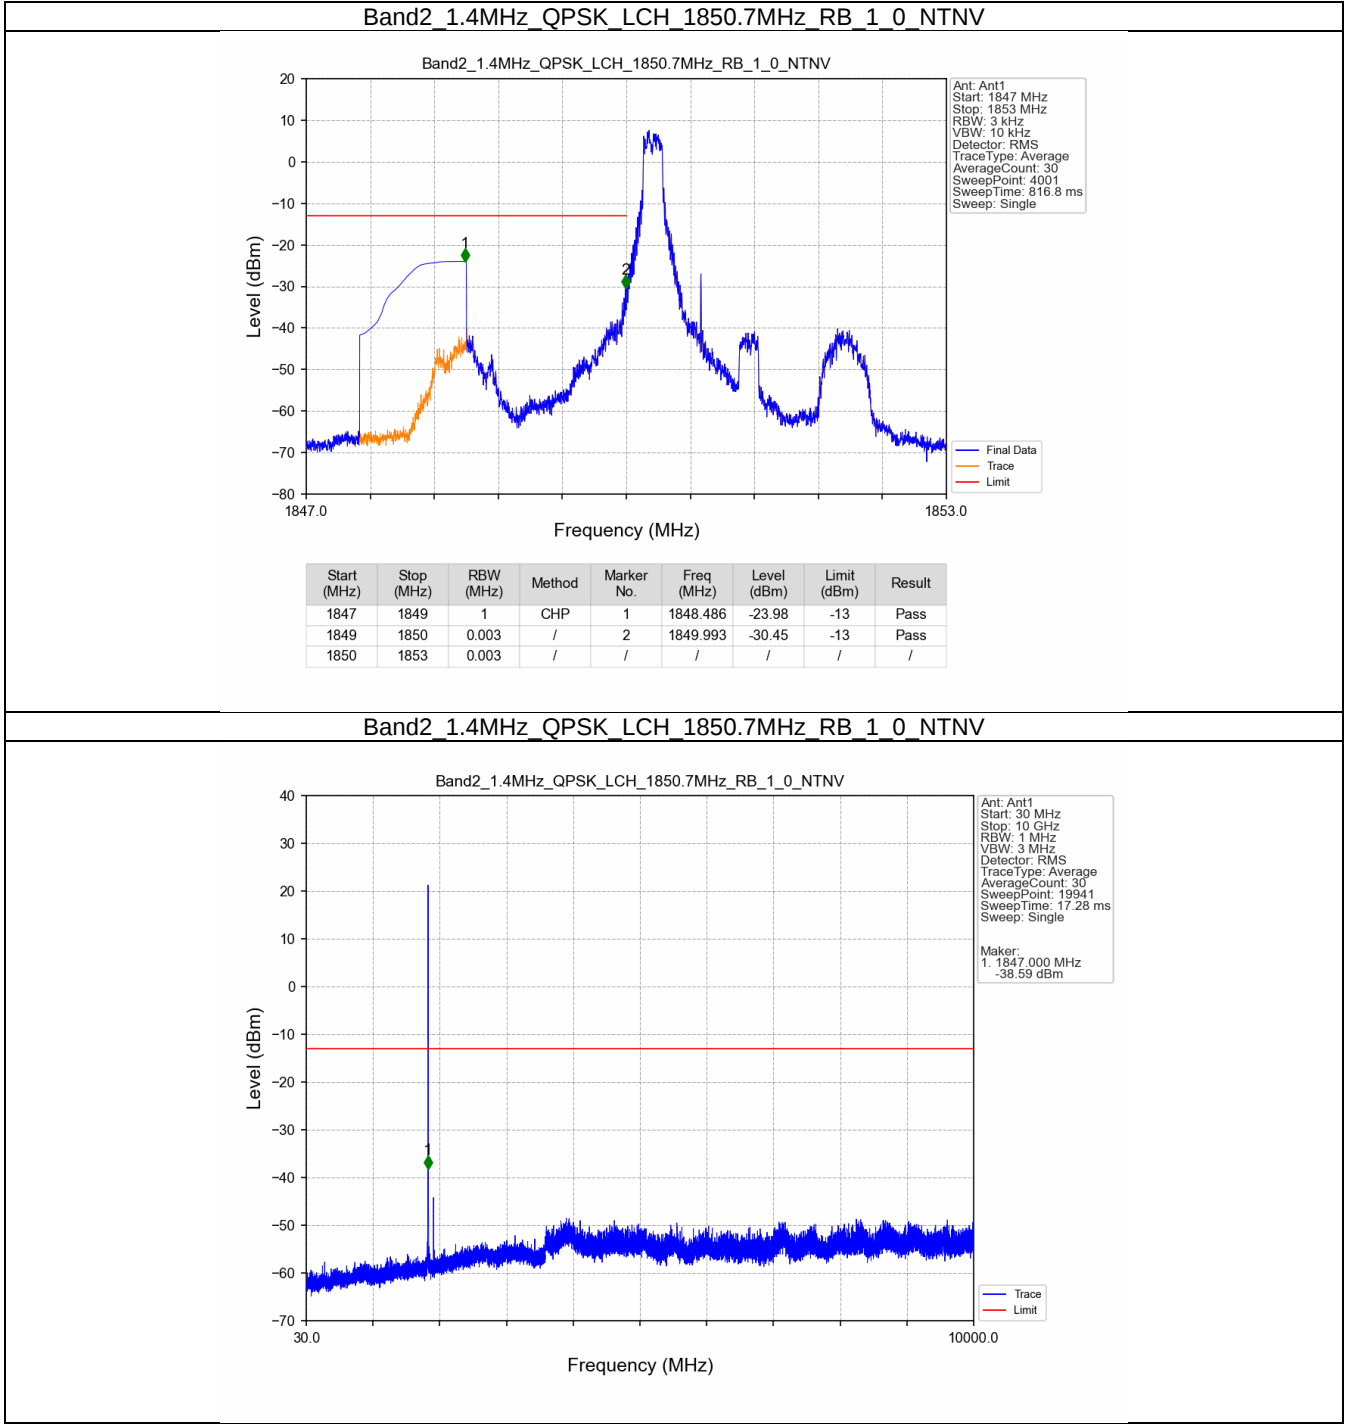

Band2_1.4MHz_QPSK_LCH_1850.7MHz_RB_1_0_NTNV

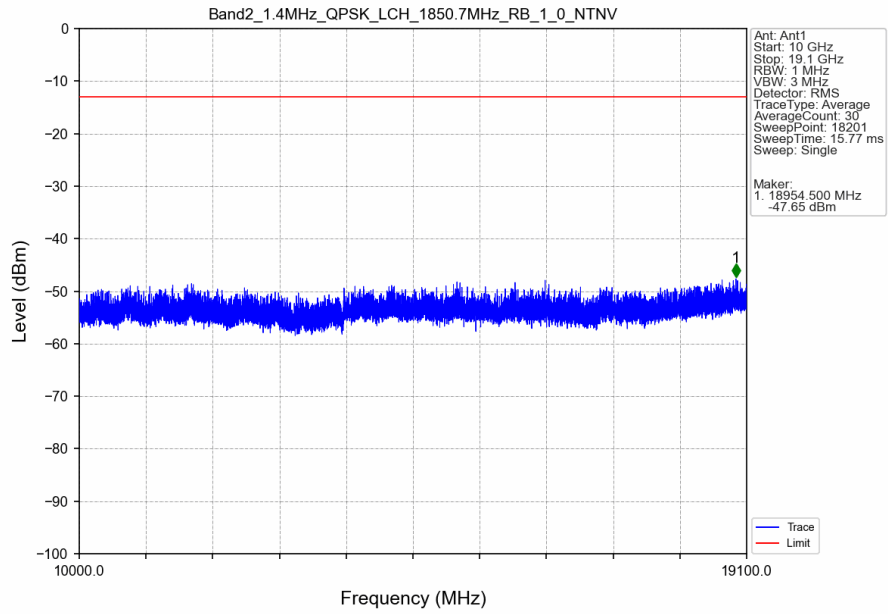


Band2_1.4MHz_QPSK_LCH_1850.7MHz_RB_6_0_NTNV

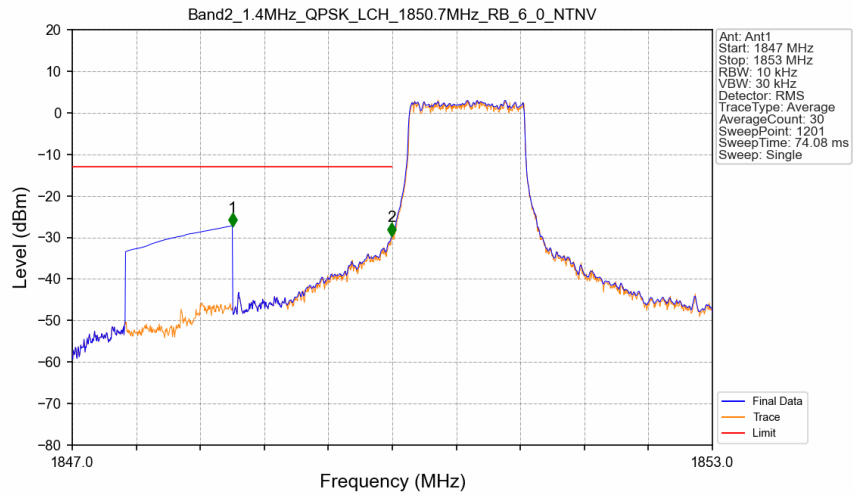


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1847	1849	1	CHP	1	1848.500	-27.22	-13	Pass
1849	1850	0.013	CHP	2	1849.995	-29.58	-13	Pass
1850	1853	0.013	CHP	/	/	/	/	/


Band2 1.4MHz QPSK MCH 1880MHz RB 1 0 NTN

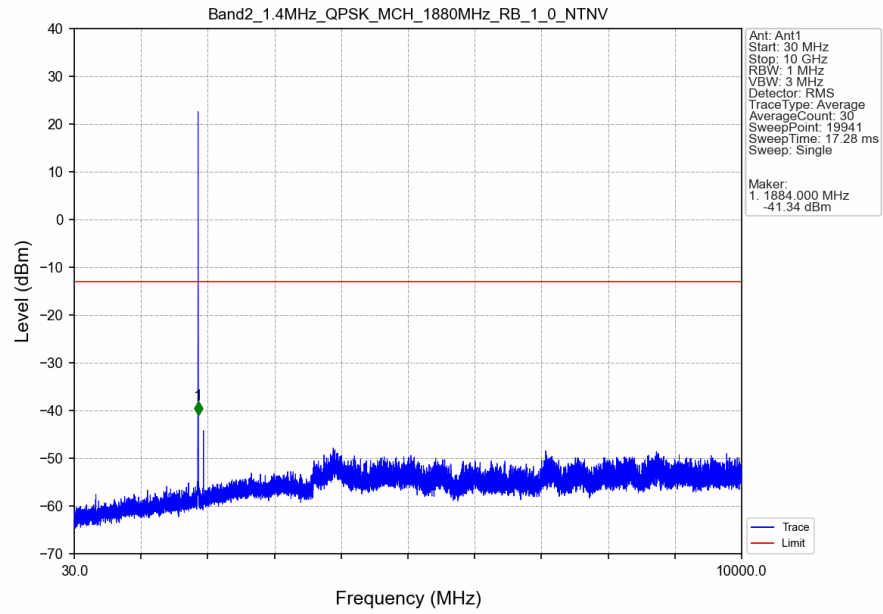


Band2 1.4MHz QPSK MCH 1880MHz RB 1 0 NTN

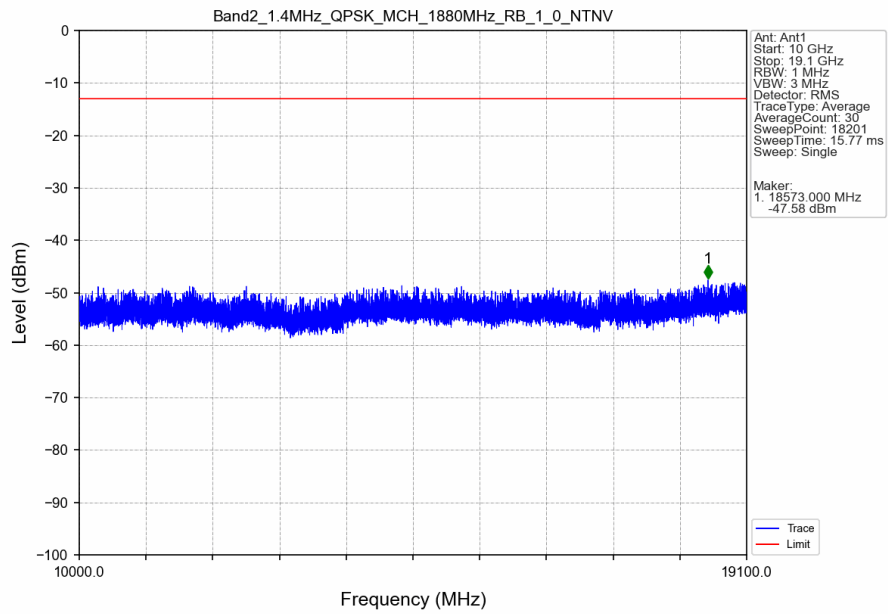


Band2_1.4MHz_QPSK_HCH_1909.3MHz_RB_1_0_NTNV

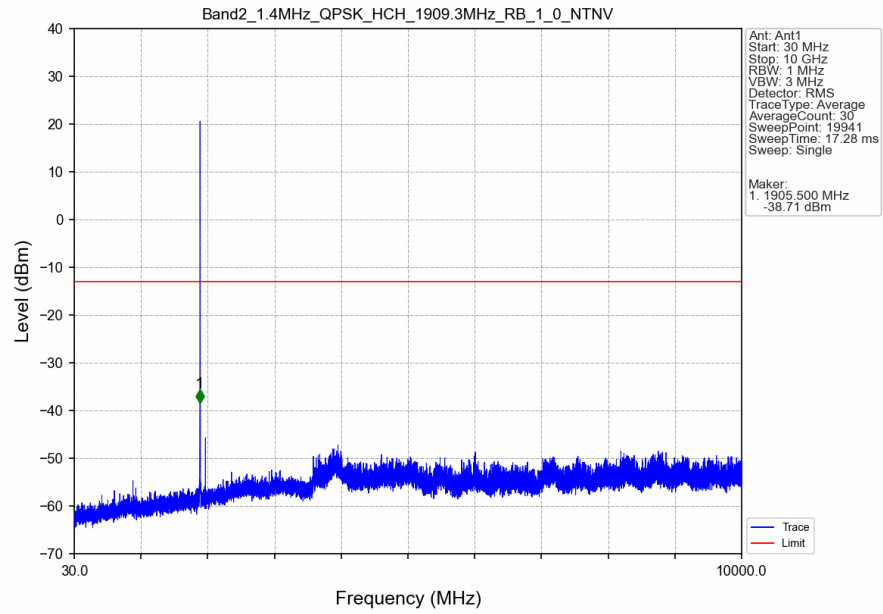

Band2_1.4MHz_QPSK_HCH_1909.3MHz_RB_1_0_NTNV

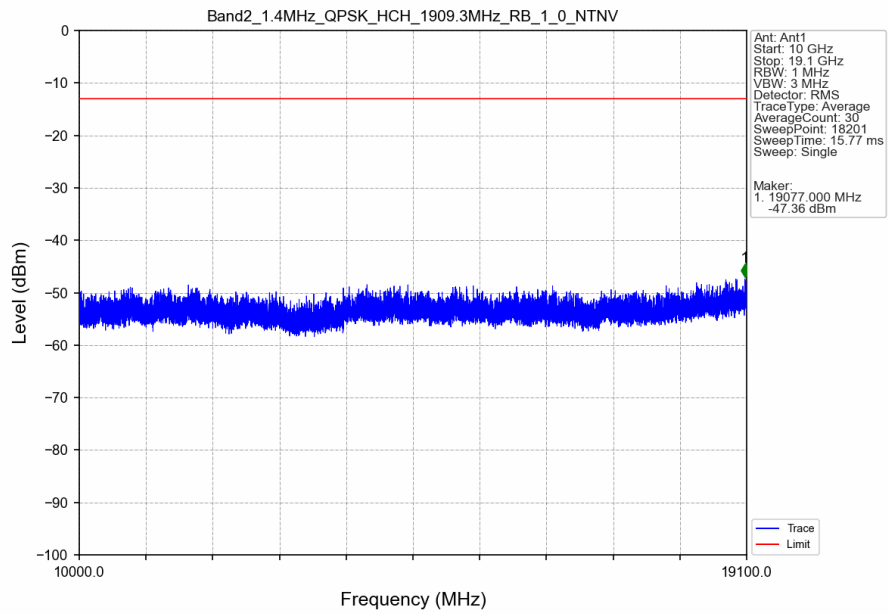


Band2 1.4MHz QPSK HCH 1909.3MHz RB 1 5_NTNV

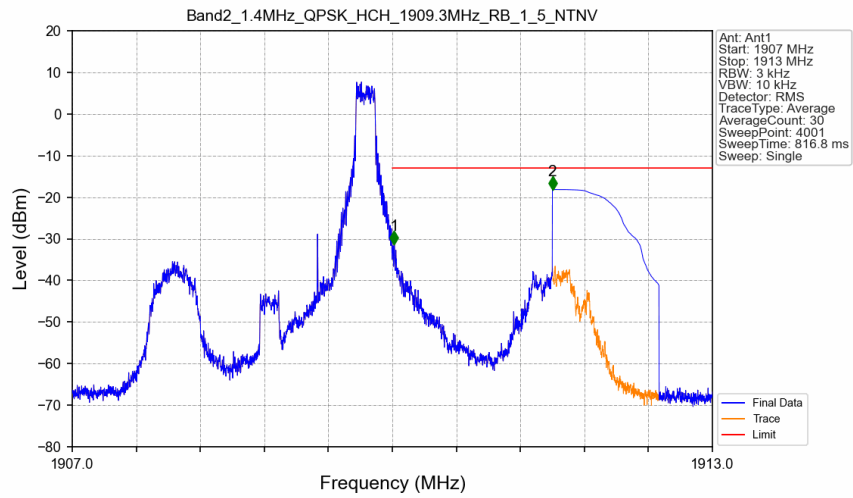


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1907	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.016	-31.25	-13	Pass
1911	1913	1	CHP	2	1911.500	-18.17	-13	Pass

Band2 1.4MHz QPSK HCH 1909.3MHz RB 6 0_NTNV

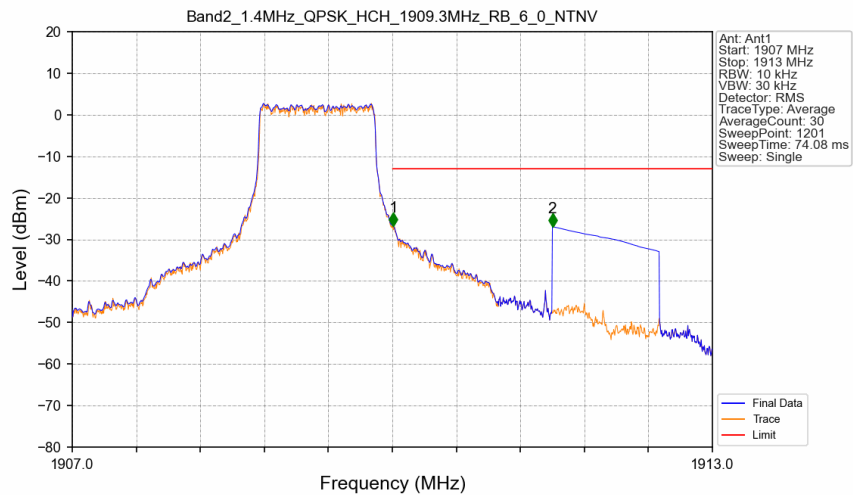


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1907	1910	0.013	CHP	/	/	/	/	/
1910	1911	0.013	CHP	1	1910.010	-26.76	-13	Pass
1911	1913	1	CHP	2	1911.500	-26.94	-13	Pass


5.2.2 B2_3MHz

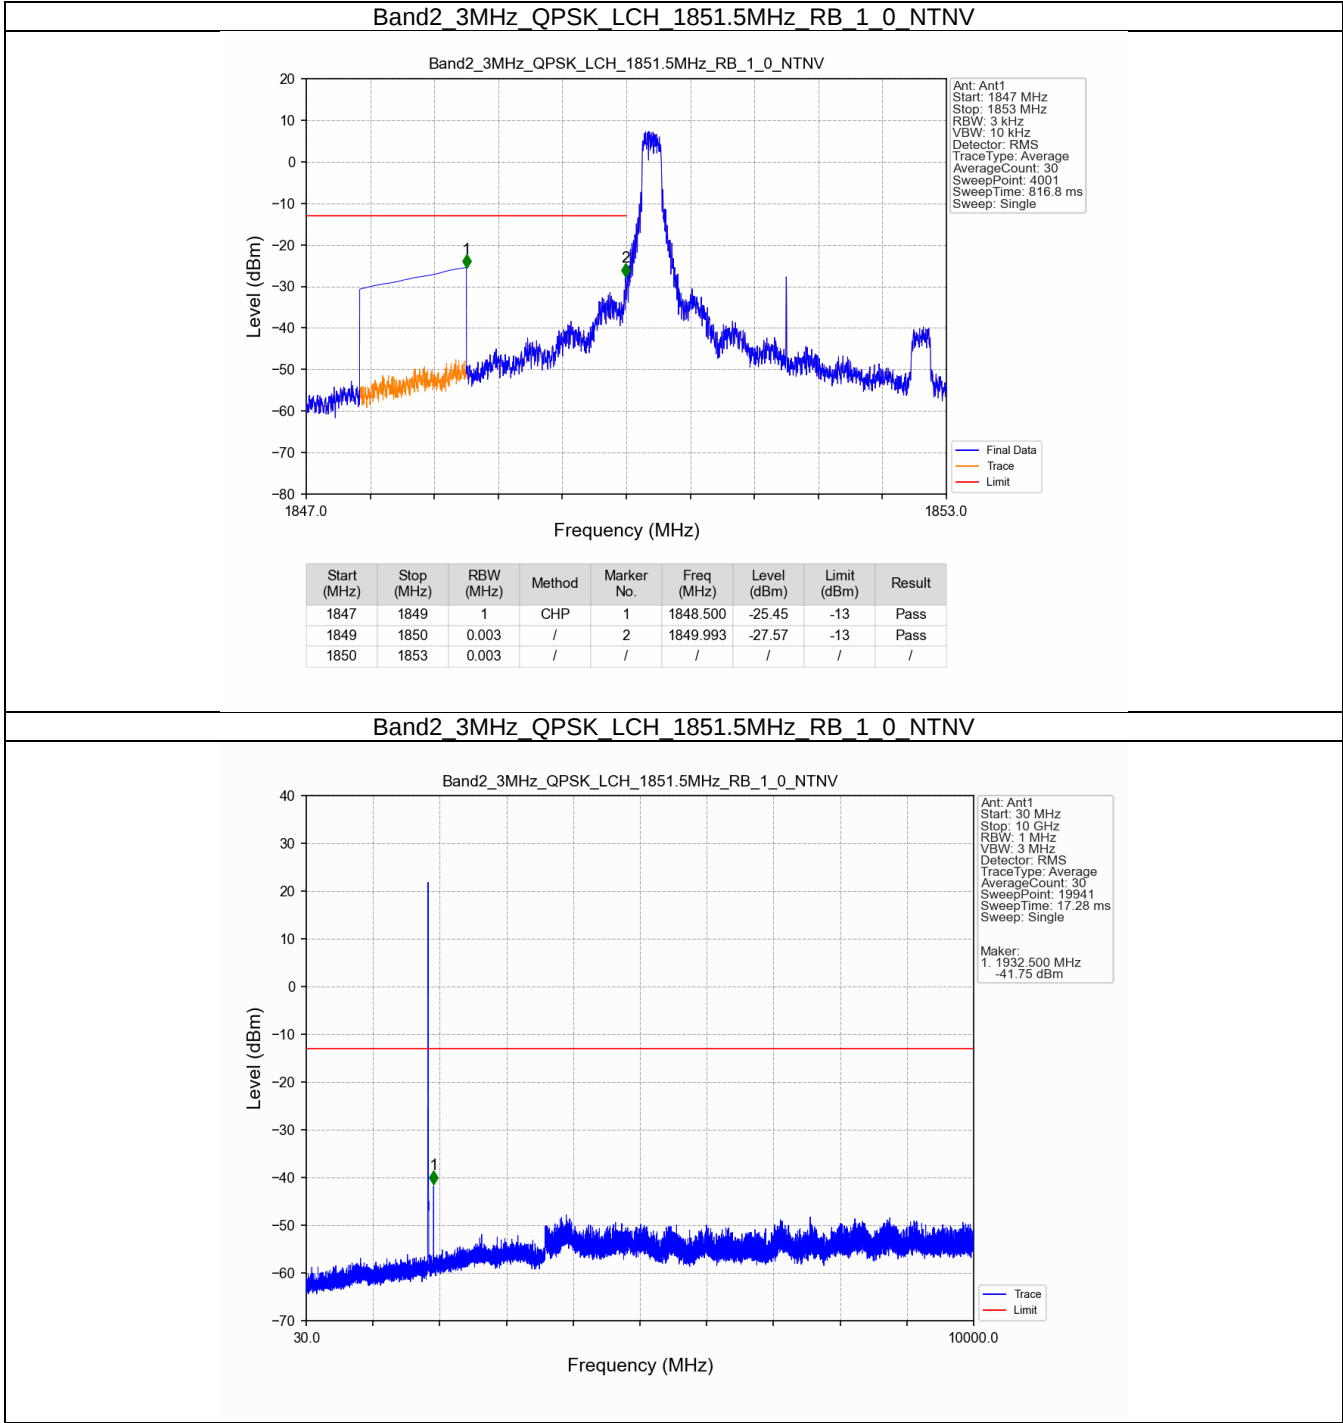

Band2_3MHz_QPSK_LCH_1851.5MHz_RB_1_0_NTNV

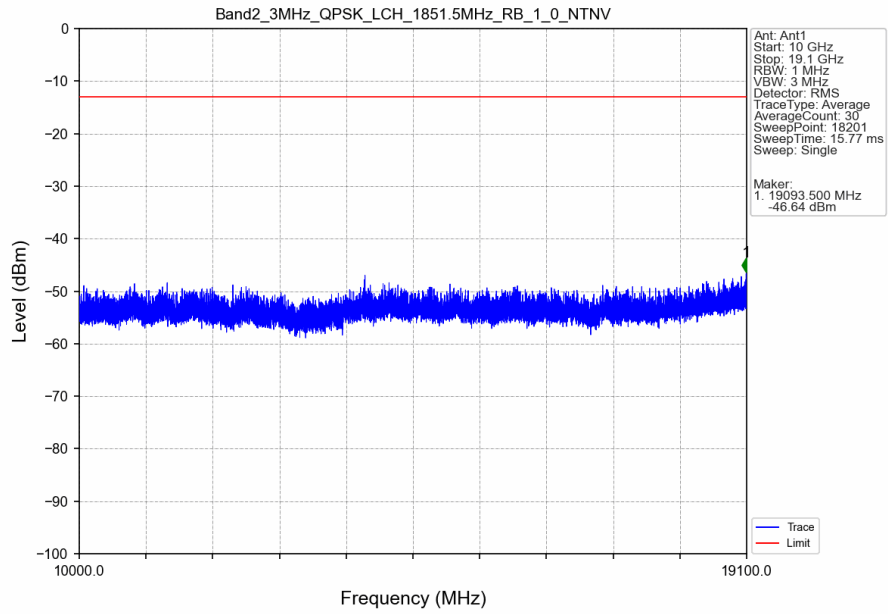


Band2_3MHz_QPSK_LCH_1851.5MHz_RB_15_0_NTNV

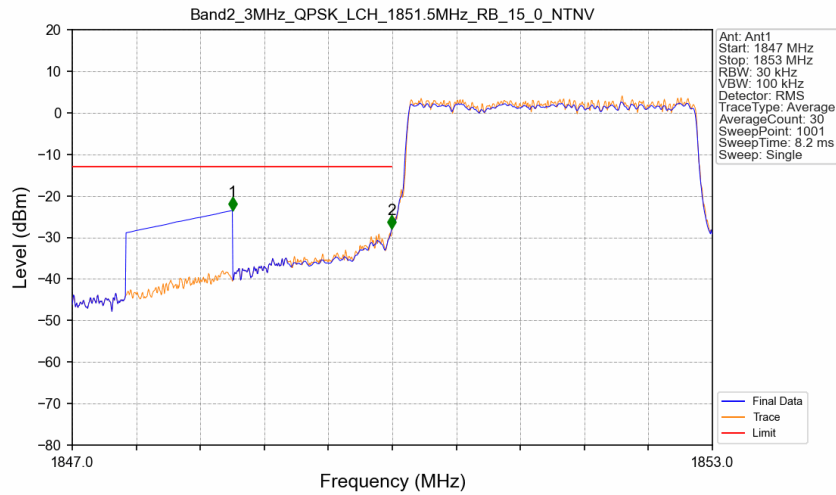


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1847	1849	1	CHP	1	1848.500	-23.49	-13	Pass
1849	1850	0.031	CHP	2	1849.994	-27.92	-13	Pass
1850	1853	0.031	CHP	/	/	/	/	/


Band2_3MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

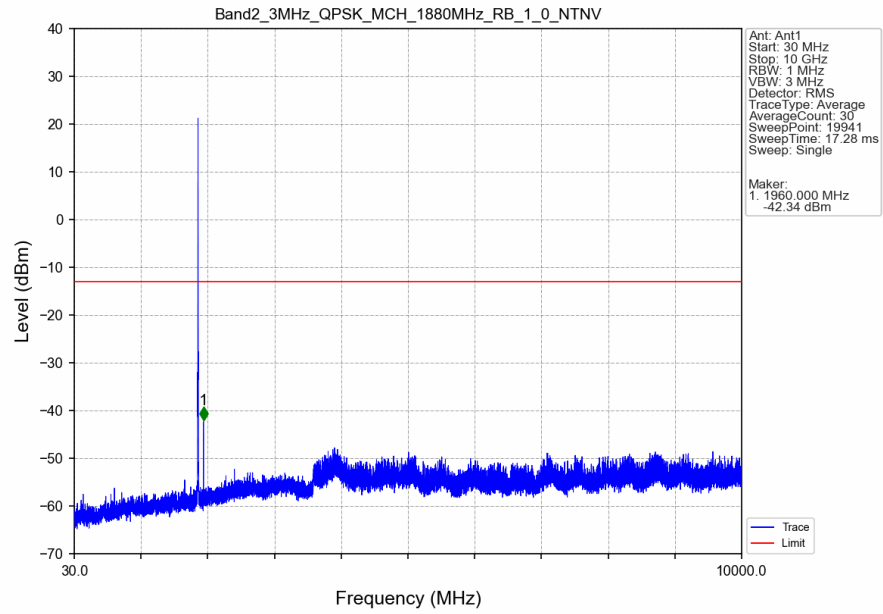


Band2_3MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

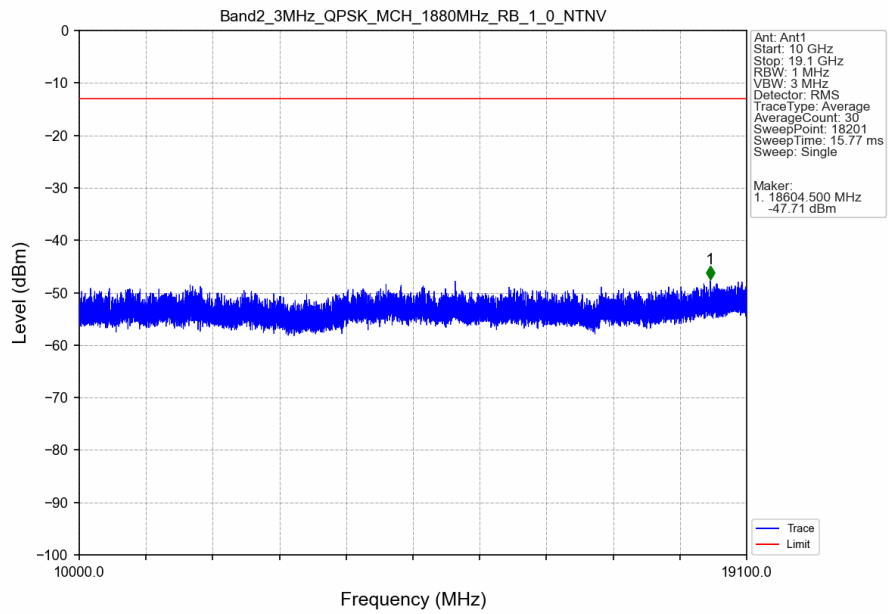


Band2_3MHz_QPSK_HCH_1908.5MHz_RB_1_0_NTNV

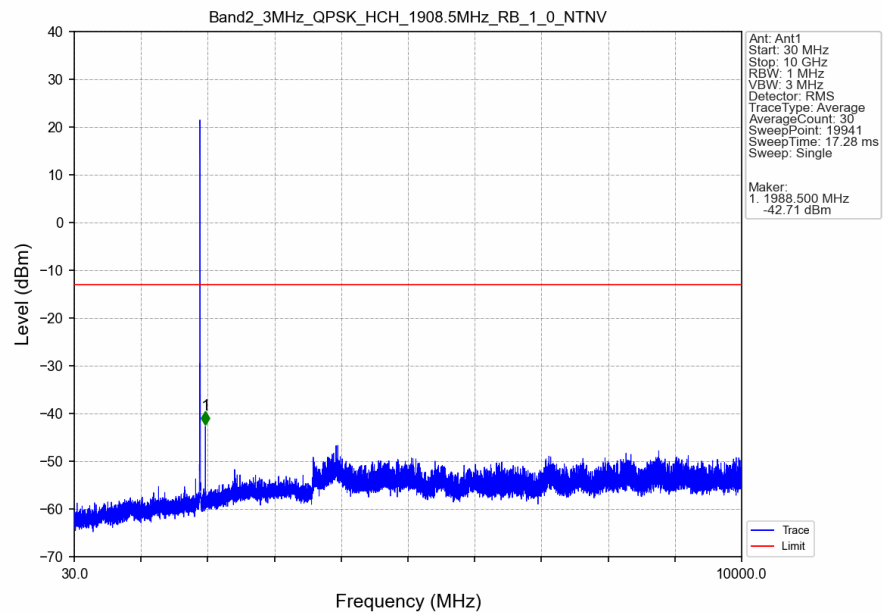

Band2_3MHz_QPSK_HCH_1908.5MHz_RB_1_0_NTNV

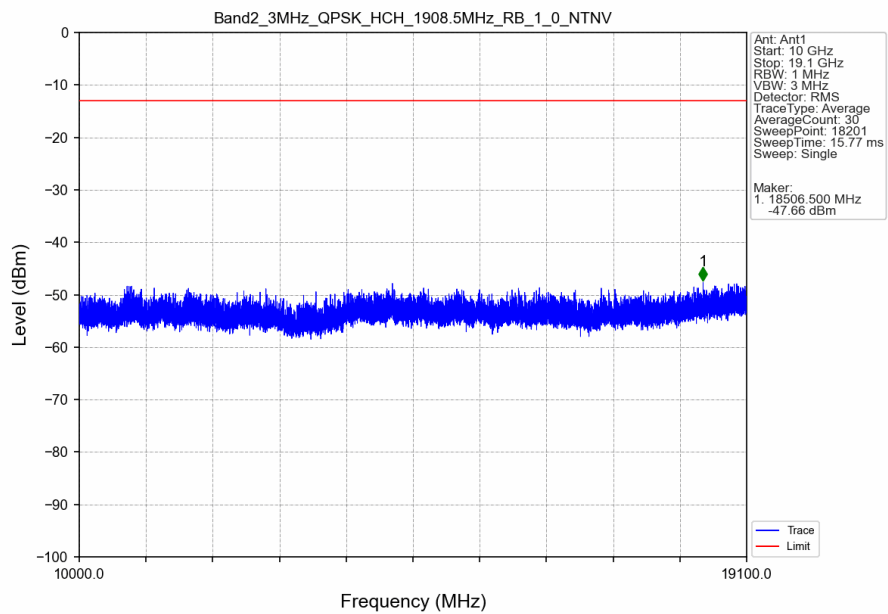


Band2 3MHz QPSK HCH 1908.5MHz RB 1 14_NTNV

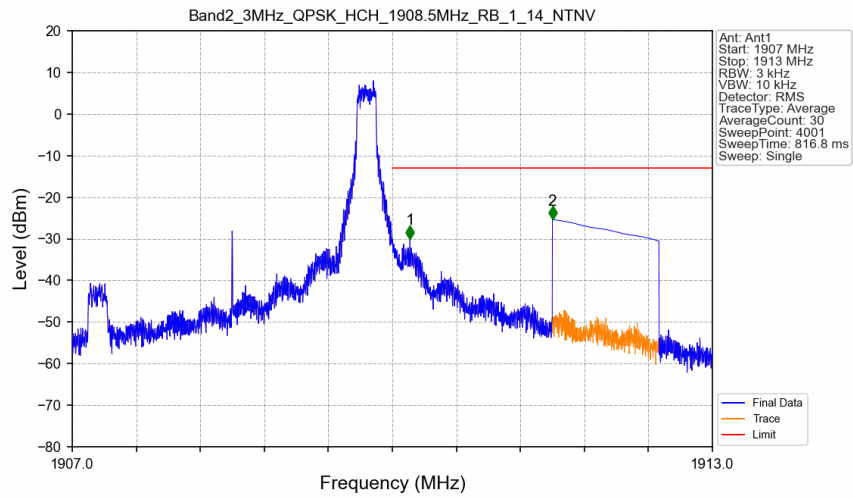


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1907	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.165	-29.95	-13	Pass
1911	1913	1	CHP	2	1911.500	-25.34	-13	Pass

Band2 3MHz QPSK HCH 1908.5MHz RB 15 0_NTNV

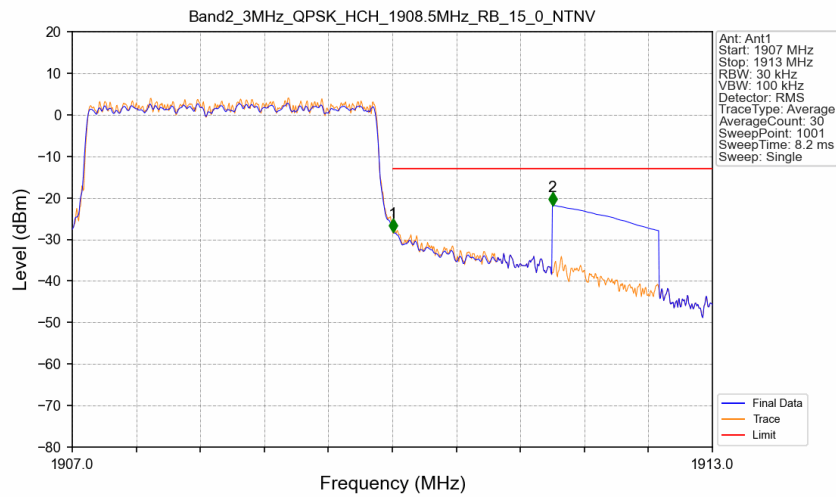


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1907	1910	0.031	CHP	/	/	/	/	/
1910	1911	0.031	CHP	1	1910.006	-28.15	-13	Pass
1911	1913	1	CHP	2	1911.500	-21.78	-13	Pass


5.2.3 B2_5MHz

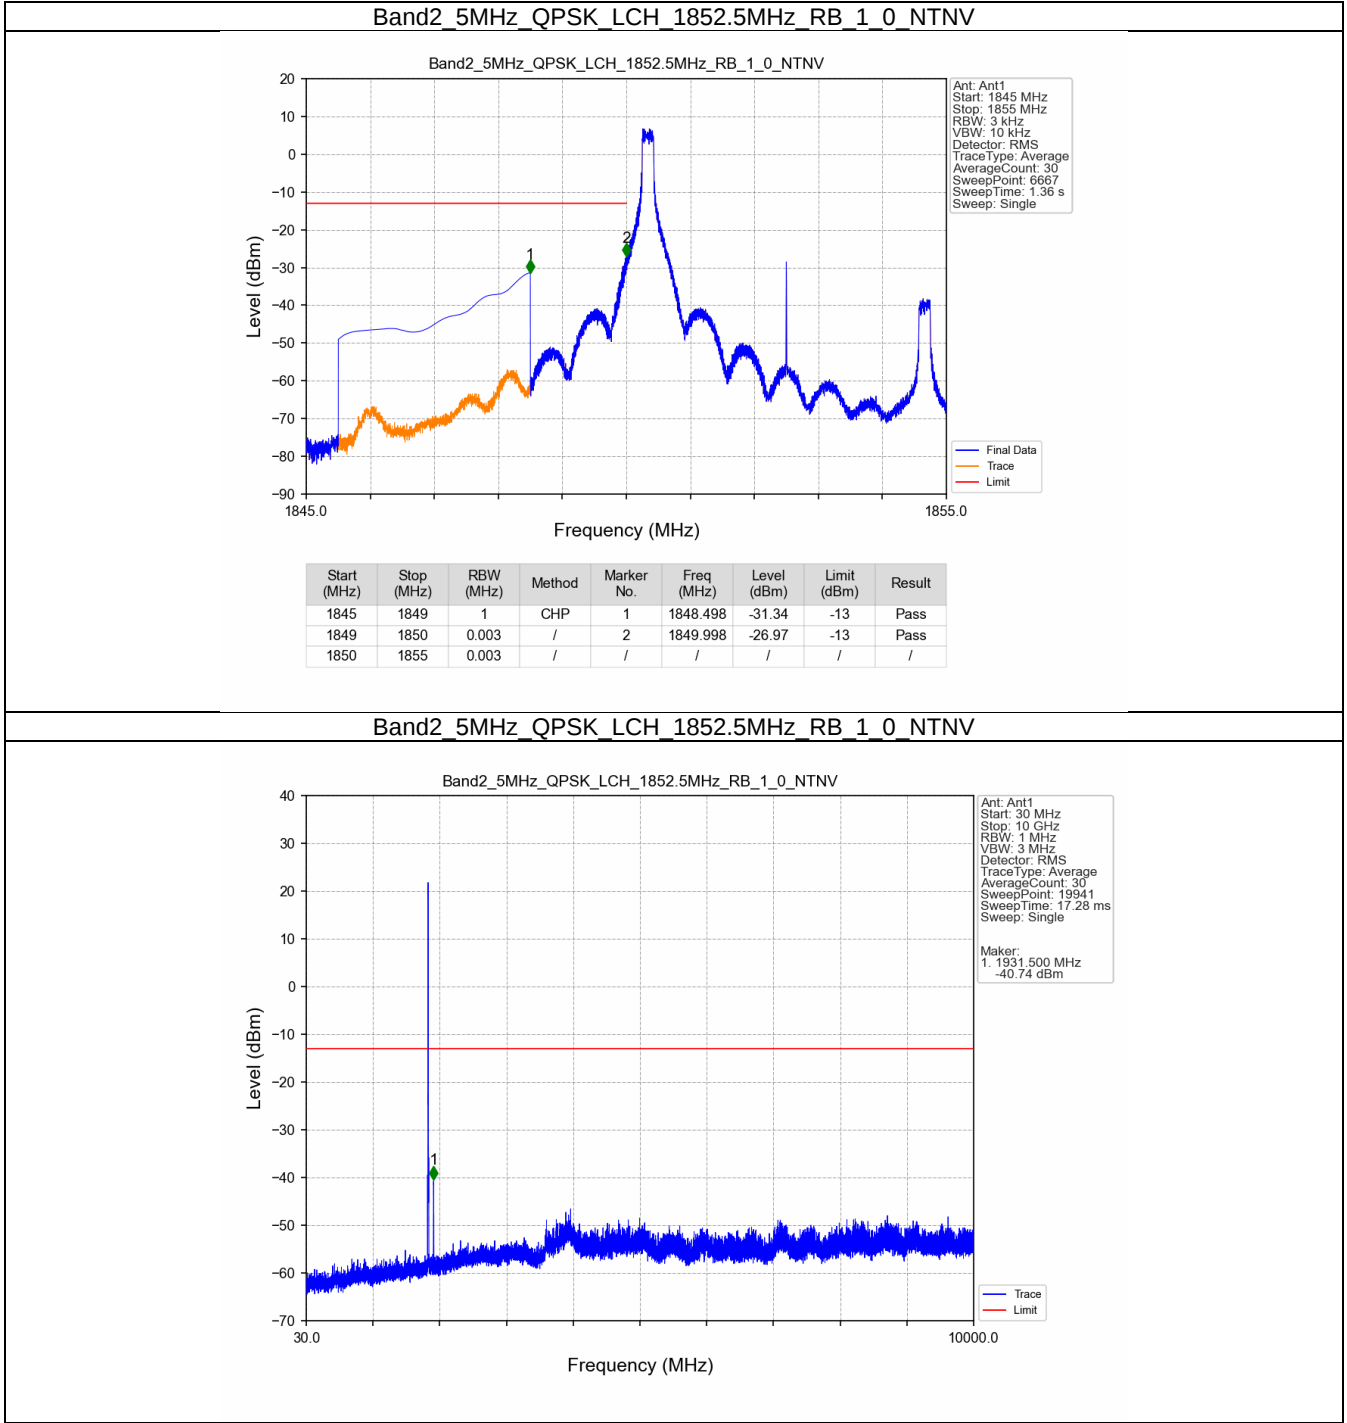

Band2_5MHz_QPSK_LCH_1852.5MHz_RB_1_0_NTNV

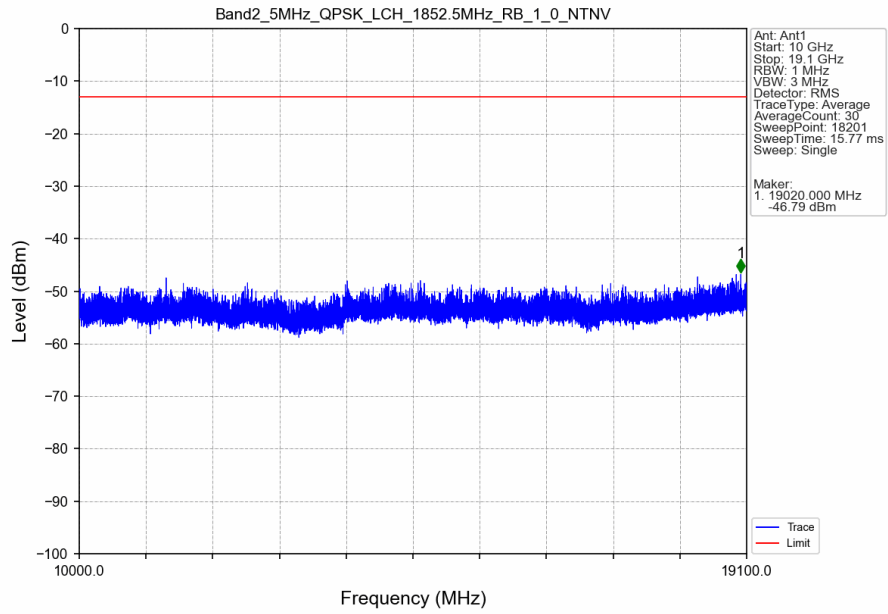


Band2_5MHz_QPSK_LCH_1852.5MHz_RB_25_0_NTNV

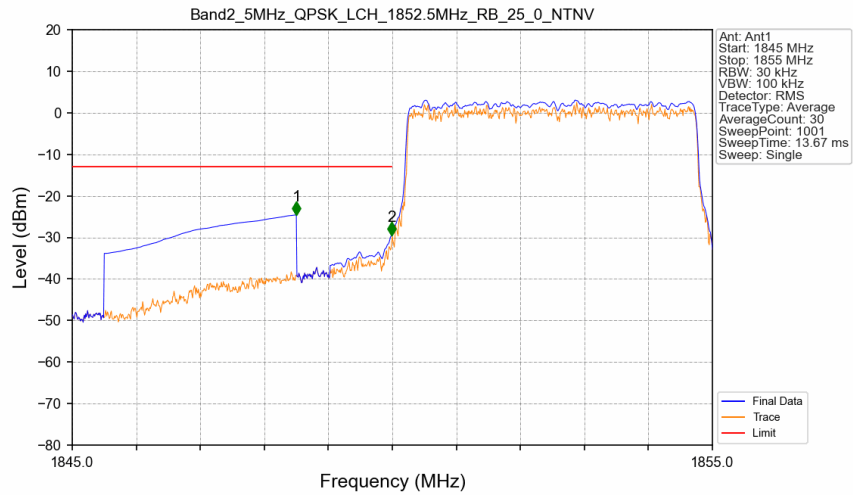


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1845	1849	1	CHP	1	1848.500	-24.58	-13	Pass
1849	1850	0.051	CHP	2	1849.990	-29.52	-13	Pass
1850	1855	0.051	CHP	/	/	/	/	/


Band2 5MHz QPSK MCH 1880MHz RB 1 0 NTV

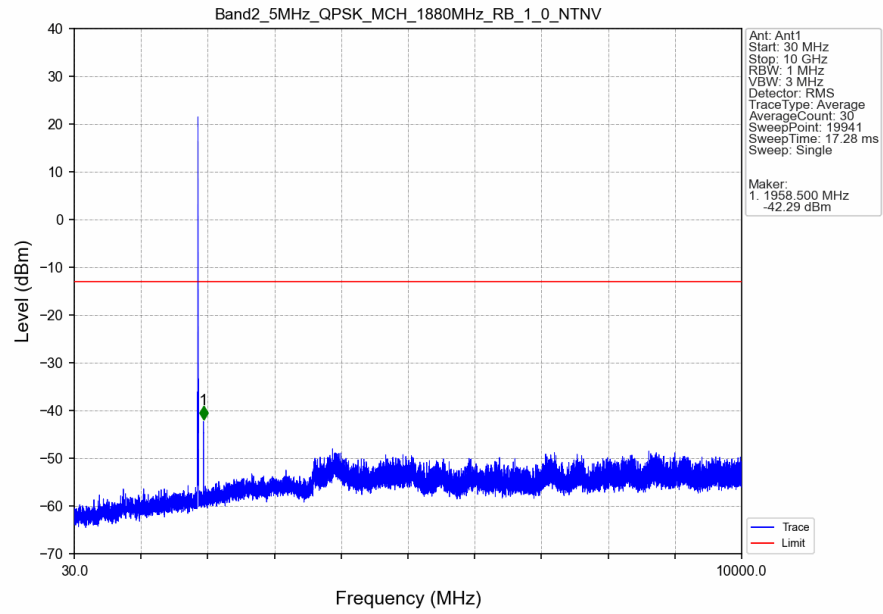


Band2 5MHz QPSK MCH 1880MHz RB 1 0 NTV

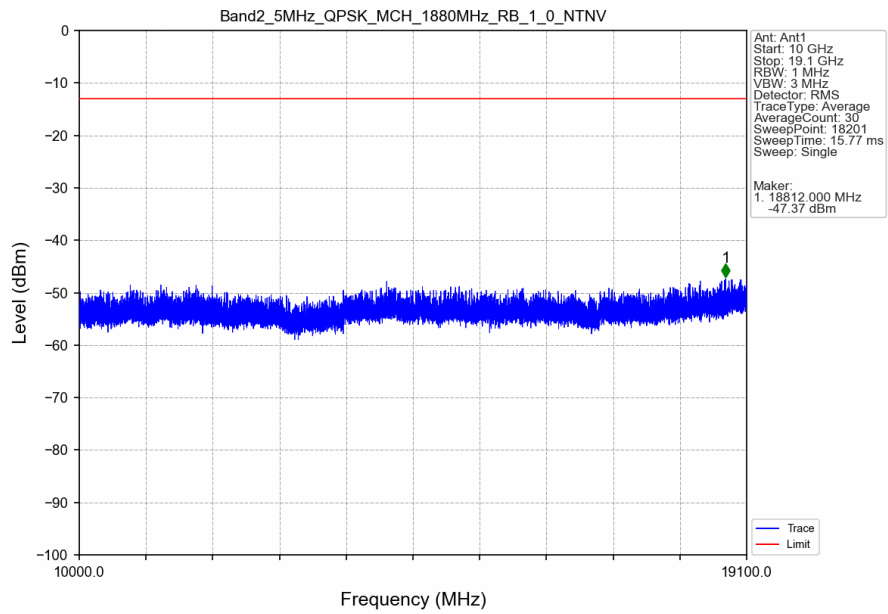


Band2_5MHz_QPSK_HCH_1907.5MHz_RB_1_0_NTNV

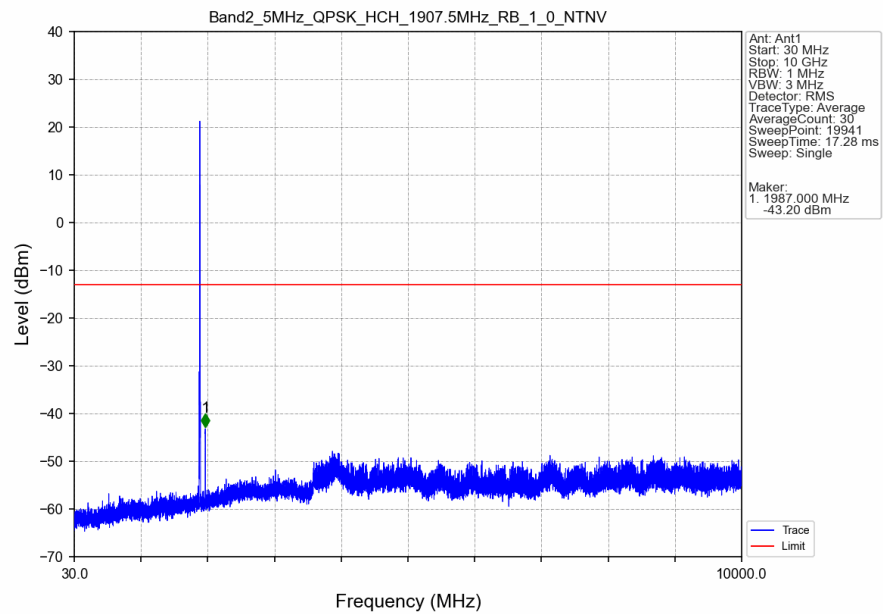

Band2_5MHz_QPSK_HCH_1907.5MHz_RB_1_0_NTNV

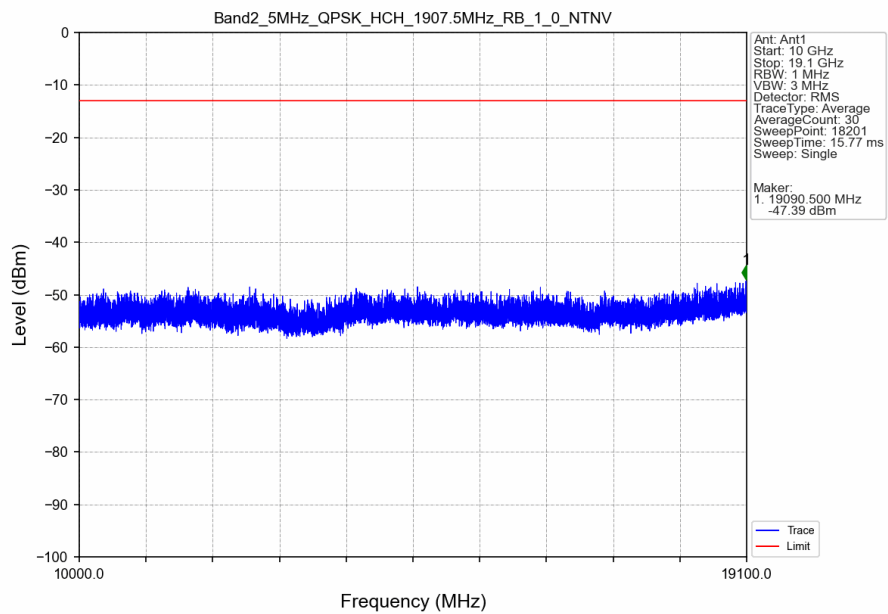


Band2 5MHz QPSK HCH 1907.5MHz RB 1 24_NTNV

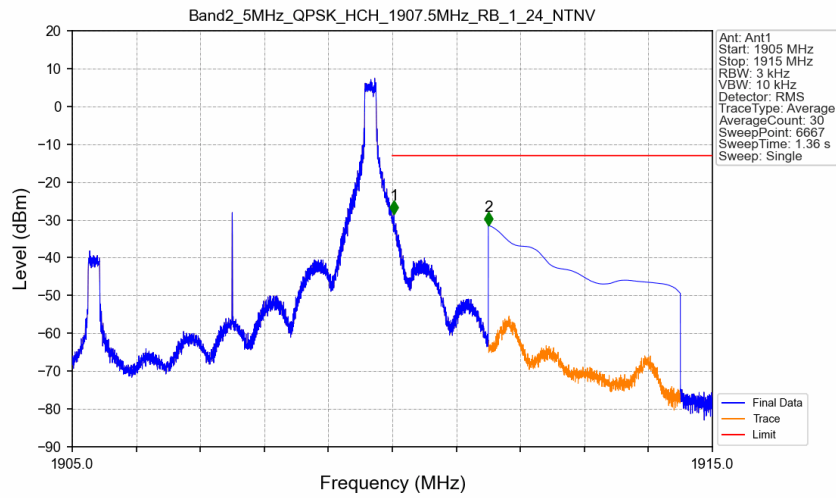


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1905	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.026	-28.40	-13	Pass
1911	1915	1	CHP	2	1911.500	-31.45	-13	Pass

Band2 5MHz QPSK HCH 1907.5MHz RB 25 0_NTNV

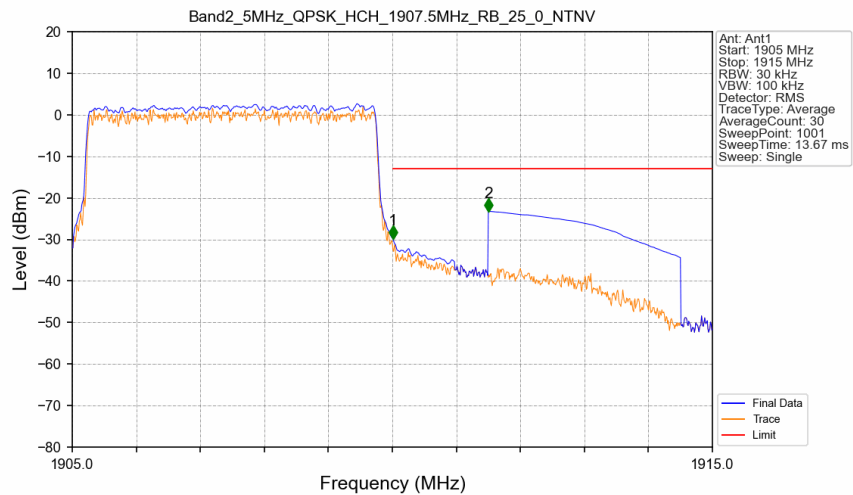


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1905	1910	0.051	CHP	/	/	/	/	/
1910	1911	0.051	CHP	1	1910.010	-29.83	-13	Pass
1911	1915	1	CHP	2	1911.500	-23.23	-13	Pass


5.2.4 B2_10MHz

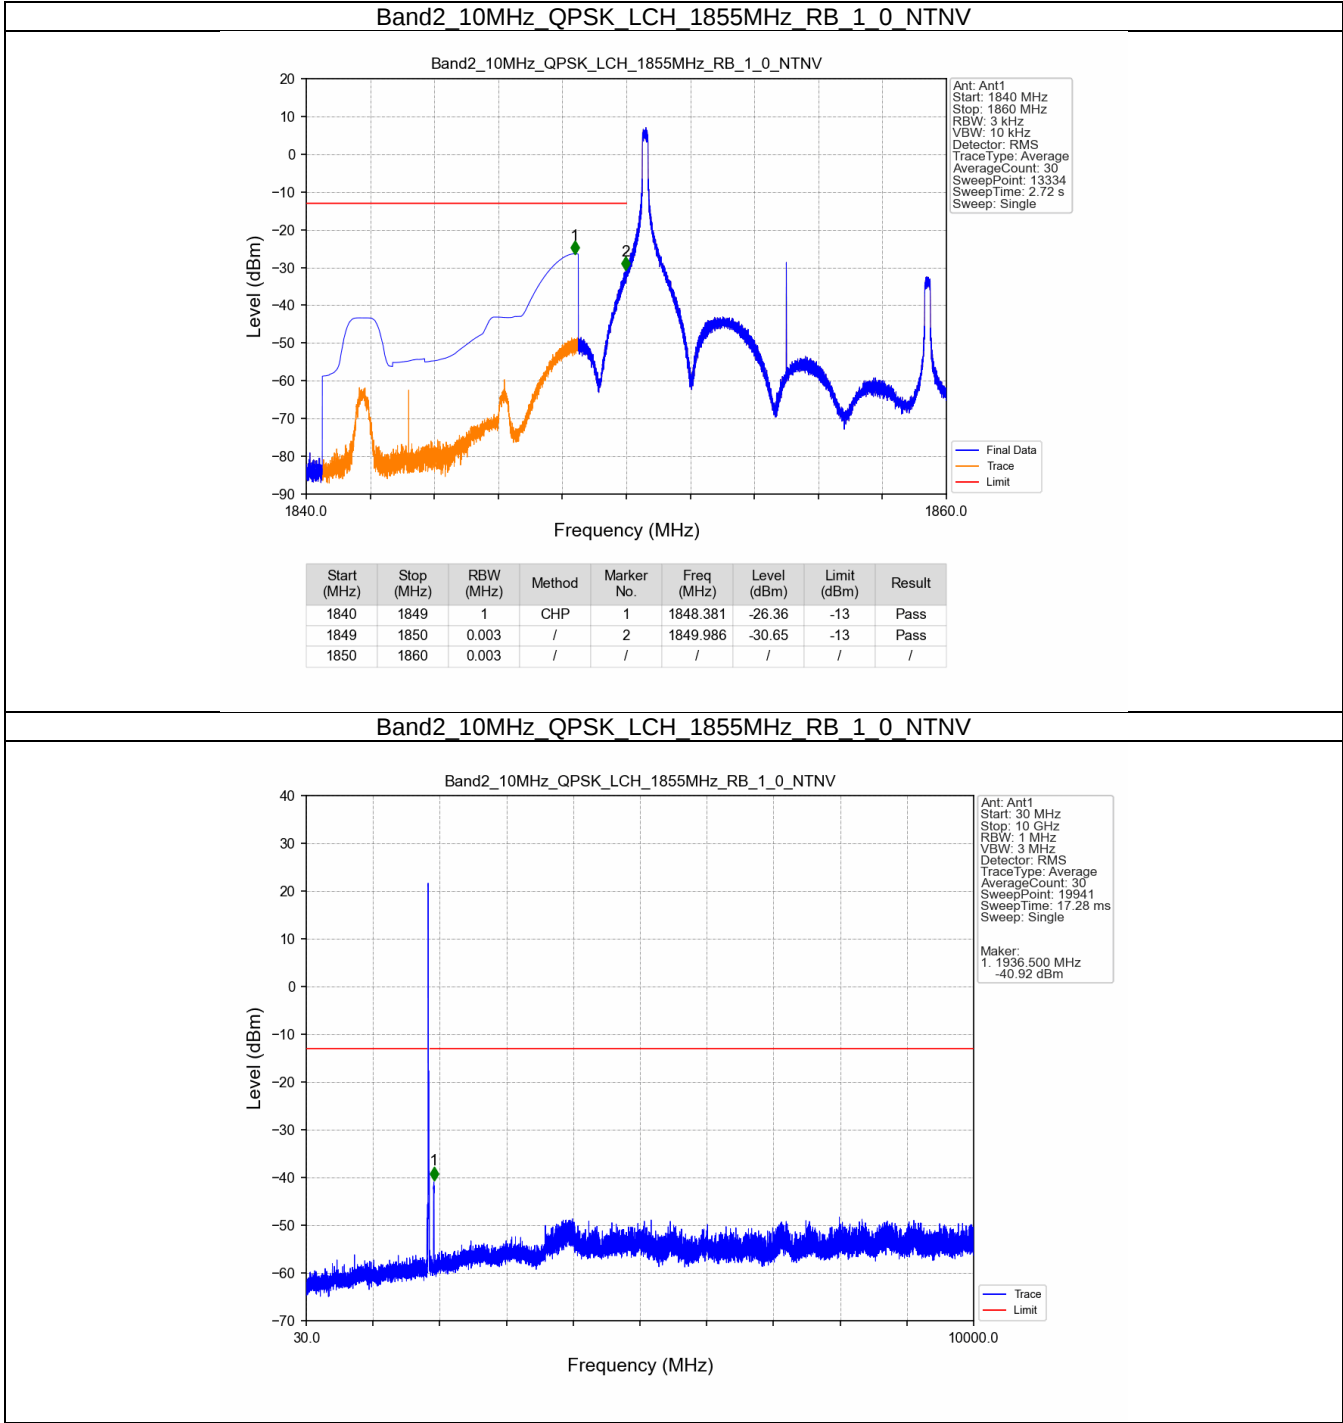

Band2_10MHz_QPSK_LCH_1855MHz_RB_1_0_NTNV

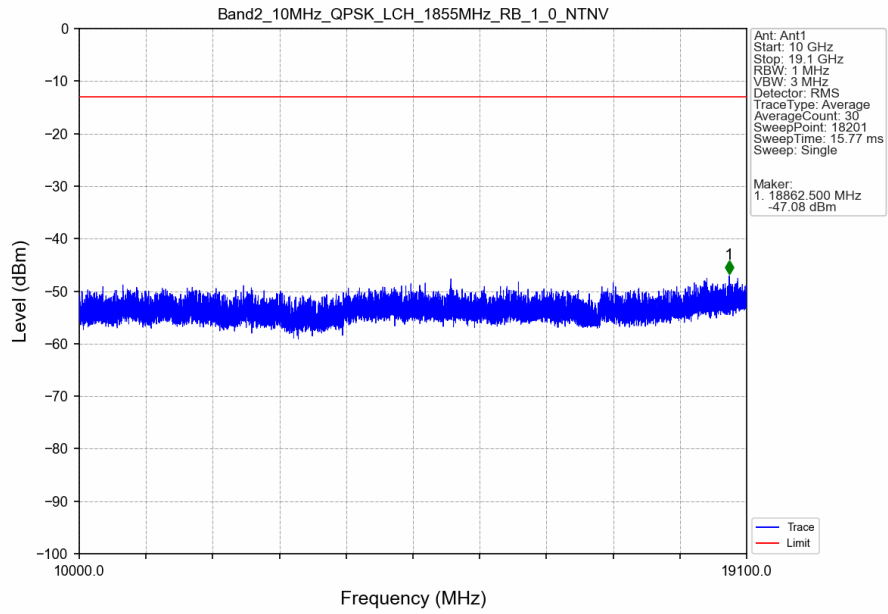


Band2_10MHz_QPSK_LCH_1855MHz_RB_50_0_NTNV

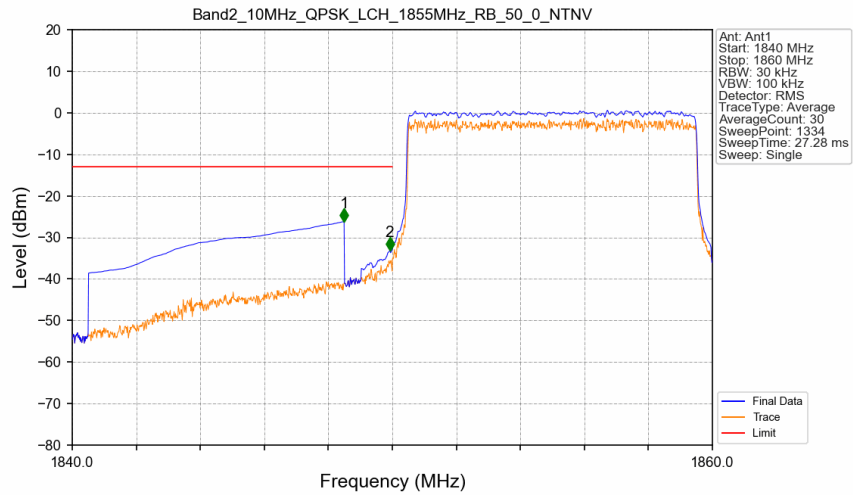


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1840	1849	1	CHP	1	1848.492	-26.24	-13	Pass
1849	1850	0.064	CHP	2	1849.917	-33.17	-13	Pass
1850	1860	0.064	CHP	/	/	/	/	/


Band2_10MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

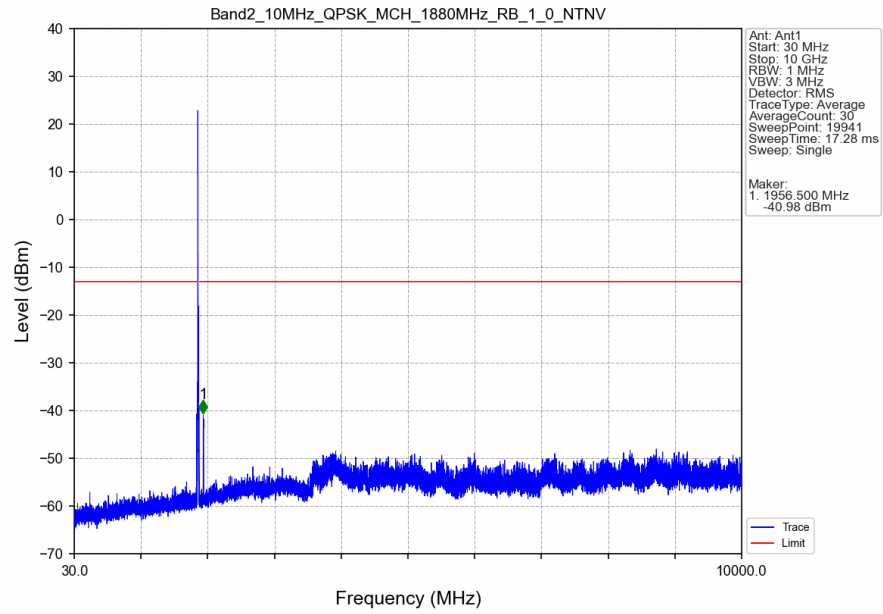


Band2_10MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

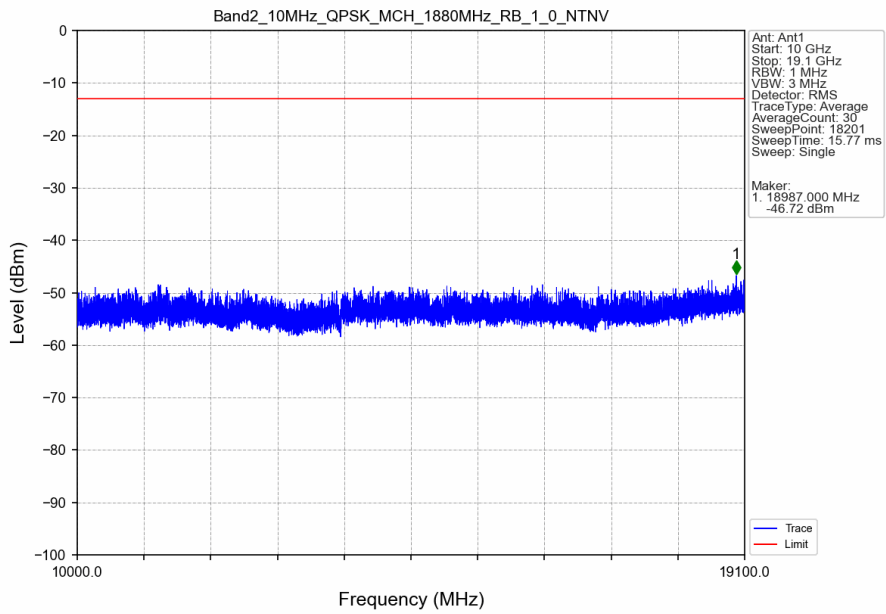


Band2_10MHz_QPSK_HCH_1905MHz_RB_1_0_NTNV

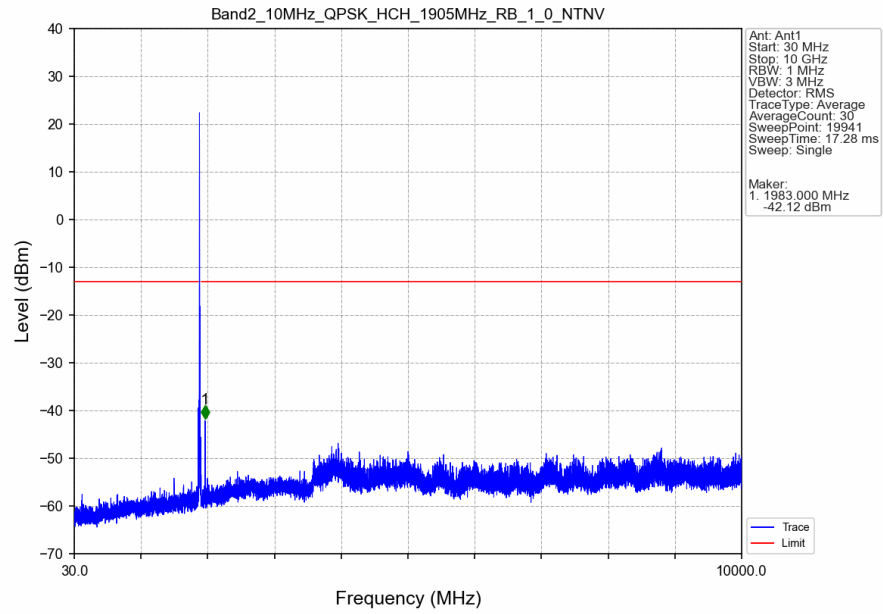

Band2_10MHz_QPSK_HCH_1905MHz_RB_1_0_NTNV

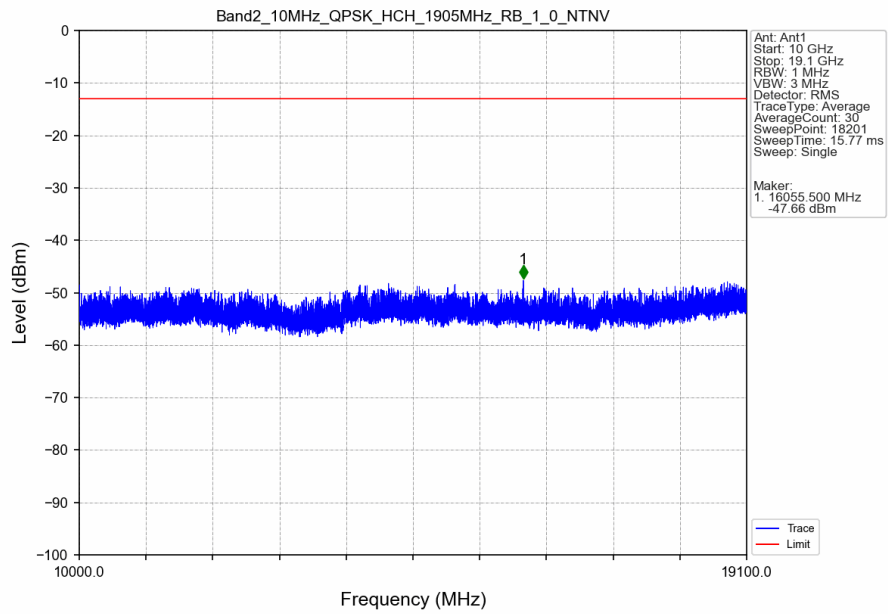


Band2 10MHz QPSK HCH 1905MHz RB 1 49 NTNV

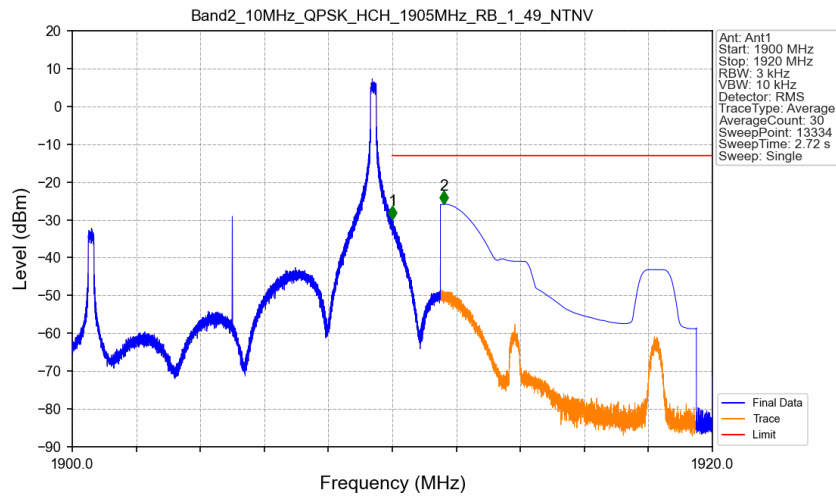


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1900	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.002	-29.76	-13	Pass
1911	1920	1	CHP	2	1911.612	-25.84	-13	Pass

Band2 10MHz QPSK HCH 1905MHz RB 50 0 NTNV

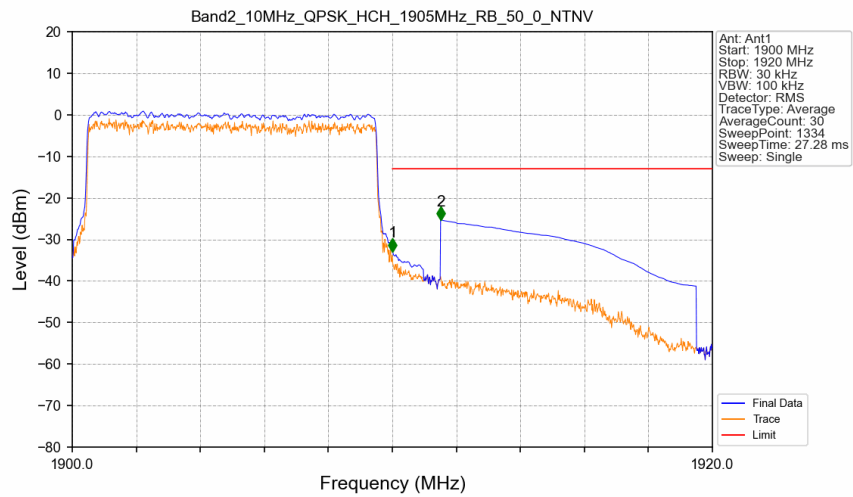


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1900	1910	0.064	CHP	/	/	/	/	/
1910	1911	0.064	CHP	1	1910.008	-32.86	-13	Pass
1911	1920	1	CHP	2	1911.508	-25.29	-13	Pass


5.2.5 B2_15MHz

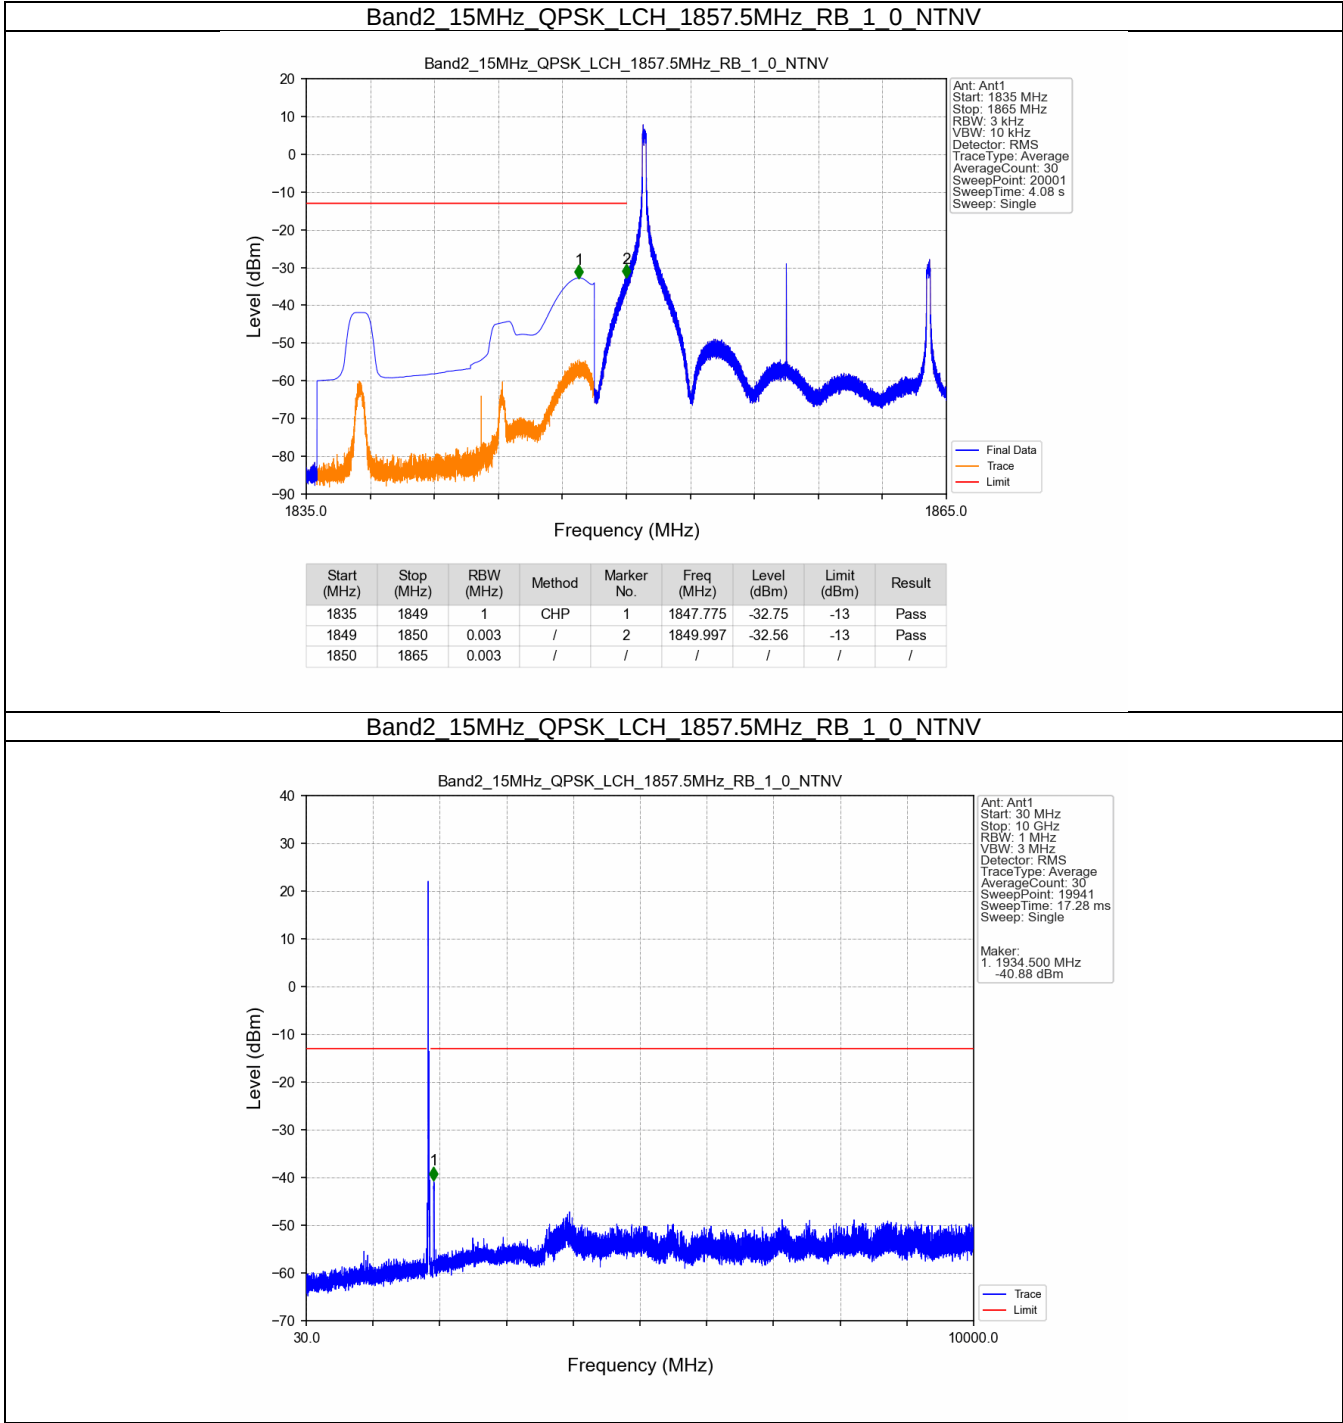

Band2_15MHz_QPSK_LCH_1857.5MHz_RB_1_0_NTNV

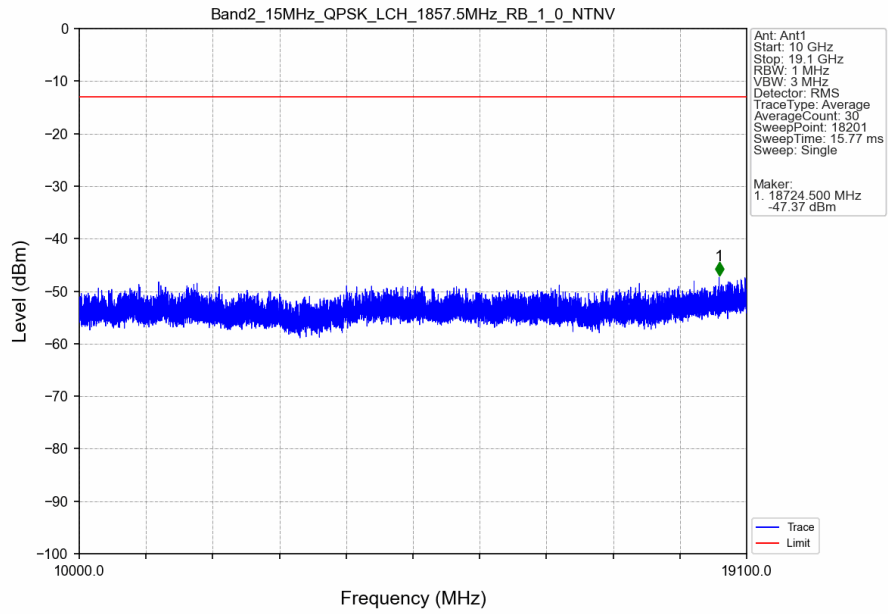


Band2_15MHz_QPSK_LCH_1857.5MHz_RB_75_0_NTNV

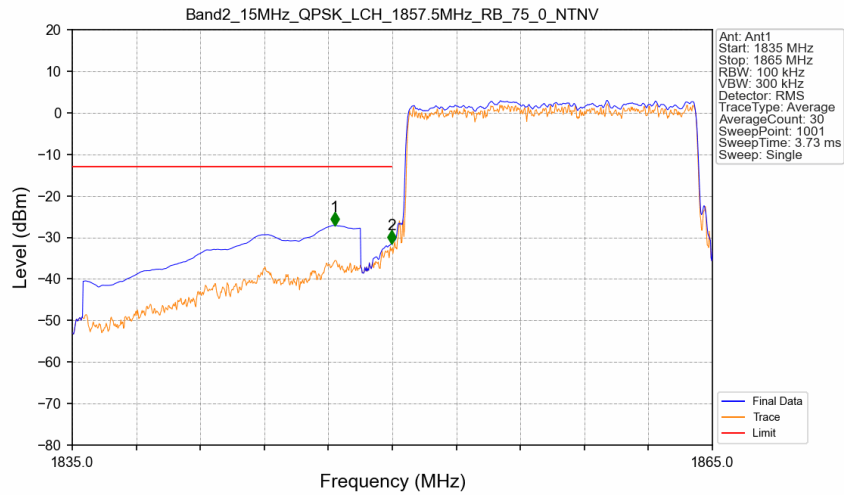


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1835	1849	1	CHP	1	1847.300	-27.12	-13	Pass
1849	1850	0.156	CHP	2	1849.970	-31.57	-13	Pass
1850	1865	0.156	CHP	/	/	/	/	/


Band2_15MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

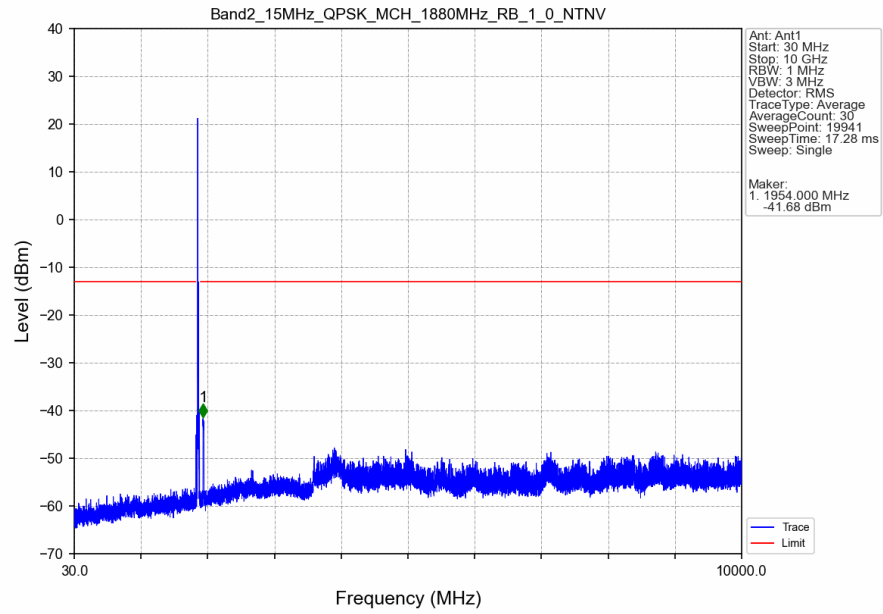


Band2_15MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

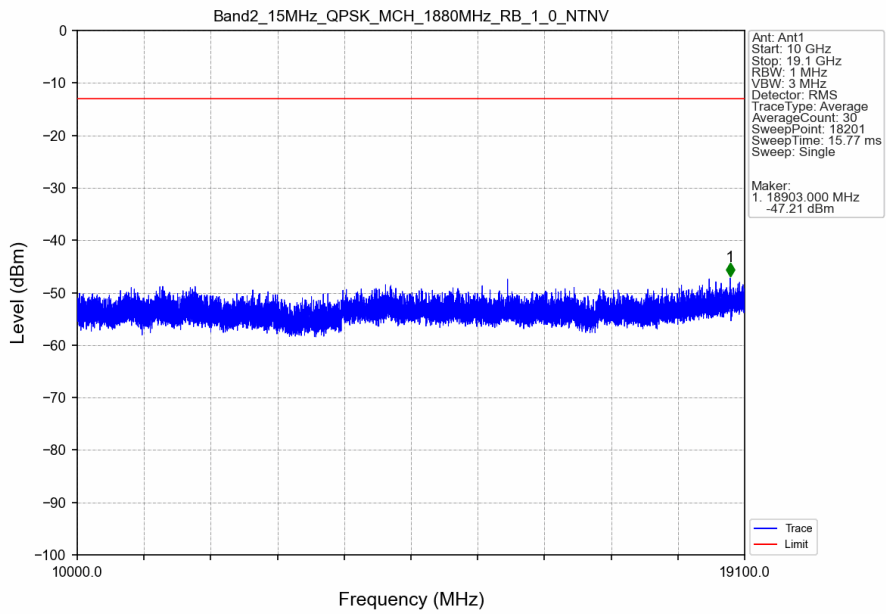


Band2_15MHz_QPSK_HCH_1902.5MHz_RB_1_0_NTNV

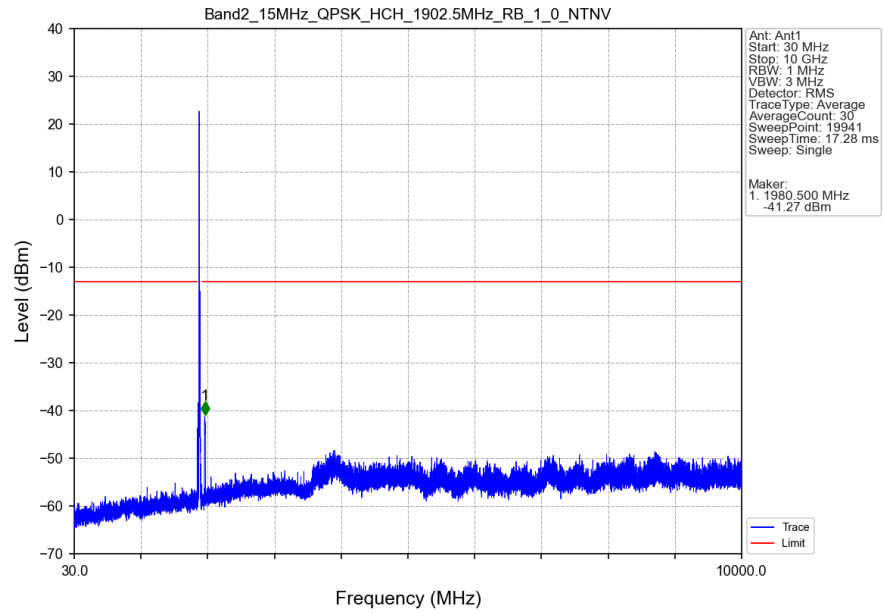

Band2_15MHz_QPSK_HCH_1902.5MHz_RB_1_0_NTNV

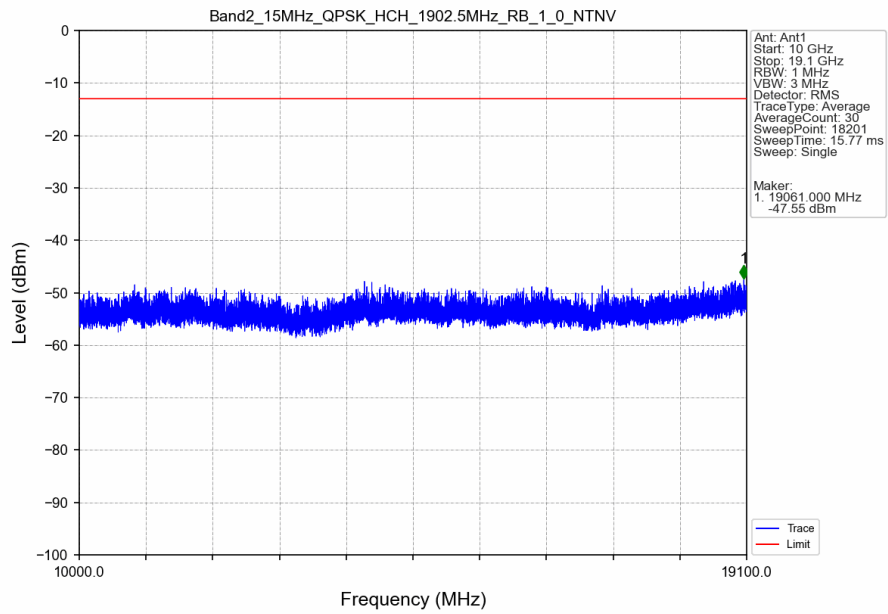


Band2_15MHz_QPSK_HCH_1902.5MHz_RB_1_74_NTNV

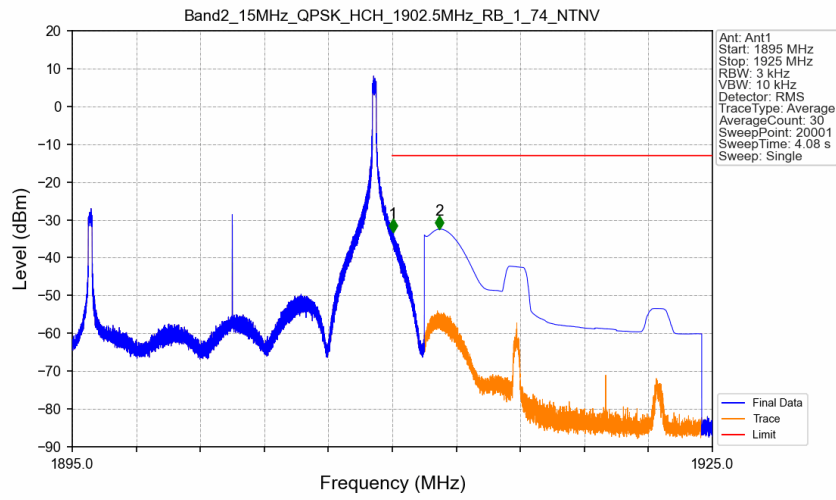


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1895	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.028	-33.26	-13	Pass
1911	1925	1	CHP	2	1912.216	-32.44	-13	Pass

Band2_15MHz_QPSK_HCH_1902.5MHz_RB_75_0_NTNV

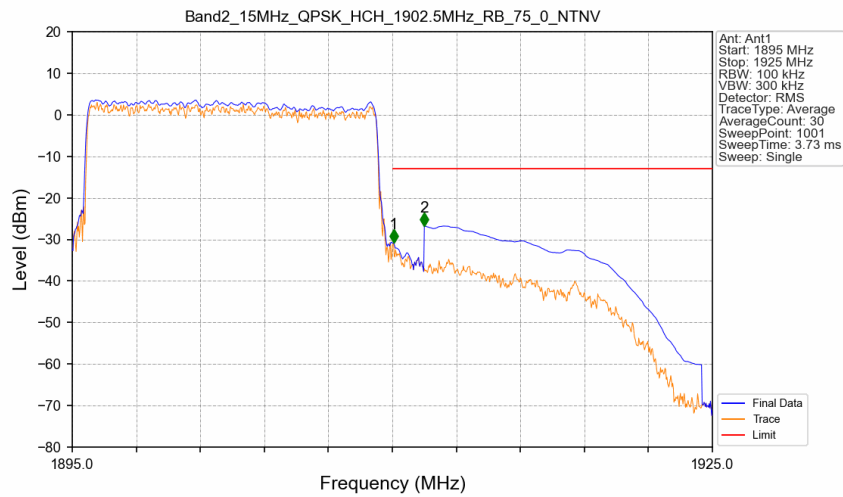


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1895	1910	0.156	CHP	/	/	/	/	/
1910	1911	0.156	CHP	1	1910.060	-30.82	-13	Pass
1911	1925	1	CHP	2	1911.500	-26.78	-13	Pass


5.2.6 B2_20MHz

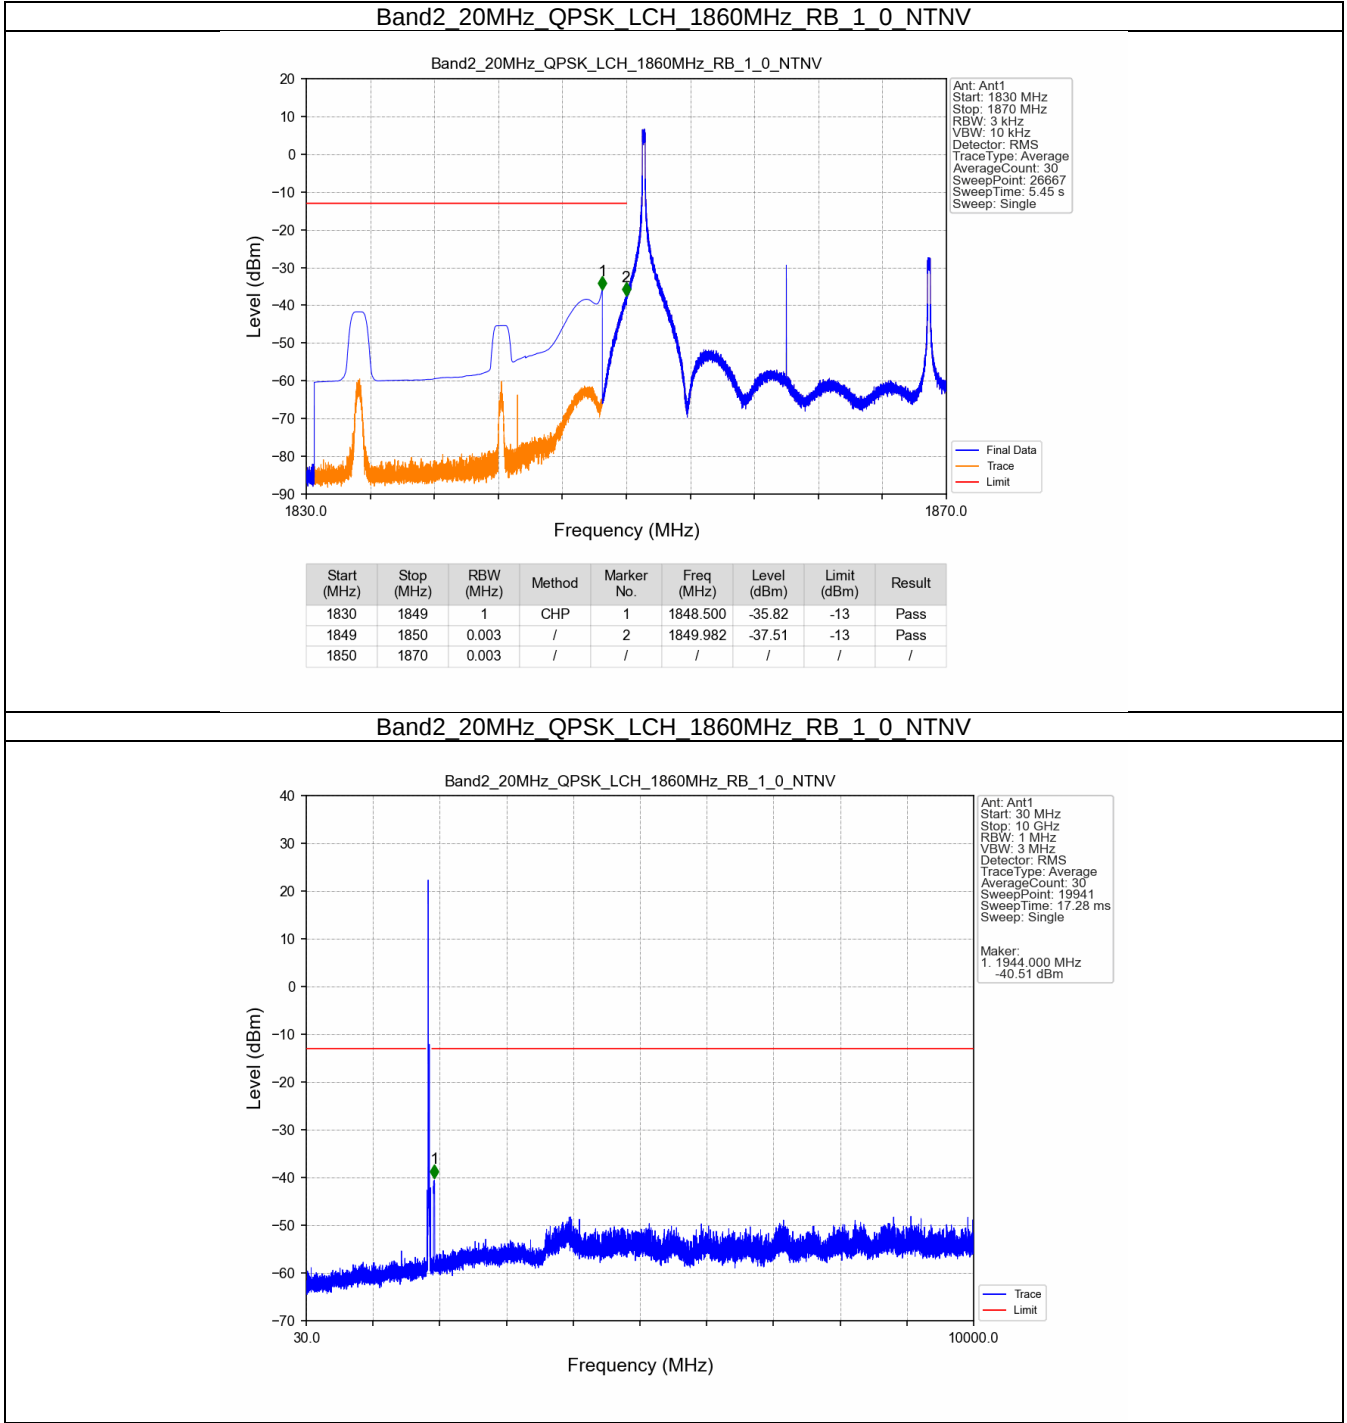

Band2_20MHz_QPSK_LCH_1860MHz_RB_1_0_NTNV

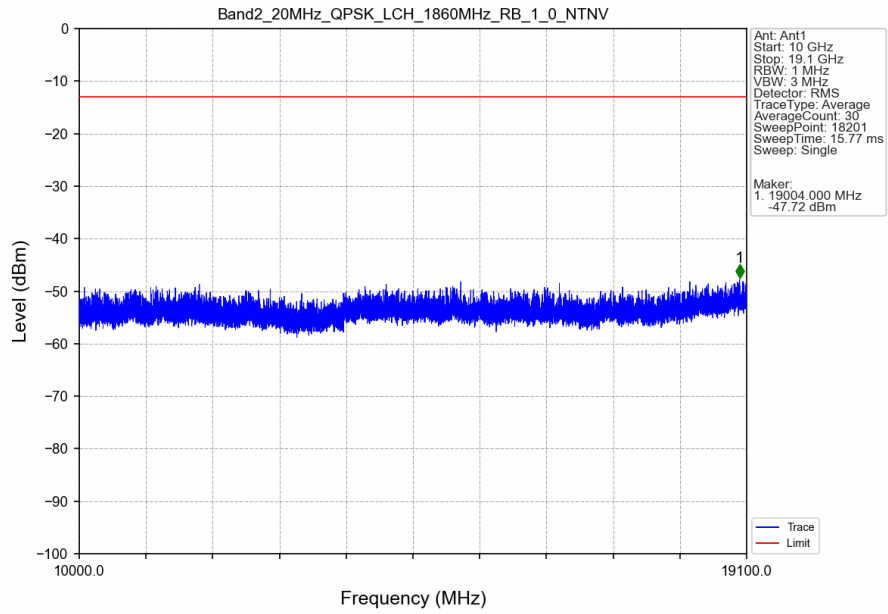


Band2_20MHz_QPSK_LCH_1860MHz_RB_100_0_NTNV

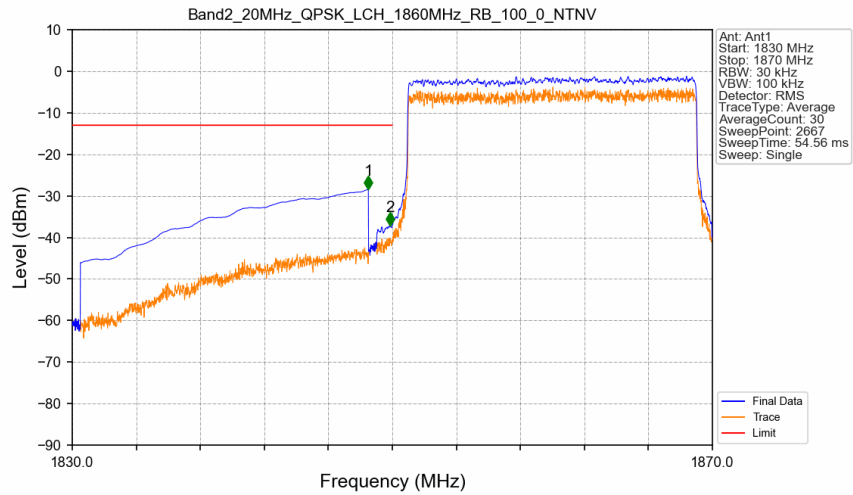


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1830	1849	1	CHP	1	1848.500	-28.36	-13	Pass
1849	1850	0.077	CHP	2	1849.865	-37.13	-13	Pass
1850	1870	0.077	CHP	/	/	/	/	/


Band2_20MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

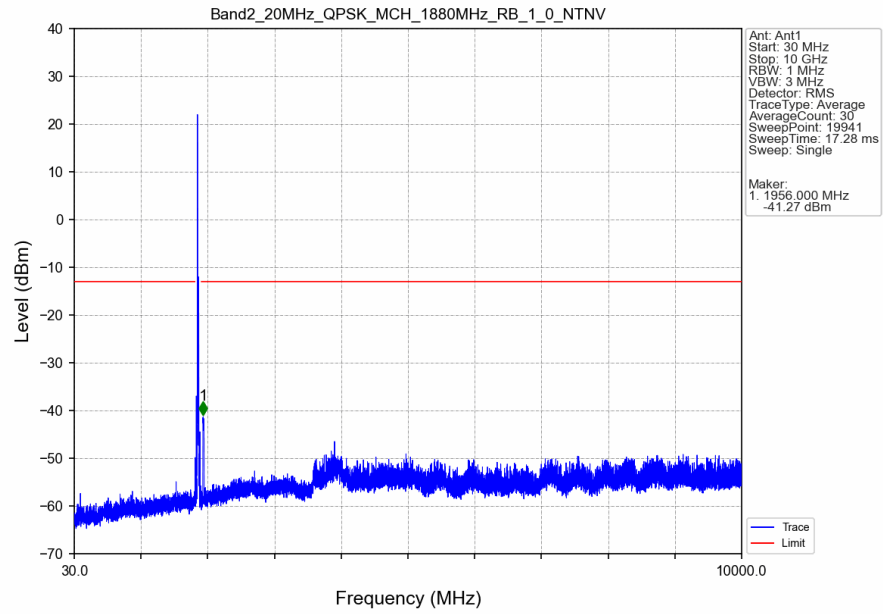


Band2_20MHz_QPSK_MCH_1880MHz_RB_1_0_NTNV

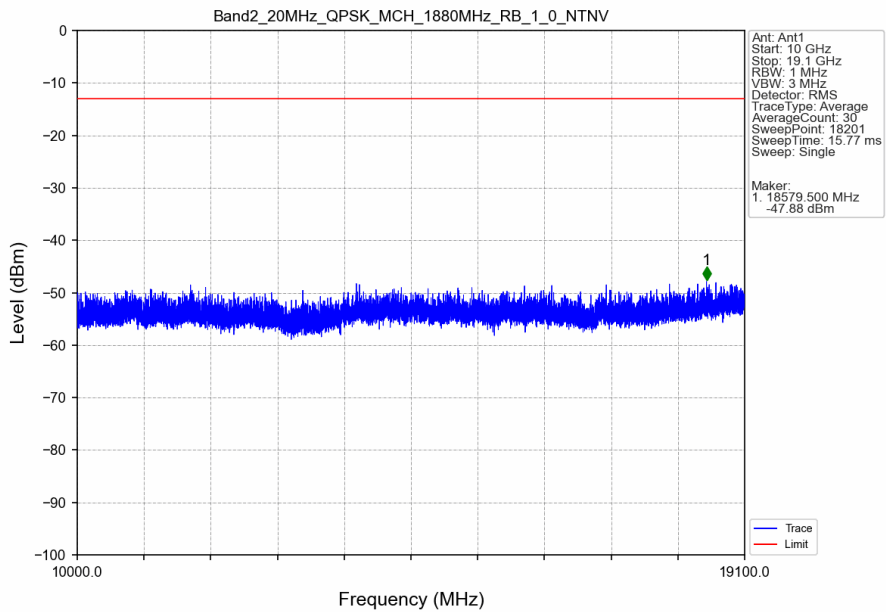


Band2_20MHz_QPSK_HCH_1900MHz_RB_1_0_NTNV

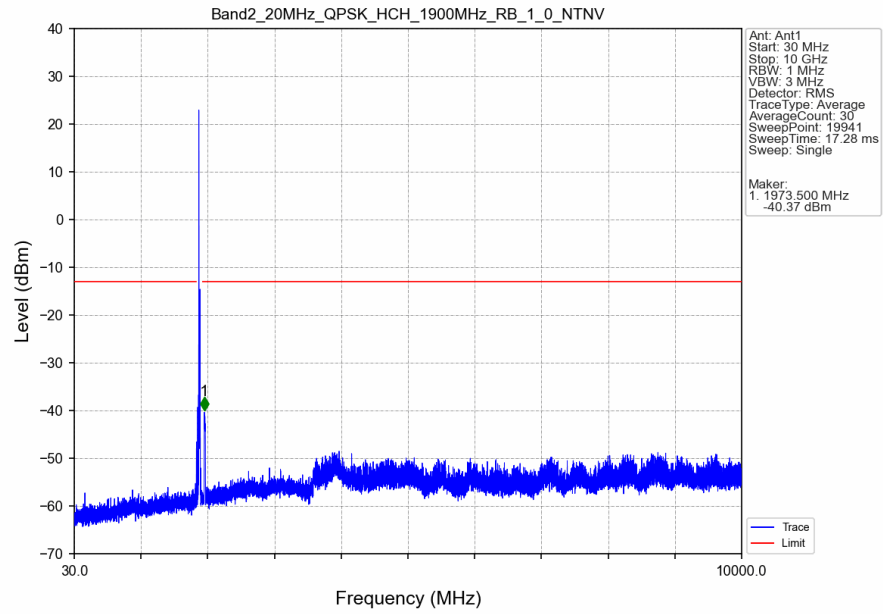

Band2_20MHz_QPSK_HCH_1900MHz_RB_1_0_NTNV

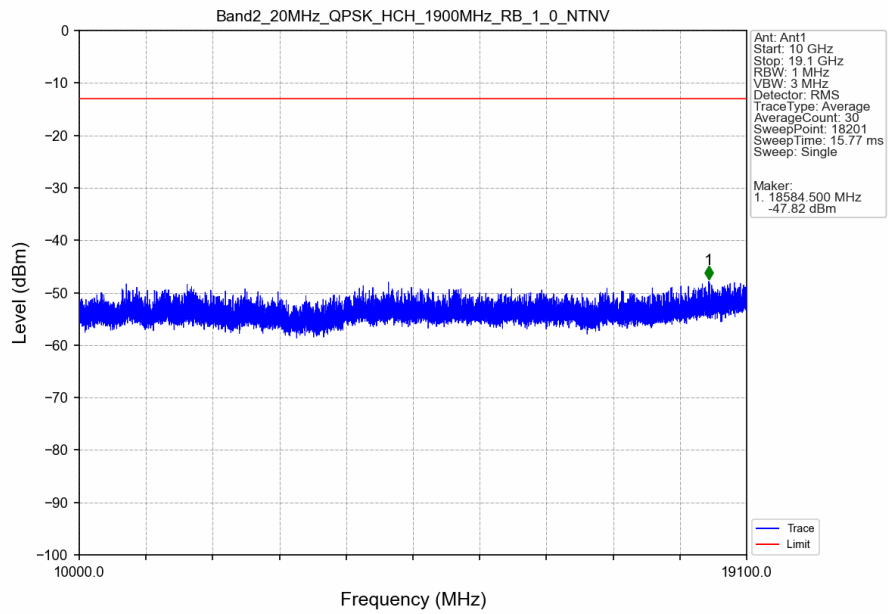


Band2 20MHz_QPSK_HCH_1900MHz_RB_1_99_NTNV

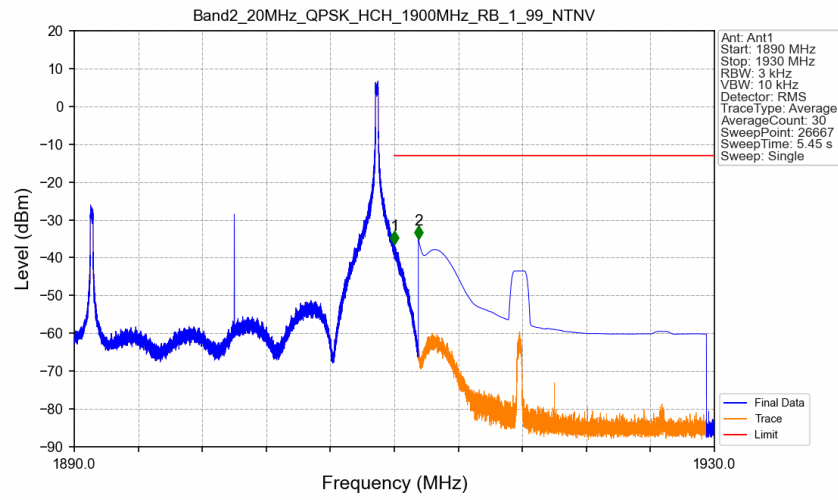

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1890	1910	0.003	/	/	/	/	/	/
1910	1911	0.003	/	1	1910.015	-36.46	-13	Pass
1911	1930	1	CHP	2	1911.500	-35.02	-13	Pass

Band2 20MHz_QPSK_HCH_1900MHz_RB_100_0_NTNV

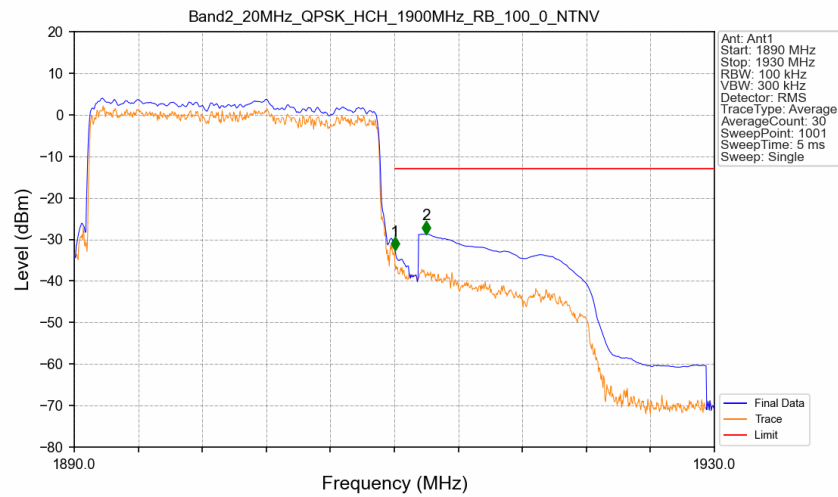

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1890	1910	0.206	CHP	/	/	/	/	/
1910	1911	0.206	CHP	1	1910.040	-32.65	-13	Pass
1911	1930	1	CHP	2	1912.000	-28.67	-13	Pass