

FCC PART 27 TEST REPORT**FCC Part 27****Report Reference No.**.....: MWR150900610**FCC ID.**.....: RQQHLT-L40SCL

Compiled by

(position+printed name+signature)....: File administrators Martin Ao




Supervised by

(position+printed name+signature)....: Test Engineer Yuchao Wang



Approved by

(position+printed name+signature)....: Manager Dixon Hao



Date of issue.....: Sep 22, 2015

Representative Laboratory Name ..: **Maxwell International Co., Ltd.**

Address: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name: **CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.**

Address: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Applicant's name: **HYUNDAI CORPORATION**

Address: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Test specification**FCC CFR Title 47 Part 2, Part 27**Standard: **EIA/TIA 603-D: 2010****KDB 971168 D01**

TRF Originator.....: Maxwell International Co., Ltd.

Maxwell International Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Mobile Phone

Trade Mark: HYUNDAI

Manufacturer: **Skycom Telecommunications Co., Limited**

Model/Type reference.....: L445

Listed Models: N/A

Modulation Type: QPSK, 16QAM

Rating: DC 3.70V

Hardware version: 5096SF_MM1_V01

Software version: HYUNDAI_L445_V5.0.2_20150907

Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR150900610	Sep 22, 2015
		Date of issue

Equipment under Test : Mobile Phone

Model /Type : HYUNDAI

Listed Models : /

Applicant : HYUNDAI CORPORATION

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Manufacturer : Skycom Telecommunications Co., Limited

Address : Rm604, East Block, Shengtang Bldg., No.1, Tairan 9 Rd., Chegongmiao, Futian District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	4
<u>2.</u>	<u>SUMMARY</u>	5
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	6
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	Internal Identification of AE used during the test	6
2.6.	Normal Accessory setting	6
2.7.	EUT configuration	6
2.8.	Related Submittal(s) / Grant (s)	6
2.9.	Modifications	7
2.10.	General Test Conditions/Configurations	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	8
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Test Description	8
3.5.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1.	Output Power	10
4.2.	Peak-to-Average Ratio (PAR)	15
4.3.	Occupied Bandwidth and Emission Bandwidth	20
4.4.	Band Edge compliance	25
4.5.	Spurious Emission on Antenna Port	30
4.6.	Radiated Spurious Emission	43
4.7.	Frequency Stability under Temperature & Voltage Variations	49
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	51
<u>6.</u>	<u>EXTERNAL PHOTOS OF THE EUT</u>	51
<u>7.</u>	<u>INTERNAL PHOTOS OF THE EUT</u>	51

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27\(10-1-12 Edition\): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES](#)

[TIA/EIA 603 D June 2010:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B:](#) - Unintentional Radiators

[FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS](#)

[ANSI C63.4:2009:](#) Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

[FCC KDB971168D01](#) Power Meas License Digital Systems

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Aug 20, 2015
Testing commenced on	:	Aug 21, 2015
Testing concluded on	:	Sep 22, 2015

2.2. Product Description

The **HYUNDAI CORPORATION** 's Model: L445 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	L445
Modulation Type	GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS, QPSK, 16QAM for LTE
Antenna Type	Internal
UMTS Operation Frequency Band	Device supported UMTS FDD Band II/IV/V
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
LTE Release Version	R8
UMTS Operation Frequency Band	Device supported FDD band 2, FDD band 4, FDD band 5, FDD band 7, FDD band 17
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK (BT 4.0)/GFSK,8DPSK,π/4DQPSK(BT 3.0+EDR)
Hardware version	5096SF_MM1_V01
Software version	HYUNDAI_L445_V5.0.2_20150907
Android version	Android 4.4.2
GPS function	Supported
WLAN	Supported 802.11b/802.11g/802.11n
Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM900:Power Class 4/DCS1800:Power Class 1
GSM/EDGE/GPRS Operation Frequency	GSM900 :880MHz-915MHz/DCS1800:1710MHz-1785MHz
GSM/EDGE/GPRS Operation Frequency Band	GSM900/DCS1800/GPRS900/ GPRS 1800/EDGE900/EDGE1800
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GPRS operation mode	Class B

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	120V / 60 Hz	<input type="radio"/>	115V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.70V

2.4. Short description of the Equipment under Test (EUT)

2.4.1 General Description

L445 is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band II, Band IV and Band V, LTE frequency band is band 2.band 4,band 5,band 7,band 17; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.5. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model: TPA-5950100UU

INPUT: 100-240V 50/60Hz 0.2A

OUTPUT: DC 5.0V,1000mAh

*AE ID: is used to identify the test sample in the lab internally.

2.6. Normal Accessory setting

Fully charged battery was used during the test.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLLT-L40SCL** filing to comply with FCC Part 27, Rules.

2.9. Modifications

No modifications were implemented to meet testing criteria.

2.10. General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.4V
	VN	3.7V
	VH	4.2V

NOTE: VL=lower extreme test voltage VN=nominal voltage

VH=upper extreme test voltage TN=normal temperature

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

3.4.1 AWS Band (1710-1755MHz paired with 2110-2155MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Output Power	§2.1046, §27.50(d)	EIRP ≤ 1W;	Pass
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13dBm/1%*EBW,in1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13dBm/1MHz, from 9kHz to 10 th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Pass
Frequency Stability	§2.1053, §27.53(h)	≤ -13dBm/1MHz.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

3.5. Equipments Used during the Test

Description	Manufacturer	Model	Serial No.	Test Date	Due Date
EMI Test Receiver	R&S	ESIB26	A0304218	2015.06.02	2016.06.01
Full-Anechoic Chamber	Albatross	12.8m*6.8m *6.4m	A0412372	2015.01.05	2016.01.04
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2015.06.02	2016.06.01
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2015.06.02	2016.06.01
Bilog Antenna	Schwarzbeck	VULB 9163	9163-276	2015.06.02	2016.06.01
Double ridge horn antenna	R&S	HF960	100150	2015.06.02	2016.06.01
Double ridge horn antenna	R&S	HF960	100155	2015.06.02	2016.06.01
Ultra-wideband antenna	R&S	HL562	100089	2015.06.02	2016.06.01
Ultra-wideband antenna	R&S	HL562	100090	2015.06.02	2016.06.01
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2015.06.02	2016.06.01
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902611	2015.06.02	2016.06.01
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2015.06.02	2016.06.01
Amplifier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2015.06.02	2016.06.01
Amplifier 18G~40GHz	R&S	JS42-18002600-28-5A	12111.0980.00	2015.06.02	2016.06.01
System Simulator	R&S	CMW500	A130101034	2015.06.010	2016.06.09
Signal Generator	R&S	SMF100A	A0304267	2015.06.010	2016.06.09
Signal Analyzer	Agilent	N9030A	MY49430428	2015.06.010	2016.06.09

The calibration interval was one year.

4. TEST CONDITIONS AND RESULTS


4.1. Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits

4.1.1. Conducted Output Power

TEST CONFIGURATION

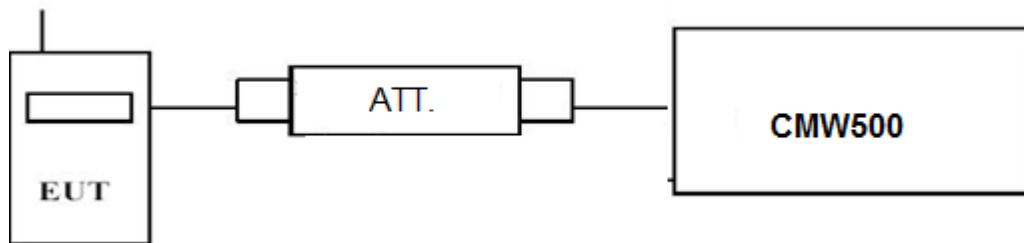

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7;

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
5 MHz	2502.5	1 RB low	22.02	21.28
		1 RB high	21.98	21.37
		50% RB mid	20.84	20.08
		100% RB	20.90	20.00
	2535	1 RB low	21.68	21.04
		1 RB high	21.72	21.07
		50% RB mid	20.18	19.37
		100% RB	20.23	19.39
10 MHz	2567.5	1 RB low	20.24	19.68
		1 RB high	19.74	19.19
		50% RB mid	18.51	17.77
		100% RB	18.59	17.71
	2505	1 RB low	21.31	20.55
		1 RB high	21.91	21.15
		50% RB mid	20.88	19.95
		100% RB	20.86	19.94
	2535	1 RB low	21.03	20.36
		1 RB high	20.90	20.23
		50% RB mid	20.01	19.08
		100% RB	20.03	19.18
	2565	1 RB low	20.39	19.71
		1 RB high	18.99	18.33


		50% RB mid	18.79	17.92
		100% RB	18.86	17.94
15 MHz	2507.5	1 RB low	21.27	20.47
		1 RB high	21.94	21.20
		50% RB mid	20.75	19.83
		100% RB	20.70	19.82
		1 RB low	21.04	20.37
	2535	1 RB high	20.99	20.31
		50% RB mid	19.74	18.79
		100% RB	19.83	18.90
		1 RB low	21.06	20.39
20 MHz	2562.5	1 RB high	18.99	18.33
		50% RB mid	19.10	18.15
		100% RB	19.13	18.16
		1 RB low	21.37	20.42
	2510	1 RB high	21.80	20.98
		50% RB mid	20.77	19.87
		100% RB	20.69	19.78
		1 RB low	21.20	20.37
	2535	1 RB high	21.16	20.31
		50% RB mid	19.66	18.70
		100% RB	19.81	18.92
		1 RB low	21.50	20.68
	2560	1 RB high	19.04	18.24
		50% RB mid	19.38	18.43
		100% RB	19.37	18.43

4.1.2. Radiated Output Power

LIMIT

According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

TEST CONFIGURATION

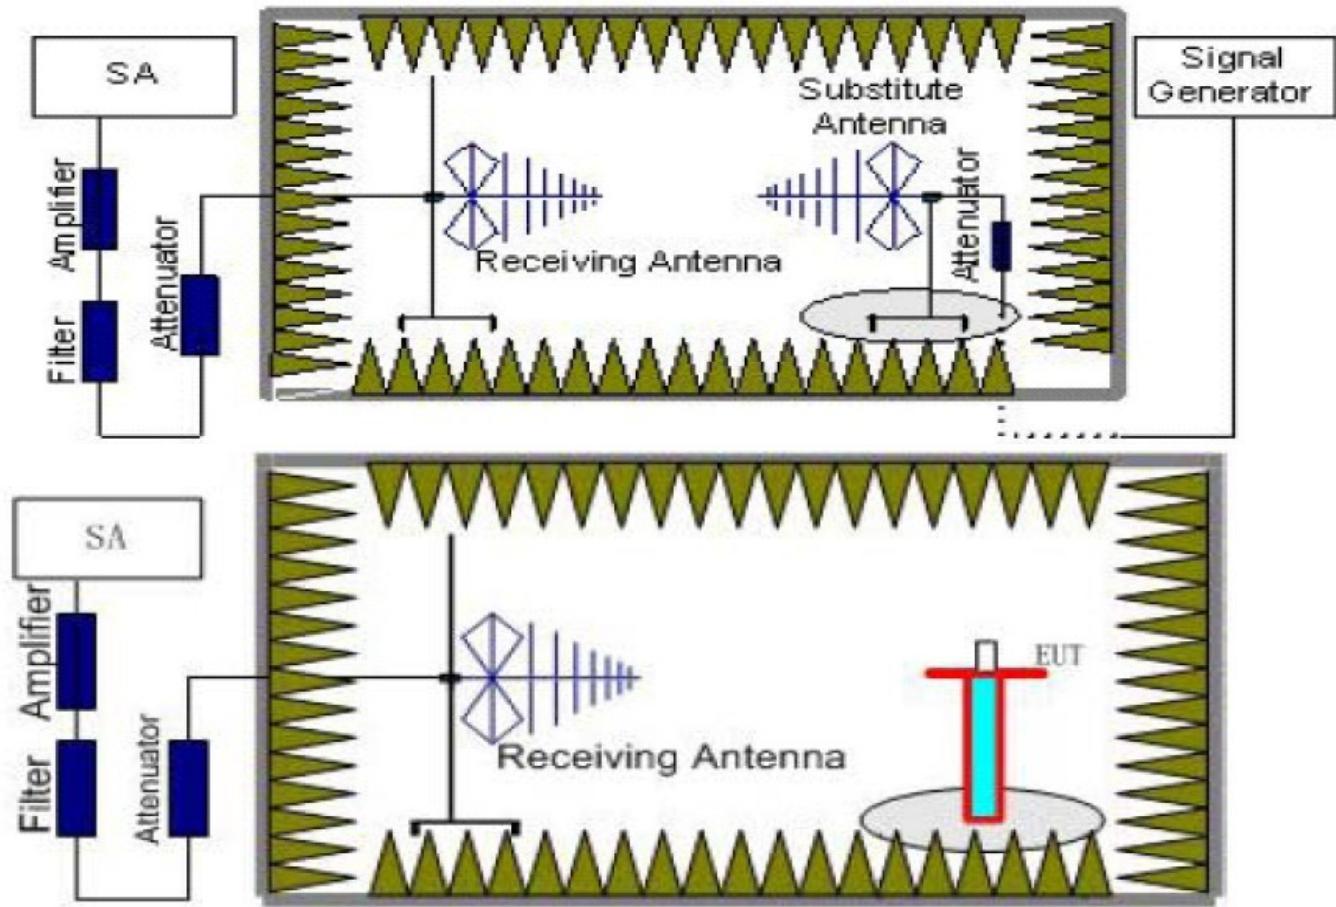

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} + G_a$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{cl}} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Note: We test the H direction and V direction and V direction is worse.

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. $\text{EIRP} = P_{\text{Mea}}(\text{dBm}) - P_{\text{cl}}(\text{dB}) + P_{\text{Ag}}(\text{dB}) + G_a(\text{dBi})$

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-21.72	3.06	9.68	34.80	19.70	30.00	10.30	H
2535.0	-20.72	3.17	9.68	34.80	20.59	30.00	9.41	H
2567.5	-21.61	3.22	9.75	34.80	19.72	30.00	10.28	H

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505.0	-21.77	3.06	9.68	34.80	19.65	30.00	10.35	H
2535.0	-20.67	3.17	9.68	34.80	20.64	30.00	9.36	H
2565.0	-21.75	3.22	9.75	34.80	19.58	30.00	10.42	H

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-21.62	3.06	9.68	34.80	19.80	30.00	10.20	H
2535.0	-20.63	3.17	9.68	34.80	20.68	30.00	9.32	H
2562.5	-21.30	3.22	9.75	34.80	20.03	30.00	9.97	H

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.0	-21.73	3.06	9.68	34.80	19.69	30.00	10.31	H
2535.0	-20.55	3.17	9.68	34.80	20.76	30.00	9.24	H
2560.0	-21.41	3.22	9.75	34.80	19.92	30.00	10.08	H

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-21.88	3.06	9.68	34.80	19.54	30.00	10.46	H
2535.0	-21.45	3.17	9.68	34.80	19.86	30.00	10.14	H
2567.5	-22.34	3.22	9.75	34.80	18.99	30.00	11.01	H

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505	-22.13	3.06	9.68	34.80	19.29	30.00	10.71	H
2535	-21.60	3.17	9.68	34.80	19.71	30.00	10.29	H
2565	-22.19	3.22	9.75	34.80	19.14	30.00	10.86	H

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-21.95	3.06	9.68	34.80	19.47	30.00	10.53	H
2535.0	-22.32	3.17	9.68	34.80	18.99	30.00	11.01	H
2562.5	-21.95	3.06	9.68	34.80	19.47	30.00	10.53	H

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	PMea (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.0	-23.10	3.06	9.68	34.80	18.32	30.00	11.68	H
2535.0	-21.52	3.17	9.68	34.80	19.79	30.00	10.21	H
2560.0	-22.07	3.22	9.75	34.80	19.26	30.00	10.74	H

4.2. Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

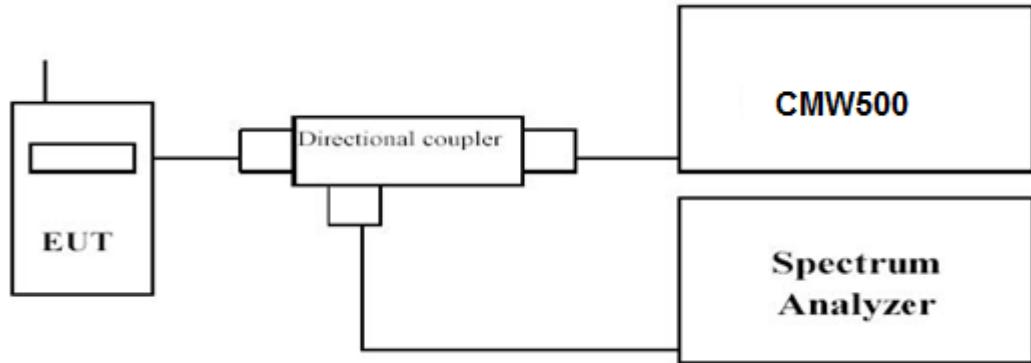

TEST PROCEDURE


1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.


TEST RESULTS


Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	2502.5	1RB#0	3.36	4.35
	2535.0		3.68	4.68
	2567.5		3.65	4.62
10 MHz	2505.0	1RB#0	3.84	4.39
	2535.0		3.94	4.66
	2565.0		4.15	5.06
15 MHz	2507.5	1RB#0	5.51	6.60
	2535.0		5.24	5.98
	2562.5		5.59	6.17
20 MHz	2510.0	1RB#0	6.60	7.01
	2535.0		6.60	7.21
	2560.0		6.61	7.35

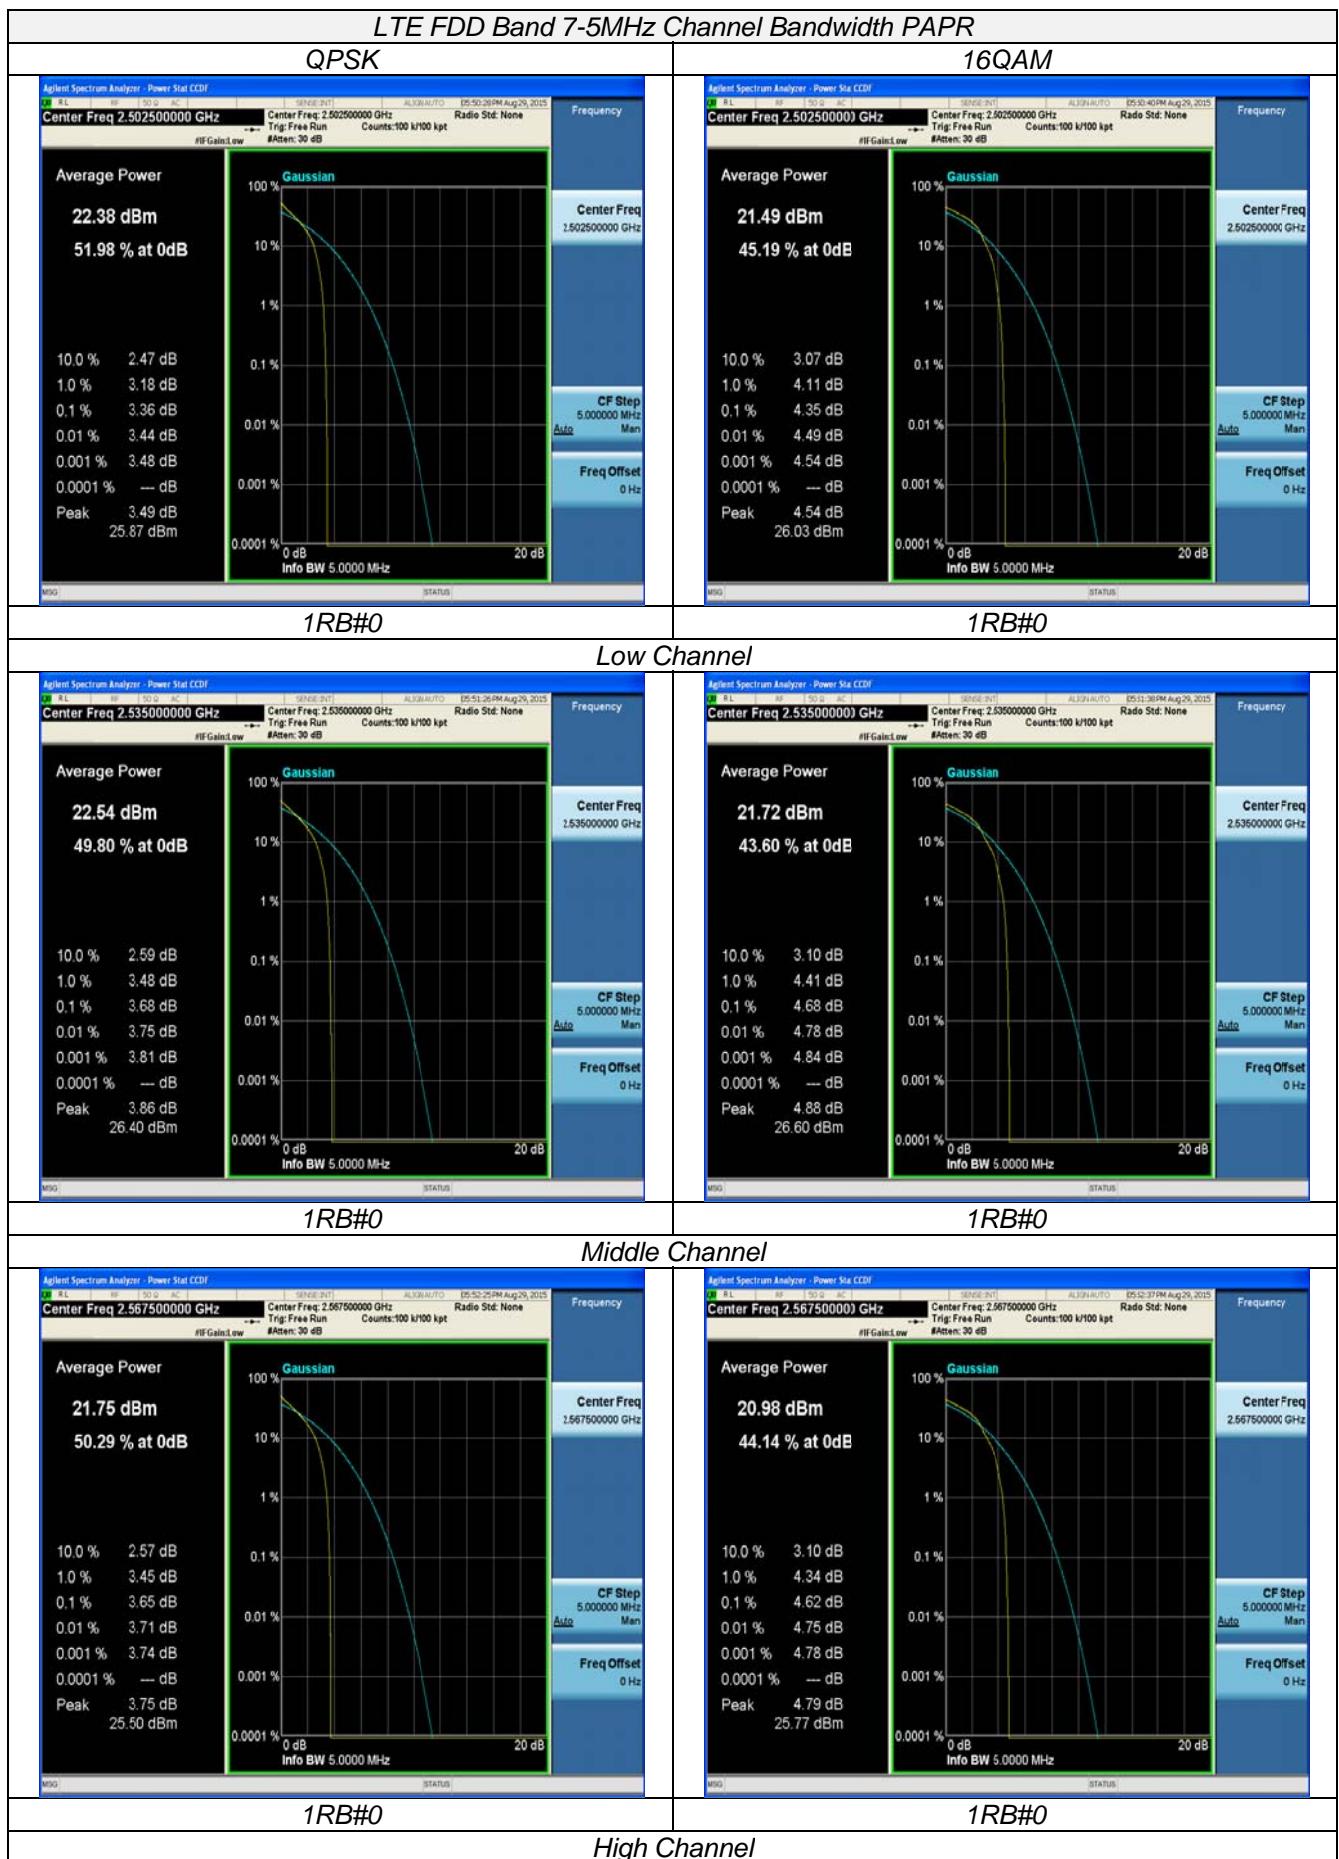

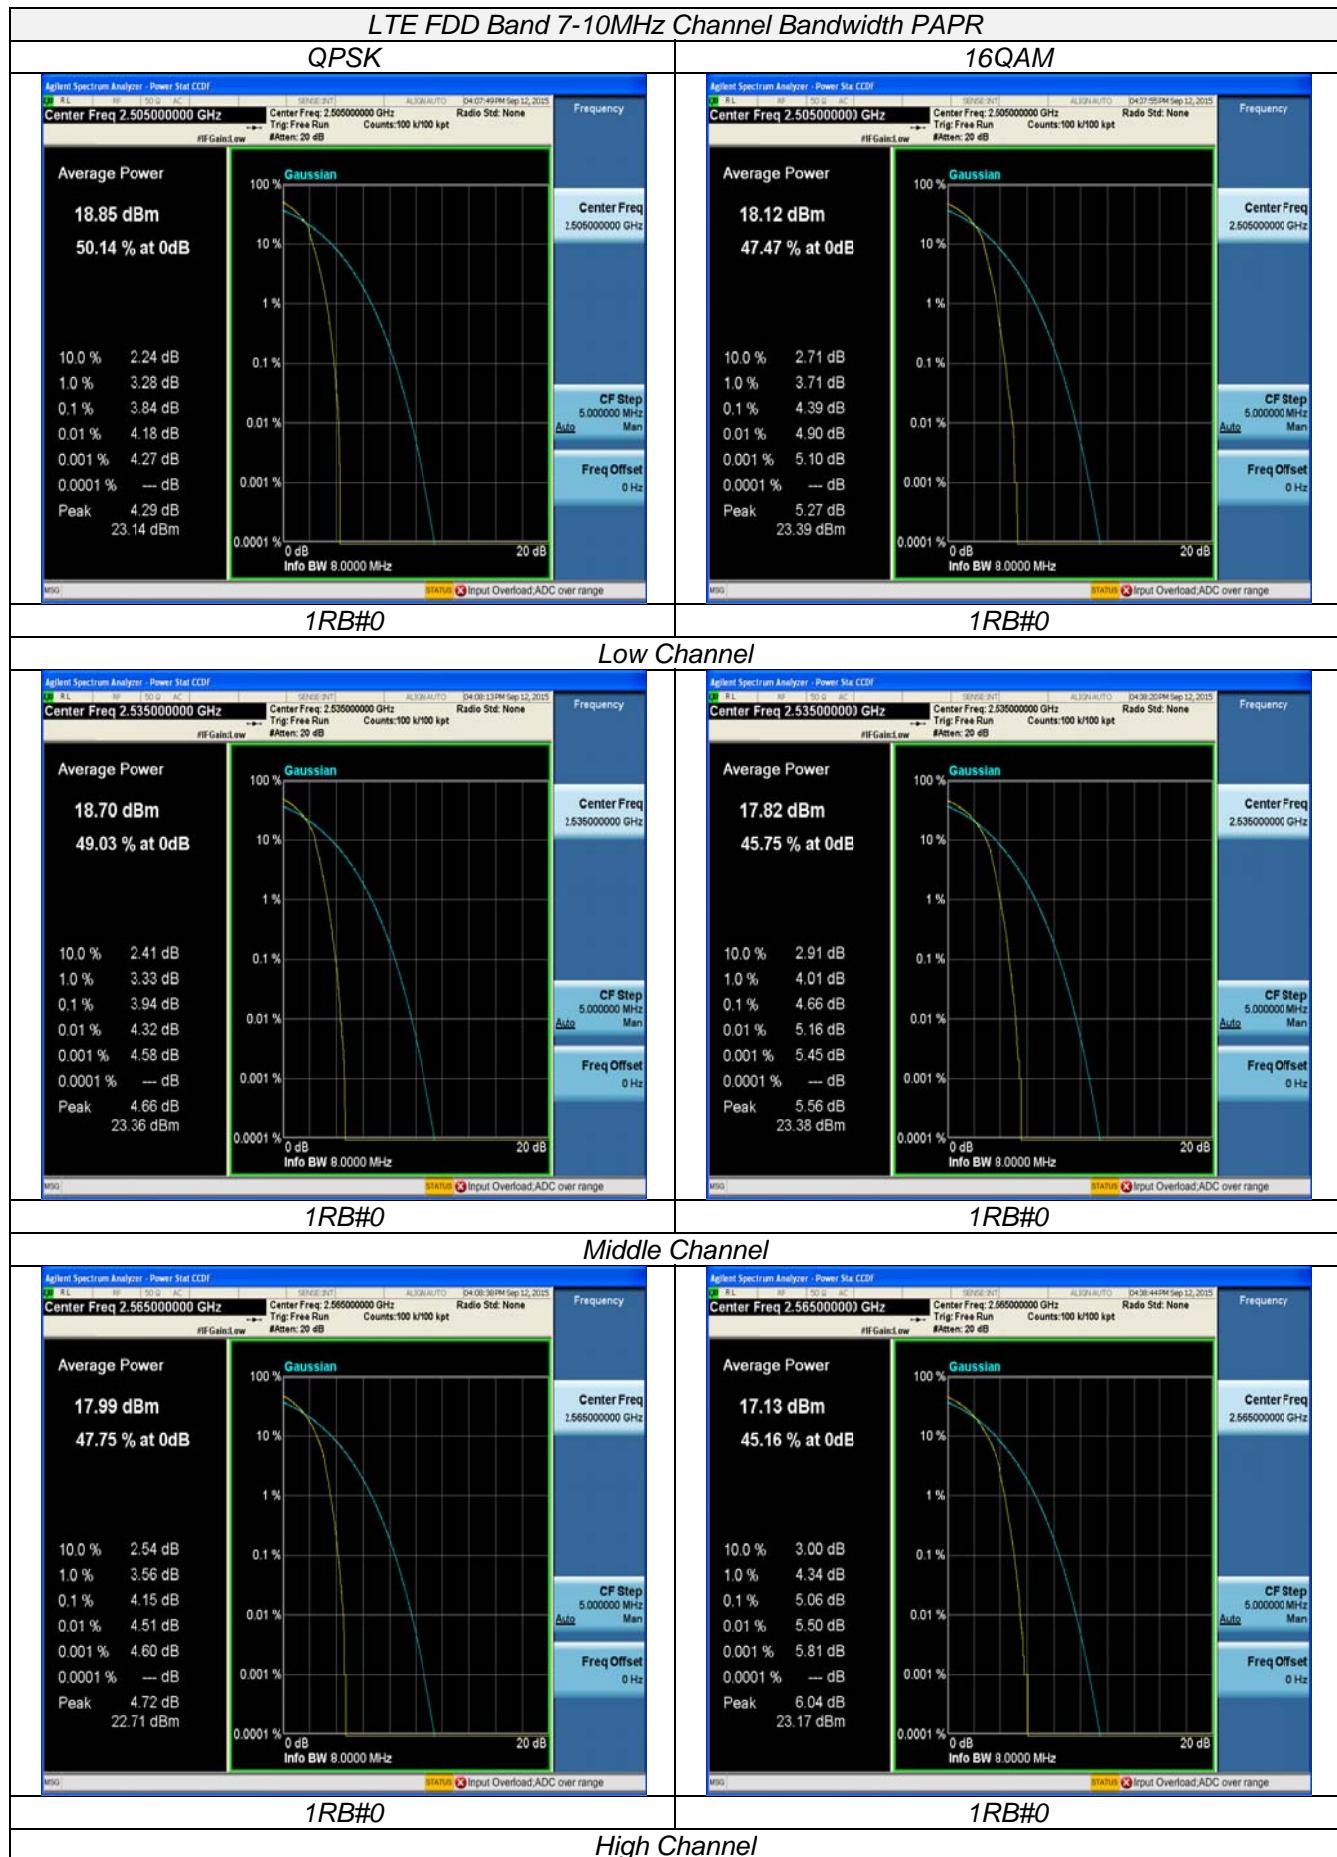

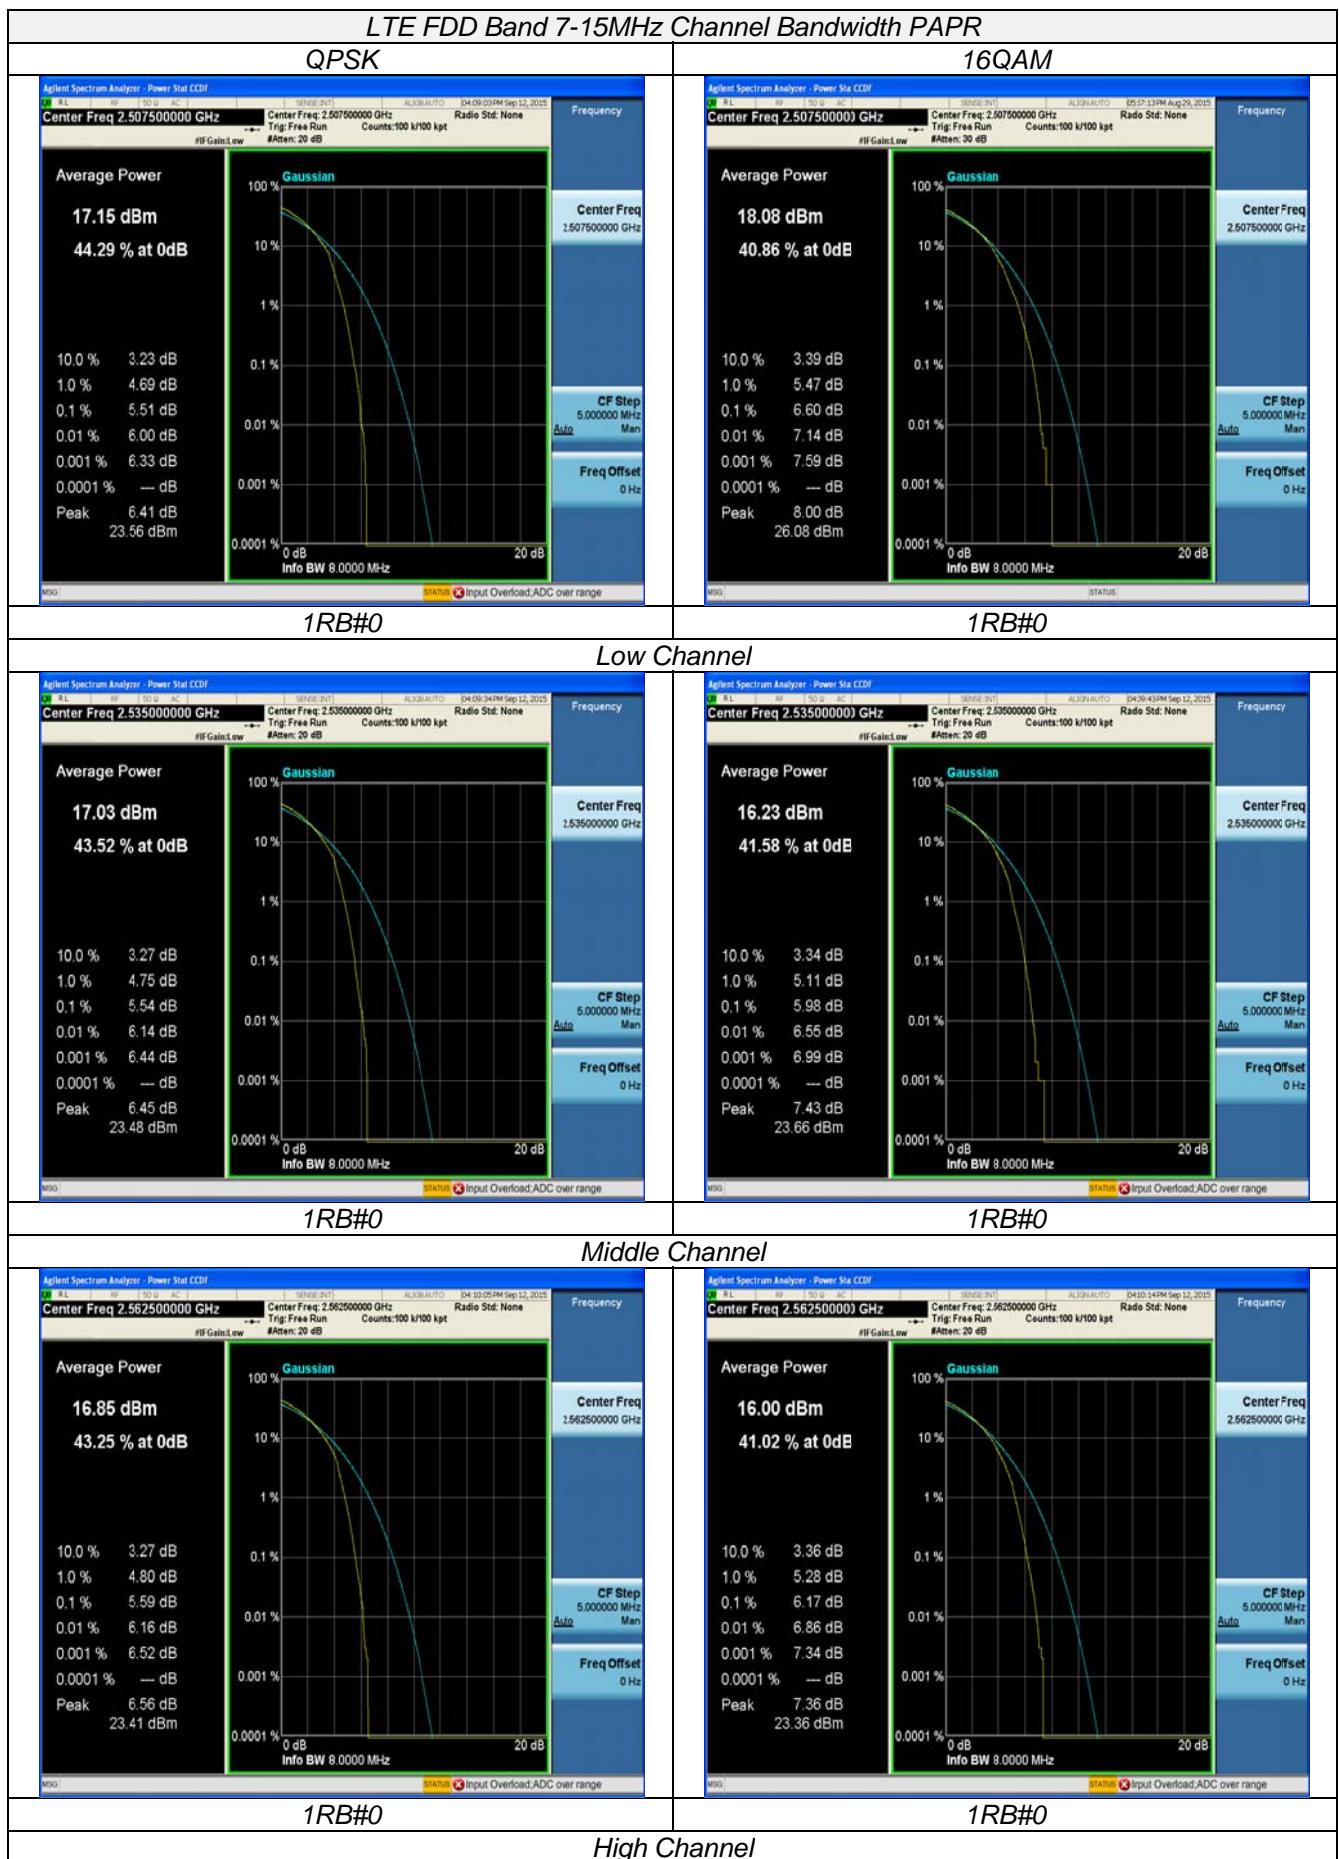

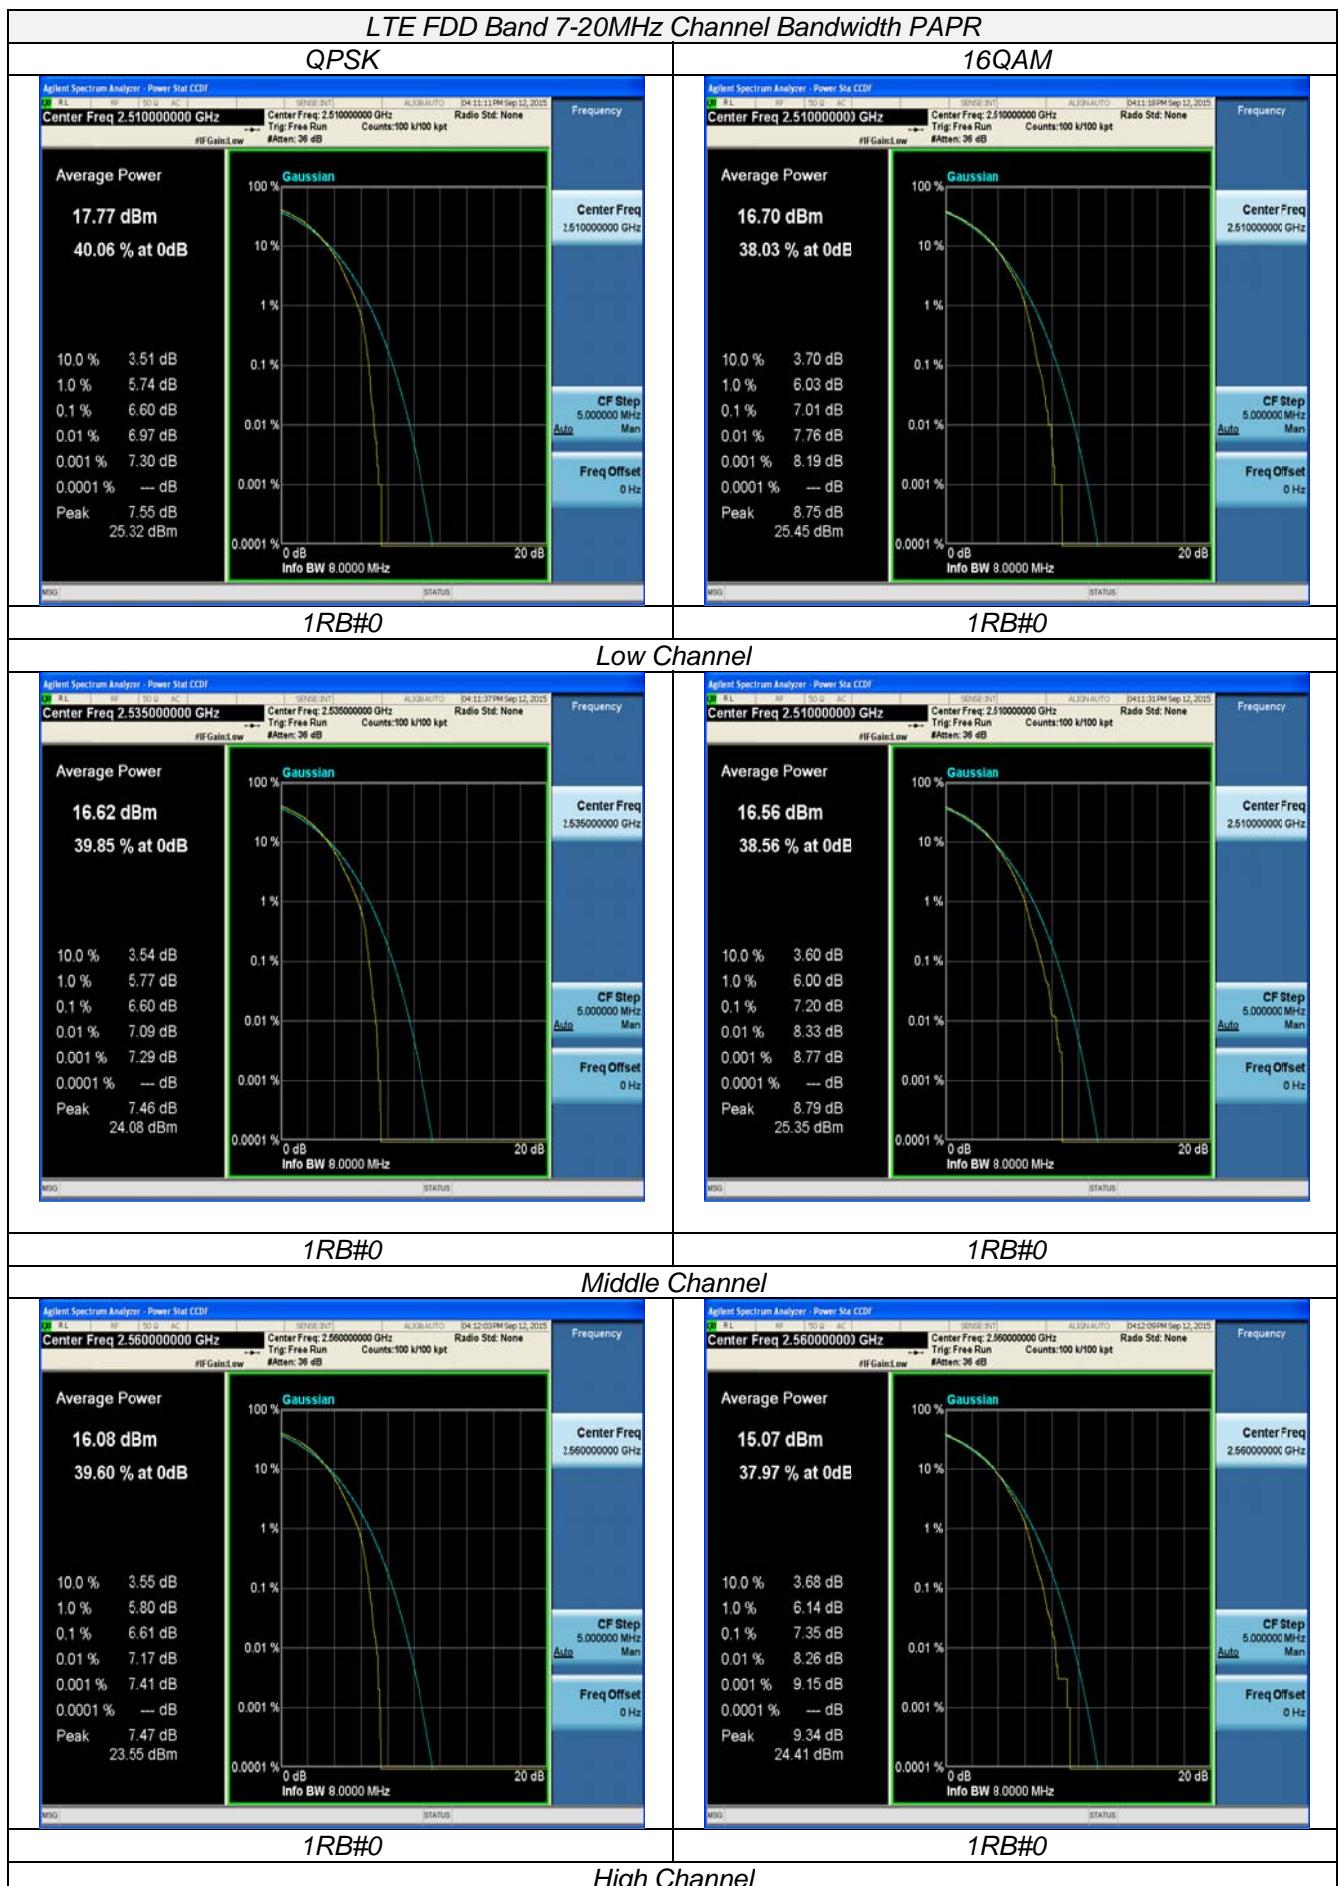


4.3. Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

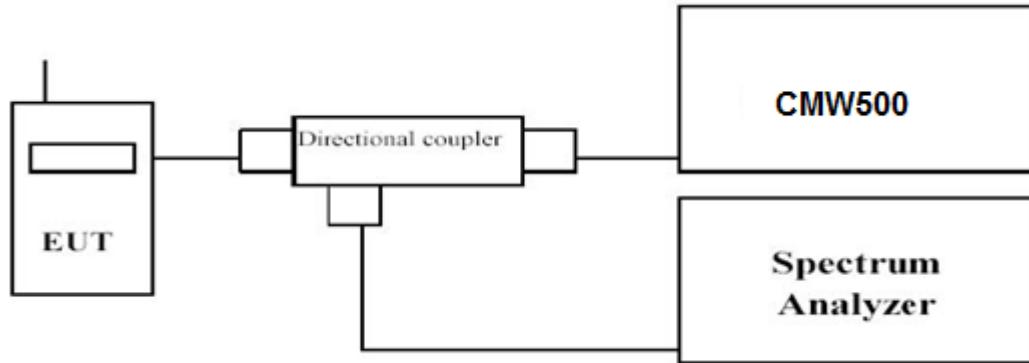

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.




-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


TEST RESULTS

Remark:




1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.

LTE FDD Band 7						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	2502.5	4.816	4.769	4.4849	4.4842
		2535.0	4.856	4.809	4.4897	4.4867
		2567.5	4.794	4.860	4.4883	4.4757
10 MHz	50RB#0	2505.0	9.516	9.499	8.9359	8.9370
		2535.0	9.473	9.496	8.9550	8.9420
		2565.0	9.450	9.467	8.9436	8.9399
15 MHz	75RB#0	2507.5	14.09	14.04	13.409	13.410
		2535.0	14.12	14.16	13.416	13.416
		2562.5	14.12	14.04	13.406	13.401
20 MHz	100RB#0	2510.0	18.65	18.62	17.871	17.859
		2535.0	18.68	18.66	17.877	17.895
		2560.0	18.56	18.55	17.844	17.845

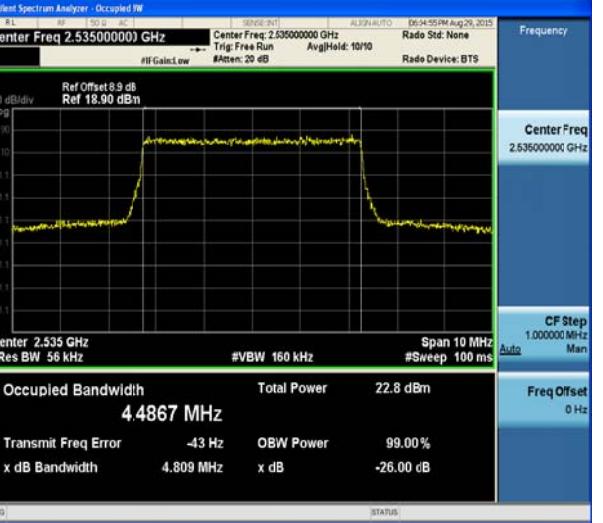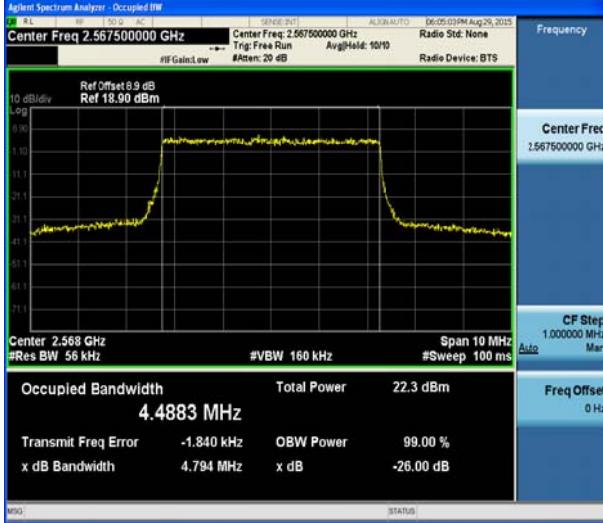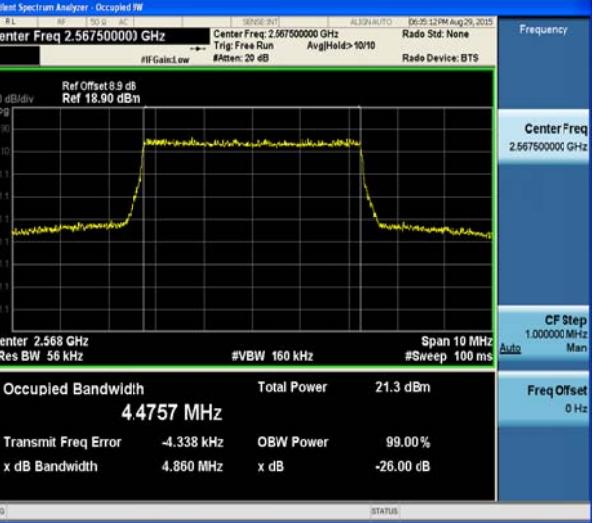LTE FDD Band 7-5MHz Channel Bandwidth	
QPSK	16QAM
 <p>QPSK</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.502500000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.502500000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4849 MHz</p> <p>Total Power 23.8 dBm</p> <p>Transmit Freq Error 1.335 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.816 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>	 <p>16QAM</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.502500000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.502500000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4842 MHz</p> <p>Total Power 22.8 dBm</p> <p>Transmit Freq Error 2.279 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.769 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>
25RB#0	25RB#0
<i>Low Channel</i>	
 <p>25RB#0</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.535000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.535000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4897 MHz</p> <p>Total Power 23.6 dBm</p> <p>Transmit Freq Error -331 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.856 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>	 <p>25RB#0</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.535000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.535000000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4867 MHz</p> <p>Total Power 22.8 dBm</p> <p>Transmit Freq Error -43 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.809 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>
25RB#0	25RB#0
<i>Middle Channel</i>	
 <p>25RB#0</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.567500000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.567500000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4883 MHz</p> <p>Total Power 22.3 dBm</p> <p>Transmit Freq Error -1.840 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.794 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>	 <p>25RB#0</p> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.567500000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Frequency</p> <p>Center Freq 2.567500000 GHz</p> <p>CF Step 1.000000 MHz</p> <p>Span 10 MHz</p> <p>#Res BW 56 kHz</p> <p>#VBW 160 kHz</p> <p>#Sweep 100 ms</p> <p>Occupied Bandwidth 4.4757 MHz</p> <p>Total Power 21.3 dBm</p> <p>Transmit Freq Error -4.338 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 4.860 MHz</p> <p>x dB -26.00 dB</p> <p>MSG</p> <p>STATUS</p>
25RB#0	25RB#0
<i>High Channel</i>	

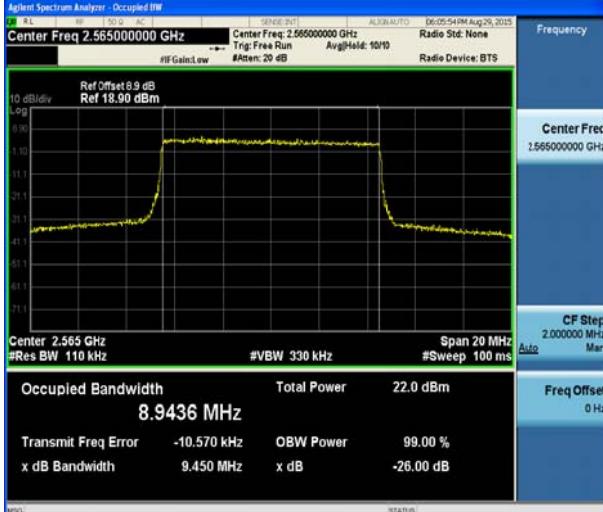LTE FDD Band 7-10MHz Channel Bandwidth	
QPSK	16QAM
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.505000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.505000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9359 MHz</p> <p>Total Power 23.2 dBm</p> <p>Transmit Freq Error 567 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.516 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.505000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.505000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9370 MHz</p> <p>Total Power 22.2 dBm</p> <p>Transmit Freq Error 40 Hz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.499 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>
50RB#0	50RB#0
<i>Low Channel</i>	
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.535000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.535000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9550 MHz</p> <p>Total Power 23.0 dBm</p> <p>Transmit Freq Error 4.867 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.473 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.535000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.535000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9420 MHz</p> <p>Total Power 22.1 dBm</p> <p>Transmit Freq Error -4.797 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.496 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>
50RB#0	50RB#0
<i>Middle Channel</i>	
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.565000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.565000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9436 MHz</p> <p>Total Power 22.0 dBm</p> <p>Transmit Freq Error -10.570 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.450 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.565000000 GHz</p> <p>Ref Offset 8.9 dB</p> <p>Ref 18.90 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Frequency</p> <p>Center Freq 2.565000000 GHz</p> <p>CF Step 2.00000 MHz</p> <p>Auto</p> <p>Man</p> <p>Occupied Bandwidth 8.9399 MHz</p> <p>Total Power 21.1 dBm</p> <p>Transmit Freq Error -11.243 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 9.467 MHz</p> <p>x dB -26.00 dB</p> <p>#Res BW 110 kHz</p> <p>#VBW 330 kHz</p> <p>Span 20 MHz</p> <p>#Sweep 100 ms</p> <p>Freq Offset 0 Hz</p> <p>MSG</p> <p>STATUS</p>
50RB#0	50RB#0
<i>High Channel</i>	

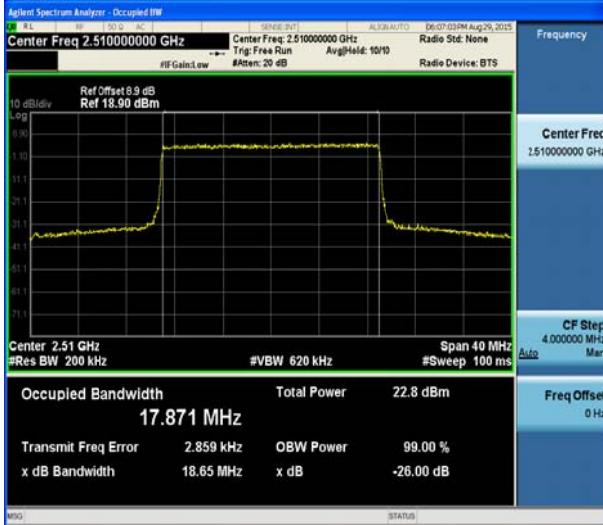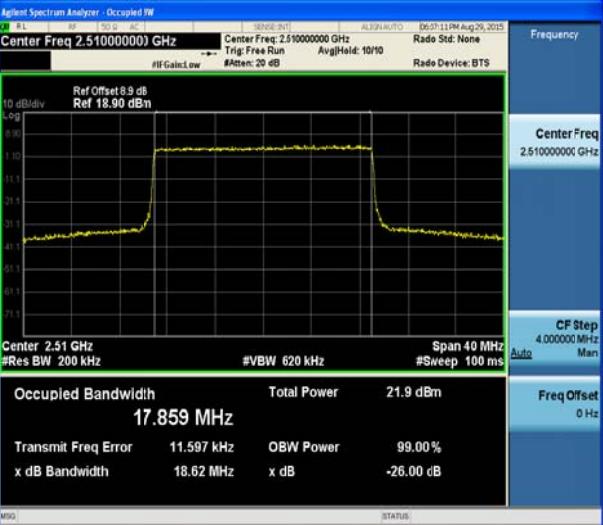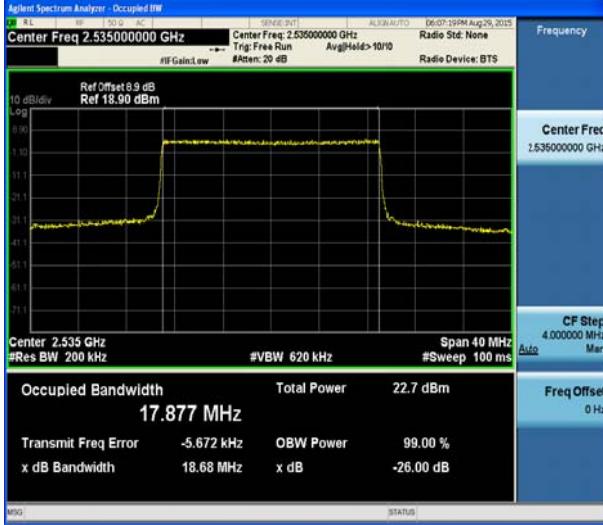


LTE FDD Band 7-20MHz Channel Bandwidth	
QPSK	16QAM
 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.510000000 GHz Center Freq: 2.510000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.510000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.871 MHz Total Power 22.8 dBm Transmit Freq Error 2.859 kHz OBW Power 99.00 % x dB Bandwidth 18.65 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.510000000 GHz Center Freq: 2.510000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.510000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.859 MHz Total Power 21.9 dBm Transmit Freq Error 11.597 kHz OBW Power 99.00 % x dB Bandwidth 18.62 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>
100RB#0	100RB#0
Low Channel	
 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.535000000 GHz Center Freq: 2.535000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.535000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.877 MHz Total Power 22.7 dBm Transmit Freq Error -5.672 kHz OBW Power 99.00 % x dB Bandwidth 18.68 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.535000000 GHz Center Freq: 2.535000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.535000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.895 MHz Total Power 21.8 dBm Transmit Freq Error -872 Hz OBW Power 99.00 % x dB Bandwidth 18.66 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>
100RB#0	100RB#0
Middle Channel	
 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.560000000 GHz Center Freq: 2.560000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.560000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.844 MHz Total Power 22.4 dBm Transmit Freq Error -32.096 kHz OBW Power 99.00 % x dB Bandwidth 18.56 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.560000000 GHz Center Freq: 2.560000000 GHz Radio Std: None #IFGain:Low #Atten: 20 dB Radio Device: BTS Ref Offset 8.9 dB Ref 18.90 dBm 10 dB/div Log Frequency Center Freq 2.560000000 GHz CF Step 4.00000 MHz Auto Man Occupied Bandwidth 17.845 MHz Total Power 21.4 dBm Transmit Freq Error -19.222 kHz OBW Power 99.00 % x dB Bandwidth 18.55 MHz x dB -26.00 dB #Res BW 200 kHz #VBW 620 kHz #Sweep 100 ms MSG STATUS</p>
100RB#0	100RB#0
High Channel	

4.4. Band Edge compliance

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

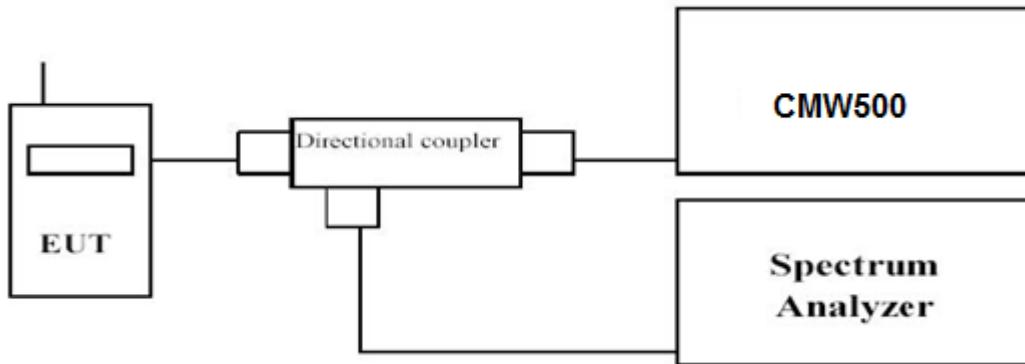


TEST PROCEDURE


1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum


TEST RESULTS


Remark:

1. *We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.*

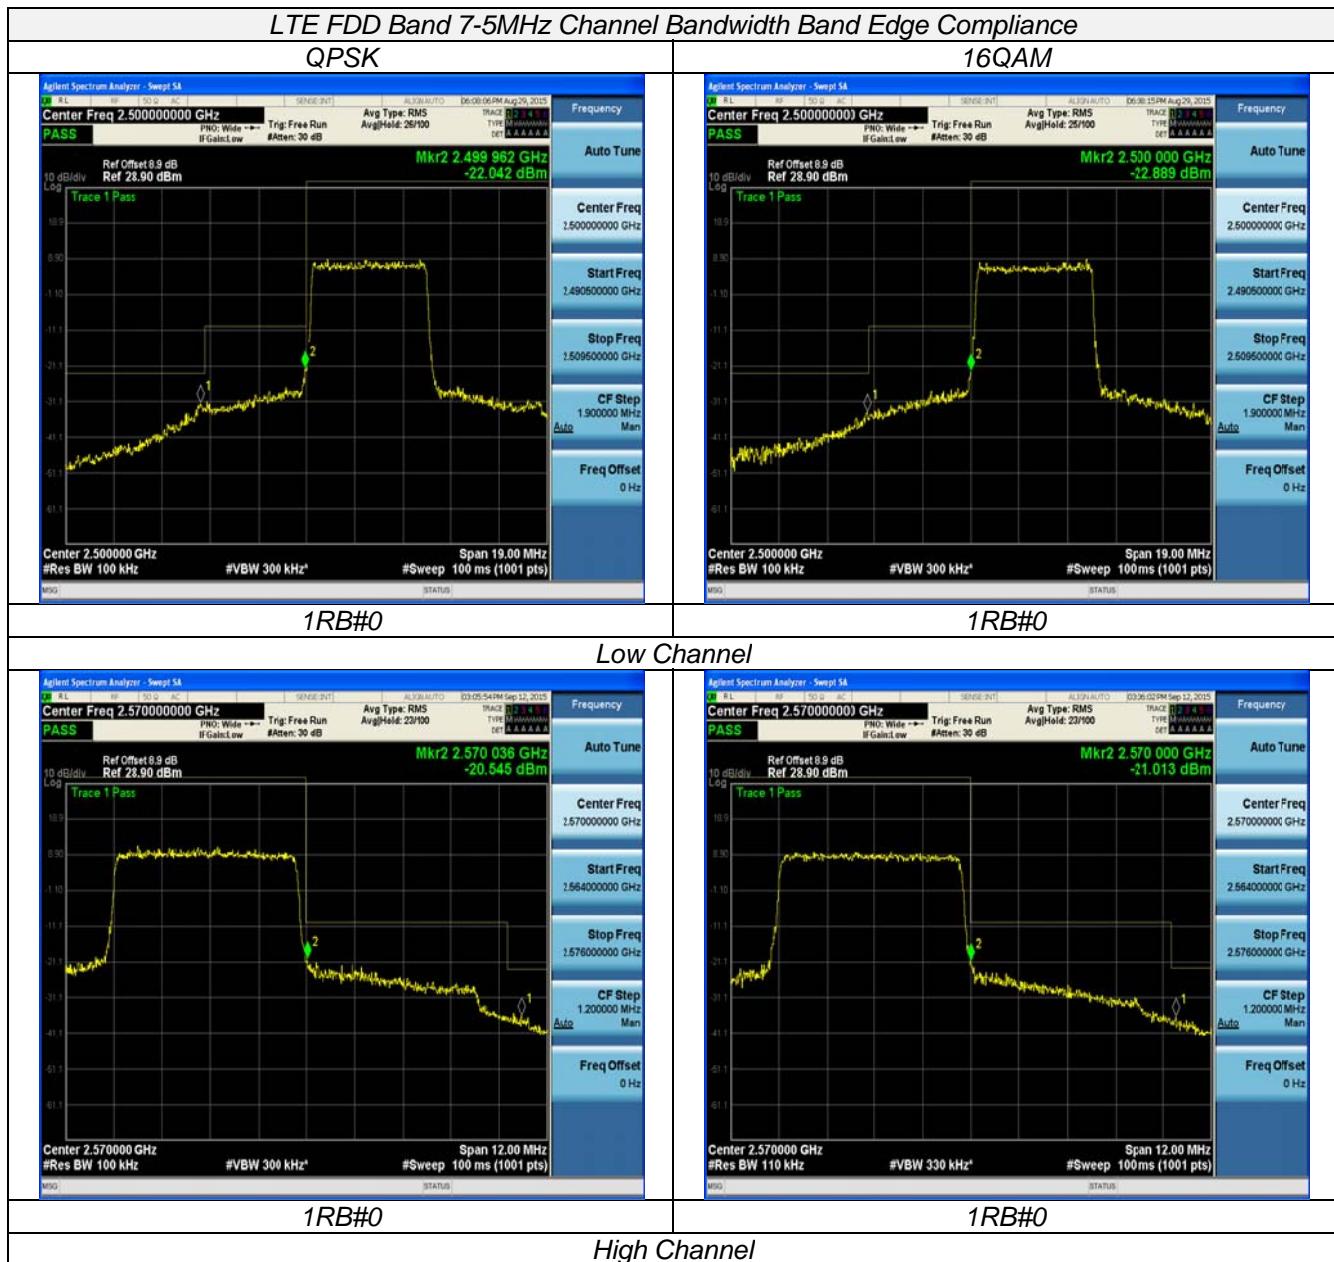

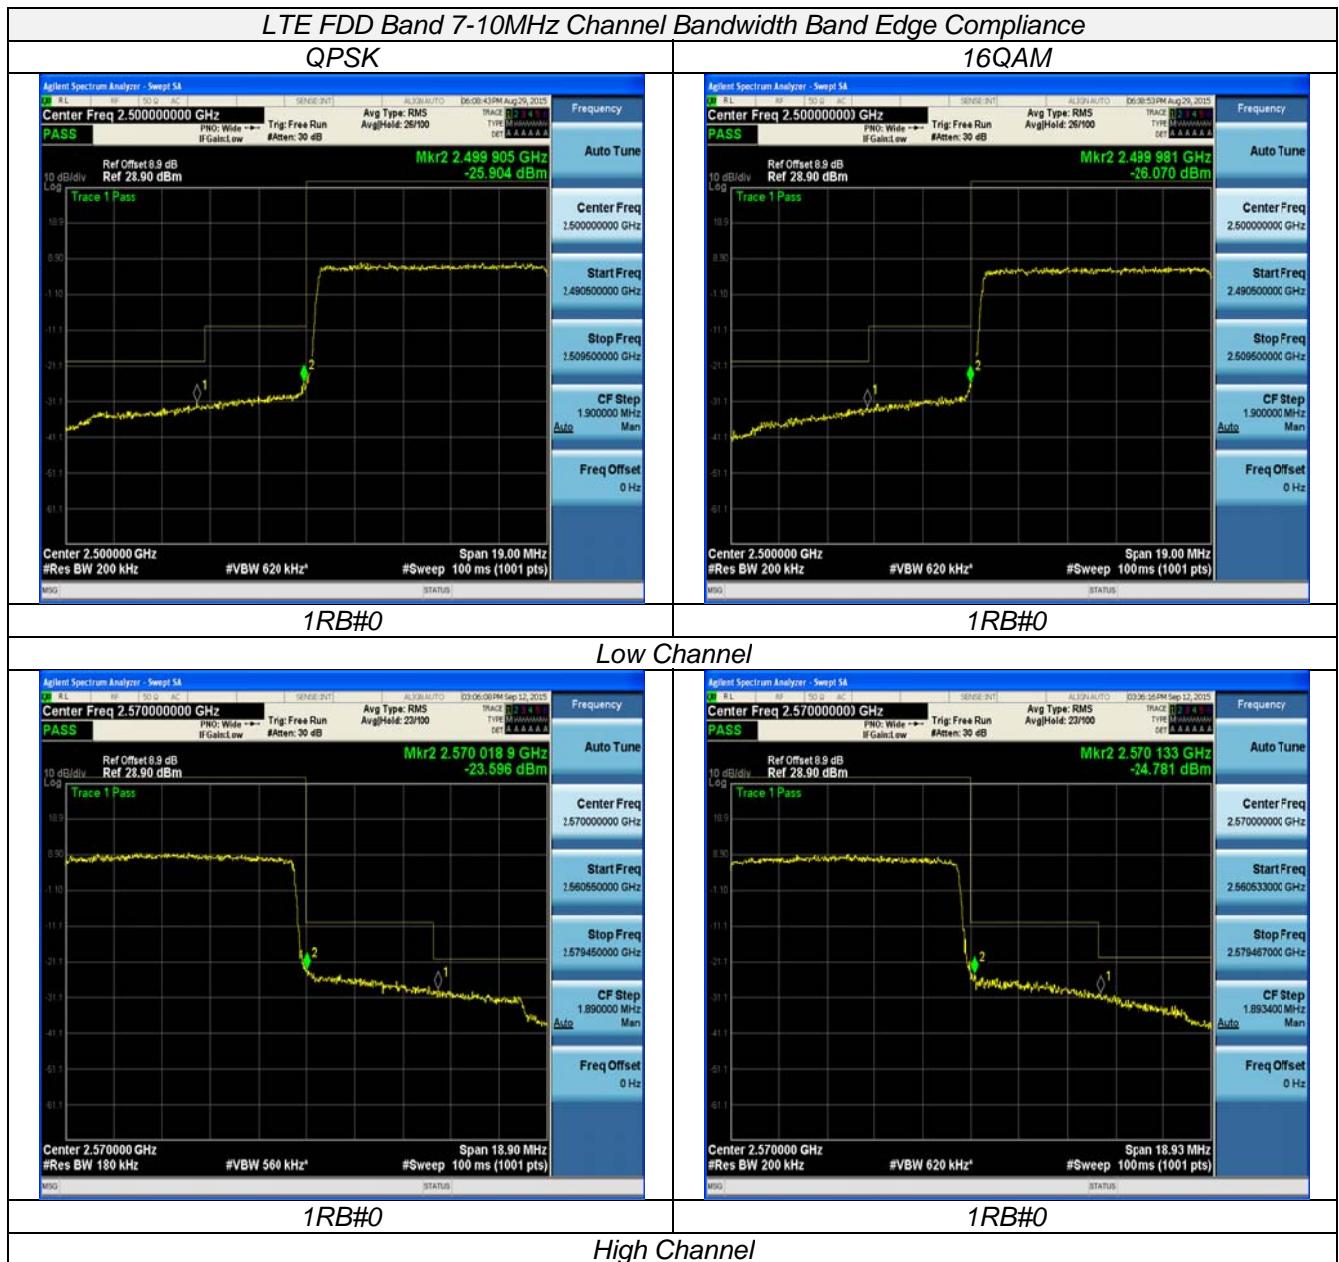

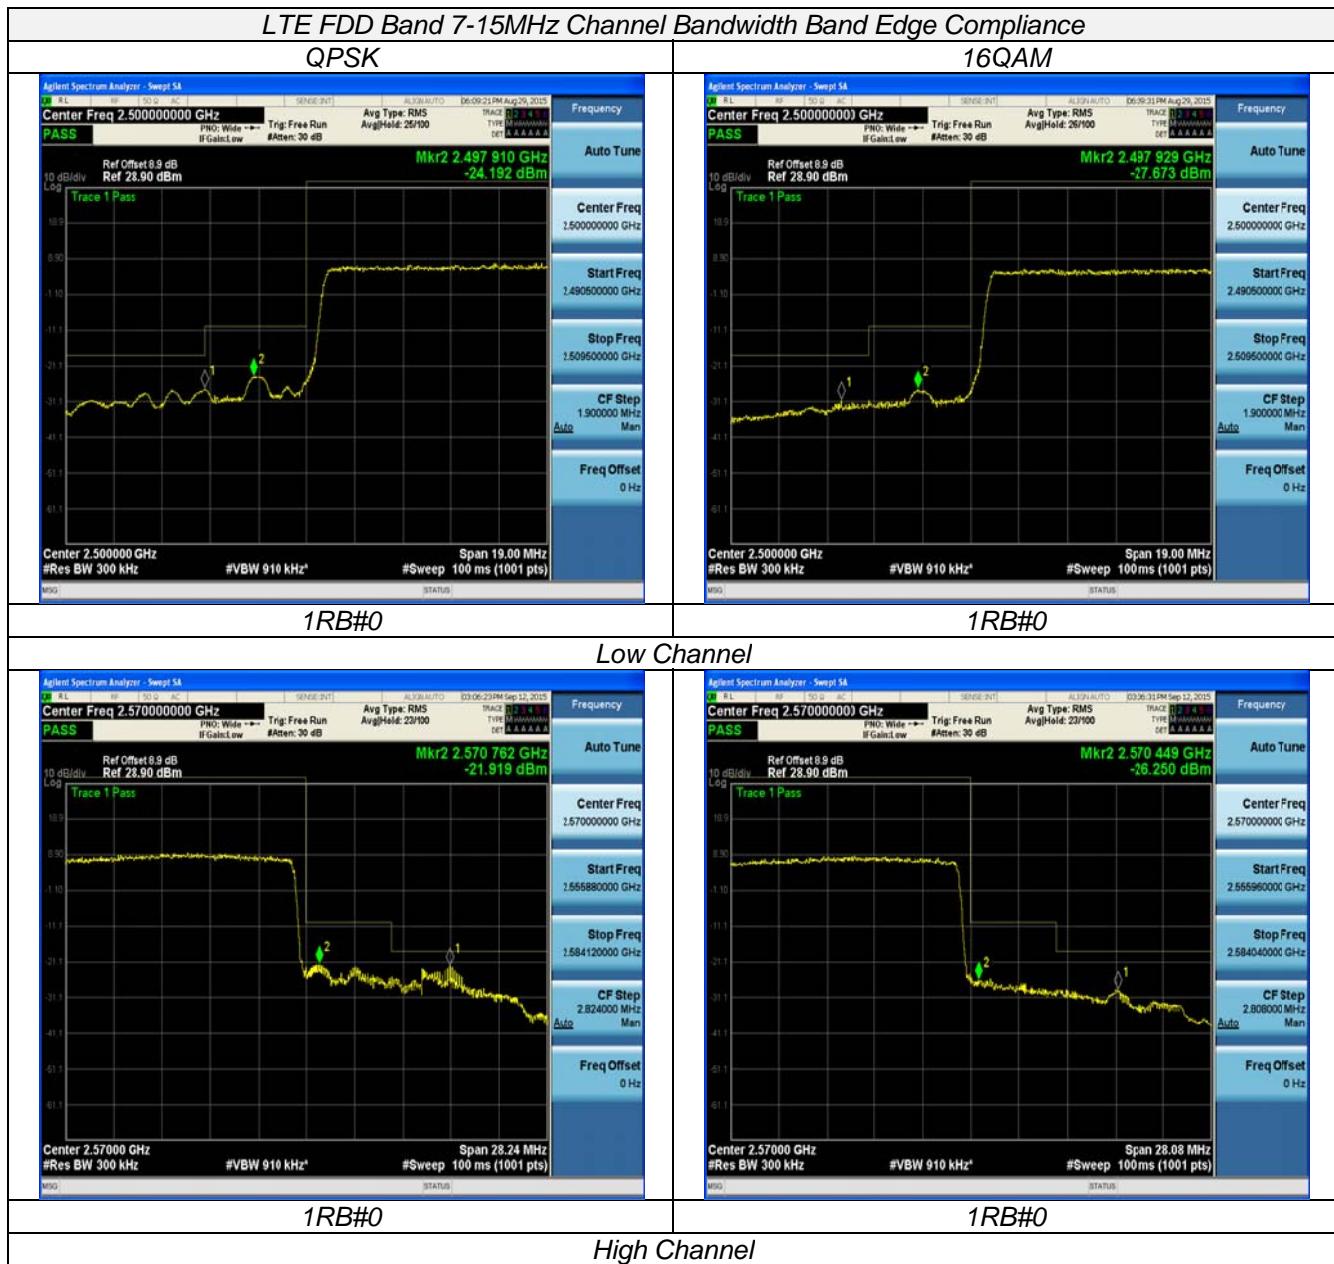

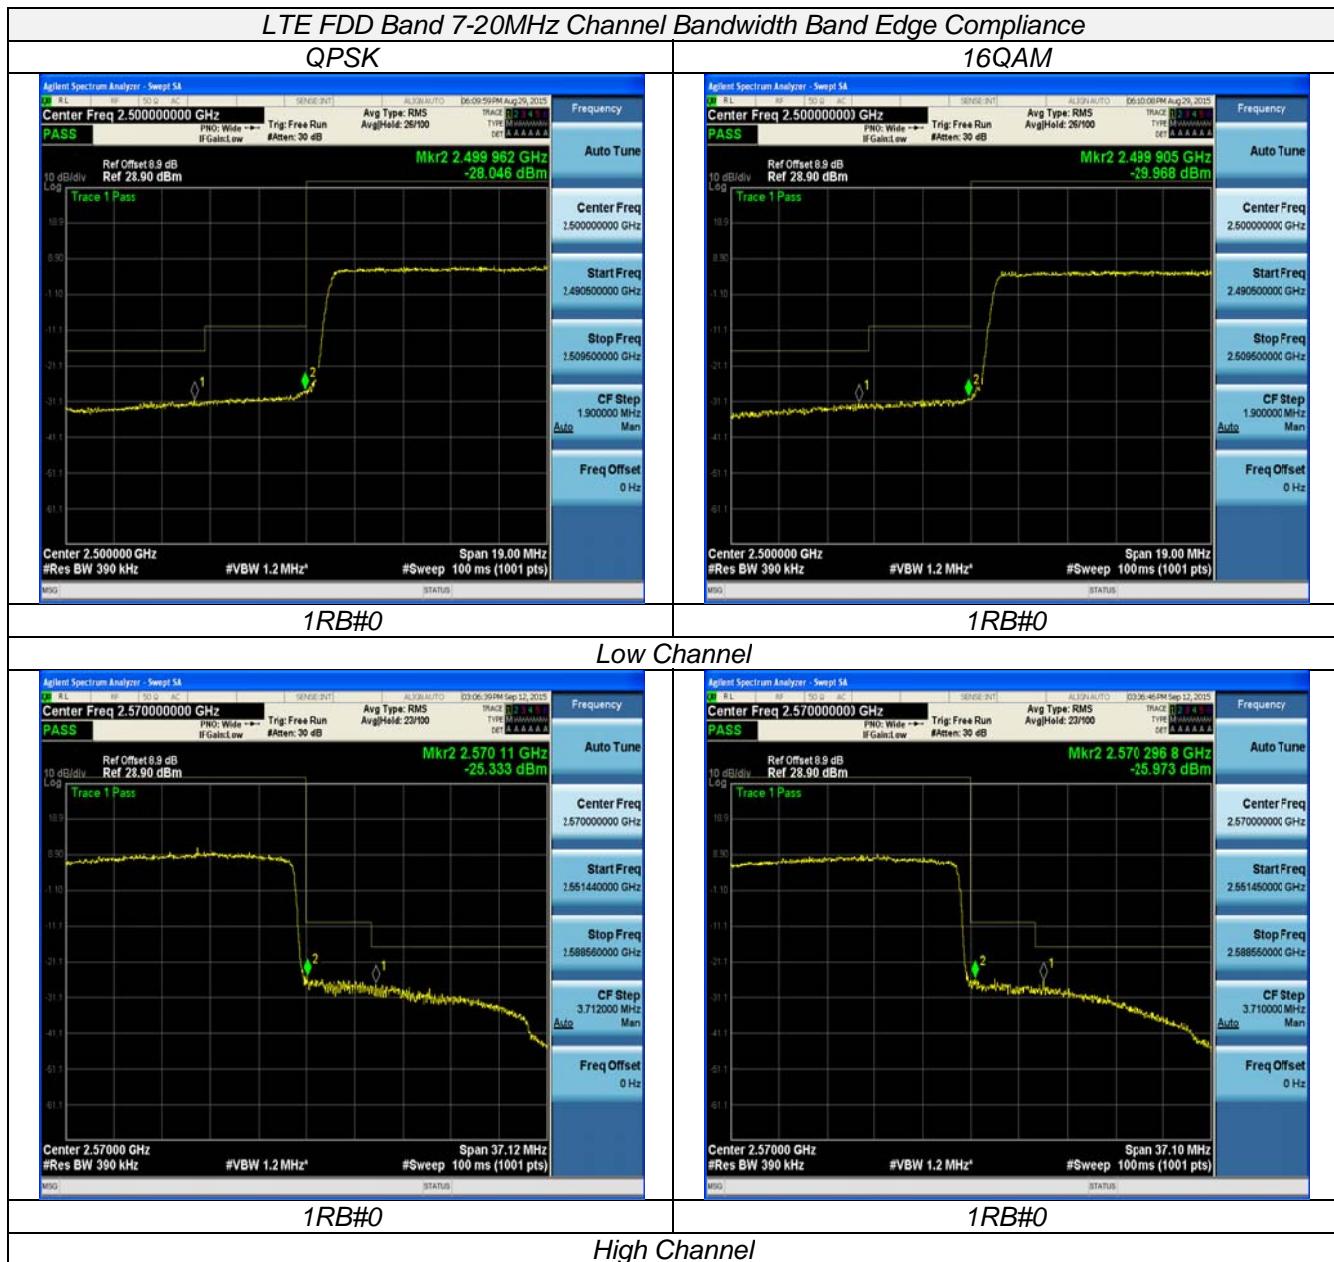


4.5. Spurious Emission on Antenna Port

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

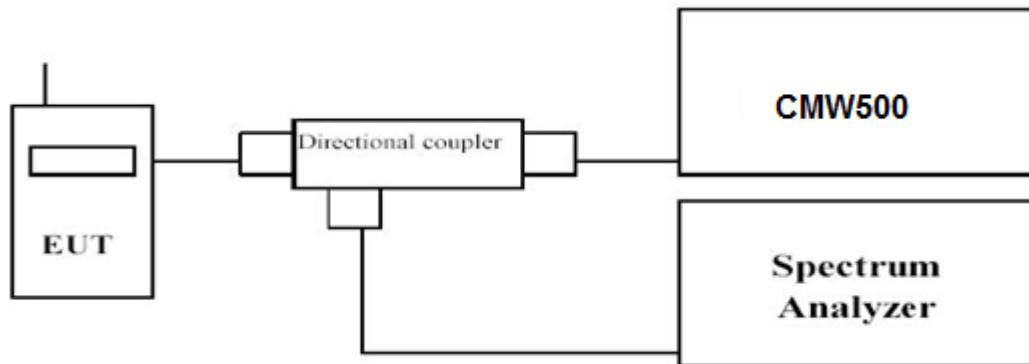

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D


- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- Please refer to following tables for test antenna conducted emissions.


Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto


TEST RESULTS



Remark:


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.

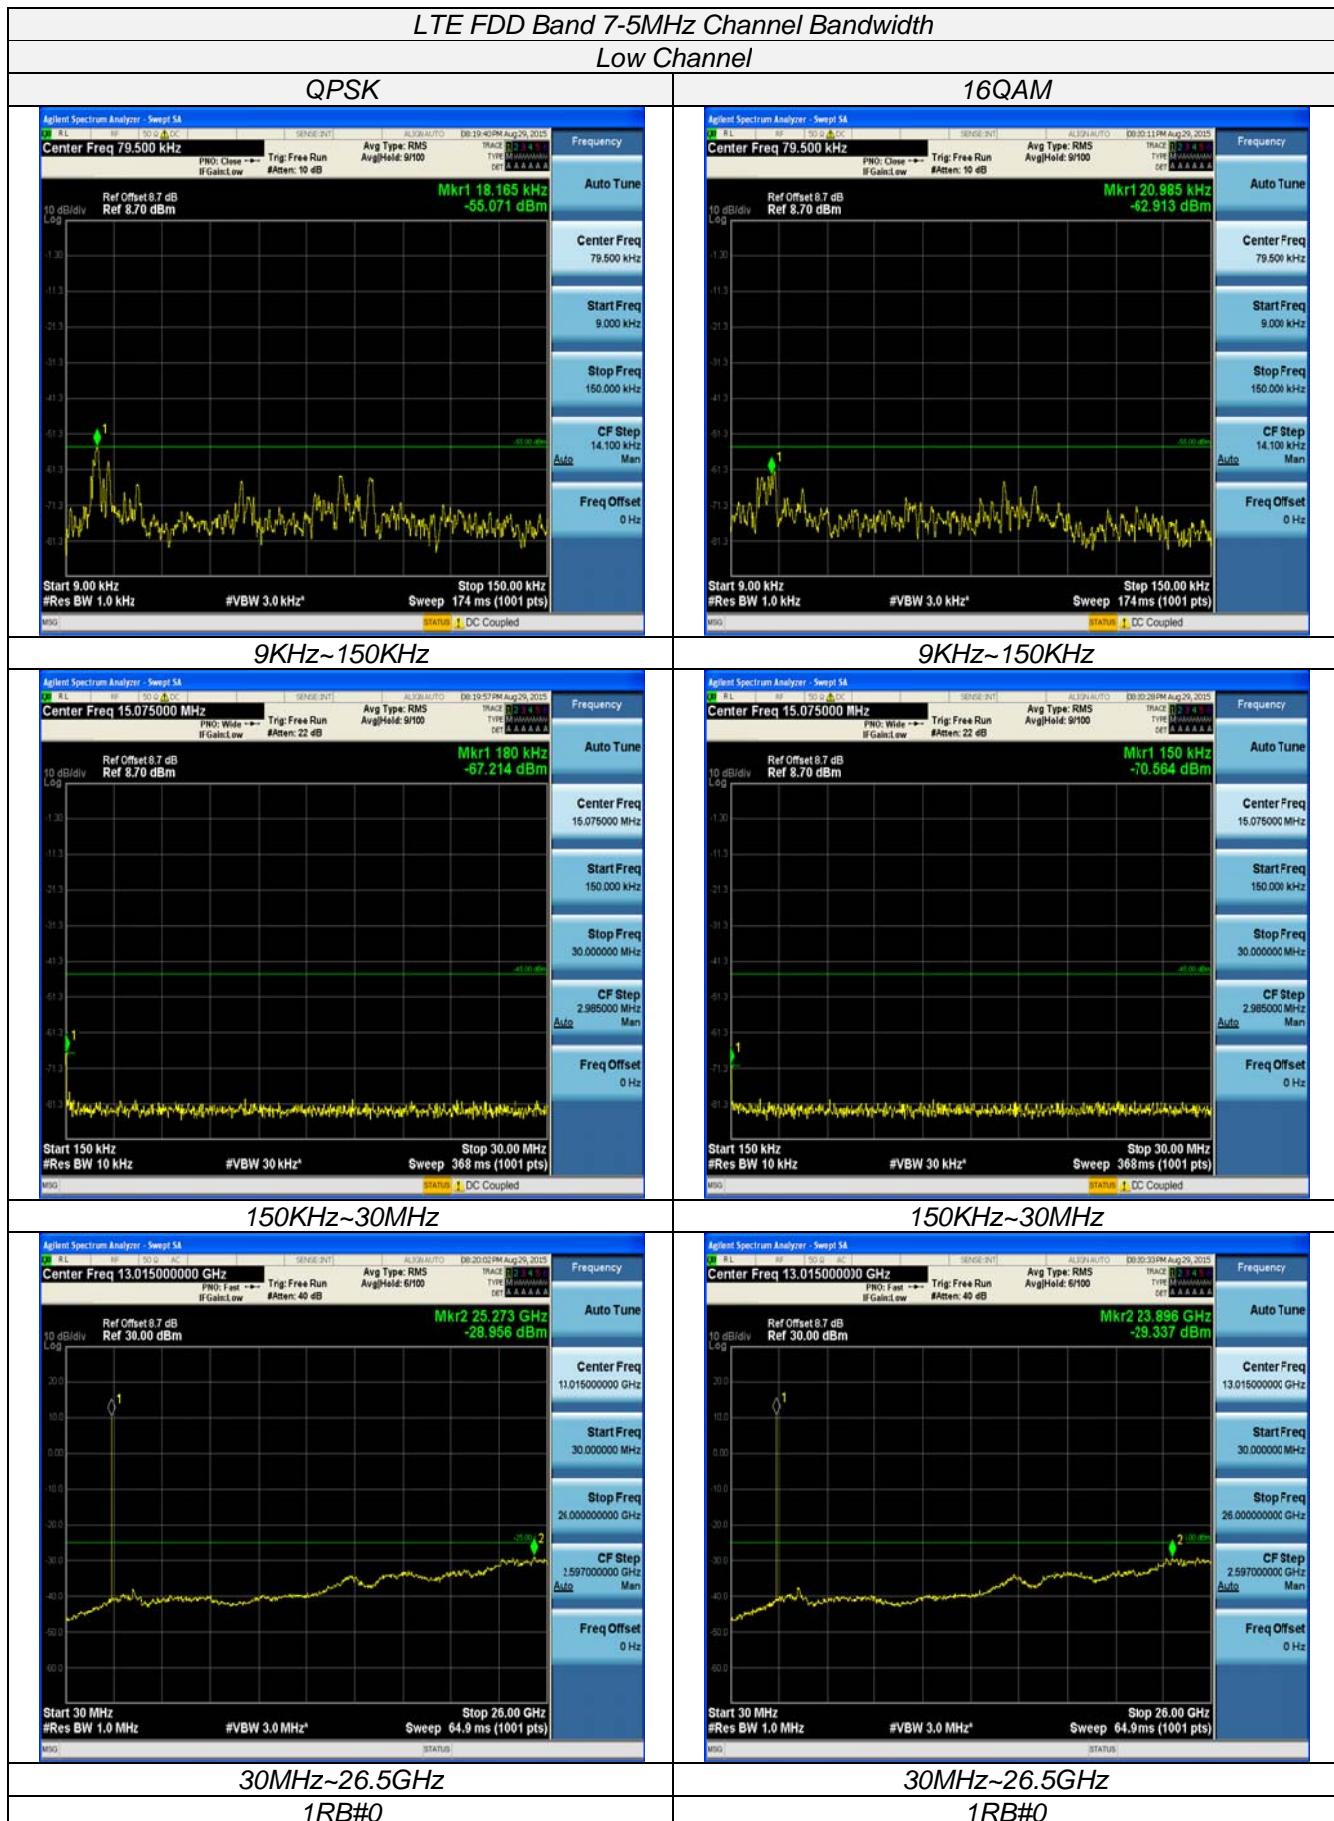


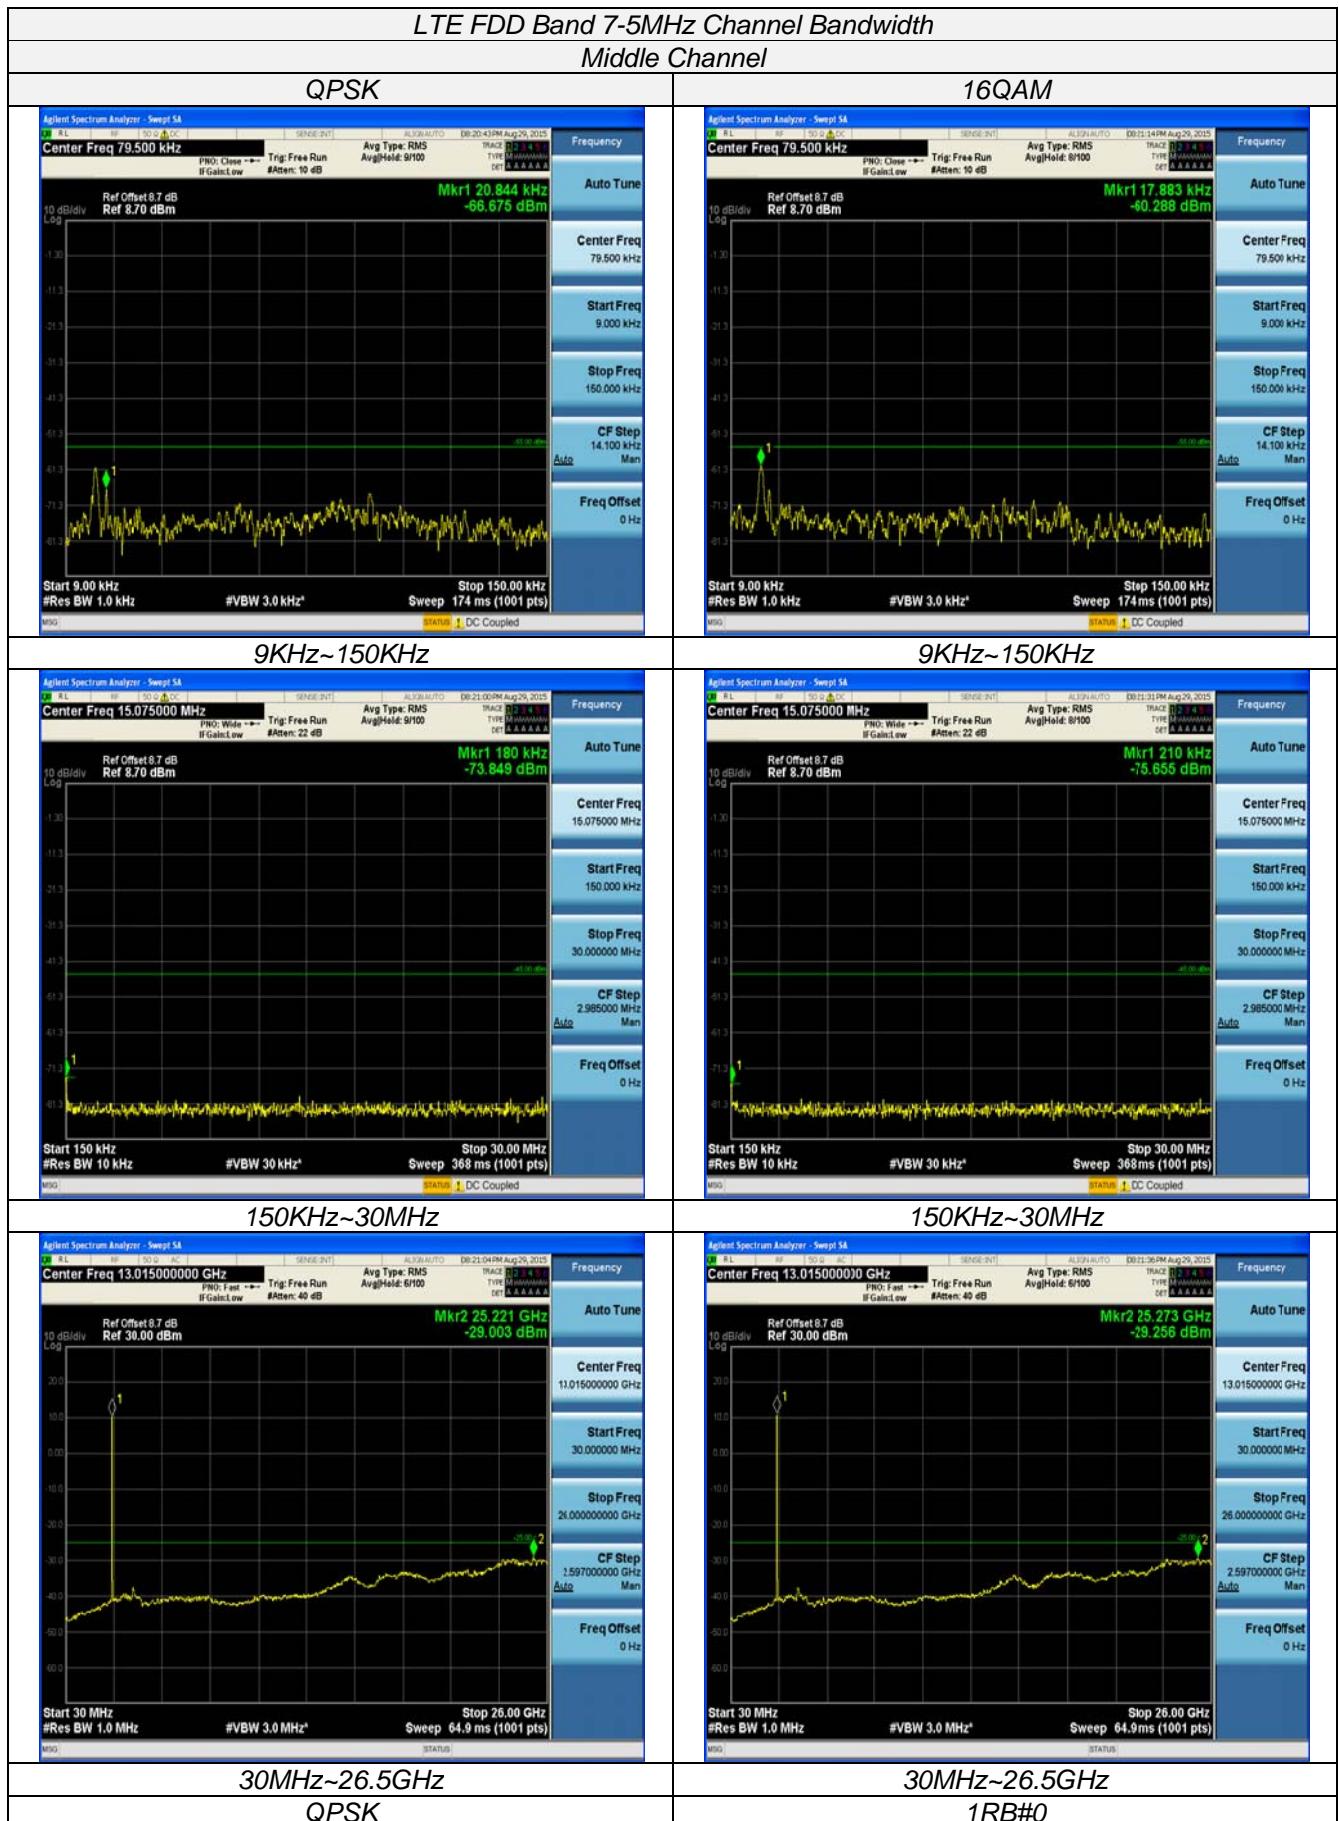


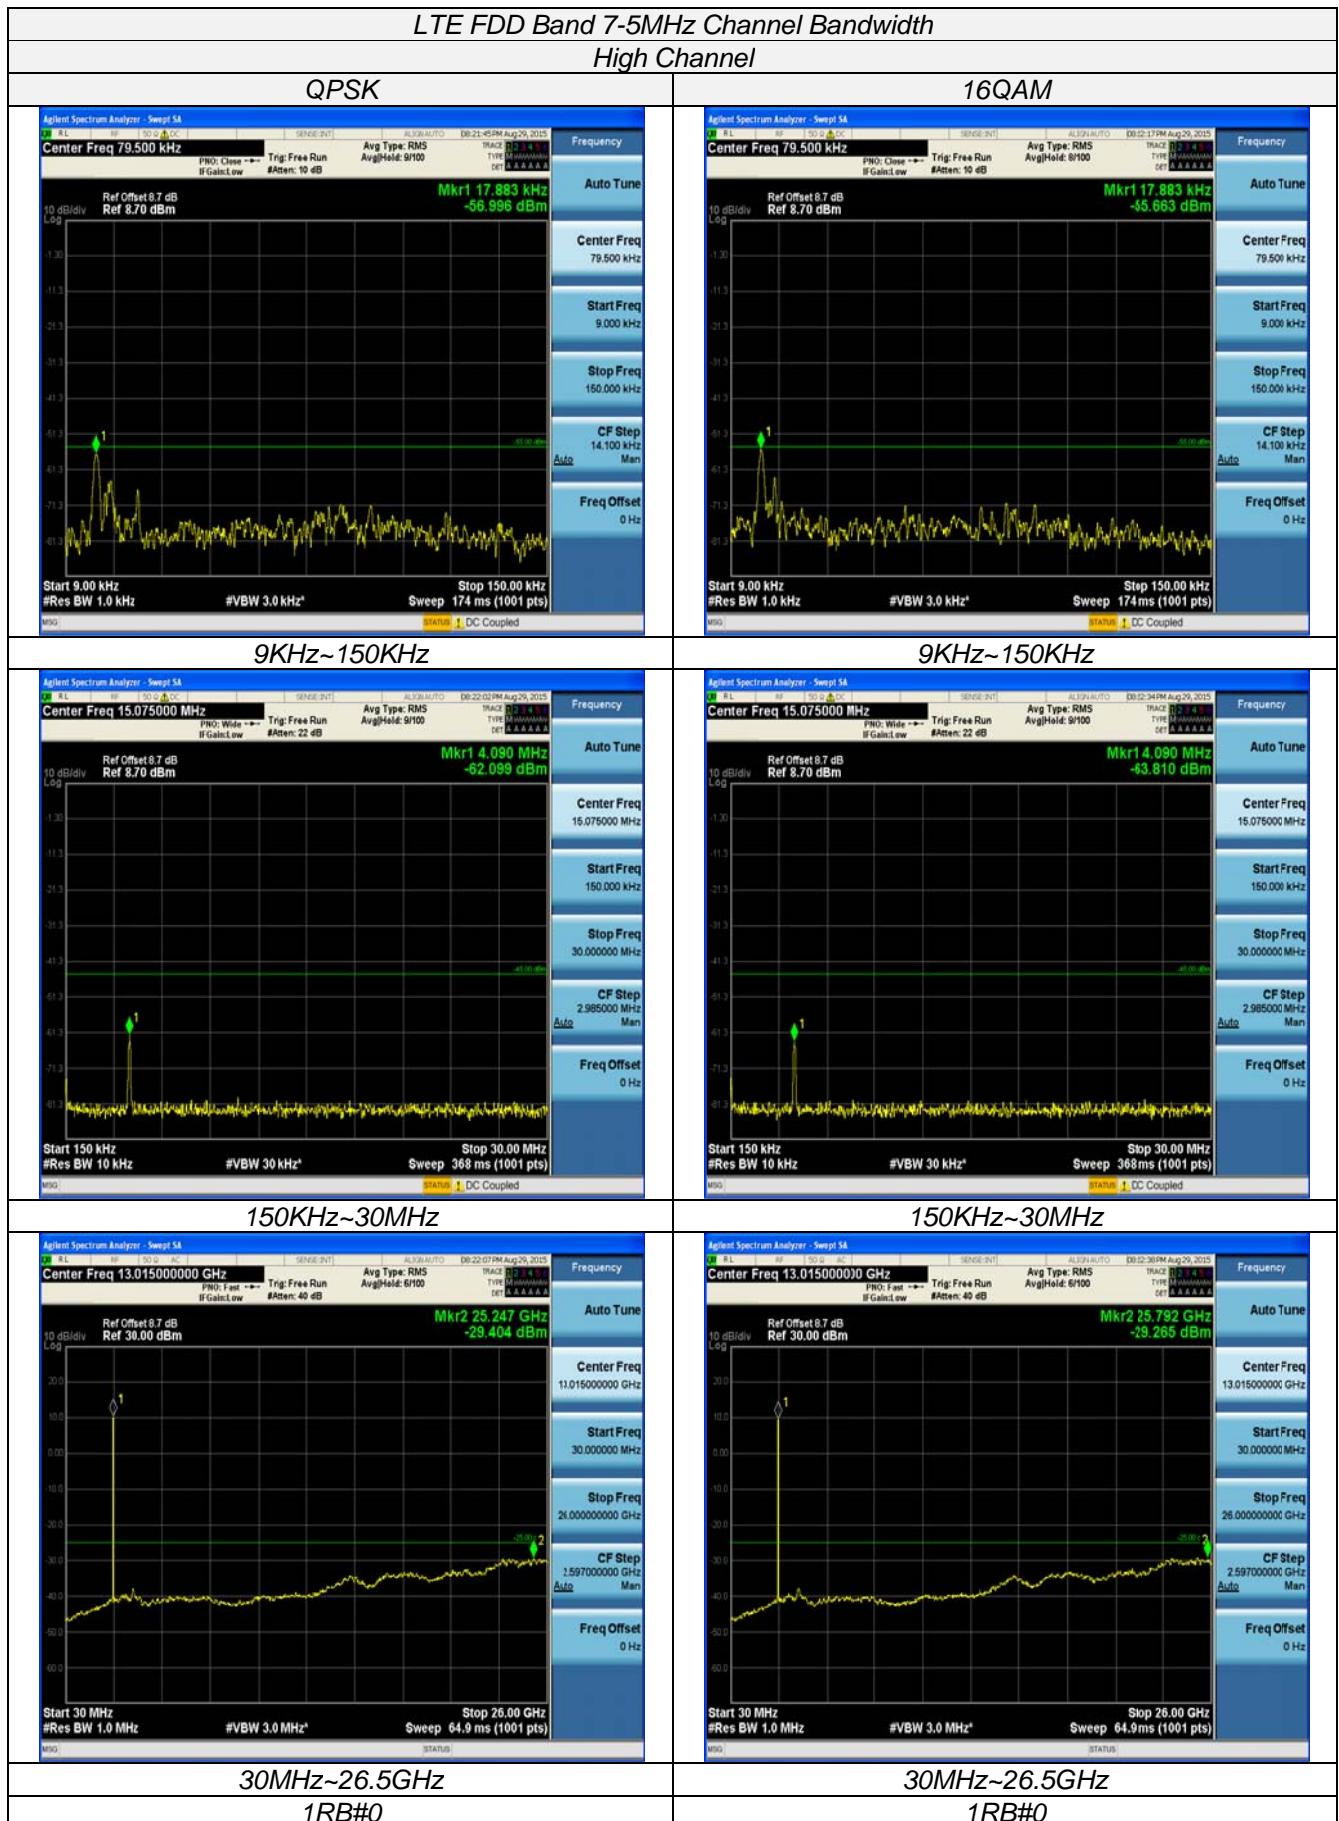


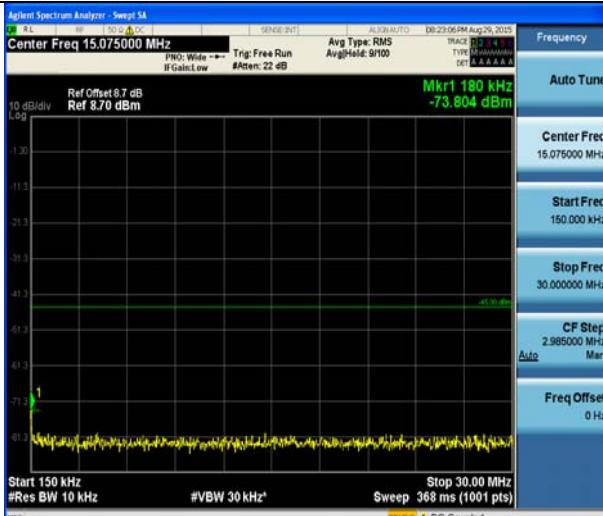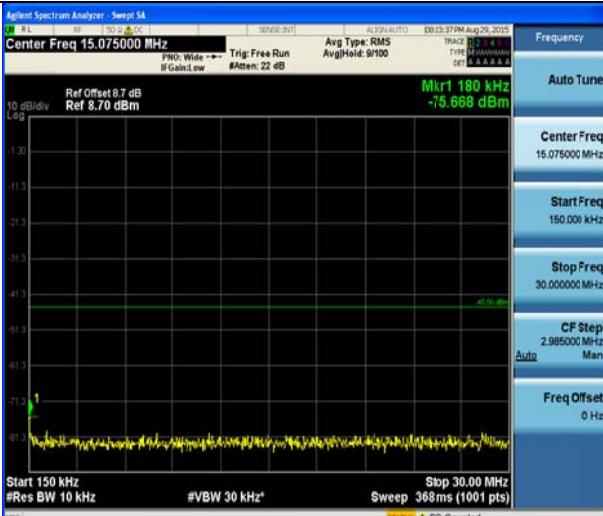
LTE FDD Band 7-10MHz Channel Bandwidth Low Channel	
QPSK	16QAM
 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 79.500 kHz PNO: Close --> Trig: Free Run IFGain:Low #Atten: 10 dB Mkr1 18.165 kHz -56.310 dBm Ref Offset 8.7 dB Ref 8.70 dBm Start 9.00 kHz #Res BW 1.0 kHz #VBW 3.0 kHz* Sweep 174 ms (1001 pts) M90 STATUS: 1 DC Coupled</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 79.500 kHz PNO: Close --> Trig: Free Run IFGain:Low #Atten: 10 dB Mkr1 17.883 kHz -57.048 dBm Ref Offset 8.7 dB Ref 8.70 dBm Start 9.00 kHz #Res BW 1.0 kHz #VBW 3.0 kHz* Sweep 174 ms (1001 pts) M90 STATUS: 1 DC Coupled</p>
9KHz~150KHz	9KHz~150KHz
 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 15.075000 MHz PNO: Wide --> Trig: Free Run IFGain:Low #Atten: 22 dB Mkr1 180 kHz -73.804 dBm Ref Offset 8.7 dB Ref 8.70 dBm Start 150 kHz #Res BW 10 kHz #VBW 30 kHz* Sweep 368 ms (1001 pts) M90 STATUS: 1 DC Coupled</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 15.075000 MHz PNO: Wide --> Trig: Free Run IFGain:Low #Atten: 22 dB Mkr1 180 kHz -75.668 dBm Ref Offset 8.7 dB Ref 8.70 dBm Start 150 kHz #Res BW 10 kHz #VBW 30 kHz* Sweep 368 ms (1001 pts) M90 STATUS: 1 DC Coupled</p>
150KHz~30MHz	150KHz~30MHz
 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.015000000 GHz PNO: Fast --> Trig: Free Run IFGain:Low #Atten: 40 dB Mkr2 25.273 GHz -29.159 dBm Ref Offset 8.7 dB Ref 30.00 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 64.9 ms (1001 pts) M90 STATUS:</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.015000000 GHz PNO: Fast --> Trig: Free Run IFGain:Low #Atten: 40 dB Mkr2 25.247 GHz -29.094 dBm Ref Offset 8.7 dB Ref 30.00 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 64.9 ms (1001 pts) M90 STATUS:</p>
30MHz~26.5GHz	30MHz~26.5GHz
1RB#0	1RB#0

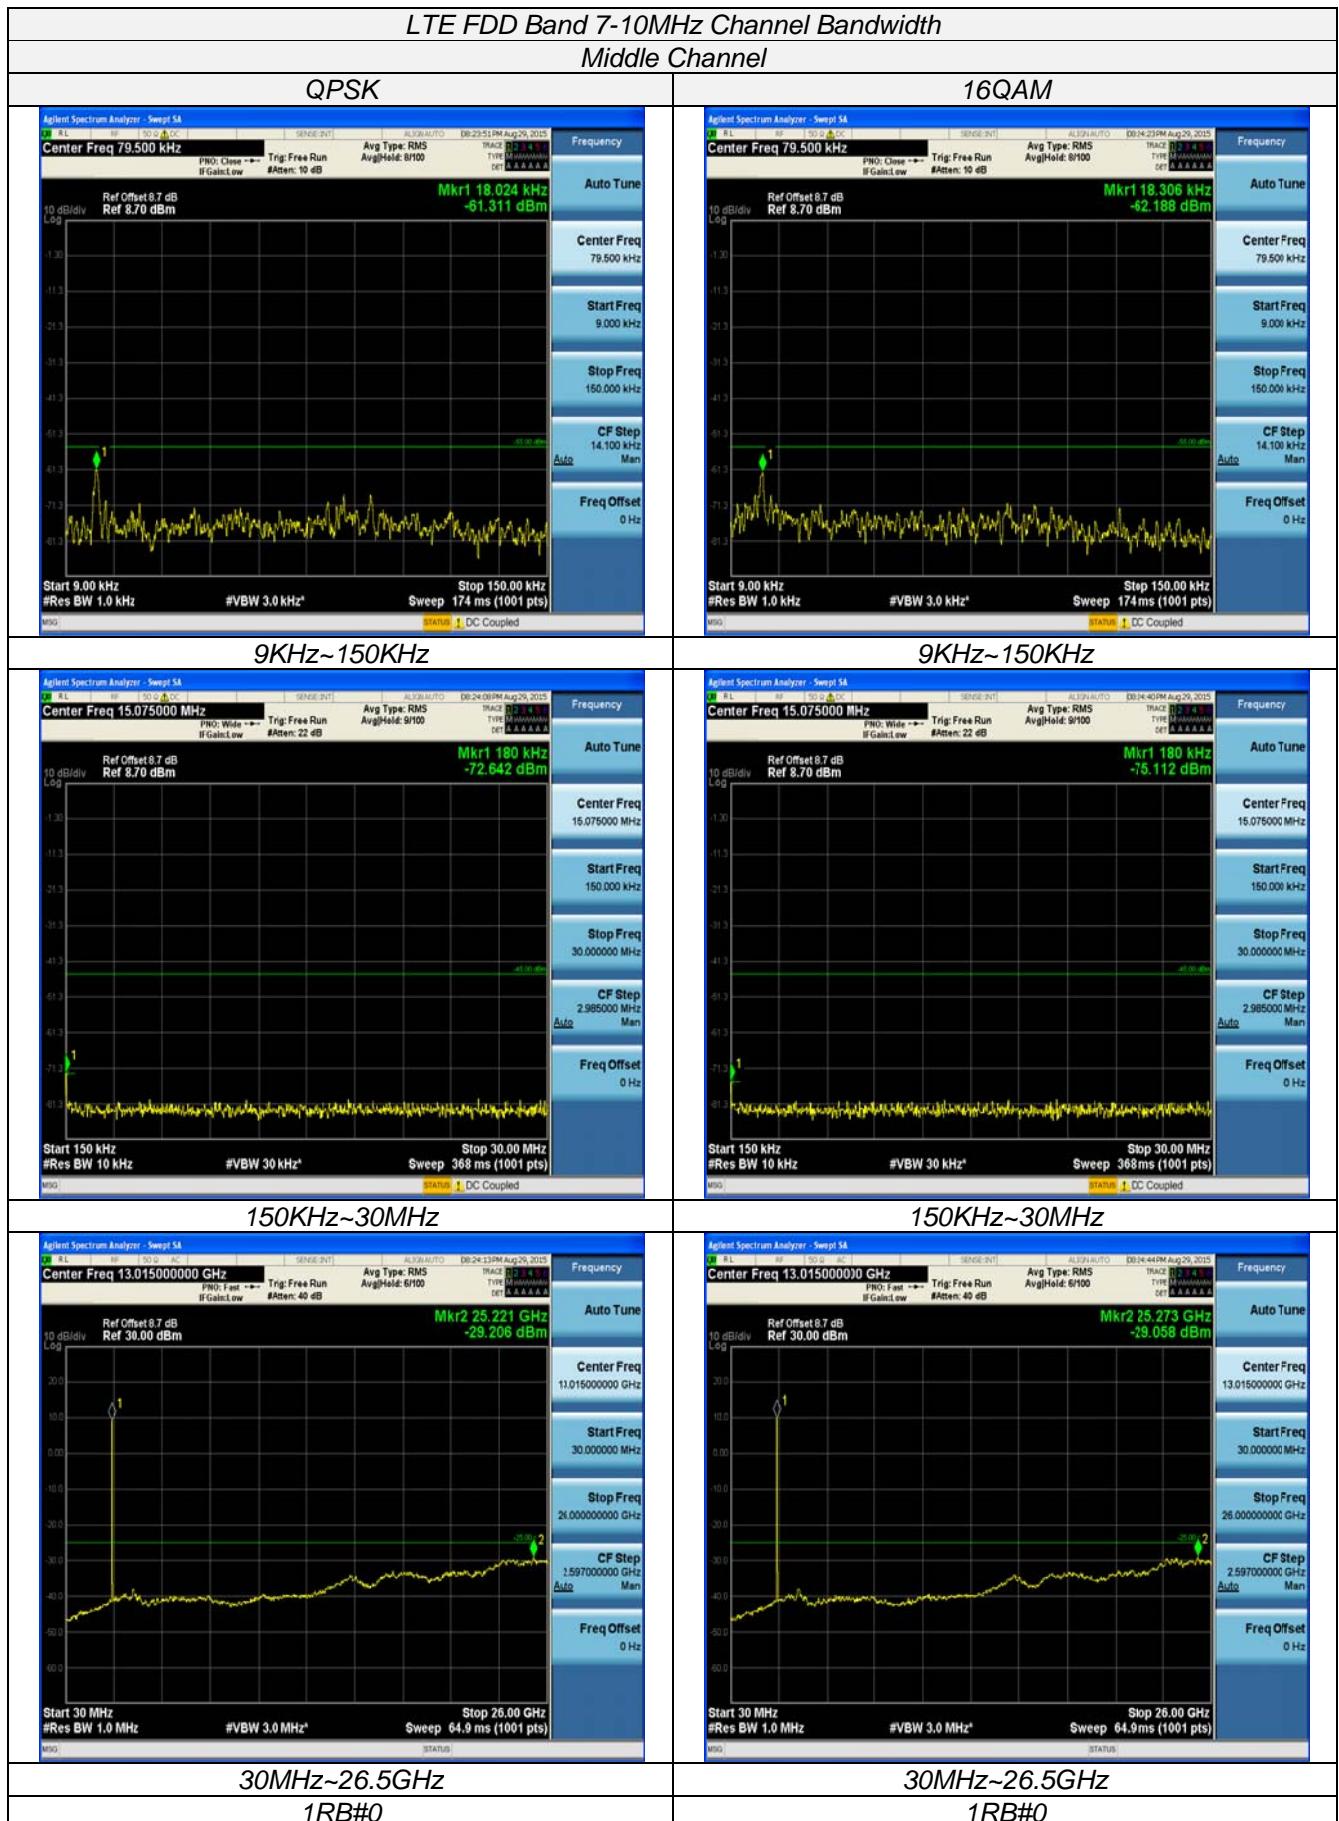


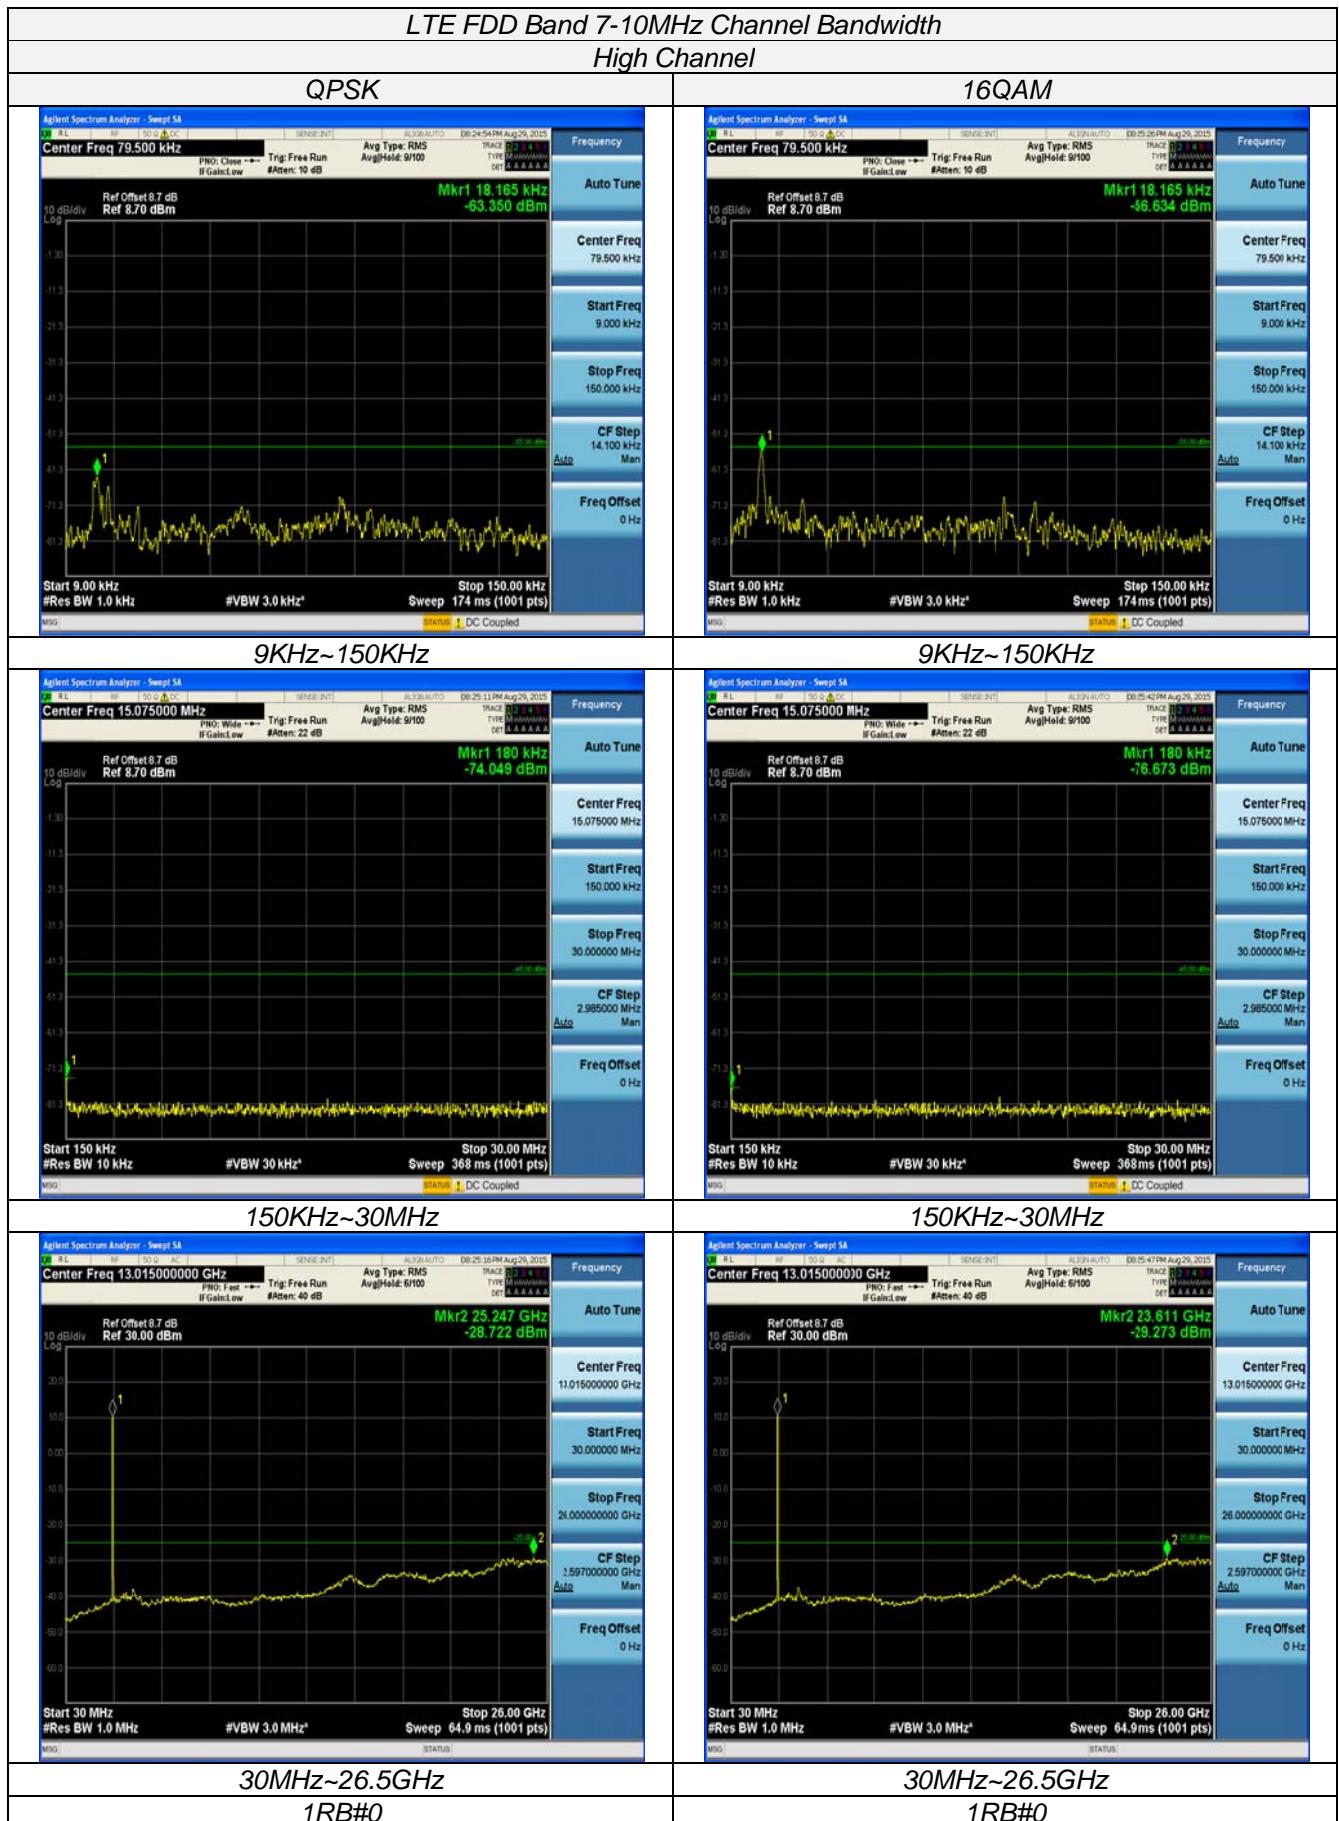


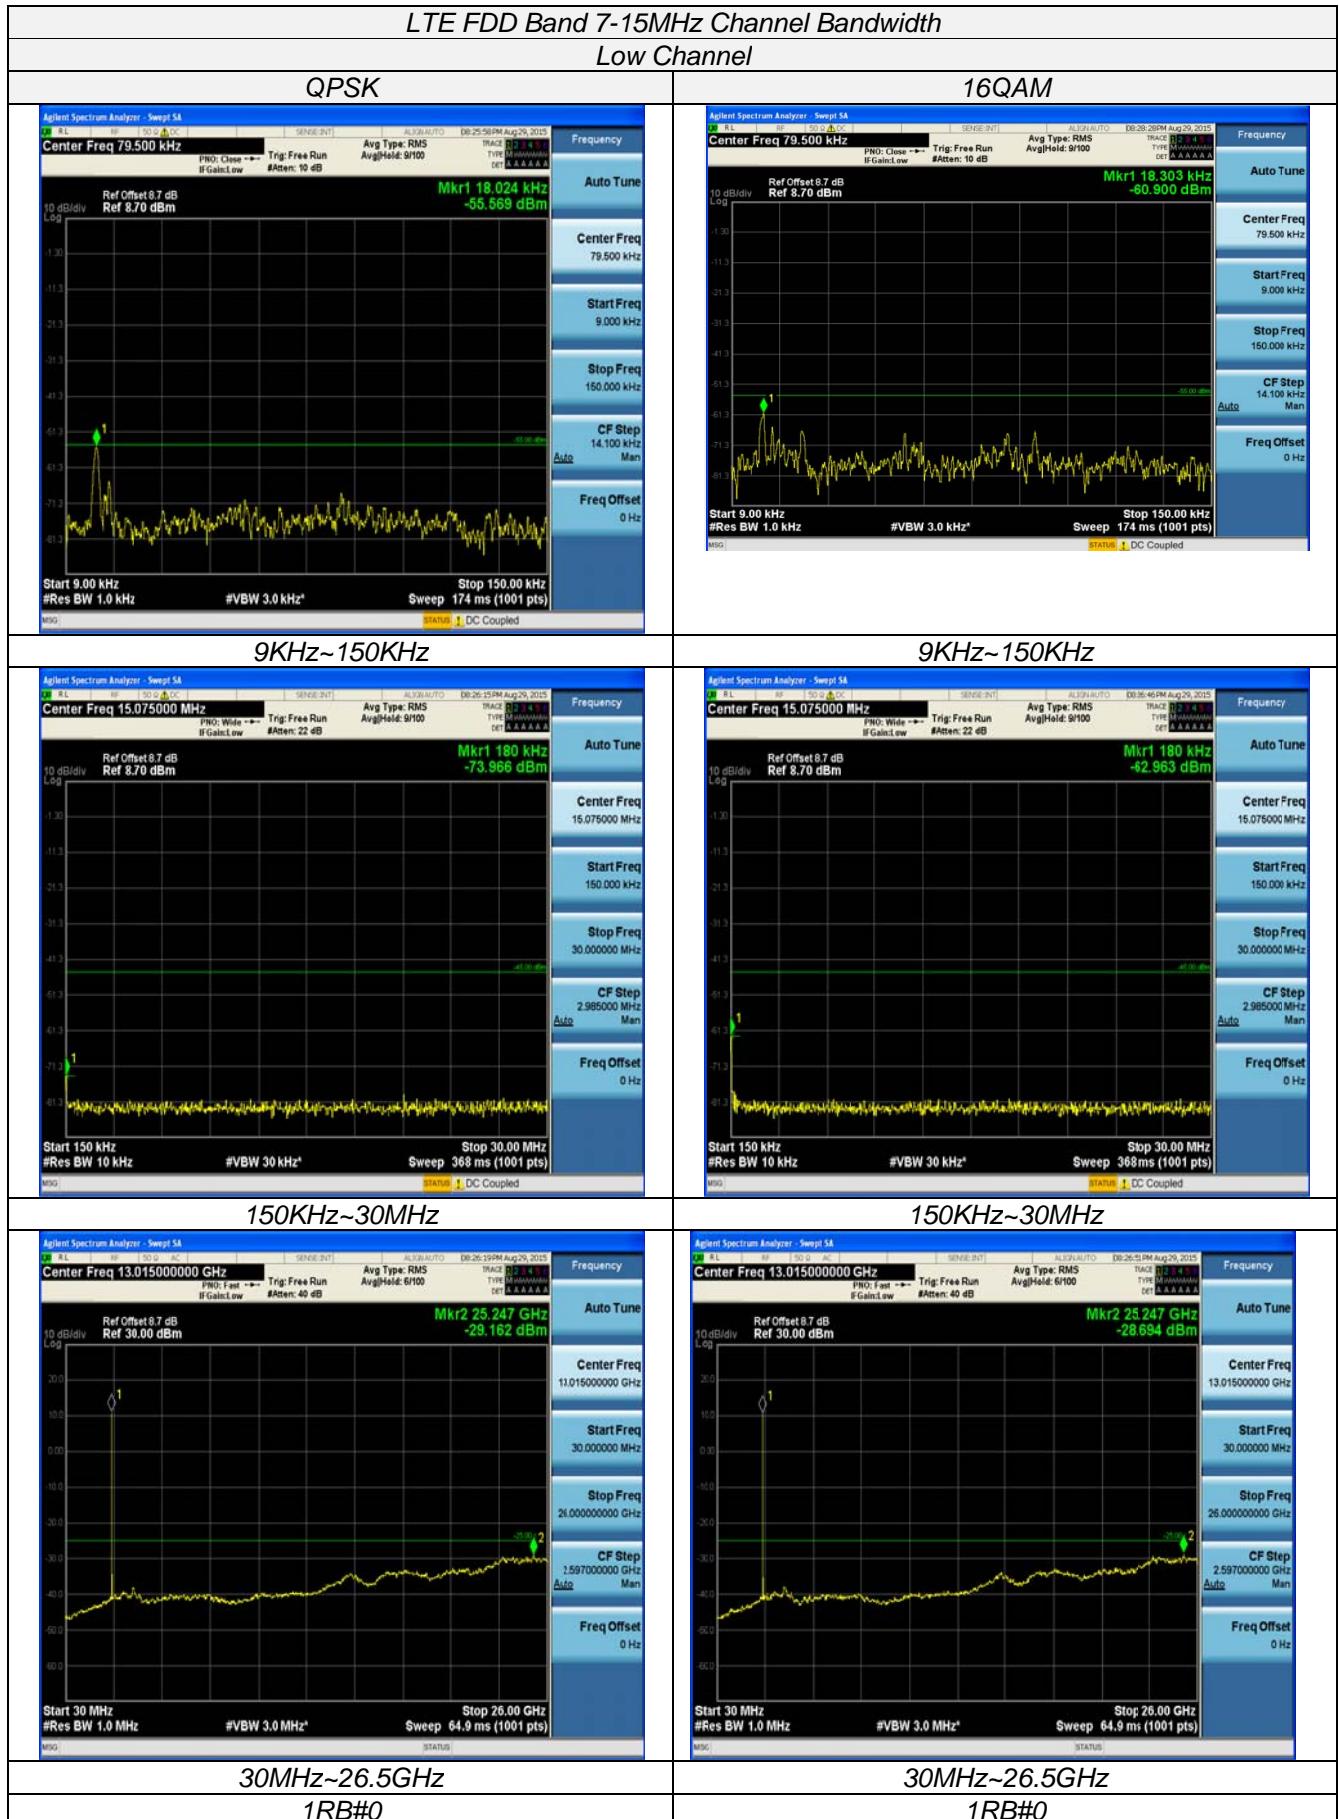


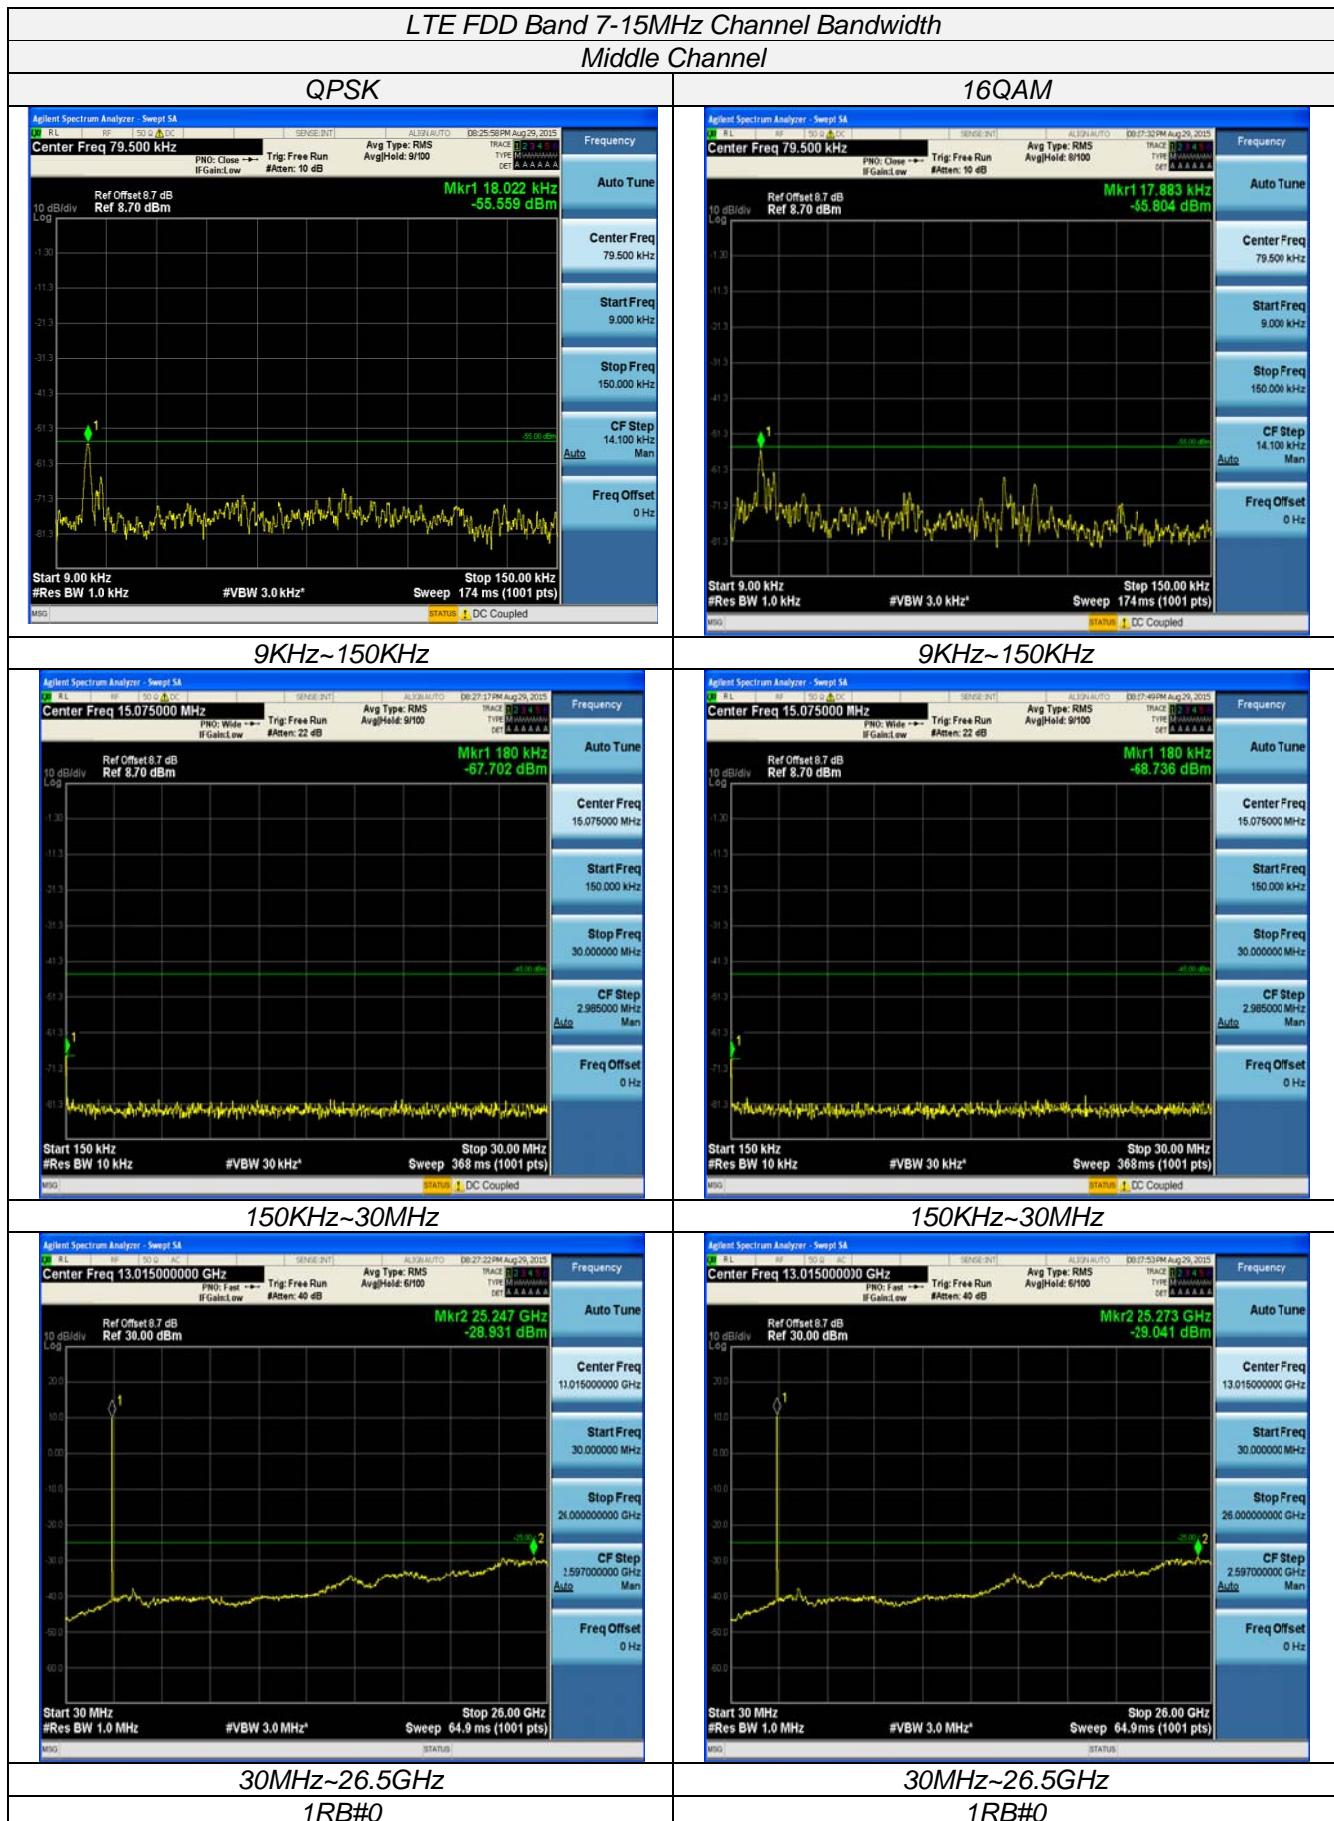

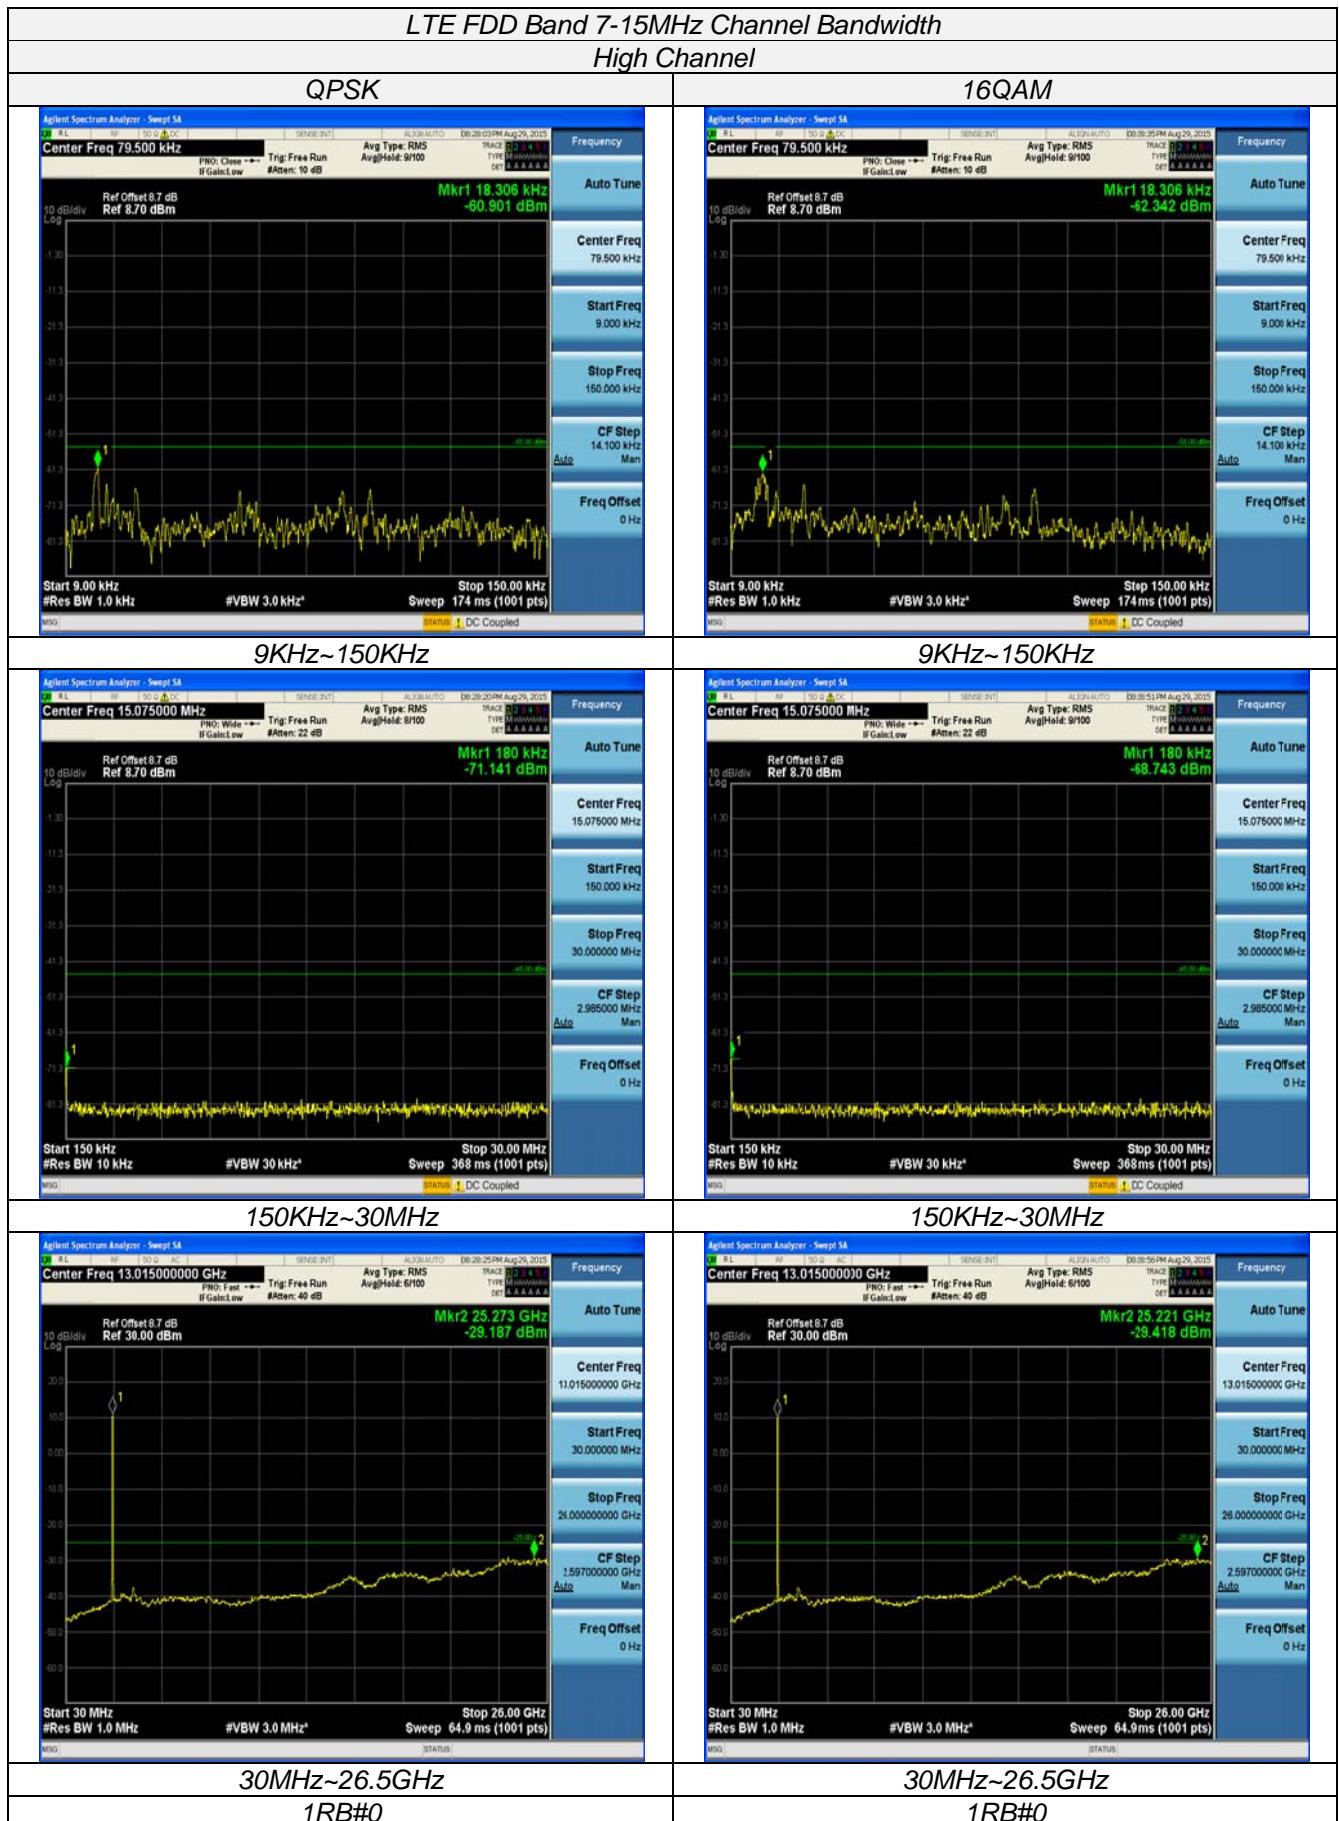

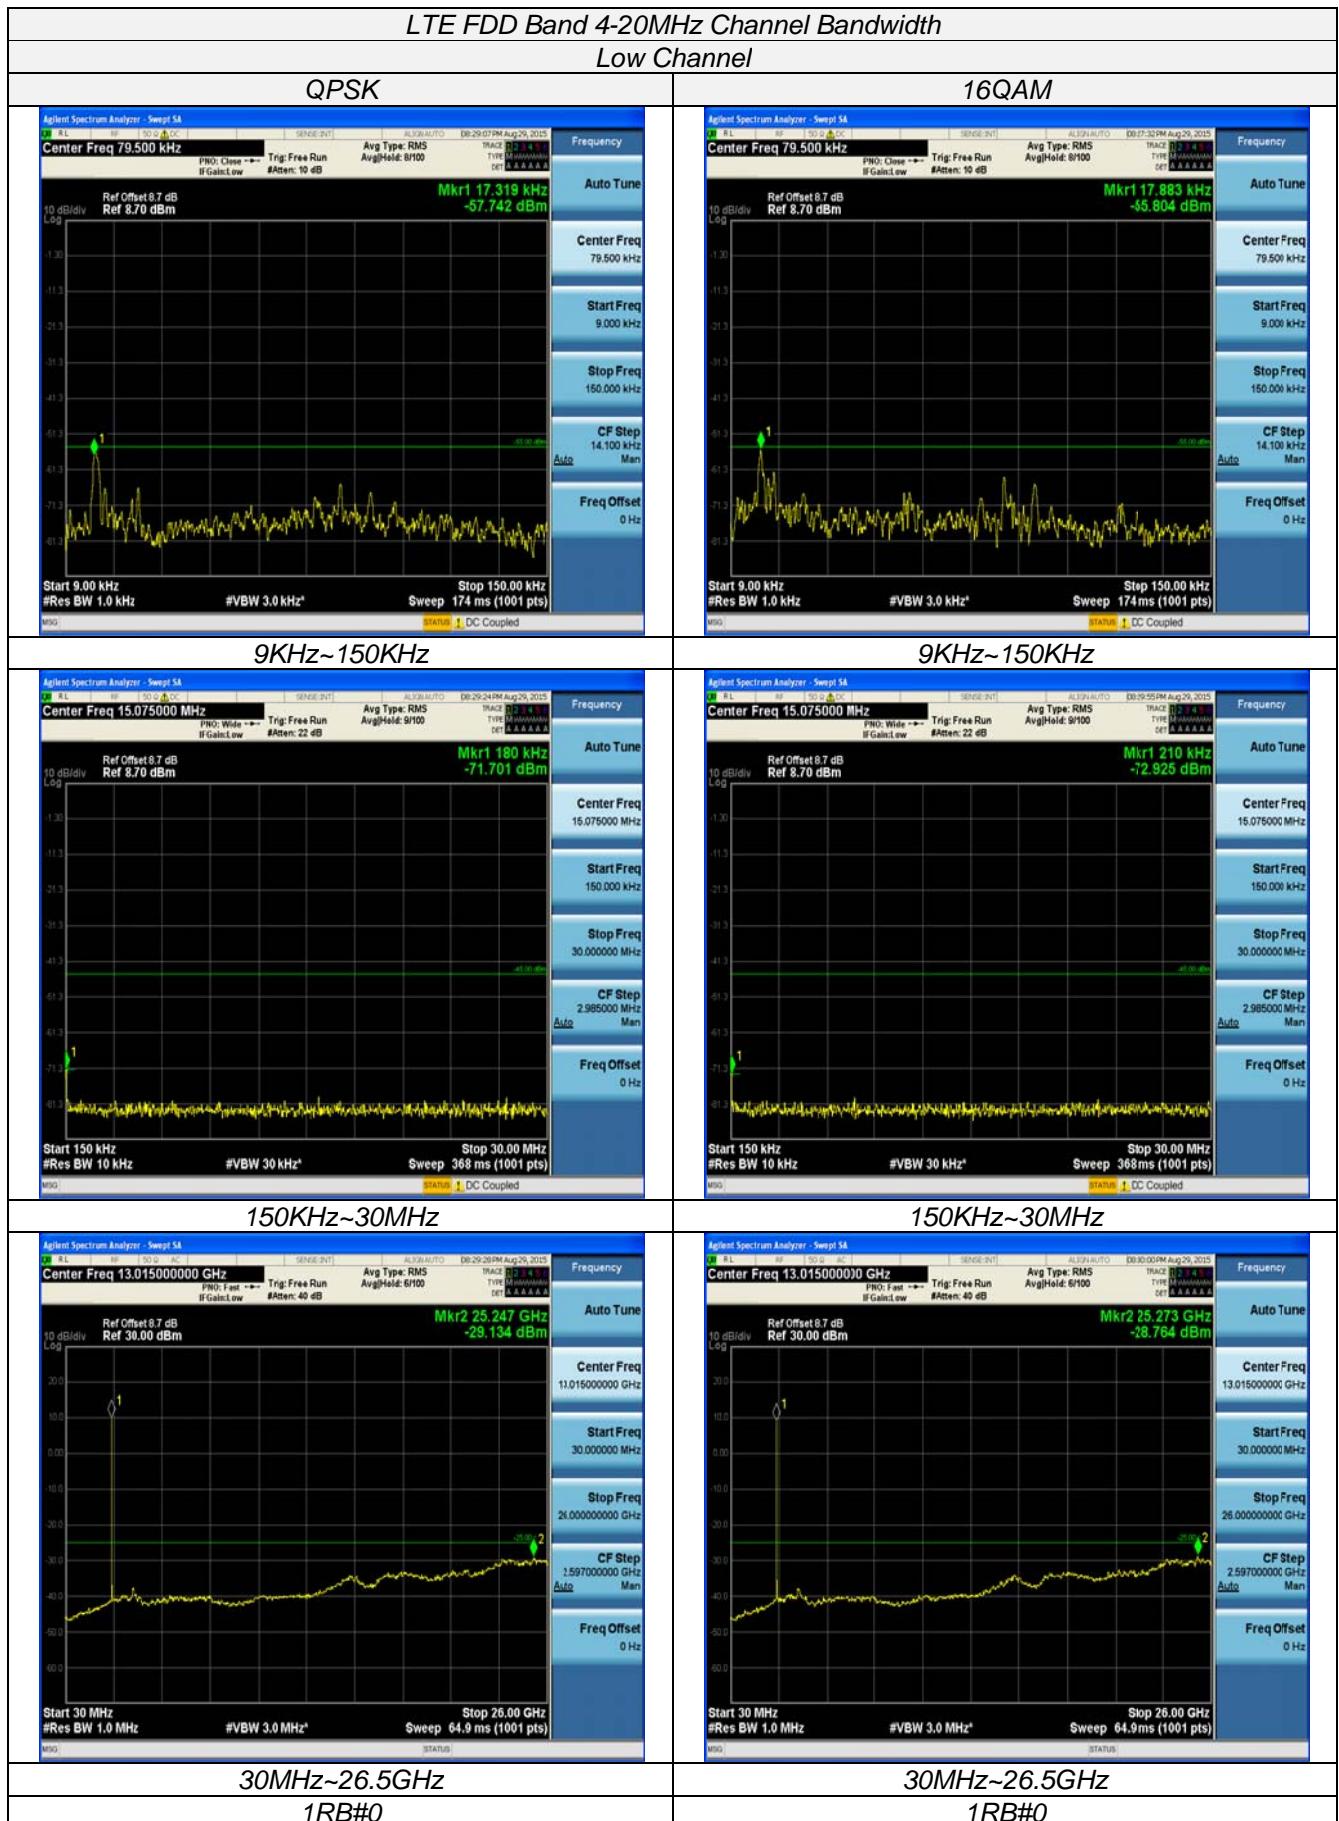

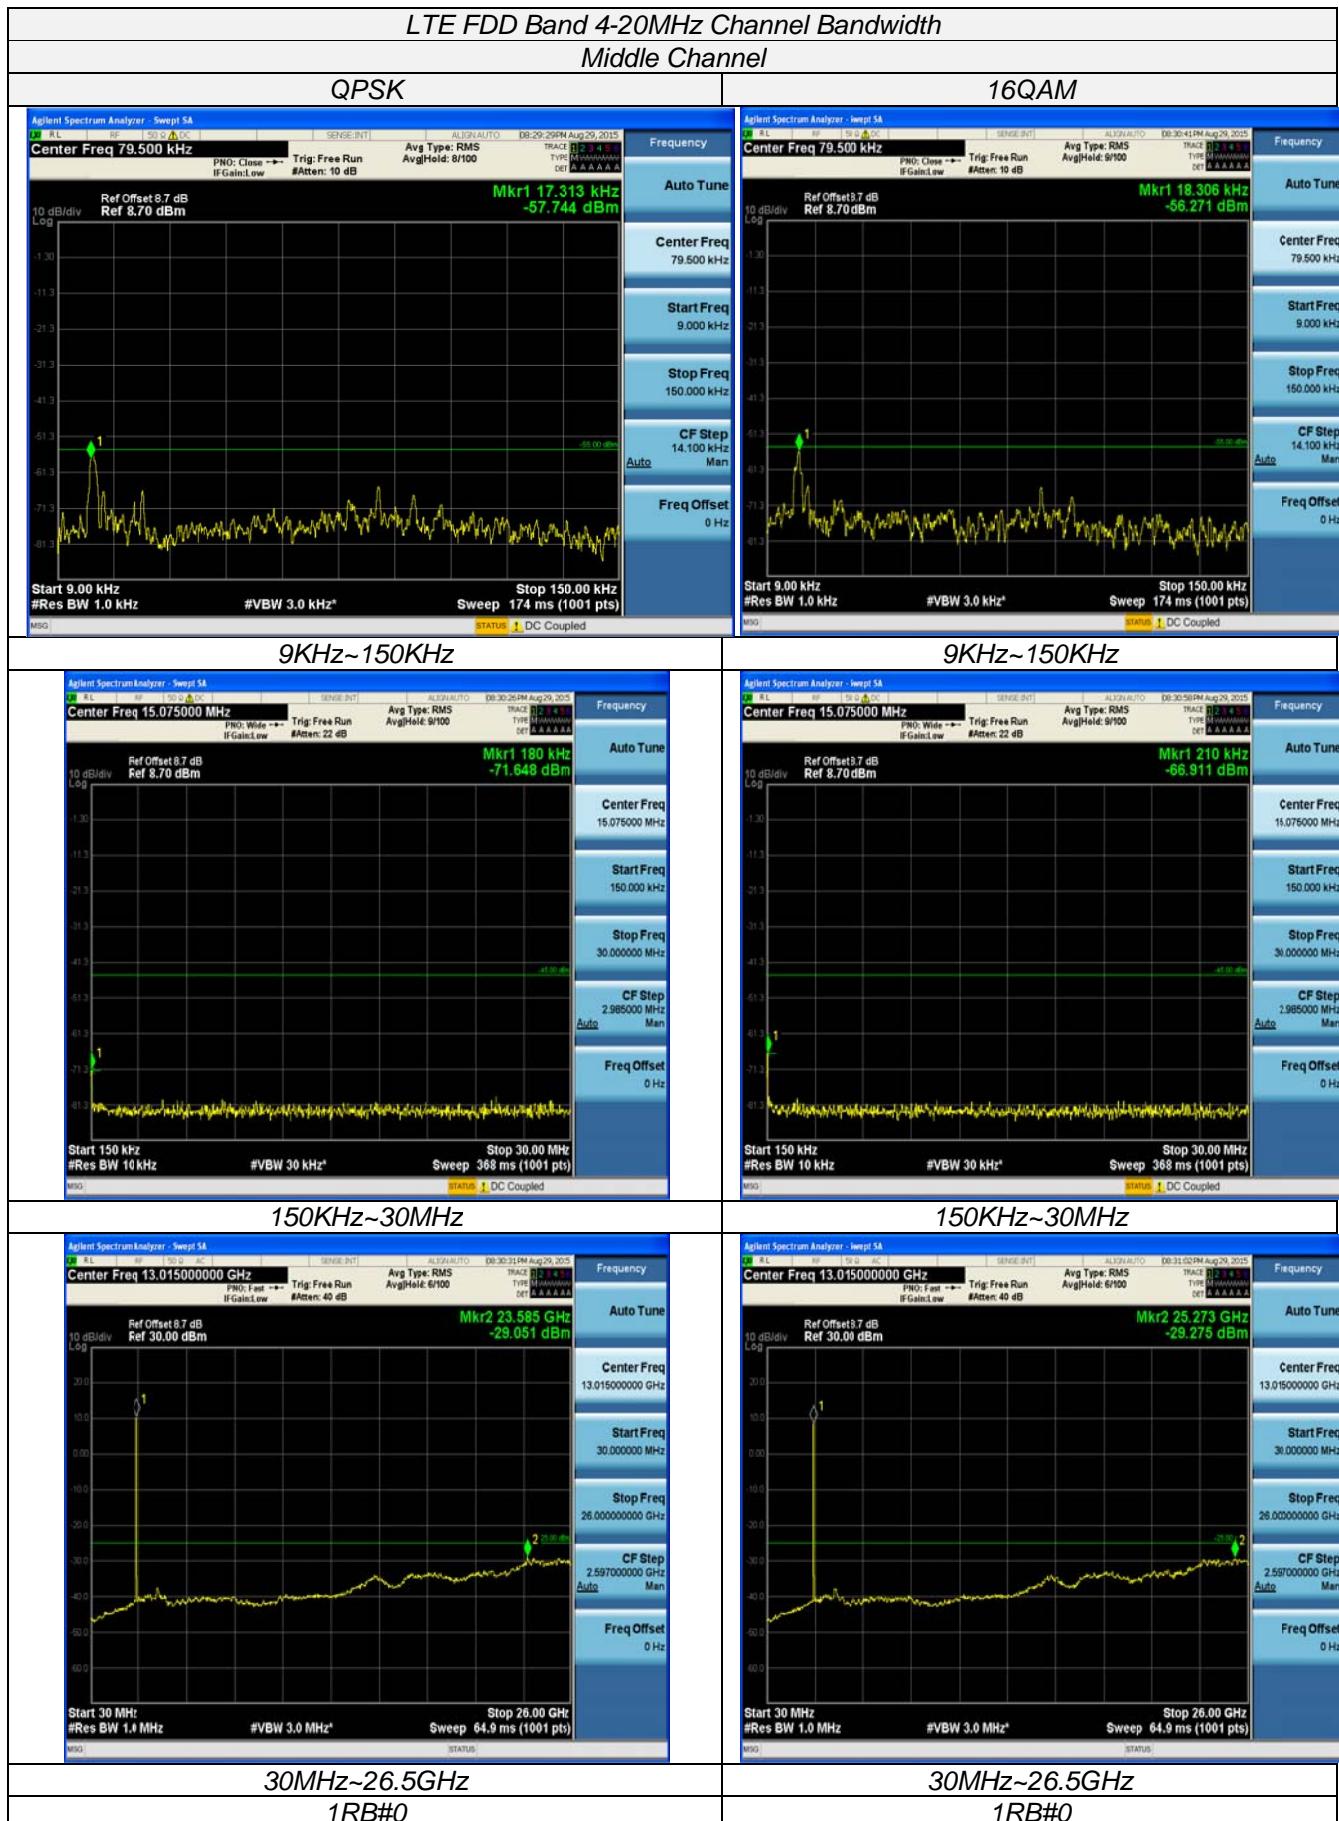

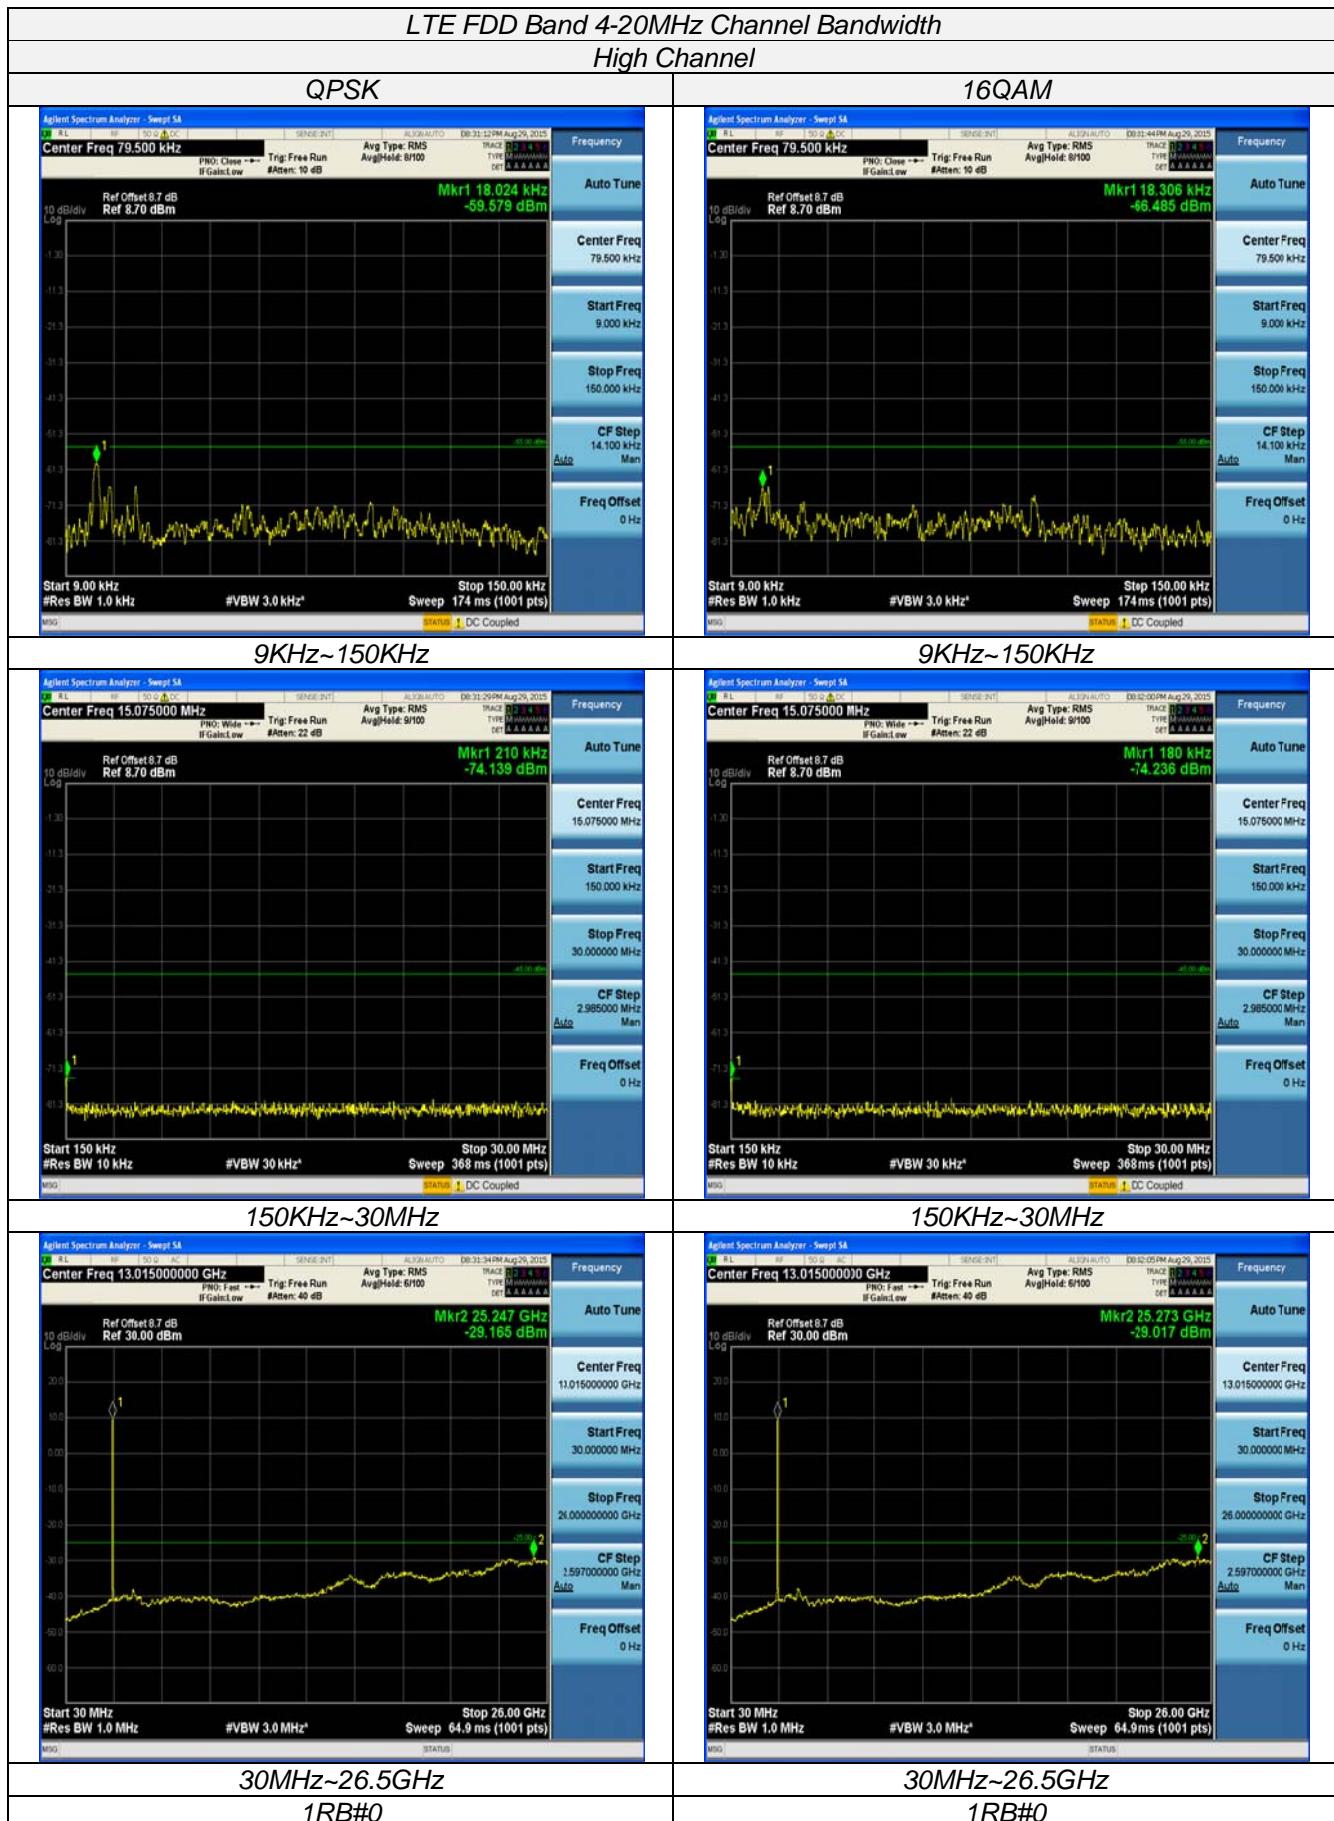


4.6. Radiated Spurious Emission

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

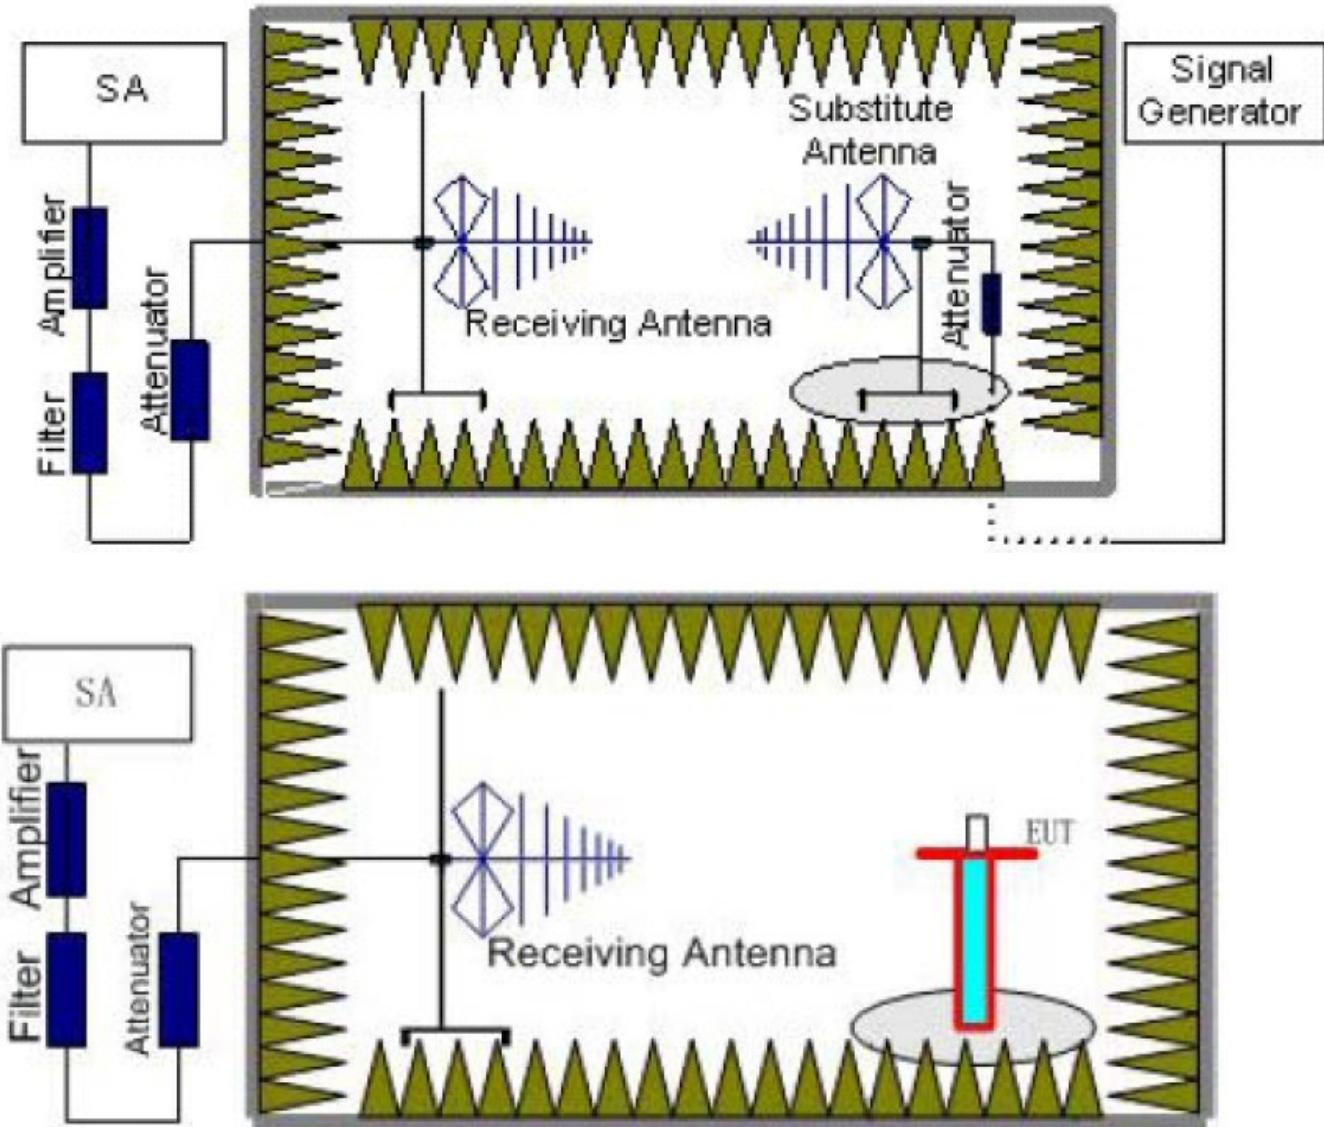

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r) .

4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~26	1 MHz	3 MHz	2

TEST LIMITS

According to 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 7	Low	9KHz -26GHz	PASS
	Middle	9KHz -26GHz	PASS
	High	9KHz -26GHz	PASS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + G_a(\text{dBi})$
3. We were not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.0	-46.19	5.11	3	13.38	-37.92	-13.00	24.92	H
7507.5	-48.12	6.02	3	13.98	-40.16	-13.00	27.16	H
5005.0	-50.87	5.11	3	13.38	-42.60	-13.00	29.60	V
7507.5	-53.73	6.02	3	13.98	-45.77	-13.00	32.77	V

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-42.72	5.11	3	13.38	-34.45	-13.00	21.45	H
7605.0	-45.92	6.02	3	13.98	-37.96	-13.00	24.96	H
5070.0	-50.6	5.11	3	13.38	-42.33	-13.00	29.33	V
7605.0	-53.71	6.02	3	13.98	-45.75	-13.00	32.75	V

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.0	-44.32	5.11	3	13.38	-36.05	-13.00	23.05	H
7702.5	-48.05	6.02	3	13.98	-40.09	-13.00	27.09	H
5135.0	-51.81	5.11	3	13.38	-43.54	-13.00	30.54	V
7702.5	-53.6	6.02	3	13.98	-45.64	-13.00	32.64	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.0	-47.51	5.11	3	13.38	-39.24	-13.00	26.24	H
7515.0	-50.51	6.02	3	13.98	-42.55	-13.00	29.55	H
5010.0	-53.63	5.11	3	13.38	-45.36	-13.00	32.36	V
7515.0	-54.54	6.02	3	13.98	-46.58	-13.00	33.58	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-45.79	5.11	3	13.38	-37.52	-13.00	24.52	H
7605.0	-49.49	6.02	3	13.98	-41.53	-13.00	28.53	H
5070.0	-51.72	5.11	3	13.38	-43.45	-13.00	30.45	V
7605.0	-54.64	6.02	3	13.98	-46.68	-13.00	33.68	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.0	-46.32	5.11	3	13.38	-38.05	-13.00	25.05	H
7695.0	-48.46	6.02	3	13.98	-40.50	-13.00	27.50	H
5130.0	-51.29	5.11	3	13.38	-43.02	-13.00	30.02	V
7695.0	-53.60	6.02	3	13.98	-45.64	-13.00	32.64	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.0	-48.39	5.11	3	13.38	-40.12	-13.00	27.12	H
7522.5	-49.80	6.02	3	13.98	-41.84	-13.00	28.84	H
5015.0	-51.89	5.11	3	13.38	-43.62	-13.00	30.62	V
7522.5	-55.85	6.02	3	13.98	-47.89	-13.00	34.89	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-46.14	5.11	3	13.38	-37.87	-13.00	24.87	H
7605.0	-50.34	6.02	3	13.98	-42.38	-13.00	29.38	H
5070.0	-50.82	5.11	3	13.38	-42.55	-13.00	29.55	V
7605.0	-54.67	6.02	3	13.98	-46.71	-13.00	33.71	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.0	-49.18	5.11	3	13.38	-40.91	-13.00	27.91	H
7687.5	-50.50	6.02	3	13.98	-42.54	-13.00	29.54	H
5125.0	-51.74	5.11	3	13.38	-43.47	-13.00	30.47	V
7687.5	-56.94	6.02	3	13.98	-48.98	-13.00	35.98	V

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.0	-50.57	5.11	3	13.38	-42.30	-13.00	29.30	H
7530.0	-52.61	6.02	3	13.98	-44.65	-13.00	31.65	H
5020.0	-54.25	5.11	3	13.38	-45.98	-13.00	32.98	V
7530.0	-55.97	6.02	3	13.98	-48.01	-13.00	35.01	V

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-46.62	5.11	3	13.38	-38.35	-13.00	25.35	H
7605.0	-49.95	6.02	3	13.98	-41.99	-13.00	28.99	H
5070.0	-51.03	5.11	3	13.38	-42.76	-13.00	29.76	V
7605.0	-53.74	6.02	3	13.98	-45.78	-13.00	32.78	V

LTE FDD 7_Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.0	-48.08	5.11	3	13.38	-39.81	-13.00	26.81	H
7680.0	-50.21	6.02	3	13.98	-42.25	-13.00	29.25	H
5120.0	-52.34	5.11	3	13.38	-44.07	-13.00	31.07	V
7680.0	-55.71	6.02	3	13.98	-47.75	-13.00	34.75	V

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.0	-46.61	5.11	3	13.38	-38.34	-13.00	25.34	H
7507.5	-48.16	6.02	3	13.98	-40.20	-13.00	27.20	H
5005.0	-51.26	5.11	3	13.38	-42.99	-13.00	29.99	V
7507.5	-53.77	6.02	3	13.98	-45.81	-13.00	32.81	V

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-43.64	5.11	3	13.38	-35.37	-13.00	22.37	H
7605.0	-46.39	6.02	3	13.98	-38.43	-13.00	25.43	H
5070.0	-51.01	5.11	3	13.38	-42.74	-13.00	29.74	V
7605.0	-54.07	6.02	3	13.98	-46.11	-13.00	33.11	V

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.0	-45.43	5.11	3	13.38	-37.16	-13.00	24.16	H
7702.5	-48.86	6.02	3	13.98	-40.90	-13.00	27.90	H
5135.0	-52.22	5.11	3	13.38	-43.95	-13.00	30.95	V
7702.5	-53.83	6.02	3	13.98	-45.87	-13.00	32.87	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.0	-45.29	-45.29	-45.29	-45.29	-45.29	-45.29	-45.29	H
7515.0	-48.91	-48.91	-48.91	-48.91	-48.91	-48.91	-48.91	H
5010.0	-51.75	-51.75	-51.75	-51.75	-51.75	-51.75	-51.75	V
7515.0	-52.42	-52.42	-52.42	-52.42	-52.42	-52.42	-52.42	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-46.25	5.11	3	13.38	-37.98	-13.00	24.98	H
7605.0	-49.52	6.02	3	13.98	-41.56	-13.00	28.56	H
5070.0	-52.31	5.11	3	13.38	-44.04	-13.00	31.04	V
7605.0	-55.03	6.02	3	13.98	-47.07	-13.00	34.07	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.0	-47.48	5.11	3	13.38	-39.21	-13.00	26.21	H
7695.0	-49.23	6.02	3	13.98	-41.27	-13.00	28.27	H
5130.0	-52.54	5.11	3	13.38	-44.27	-13.00	31.27	V
7695.0	-53.94	6.02	3	13.98	-45.98	-13.00	32.98	V

LTE FDD Band 4_Channel Bandwidth 15MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.0	-49.18	5.11	3	13.38	-40.91	-13.00	27.91	-49.18
7522.5	-50.08	6.02	3	13.98	-42.12	-13.00	29.12	-50.08
5015.0	-52.43	5.11	3	13.38	-44.16	-13.00	31.16	-52.43
7522.5	-55.85	6.02	3	13.98	-47.89	-13.00	34.89	-55.85

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-46.31	5.11	3	13.38	-38.04	-13.00	25.04	H
7605.0	-51.06	6.02	3	13.98	-43.10	-13.00	30.10	H
5070.0	-52.76	5.11	3	13.38	-44.49	-13.00	31.49	V
7605.0	-54.98	6.02	3	13.98	-47.02	-13.00	34.02	V

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.0	-48.33	5.11	3	13.38	-40.06	-13.00	27.06	H
7687.5	-51.65	6.02	3	13.98	-43.69	-13.00	30.69	H
5125.0	-52.67	5.11	3	13.38	-44.40	-13.00	31.40	V
7687.5	-57.24	6.02	3	13.98	-49.28	-13.00	36.28	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.0	-51.1	5.11	3	13.38	-42.83	-13.00	29.83	H
7530.0	-53.37	6.02	3	13.98	-45.41	-13.00	32.41	H
5020.0	-54.22	5.11	3	13.38	-45.95	-13.00	32.95	V
7530.0	-56.28	6.02	3	13.98	-48.32	-13.00	35.32	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.0	-47.41	5.11	3	13.38	-39.14	-13.00	26.14	H
7605.0	-49.54	6.02	3	13.98	-41.58	-13.00	28.58	H
5070.0	-51.59	5.11	3	13.38	-43.32	-13.00	30.32	V
7605.0	-54.76	6.02	3	13.98	-46.80	-13.00	33.80	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_High Channel


Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.0	-47.1	5.11	3	13.38	-38.83	-13.00	25.83	H
7680.0	-50.53	6.02	3	13.98	-42.57	-13.00	29.57	H
5120.0	-52.98	5.11	3	13.38	-44.71	-13.00	31.71	V
7680.0	-56.27	6.02	3	13.98	-48.31	-13.00	35.31	V

4.7. Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

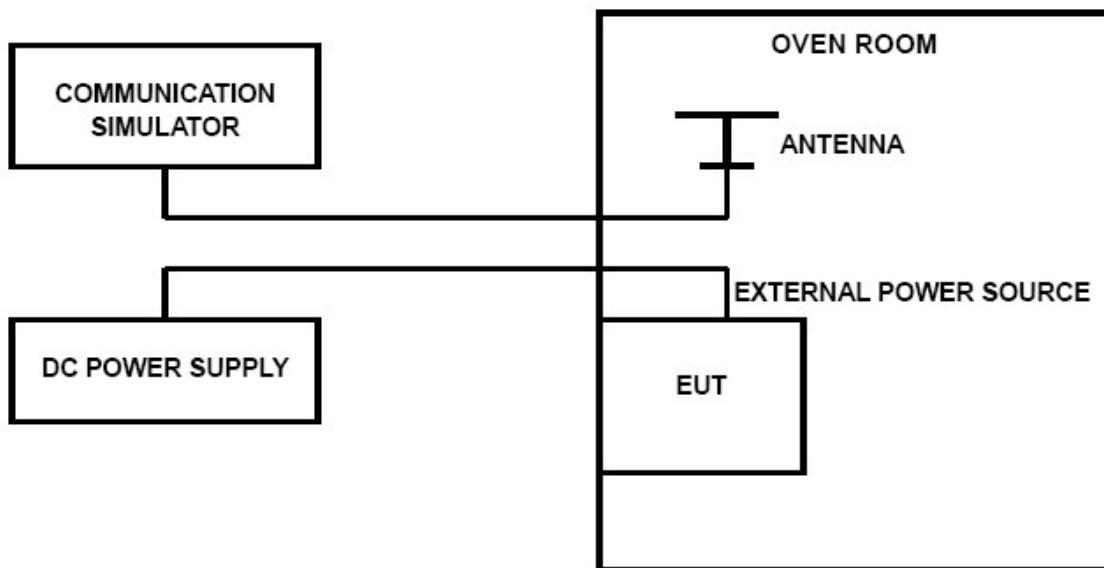

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case.

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
3.40	-1.80	-3.04	-0.000710	-0.001201	2.50
3.70	2.27	-5.10	0.000895	-0.002010	2.50
4.20	5.96	5.06	0.002351	0.001995	2.50

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	-0.48	-6.45	-0.000189	-0.002545	2.50
-20°	3.48	8.00	0.001373	0.003158	2.50
-10°	2.50	2.43	0.000984	0.000959	2.50
0°	-0.90	-9.41	-0.000356	-0.003712	2.50
10°	3.85	-4.23	0.001519	-0.001669	2.50
20°	-3.26	0.36	-0.001286	0.000140	2.50
30°	-9.87	9.35	-0.003895	0.003690	2.50
40°	-8.02	6.56	-0.003166	0.002587	2.50
50°	1.52	0.97	0.000601	0.000382	2.50

5. Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6. External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7. Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

***** End of Report *****