


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz

Vertical

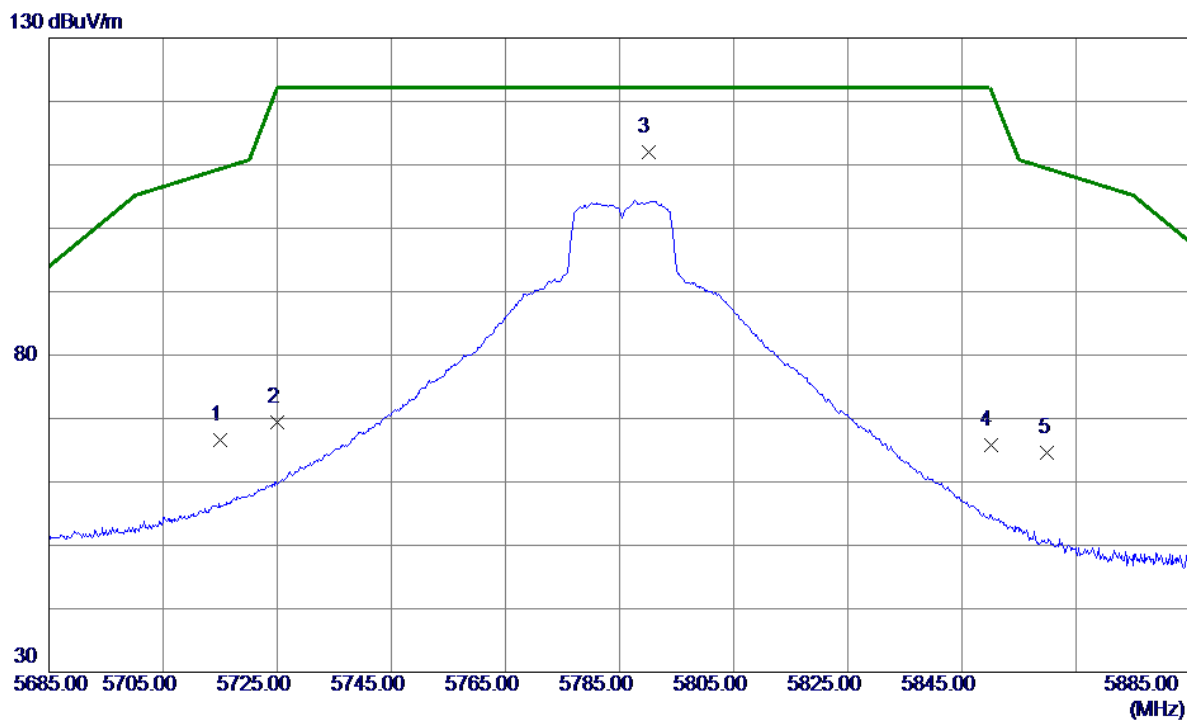


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	26.25	40.32	66.57	109.40	-42.83	Peak	
2	5725.0000	29.10	40.33	69.43	122.20	-52.77	Peak	
3 *	5790.0000	71.59	40.39	111.98	122.20	-10.22	Peak	
4	5850.0000	25.37	40.44	65.81	122.20	-56.39	Peak	
5	5860.0000	24.22	40.45	64.67	109.40	-44.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz

Vertical


80 dBuV/m

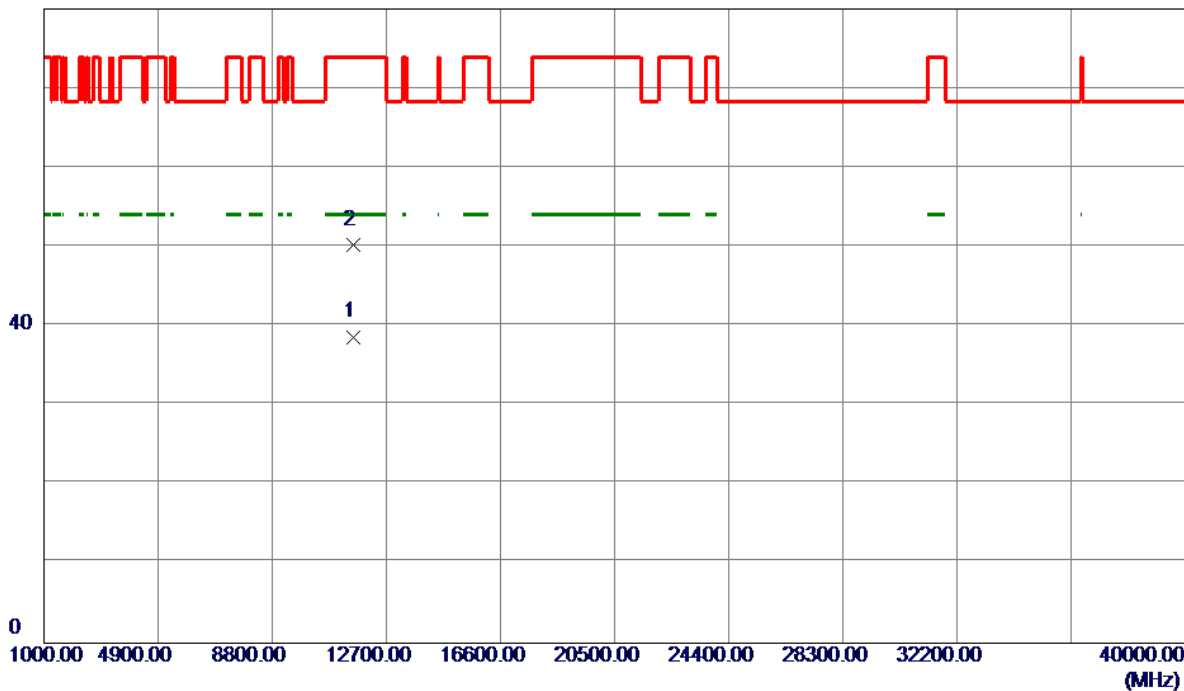

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.8000	36.73	1.91	38.64	54.00	-15.36	AVG	
2	11571.2300	48.32	1.91	50.23	74.00	-23.77	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

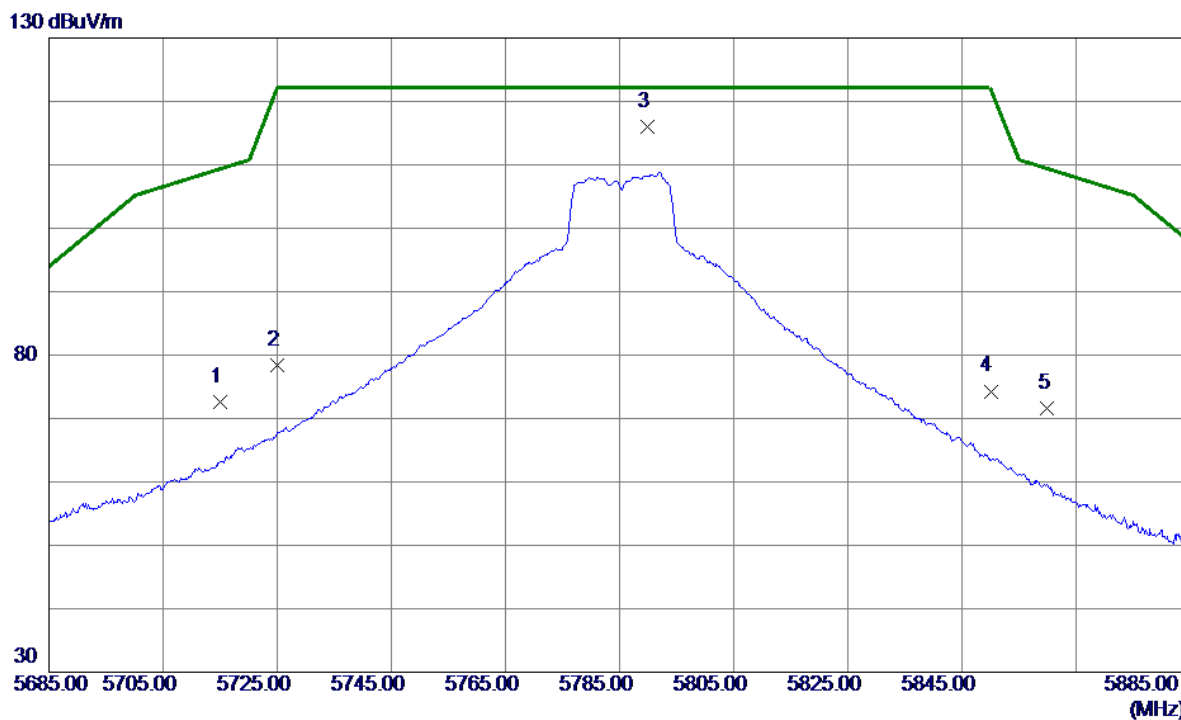

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	32.34	40.32	72.66	109.40	-36.74	Peak	
2	5725.0000	38.02	40.33	78.35	122.20	-43.85	Peak	
3 *	5789.9000	75.70	40.39	116.09	122.20	-6.11	Peak	
4	5850.0000	33.86	40.44	74.30	122.20	-47.90	Peak	
5	5860.0000	31.08	40.45	71.53	109.40	-37.87	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

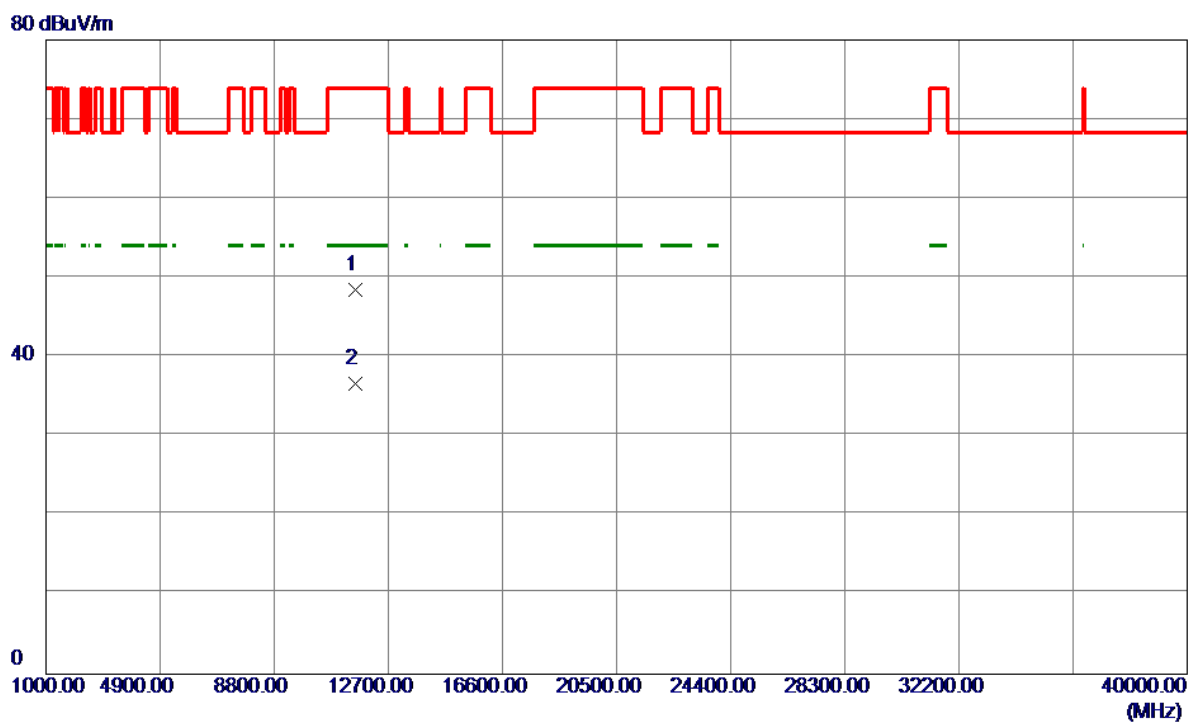

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.2800	46.58	1.91	48.49	74.00	-25.51	Peak	
2 *	11569.3800	34.70	1.91	36.61	54.00	-17.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

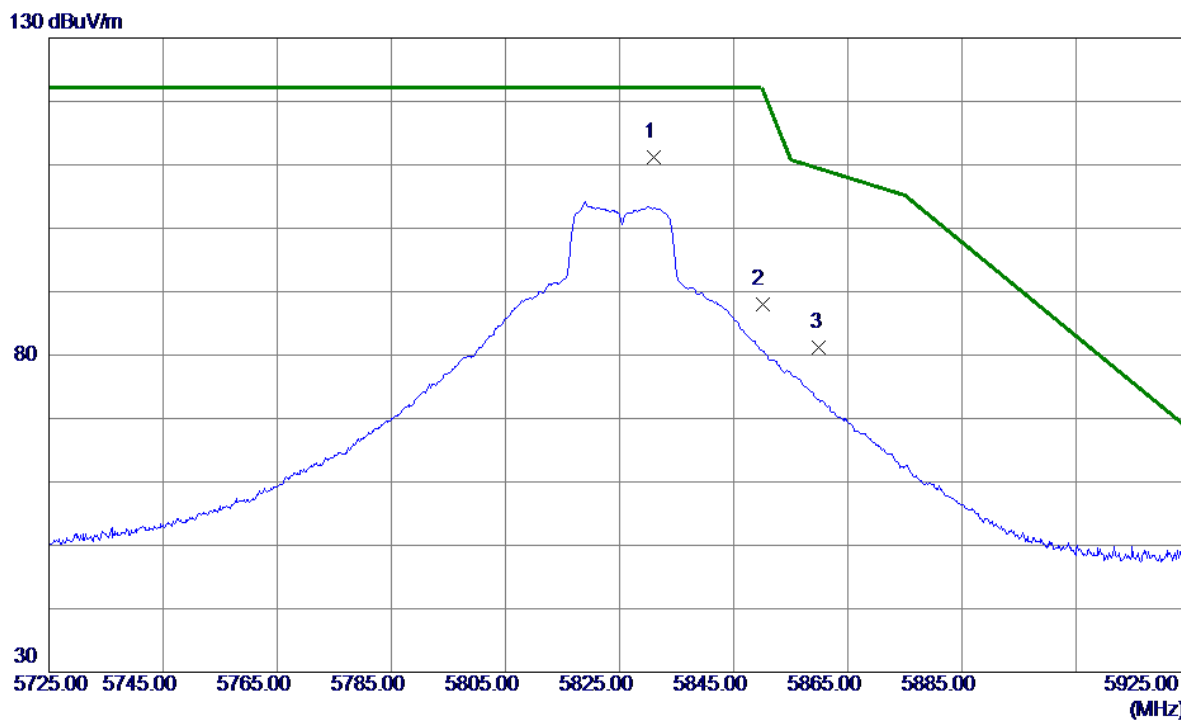

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5831.1000	70.74	40.42	111.16	122.20	-11.04	Peak	
2	5850.0000	47.62	40.44	88.06	122.20	-34.14	Peak	
3	5860.0000	40.84	40.45	81.29	109.40	-28.11	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

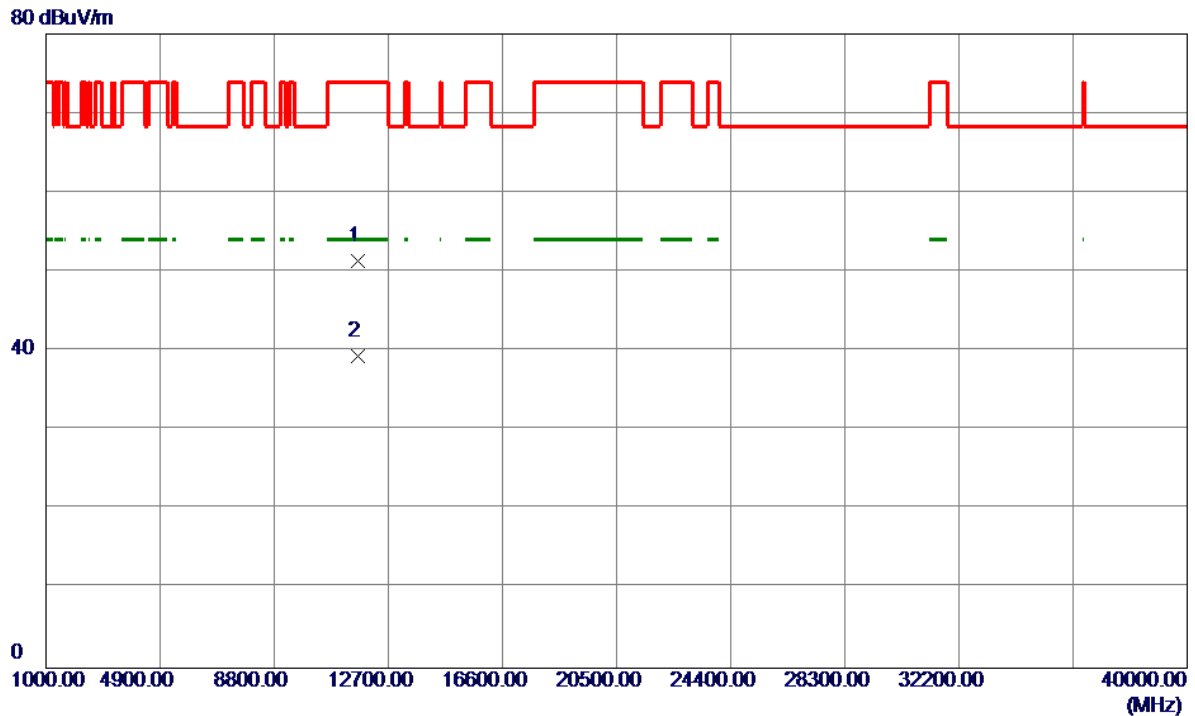

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11648.9800	49.58	1.83	51.41	74.00	-22.59	Peak	
2 *	11652.1200	37.49	1.83	39.32	54.00	-14.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

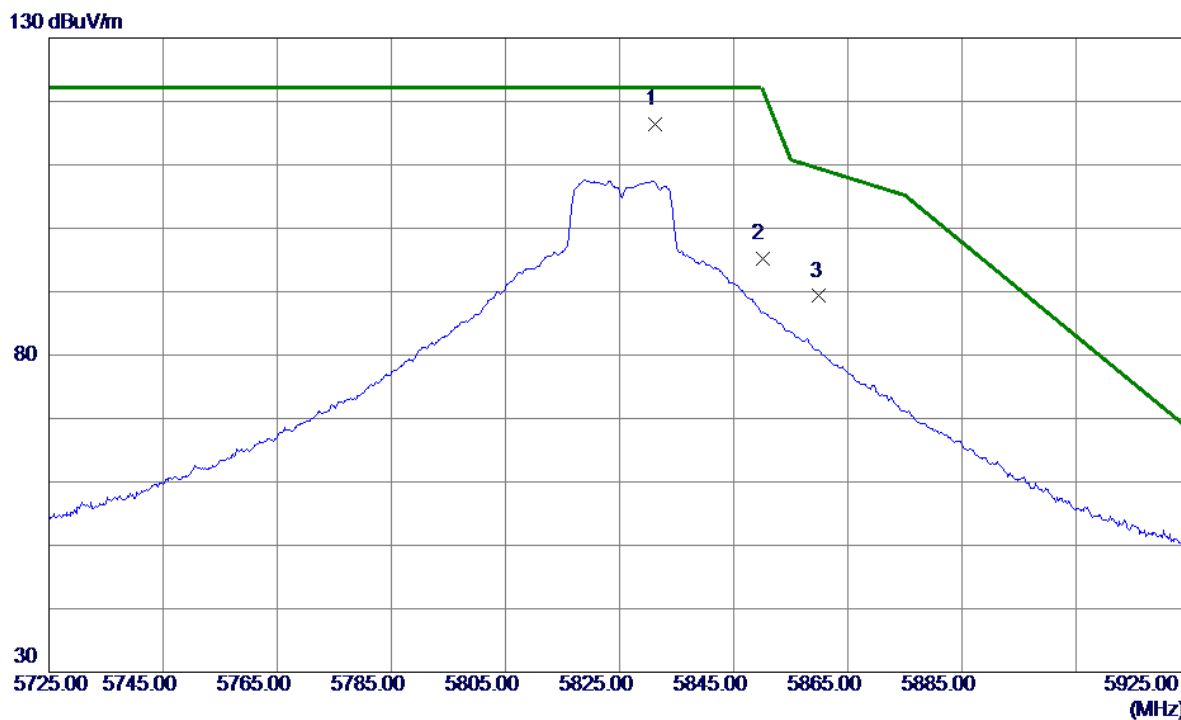

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5831.3000	75.94	40.42	116.36	122.20	-5.84	Peak	
2	5850.0000	54.84	40.44	95.28	122.20	-26.92	Peak	
3	5860.0000	48.85	40.45	89.30	109.40	-20.10	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

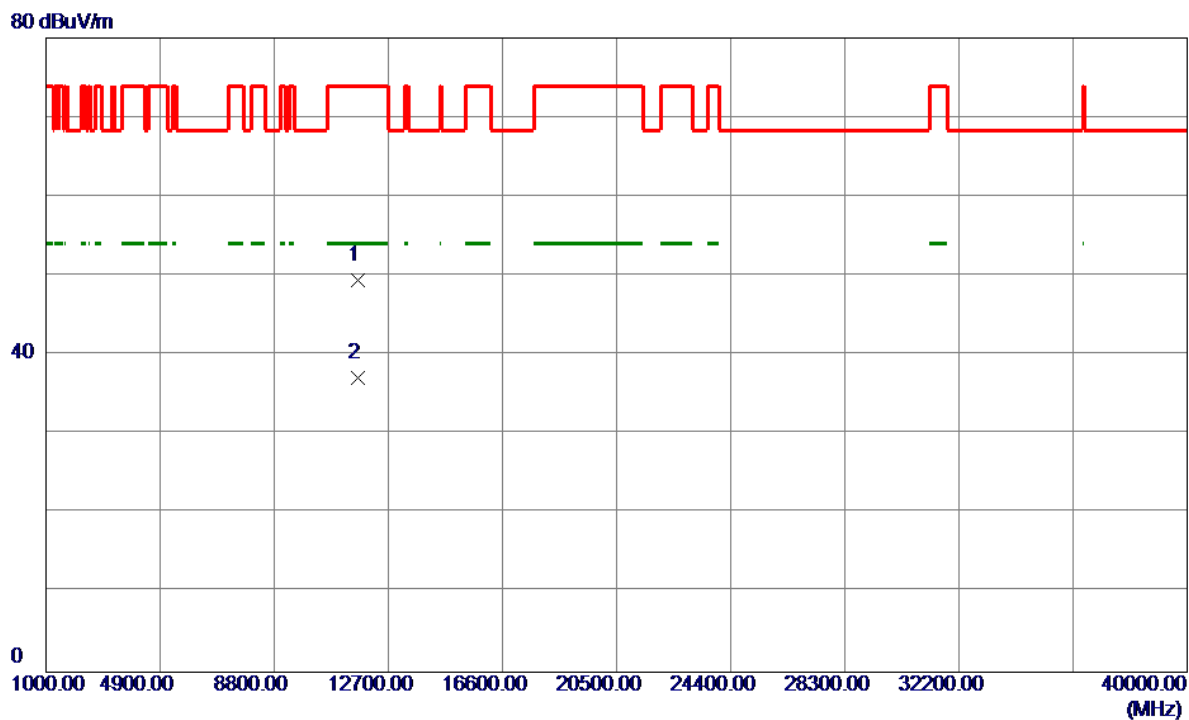

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.3000	47.54	1.83	49.37	74.00	-24.63	Peak	
2 *	11649.8600	35.25	1.83	37.08	54.00	-16.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

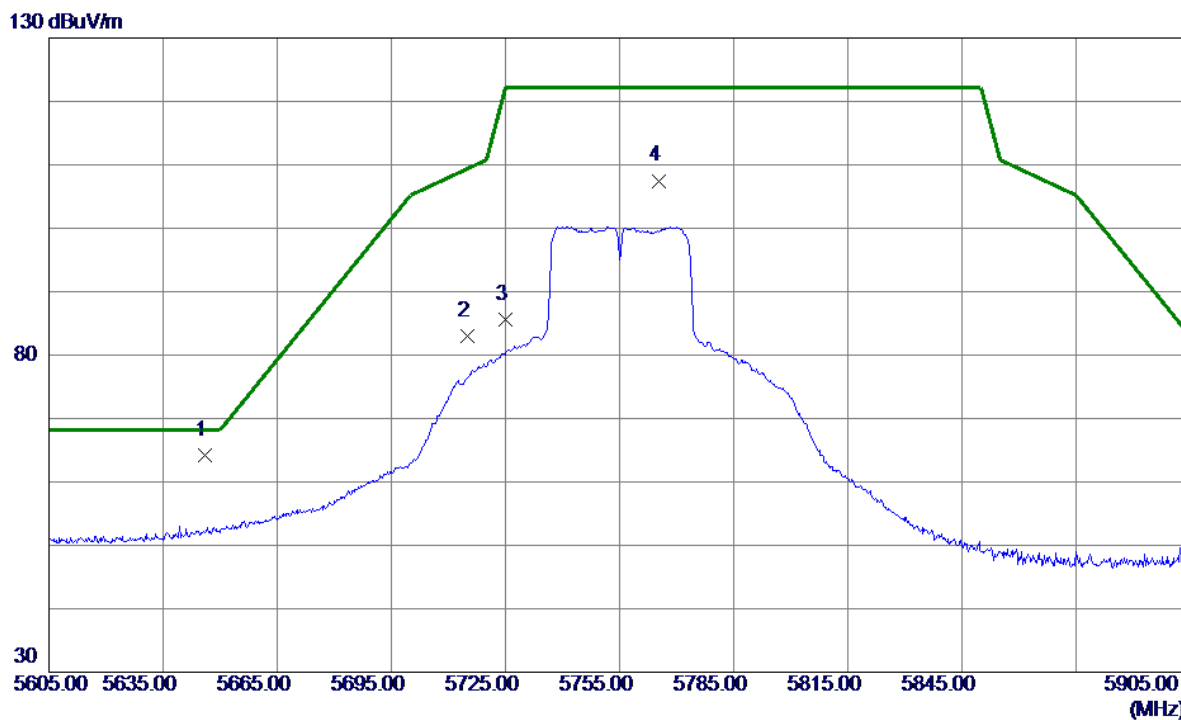

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.0000	23.88	40.27	64.15	68.20	-4.05	Peak	
2	5715.0000	42.68	40.32	83.00	109.40	-26.40	Peak	
3	5725.0000	45.18	40.33	85.51	122.20	-36.69	Peak	
4	5765.3500	67.13	40.37	107.50	122.20	-14.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

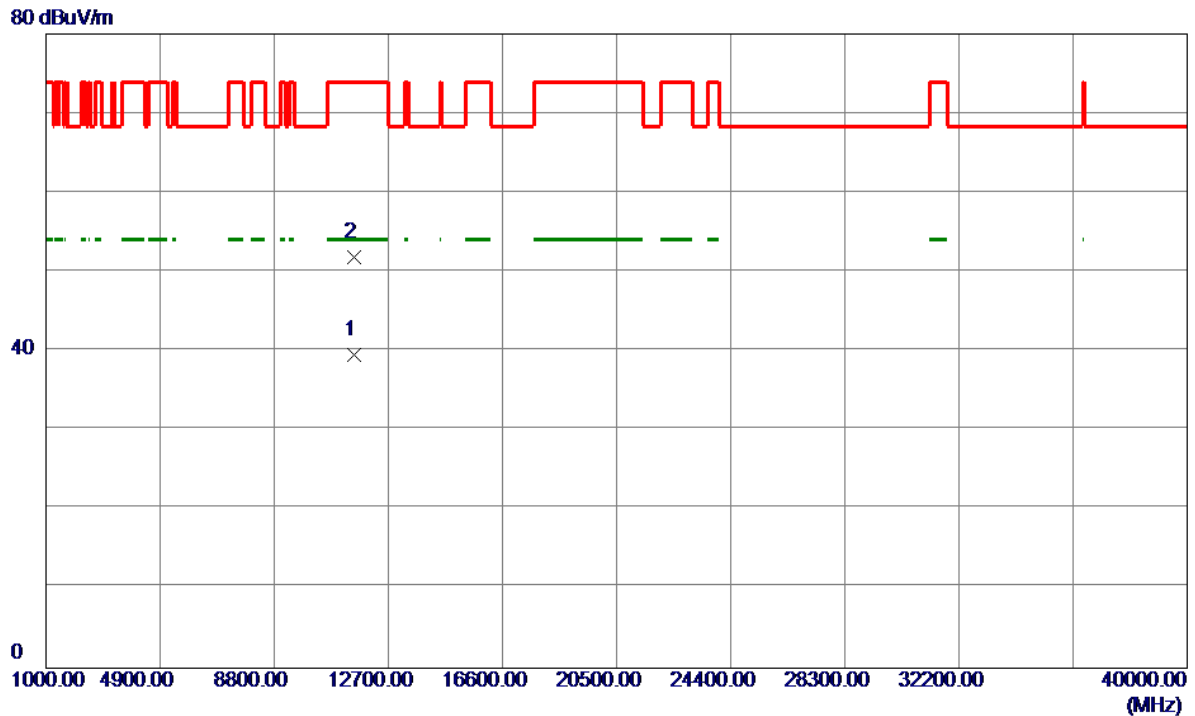

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.0500	37.56	1.98	39.54	54.00	-14.46	AVG	
2	11510.1500	49.94	1.97	51.91	74.00	-22.09	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

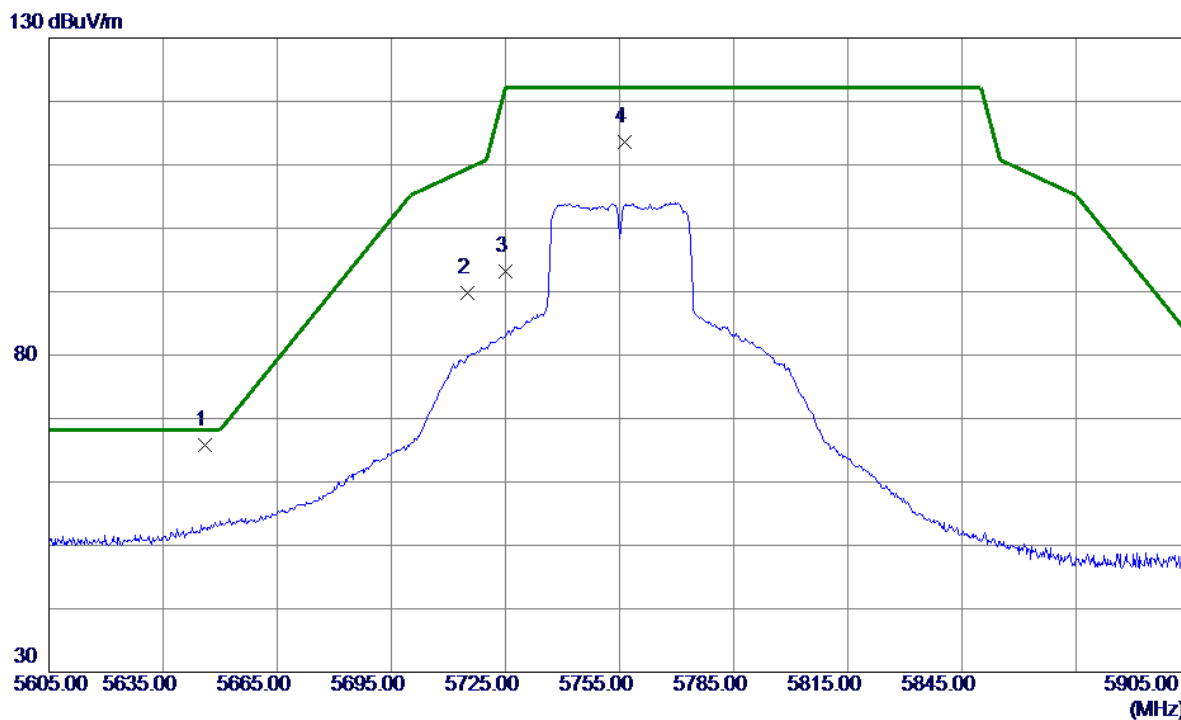

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.0000	25.45	40.27	65.72	68.20	-2.48	Peak	
2	5715.0000	49.52	40.32	89.84	109.40	-19.56	Peak	
3	5725.0000	52.88	40.33	93.21	122.20	-28.99	Peak	
4	5756.3500	73.19	40.36	113.55	122.20	-8.65	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

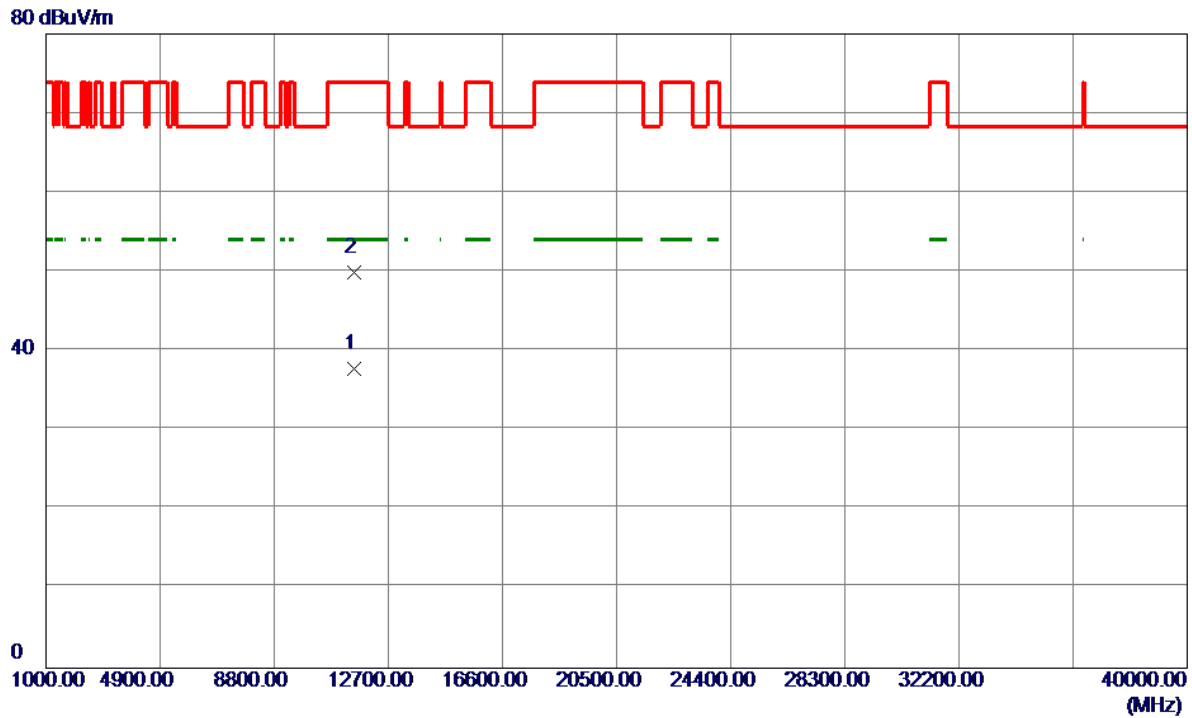

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.7500	35.73	1.98	37.71	54.00	-16.29	AVG	
2	11511.4500	48.02	1.97	49.99	74.00	-24.01	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

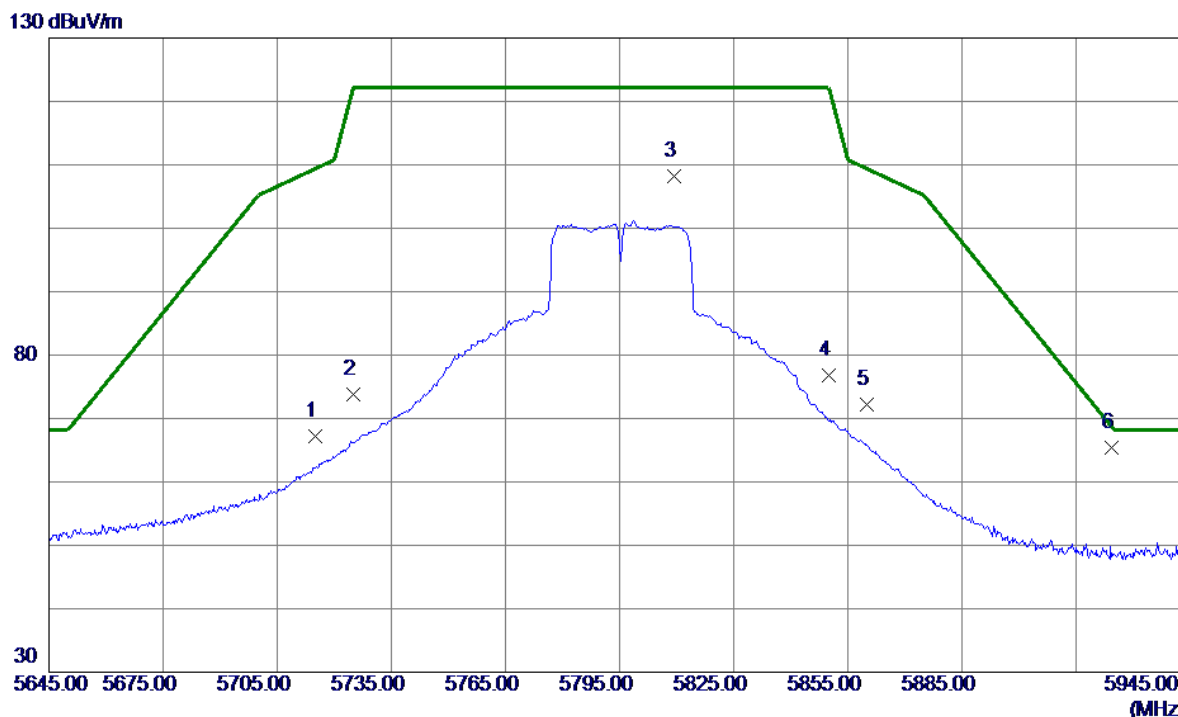

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	26.87	40.32	67.19	109.40	-42.21	Peak	
2	5725.0000	33.45	40.33	73.78	122.20	-48.42	Peak	
3	5809.4000	67.75	40.41	108.16	122.20	-14.04	Peak	
4	5850.0000	36.43	40.44	76.87	122.20	-45.33	Peak	
5	5860.0000	31.69	40.45	72.14	109.40	-37.26	Peak	
6 *	5924.4500	24.83	40.50	65.33	68.61	-3.28	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

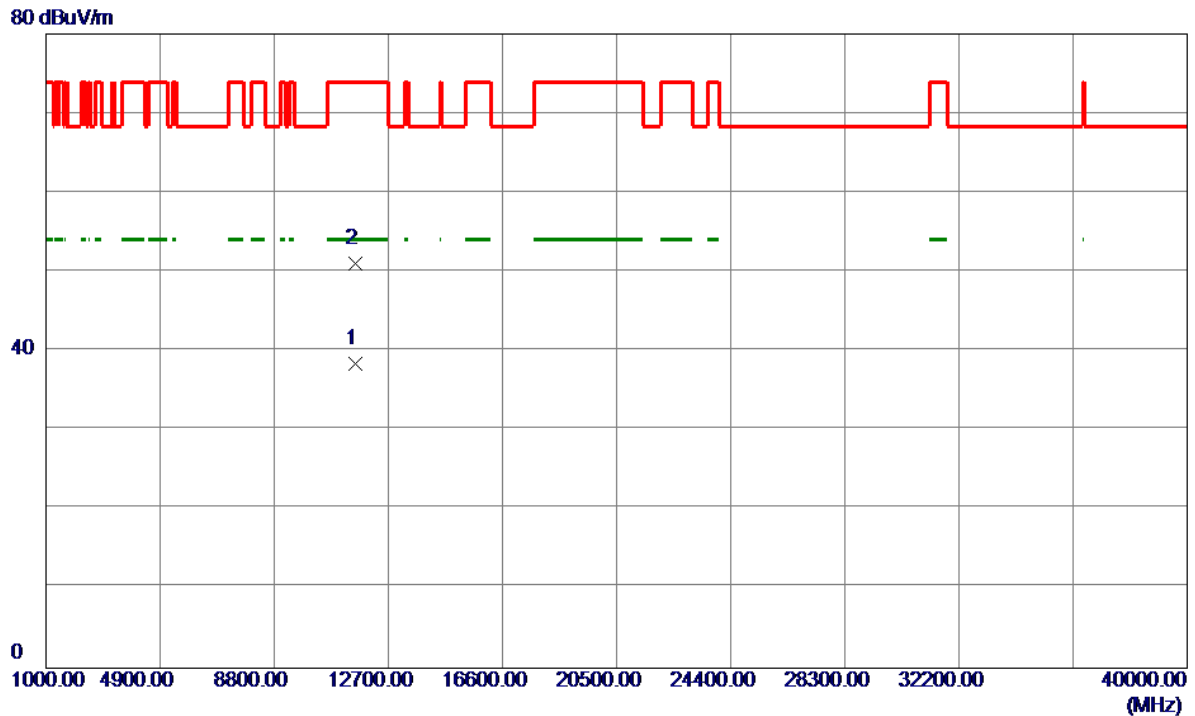

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.3500	36.52	1.89	38.41	54.00	-15.59	AVG	
2	11588.7000	49.16	1.89	51.05	74.00	-22.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

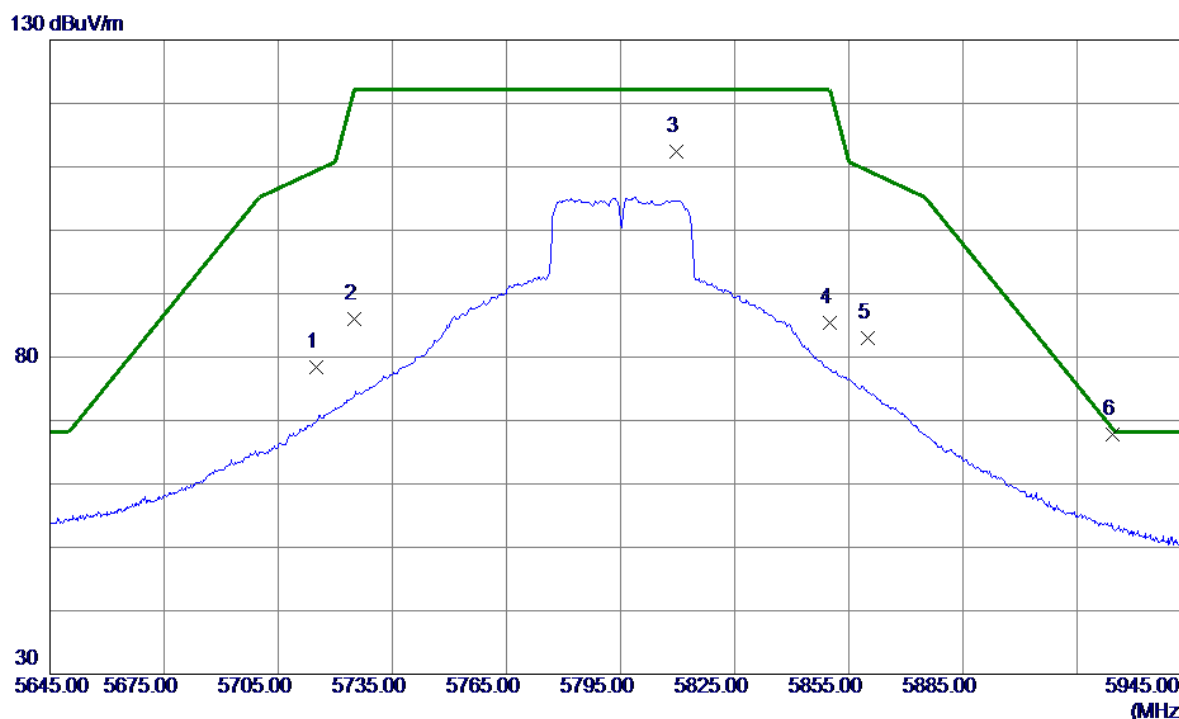

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.17	40.32	78.49	109.40	-30.91	Peak	
2	5725.0000	45.70	40.33	86.03	122.20	-36.17	Peak	
3	5809.5500	72.02	40.41	112.43	122.20	-9.77	Peak	
4	5850.0000	44.87	40.44	85.31	122.20	-36.89	Peak	
5	5860.0000	42.47	40.45	82.92	109.40	-26.48	Peak	
6 *	5924.4500	27.27	40.50	67.77	68.61	-0.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

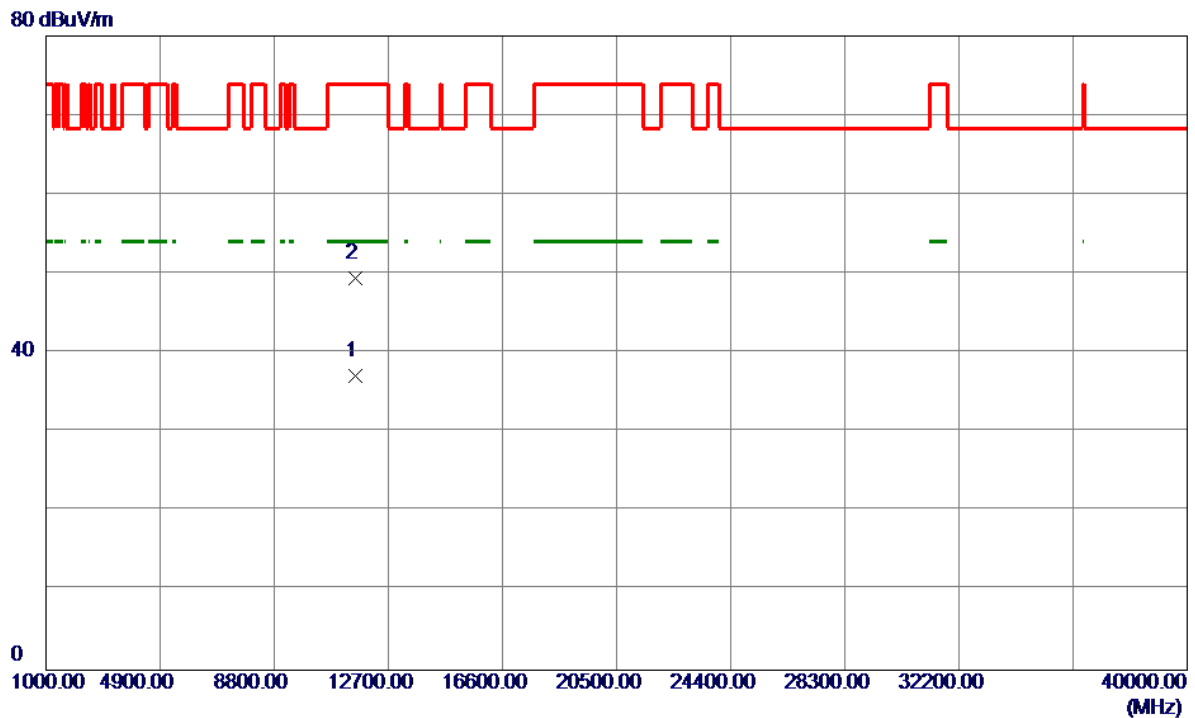


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.1500	35.24	1.89	37.13	54.00	-16.87	AVG	
2	11590.5500	47.58	1.89	49.47	74.00	-24.53	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


130 dBuV/m

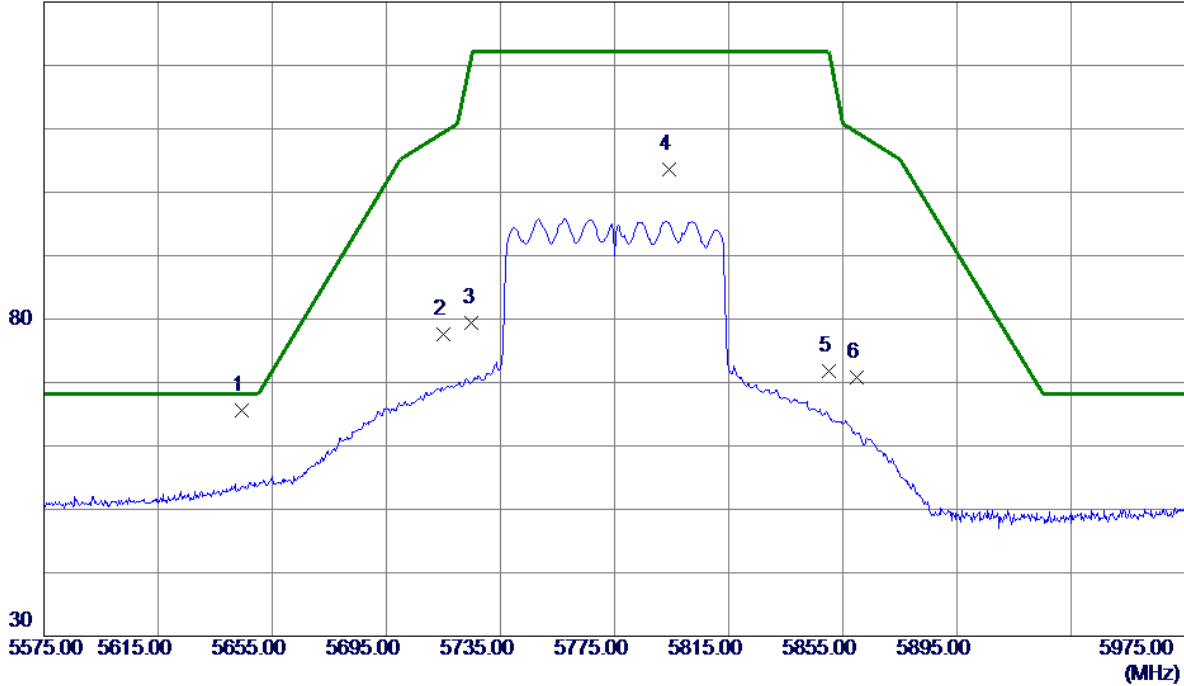

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5644.4000	25.42	40.26	65.68	68.20	-2.52	Peak	
2	5715.0000	37.30	40.32	77.62	109.40	-31.78	Peak	
3	5725.0000	39.01	40.33	79.34	122.20	-42.86	Peak	
4	5794.0000	63.13	40.39	103.52	122.20	-18.68	Peak	
5	5850.0000	31.36	40.44	71.80	122.20	-50.40	Peak	
6	5860.0000	30.38	40.45	70.83	109.40	-38.57	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

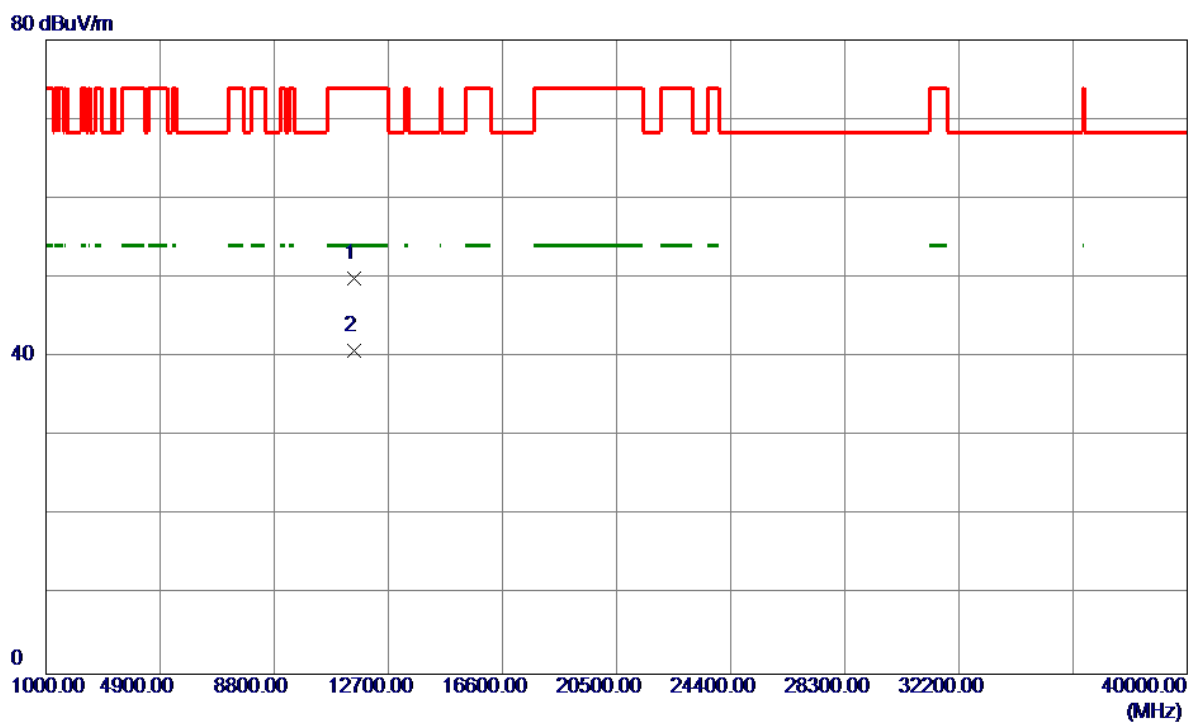

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.5500	48.04	1.94	49.98	74.00	-24.02	Peak	
2 *	11550.7500	38.89	1.93	40.82	54.00	-13.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

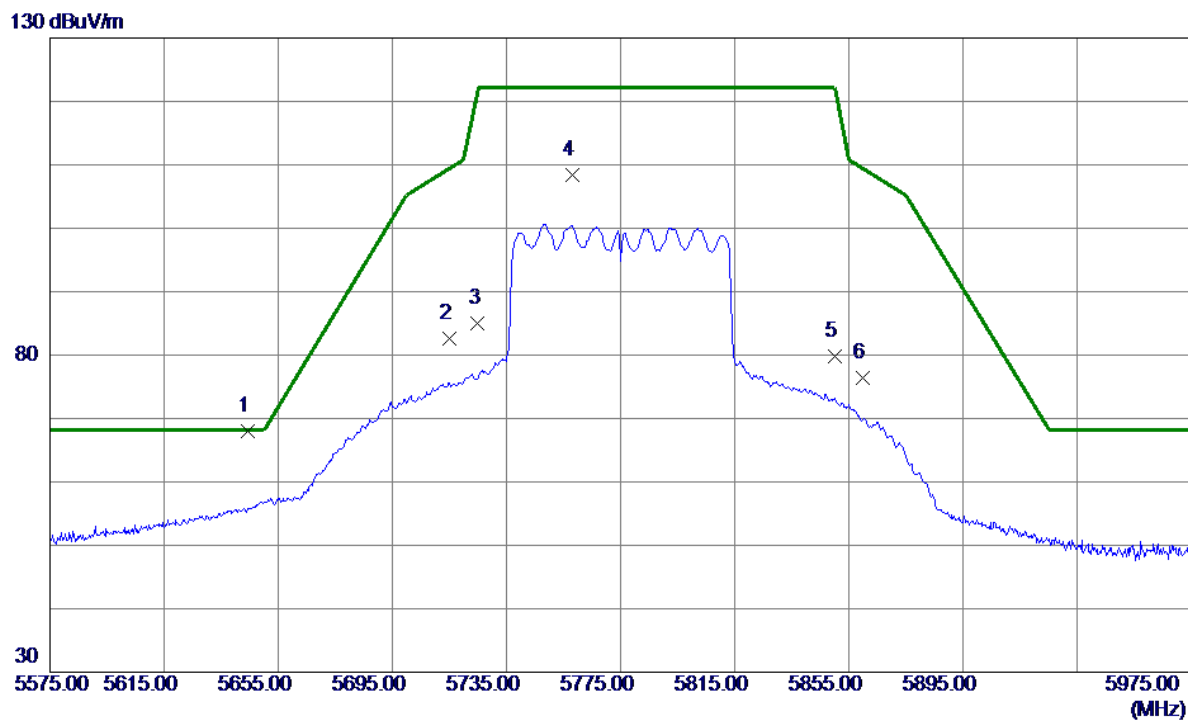

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5644.4000	27.74	40.26	68.00	68.20	-0.20	Peak	
2	5715.0000	42.35	40.32	82.67	109.40	-26.73	Peak	
3	5725.0000	44.66	40.33	84.99	122.20	-37.21	Peak	
4	5758.2000	67.95	40.36	108.31	122.20	-13.89	Peak	
5	5850.0000	39.44	40.44	79.88	122.20	-42.32	Peak	
6	5860.0000	35.94	40.45	76.39	109.40	-33.01	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

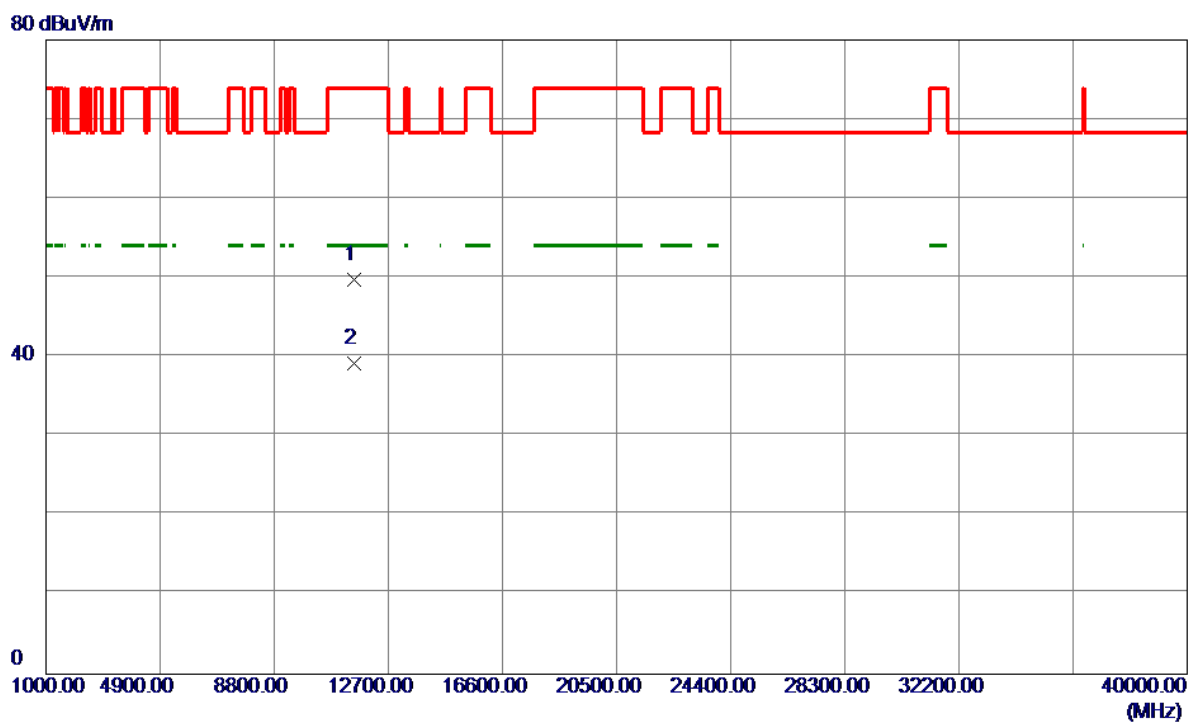

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11549.5000	47.82	1.93	49.75	74.00	-24.25	Peak	
2 *	11550.1000	37.34	1.93	39.27	54.00	-14.73	AVG	

TX A Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.500 msec

T_{Total} : 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

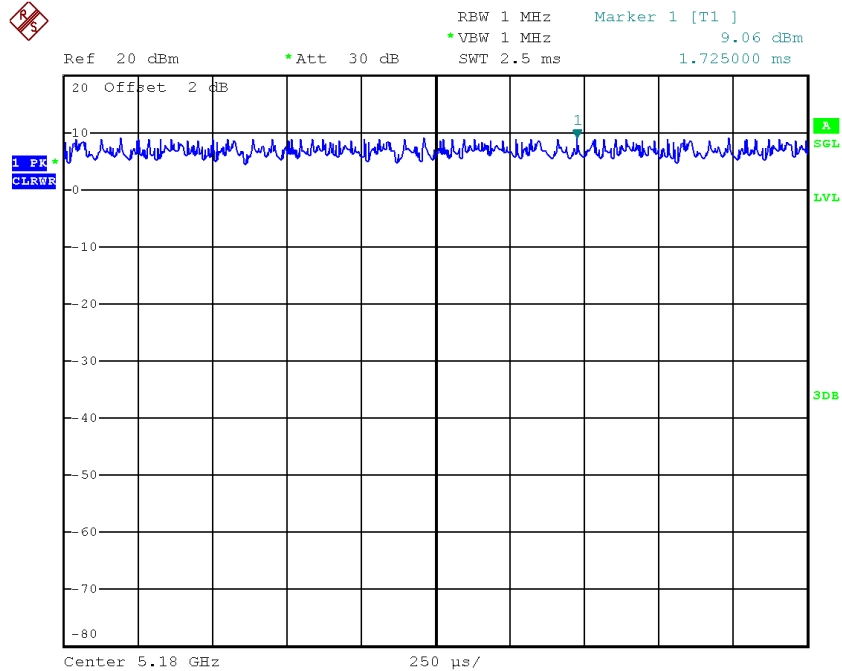

Date: 16.OCT.2018 09:51:02

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.

TX N20 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON}: 2.500 msec

T_{Total}: 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

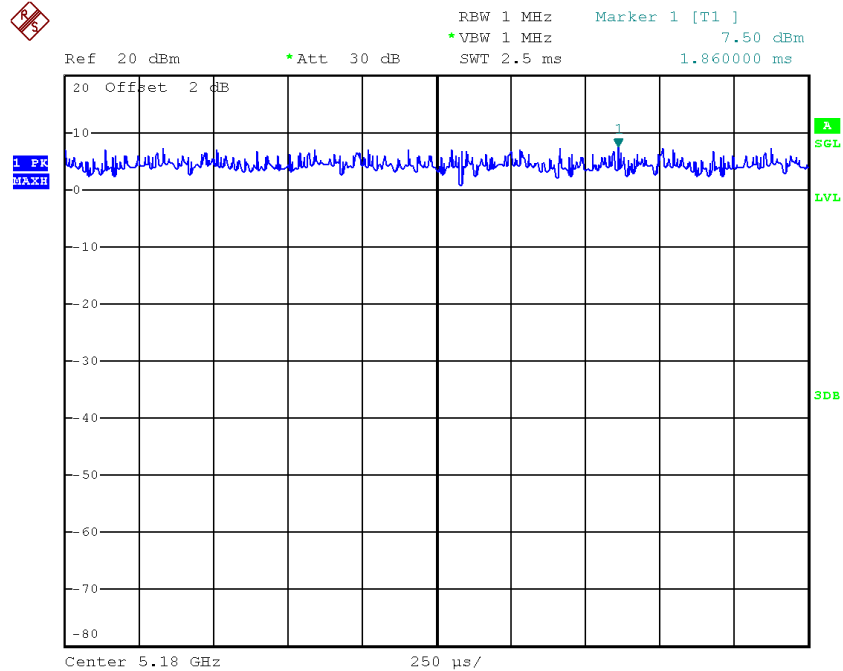

Date: 16.OCT.2018 17:24:59

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.

TX N40 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.500 msec

T_{Total} : 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

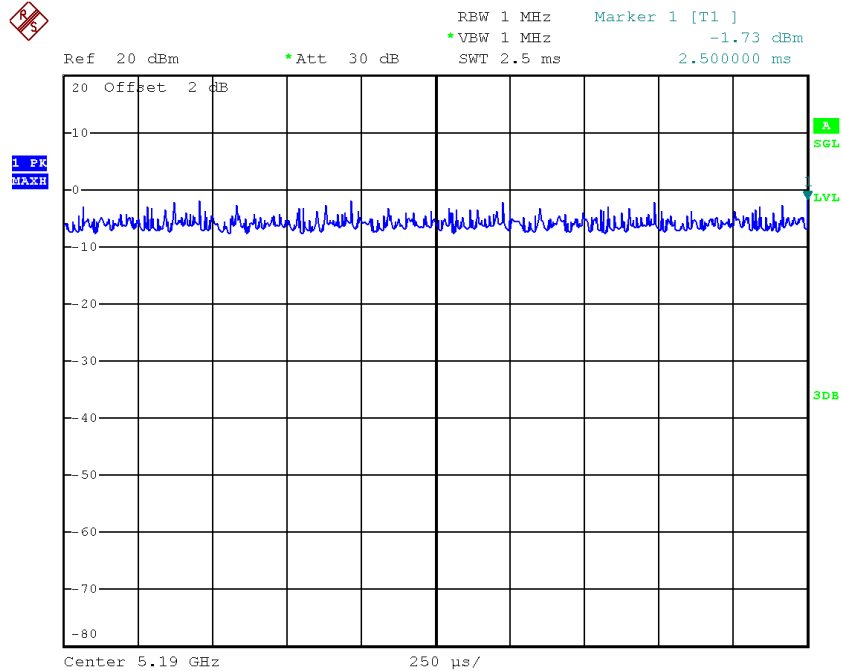

Date: 16.OCT.2018 19:46:01

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.

TX AC20 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.500 msec

T_{Total} : 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

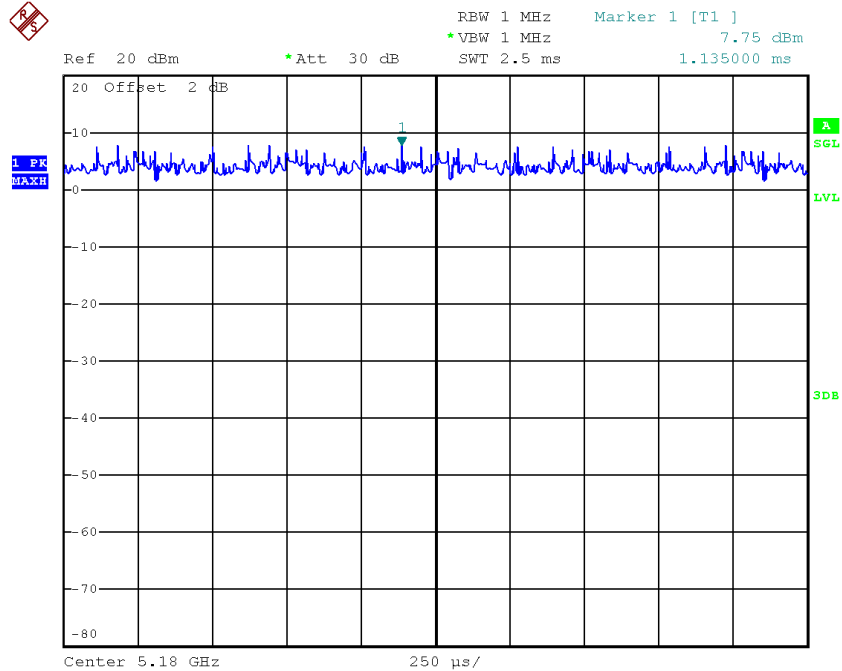

Date: 16.OCT.2018 18:09:15

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.

TX AC40 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.500 msec

T_{Total} : 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

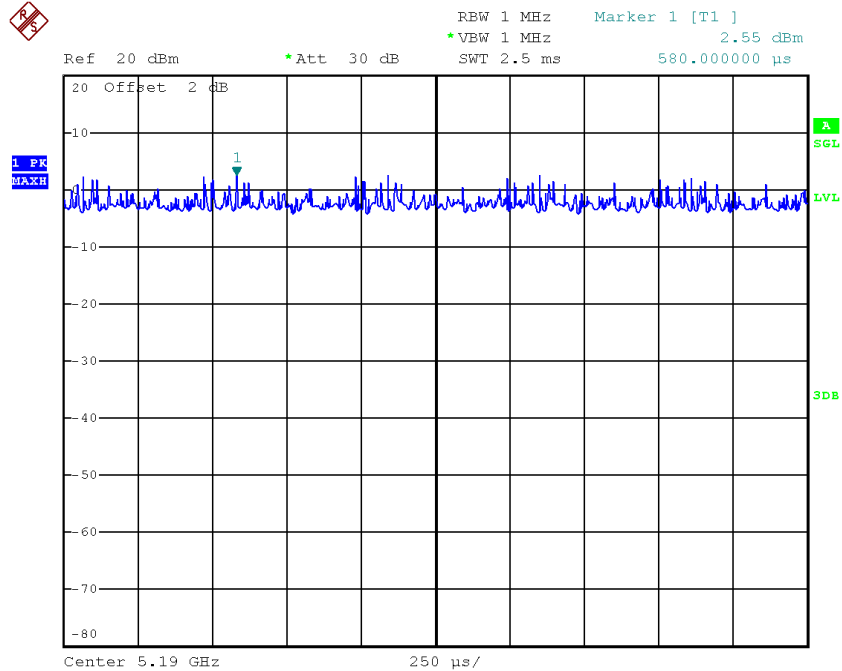

Date: 16.OCT.2018 20:29:15

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.

TX AC80 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.500 msec

T_{Total} : 2.500 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

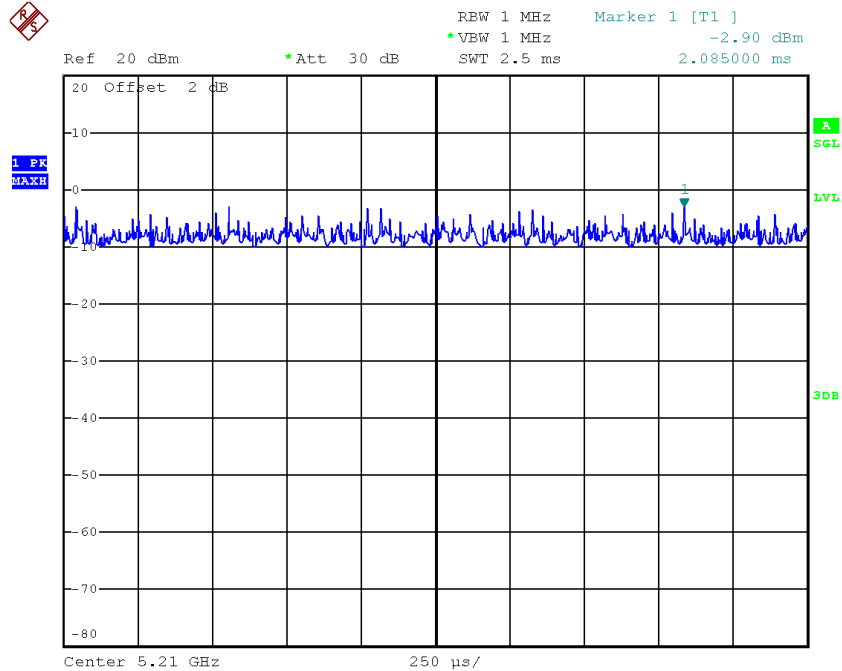

Date: 16.OCT.2018 21:09:44

Note: The duty cycle is $\geq 98\%$ so it is not required to calculate Duty Factor.


APPENDIX E - BANDWIDTH

Beamforming

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	26.99	17.10
CH40	5200	38.99	23.40
CH48	5240	46.59	33.80

TX CH36

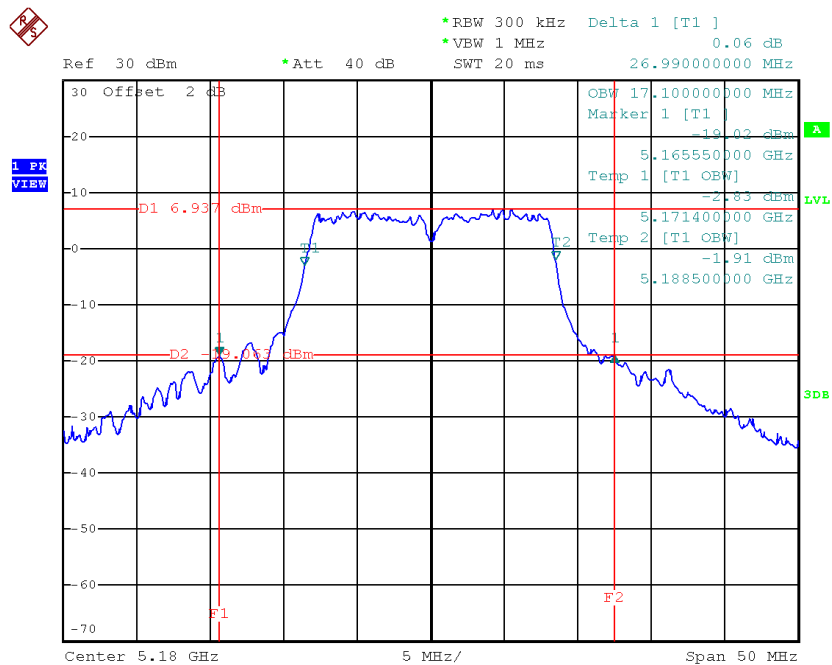


Date: 16.OCT.2018 09:57:30

TX CH40

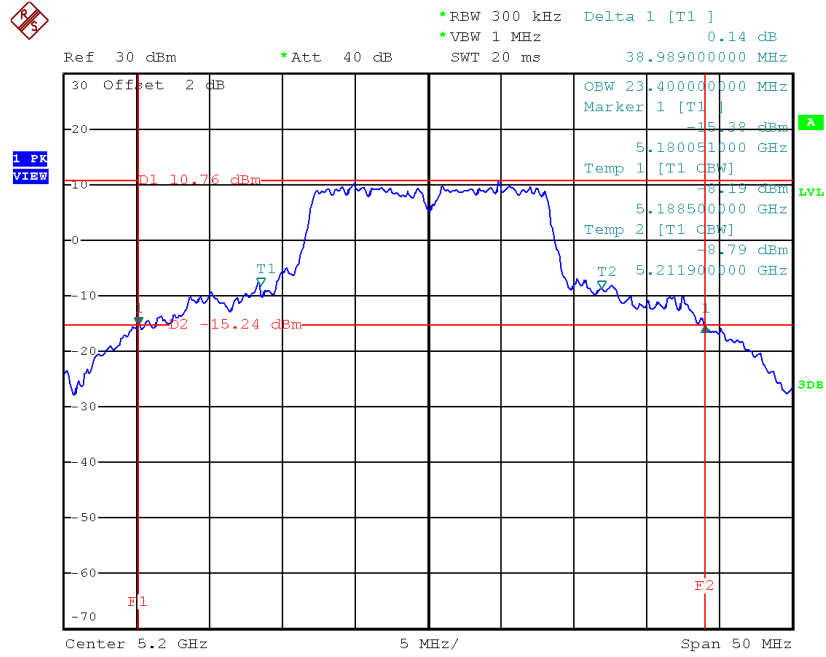

Date: 16.OCT.2018 10:06:15

TX CH48

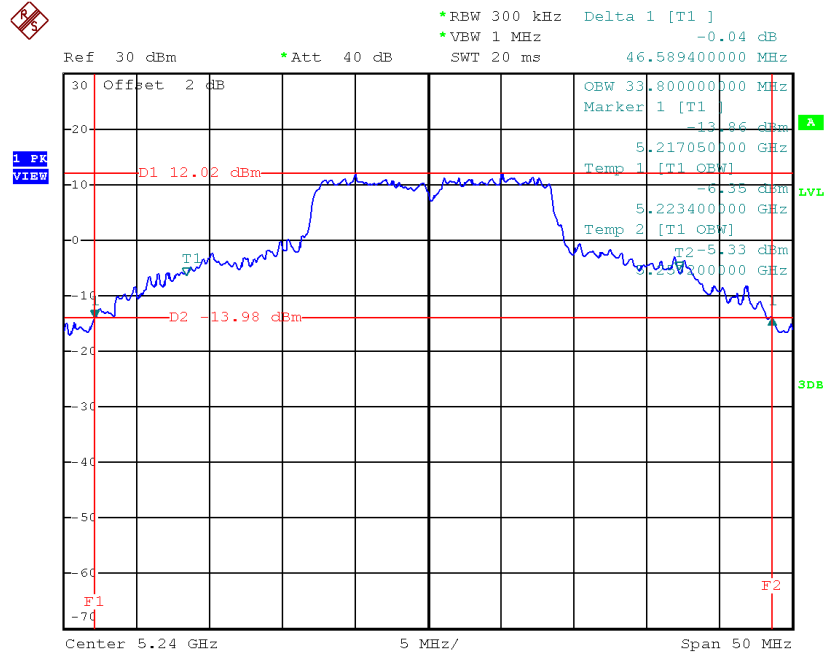


Date: 17.OCT.2018 17:41:43

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.19	18.00
CH40	5200	42.99	21.00
CH48	5240	46.50	31.40

TX CH36

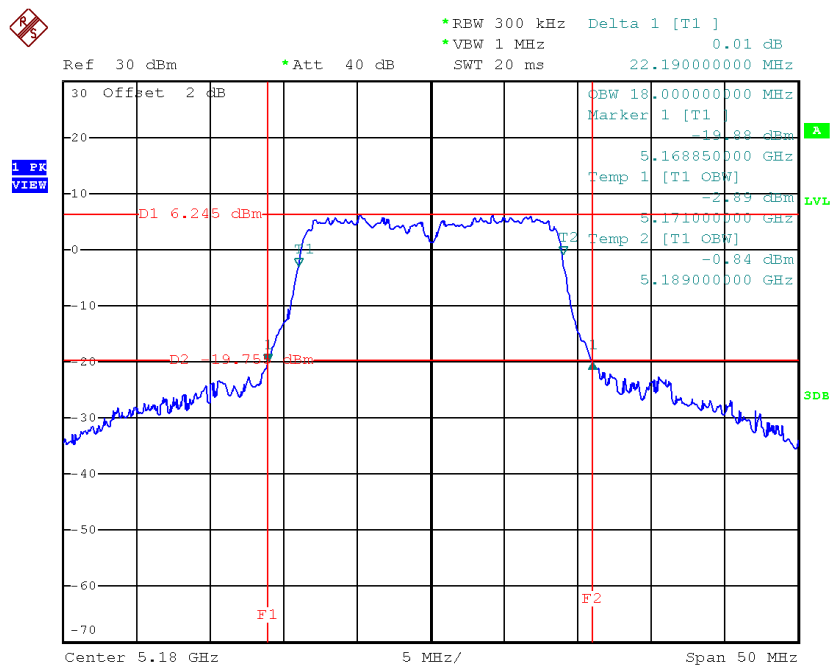


Date: 16.OCT.2018 17:27:07

TX CH40

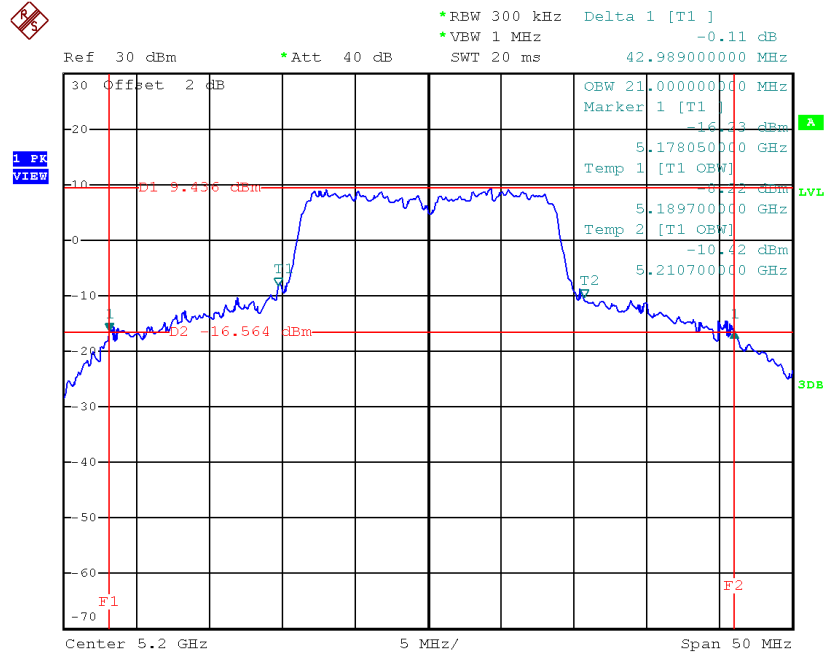

Date: 16.OCT.2018 17:30:29

TX CH48

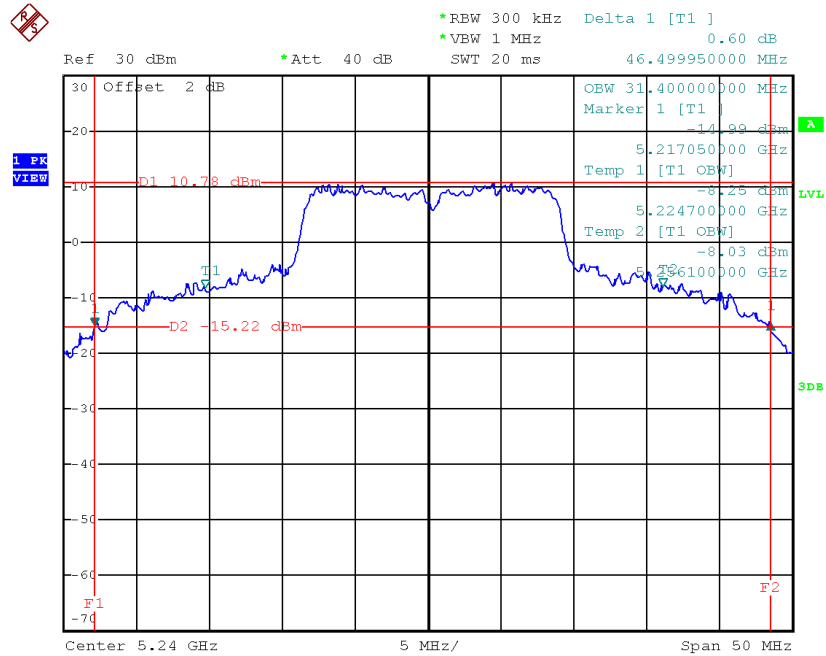


Date: 17.OCT.2018 18:02:16

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	44.59	37.20
CH46	5230	69.99	38.00

TX CH38

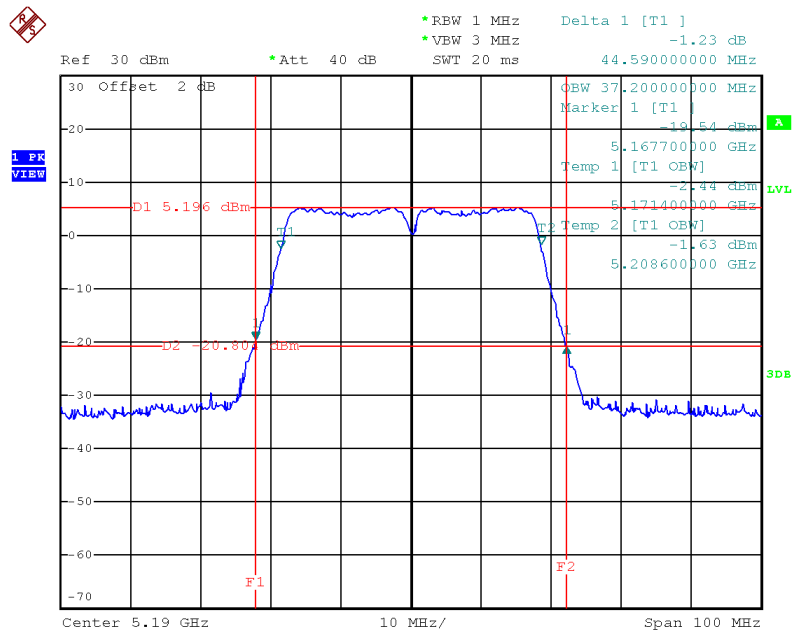


Date: 16.OCT.2018 19:43:49

TX CH46

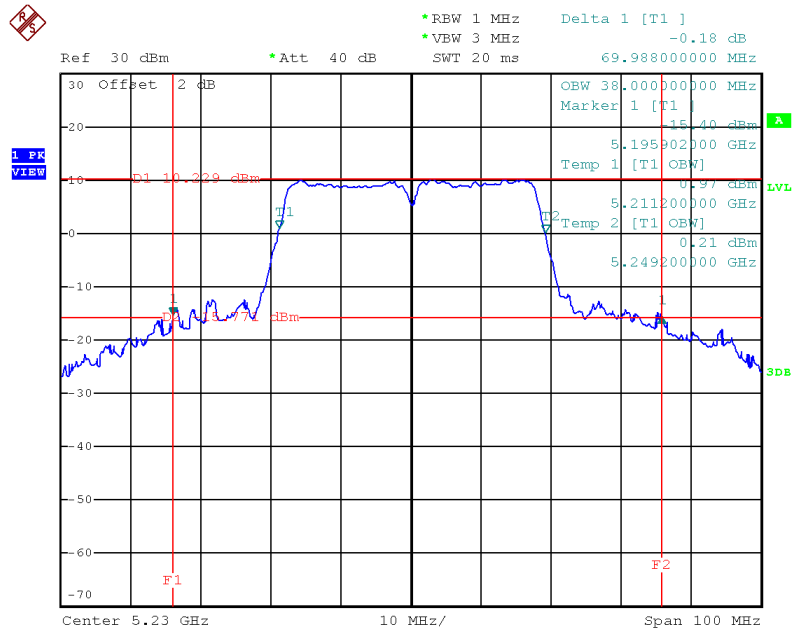


Date: 16.OCT.2018 19:50:18

TX CH116

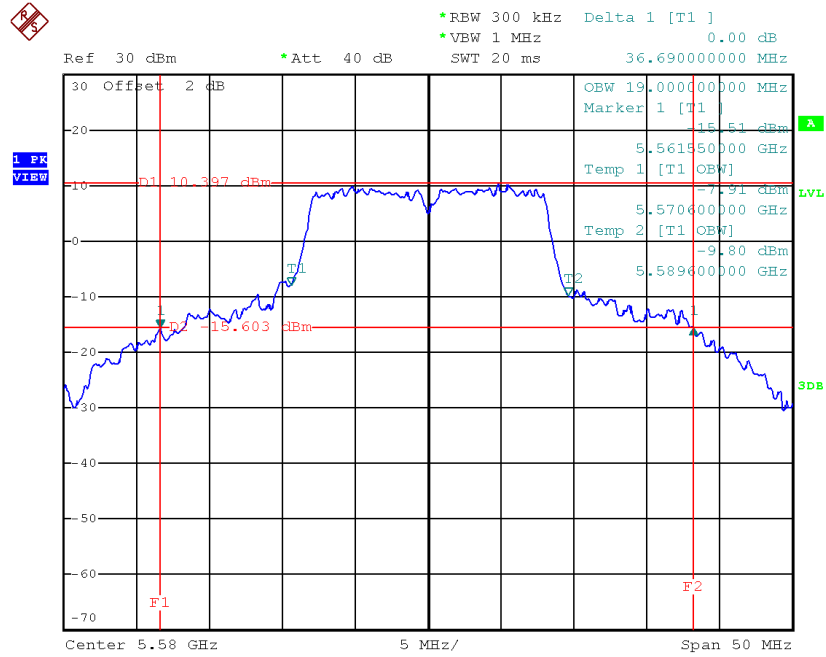

Date: 16.OCT.2018 17:12:57

TX CH140

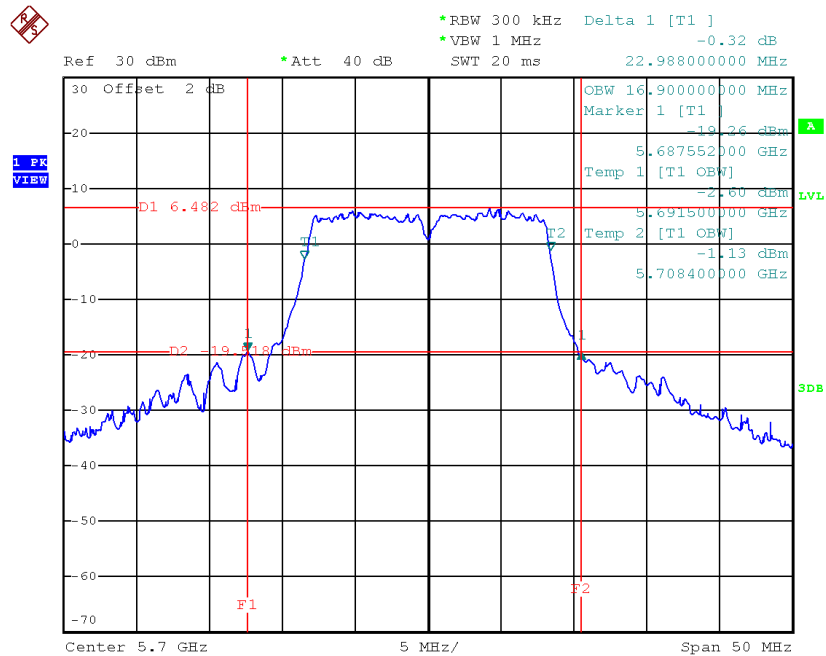


Date: 16.OCT.2018 17:20:52

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.60	38.40	>=500
CH157	5785	16.49	35.10	>=500
CH165	5825	16.65	35.50	>=500

TX CH 149

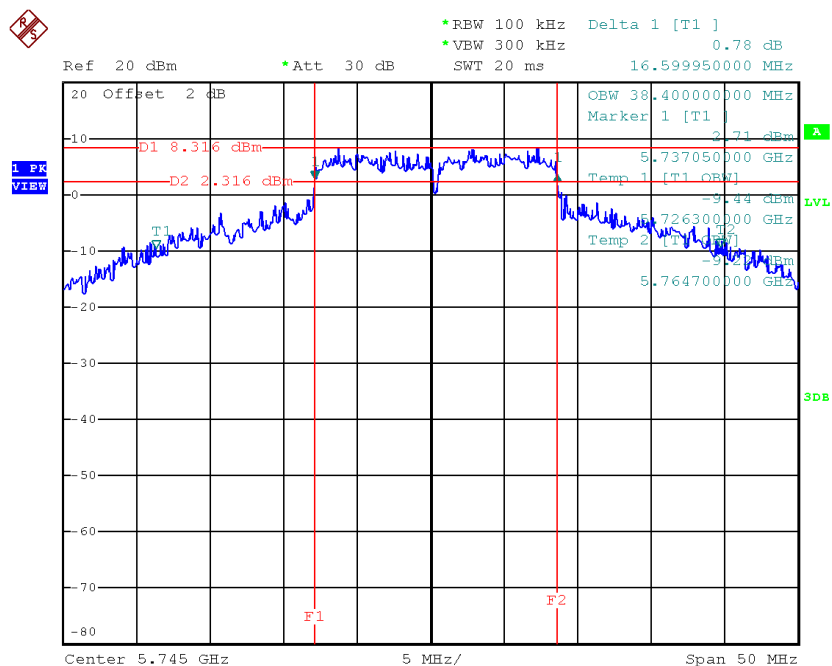


Date: 16.OCT.2018 22:40:46

TX CH 157

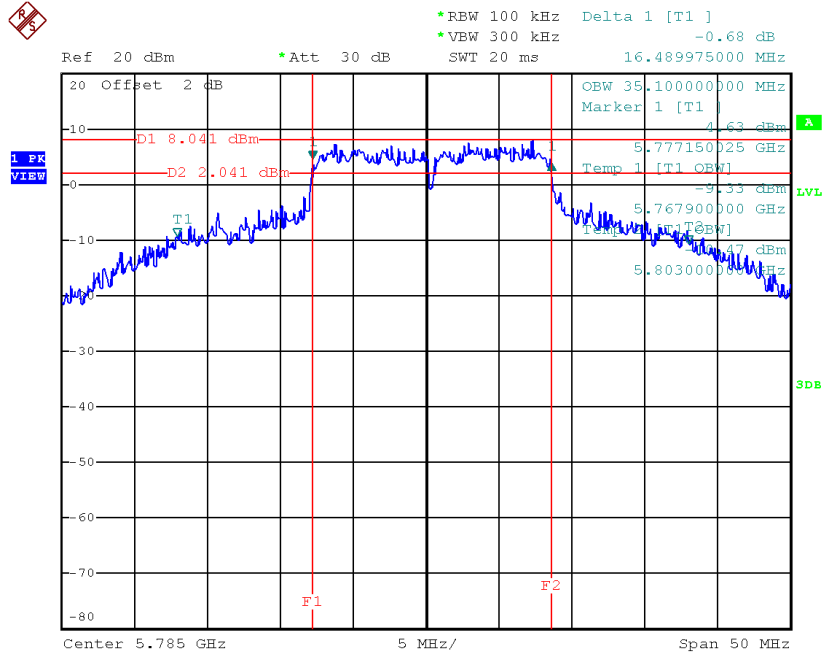

Date: 16.OCT.2018 22:42:52

TX CH 165

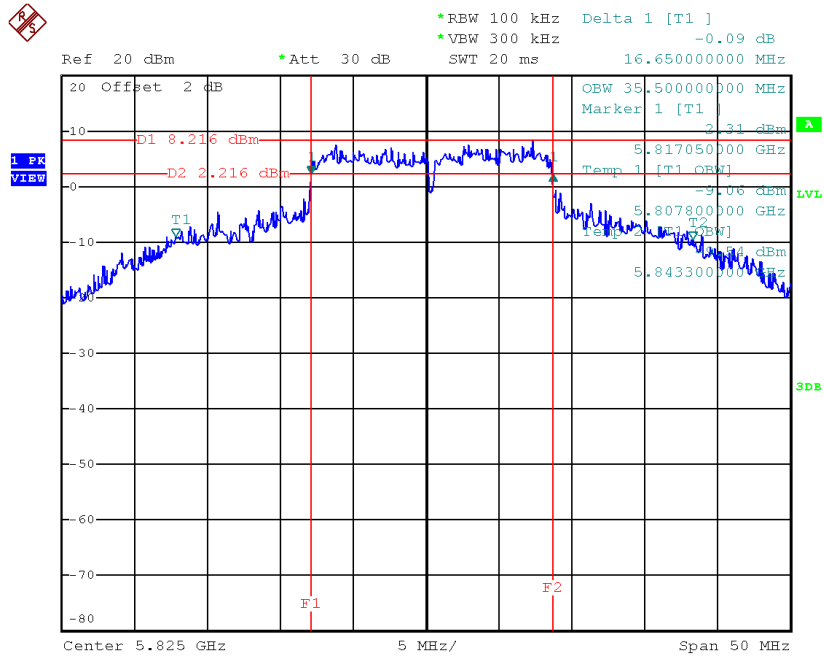


Date: 16.OCT.2018 22:47:14

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.90	40.10	>=500
CH157	5785	17.81	40.00	>=500
CH165	5825	17.80	40.10	>=500

TX CH 149

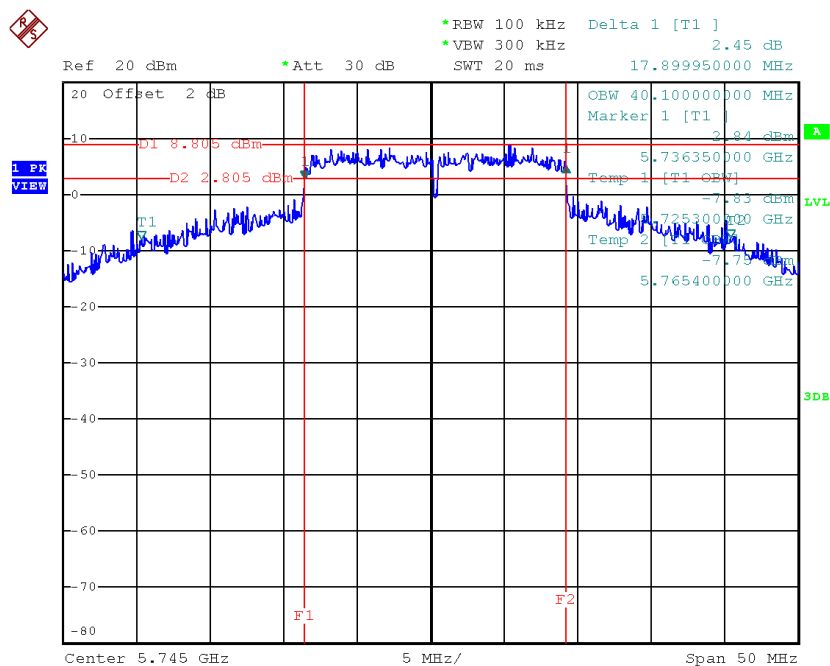


Date: 17.OCT.2018 13:44:35

TX CH 157

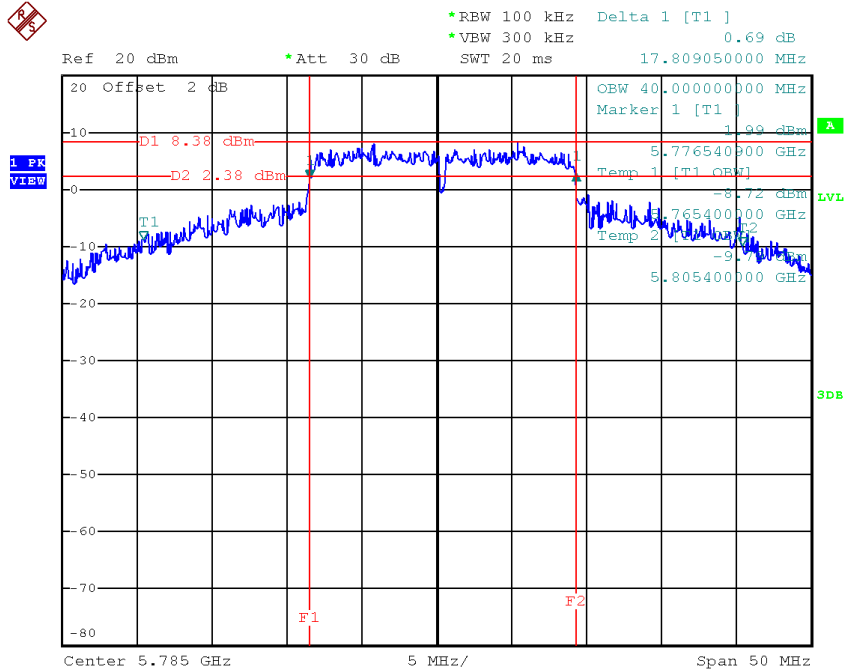

Date: 17.OCT.2018 13:27:20

TX CH 165

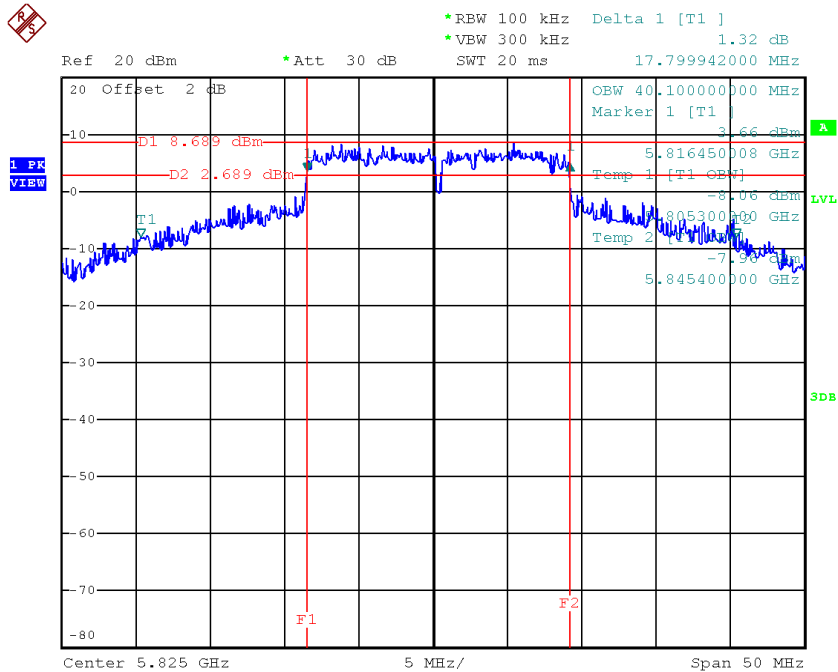


Date: 17.OCT.2018 13:35:34

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.70	64.40	≥ 500
CH159	5795	36.70	72.40	≥ 500

TX CH 151

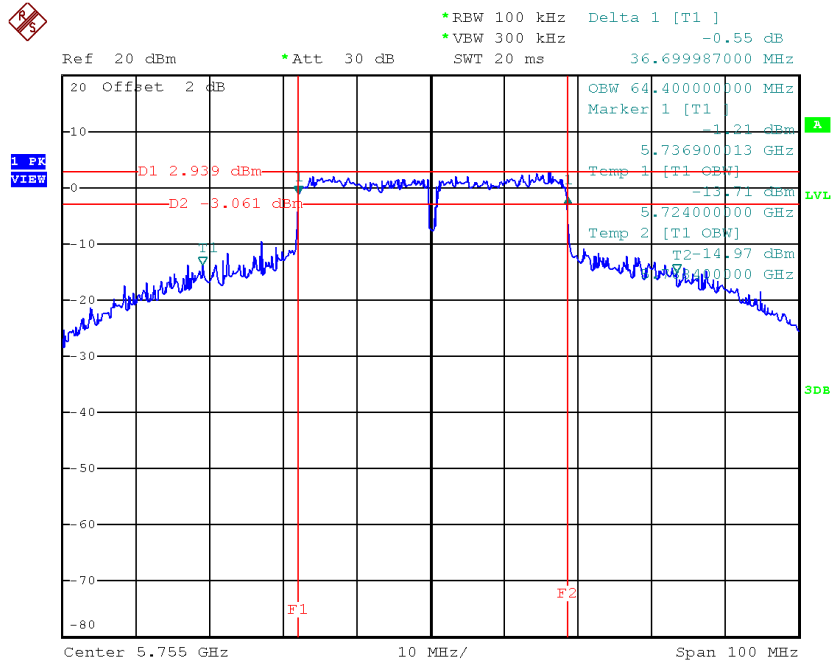

Date: 16.OCT.2018 22:32:30

TX CH 159

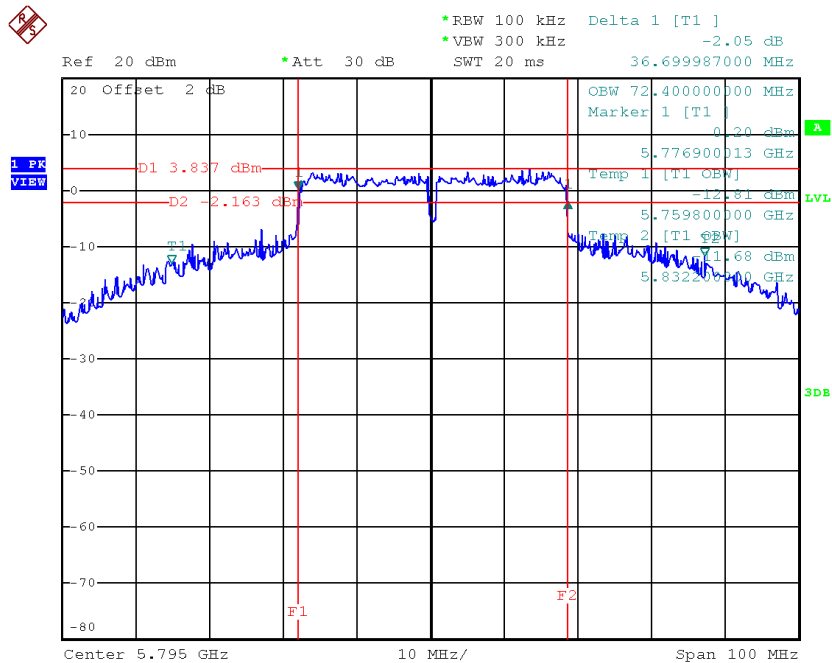


Date: 16.OCT.2018 22:29:17

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.89	18.00
CH40	5200	42.45	23.10
CH48	5240	47.99	33.90

TX CH36

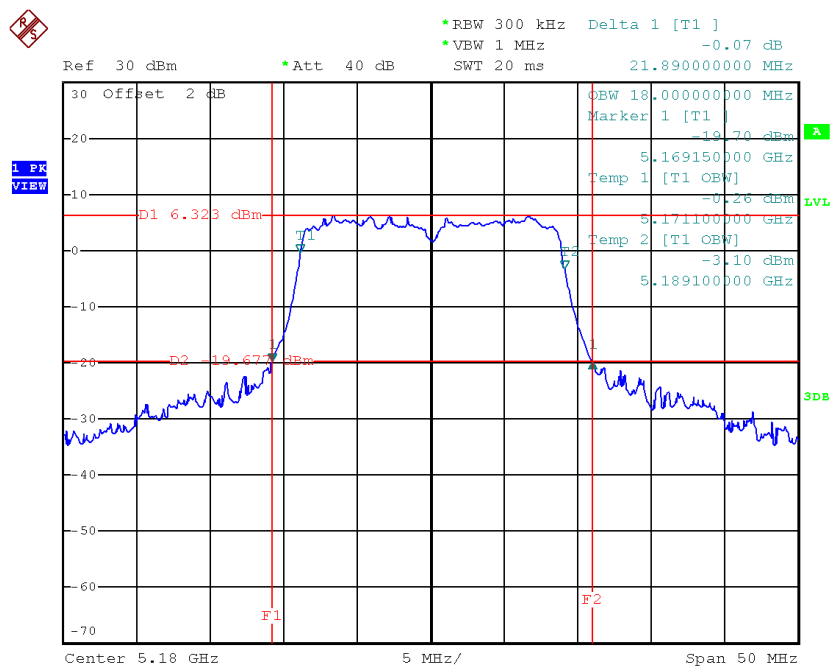


Date: 16.OCT.2018 18:13:28

TX CH40

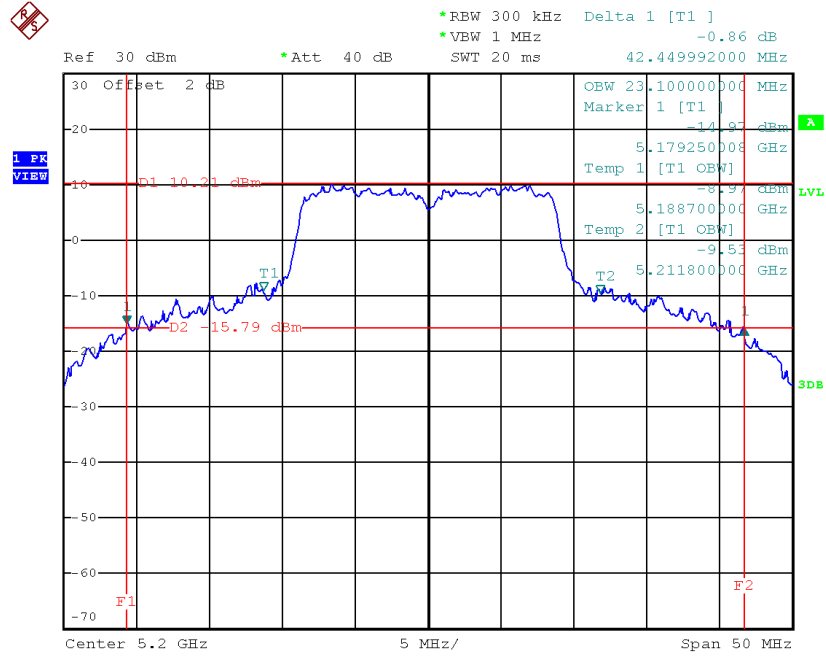

Date: 16.OCT.2018 18:15:18

TX CH48

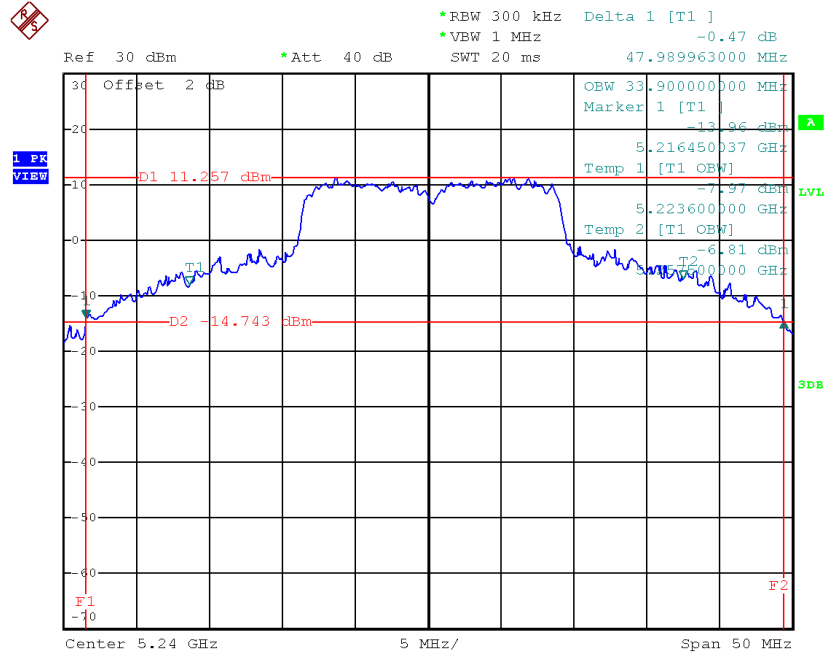


Date: 17.OCT.2018 18:07:58

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	44.50	37.20
CH46	5230	59.39	37.60

TX CH38

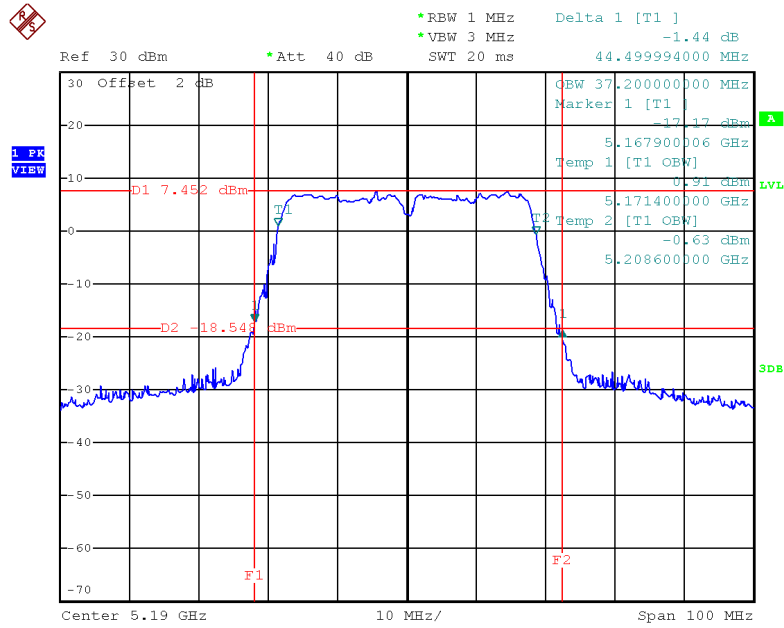

Date: 16.OCT.2018 20:32:13


TX CH46

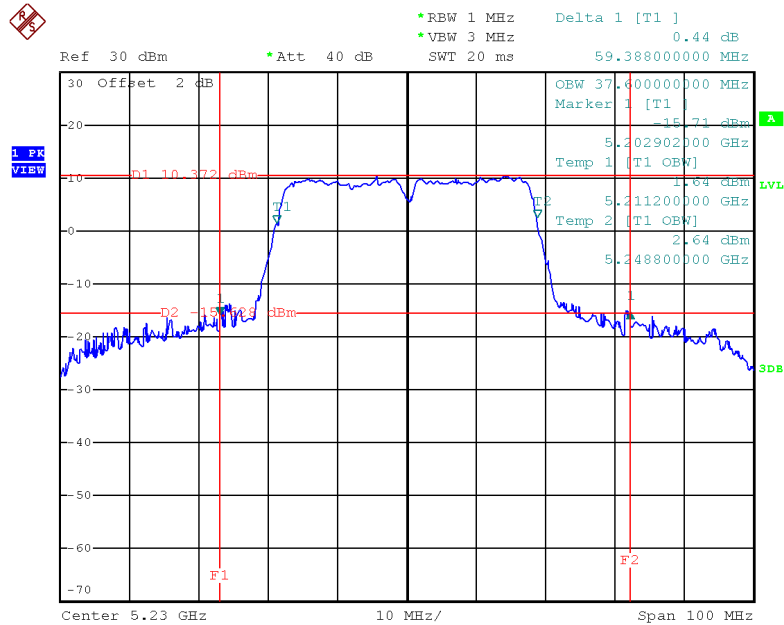

Date: 16.OCT.2018 20:41:33

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	84.00	76.40

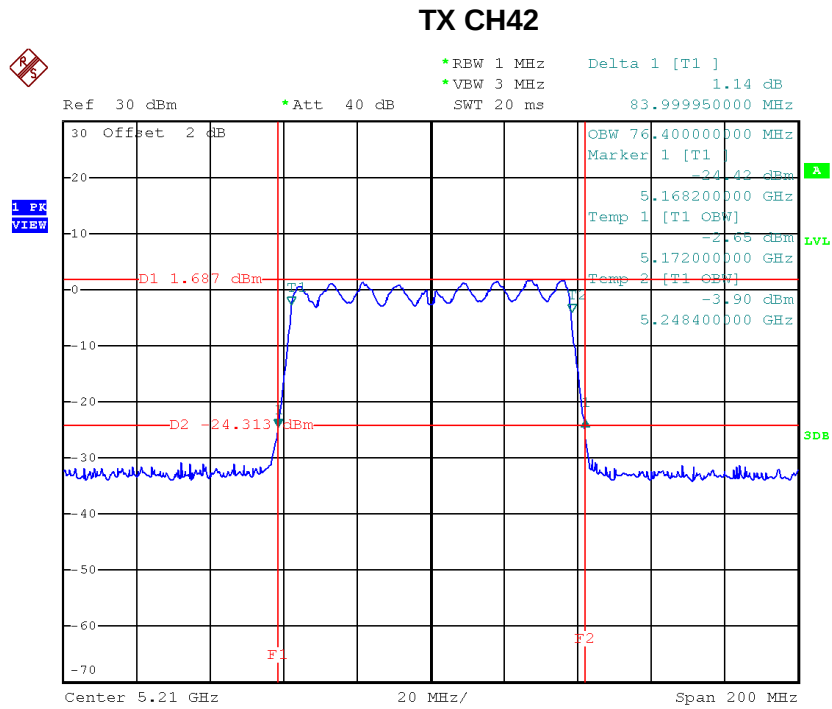


Date: 16.OCT.2018 21:12:18

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	39.20	>=500
CH157	5785	17.80	36.50	>=500
CH165	5825	17.79	39.60	>=500

TX CH 149

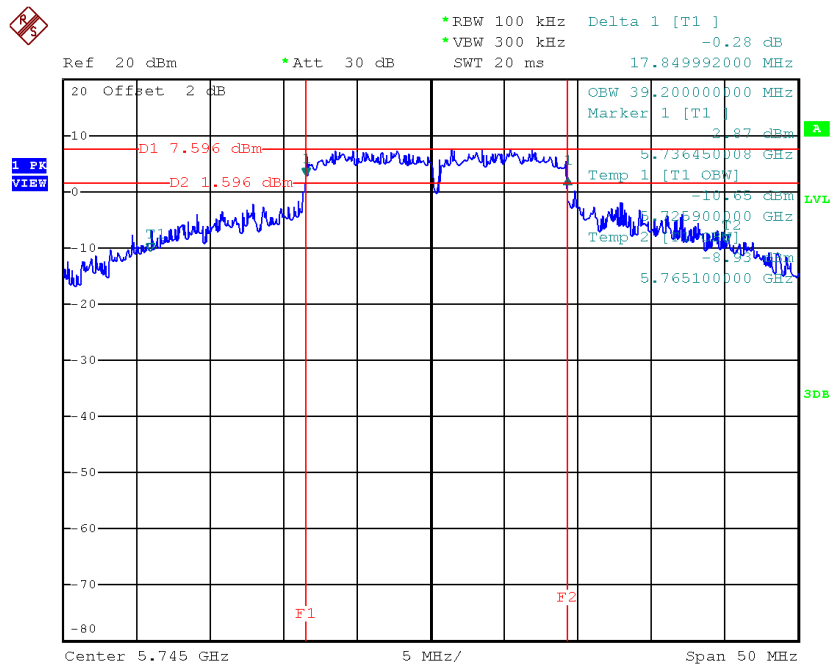


Date: 17.OCT.2018 13:48:57

TX CH 157

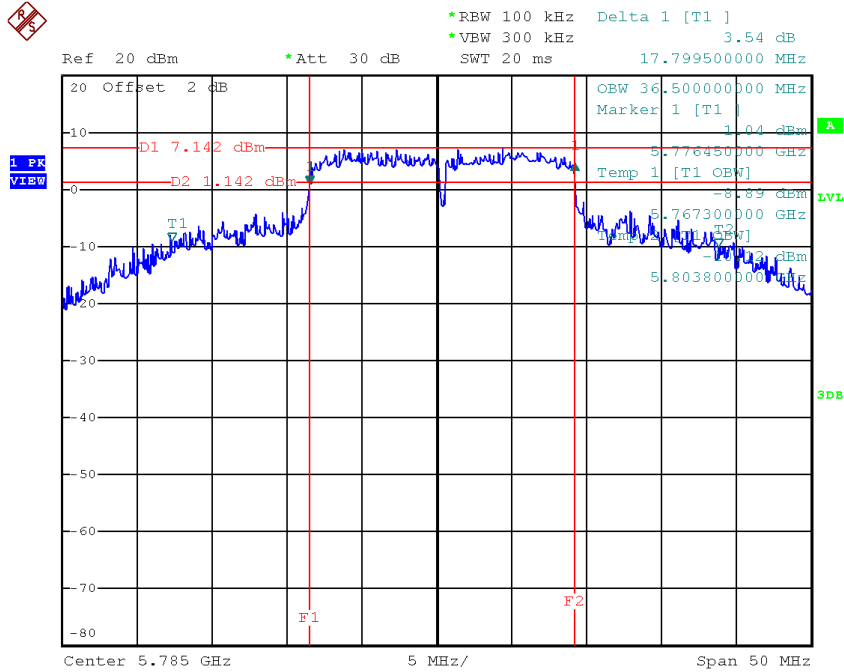

Date: 17.OCT.2018 14:20:31

TX CH 165

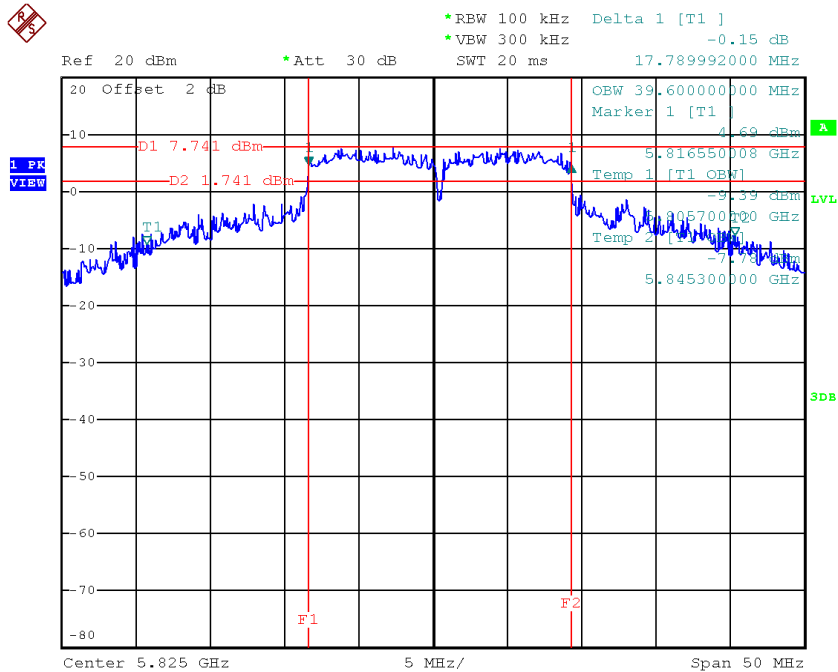


Date: 17.OCT.2018 14:34:10

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.70	50.20	≥ 500
CH159	5795	36.70	74.60	≥ 500

TX CH 151

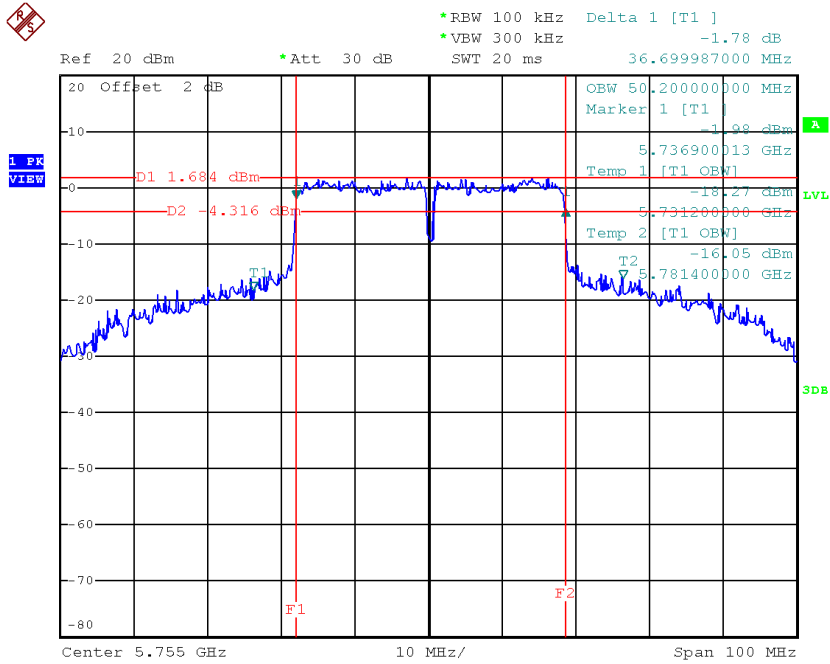

Date: 16.OCT.2018 22:16:17

TX CH 159

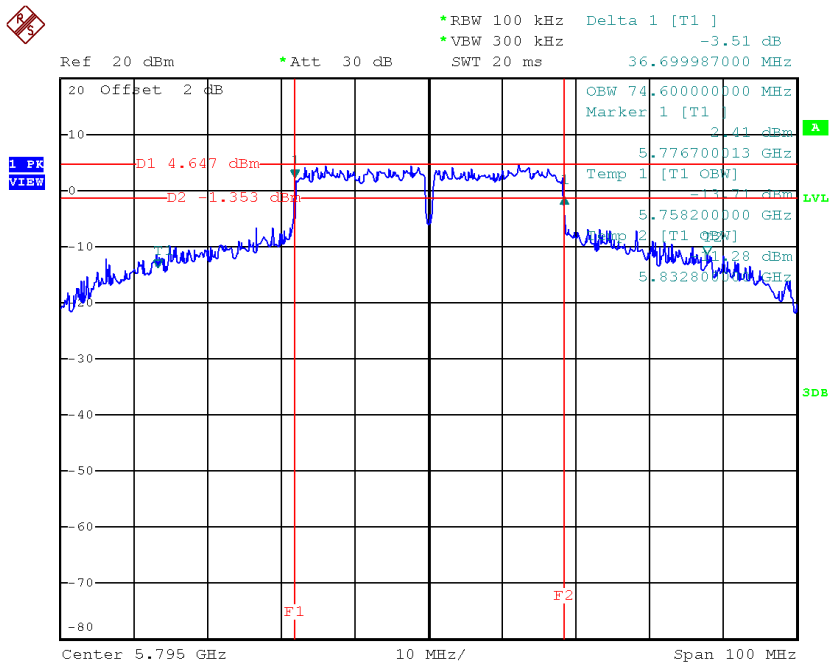


Date: 16.OCT.2018 22:21:29

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.80	76.40	>=500

TX CH 155

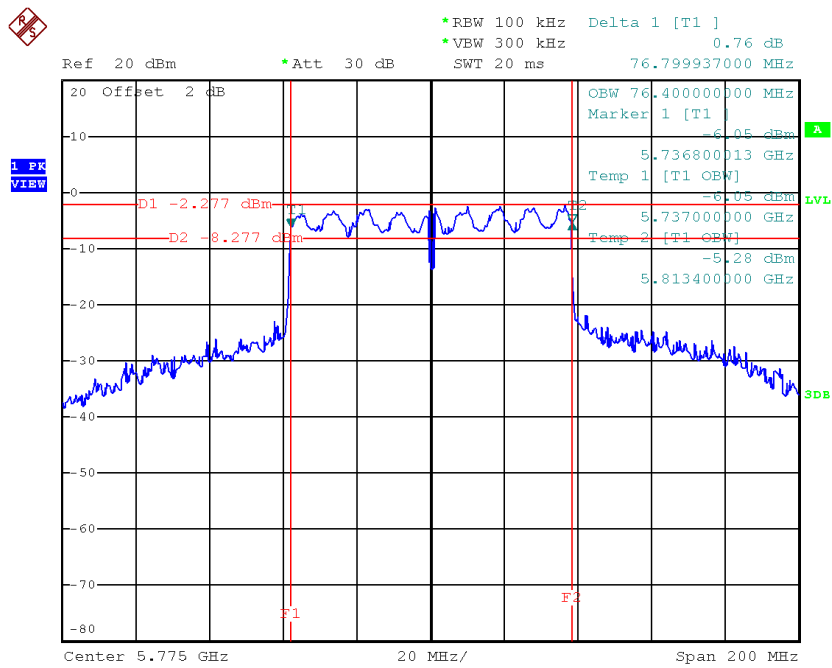

Date: 16.OCT.2018 22:08:06

APPENDIX F - MAXIMUM OUTPUT POWER

Beamforming

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.51	0.00	17.51	30.00	1.00
CH40	5200	20.84	0.00	20.84	30.00	1.00
CH48	5240	22.19	0.00	22.19	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.64	0.00	17.64	30.00	1.00
CH40	5200	20.55	0.00	20.55	30.00	1.00
CH48	5240	22.64	0.00	22.64	30.00	1.00

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.59	30.00	1.00
CH40	5200	23.71	30.00	1.00
CH48	5240	25.43	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.39	0.00	16.39	30.00	1.00
CH40	5200	20.54	0.00	20.54	30.00	1.00
CH48	5240	22.19	0.00	22.19	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.72	0.00	16.72	30.00	1.00
CH40	5200	20.65	0.00	20.65	30.00	1.00
CH48	5240	22.66	0.00	22.66	30.00	1.00

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.57	30.00	1.00
CH40	5200	23.61	30.00	1.00
CH48	5240	25.44	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.75	0.00	13.75	30.00	1.00
CH46	5230	19.21	0.00	19.21	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.15	0.00	13.15	30.00	1.00
CH46	5230	18.76	0.00	18.76	30.00	1.00

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.47	30.00	1.00
CH46	5230	22.00	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.69	0.00	22.69	30.00	1.00
CH157	5785	22.88	0.00	22.88	30.00	1.00
CH165	5825	22.45	0.00	22.45	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.90	0.00	22.90	30.00	1.00
CH157	5785	23.45	0.00	23.45	30.00	1.00
CH165	5825	22.88	0.00	22.88	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	25.81	30.00	1.00
CH157	5785	26.18	30.00	1.00
CH165	5825	25.68	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.35	0.00	22.35	30.00	1.00
CH157	5785	22.18	0.00	22.18	30.00	1.00
CH165	5825	22.26	0.00	22.26	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.75	0.00	22.75	30.00	1.00
CH157	5785	22.82	0.00	22.82	30.00	1.00
CH165	5825	22.64	0.00	22.64	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	25.56	30.00	1.00
CH157	5785	25.52	30.00	1.00
CH165	5825	25.46	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.34	0.00	21.34	30.00	1.00
CH159	5795	22.64	0.00	22.64	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	22.26	0.00	22.26	30.00	1.00
CH159	5795	22.89	0.00	22.89	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	24.83	30.00	1.00
CH159	5795	25.78	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.74	0.00	16.74	30.00	1.00
CH40	5200	20.64	0.00	20.64	30.00	1.00
CH48	5240	22.88	0.00	22.88	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.72	0.00	16.72	30.00	1.00
CH40	5200	20.36	0.00	20.36	30.00	1.00
CH48	5240	22.93	0.00	22.93	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.74	30.00	1.00
CH40	5200	23.51	30.00	1.00
CH48	5240	25.92	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.56	0.00	14.56	30.00	1.00
CH46	5230	19.26	0.00	19.26	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.65	0.00	14.65	30.00	1.00
CH46	5230	18.78	0.00	18.78	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.62	30.00	1.00
CH46	5230	22.04	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.96	0.00	12.96	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.62	0.00	12.62	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.80	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	23.48	0.00	23.48	30.00	1.00
CH157	5785	23.48	0.00	23.48	30.00	1.00
CH165	5825	22.91	0.00	22.91	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	23.39	0.00	23.39	30.00	1.00
CH157	5785	23.92	0.00	23.92	30.00	1.00
CH165	5825	23.17	0.00	23.17	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	26.45	30.00	1.00
CH157	5785	26.72	30.00	1.00
CH165	5825	26.05	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.47	0.00	21.47	30.00	1.00
CH159	5795	22.16	0.00	22.16	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	22.42	0.00	22.42	30.00	1.00
CH159	5795	22.95	0.00	22.95	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	24.98	30.00	1.00
CH159	5795	25.58	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	18.59	0.00	18.59	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	19.41	0.00	19.41	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	22.03	30.00	1.00

APPENDIX G - POWER SPECTRAL DENSITY

Beamforming


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.17	0.00	4.17	17.00
CH40	5200	7.41	0.00	7.41	17.00
CH48	5240	8.74	0.00	8.74	17.00

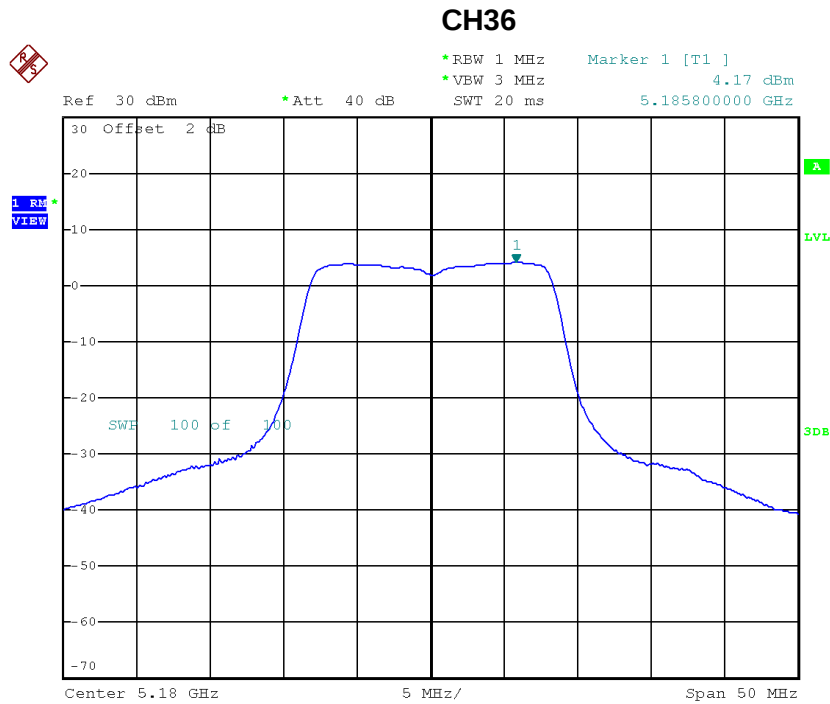


Date: 16.OCT.2018 09:57:39

CH40

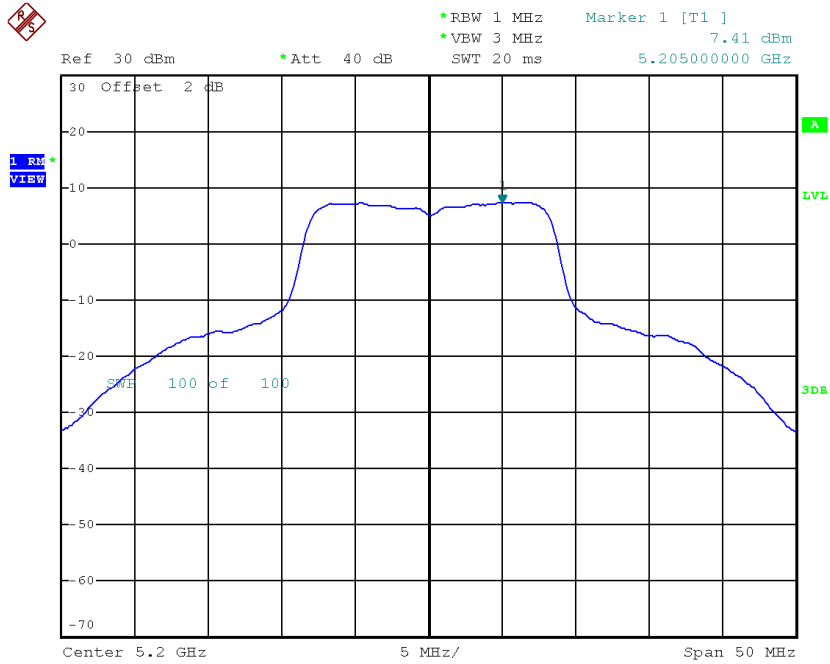

Date: 16.OCT.2018 10:06:23


CH48

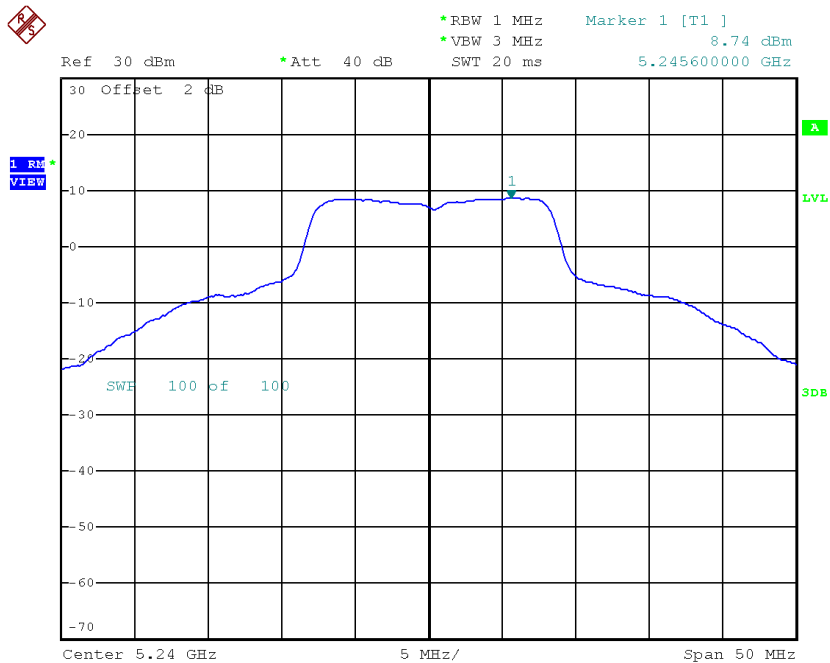

Date: 17.OCT.2018 17:41:52


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.92	0.00	3.92	17.00
CH40	5200	7.87	0.00	7.87	17.00
CH48	5240	8.80	0.00	8.80	17.00

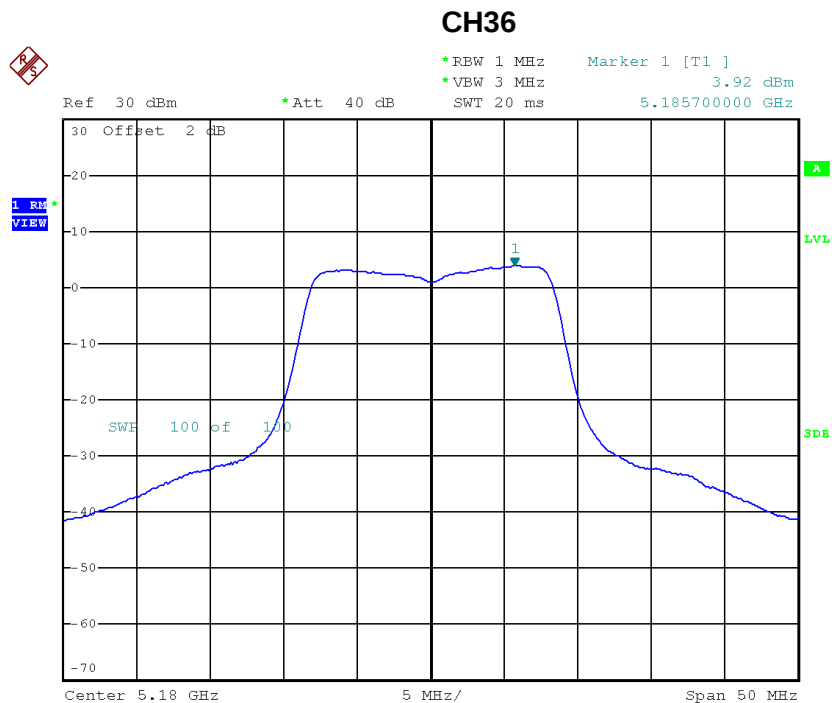


Date: 16.OCT.2018 10:00:14

CH40

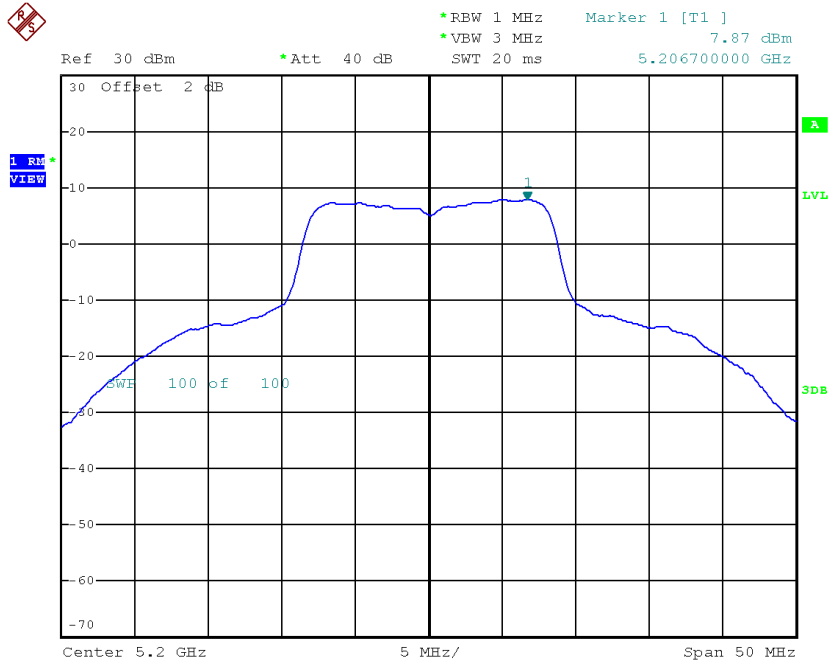

Date: 16.OCT.2018 10:05:10

CH48

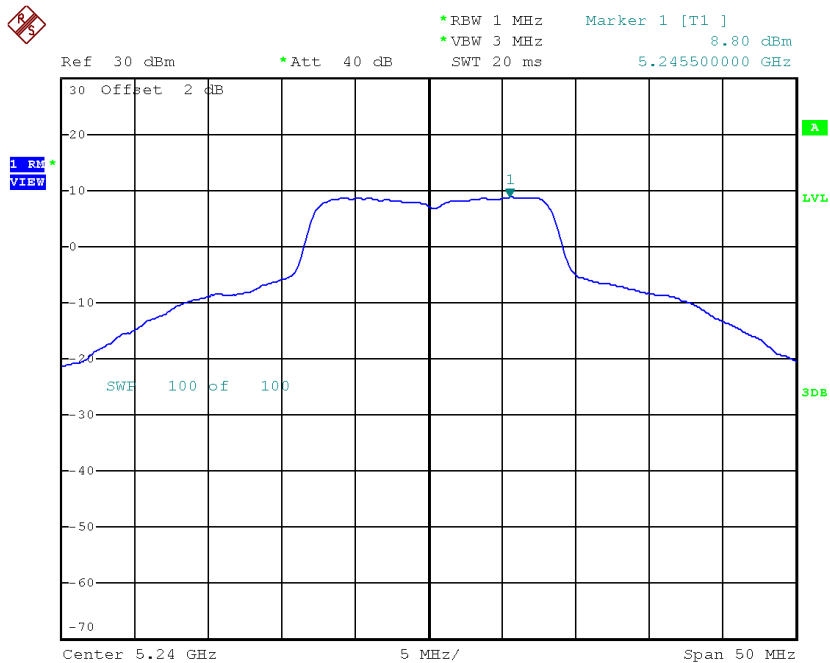


Date: 17.OCT.2018 17:43:12

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.06	17.00
CH40	5200	10.66	17.00
CH48	5240	11.78	17.00


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.29	0.00	3.29	17.00
CH40	5200	6.33	0.00	6.33	17.00
CH48	5240	7.62	0.00	7.62	17.00

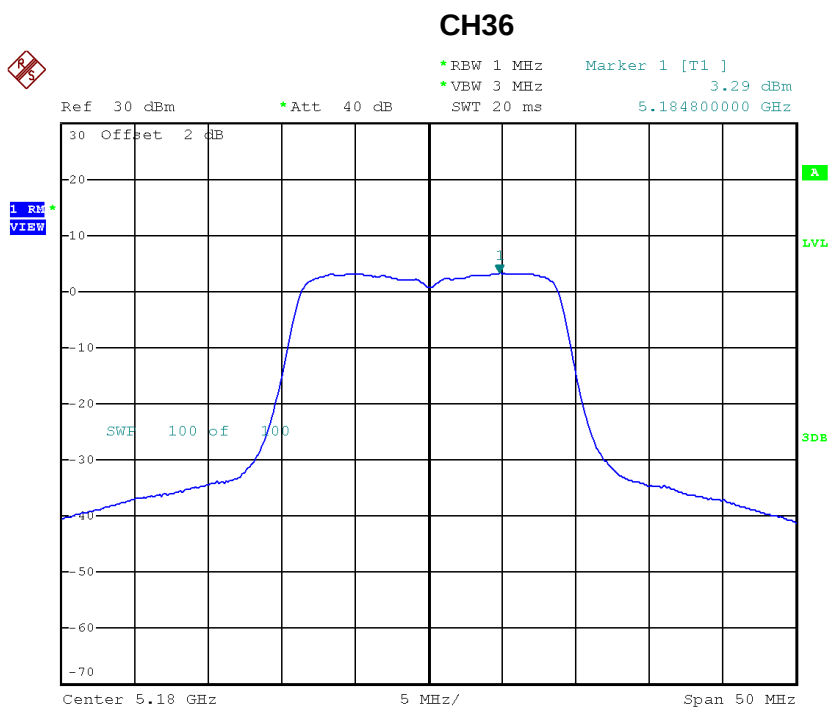


Date: 16.OCT.2018 17:27:16

CH40

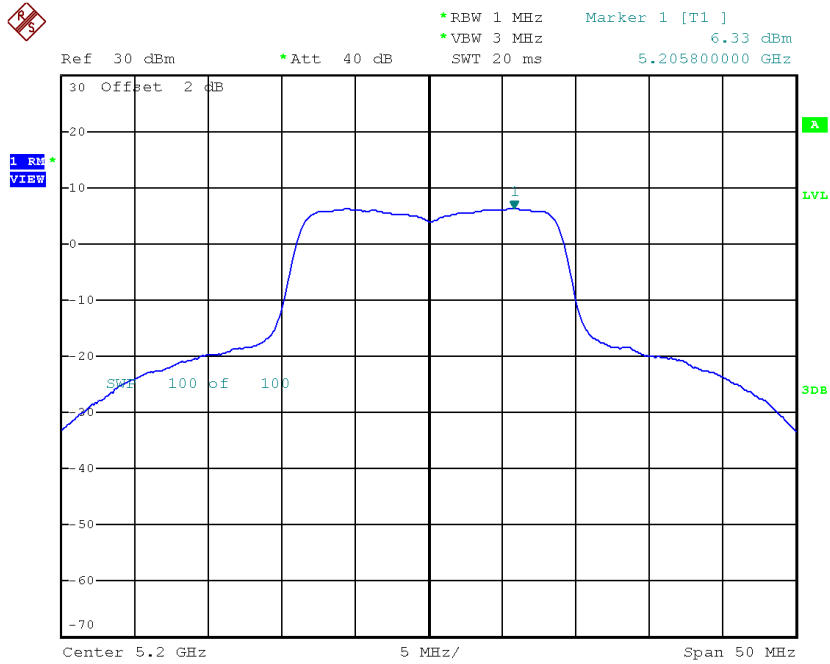

Date: 16.OCT.2018 17:30:37

CH48

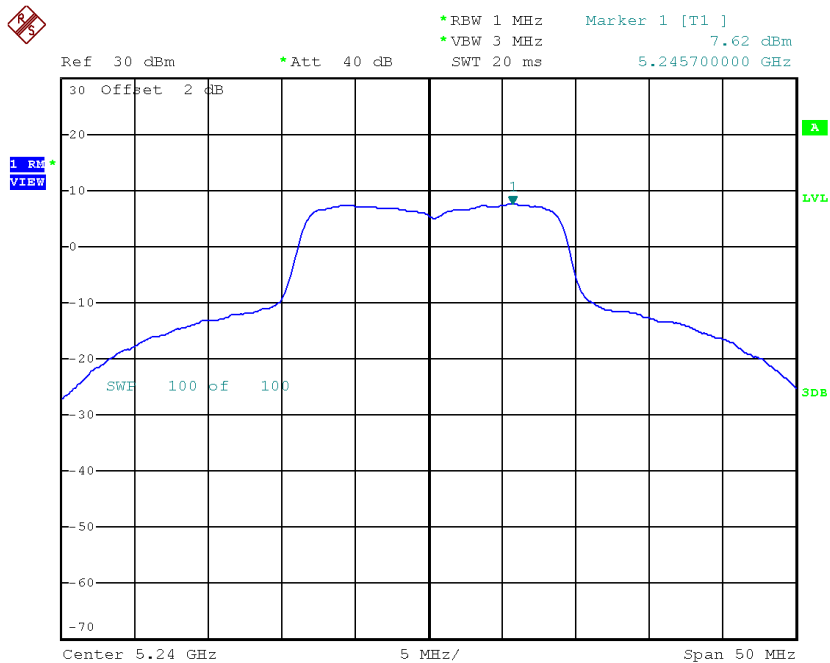


Date: 17.OCT.2018 18:04:41

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.50	0.00	2.50	17.00
CH40	5200	6.67	0.00	6.67	17.00
CH48	5240	8.19	0.00	8.19	17.00

CH36

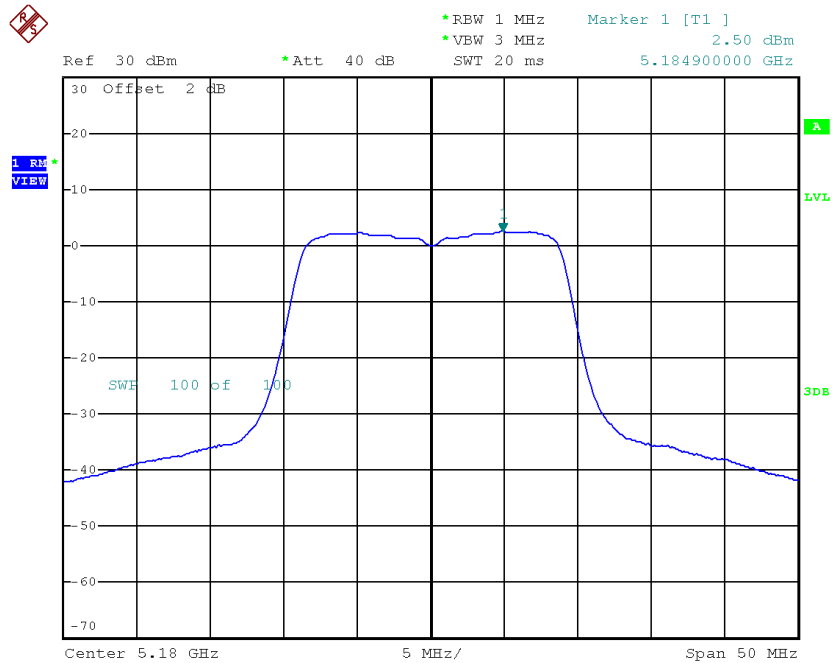


Date: 16.OCT.2018 17:28:28

CH40

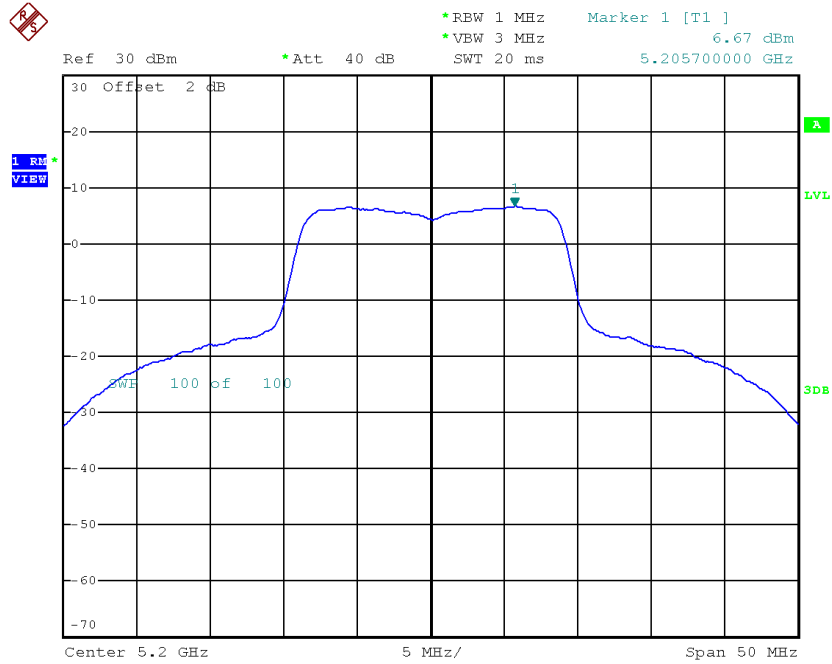

Date: 16.OCT.2018 17:29:45

CH48

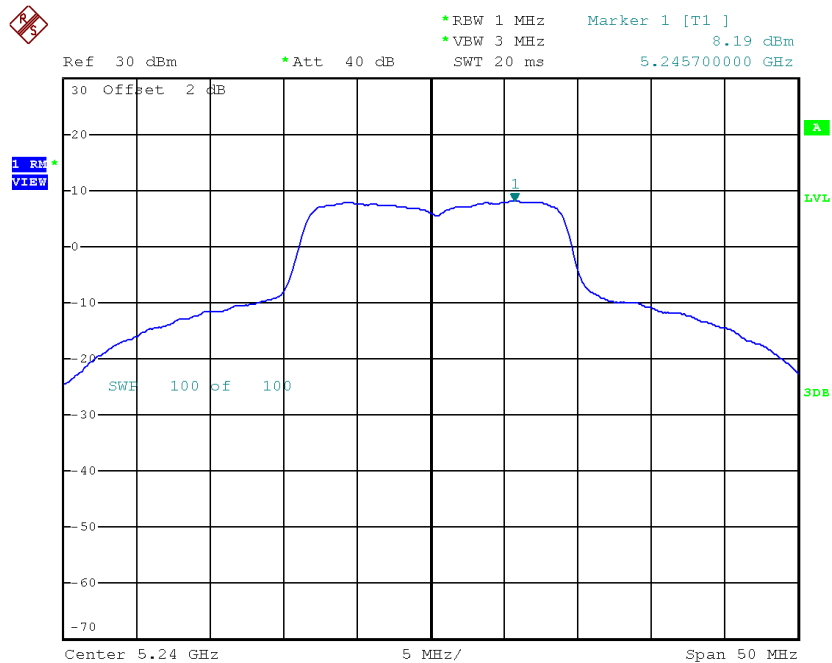

Date: 17.OCT.2018 18:04:05


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.92	17.00
CH40	5200	9.51	17.00
CH48	5240	10.92	17.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-3.36	0.00	-3.36	17.00
CH46	5230	1.72	0.00	1.72	17.00

CH38

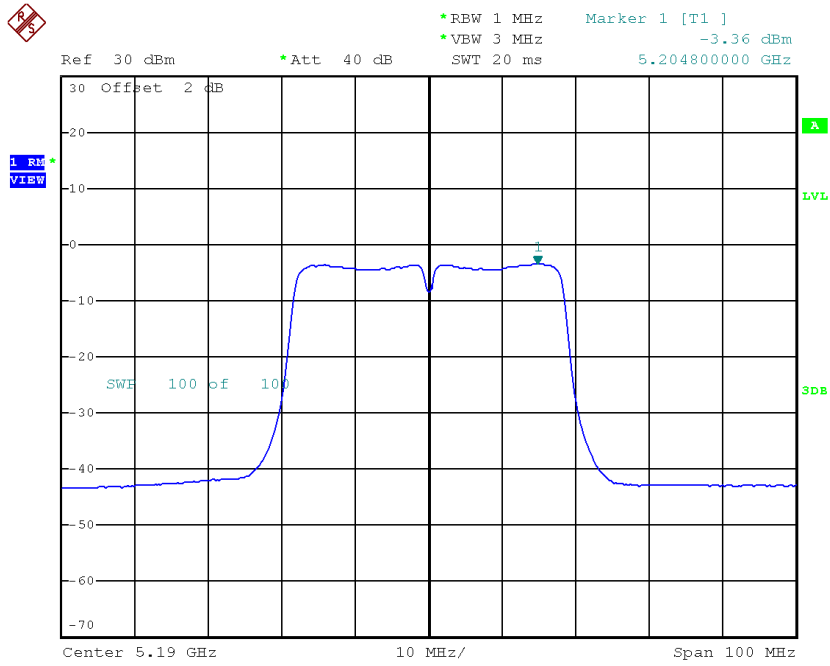

Date: 16.OCT.2018 19:44:00

CH46

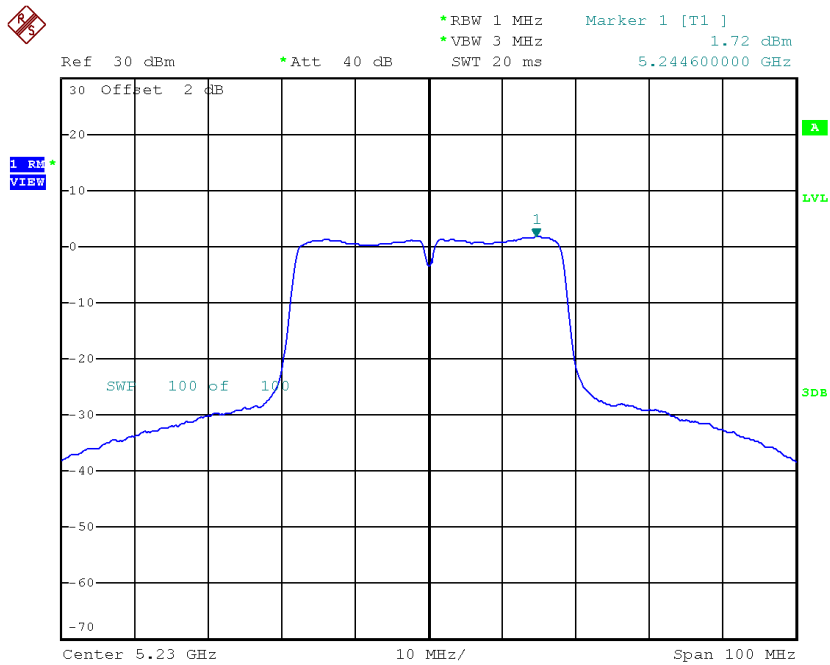


Date: 16.OCT.2018 19:50:29

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.13	0.00	-4.13	17.00
CH46	5230	1.36	0.00	1.36	17.00

CH38

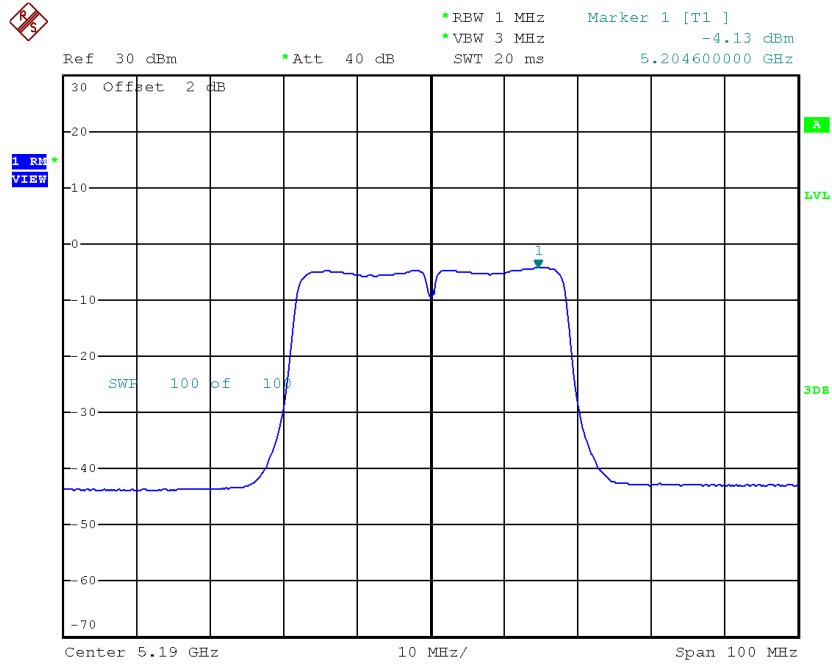

Date: 16.OCT.2018 19:45:26

CH46

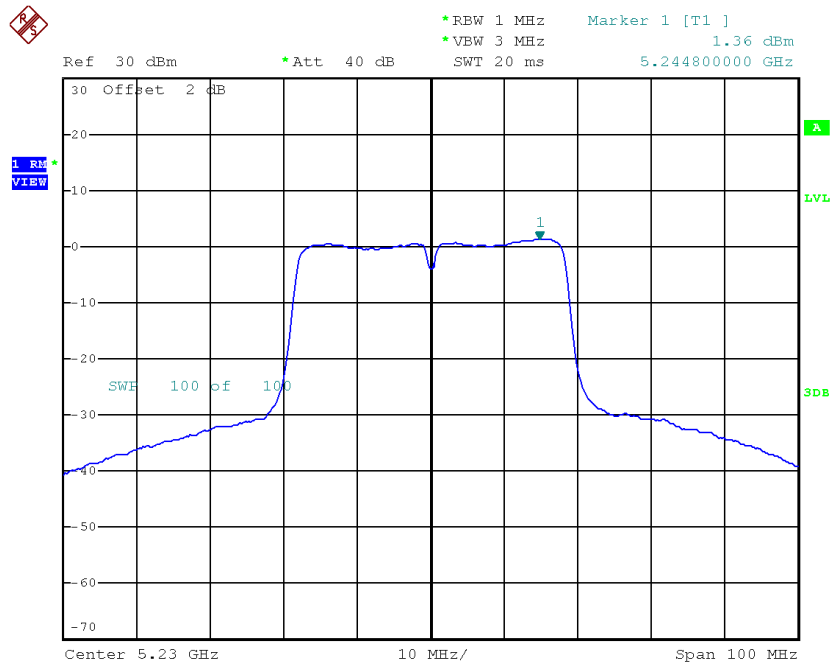

Date: 16.OCT.2018 19:52:21


Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-0.72	17.00
CH46	5230	4.55	17.00

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.57	0.00	6.57	30.00
CH157	5785	6.24	0.00	6.24	30.00
CH165	5825	6.36	0.00	6.36	30.00

TX CH149

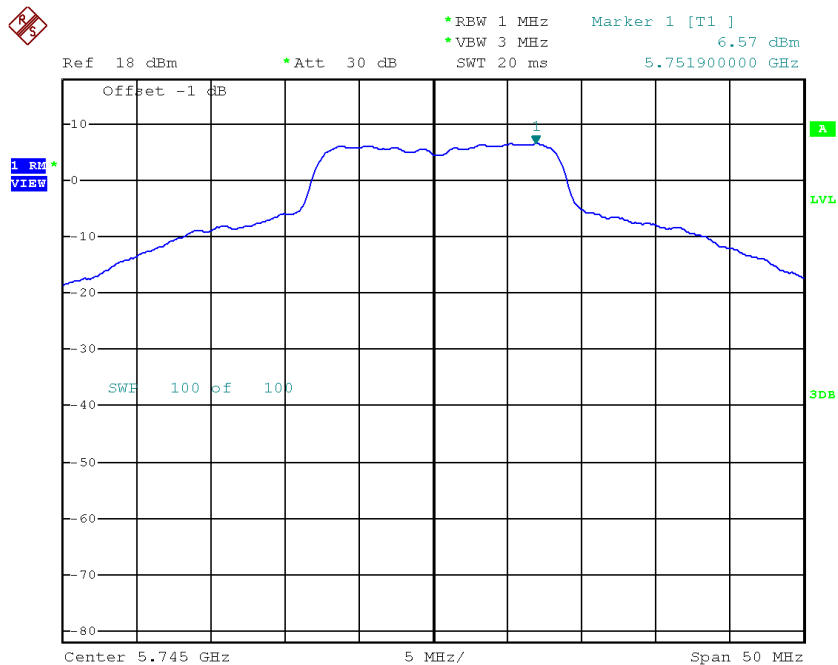


Date: 16.OCT.2018 22:40:54

TX CH157

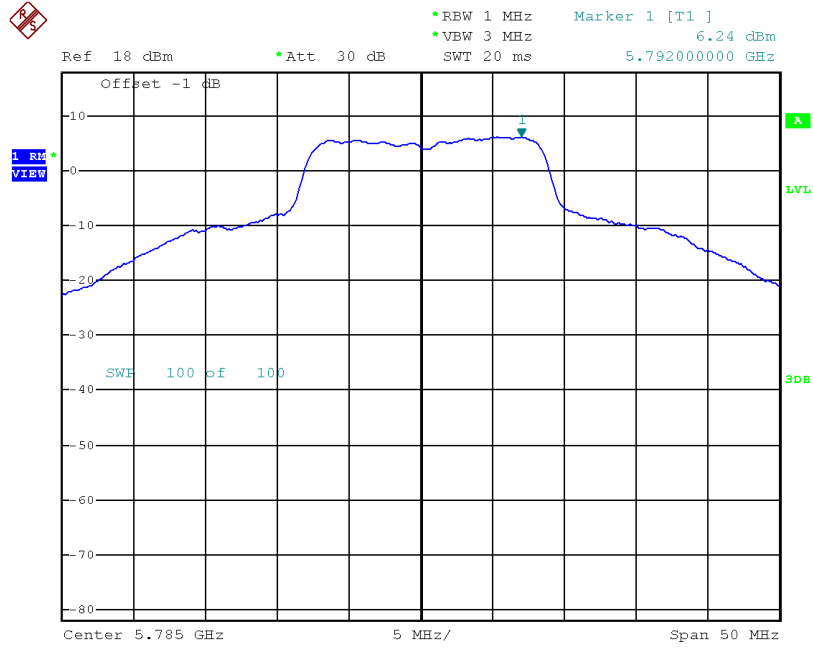

Date: 16.OCT.2018 22:43:00

TX CH165

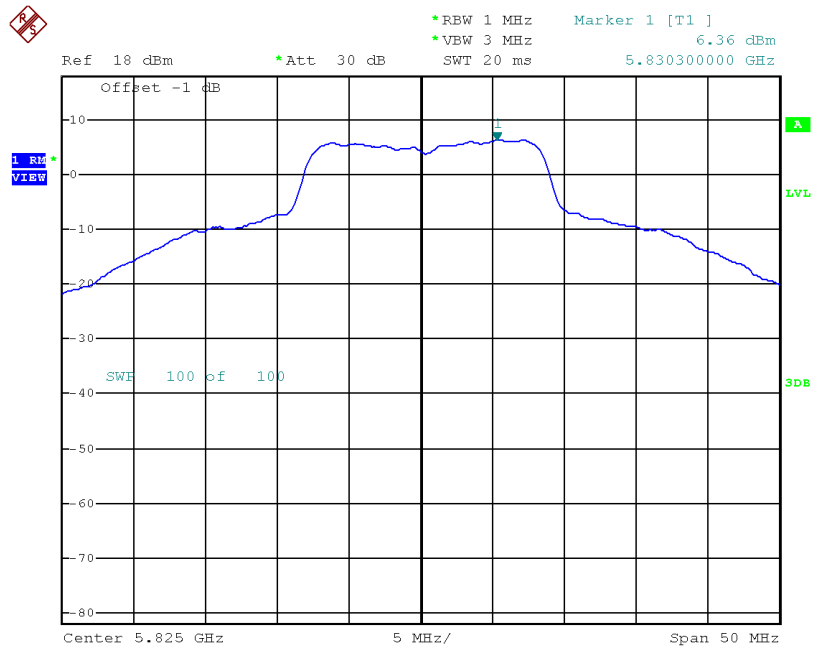


Date: 16.OCT.2018 22:47:22

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	7.01	0.00	7.01	30.00
CH157	5785	6.60	0.00	6.60	30.00
CH165	5825	6.67	0.00	6.67	30.00

TX CH149

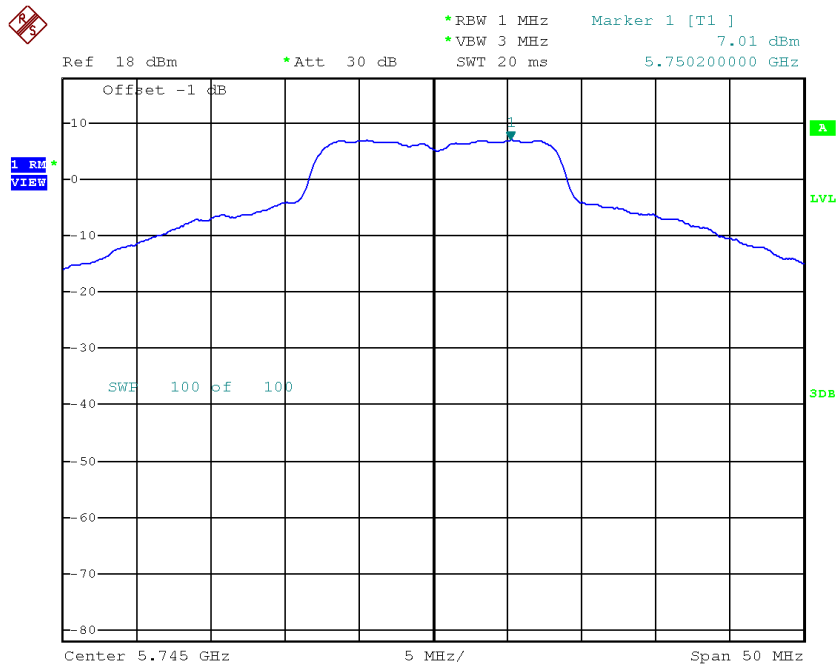


Date: 16.OCT.2018 22:39:42

TX CH157

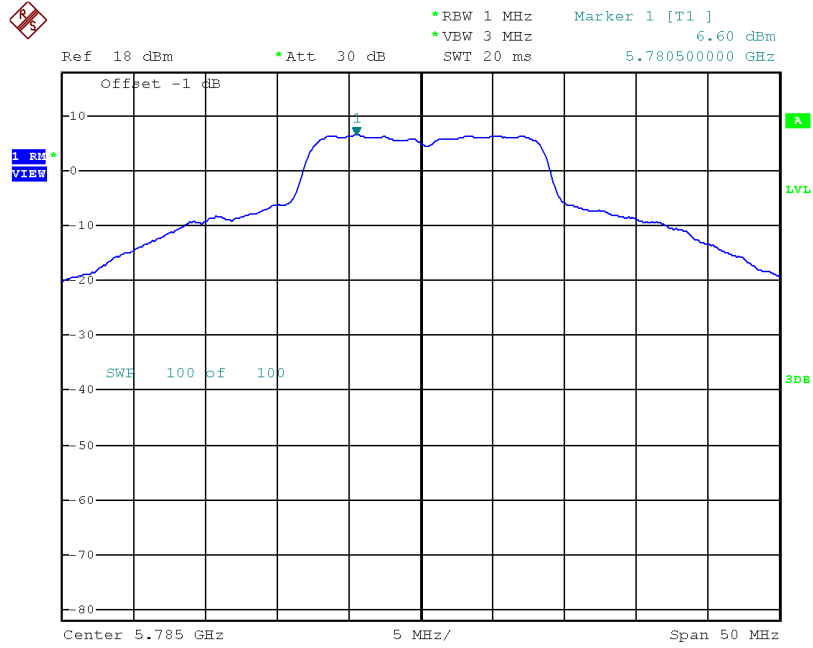

Date: 16.OCT.2018 22:44:10

TX CH165

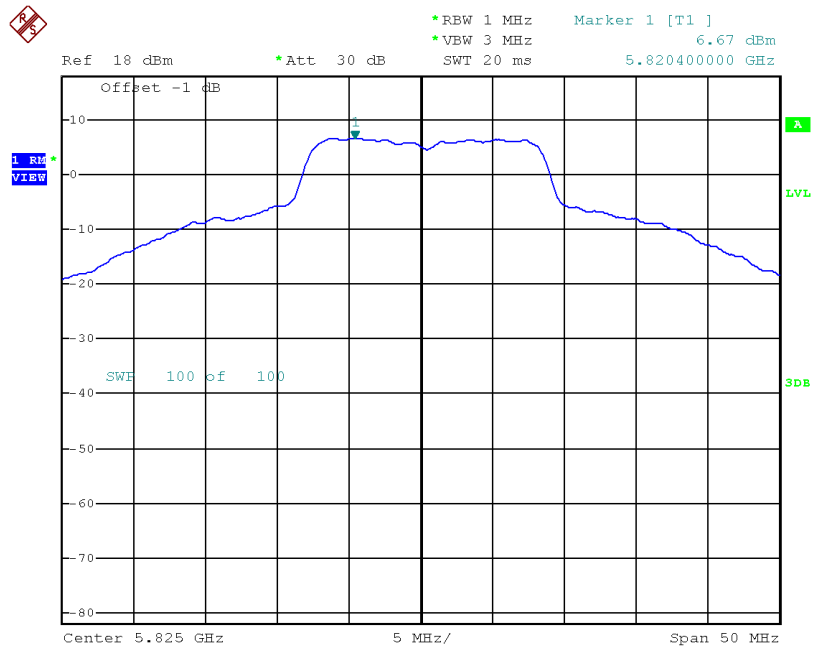

Date: 16.OCT.2018 22:46:16


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	9.81	30.00
CH157	5785	9.43	30.00
CH165	5825	9.53	30.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.43	0.00	6.43	30.00
CH157	5785	6.00	0.00	6.00	30.00
CH165	5825	6.38	0.00	6.38	30.00

TX CH149

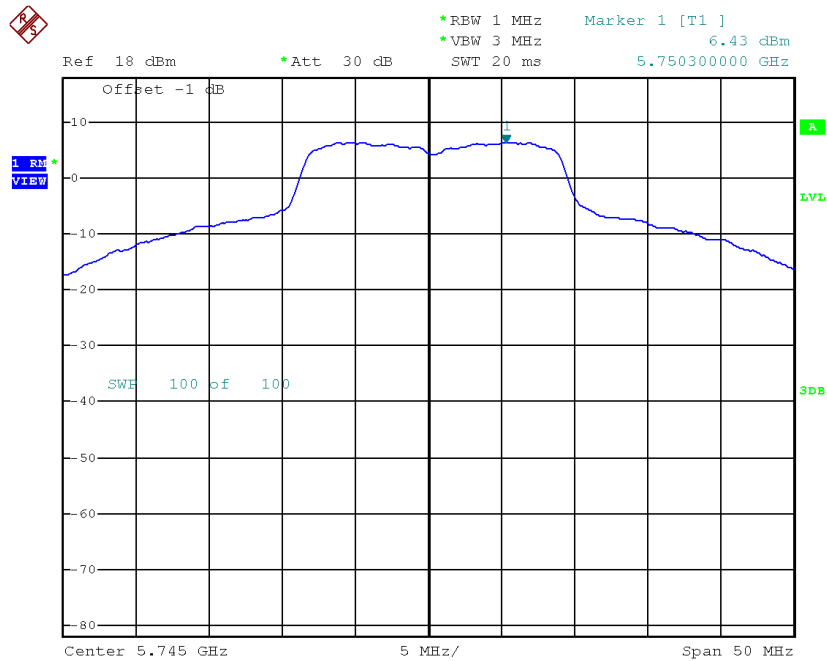


Date: 17.OCT.2018 13:44:44

TX CH157

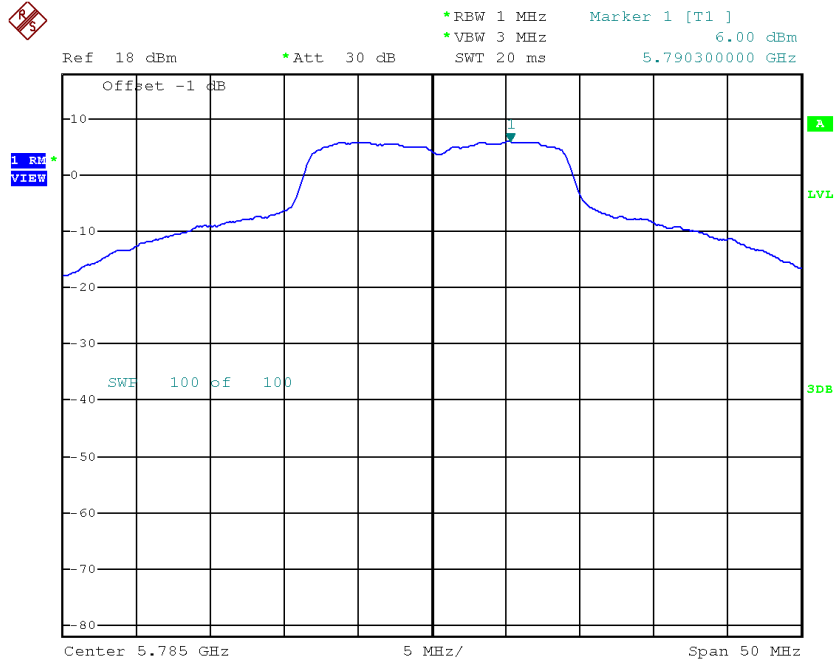

Date: 17.OCT.2018 13:27:28

TX CH165

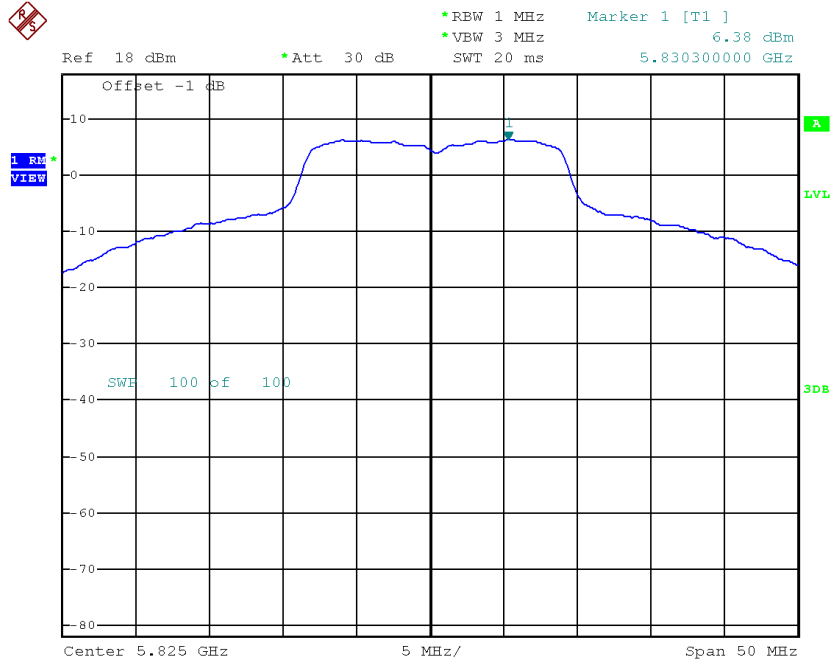


Date: 17.OCT.2018 13:35:43

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.98	0.00	6.98	30.00
CH157	5785	6.69	0.00	6.69	30.00
CH165	5825	7.08	0.00	7.08	30.00

TX CH149

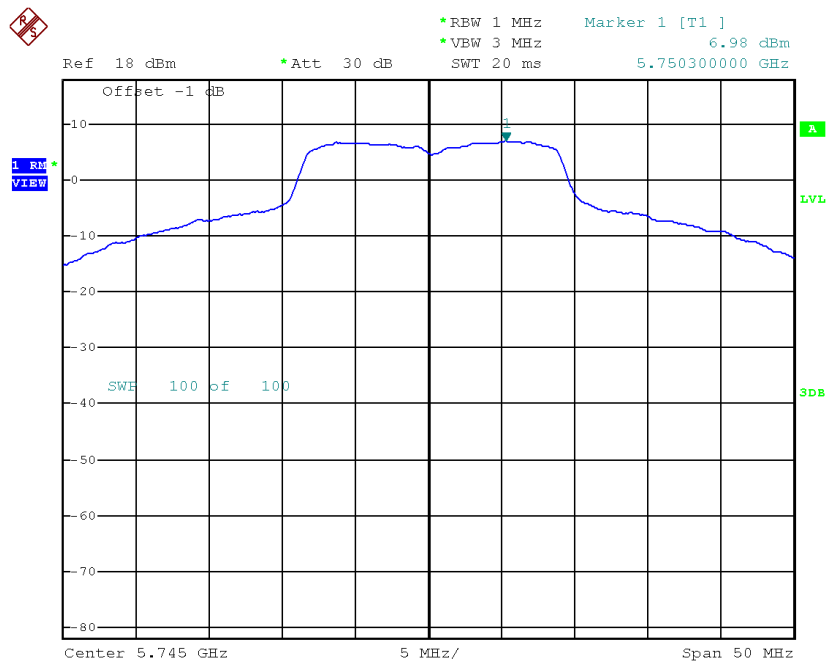


Date: 17.OCT.2018 13:43:21

TX CH157

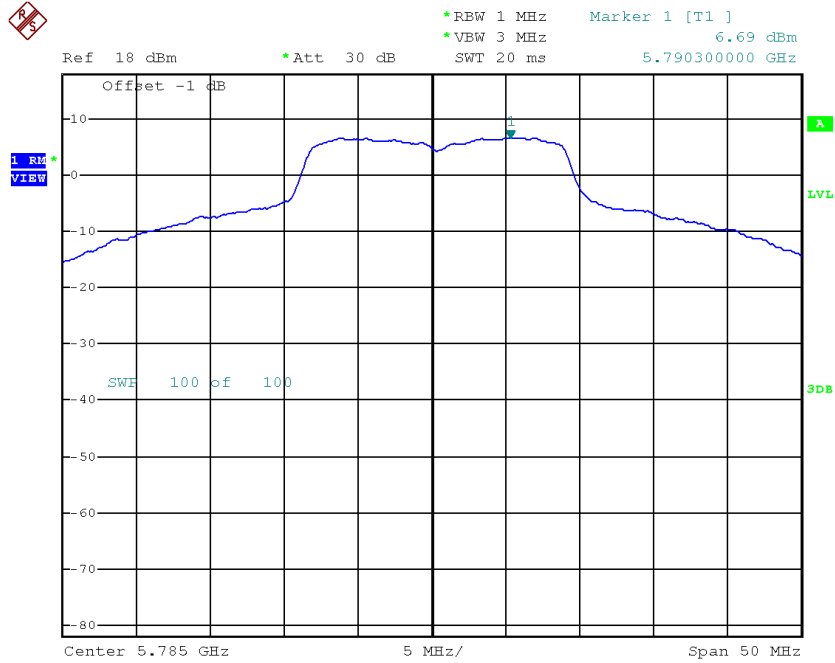

Date: 17.OCT.2018 13:26:09

TX CH165

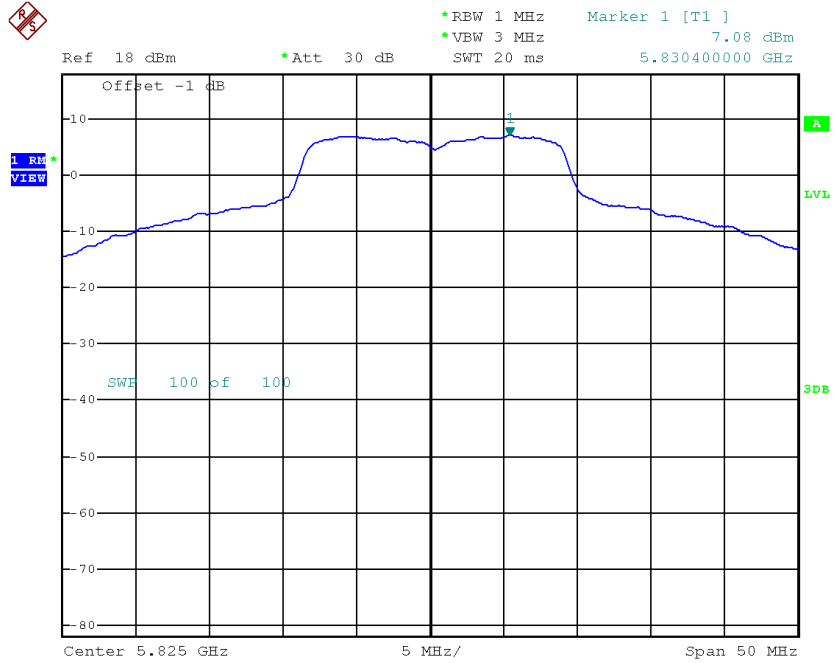

Date: 17.OCT.2018 13:33:50


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	9.72	30.00
CH157	5785	9.37	30.00
CH165	5825	9.75	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	1.88	0.00	1.88	30.00
CH159	5795	2.56	0.00	2.56	30.00

TX CH151

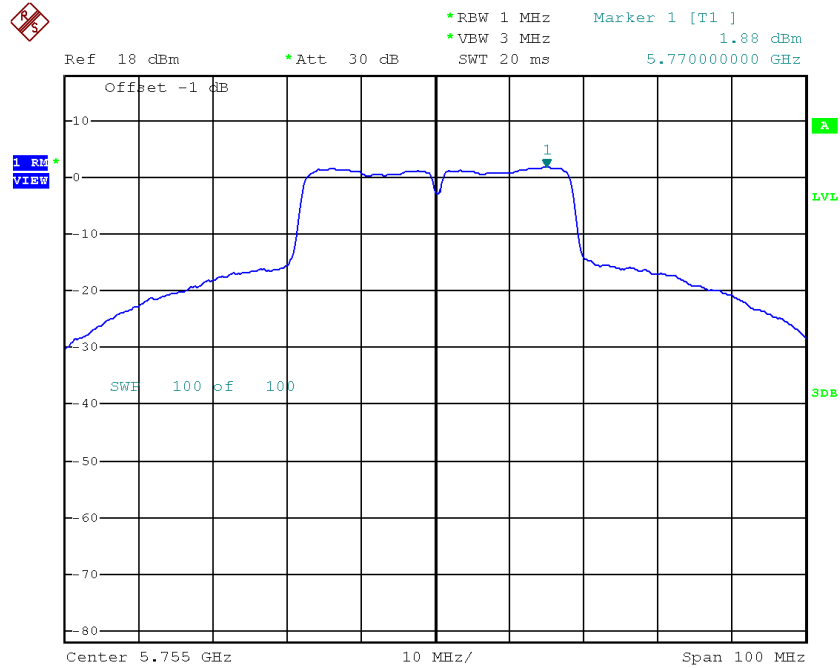

Date: 16.OCT.2018 22:32:42

TX CH159

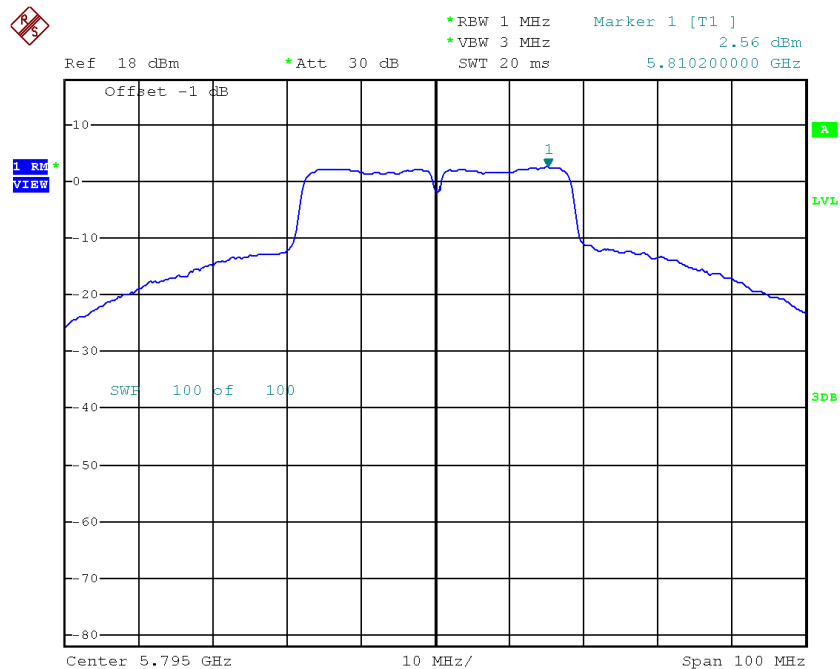


Date: 16.OCT.2018 22:29:29

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	2.64	0.00	2.64	30.00
CH159	5795	3.56	0.00	3.56	30.00

TX CH151

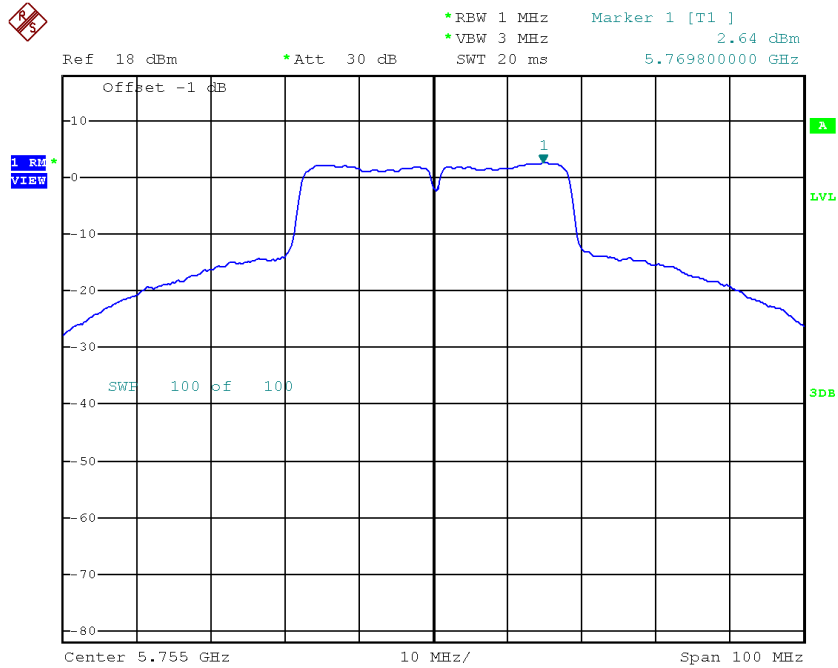

Date: 16.OCT.2018 22:34:49

TX CH159

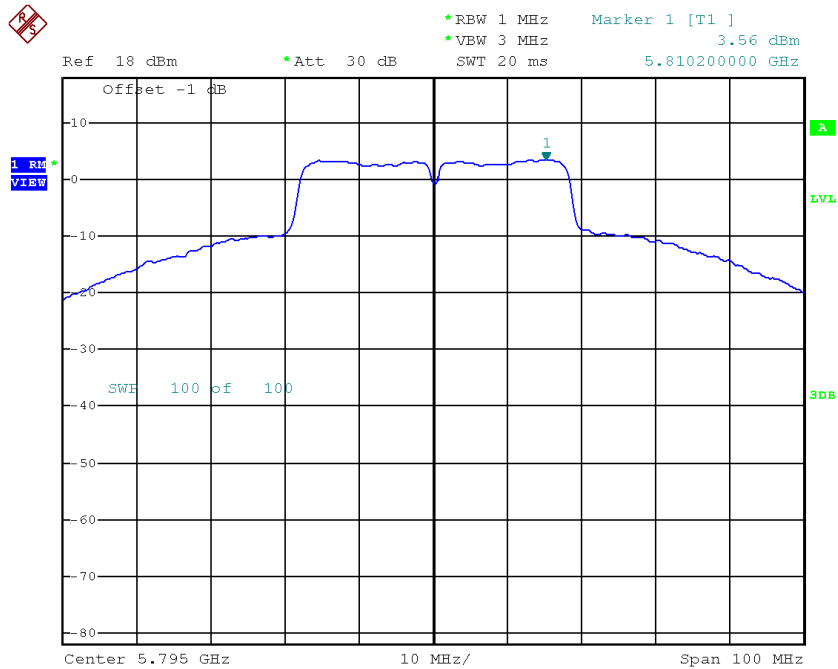


Date: 16.OCT.2018 22:27:50

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	5.29	30.00
CH159	5795	6.10	30.00


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.45	0.00	3.45	17.00
CH40	5200	7.06	0.00	7.06	17.00
CH48	5240	8.24	0.00	8.24	17.00

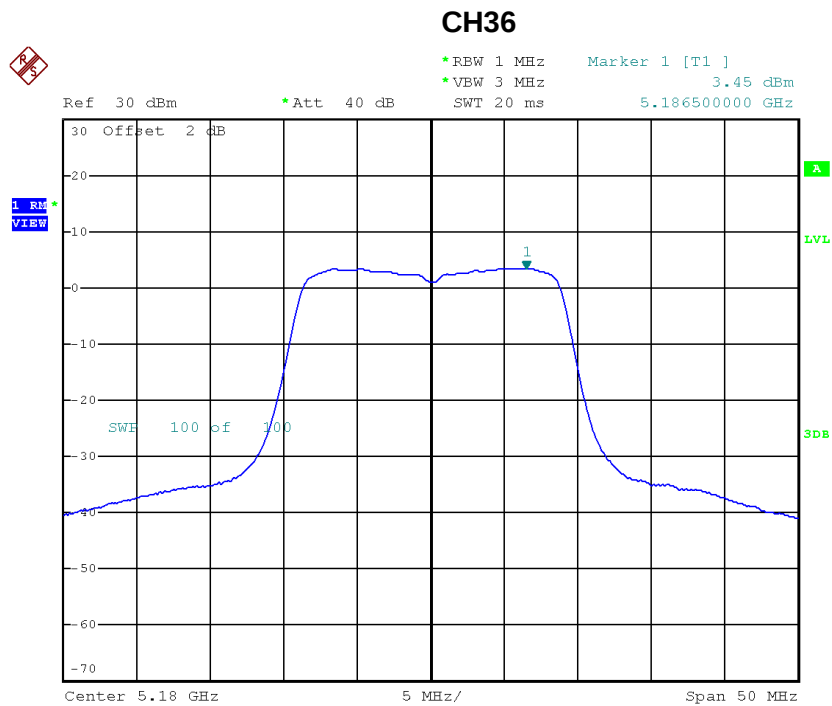


Date: 16.OCT.2018 18:13:36

CH40

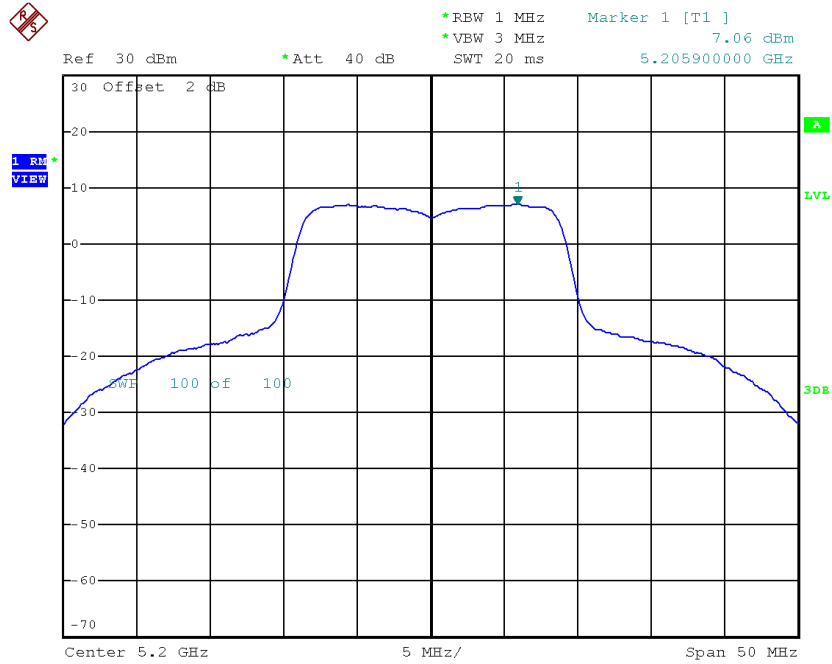

Date: 16.OCT.2018 18:15:27


CH48

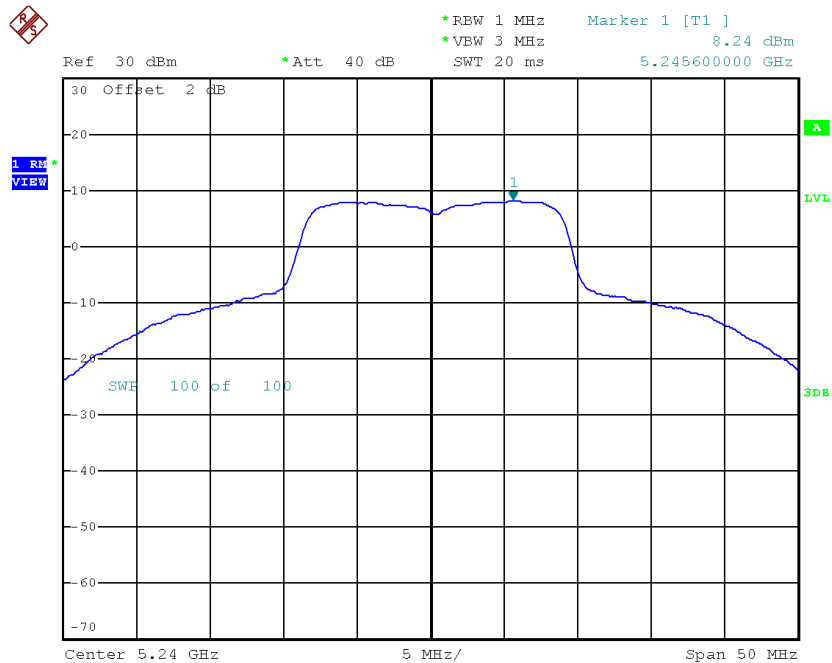

Date: 17.OCT.2018 18:08:07


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.78	0.00	2.78	17.00
CH40	5200	6.27	0.00	6.27	17.00
CH48	5240	8.44	0.00	8.44	17.00

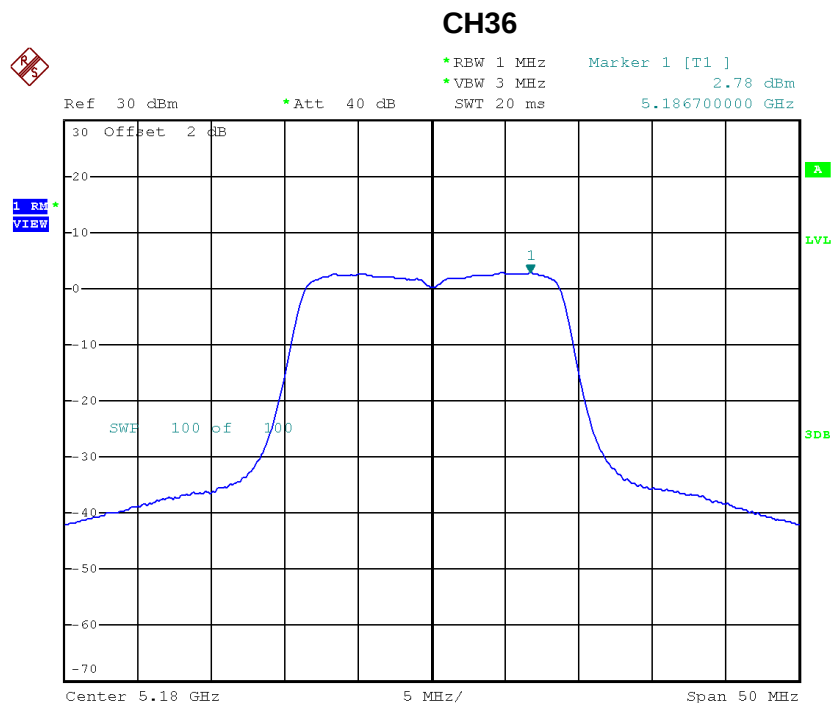


Date: 16.OCT.2018 18:12:29

CH40

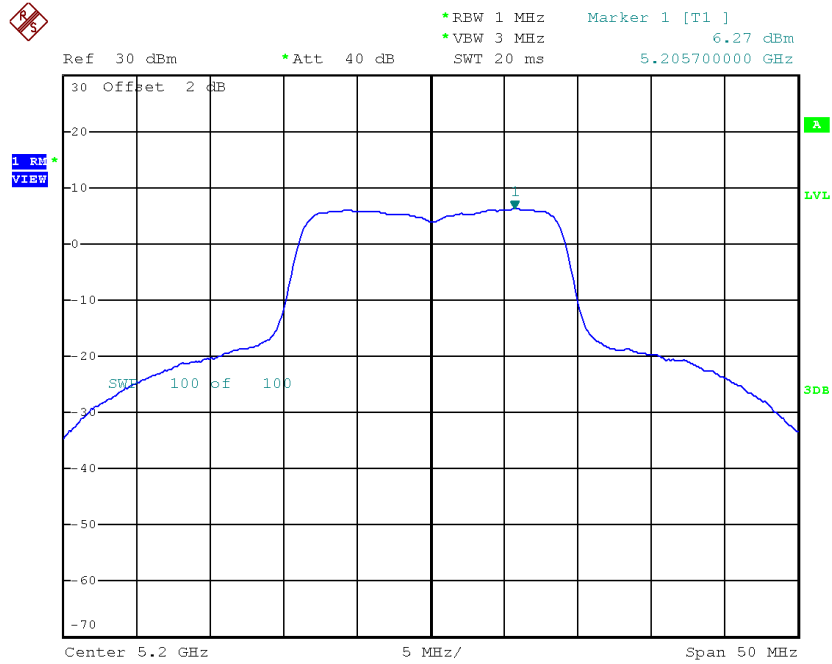

Date: 16.OCT.2018 18:16:35

CH48

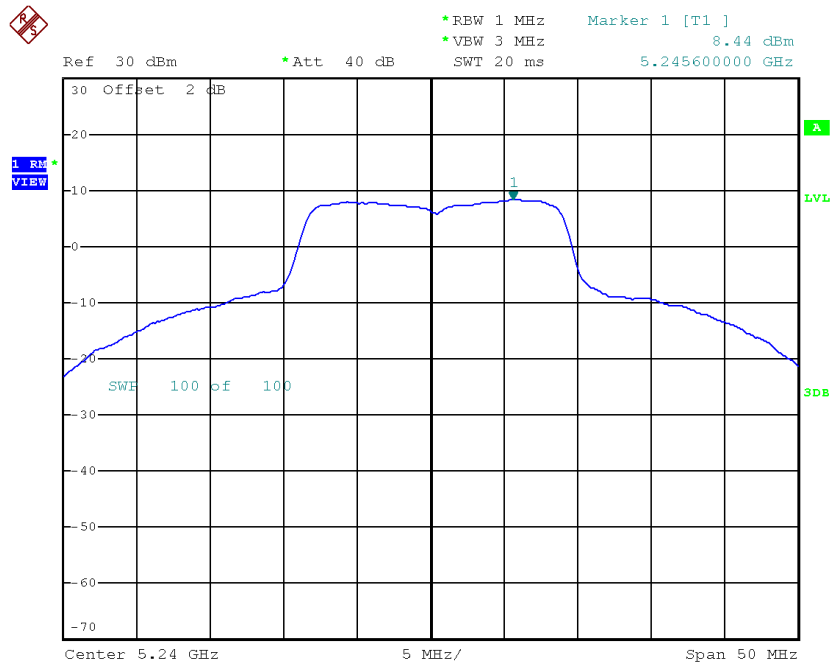

Date: 17.OCT.2018 18:08:53


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.14	17.00
CH40	5200	9.69	17.00
CH48	5240	11.35	17.00

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-1.49	0.00	-1.49	17.00
CH46	5230	1.56	0.00	1.56	17.00

CH38

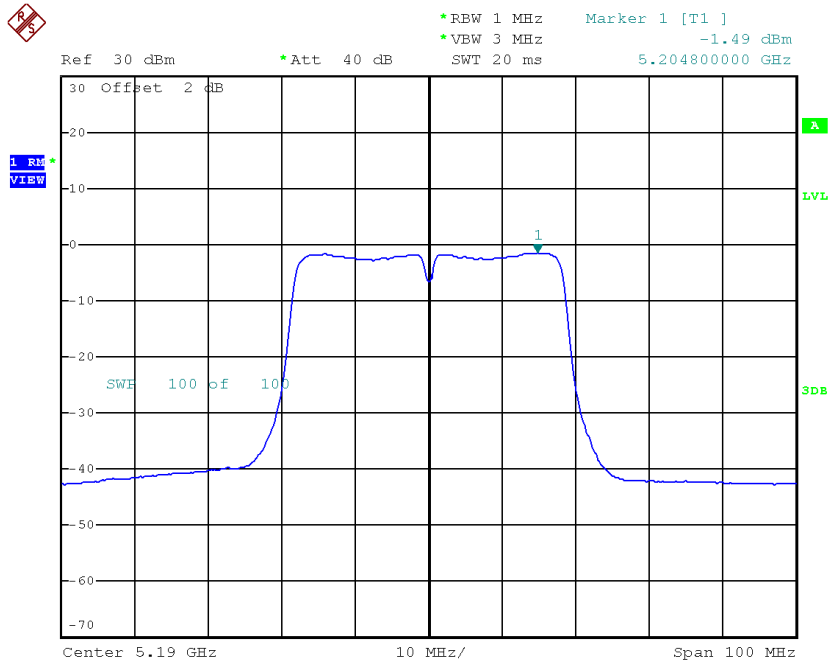

Date: 16.OCT.2018 20:32:25

CH46

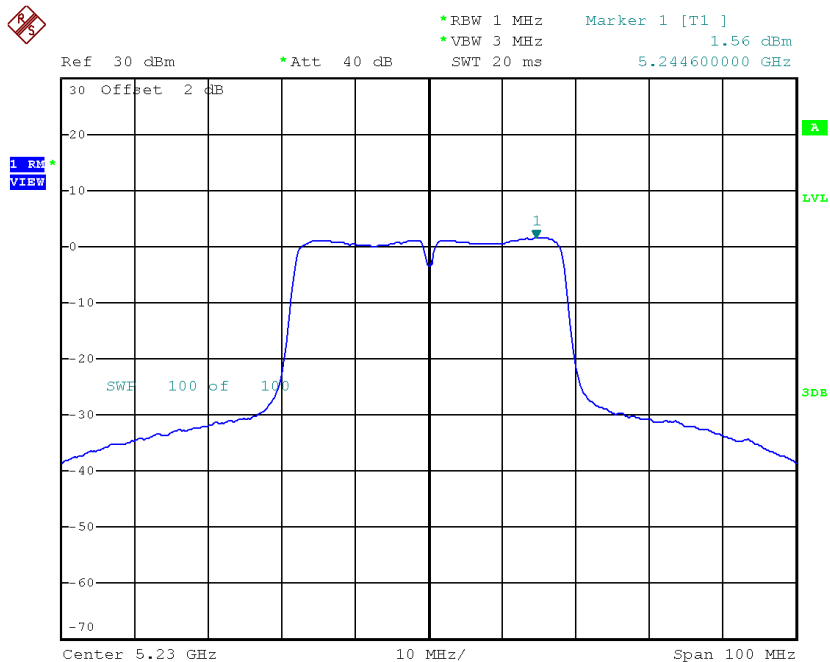


Date: 16.OCT.2018 20:41:44

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.12	0.00	-2.12	17.00
CH46	5230	1.81	0.00	1.81	17.00

CH38

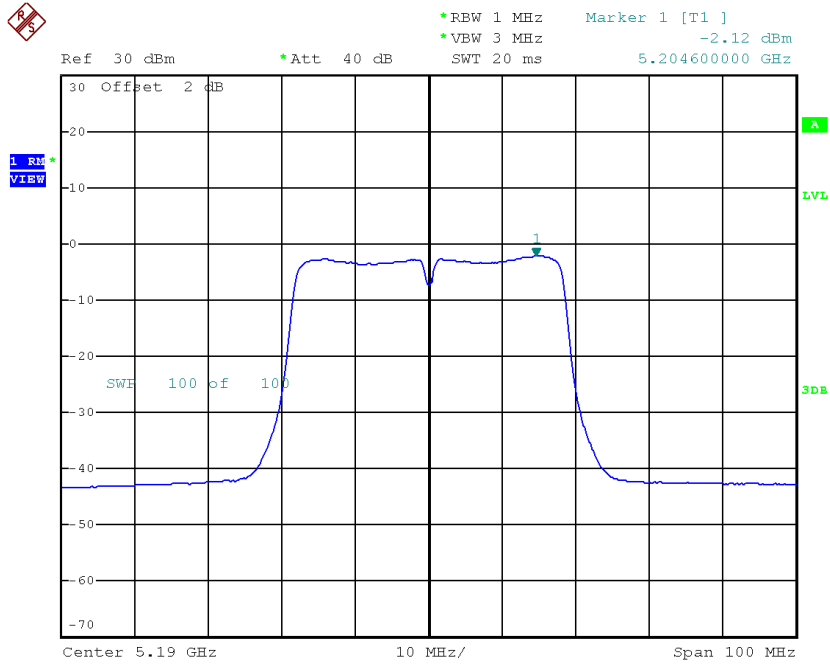

Date: 16.OCT.2018 20:35:02

CH46

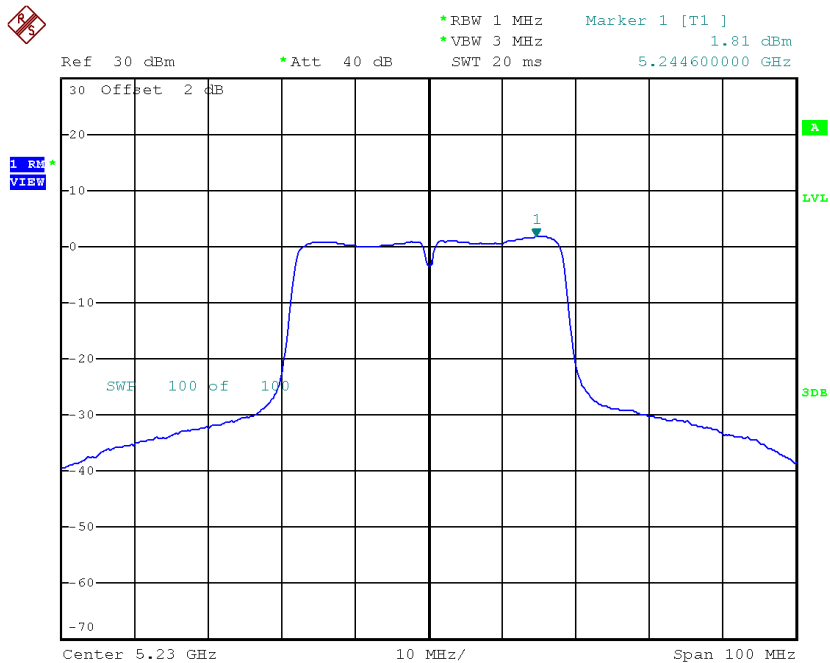


Date: 16.OCT.2018 20:38:45

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	1.22	17.00
CH46	5230	4.70	17.00

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.70	0.00	-6.70	17.00

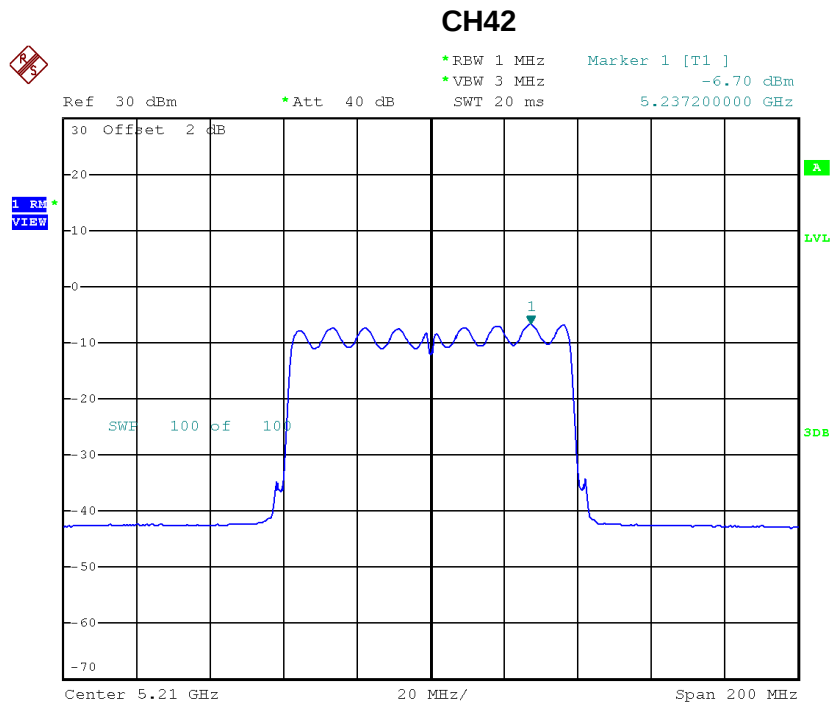

Date: 16.OCT.2018 21:12:30

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.84	0.00	-6.84	17.00

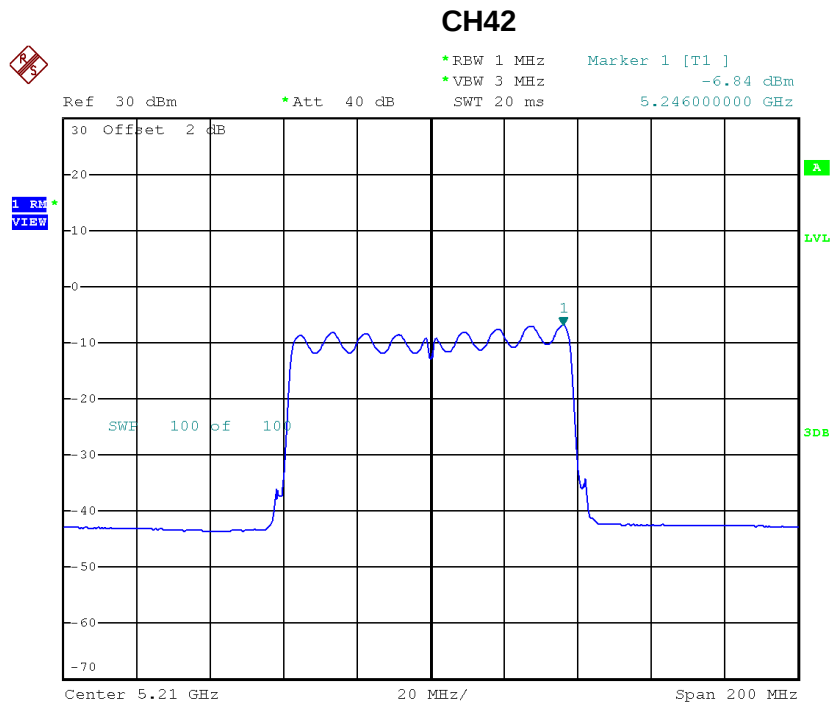

Date: 16.OCT.2018 21:14:19


Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-3.76	17.00

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.19	0.00	6.19	30.00
CH157	5785	5.92	0.00	5.92	30.00
CH165	5825	6.08	0.00	6.08	30.00

TX CH149

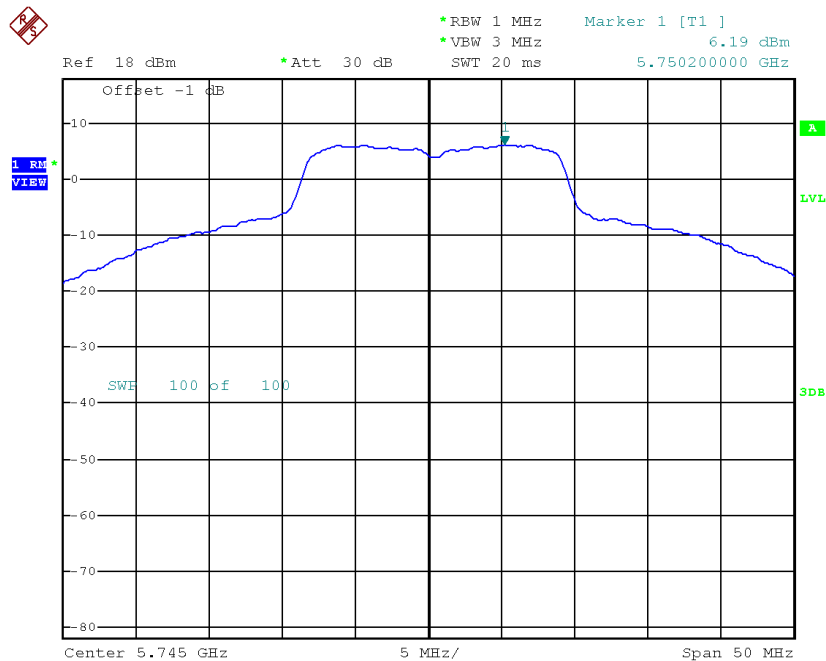


Date: 17.OCT.2018 13:49:06

TX CH157

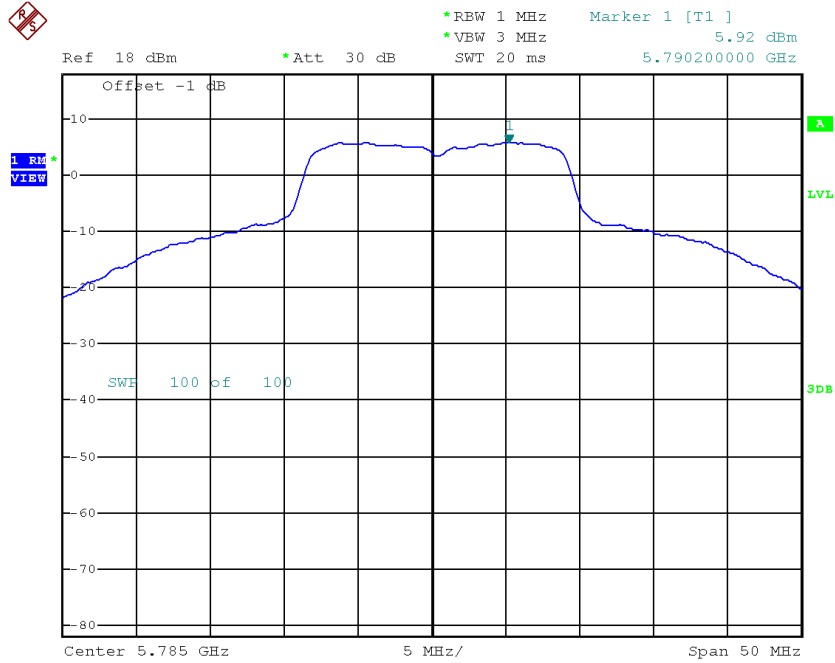

Date: 17.OCT.2018 14:20:40

TX CH165

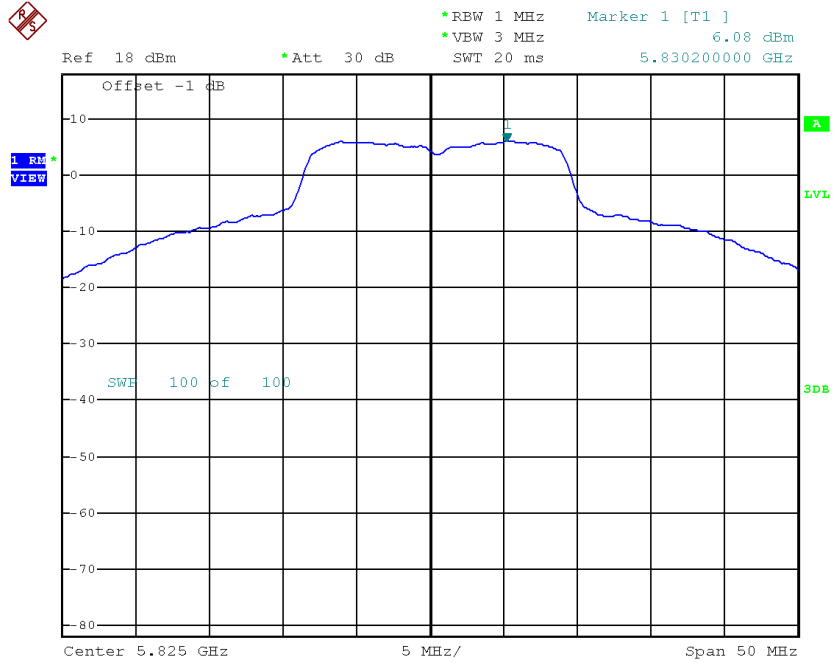


Date: 17.OCT.2018 14:34:19

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.79	0.00	6.79	30.00
CH157	5785	6.38	0.00	6.38	30.00
CH165	5825	6.70	0.00	6.70	30.00

TX CH149

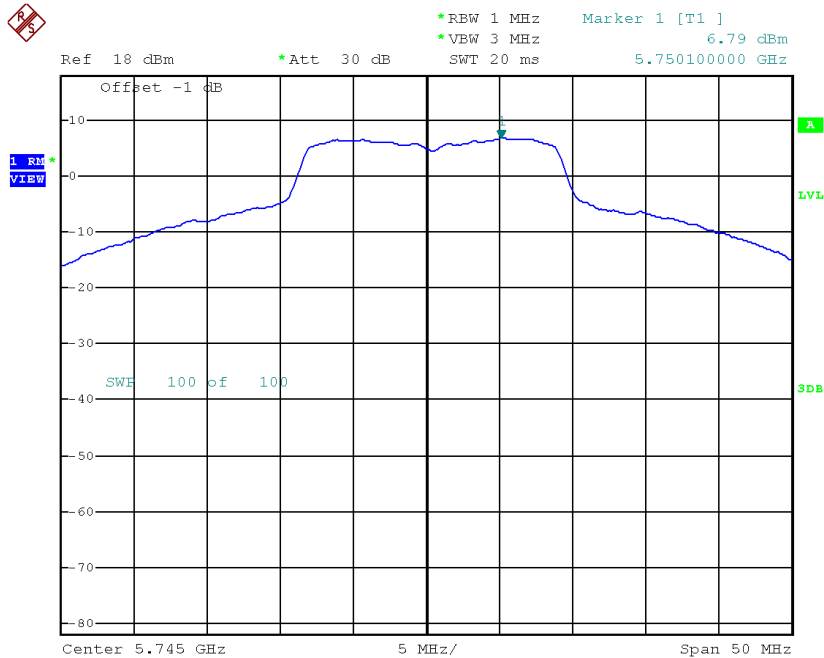


Date: 17.OCT.2018 14:05:04

TX CH157

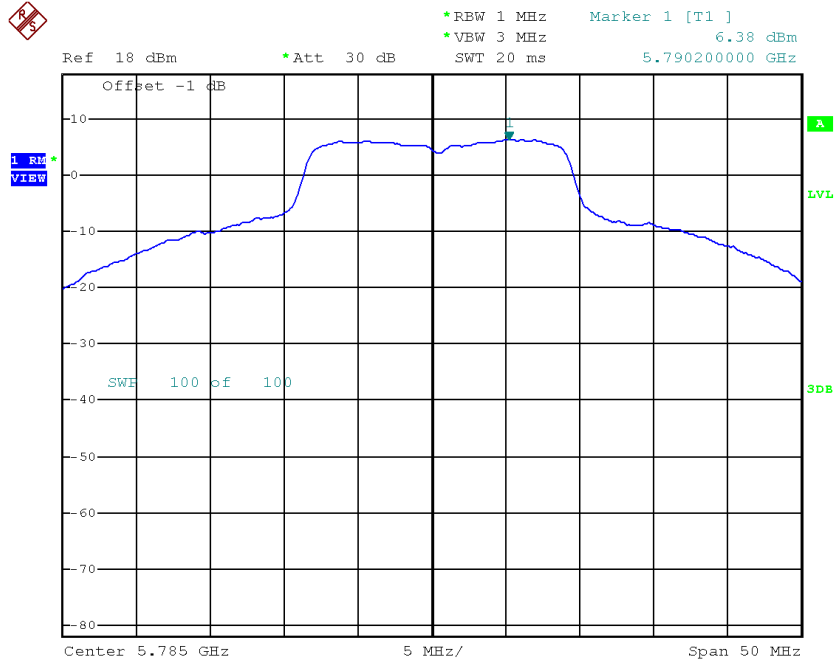

Date: 17.OCT.2018 14:14:46

TX CH165

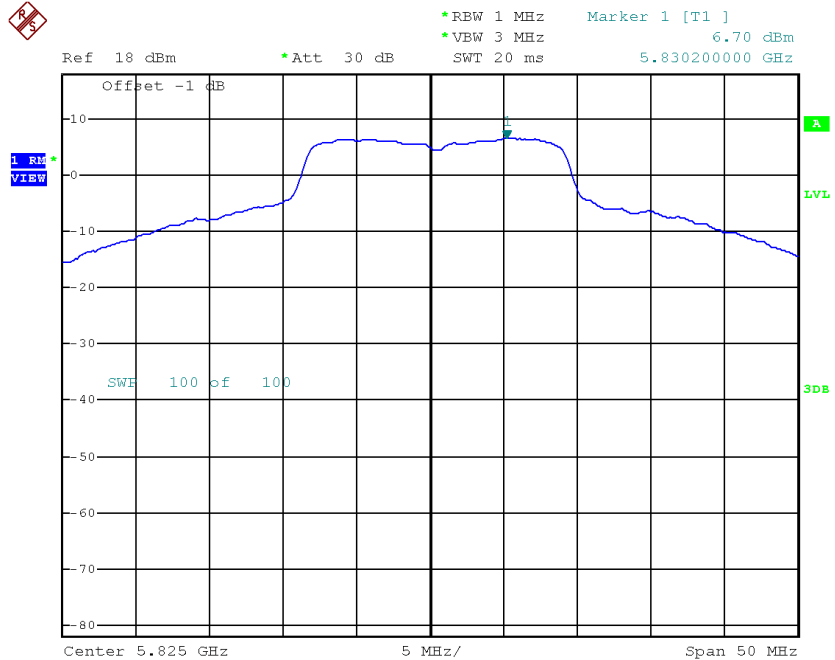

Date: 17.OCT.2018 14:32:44


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	9.51	30.00
CH157	5785	9.17	30.00
CH165	5825	9.41	30.00

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	1.37	0.00	1.37	30.00
CH159	5795	3.05	0.00	3.05	30.00

TX CH151

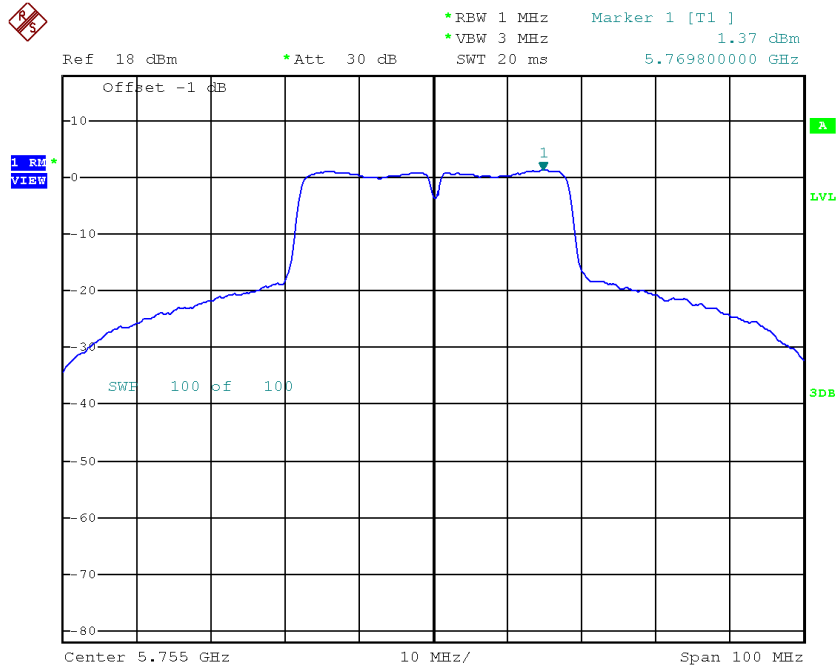

Date: 16.OCT.2018 22:16:28

TX CH159

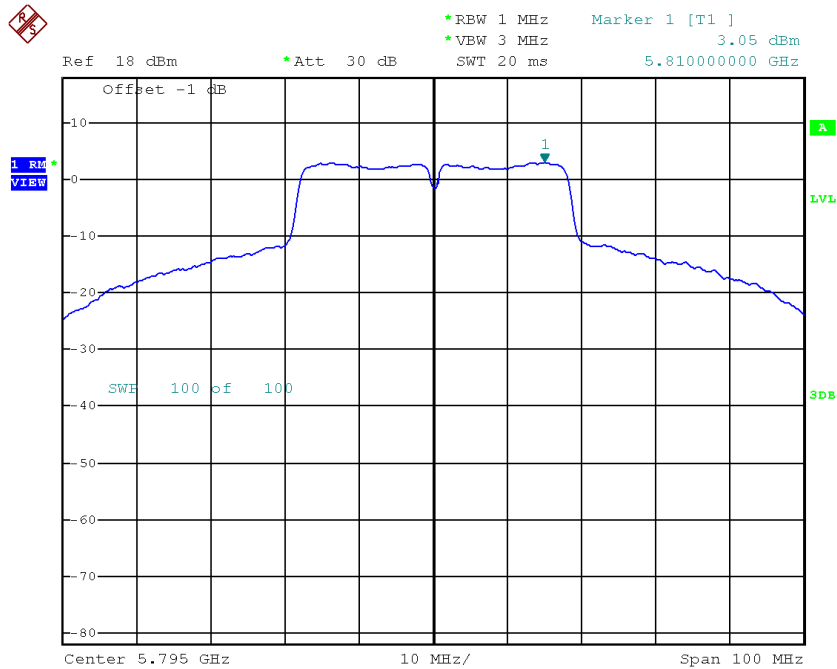


Date: 16.OCT.2018 22:21:41

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.04	0.00	3.04	30.00
CH159	5795	3.38	0.00	3.38	30.00

TX CH151

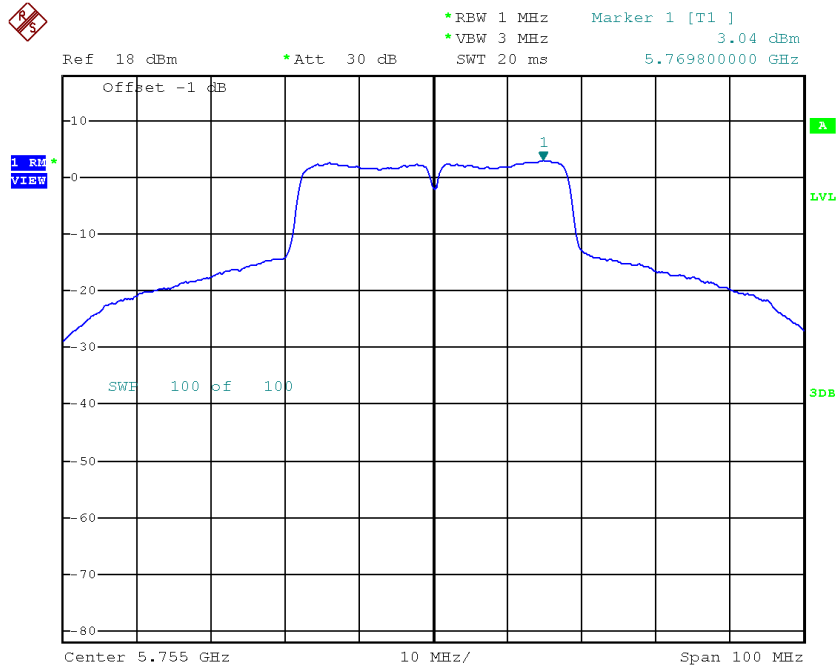

Date: 16.OCT.2018 22:13:33

TX CH159

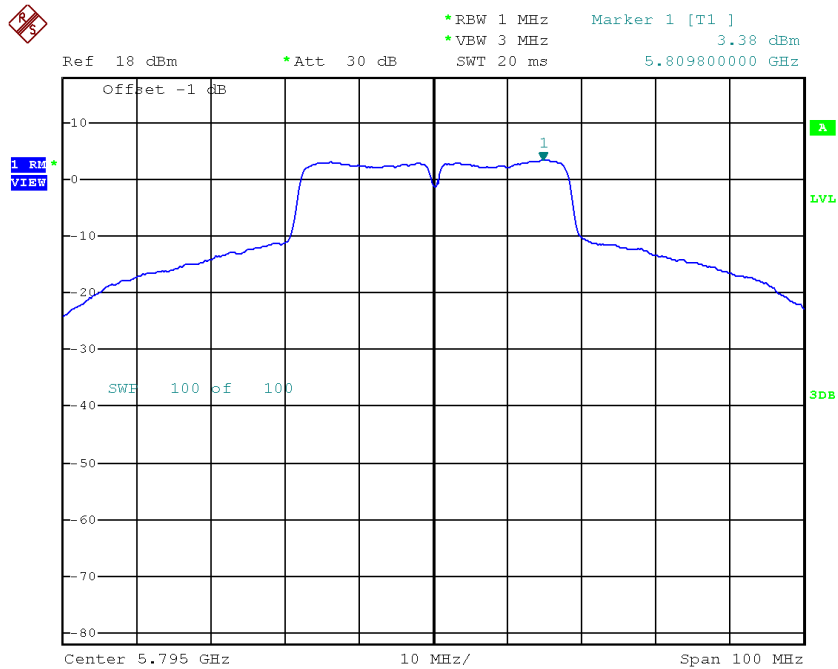

Date: 16.OCT.2018 22:23:02


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	5.30	30.00
CH159	5795	6.23	30.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-2.90	0.00	-2.90	30.00


TX CH155

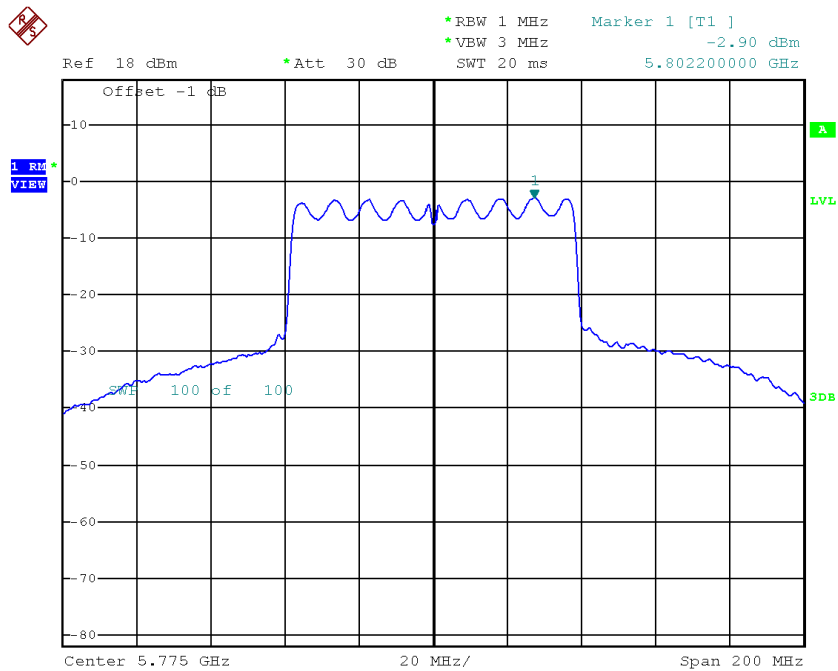

Date: 16.OCT.2018 22:08:17

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-2.02	0.00	-2.02	30.00

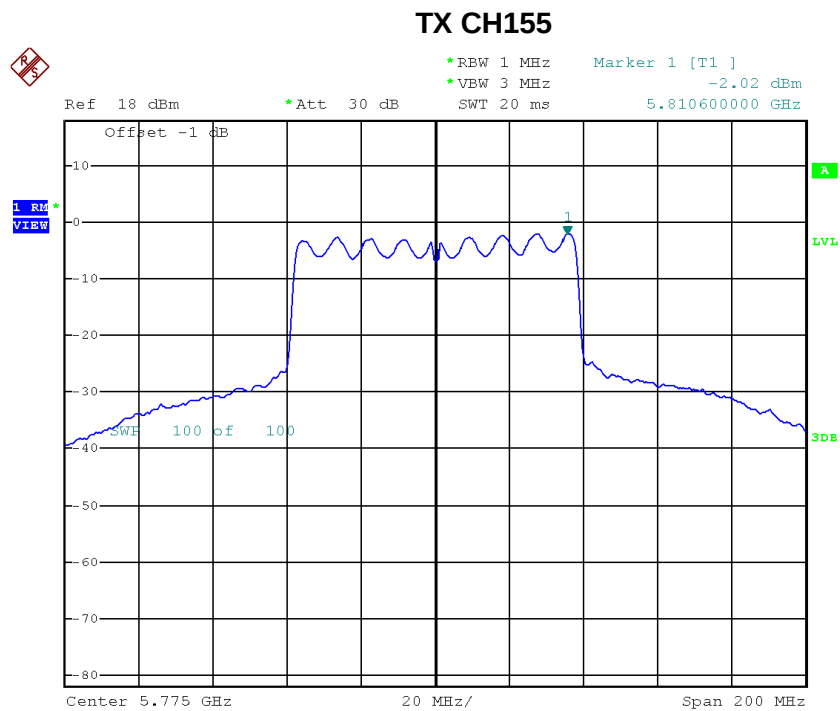

Date: 16.OCT.2018 22:09:58

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	0.57	30.00

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
138	5179.9928
120	5179.9936
102	5179.9944
Max. Deviation (MHz)	0.0072
Max. Deviation (ppm)	1.3900

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180.0000
-10	5179.9956
0	5179.9964
10	5179.9968
20	5179.9976
30	5179.9984
40	5179.9988
50	5179.9996
Max. Deviation (MHz)	0.0044
Max. Deviation (ppm)	0.8494

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
138	5745.0176
120	5745.0316
102	5745.0316
Max. Deviation (MHz)	0.0316
Max. Deviation (ppm)	5.5004

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5745.0000
-10	5745.0324
0	5745.0328
10	5745.0332
20	5745.0332
30	5745.0328
40	5745.0348
50	5745.0352
Max. Deviation (MHz)	0.0352
Max. Deviation (ppm)	6.1271

End of Test Report