

BT-CK USER MANUAL

Accessories :



A. Headset



B. Control Base



C. Pouch(Optional)



D. Cigarette Cable for DC plug



E. Speaker and Its accessories



F. Interchangeable DC Adapter(Optional)



G. 3M Double Side Tape



H. Interchangeable Adapter for Headset (Optional)



I. USB Retractable Cable (Optional)



J. USB AC Adapter-US Type(Optional)



K. USB AC Adapter-EU Type(Optional)




L. Spring Plate(Optional).

INSTALLATION for car use

1. Position the Control Base on the right position of dashboard by 3M double side tape or clip on the sun visor by Spring Plate.
2. Plug the DC PLUG of the Power Cable and PHONE PLUG of the external speaker into the jack on the CONTROL BASE (see the picture as below).
3. Plugging the cigarette plug of the Charging Cable into cigarette lighter for power source (in car use).

INSTALLATION for indoor use

1. Position the Control Base on the right position inside your room or office.
2. Clip the CONTROL BASE on the proper position inside your room or office or release the clip from the Control Base for putting the Control Base on the desk.
3. Plug the DC PLUG of the Power Cable and PHONE PLUG of the external speaker into the jacks B and A on the CONTROL BASE (see the picture as below).

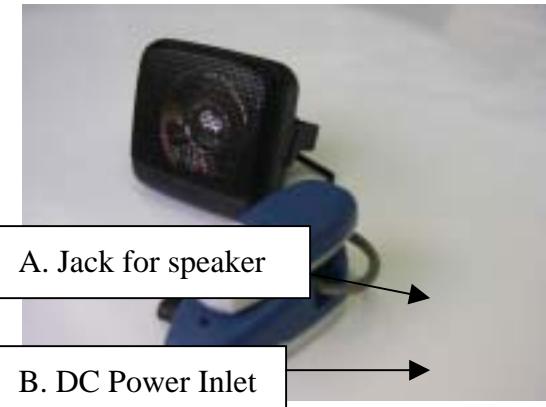

4. Plugging the USB AC Adapter into the inlet of AC power source on the wall while use indoors..

Remark: Please keep the external speaker at least 80cm away from the Control Base.

TURN THE UNIT ON/OFF

HEADSET ON:

- Take the headset from the CONTROL BASE, pressing down the *multifunction button* for 2 seconds. The BT-4A headset will turn ON. When it is ON, a low-high tone is heard and a continuous green light *indicator A* will be on. After releasing the *multifunction button*, the light will blink that indicates the unit is waiting for a call (standby mode).
- If the *indicator B* turns red, it means that the battery on the headset is low. RE-CHARGE THE HEADSET immediately by putting it back to the CONTROL BASE dock for charging.

HEADSET OFF:

- Pressing the *multifunction button* for about 2 seconds will turn it OFF. A high-low tone will be heard and the indicator lights will be off. Turning off the headset is necessary to conserve battery life if the headset will not be used for a long time.

PAIRING TO THE PHONE

- Before use, the headset MUST BE PAIRED with the phone. Pairing needs to be done only once. When the phone and the unit have been paired, connecting to the phone will be automatic every time the phone is used.

Enter into Pairing Mode :

- (a) This unit is first set under stand-by mode – *Indicator A* blinks every 4 seconds.
- (b) To enter into pairing mode,
 - (1) First, set this unit under OFF mode. (To enter into OFF mode, please press the function key for 2 seconds until *Indicator A* is off. A short beep will sound if it is off.)
 - (2) Press function key for 4 seconds (approx.) until Indicator

A is on & Indicator B is blinking. Meanwhile, two beeps

Come after and the Headset is in "Headset" mode.

- (3) Press function key again (while in headset mode) until two beeps coming, the Indicator A & B will be distinguished very shortly. Then the Indicator A (green) is on & Indicator B (red) is blinking and the mode is in "car" mode.

ANSWERING/RECEIVING A CALL VIA BT-CK CAR KIT

●Simply dock the headset on the control unit as a car kit with mute function. When phone is receiving a call, the phone ring tone will be heard via the speaker; you need only to press the *multifunction button* on the headset once to answer the call. Pressing the button again will automatically hang-up and terminate the call.

MAKING A CALL (VOICE DIALING)

Calling through the headset of the BT-CK car kit can be done by using voice dialing. The steps are:

- Press the headset button to activate the voice dialing.
- A beep will then be heard prompting the user to say the name of the person to call.
- Say the name.
- The phone will then place the call automatically. In case the phone does not recognize the name spoken, the steps above may be repeated.
- Press the headset button again to terminate the call.
- If the desired number to be dialed has no voice tag, normal dialing can also be done using the keypad on the Bluetooth phone. When connected, pressing the button of the headset will hang-up and terminate the call.

SETTING THE VOLUME

Rotate the potentiometer in clockwise direction , it means volume up

In counterclockwise means volume down


PRIVATE CONVERSATION

Simply take the headset from the Control Base and wear it on your ear for private conversation.


The conversation can continue with interruption even though you leave your car for office or home.

CHARGING

Simply dock the headset on the Control Base. (See picture below). While in charging condition, the red light indicator will be on continuously. When the red indicator goes off, it means the unit is completely charged.

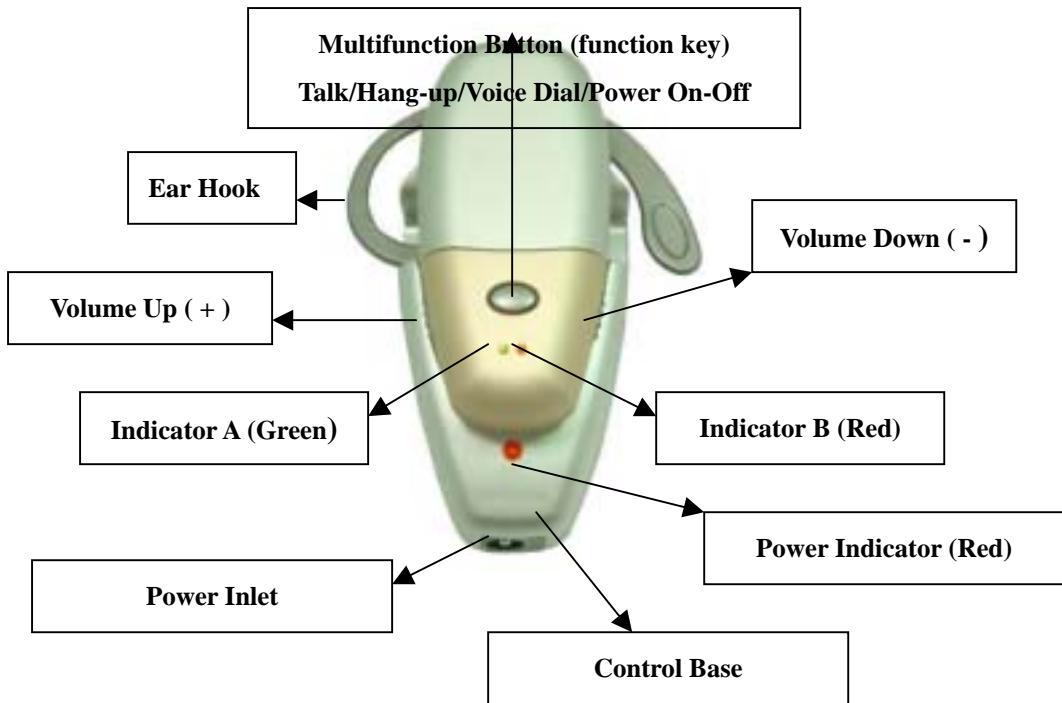



Bluetooth Headset and BT-CK Control Base

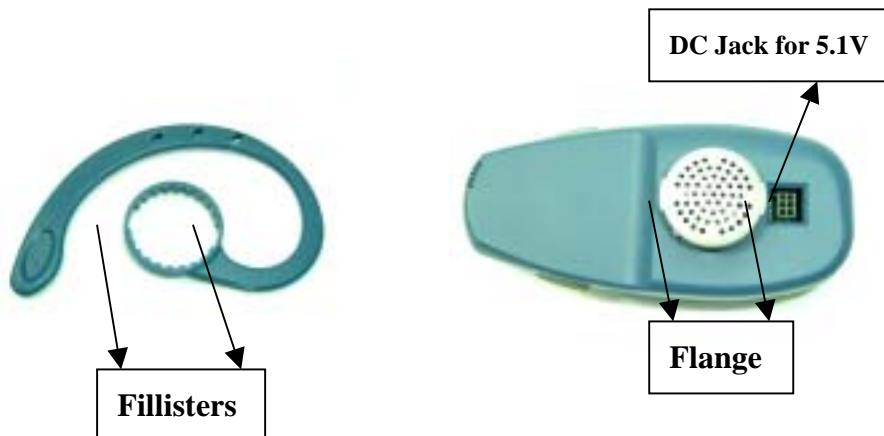

Hook

Bottom view of the main unit

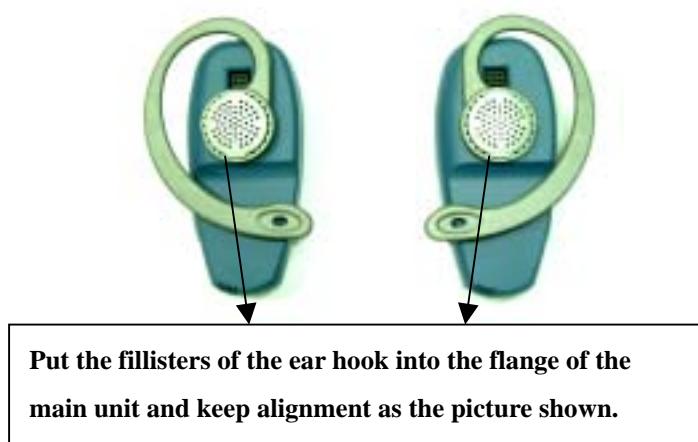

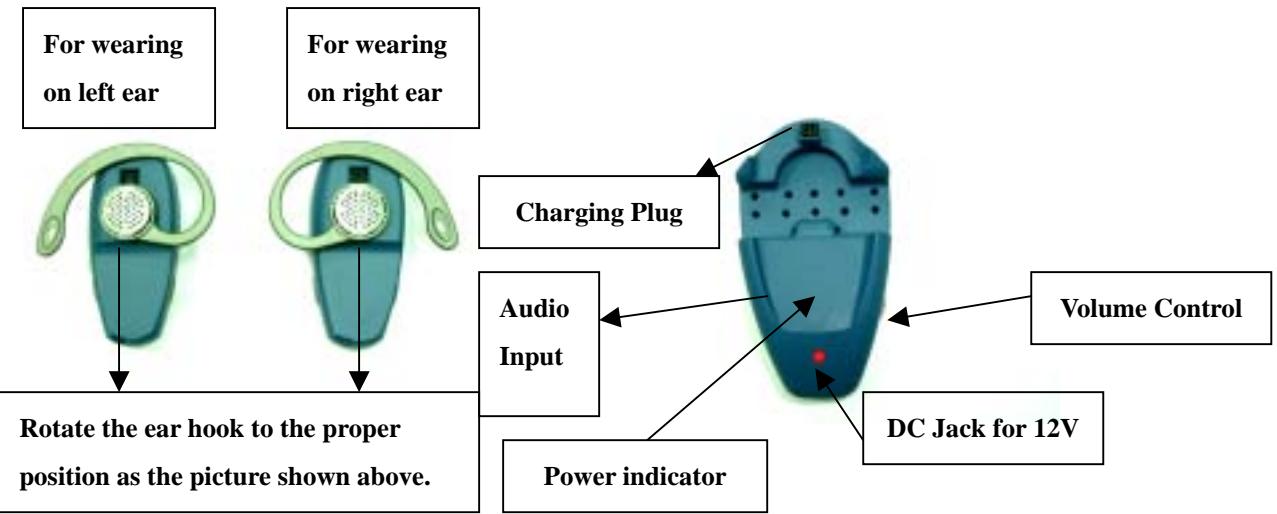

CONTROL BASE



Headset is docked at Control Base.

INSTRUCTION –ERICSSON PHONES:

Enter into Pairing Mode :

- (a) This unit is first set under stand-by mode –*Indicator A* blinks every 4 seconds.
- (b) To enter into pairing mode,
 - (1) First, set this unit under OFF mode. (To enter into OFF mode, please press the function key for 2 seconds until *Indicator A* is off. A short beep will sound if it is off.)
 - (2) Press function key for 4 seconds (approx.) until *Indicator A* & *Indicator B* (red & green LEDS) blink in turn. Meanwhile, a short beep will sound.

Pairing Between Phones and Headset :

- (a) Initiate Bluetooth function of phones & search for Bluetooth devices.

For example : ERICSSON T68i, procedure is

“Menu/Connect/Bluetooth/Paired Device/Add Device/Phone initiates/All types”

(b) Phones will start searching for Bluetooth devices. If it's successful, phone screen will show the name of obtained device- “CSR-bc2” (This can be customized upon customer's request.) Press “Yes” to pair this unit to the phones.

(c) Input ID code of this unit- “1234” . (This can be customized upon customer's request.) Press “Yes” to complete Pairing. (Pairing procedure might be varied because of different phones. Therefore, users are recommended to refer to their individual Phone type User's Manual.) Meanwhile, this unit is under Stand-By mode-*Indicator A* (Green LED) blinks every 4 seconds.

Activating the Voice Dialing:

Use your phone when recording for the voice dialing. Before voice dialing, you must first turn on the name dialing function and record your voice. You also must turn voice dialing on and record area codes, international codes, and long distance codes.

Using Sony Ericsson T68

- Go to the Menu Key by pressing the joystick. Scroll to Settings--YES. Voice control--YES.
- Voice settings--YES. Voice dialing--YES. Select On--YES.
- Continue pressing NO to exit.

Using Sony Ericsson T68I

- Go to the Menu Key by pressing the joystick. Scroll to Settings--YES. Voice control--YES. Voice dialing--YES.
- Select On--YES.
- Continue pressing NO to exit.

Recording the Voice Dialing:

Note : Noisy environment could affect voice recognition. RECORD VOICE ONLY IN A QUIET ENVIRONMENT.

Using Sony Ericsson T68

- Go to the Menu Key by pressing the joystick. Scroll to Settings and press YES. Choose Voice control--YES. Voice Commands--YES. Select a contact--YES. Add voice--YES.
- Follow the instructions in the display. An icon will appear next to a command.

- Continue press NO to exit.

Using Sony Ericsson T68i

- Go to the Menu Key by pressing the joystick. Scroll to Settings and press YES. Choose Voice control--YES. Then go to Voice dialing --YES. Edit name--YES. Add voice--YES.
- Select a contact--YES.
- Follow the instructions in the display. An icon will appear next to a contact name, which has a voice command.
- Continue pressing NO to exit.

Using Sony Ericsson T39M

- Press the Menu Key. Scroll to Settings--YES. Voice control--YES.
- Voice settings--YES. Voice dialing--YES. Select On--YES.
- Continue pressing NO to exit.

Recording the Voice Dialing:

- Press the Menu Key. Scroll to Settings--YES. Voice control--YES. Voice Commands--YES Select Contacts--YES. Add voice--YES.
- Find a contact name and follow the instructions in the display.
An icon will appear next to a contact name, which has a voice command.
- Continue pressing NO to exit.

INSTRUCTION –NOKIA PHONES:

Enter into Pairing Mode :

(a) This unit is first set under stand-by mode –*Indicator A* blinks every 4 seconds.

(b) To enter into pairing mode,

1. First, set this unit under OFF mode. (To enter into OFF mode, please press the function key for 2 seconds until *Indicator A* is off. A short beep will sound if it is off.)
2. Press function key for 4 seconds(approx.)until *Indicator A* & *Indicator B* (red & green LEDS) blink in turn. Meanwhile, a short beep will sound.

Pairing Between Phones and Headset :

(a) Initiate Bluetooth function of phones & search for Bluetooth devices.
For example : NOKIA 8910 , procedure is “Menu/Bluetooth/search for audio accessories” .

(b) Phones will start searching for Bluetooth devices. If it's successful , phone screen will show the name of obtained device- "CSR-bc2" (This can be customized upon customer's request.) Press "Yes" to pair this unit to the phones.

(c) Input ID code of this unit- "1234" . (This can be customized upon customer's request.) Press "Yes" to complete Pairing. (Pairing procedure might be varied because of different phones. Therefore, users are recommended to refer to their individual Phone type User's Manual.) Meanwhile, this unit is under Stand-By mode- *Indicator A* (Green LED) blinks every 4 seconds.

Recording the Voice Dialing

Use your phone when recording voice dialing.

Using NOKIA 6310/6310i

- Press the Names button. Search, Select. Press List button.
- Find a contact name. Press Details button.
- Press Options button. Add voice tag--SELECT. Instructions appear. Your voice is automatically saved on the phone after being played back to you. In case you wish to change your recorded voice, press Options button. Voice tags--SELECT. Change--SELECT. Instructions appear.
- Continue pressing Back button to exit.

Using NOKIA 8910

- From standby mode, press arrow up or down.
- Find a contact name to which you want to add a voice tag. Press Details button. The phone number will be displayed.
- Press Options button. Add voice tag--SELECT. Press Start, and say the name clearly. Voice tag saved is displayed indicating that the voice tag has been saved.
- In case you wish to change your recorded voice, press Names, Voice tags, SELECT. Scroll to the name whom you want to change the voice tag then press Options. Change--SELECT. Follow the instructions.
- Continue pressing Back button to exit.

INSTRUCTION –SIEMENS PHONES:

Enter into Pairing Mode :

(a) This unit is first set under stand-by mode – *Indicator A* blinks every 4 seconds.

(b) To enter into pairing mode,

1. First, set this unit under OFF mode. (To enter into OFF mode, please press the function key for 2 seconds until *Indicator A* is off. A short beep will sound if it is off.)
2. Press function key for 4 seconds(approx.)until *Indicator A & Indicator B* (red & green LEDS) blink in turn. Meanwhile, a short beep will sound.

Pairing Between Phones and Headset :

(a) Initiate Bluetooth function of phones & search for Bluetooth devices.
 For example : SIEMENS S55, procedure is
 "Menu/Setup/Connectivity/Bluetooth/Options/search for
 Accessories/Access" .

(b) Phones will start searching for Bluetooth devices. If it's successful, phone screen will show the name of obtained device- "CSR-bc2" (This can be customized upon customer's request.)
 Press "Yes" to pair this unit to the phones.

(c) Input ID code of this unit- "1234" . (This can be customized upon customer's request.) Press "Yes" to complete Pairing.
 (Pairing procedure might be varied because of different phones.
 Therefore, users are recommended to refer to their individual Phone type User's Manual.) Meanwhile, this unit is under Stand-By mode-*Indicator A* (Green LED) blinks every 4 seconds.

Recording the Voice Dialing

Use your phone when recording for voice dialing. Record your contact names and numbers in the "Address book" (phone memory)

Using SIEMENS S55

- From standby mode, open the Address book by pressing the arrow down key (If phone book is the one displayed, press key to switch to Address book) .
- Select a contacts name. Options.
- Scroll to Voice dialing SELECT. New--SELECT. Recording for : contact name--YES. Follow the instructions. Your voice is automatically saved on the phone after being played back to you.
- In case you wish to change your recorded voice, press Options button. Voice tags--SELECT. Change--SELECT. Instructions appear.
- Press ON/OFF/End key to exit.

FEDERAL COMMUNICATIONS COMMISSION

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.