

BTD-6 User Manual

Safety and Approvals and Certification

Users are advised not to make changes or modify the device in any way. Changes or modifications not expressly approved by HALFA will void the warranty.

FCC Notices

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC RF Exposure Requirements

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.


NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

CE Statement

Important Notice: This device is a 2.4 ~ 2.5 GHz FHSS Bluetooth Headset, intended for office and home uses in all EU and EFTA member states.

Read this user's guide carefully before you start using HALFA Bluetooth Headset.

Features

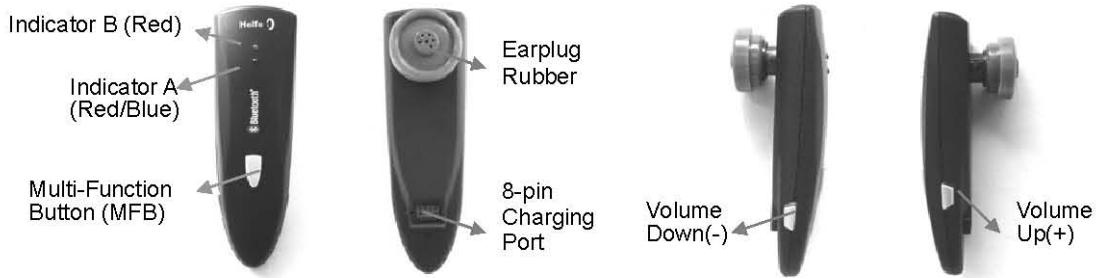

Turn the Unit ON/OFF

Headset On

1. Pressing down the **MFB** for 3 seconds. The BTD-6 headset will turn ON. When it is ON, a low-high tone is heard and the Indicator A (blue LED) will flash 5 times and then go on. After releasing the **MFB**, the light will blink that Indicates the unit is waiting for a call (standby mode).
2. If the Indicator A turns red, it means that the battery on the headset is low. Re-charge the headset immediately.

Headset Off

Press the **MFB** for about 3 seconds and it will be turned OFF. A high-low tone will be heard and the Indicator A will flash red light 5 times and then go out. Turn off the headset is necessary to conserve battery life if the headset will not be used for a long time.

Pairing to the Phone

Before use, the headset must be paired with the phone. Pairing needs to be done only once. When the phone and the unit have been paired, connecting to the phone will be used by pressing the **MFB** of the headset once every time the phone is turned on for use.

Enter into Pairing Mode

- (a) First, this unit must be preset under standby mode – Indicator A (blue LED) blinks every 3 seconds.
- (b) To enter into pairing mode,
 - (1) First, set this unit under OFF mode. (To enter into OFF mode, please press the **MFB** for 3 seconds until Indicator A (red LED) flashes 3 times and then goes off. A high-low tone will sound when the phone is turning off.)
 - (2) Press **MFB** for 5 seconds (approx.) until Indicator A (blue LED) blinks 10 times and then goes into blue and red flash interchanged. Meanwhile, two beeps come and the Headset will be in “pairing mode”.
 - (3) Key in the PIN Code “1234”. (This can be customized upon customer’s request.) Press “OK” to complete Pairing. (Pairing procedure might be varied because of different phones. Therefore, users are recommended to refer to their individual Phone type User’s Manual.) Meanwhile, this unit is under standby mode-Indicator A (blue LED) blinks every 3 seconds, or in connection status - Indicator A (blue LED) blinks 3 times in every 3 seconds (Headset in standby mode or in connection status depends on the cellular phone) on your Bluetooth enabled cellular phone after you have preset to pairing mode with headset.

Answering/Receiving a call

When phone is receiving a call, the phone ring tone will be heard on the headset, pressing the

MFB on the headset once to answer the call. Press **MFB** again will hang-up and terminate the call.

Making a call (voice dialing)

- (1) Press the headset **MFB** to activate the voice dialing.
- (2) A beep will be heard then prompt the user to say the name of the person to call.
- (3) Say the name after beep.
- (4) The phone will place the call automatically. In case the phone does not recognize the name spoken, the steps above may be repeated.
- (5) Press the **MFB** again to terminate the call
- (6) If the desired number to be dialed has no voice tag, normal dialing also can be done by using the keypad on the Bluetooth enabled phone. When connected, press the **MFB** again will hang-up and terminate the call.

Charging

Plug the USB cable into the 8-pin jack on the bottom of the Headset, and plug the other end into the USB port of Notebook/PC for power. In charging condition, the Indicator B (red LED) of the Headset will be on. It takes about 2 hours to charge the Headset. The Indicator B (red LED) will disappear after charging is complete.

Last Call Redial

Press the volume down (-) key on the headset over 2 seconds and release after a ring tone. The redial will be in process.

Hold Function

Long press (2 sec.) the volume down (-) key to hold the call while on the line.

Mute Function

In call active, press the volume down (-) key and up (+) key coincidentally it will mute the MIC. If press either the volume down (-) or up (+) again, it will go back to the normal condition.

Transfer Function

In call active, long press the volume up (+) key it will transfer the call to cellule phone. IF long press the volume up (+) key again the call will go back to the headset.

ACCESSORIES:

a. Ear Hook b. USB cable with 8-pin plug c. AC Adaptor with USB port (optional)

