




FCC Radio Test Report

FCC ID: RWO-RC300540

This report concerns: Original Grant

Project No. : 2501C165
Equipment : Wireless Dongle
Alternate Equipment Name : Wireless Dongle Xbox
Brand Name :  RAZER,
Test Model : RC30-0540
Series Model : RC30-0540XXXX-XXXX (X can be 0-9 or A-Z)
Applicant : Razer Inc.
Address : 9 Pasteur Irvine, CA 92618, USA
Manufacturer : RAZER (ASIA-PACIFIC) PTE. LTD.
Address : Razer SEA HQ, 1 One-north Crescent, #02-01, Singapore 138538
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji South Road, Hi-Tech Industrial
Date of Receipt : Jan. 20, 2025
Date of Test : Jan. 21, 2025 ~ Mar. 10, 2025
Issued Date : Jun. 03, 2025
Report Version : R01
Test Sample : Sample No.: DG20250120194 for Radiated and AC Power Line Conducted Emissions (PC version), DG20250210108 for Radiated and AC Power Line Conducted Emissions (Xbox version), DG20250120193 for Others(PC version), DG2025022746 for Others(Xbox version).
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan).

Prepared by : 
 Evan Yang
Approved by : 
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 SUPPORT UNITS	14
3.6 CUSTOMER INFORMATION DESCRIPTION	14
4 . AC POWER LINE CONDUCTED EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	16
4.6 TEST RESULTS	16
5 . RADIATED EMISSIONS	17
5.1 LIMIT	17
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM TEST STANDARD	19
5.4 TEST SETUP	19
5.5 EUT OPERATING CONDITIONS	21
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	21
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	21
5.8 TEST RESULT - ABOVE 1000 MHZ	21
6 . BANDWIDTH	22
6.1 LIMIT	22
6.2 TEST PROCEDURE	22

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	22
6.4 TEST SETUP	22
6.5 EUT OPERATION CONDITIONS	22
6.6 TEST RESULTS	22
7 . MAXIMUM OUTPUT POWER	23
7.1 LIMIT	23
7.2 TEST PROCEDURE	23
7.3 DEVIATION FROM STANDARD	23
7.4 TEST SETUP	23
7.5 EUT OPERATION CONDITIONS	23
7.6 TEST RESULTS	23
8 . CONDUCTED SPURIOUS EMISSION	24
8.1 LIMIT	24
8.2 TEST PROCEDURE	24
8.3 DEVIATION FROM STANDARD	24
8.4 TEST SETUP	24
8.5 EUT OPERATION CONDITIONS	24
8.6 TEST RESULTS	24
9 . POWER SPECTRAL DENSITY	25
9.1 LIMIT	25
9.2 TEST PROCEDURE	25
9.3 DEVIATION FROM STANDARD	25
9.4 TEST SETUP	25
9.5 EUT OPERATION CONDITIONS	25
9.6 TEST RESULTS	25
10 . MEASUREMENT INSTRUMENTS LIST	26
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	28
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	33
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	42
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	47
APPENDIX E - BANDWIDTH	82
APPENDIX F - MAXIMUM OUTPUT POWER	89

Table of Contents**Page****APPENDIX G - CONDUCTED SPURIOUS EMISSION****94****APPENDIX H - POWER SPECTRAL DENSITY****101**

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2501C165	R00	Original Report.	Apr. 17, 2025	Invalid
BTL-FCCP-1-2501C165	R01	Added the alternate equipment name.	Jun. 03, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated Emission-1GHz to 18GHz Items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For Other Items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB17 (3m)	CISPR	1GHz ~ 6GHz	4.56
		6GHz ~ 18GHz	4.12

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	22-23°C	45-50%	AC 120V/60Hz	Hayden Chen	Feb. 07, 2025- Feb. 28, 2025
Radiated Emissions -9 kHz to 30 MHz	22-23°C	46%	DC 5V	Hayden Chen	Feb. 11, 2025- Mar. 06, 2025
Radiated Emissions-30 MHz to 1000 MHz	23-25°C	42-46%	DC 5V	Calvin Wen	Jan. 24, 2025- Mar. 03, 2025
Radiated Emissions-Above 1000 MHz	20-25°C	41-48%	DC 5V	Calvin Wen Allen Tong	Feb. 24, 2025- Mar. 06, 2025
Bandwidth	22°C	50%	DC 5V	Steve Zhou	Feb. 12, 2025- Mar. 01, 2025
Maximum Output Power	22°C	50%	DC 5V	Steve Zhou	Feb. 12, 2025- Mar. 01, 2025
Conducted Spurious Emission	22°C	50%	DC 5V	Steve Zhou	Feb. 12, 2025- Mar. 01, 2025
Power Spectral Density	22°C	50%	DC 5V	Steve Zhou	Feb. 12, 2025- Mar. 01, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Dongle
Alternate Equipment Name	Wireless Dongle Xbox
Brand Name	 RAZER,
Test Model	RC30-0540
Series Model	RC30-0540XXXX-XXXX (X can be 0-9 or A-Z)
Model Difference(s)	Only differ in the model name.
Software Version	V1.0.2
Hardware Version	DVT
Power Source	Supplied from USB port.
Power Rating	DC 5V
Operation Frequency	1Mbps, 2Mbps: 2402 MHz ~ 2480 MHz 4Mbps: 2404 MHz ~ 2478 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 4Mbps
Max. Output Power For PC version	1Mbps: 11.60 dBm (0.0145 W)
Max. Output Power For Xbox version	1Mbps: 11.61 dBm (0.0145 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

Note: The 4Mbps transmit bit rate does not support 2402MHz, 2426MHz and 2480MHz channel, other rates support all channels.

4. Table for Filed Antenna:

For PC version

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Cicent	GW138	FPC	N/A	2.25

For Xbox version

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Cicent	GW138	FPC	N/A	2.23

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_4Mbps Channel 01/19/38
Mode 4	TX Mode_1Mbps Channel 00

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 4	TX Mode_1Mbps Channel 00

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 4	TX Mode_1Mbps Channel 00

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_4Mbps Channel 01/19/38

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_4Mbps Channel 01/19/38

Note:


- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 1Mbps Channel 00 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical. In this report only recorded the worst case.

3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	AB157x_Airoha_Tool_Kit(ATK)_v5.4.0.3		
Frequency (MHz)	2402	2440	2480
1Mbps	63	63	63
2Mbps	63	63	63
Frequency (MHz)	2404	2440	2478
4Mbps	63	63	63

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

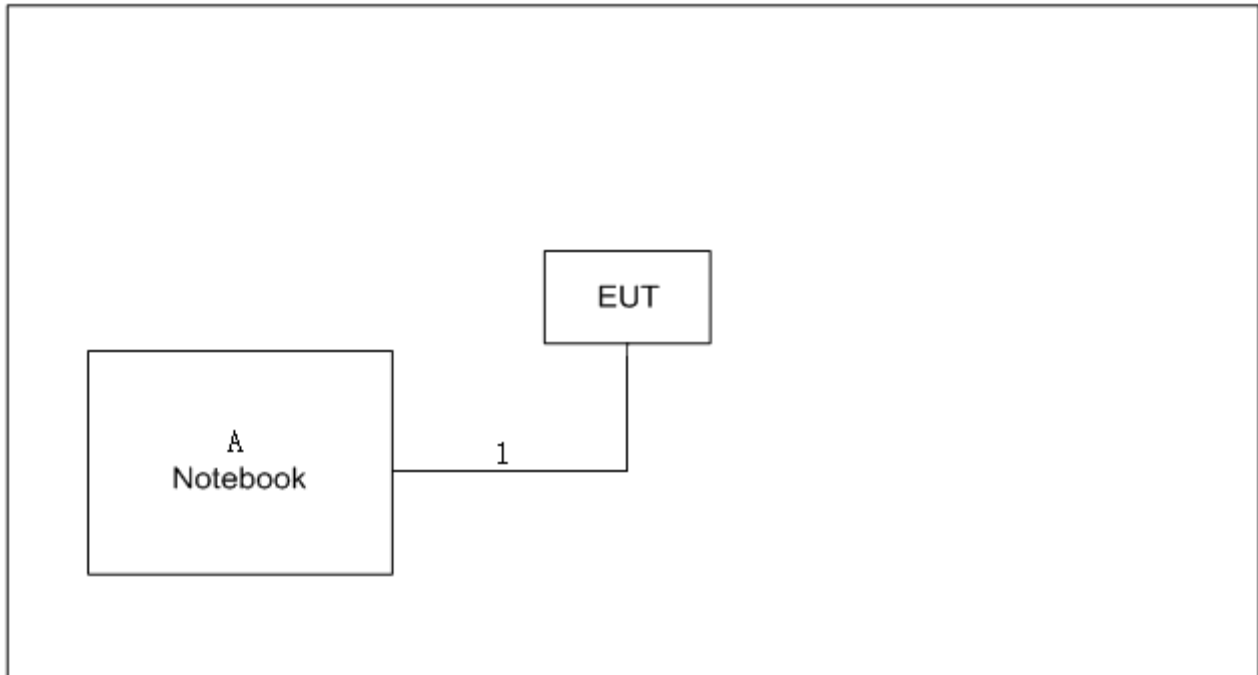

3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	HUAWEI	WFH9	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.5m

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

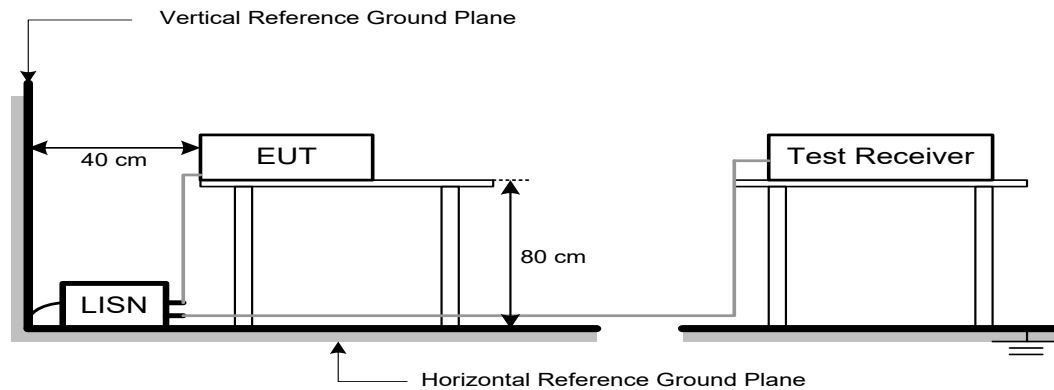

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

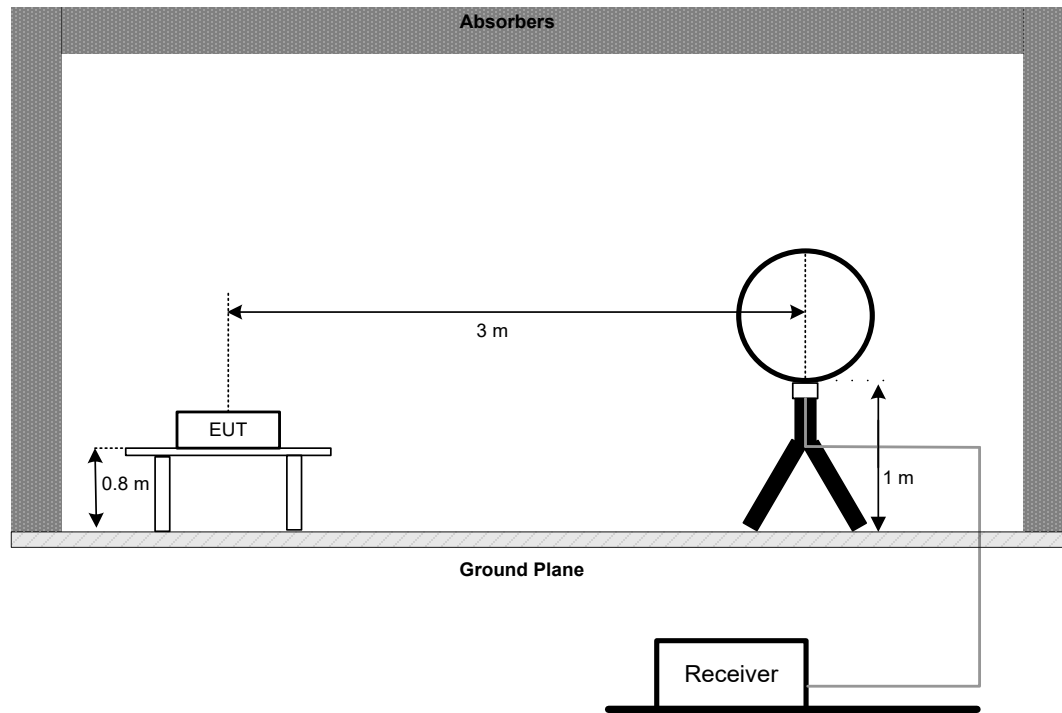


30 MHz to 1 GHz

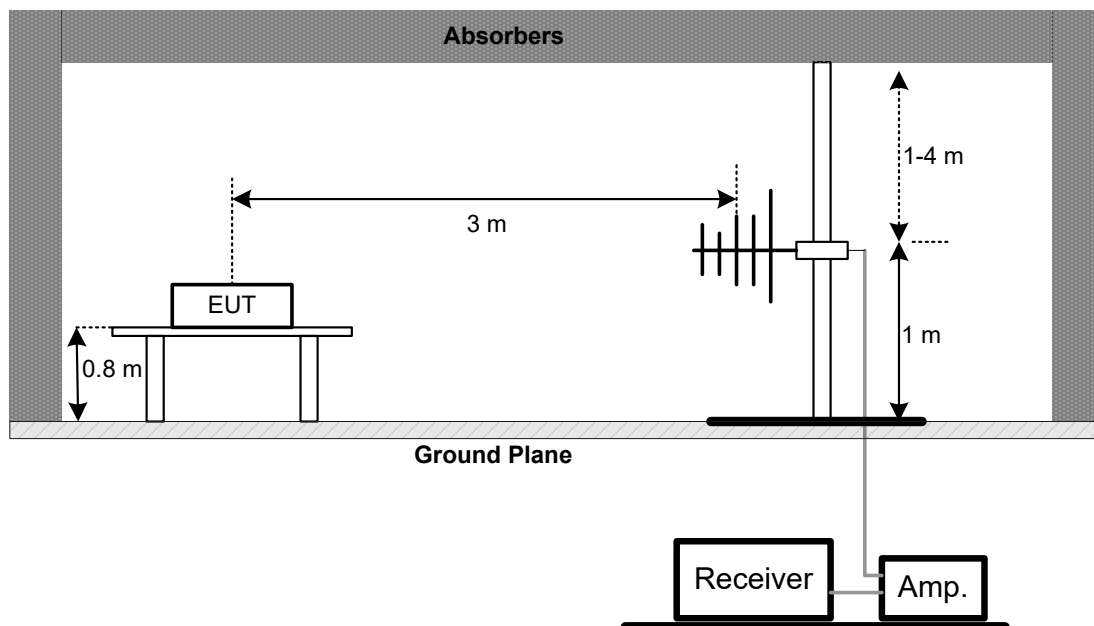

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

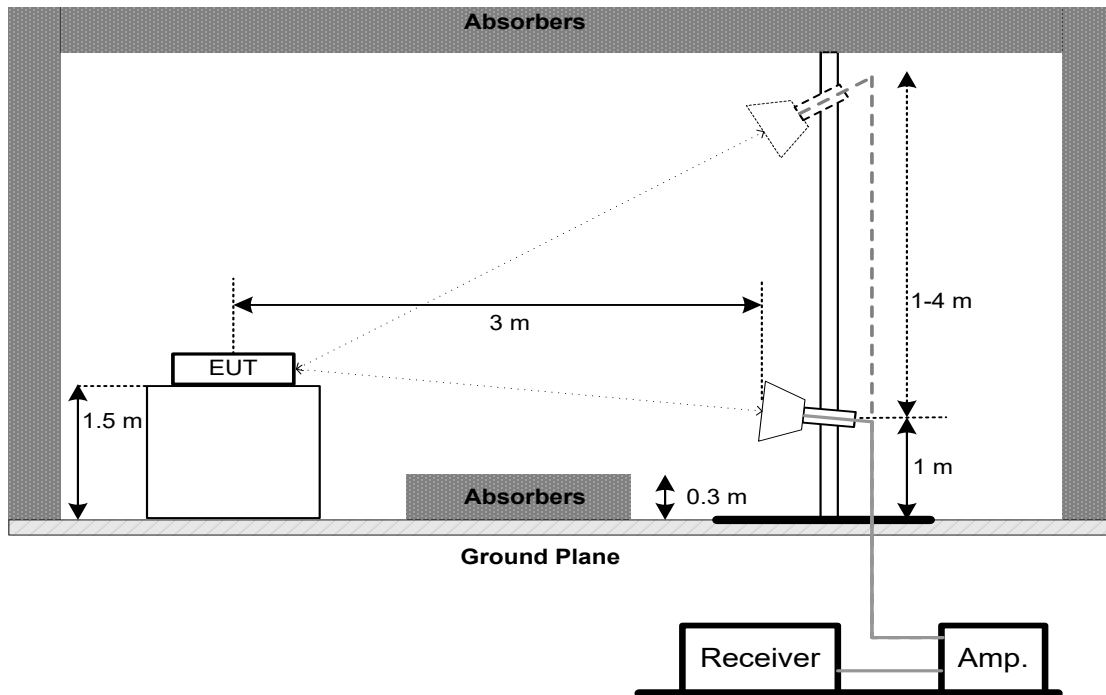

Harmonic(18 GHz to 26.5 GHz)

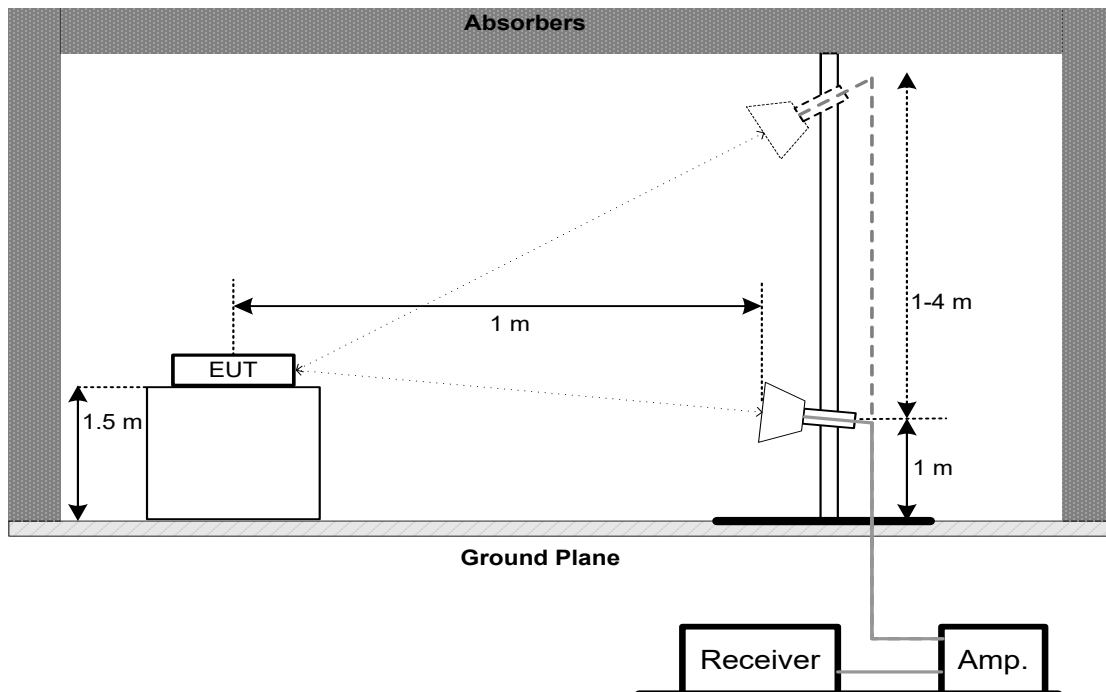

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

5.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	$>$ Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

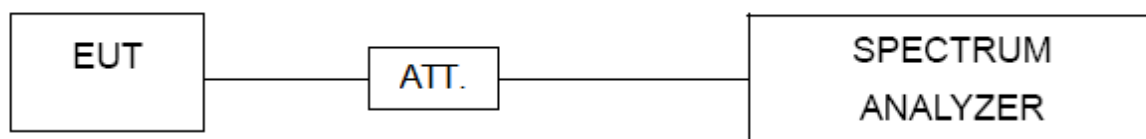

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSION

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps/4 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

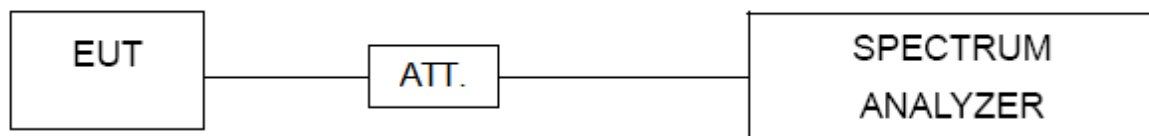

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M-KJ	N/A	Jan. 07, 2026
4	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 07, 2026
5	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 07, 2026
6	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210510A18ES	Sep. 26, 2025
7	966 Chamber room	ETS	9*6*6	N/A	Jan. 03, 2026
8	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980878	Nov. 25, 2025
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
10	Filter	STI	STI15-9912	N/A	May 31, 2025
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

For PC version

Test Mode	TX Mode_1Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

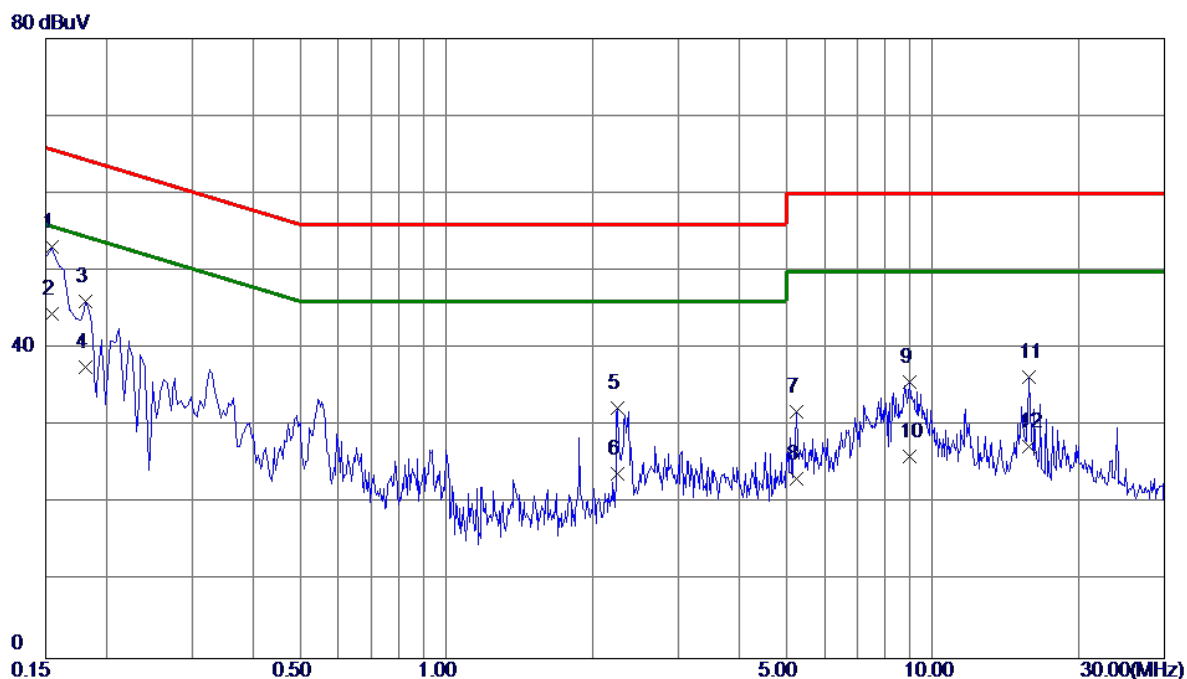


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	43.24	9.90	53.14	65.75	-12.61	QP	
2 *	0.1545	34.51	9.90	44.41	55.75	-11.34	AVG	
3	0.1815	36.21	9.92	46.13	64.42	-18.29	QP	
4	0.1815	27.70	9.92	37.62	54.42	-16.80	AVG	
5	2.2559	22.12	10.23	32.35	56.00	-23.65	QP	
6	2.2559	13.61	10.23	23.84	46.00	-22.16	AVG	
7	5.2619	21.07	10.77	31.84	60.00	-28.16	QP	
8	5.2619	12.40	10.77	23.17	50.00	-26.83	AVG	
9	8.9790	23.98	11.69	35.67	60.00	-24.33	QP	
10	8.9790	14.40	11.69	26.09	50.00	-23.91	AVG	
11	15.8100	22.42	13.93	36.35	60.00	-23.65	QP	
12	15.8100	13.49	13.93	27.42	50.00	-22.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

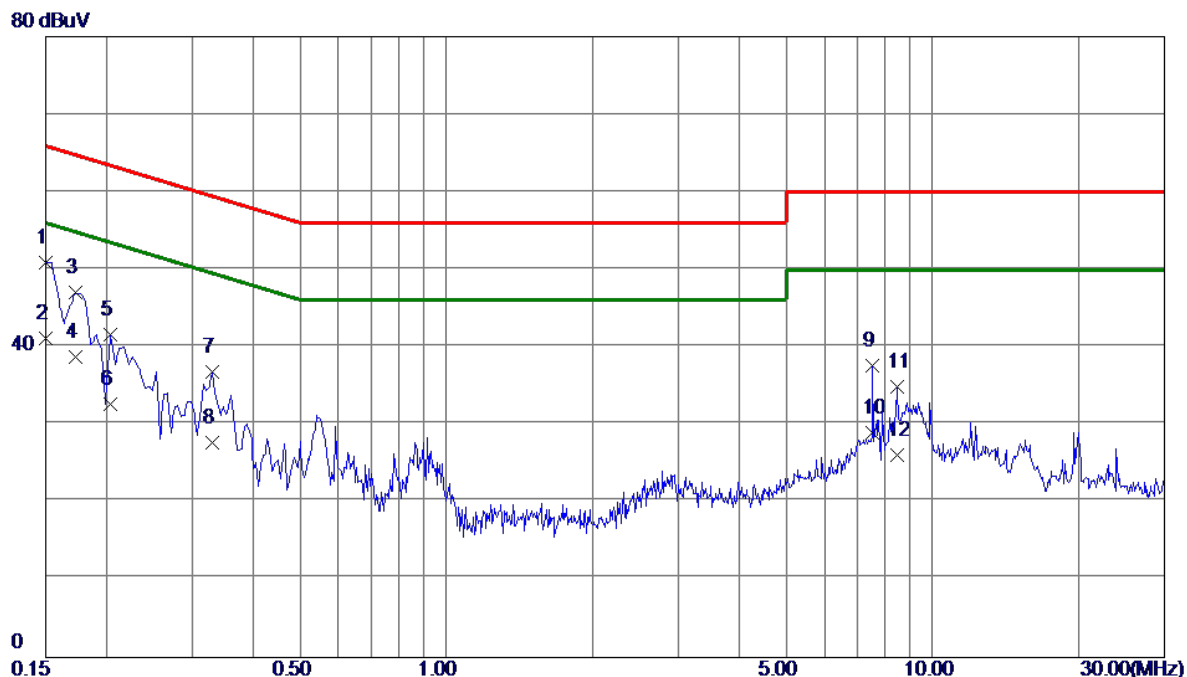

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	40.95	9.97	50.92	66.00	-15.08	QP	
2 *	0.1500	31.20	9.97	41.17	56.00	-14.83	AVG	
3	0.1725	37.00	9.97	46.97	64.84	-17.87	QP	
4	0.1725	28.80	9.97	38.77	54.84	-16.07	AVG	
5	0.2040	31.60	9.97	41.57	63.45	-21.88	QP	
6	0.2040	22.60	9.97	32.57	53.45	-20.88	AVG	
7	0.3300	26.83	9.98	36.81	59.45	-22.64	QP	
8	0.3300	17.70	9.98	27.68	49.45	-21.77	AVG	
9	7.5435	26.31	11.30	37.61	60.00	-22.39	QP	
10	7.5435	17.60	11.30	28.90	50.00	-21.10	AVG	
11	8.4525	23.36	11.55	34.91	60.00	-25.09	QP	
12	8.4525	14.49	11.55	26.04	50.00	-23.96	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

For Xbox version

Test Mode	TX Mode_1Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

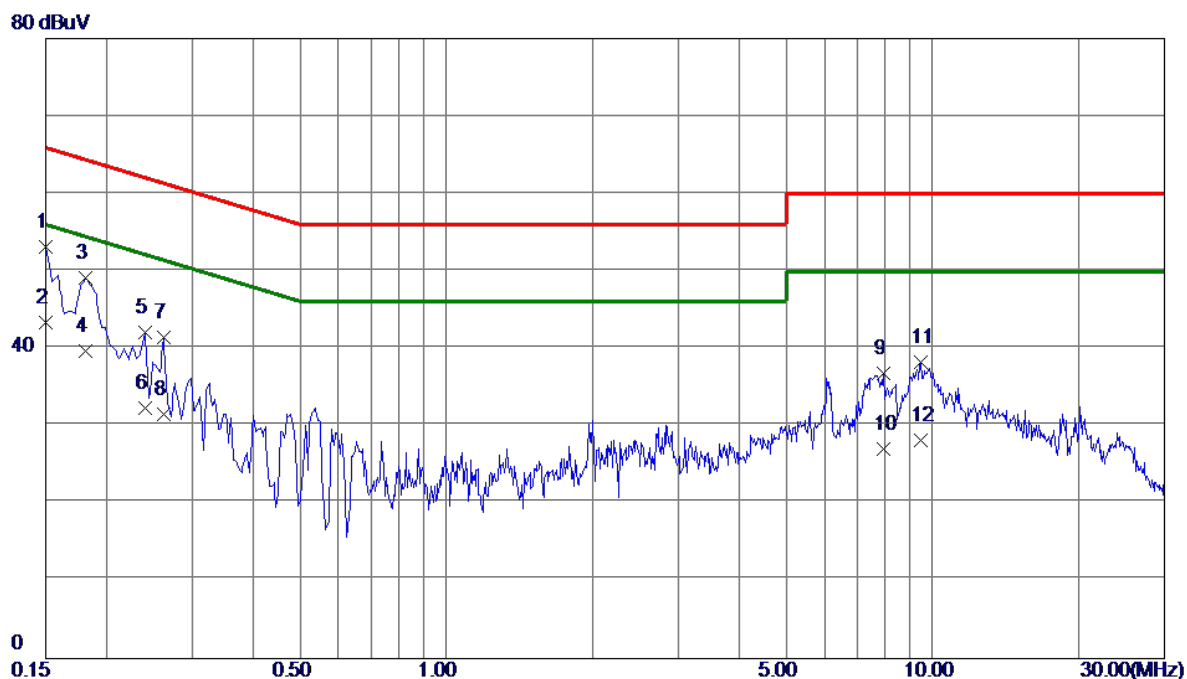


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	43.19	9.90	53.09	66.00	-12.91	QP	
2 *	0.1500	33.49	9.90	43.39	56.00	-12.61	AVG	
3	0.1815	39.23	9.92	49.15	64.42	-15.27	QP	
4	0.1815	29.80	9.92	39.72	54.42	-14.70	AVG	
5	0.2400	32.24	9.90	42.14	62.10	-19.96	QP	
6	0.2400	22.40	9.90	32.30	52.10	-19.80	AVG	
7	0.2625	31.55	9.90	41.45	61.35	-19.90	QP	
8	0.2625	21.61	9.90	31.51	51.35	-19.84	AVG	
9	7.9260	25.41	11.40	36.81	60.00	-23.19	QP	
10	7.9260	15.70	11.40	27.10	50.00	-22.90	AVG	
11	9.4830	26.36	11.83	38.19	60.00	-21.81	QP	
12	9.4830	16.29	11.83	28.12	50.00	-21.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

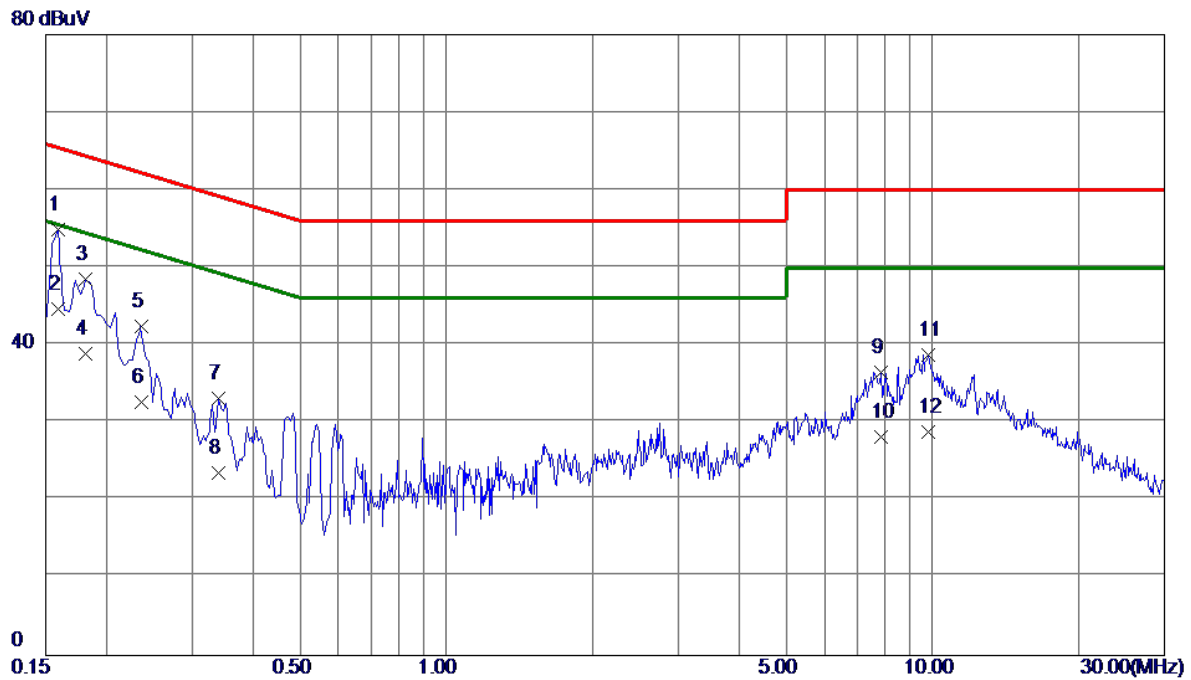

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1590	44.90	9.97	54.87	65.52	-10.65	QP	
2	0.1590	34.61	9.97	44.58	55.52	-10.94	AVG	
3	0.1815	38.45	9.97	48.42	64.42	-16.00	QP	
4	0.1815	28.90	9.97	38.87	54.42	-15.55	AVG	
5	0.2355	32.42	9.98	42.40	62.25	-19.85	QP	
6	0.2355	22.70	9.98	32.68	52.25	-19.57	AVG	
7	0.3390	23.09	9.98	33.07	59.23	-26.16	QP	
8	0.3390	13.50	9.98	23.48	49.23	-25.75	AVG	
9	7.8315	25.15	11.38	36.53	60.00	-23.47	QP	
10	7.8315	16.80	11.38	28.18	50.00	-21.82	AVG	
11	9.7755	26.85	11.90	38.75	60.00	-21.25	QP	
12	9.7755	16.90	11.90	28.80	50.00	-21.20	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

For PC version

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

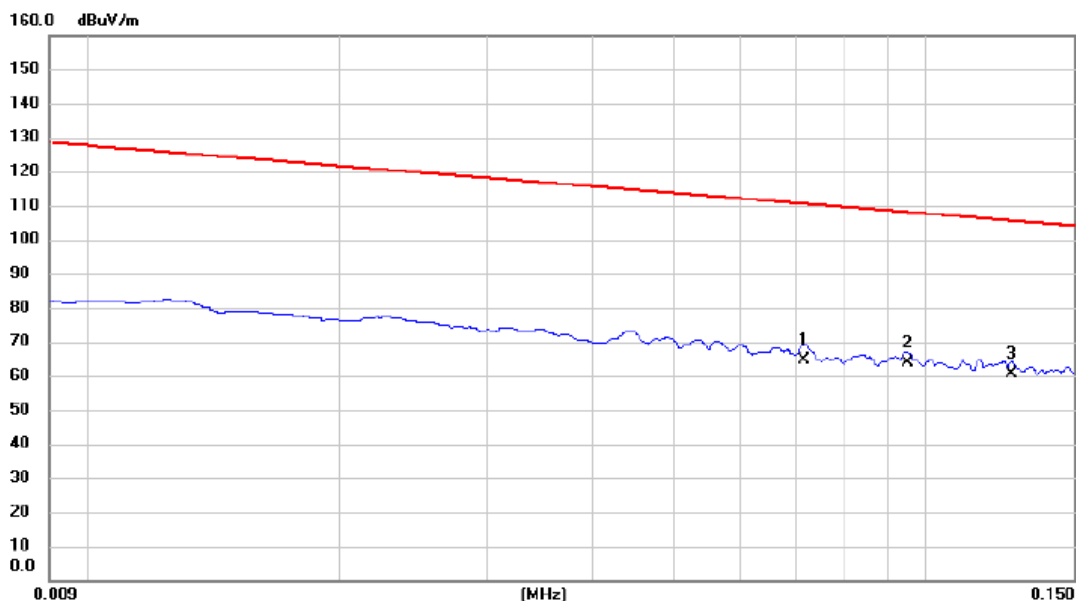


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.0716	43.35	21.31	64.66	110.51	-45.85	AVG	
2 *	0.0950	42.44	21.34	63.78	108.05	-44.27	QP	
3	0.1267	39.18	21.30	60.48	105.55	-45.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

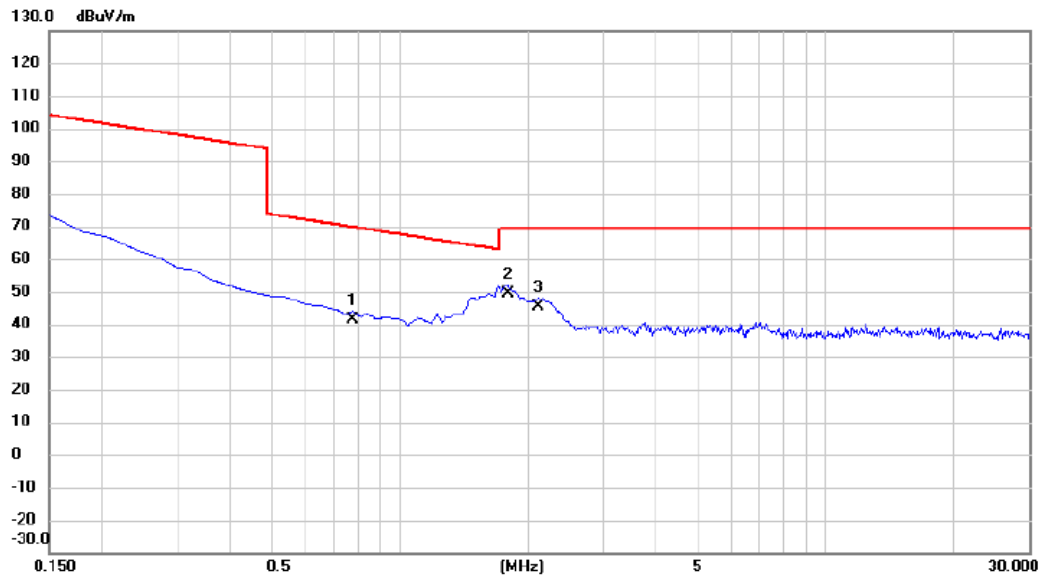


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.7768	20.40	21.16	41.56	69.80	-28.24	QP	
2	*	1.7917	28.16	21.13	49.29	69.54	-20.25	QP	
3		2.1200	24.32	21.11	45.43	69.54	-24.11	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

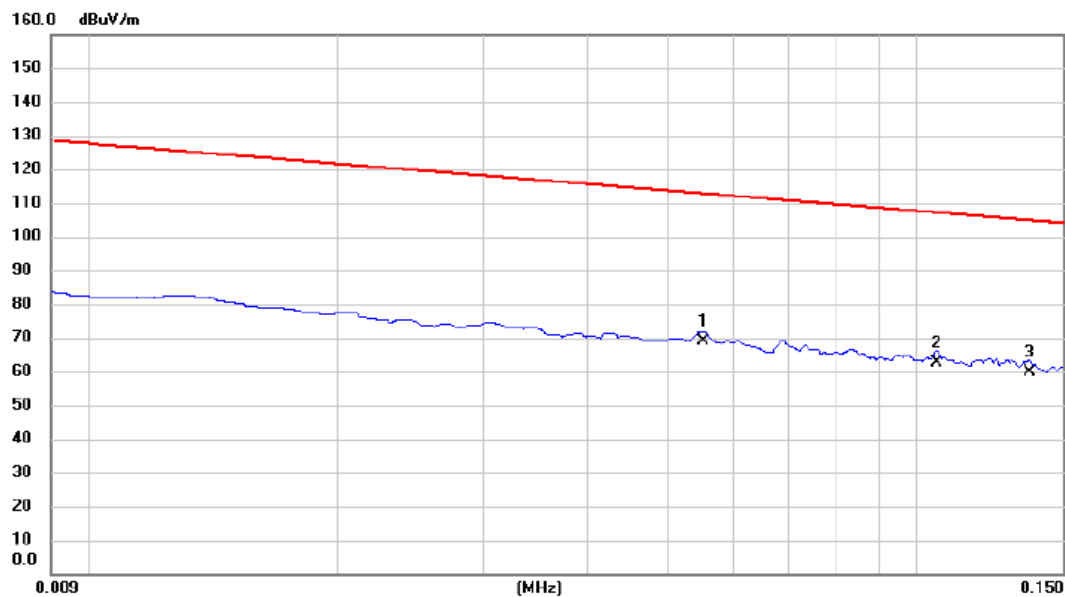


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0551	47.64	21.26	68.90	112.78	-43.88	AVG	
2		0.1058	41.35	21.33	62.68	107.12	-44.44	QP	
3		0.1368	38.58	21.28	59.86	104.89	-45.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

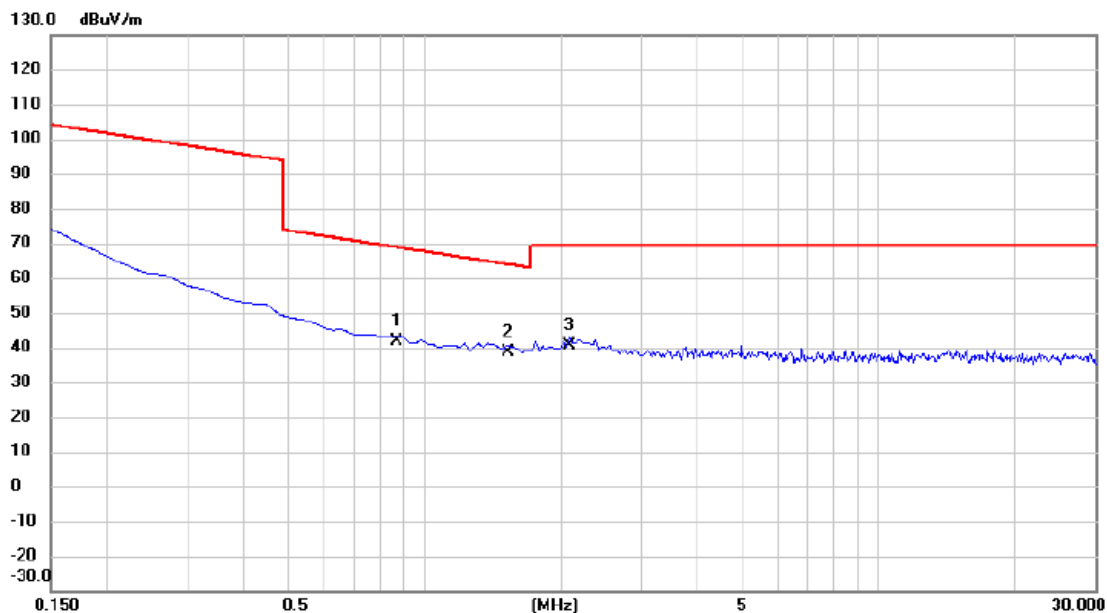


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.8663	20.48	21.18	41.66	68.85	-27.19	QP	
2 *	1.5230	17.62	21.16	38.78	63.95	-25.17	QP	
3	2.0902	19.37	21.11	40.48	69.54	-29.06	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

For Xbox version

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

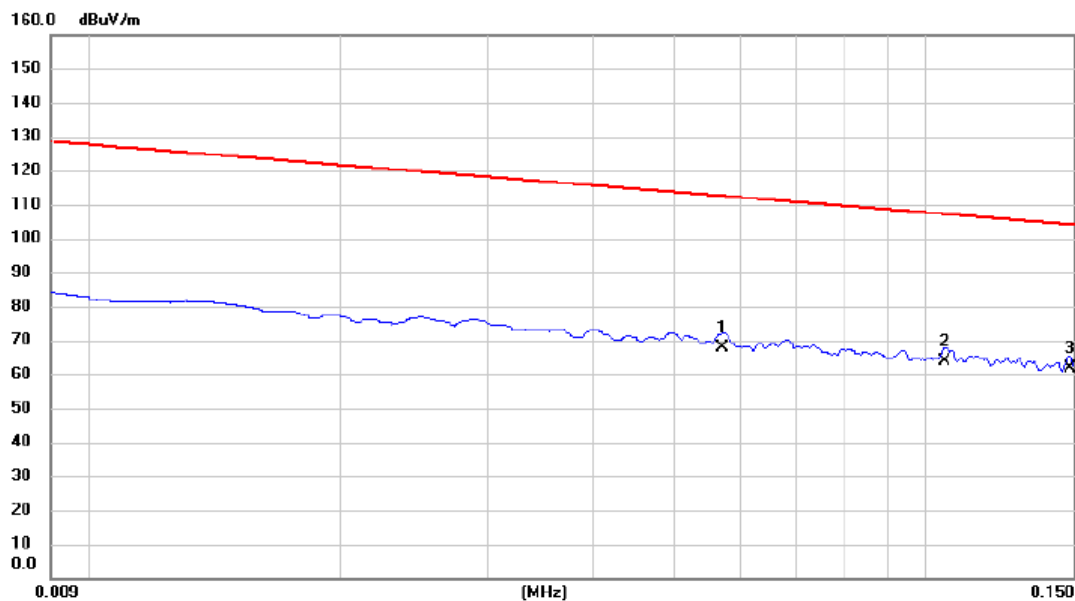


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0572	46.68	21.26	67.94	112.46	-44.52	AVG	
2		0.1054	42.37	21.33	63.70	107.15	-43.45	QP	
3	*	0.1484	40.49	21.27	61.76	104.18	-42.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

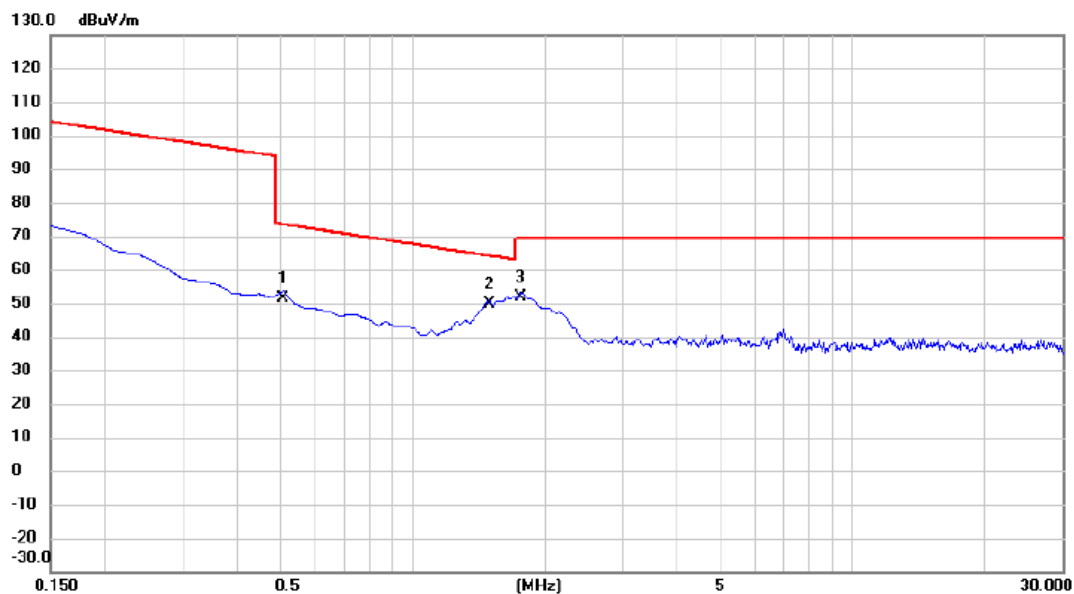


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.5082	30.47	21.06	51.53	73.48	-21.95	QP	
2	*	1.4932	28.69	21.15	49.84	64.12	-14.28	QP	
3		1.7620	30.52	21.13	51.65	69.54	-17.89	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

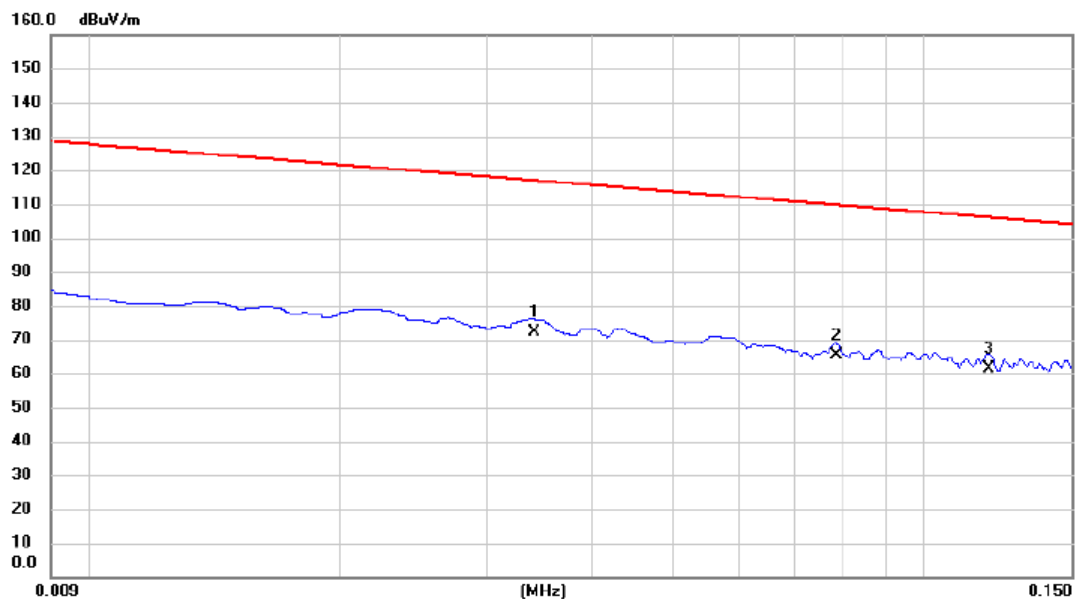


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0341	51.23	21.16	72.39	116.95	-44.56	AVG	
2	*	0.0784	44.25	21.33	65.58	109.72	-44.14	AVG	
3		0.1195	40.11	21.31	61.42	106.06	-44.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

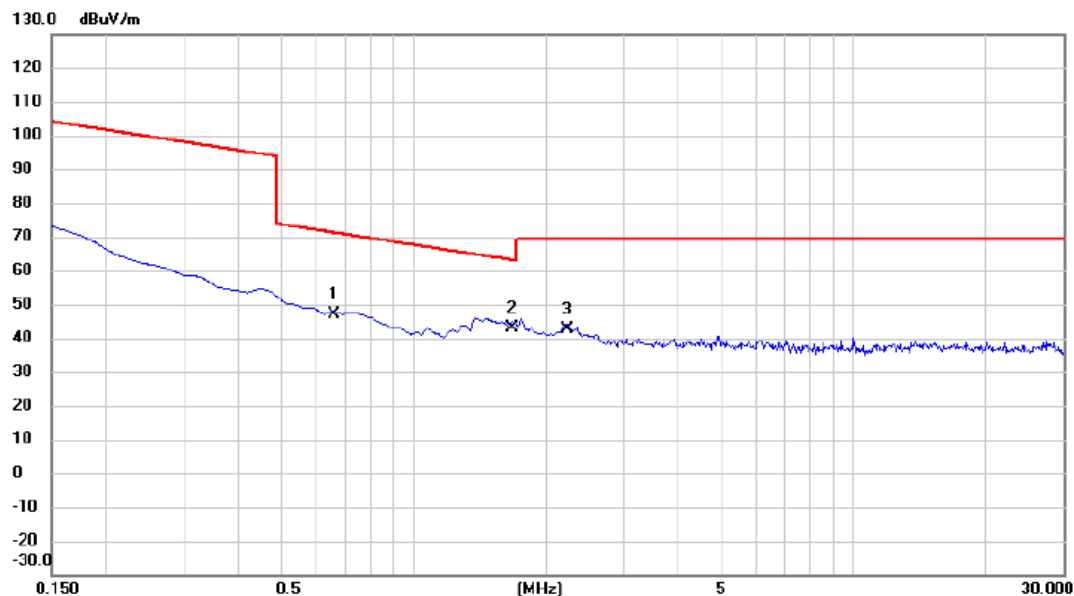

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.6574	25.74	21.11	46.85	71.25	-24.40	QP	
2	*	1.6724	21.68	21.14	42.82	63.14	-20.32	QP	
3		2.2395	21.32	21.11	42.43	69.54	-27.11	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

For PC version

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

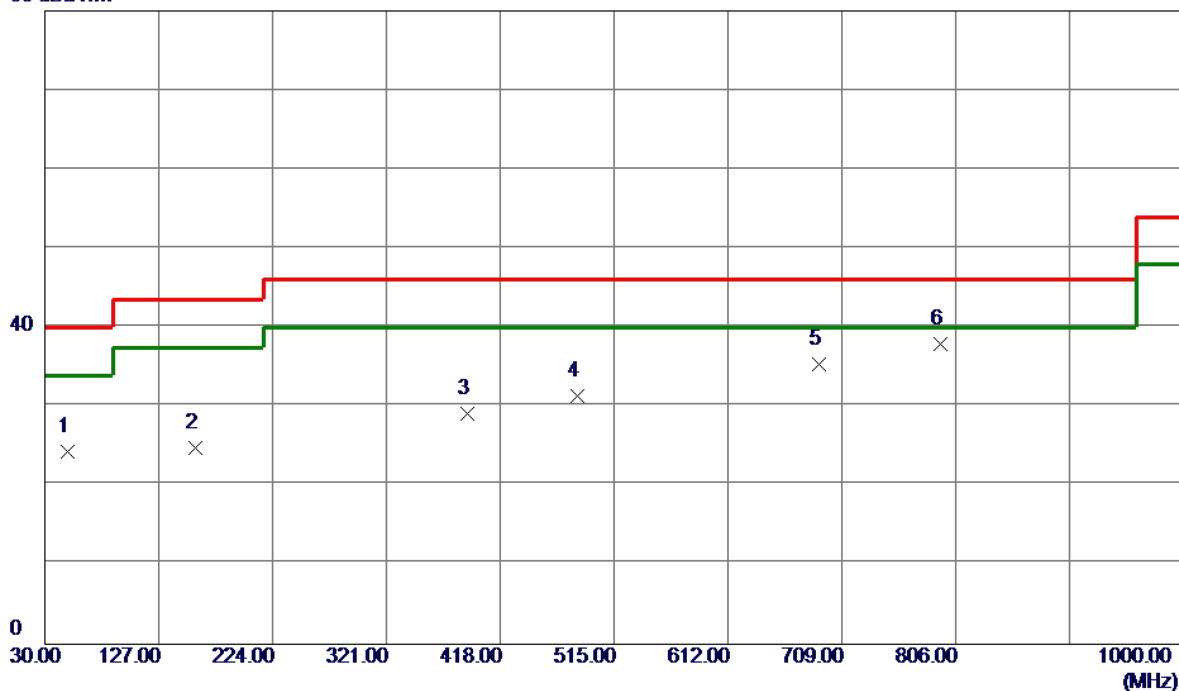


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	49.4000	35.62	-11.30	24.32	40.00	-15.68	Peak	
2	158.5250	35.91	-11.04	24.87	43.52	-18.65	Peak	
3	389.8700	37.43	-8.24	29.19	46.02	-16.83	Peak	
4	483.9600	37.50	-6.07	31.43	46.02	-14.59	Peak	
5	690.0850	37.98	-2.55	35.43	46.02	-10.59	Peak	
6 *	793.3900	38.83	-0.86	37.97	46.02	-8.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

80 dBuV/m

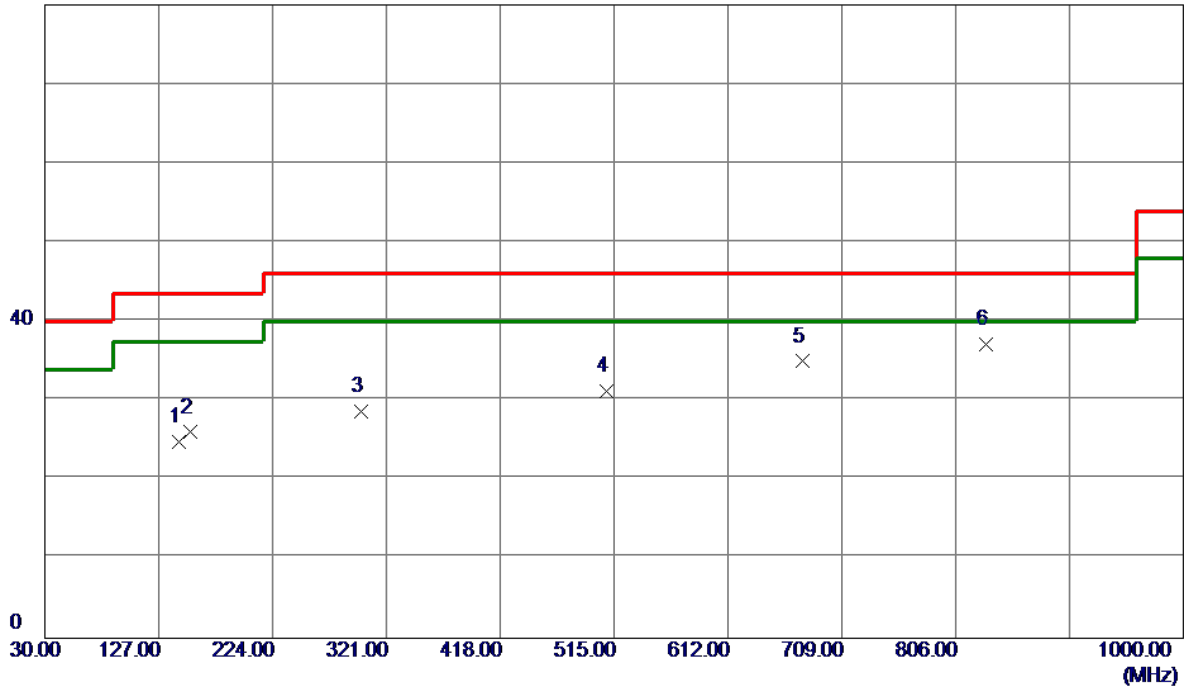

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	144.4600	36.26	-11.42	24.84	43.52	-18.68	Peak	
2	153.6750	37.08	-11.08	26.00	43.52	-17.52	Peak	
3	299.6600	39.17	-10.51	28.66	46.02	-17.36	Peak	
4	508.6950	36.92	-5.67	31.25	46.02	-14.77	Peak	
5	676.0200	37.52	-2.56	34.96	46.02	-11.06	Peak	
6 *	831.7050	37.71	-0.63	37.08	46.02	-8.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

For Xbox version

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

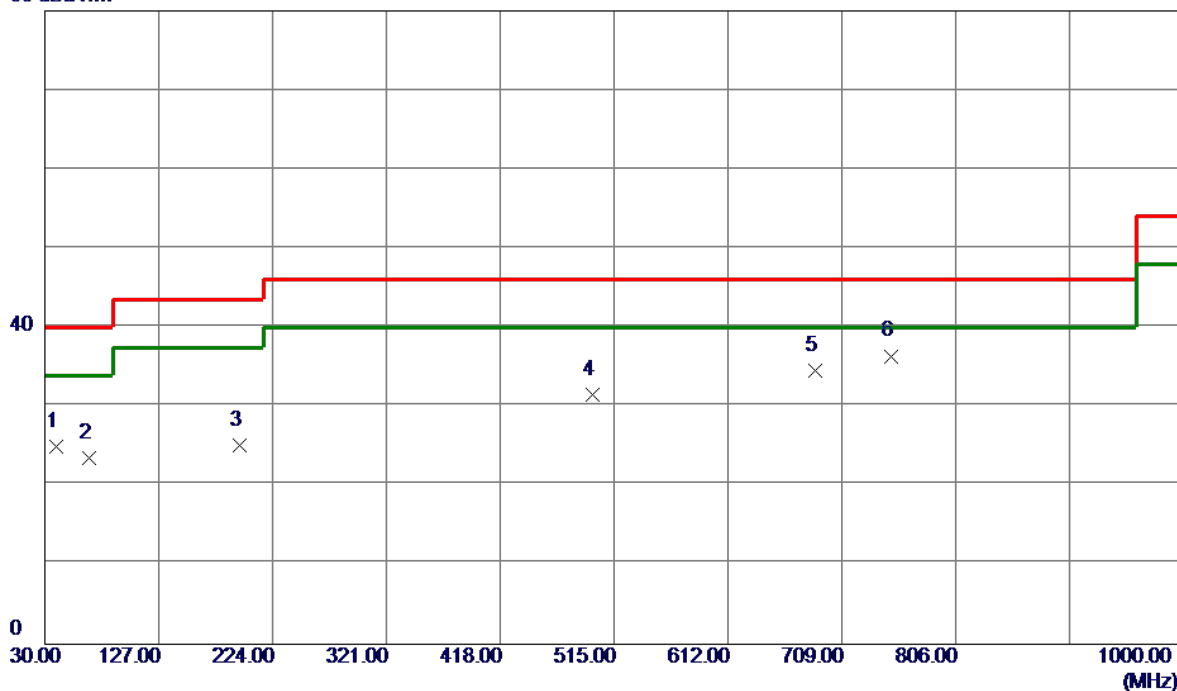


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	36.85	-11.94	24.91	40.00	-15.09	Peak	
2	67.8300	36.73	-13.14	23.59	40.00	-16.41	Peak	
3	195.8700	39.61	-14.42	25.19	43.50	-18.31	Peak	
4	496.5700	37.83	-6.29	31.54	46.00	-14.46	Peak	
5	686.6900	37.32	-2.72	34.60	46.00	-11.40	Peak	
6 *	750.7100	38.19	-1.79	36.40	46.00	-9.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

80 dBuV/m

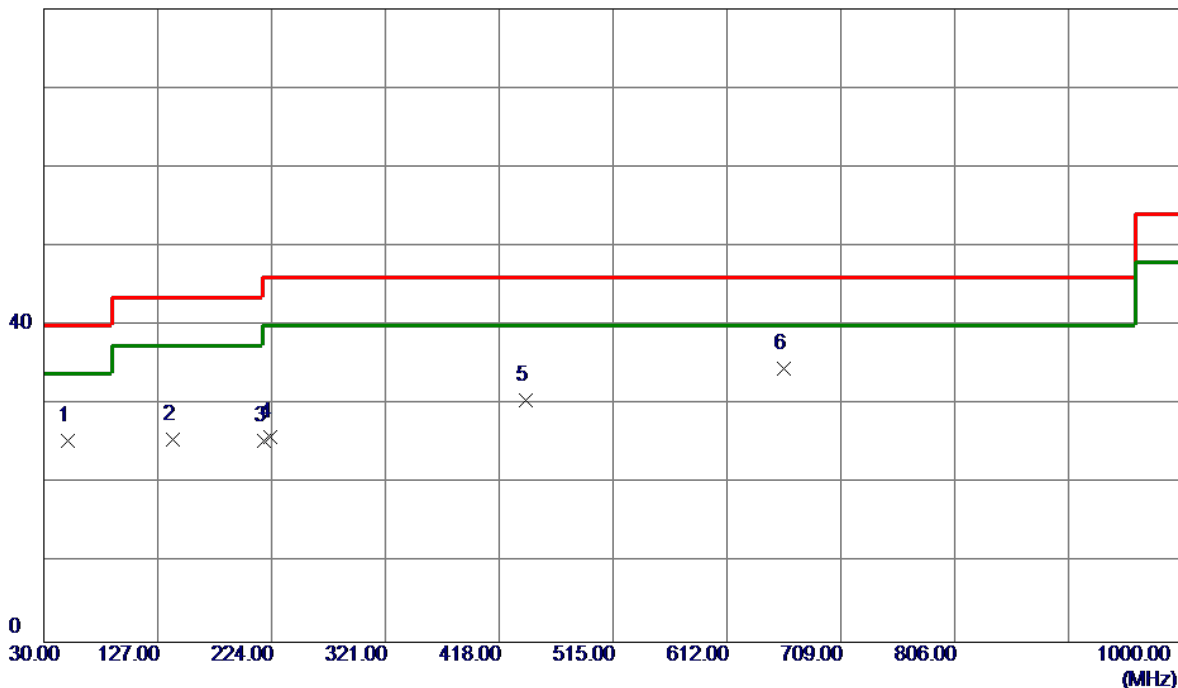

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	50.3700	36.97	-11.56	25.41	40.00	-14.59	Peak	
2	139.6100	37.56	-11.96	25.60	43.50	-17.90	Peak	
3	217.2100	40.05	-14.67	25.38	46.00	-20.62	Peak	
4	223.0300	40.40	-14.41	25.99	46.00	-20.01	Peak	
5	440.3100	38.04	-7.41	30.63	46.00	-15.37	Peak	
6 *	660.5000	37.89	-3.28	34.61	46.00	-11.39	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

For PC version

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

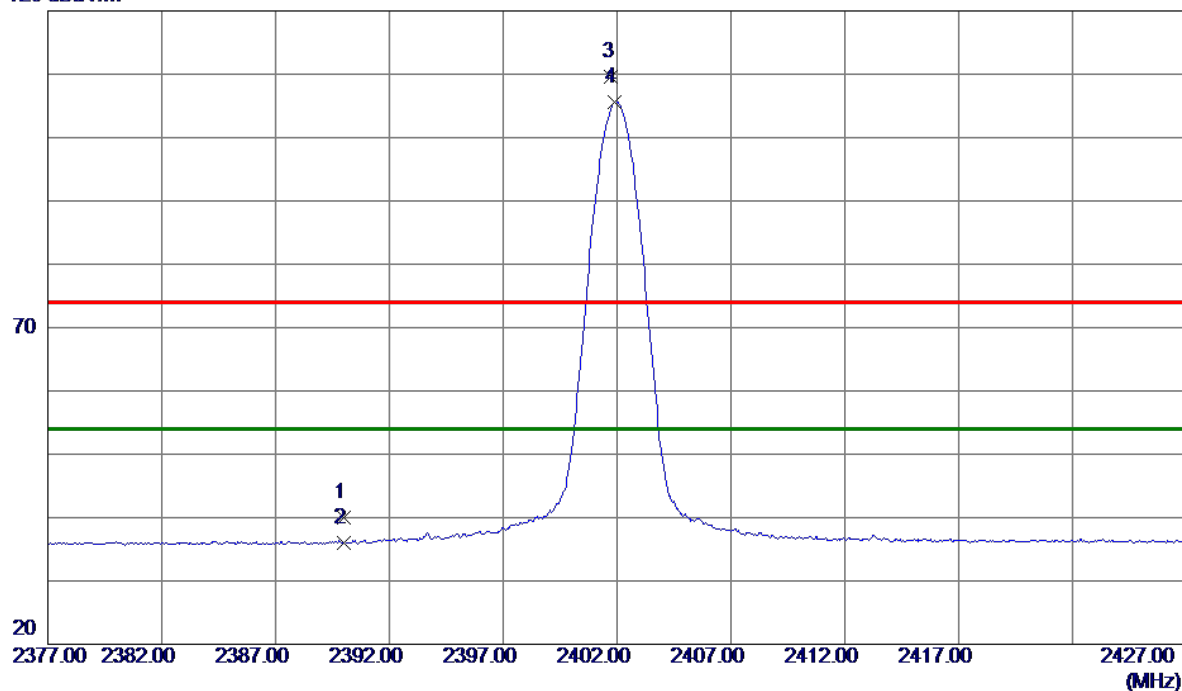

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	33.11	6.93	40.04	74.00	-33.96	Peak	
2	2390.0000	29.08	6.93	36.01	54.00	-17.99	AVG	
3	2401.7500	102.59	6.97	109.56	74.00	35.56	Peak	No Limit
4 *	2401.9000	98.68	6.97	105.65	54.00	51.65	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

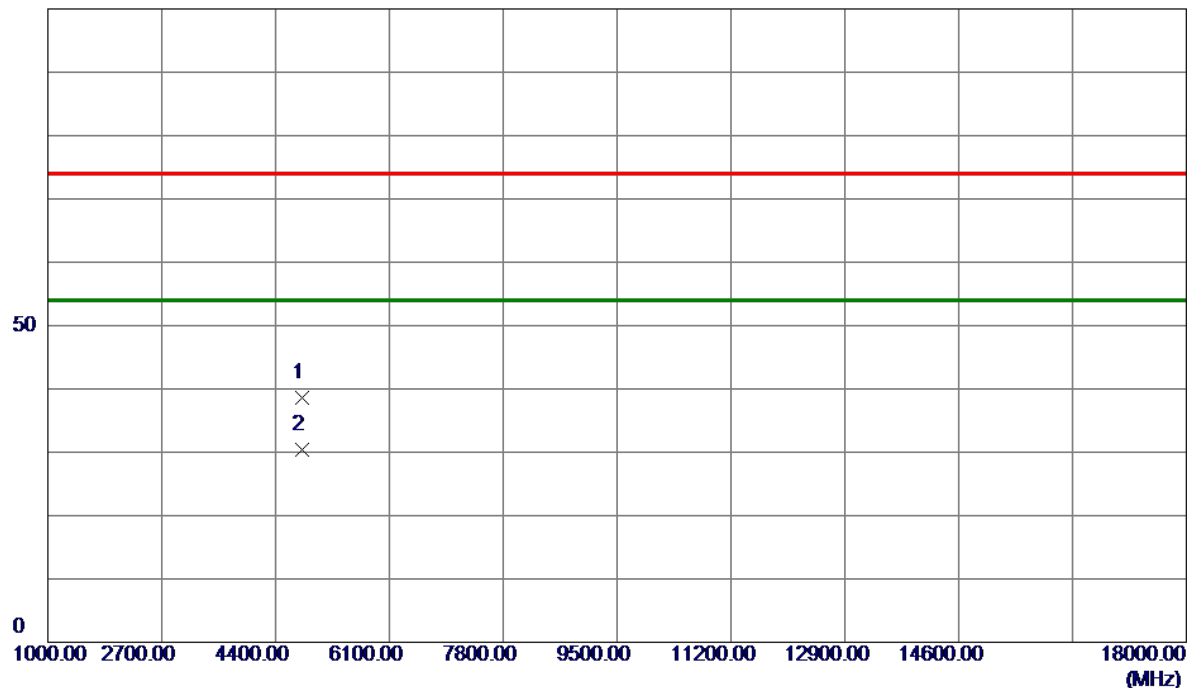


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	34.74	3.78	38.52	74.00	-35.48	Peak	
2 *	4804.0000	26.53	3.78	30.31	54.00	-23.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

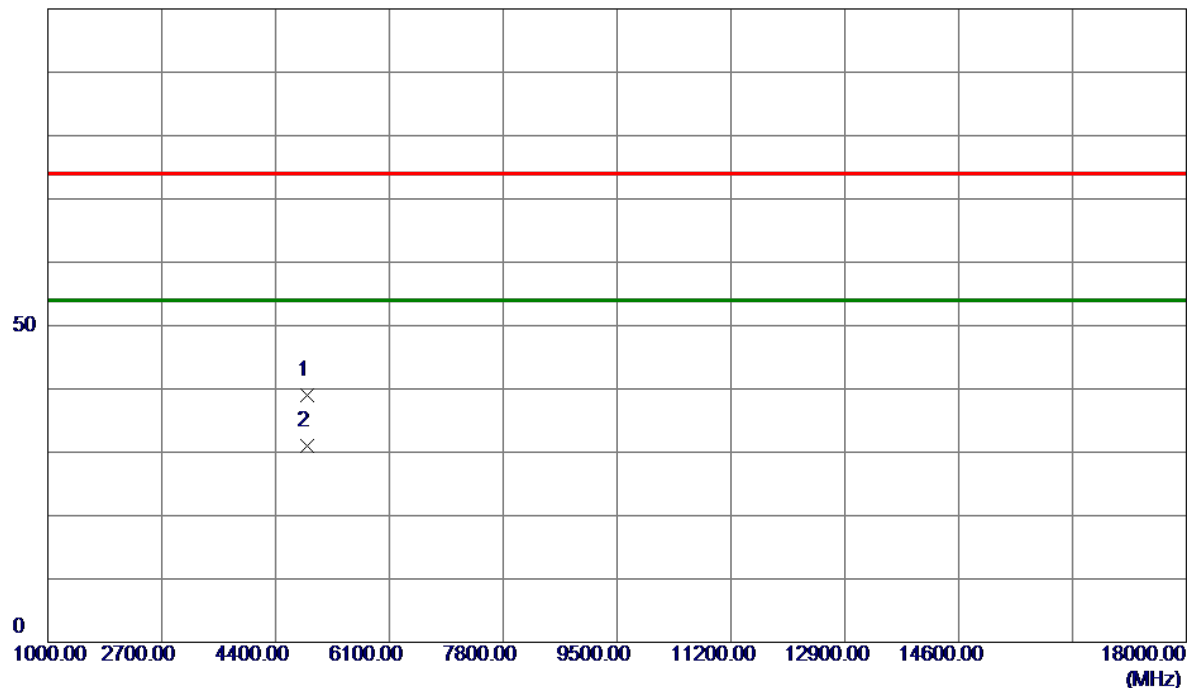


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4880.0000	34.99	3.98	38.97	74.00	-35.03	Peak	
2 *	4880.0000	27.06	3.98	31.04	54.00	-22.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

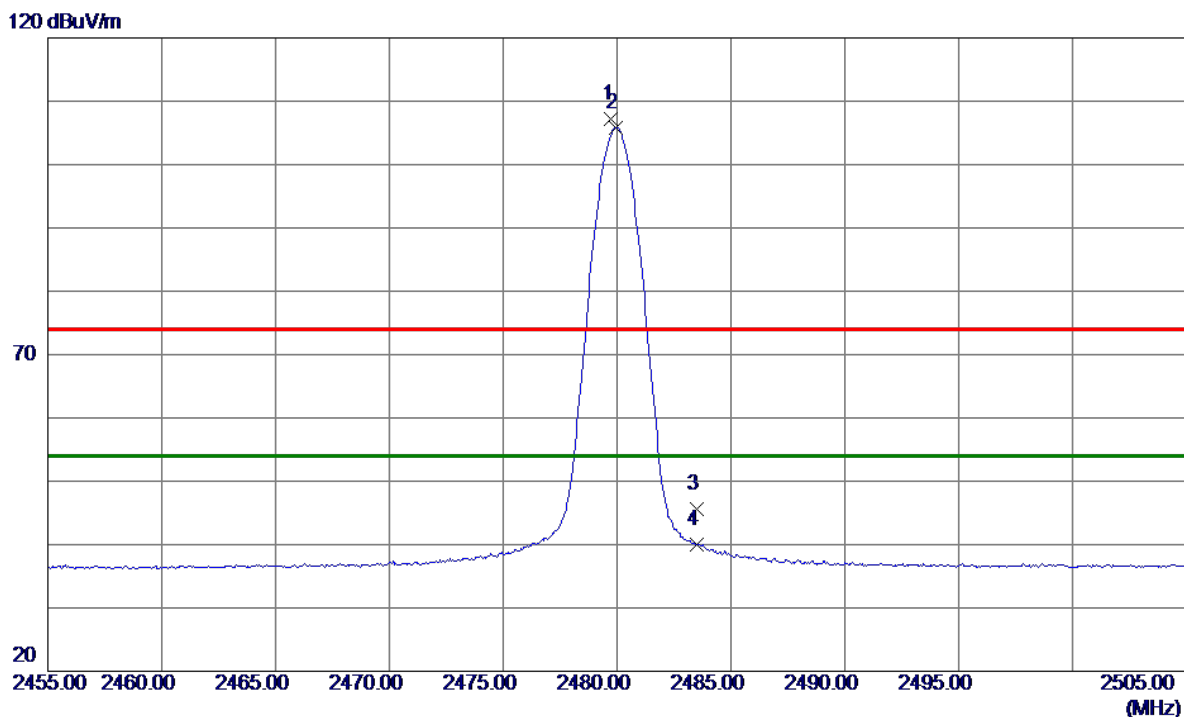


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.7500	99.99	7.22	107.21	74.00	33.21	Peak	No Limit
2 *	2479.9500	98.63	7.22	105.85	54.00	51.85	AVG	No Limit
3	2483.5000	38.37	7.23	45.60	74.00	-28.40	Peak	
4	2483.5000	32.74	7.23	39.97	54.00	-14.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

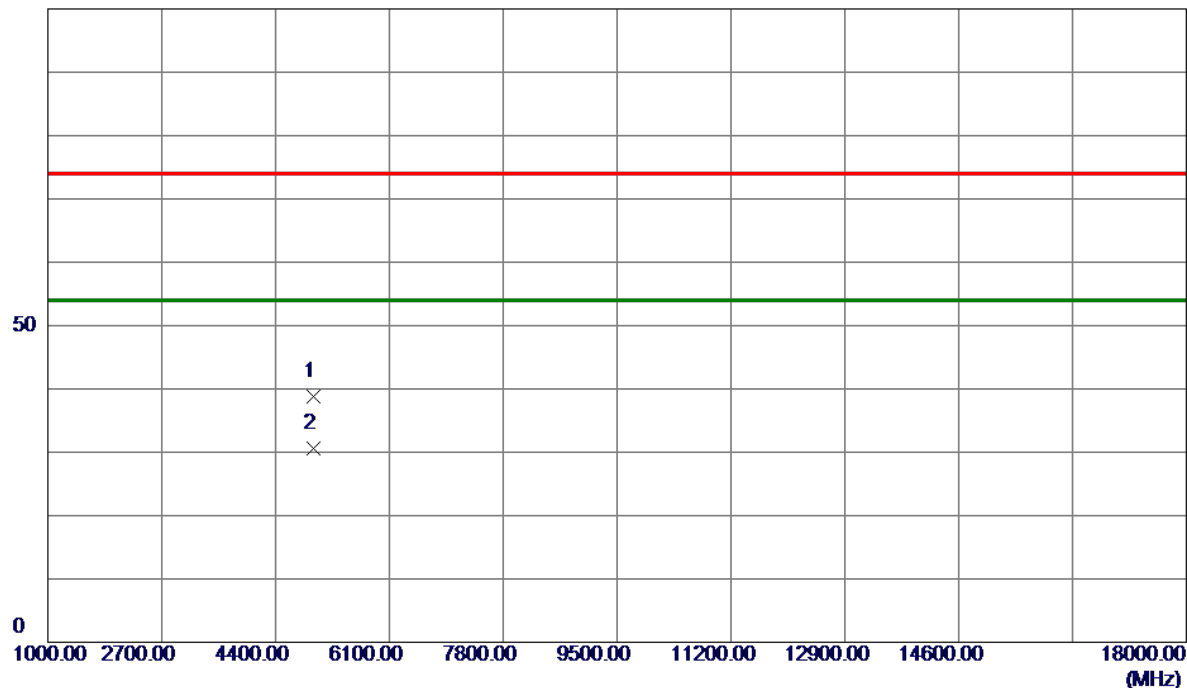


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	34.63	4.19	38.82	74.00	-35.18	Peak	
2 *	4960.0000	26.50	4.19	30.69	54.00	-23.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

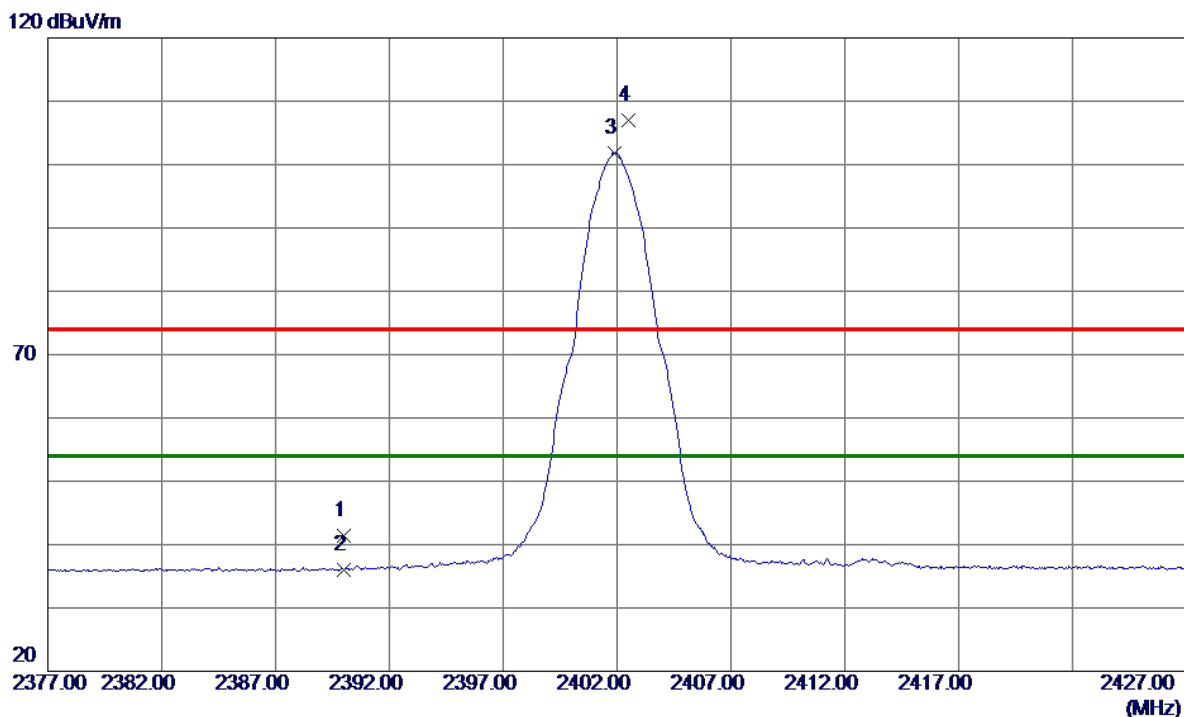


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	34.49	6.93	41.42	74.00	-32.58	Peak	
2	2390.0000	29.15	6.93	36.08	54.00	-17.92	AVG	
3 *	2401.9000	94.86	6.97	101.83	54.00	47.83	AVG	No Limit
4	2402.5000	99.99	6.97	106.96	74.00	32.96	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

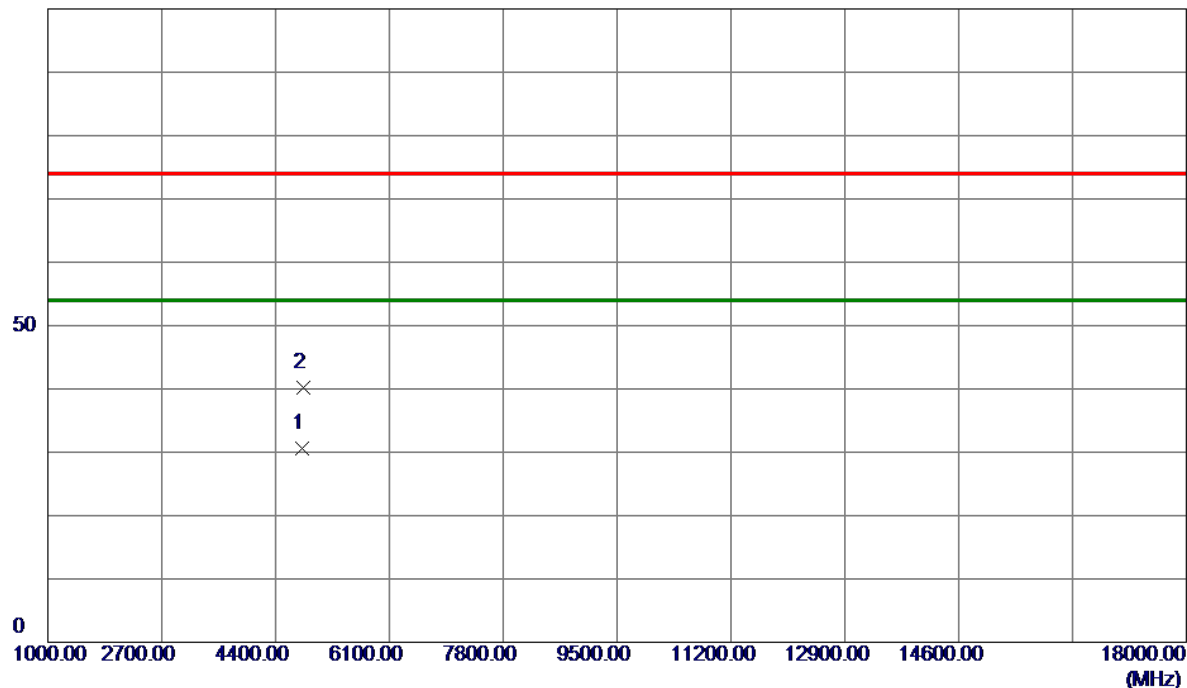


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4805.7700	26.84	3.78	30.62	54.00	-23.38	AVG	
2	4808.5200	36.50	3.79	40.29	74.00	-33.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

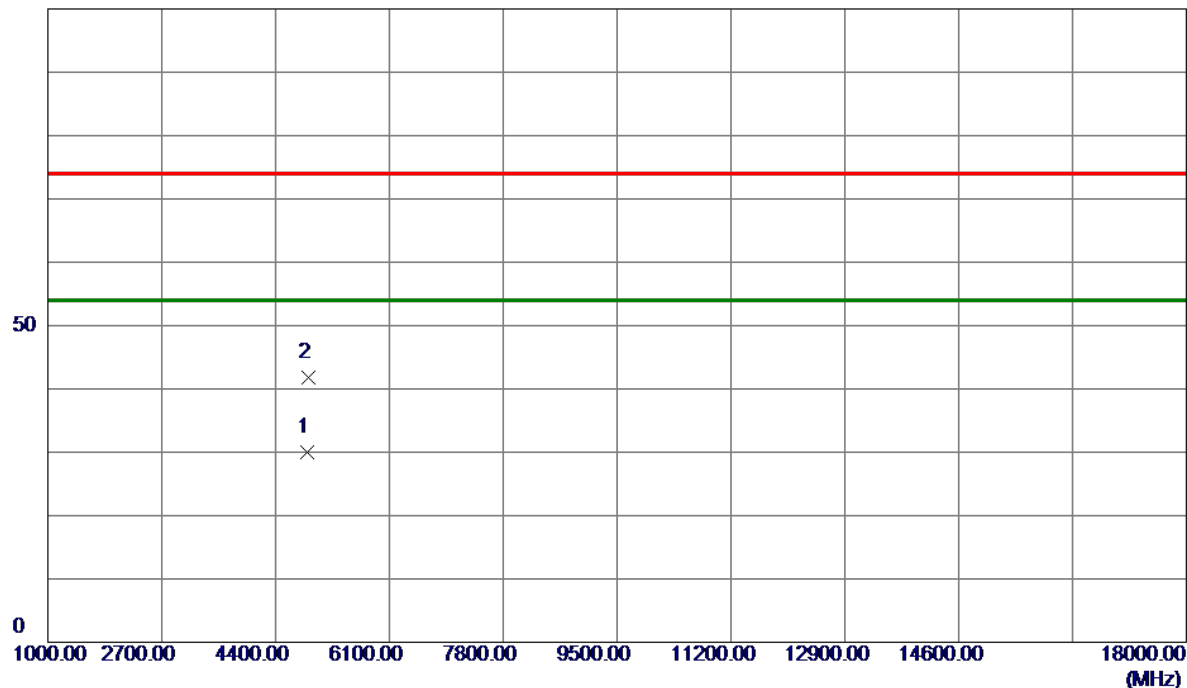


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4879.6500	26.09	3.98	30.07	54.00	-23.93	AVG	
2	4884.4100	37.76	3.99	41.75	74.00	-32.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

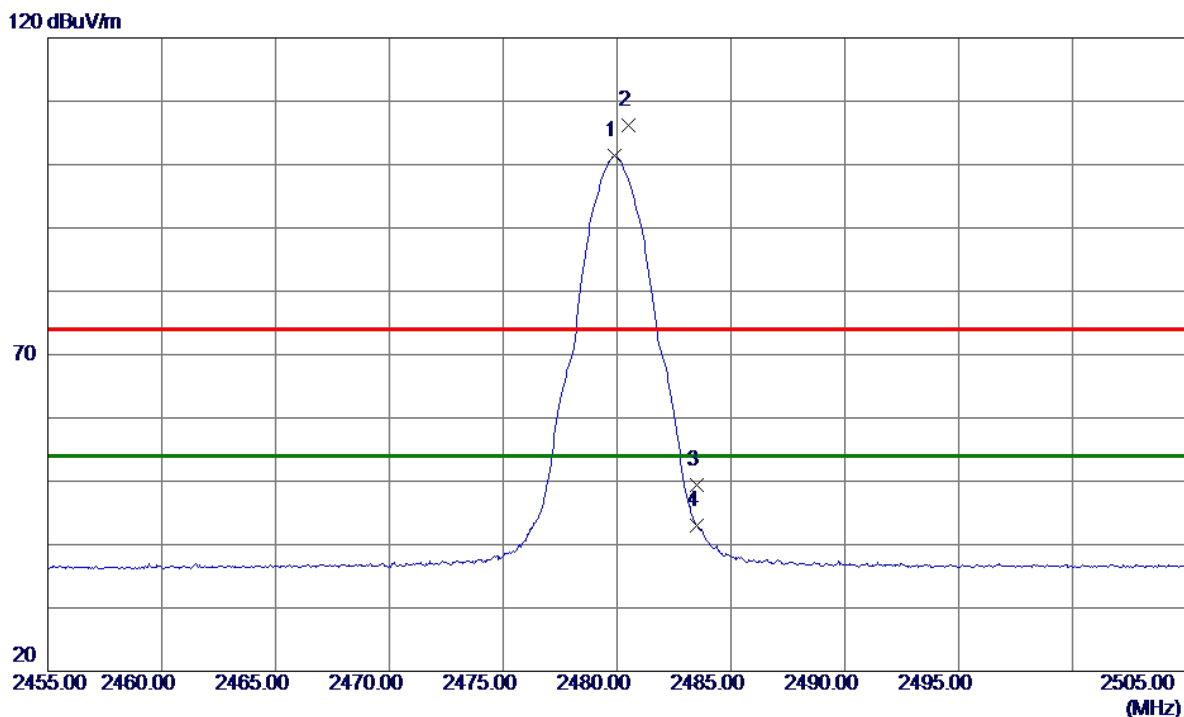


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.9000	94.09	7.22	101.31	54.00	47.31	AVG	No Limit
2	2480.5000	99.02	7.22	106.24	74.00	32.24	Peak	No Limit
3	2483.5000	42.10	7.23	49.33	74.00	-24.67	Peak	
4	2483.5000	35.85	7.23	43.08	54.00	-10.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

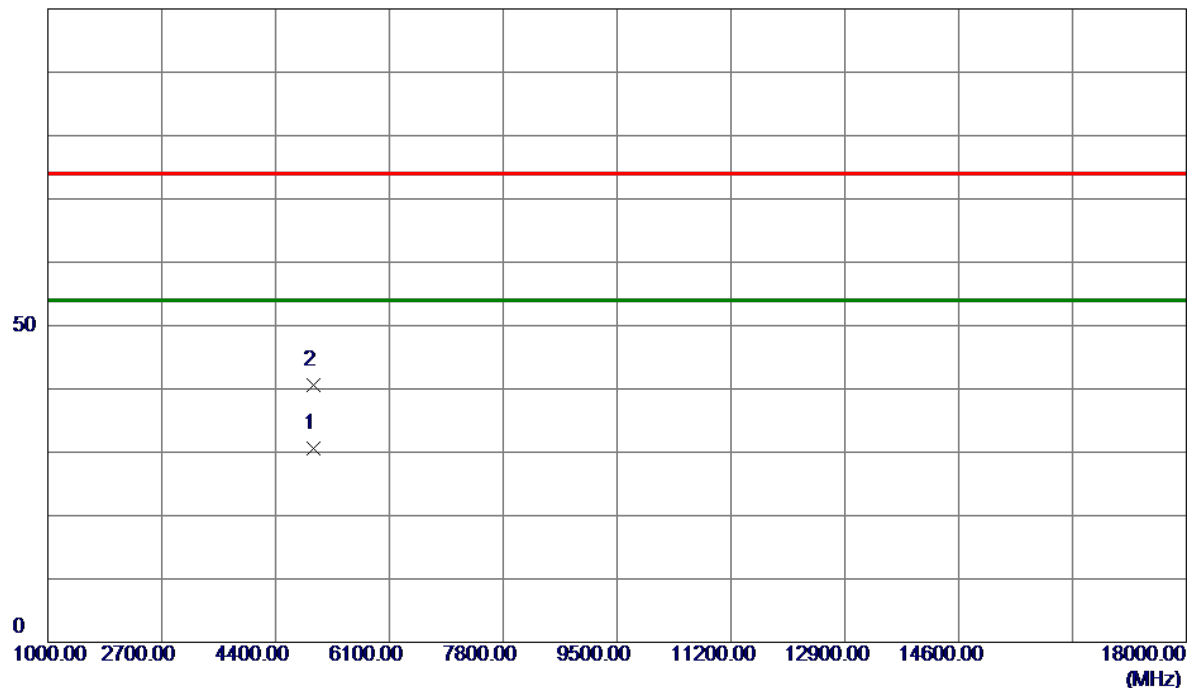


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4959.7500	26.42	4.19	30.61	54.00	-23.39	AVG	
2	4961.0299	36.43	4.20	40.63	74.00	-33.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2404 MHz _CH01_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

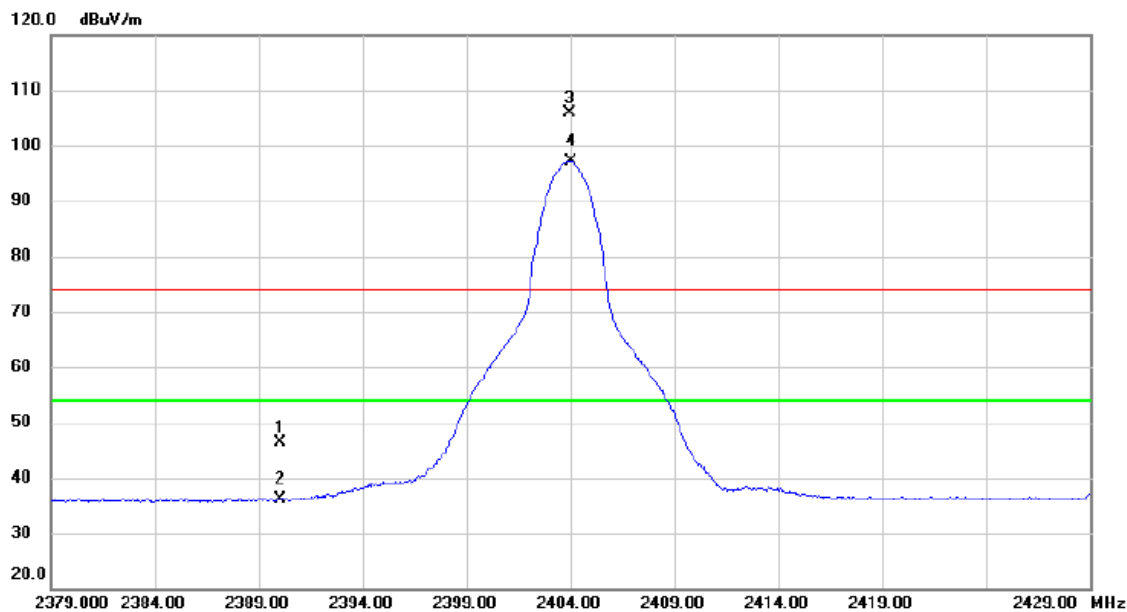


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.48	6.94	46.42	74.00	-27.58	peak	
2		2390.000	29.26	6.94	36.20	54.00	-17.80	AVG	
3	X	2403.950	98.94	6.98	105.92	74.00	31.92	peak	No Limit
4	*	2404.000	90.25	6.98	97.23	54.00	43.23	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2404 MHz _CH01_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

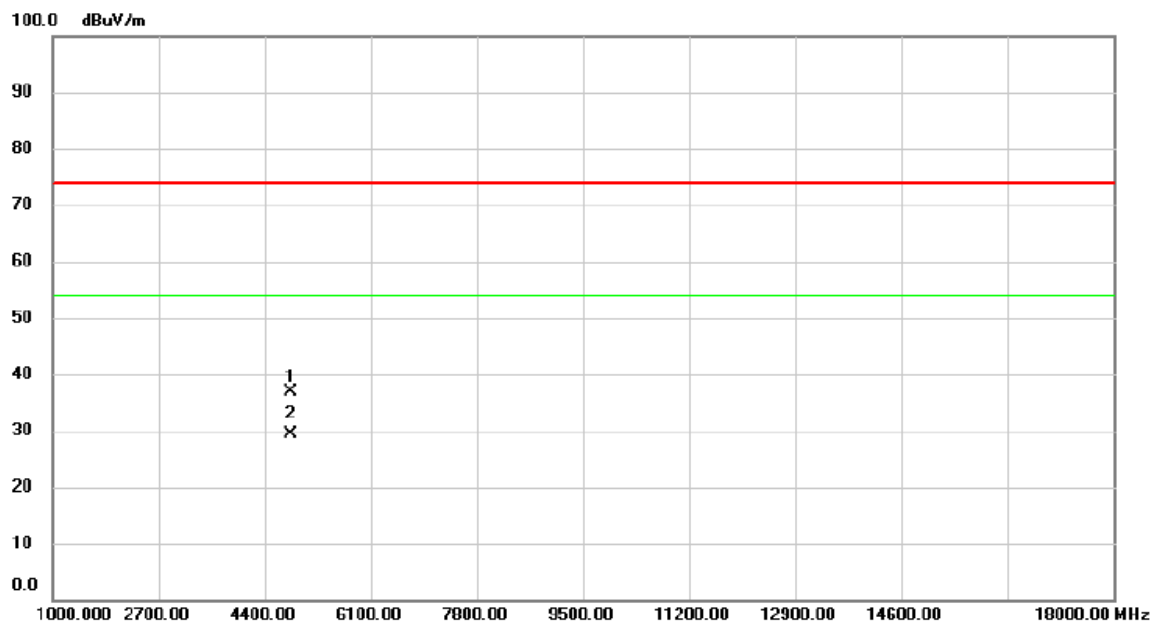


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4808.000	33.11	3.80	36.91	74.00	-37.09	peak	
2	*	4808.000	25.63	3.80	29.43	54.00	-24.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

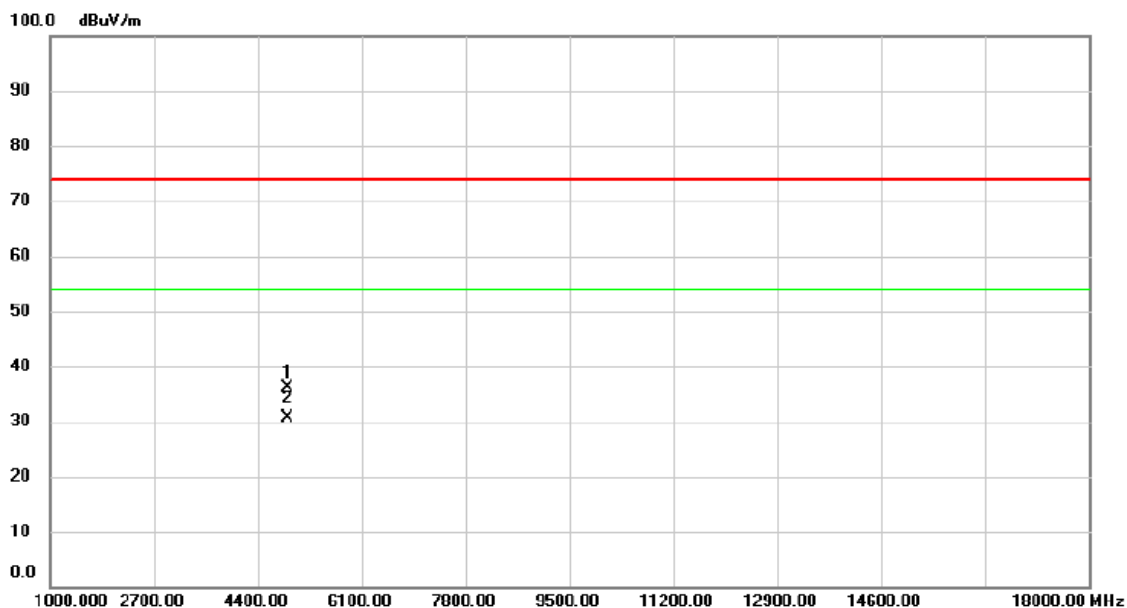


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4880.000	32.11	3.98	36.09	74.00	-37.91	peak	
2	*	4880.000	26.67	3.98	30.65	54.00	-23.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

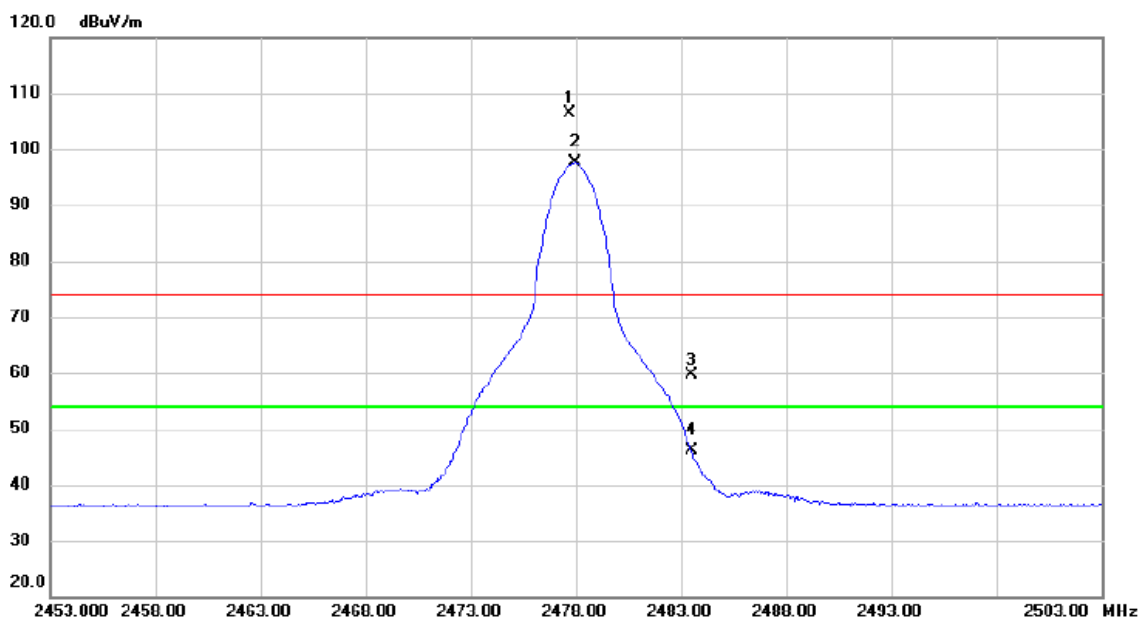


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2477.700	99.24	7.21	106.45	74.00	32.45	peak	No Limit
2	*	2477.950	90.30	7.21	97.51	54.00	43.51	AVG	No Limit
3		2483.500	52.45	7.23	59.68	74.00	-14.32	peak	
4		2483.500	38.87	7.23	46.10	54.00	-7.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

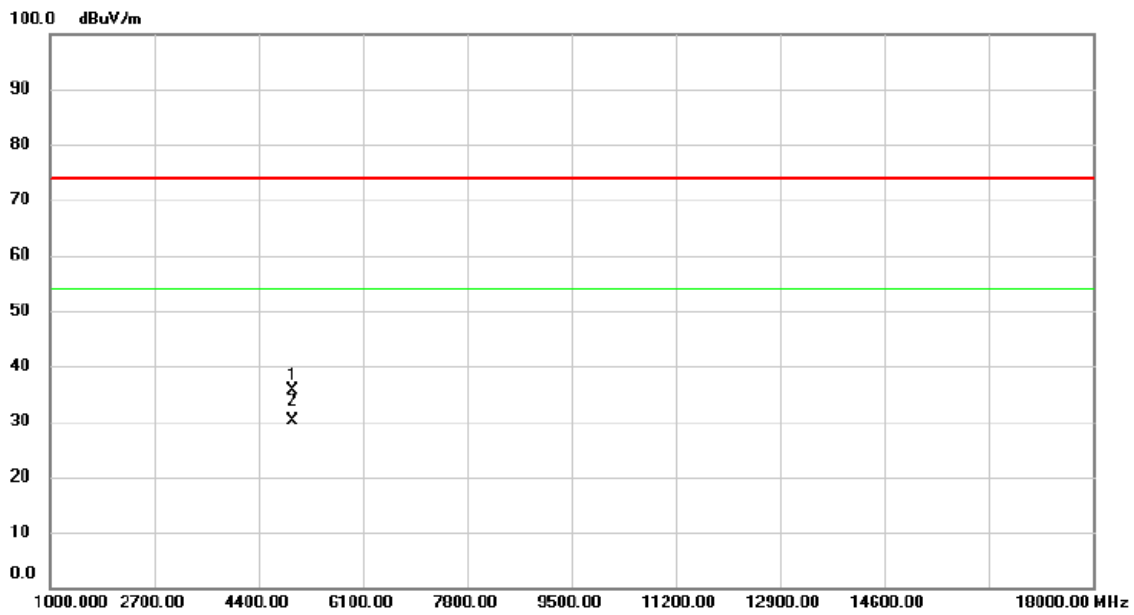


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4956.000	31.48	4.18	35.66	74.00	-38.34	peak	
2	*	4956.000	25.89	4.18	30.07	54.00	-23.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

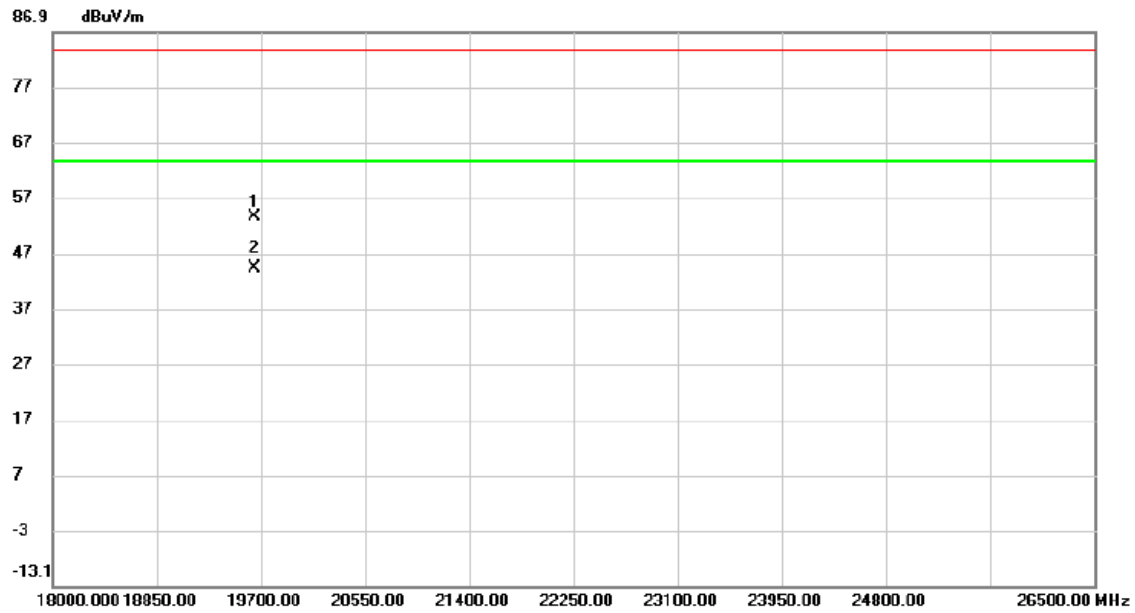


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		19653.250	54.70	-1.06	53.64	83.50	-29.86	peak	
2	*	19653.250	45.40	-1.06	44.34	63.50	-19.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

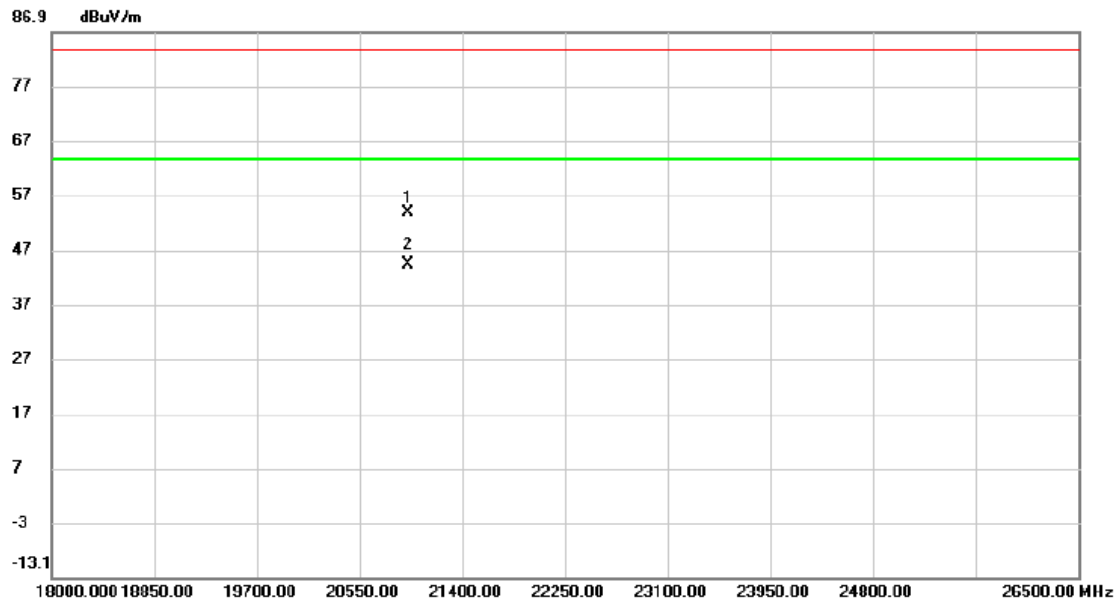

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20953.750	53.81	-0.08	53.73	83.50	-29.77	peak	
2 *		20953.750	44.32	-0.08	44.24	63.50	-19.26	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For Xbox version

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

130 dBuV/m

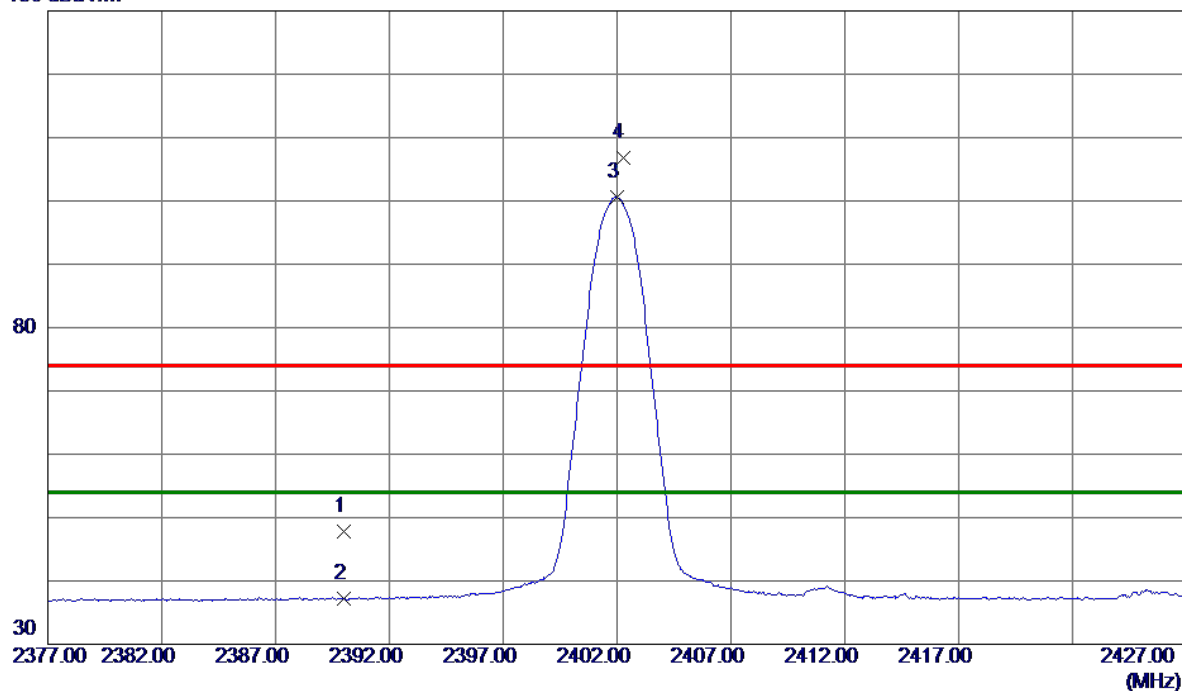

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.14	8.66	47.80	74.00	-26.20	Peak	
2	2390.0000	28.60	8.66	37.26	54.00	-16.74	AVG	
3 *	2402.0000	91.87	8.69	100.56	54.00	46.56	AVG	No Limit
4	2402.2500	98.16	8.69	106.85	74.00	32.85	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

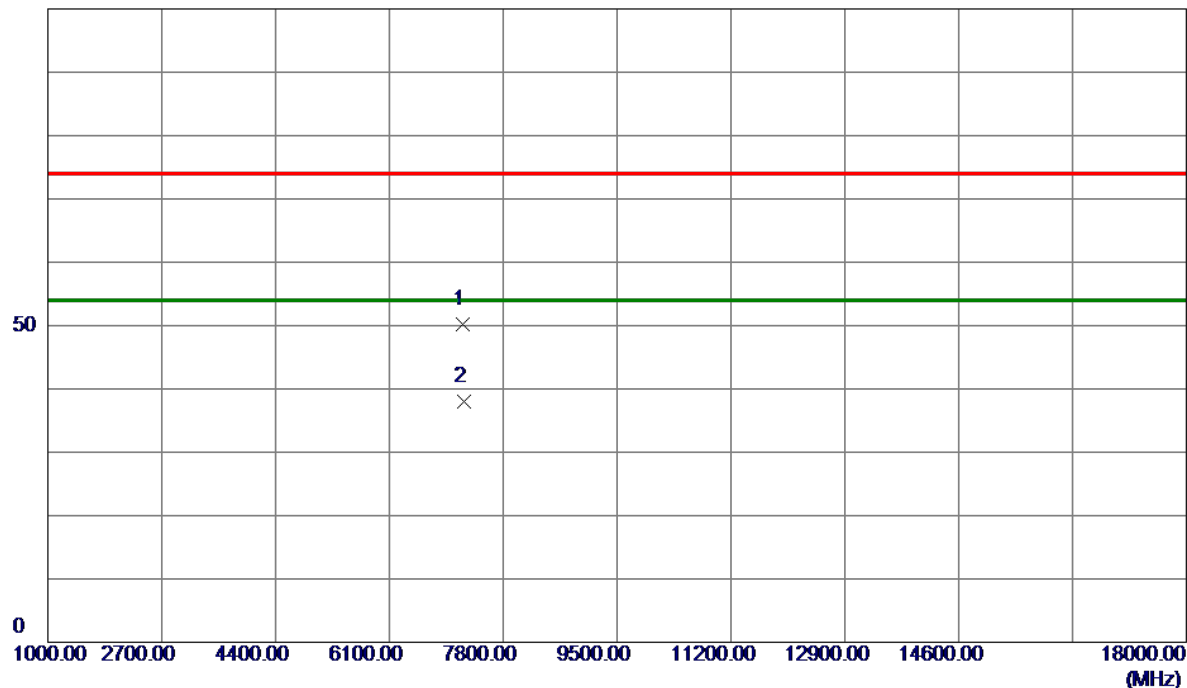


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7199.6000	41.74	8.51	50.25	74.00	-23.75	Peak	
2 *	7206.0000	29.43	8.51	37.94	54.00	-16.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

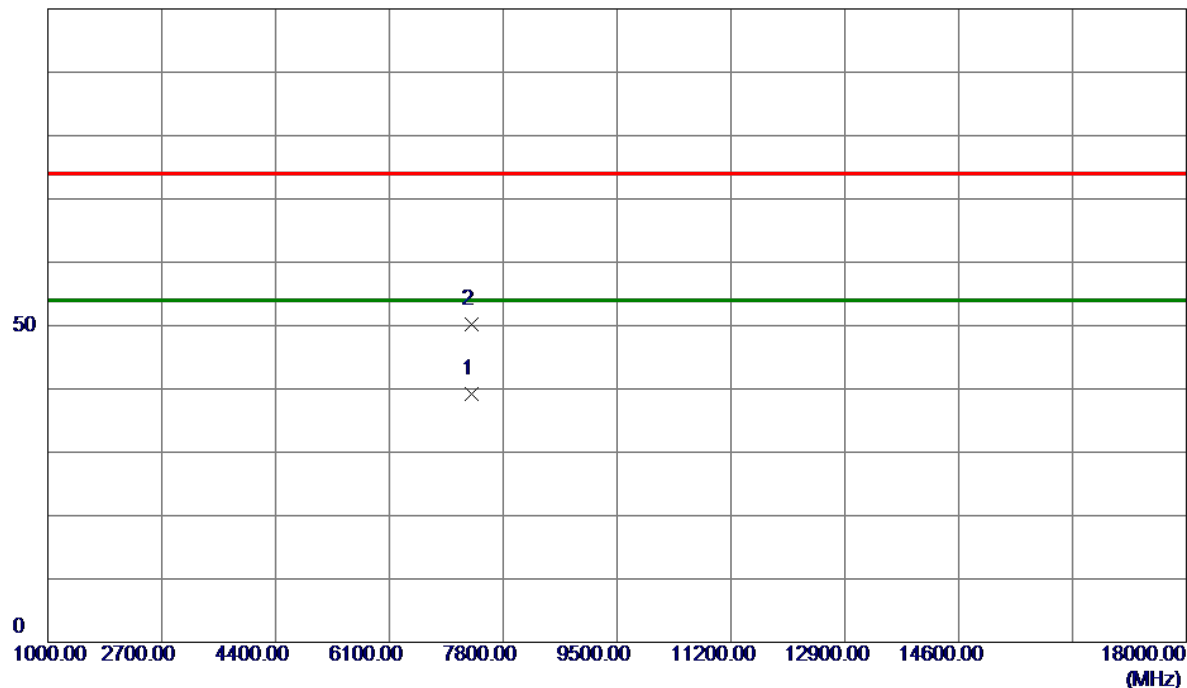


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7319.3420	30.61	8.63	39.24	54.00	-14.76	AVG	
2	7320.7800	41.54	8.63	50.17	74.00	-23.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

130 dBuV/m

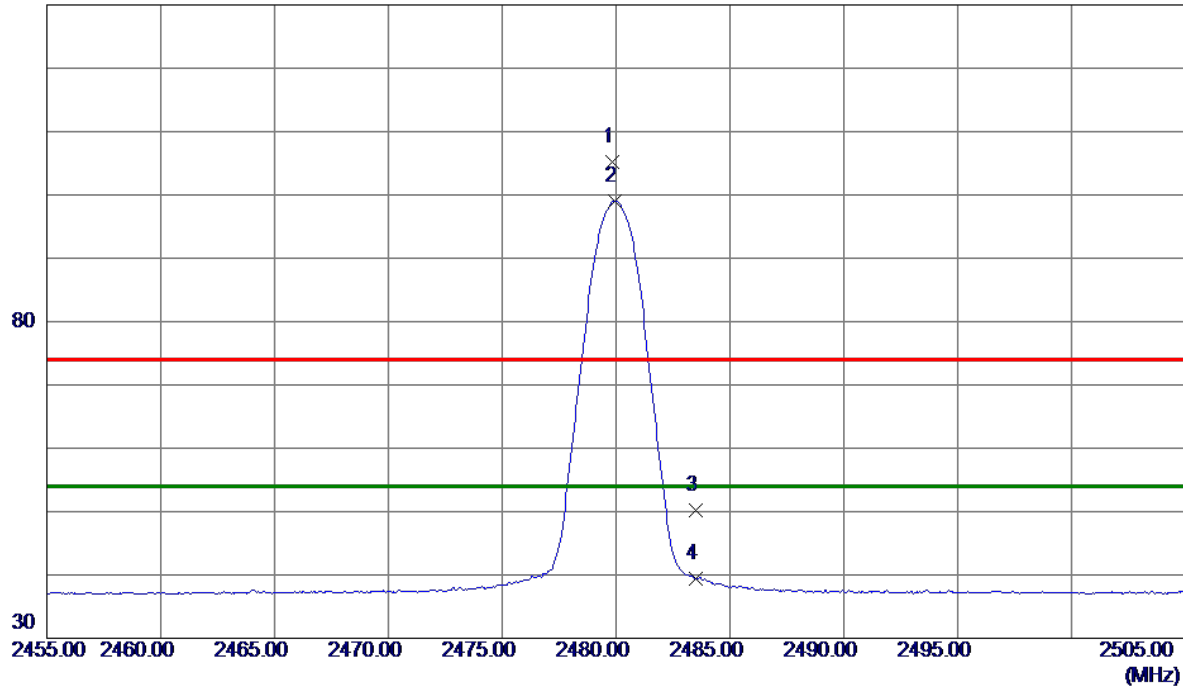


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8500	96.22	8.89	105.11	74.00	31.11	Peak	No Limit
2 *	2479.9500	90.12	8.89	99.01	54.00	45.01	AVG	No Limit
3	2483.5000	41.32	8.89	50.21	74.00	-23.79	Peak	
4	2483.5000	30.51	8.89	39.40	54.00	-14.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

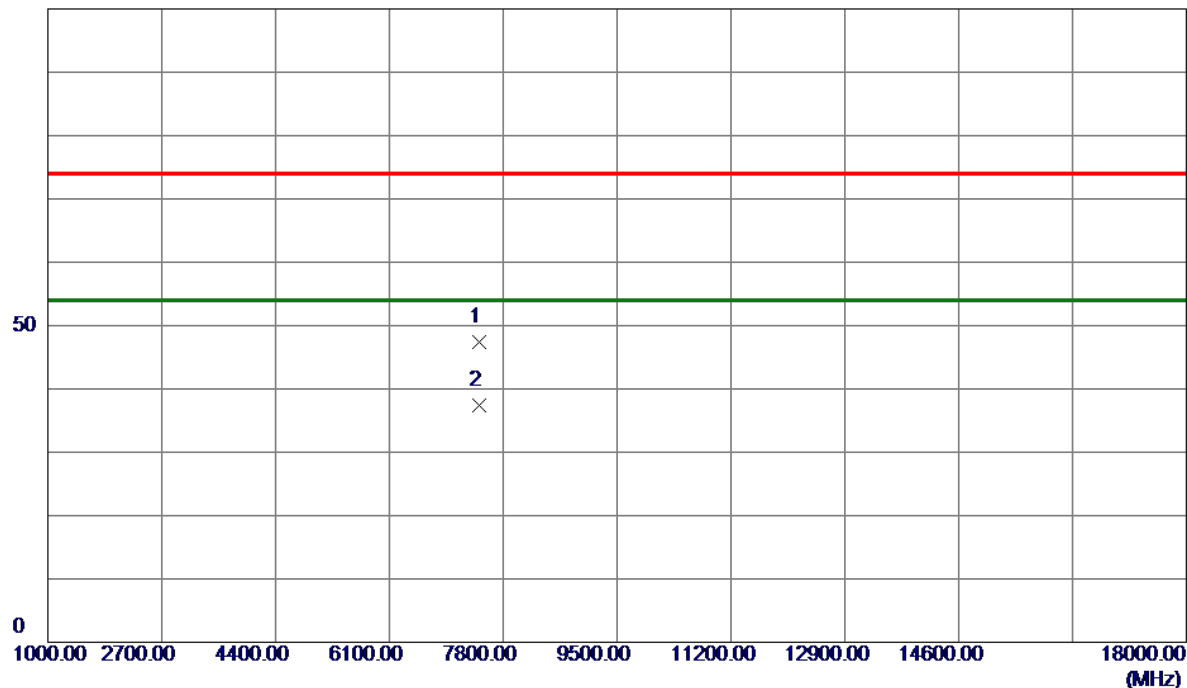


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7438.9000	38.65	8.75	47.40	74.00	-26.60	Peak	
2 *	7446.7500	28.68	8.76	37.44	54.00	-16.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

130 dBuV/m

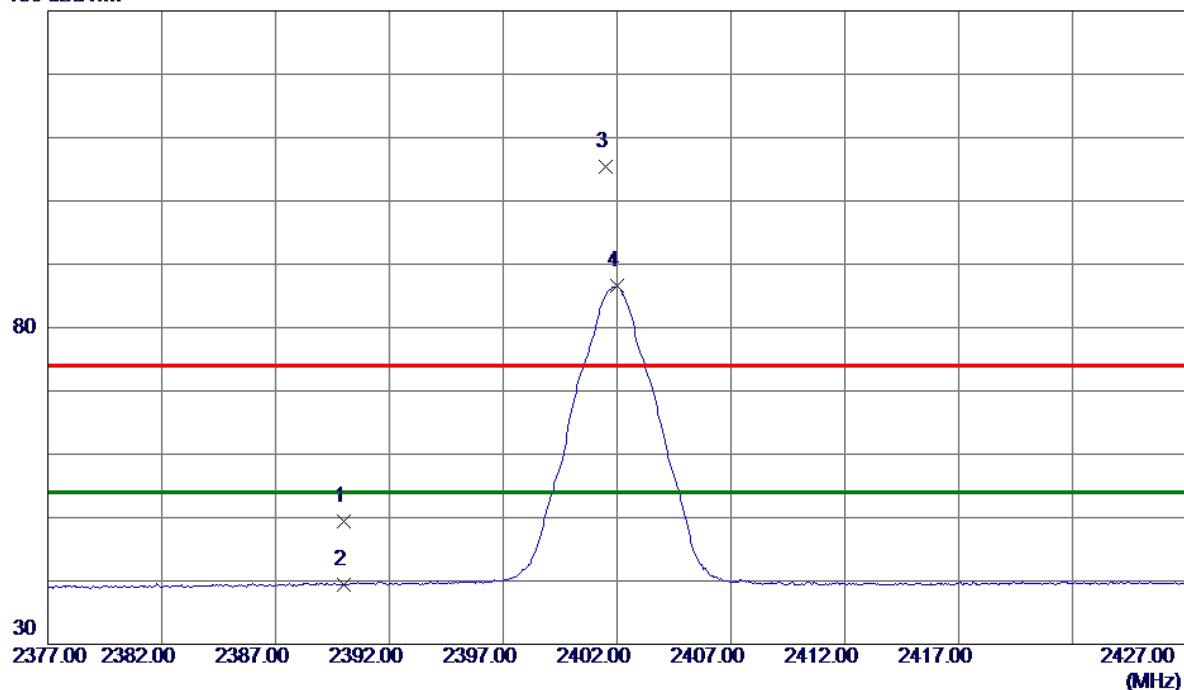


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	40.72	8.66	49.38	74.00	-24.62	Peak	
2	2390.0000	30.69	8.66	39.35	54.00	-14.65	AVG	
3	2401.5000	96.69	8.69	105.38	74.00	31.38	Peak	No Limit
4 *	2402.0000	77.87	8.69	86.56	54.00	32.56	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

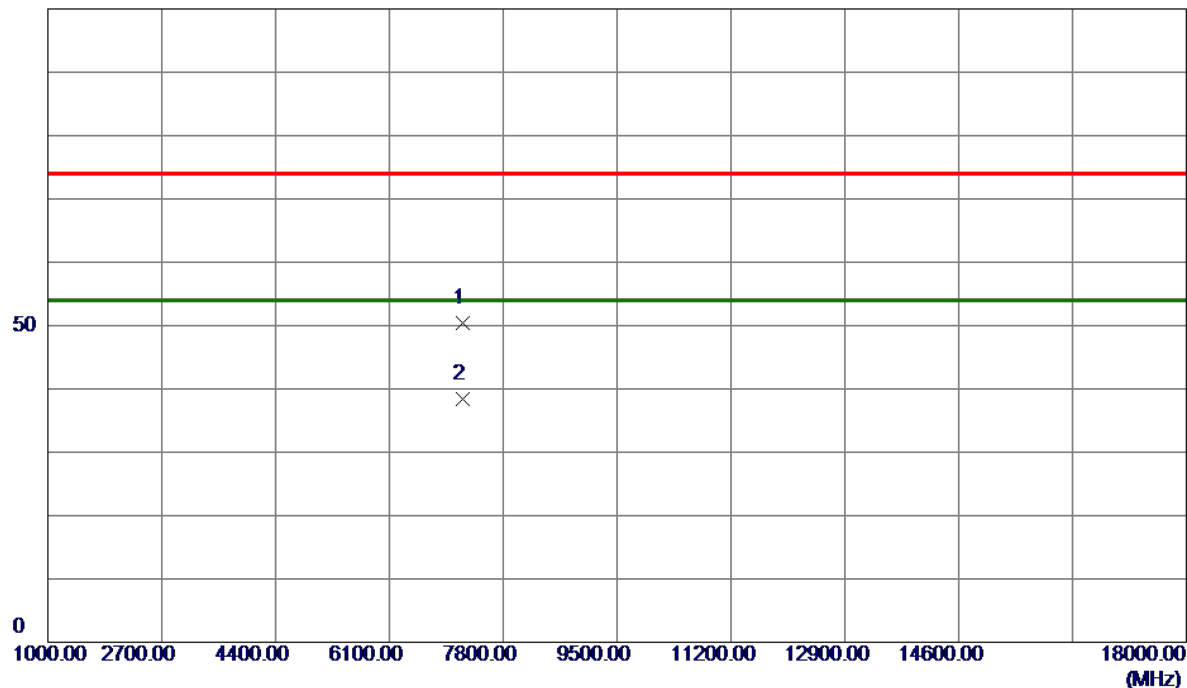


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7199.7000	41.81	8.51	50.32	74.00	-23.68	Peak	
2 *	7202.5200	29.86	8.51	38.37	54.00	-15.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

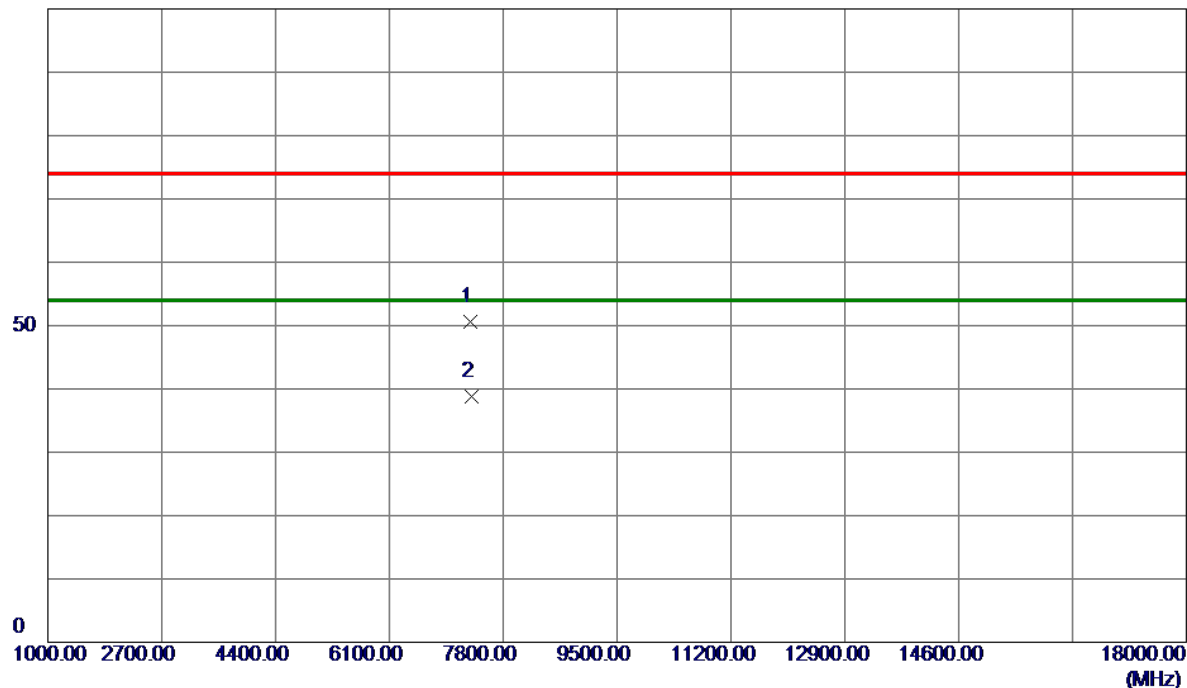


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.1200	41.97	8.62	50.59	74.00	-23.41	Peak	
2 *	7320.2920	30.25	8.63	38.88	54.00	-15.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

130 dBuV/m

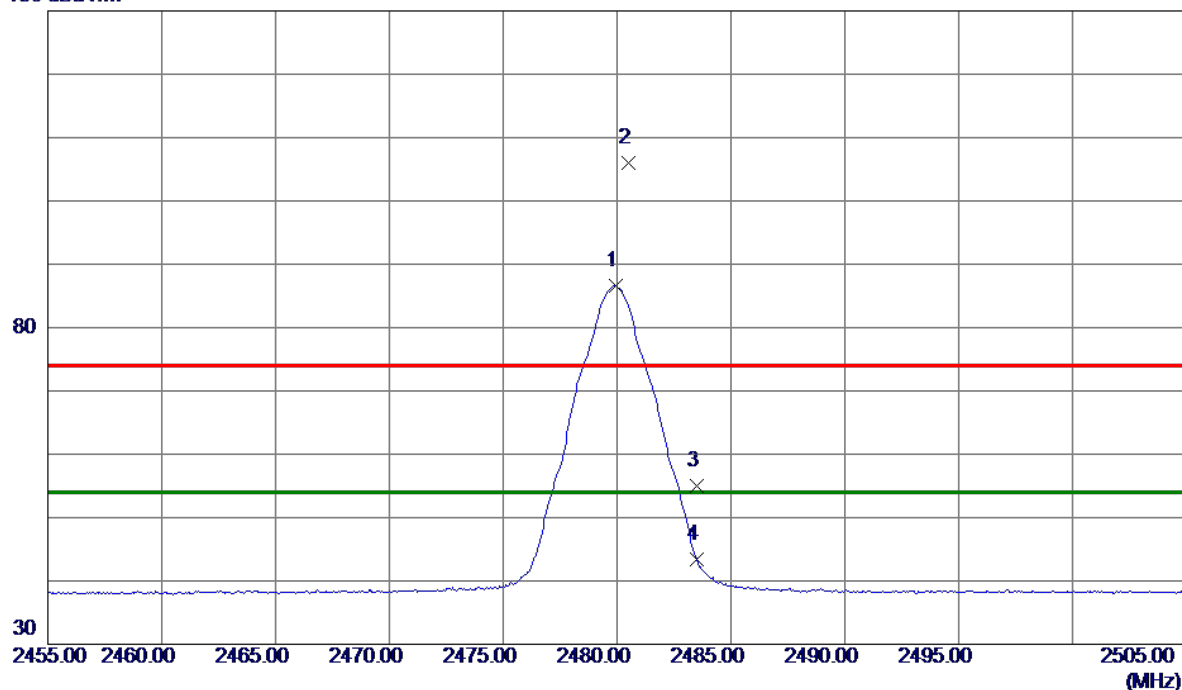

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.9500	77.69	8.89	86.58	54.00	32.58	AVG	No Limit
2	2480.5000	97.06	8.89	105.95	74.00	31.95	Peak	No Limit
3	2483.5000	46.15	8.89	55.04	74.00	-18.96	Peak	
4	2483.5000	34.44	8.89	43.33	54.00	-10.67	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

100 dBuV/m

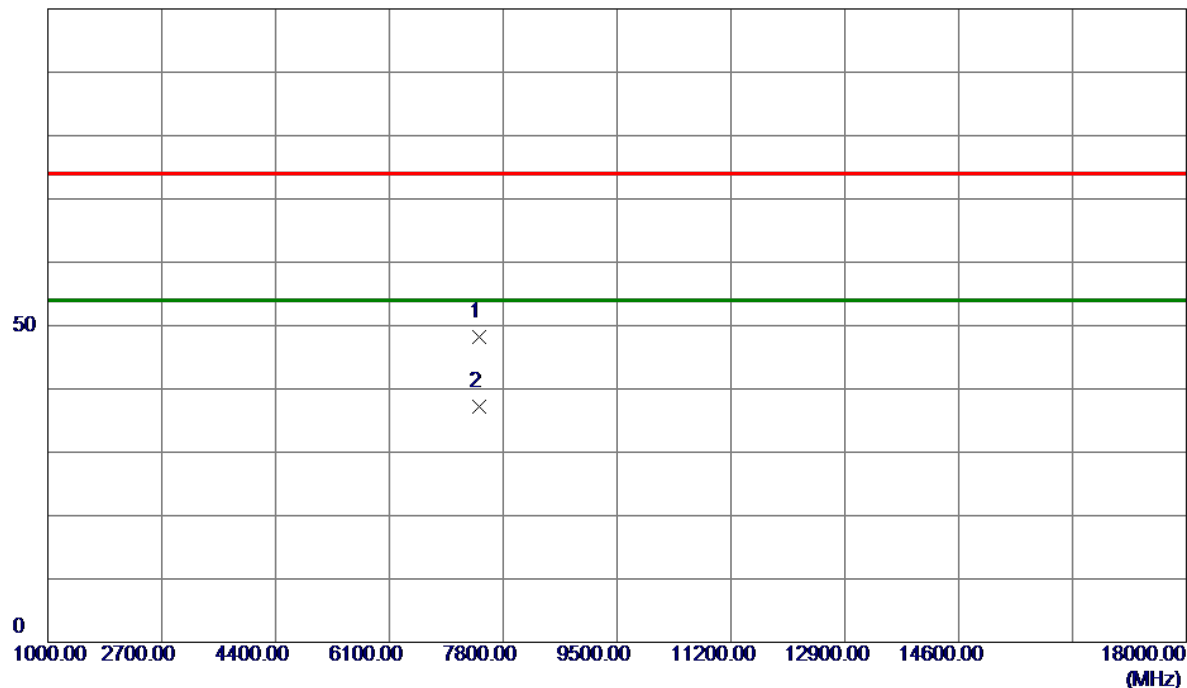


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7435.3800	39.39	8.75	48.14	74.00	-25.86	Peak	
2 *	7435.6400	28.49	8.75	37.24	54.00	-16.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2404 MHz _CH01_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

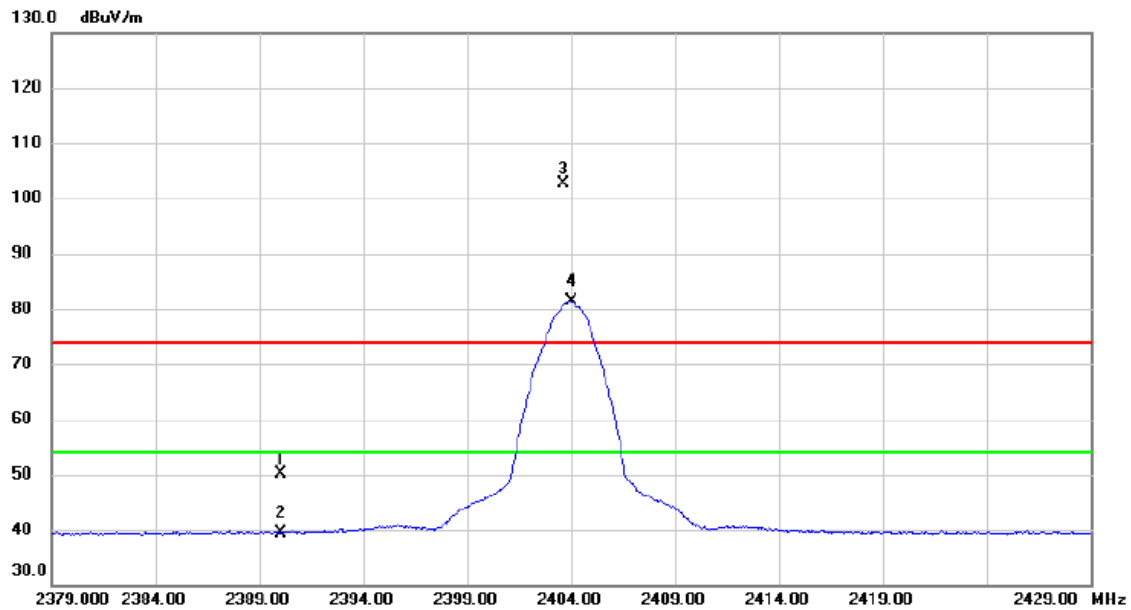


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	41.40	8.66	50.06	74.00	-23.94	peak	
2		2390.000	30.83	8.66	39.49	54.00	-14.51	AVG	
3	*	2403.650	93.91	8.70	102.61	74.00	28.61	peak	No Limit
4	X	2404.000	72.62	8.70	81.32	54.00	27.32	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2404 MHz _CH01_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

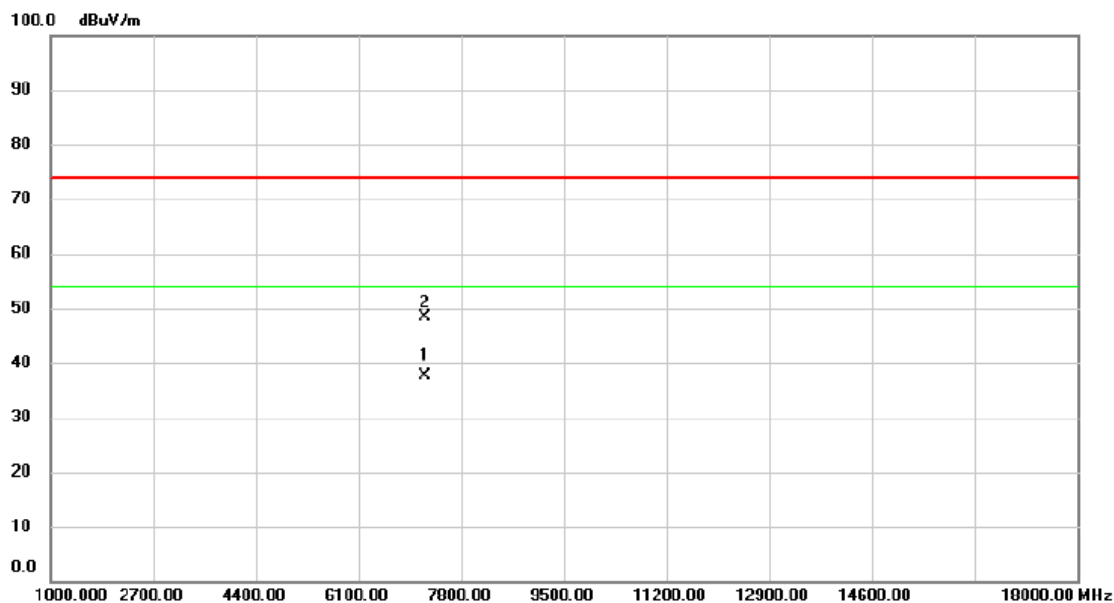


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7203.940	29.06	8.51	37.57	54.00	-16.43	AVG	
2		7204.860	39.75	8.52	48.27	74.00	-25.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

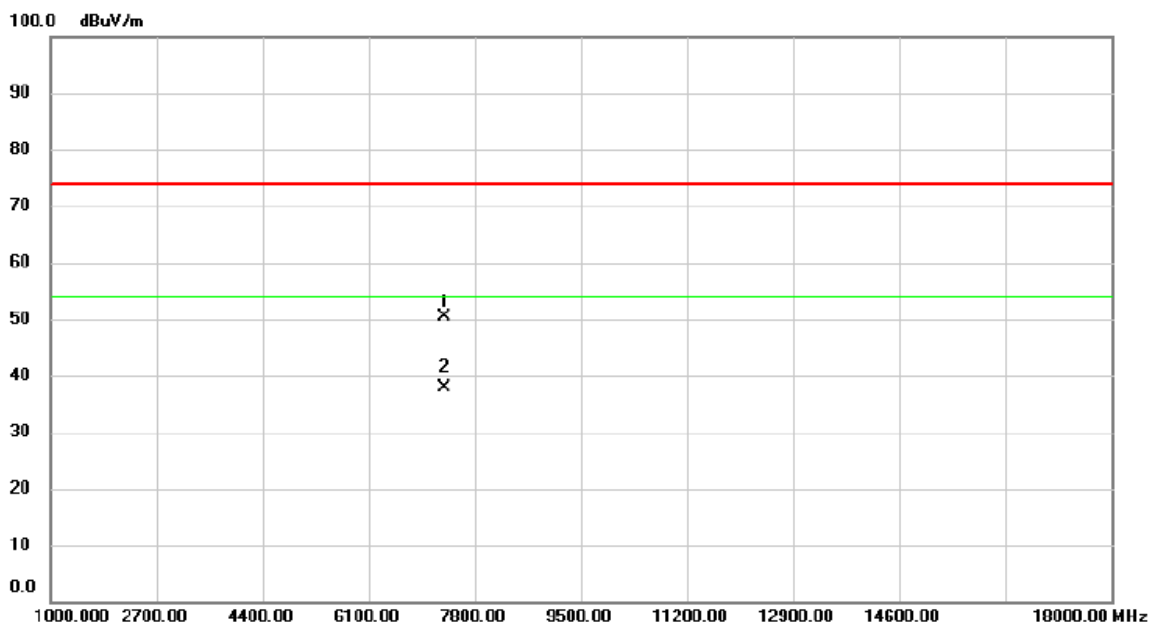


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7316.580	41.81	8.62	50.43	74.00	-23.57	peak	
2	*	7317.160	29.20	8.63	37.83	54.00	-16.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

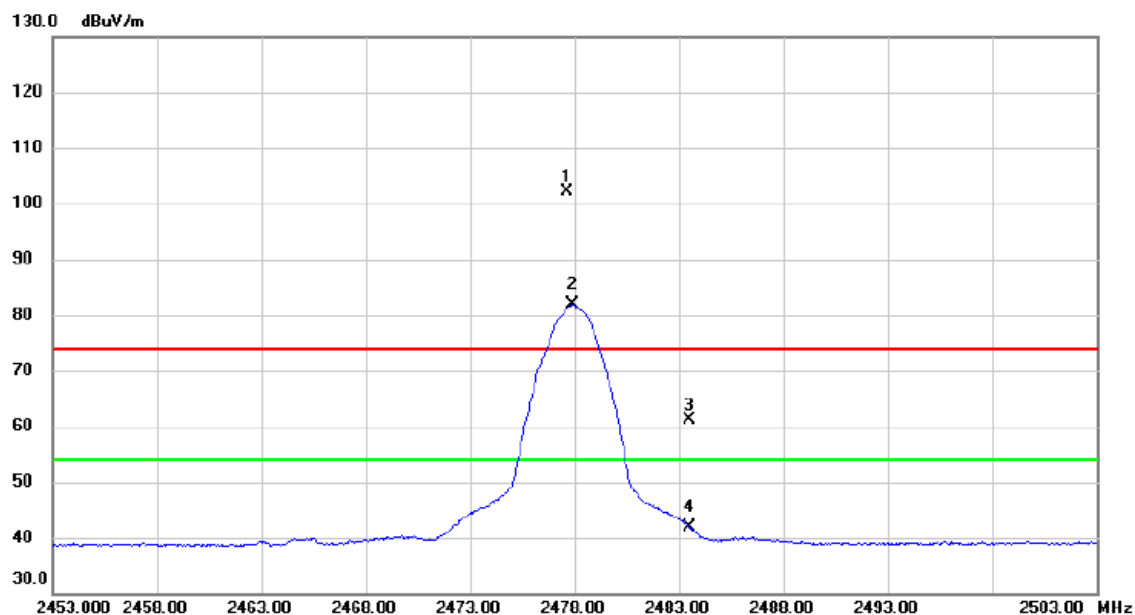


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2477.650	93.22	8.87	102.09	74.00	28.09	peak	No Limit
2	X	2477.900	72.91	8.87	81.78	54.00	27.78	AVG	No Limit
3		2483.500	52.15	8.89	61.04	74.00	-12.96	peak	
4		2483.500	33.07	8.89	41.96	54.00	-12.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_4Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

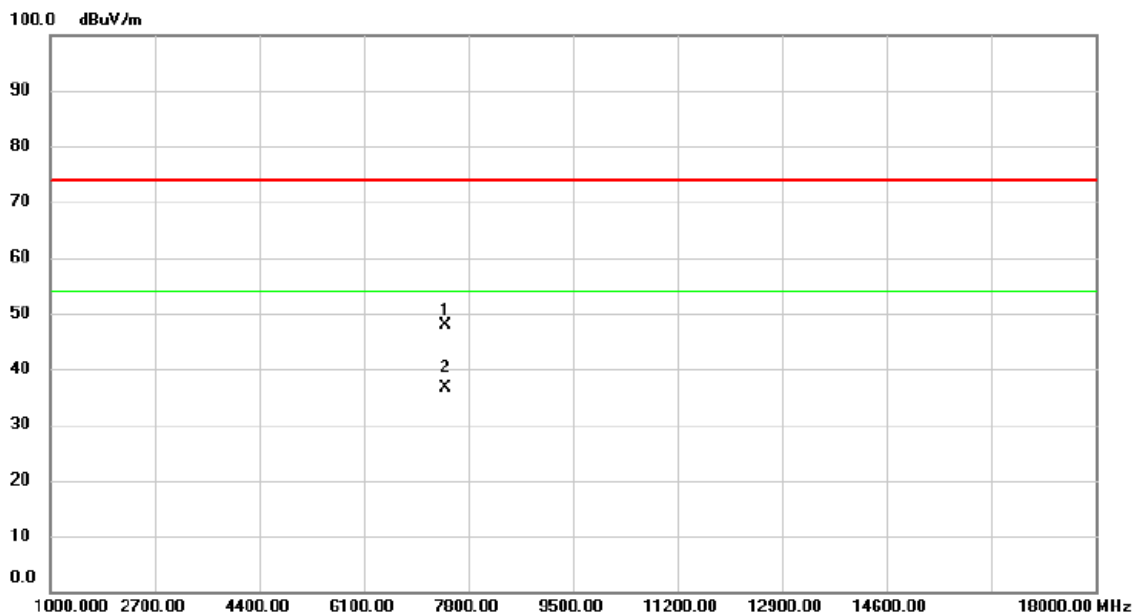


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7426.300	39.25	8.74	47.99	74.00	-26.01	peak	
2	*	7427.860	28.01	8.74	36.75	54.00	-17.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

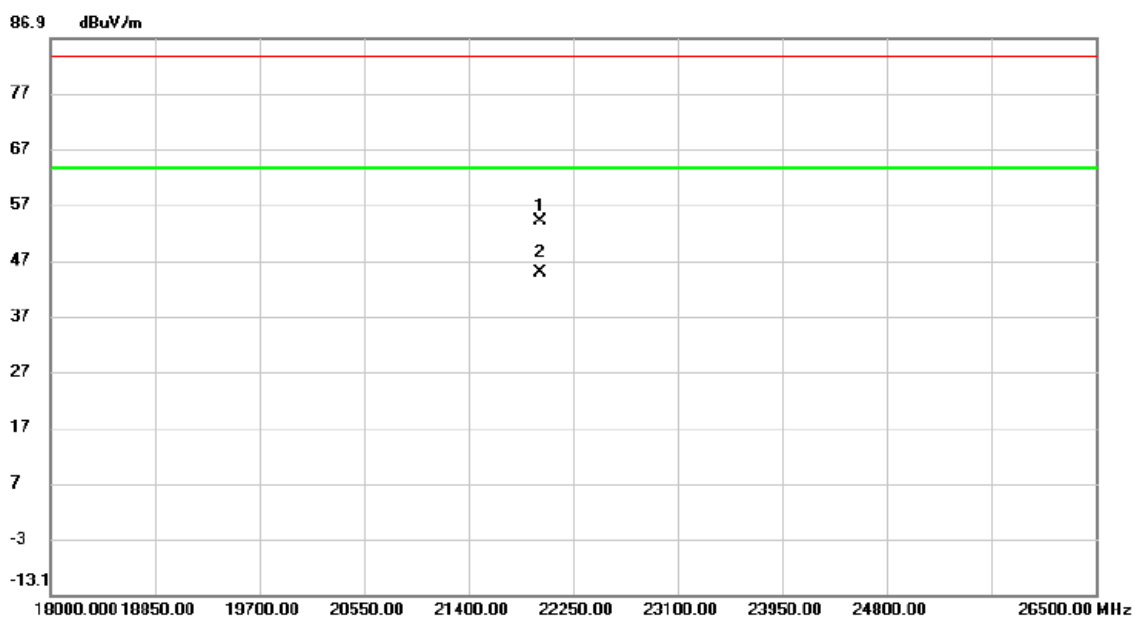


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		21978.000	50.42	3.50	53.92	83.50	-29.58	peak	
2	*	21978.000	41.35	3.50	44.85	63.50	-18.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

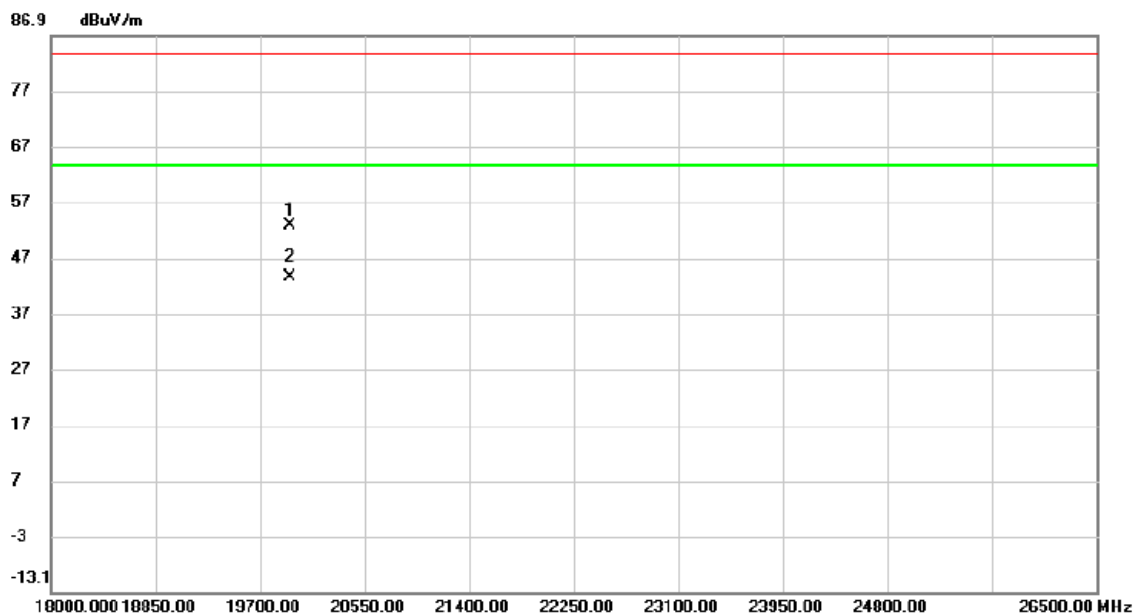

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		19946.500	51.37	1.42	52.79	83.50	-30.71	peak	
2 *		19946.500	42.13	1.42	43.55	63.50	-19.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

For PC version

Test Mode	TX Mode _1Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.718	1.048	0.5	Pass
19	2440	0.716	1.036	0.5	Pass
39	2480	0.722	1.032	0.5	Pass

CH00

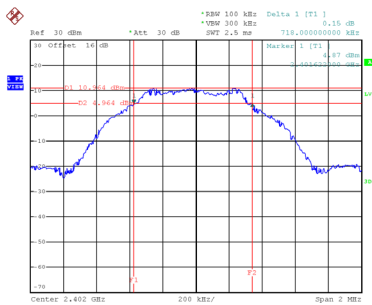


Date: 12.FEB.2025 09:37:10

CH19
6 dB Bandwidth

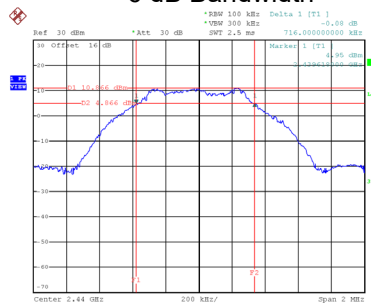


Date: 12.FEB.2025 09:42:35

CH39

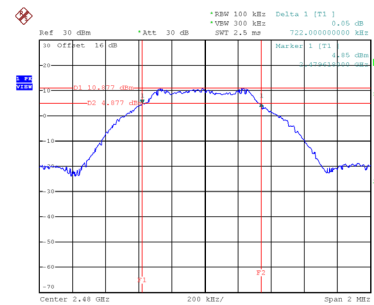

Date: 12.FEB.2025 09:48:39


99 % Occupied Bandwidth

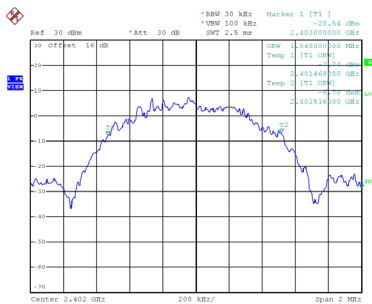

Date: 12.FEB.2025 09:36:32



Date: 12.FEB.2025 09:42:42

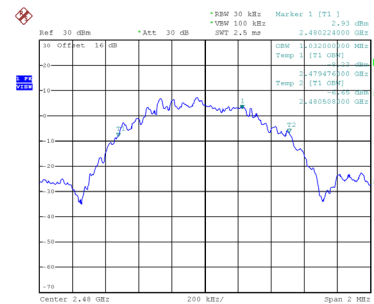


Date: 12.FEB.2025 09:48:45

Test Mode	TX Mode _2Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.264	2.056	0.5	Pass
19	2440	1.252	2.064	0.5	Pass
39	2480	1.258	2.064	0.5	Pass

CH00

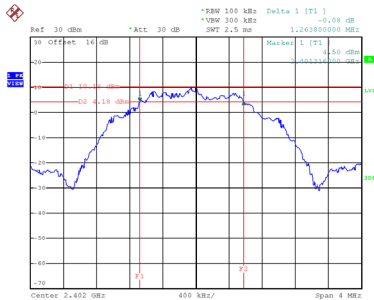


Date: 12.FEB.2025 09:52:44

CH19
6 dB Bandwidth

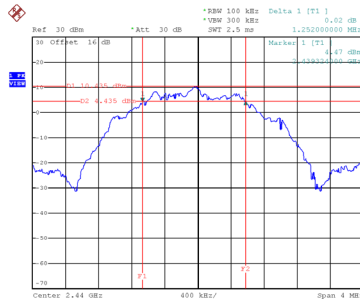


Date: 12.FEB.2025 09:55:15

CH39

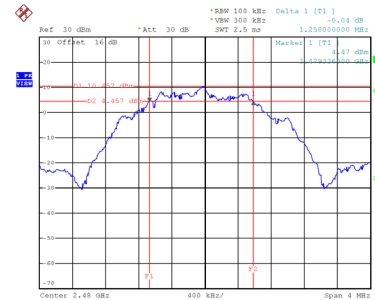


Date: 12.FEB.2025 10:07:03


99 % Occupied Bandwidth

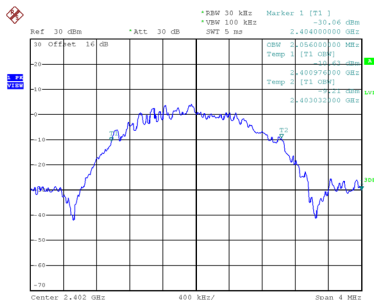

Date: 12.FEB.2025 09:51:53

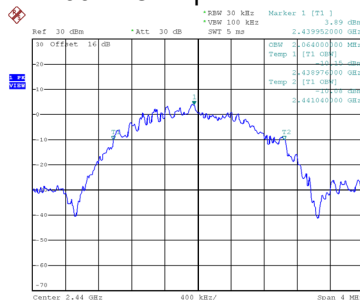

Date: 12.FEB.2025 09:55:21

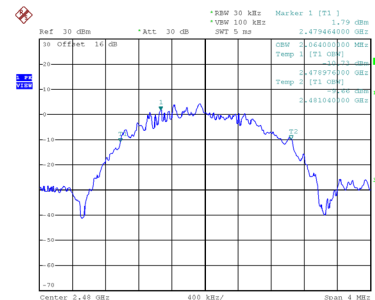


Date: 12.FEB.2025 10:07:09

Test Mode	TX Mode _4Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
01	2404	2.016	2.416	0.5	Pass
19	2440	2.058	2.424	0.5	Pass
38	2478	2.044	2.416	0.5	Pass

CH01

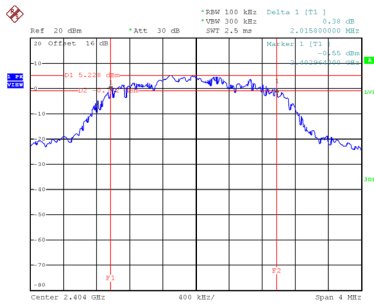


Date: 12.FEB.2025 10:12:52

CH19
6 dB Bandwidth

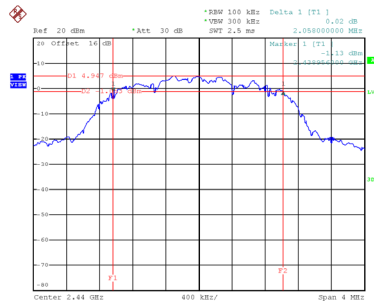


Date: 12.FEB.2025 10:20:04

CH38

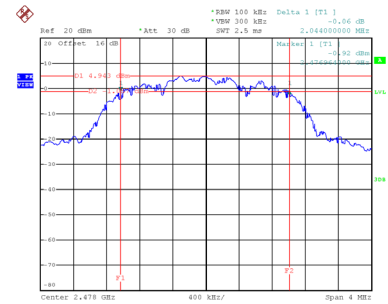


Date: 12.FEB.2025 10:26:48


99 % Occupied Bandwidth

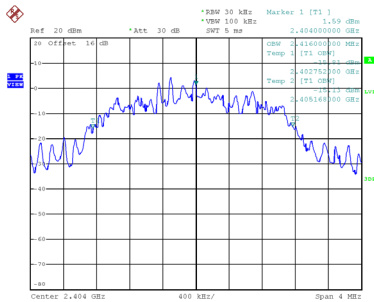

Date: 12.FEB.2025 10:12:17

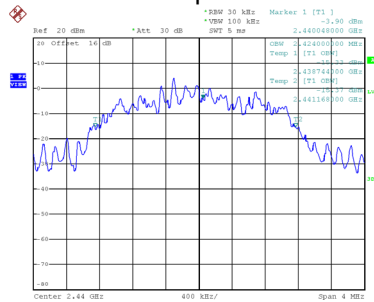

Date: 12.FEB.2025 10:20:11

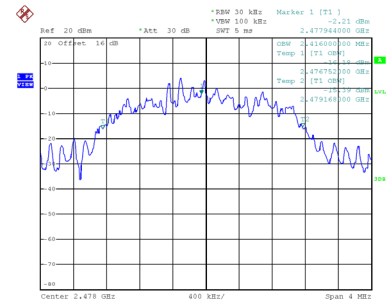


Date: 12.FEB.2025 10:26:54

For Xbox version

Test Mode	TX Mode _1Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.696	1.044	0.5	Pass
19	2440	0.707	1.044	0.5	Pass
39	2480	0.688	1.040	0.5	Pass

CH00

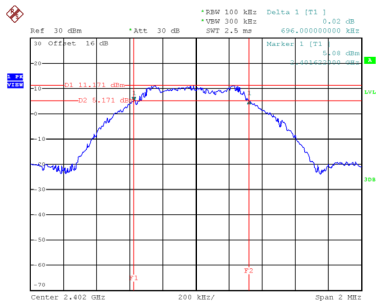


Date: 1.MAR.2025 10:13:12

CH19
6 dB Bandwidth

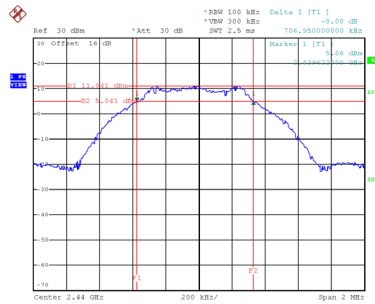


Date: 1.MAR.2025 10:15:07

CH39

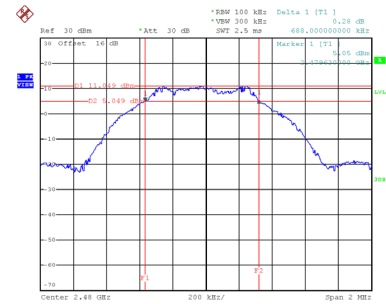


Date: 1.MAR.2025 10:17:33


99 % Occupied Bandwidth

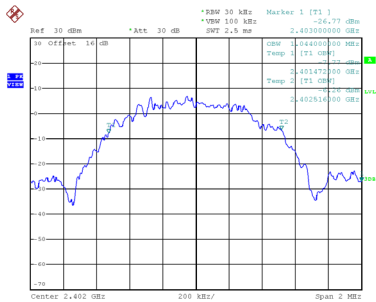

Date: 1.MAR.2025 10:12:34

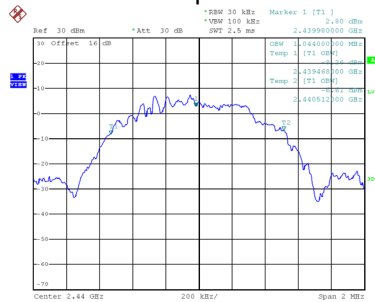

Date: 1.MAR.2025 10:15:14

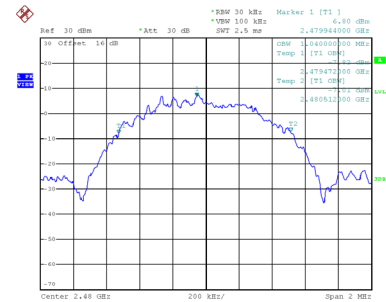


Date: 1.MAR.2025 10:17:40

Test Mode	TX Mode _2Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.258	2.064	0.5	Pass
19	2440	1.260	2.064	0.5	Pass
39	2480	1.258	2.056	0.5	Pass

CH00

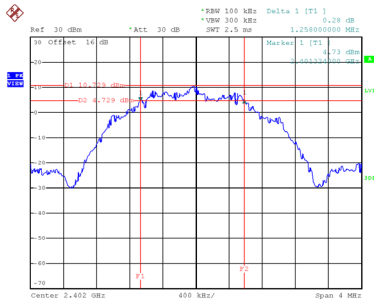


Date: 1.MAR.2025 10:20:30

CH19
6 dB Bandwidth

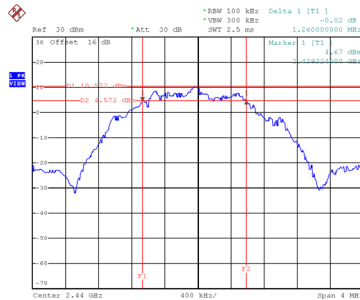


Date: 1.MAR.2025 10:23:00

CH39

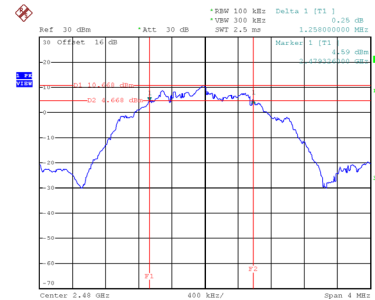


Date: 1.MAR.2025 10:25:25


99 % Occupied Bandwidth

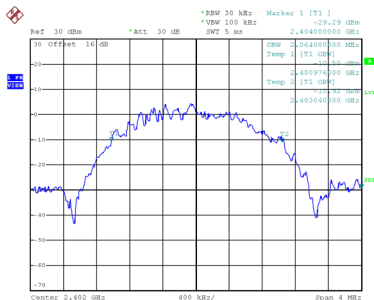

Date: 1.MAR.2025 10:19:47

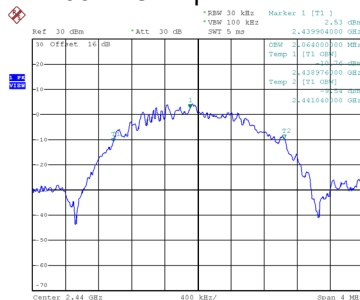

Date: 1.MAR.2025 10:23:06

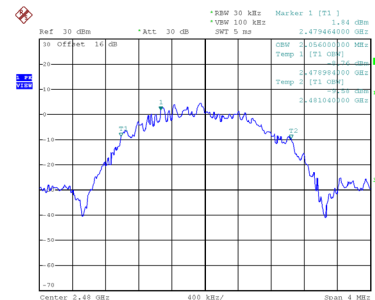


Date: 1.MAR.2025 10:25:32

Test Mode	TX Mode _4Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
01	2404	2.044	2.400	0.5	Pass
19	2440	2.042	2.424	0.5	Pass
38	2478	2.048	2.416	0.5	Pass

CH01

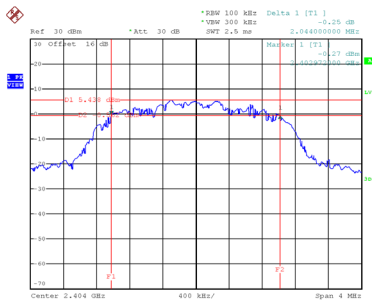


Date: 1.MAR.2025 10:35:23

CH19
6 dB Bandwidth

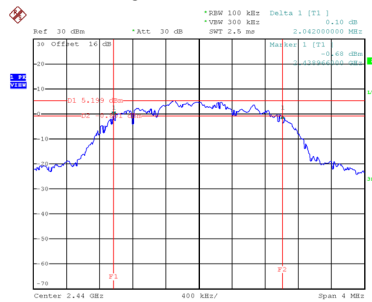


Date: 1.MAR.2025 10:31:09

CH38

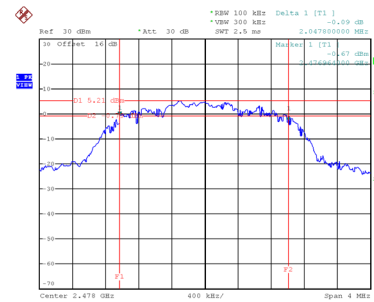


Date: 1.MAR.2025 10:36:42


99 % Occupied Bandwidth

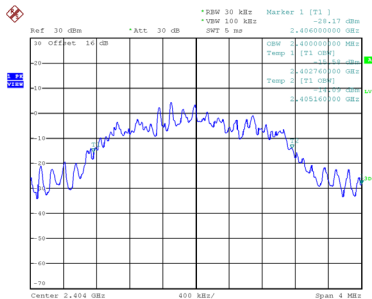

Date: 1.MAR.2025 10:34:51

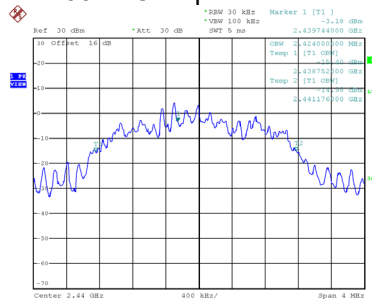

Date: 1.MAR.2025 10:31:16

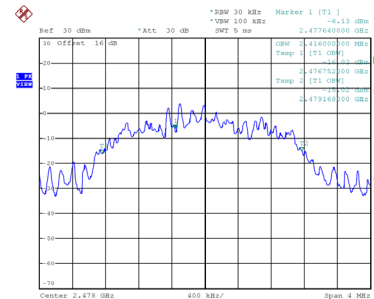

Date: 1.MAR.2025 10:36:48




APPENDIX F - MAXIMUM OUTPUT POWER

For PC version

Test Mode	TX Mode _1Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	11.60	0.0145	30.00	1.0000	Pass
2440	11.45	0.0140	30.00	1.0000	Pass
2480	11.43	0.0139	30.00	1.0000	Pass




Note: Output power = Measure result + Cable loss

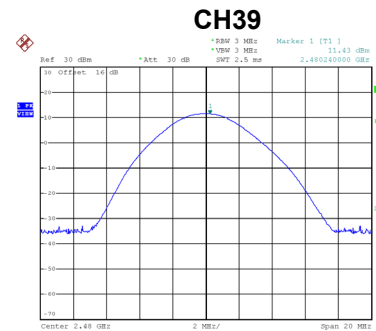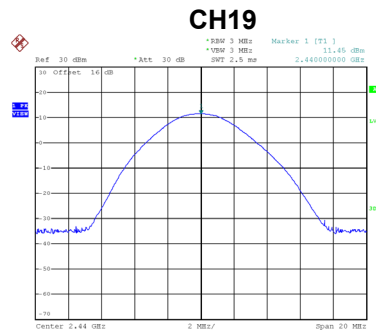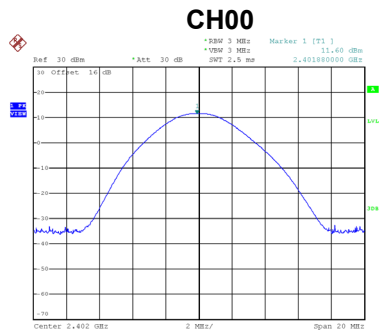

Test Mode	TX Mode _2Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	11.56	0.0143	30.00	1.0000	Pass
2440	11.42	0.0139	30.00	1.0000	Pass
2480	11.42	0.0139	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

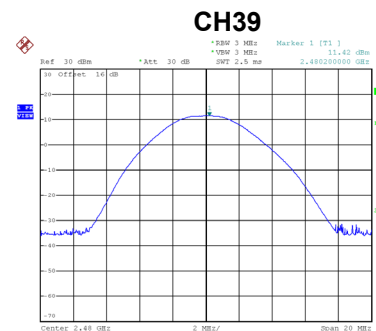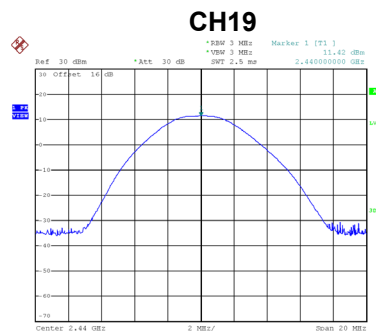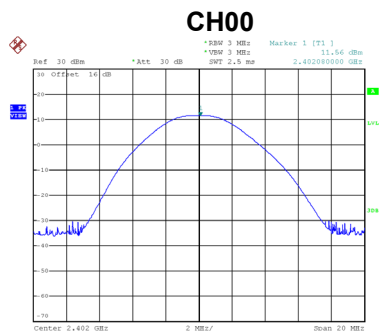


Test Mode	TX Mode _4Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2404	10.63	0.0116	30.00	1.0000	Pass
2440	10.39	0.0109	30.00	1.0000	Pass
2478	10.39	0.0109	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

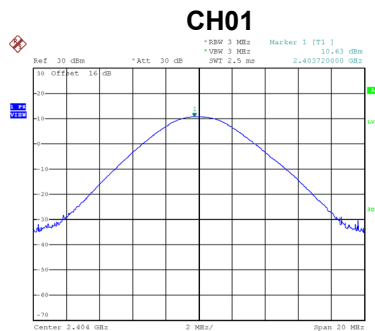

Date: 12.FEB.2025 10:18:28

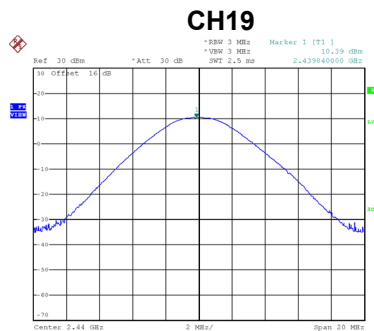

Date: 12.FEB.2025 10:21:19

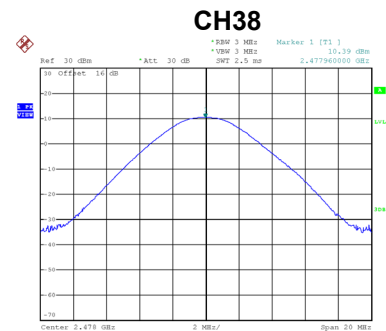


Date: 12.FEB.2025 10:27:45

For Xbox version


Test Mode	TX Mode _1Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	11.61	0.0145	30.00	1.0000	Pass
2440	11.47	0.0140	30.00	1.0000	Pass
2480	11.47	0.0140	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

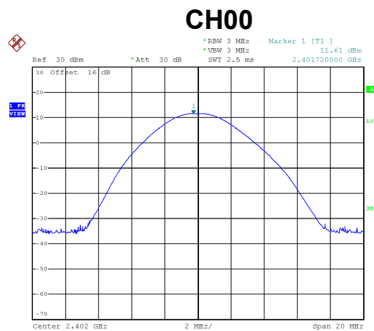

Date: 1.MAR.2025 10:13:57

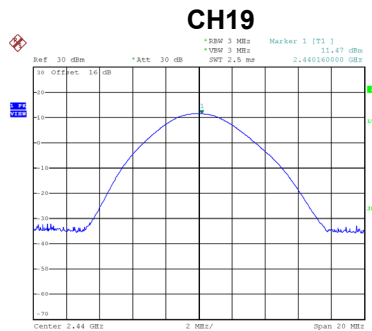

Date: 1.MAR.2025 10:16:23

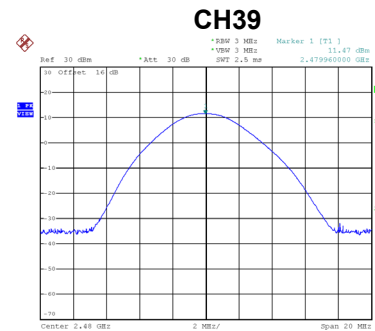


Date: 1.MAR.2025 10:18:49


Test Mode	TX Mode _2Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	11.61	0.0145	30.00	1.0000	Pass
2440	11.51	0.0142	30.00	1.0000	Pass
2480	11.55	0.0143	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

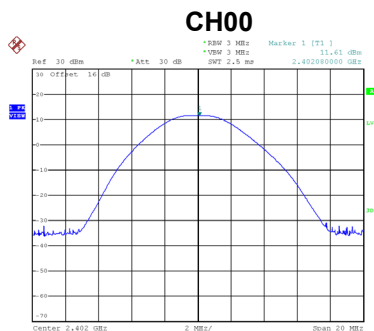

Date: 1.MAR.2025 10:21:38

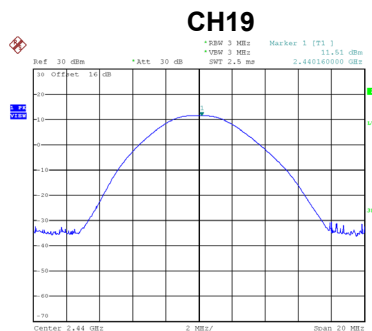

Date: 1.MAR.2025 10:24:16

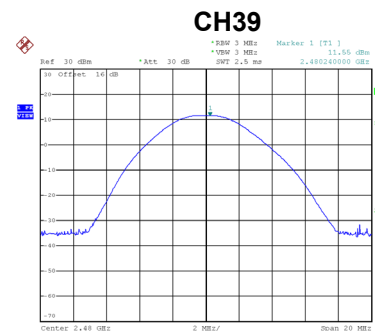


Date: 1.MAR.2025 10:26:41


Test Mode	TX Mode _4Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2404	10.71	0.0118	30.00	1.0000	Pass
2440	10.51	0.0112	30.00	1.0000	Pass
2478	10.50	0.0112	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

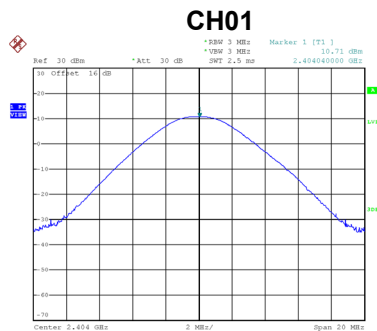

Date: 1.MAR.2025 10:35:37

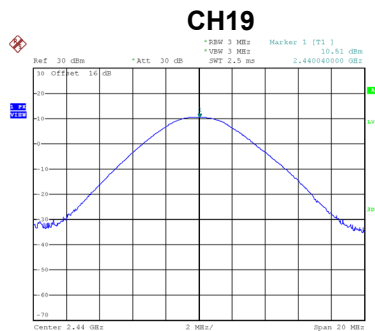

Date: 1.MAR.2025 10:32:24

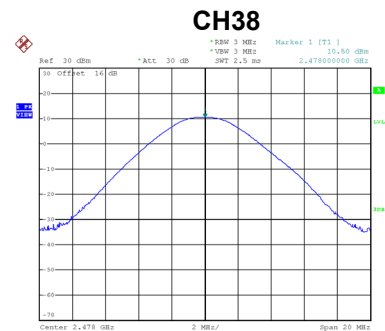


Date: 1.MAR.2025 10:37:02

APPENDIX G - CONDUCTED SPURIOUS EMISSION


For PC version

Test Mode	TX Mode_1Mbps
-----------	---------------

Bandedge CH00 (Lower)

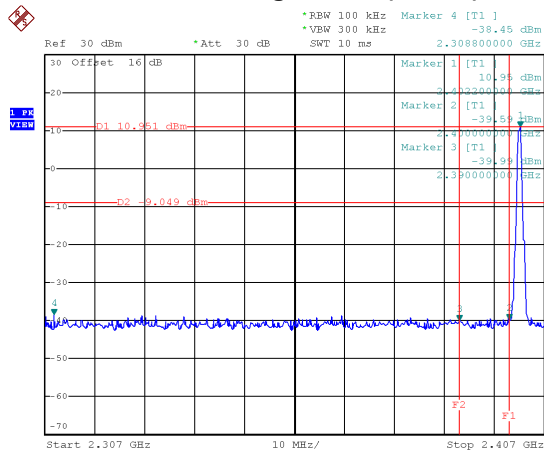




Bandedge CH39 (Upper)

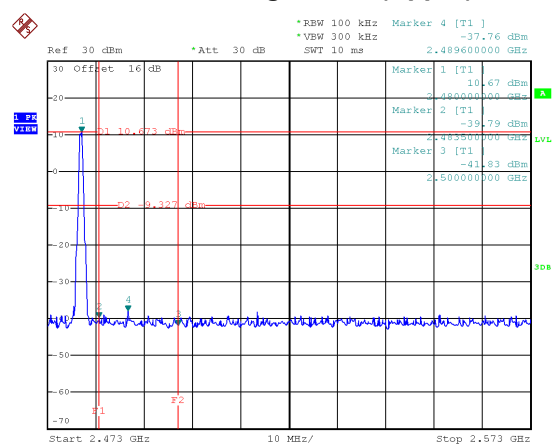

Date: 12.FEB.2025 09:37:17

Date: 12.FEB.2025 09:48:53

CH00 – 10th Harmonic of the fundamental frequency

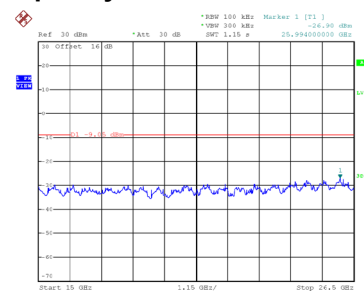
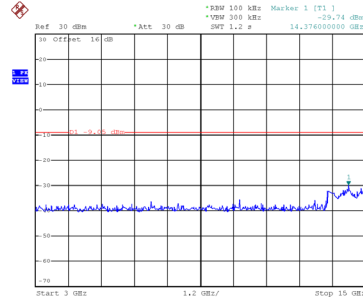
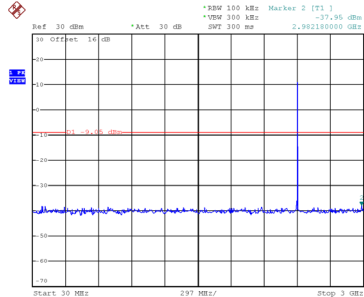


Date: 12.FEB.2025 09:37:30

Date: 12.FEB.2025 09:37:37

Date: 12.FEB.2025 09:37:44

CH19 – 10th Harmonic of the fundamental frequency

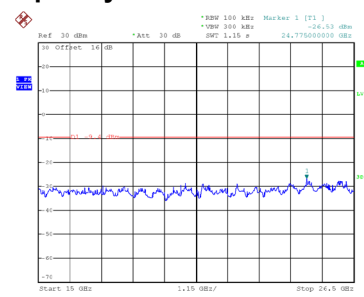
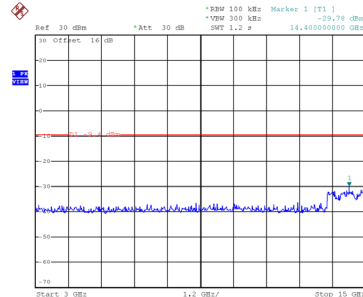
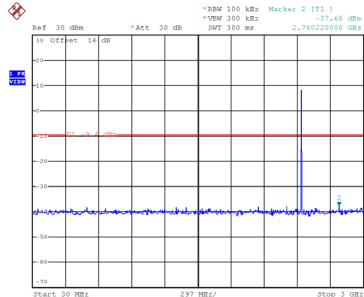


Date: 12.FEB.2025 09:46:17

Date: 12.FEB.2025 09:46:24

Date: 12.FEB.2025 09:46:31

CH39 – 10th Harmonic of the fundamental frequency

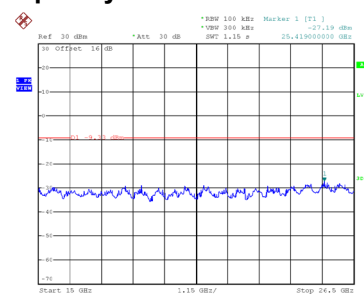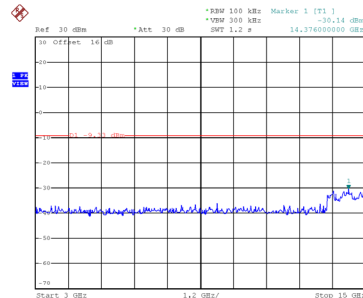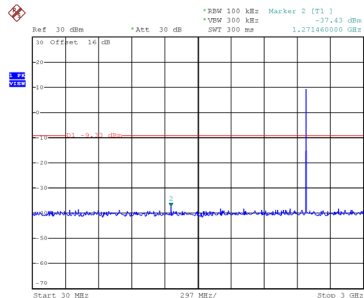


Date: 12.FEB.2025 09:49:07

Date: 12.FEB.2025 09:49:15


Date: 12.FEB.2025 09:49:23

Test Mode TX Mode_2Mbps

Bandedge CH00 (Lower)

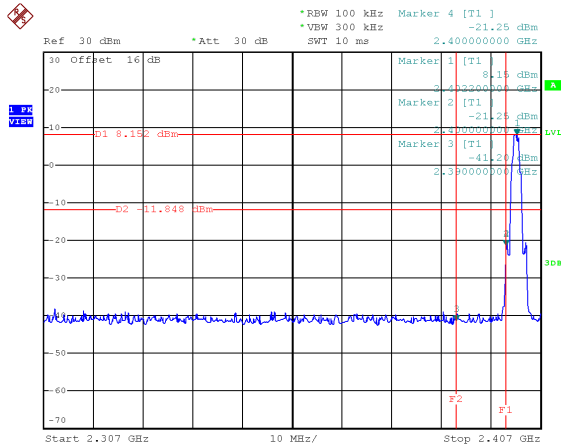




Bandedge CH39 (Upper)

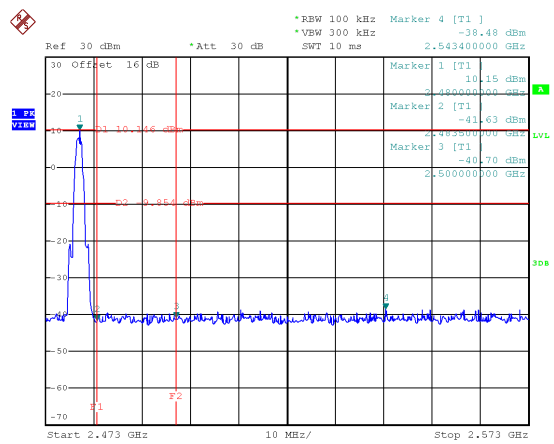

Date: 12.FEB.2025 09:53:08

Date: 12.FEB.2025 10:07:34

CH00 – 10th Harmonic of the fundamental frequency

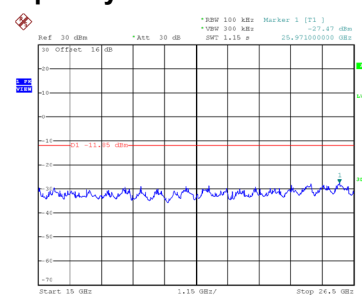
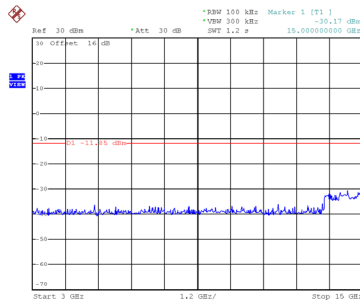
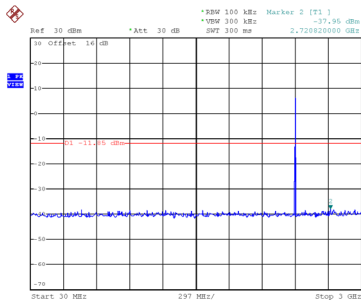


Date: 12.FEB.2025 09:53:22

Date: 12.FEB.2025 09:53:30

Date: 12.FEB.2025 09:53:39

CH19 – 10th Harmonic of the fundamental frequency

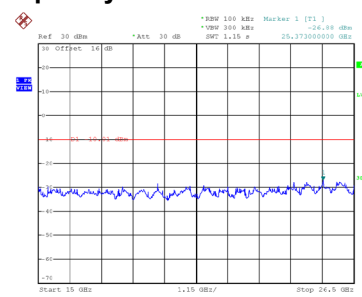
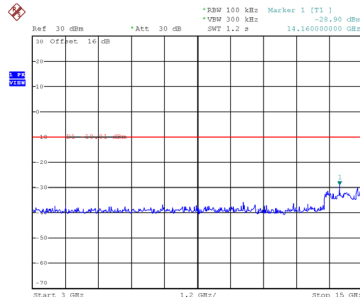
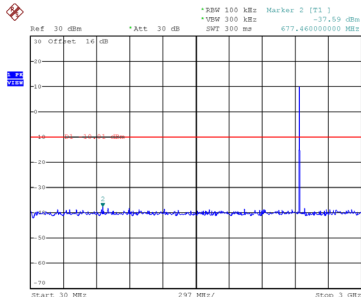


Date: 12.FEB.2025 10:04:58

Date: 12.FEB.2025 10:05:05

Date: 12.FEB.2025 10:05:12

CH39 – 10th Harmonic of the fundamental frequency

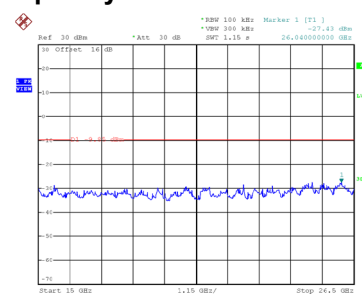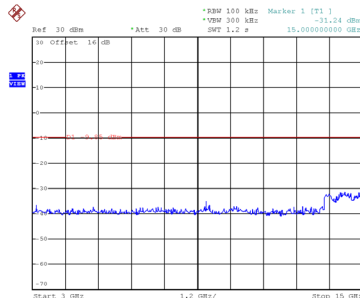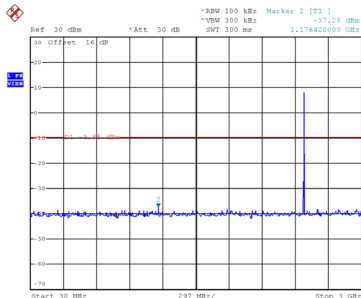


Date: 12.FEB.2025 10:07:48

Date: 12.FEB.2025 10:07:56


Date: 12.FEB.2025 10:08:04

Test Mode TX Mode_4Mbps

Bandedge CH01 (Lower)

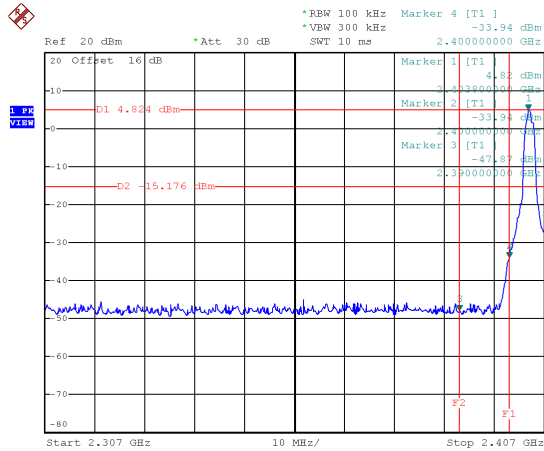




Bandedge CH38 (Upper)

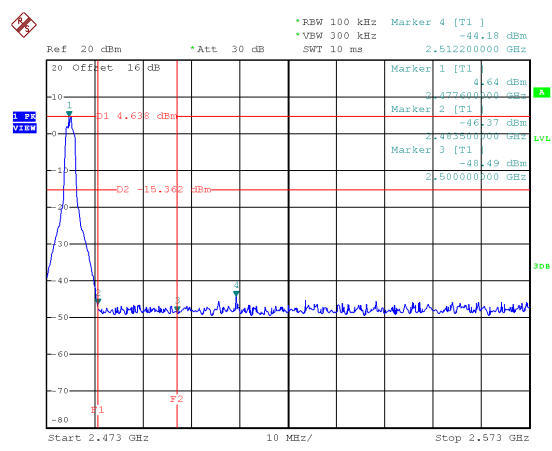

Date: 12.FEB.2025 10:17:09

Date: 12.FEB.2025 10:23:23

CH01 – 10th Harmonic of the fundamental frequency

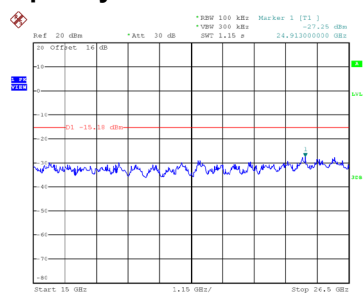
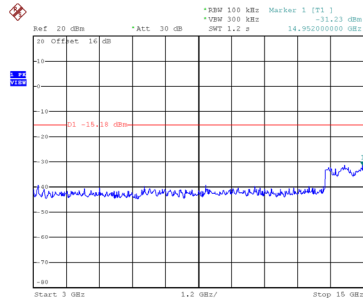
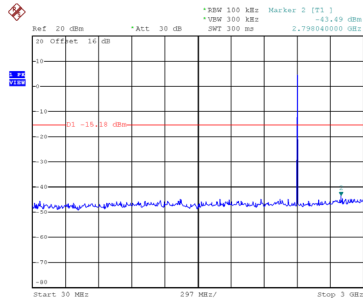


Date: 12.FEB.2025 10:17:23

Date: 12.FEB.2025 10:17:31

Date: 12.FEB.2025 10:17:39

CH19 – 10th Harmonic of the fundamental frequency

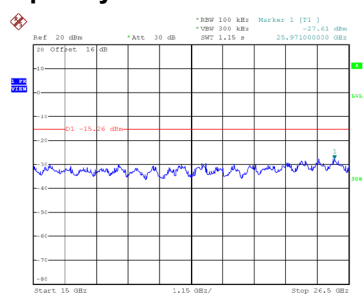
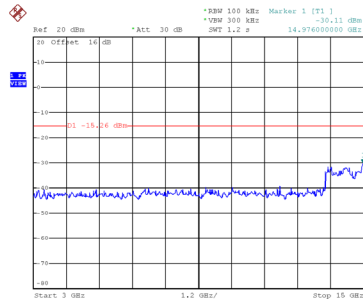
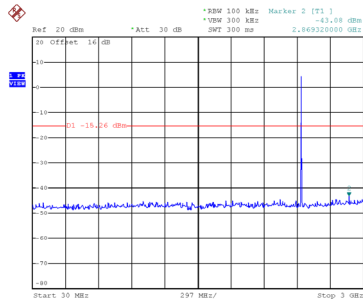


Date: 12.FEB.2025 10:20:33

Date: 12.FEB.2025 10:20:41

Date: 12.FEB.2025 10:20:49

CH38 – 10th Harmonic of the fundamental frequency

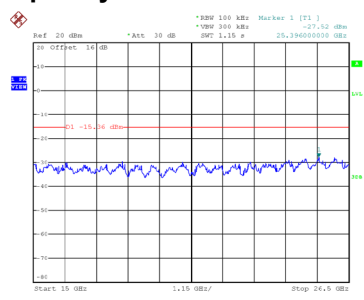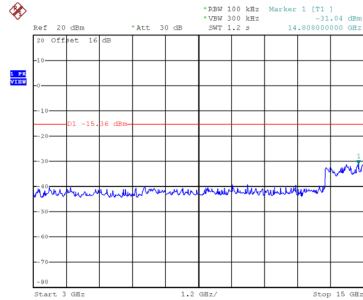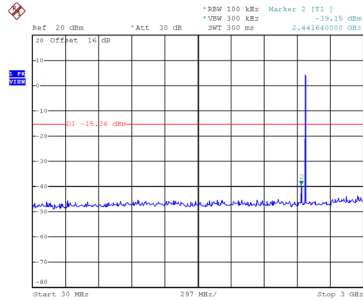

Date: 12.FEB.2025 10:23:37

Date: 12.FEB.2025 10:23:45

Date: 12.FEB.2025 10:23:53