


| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX AC80 Mode 5290MHz |

Vertical

80 dBuV/m

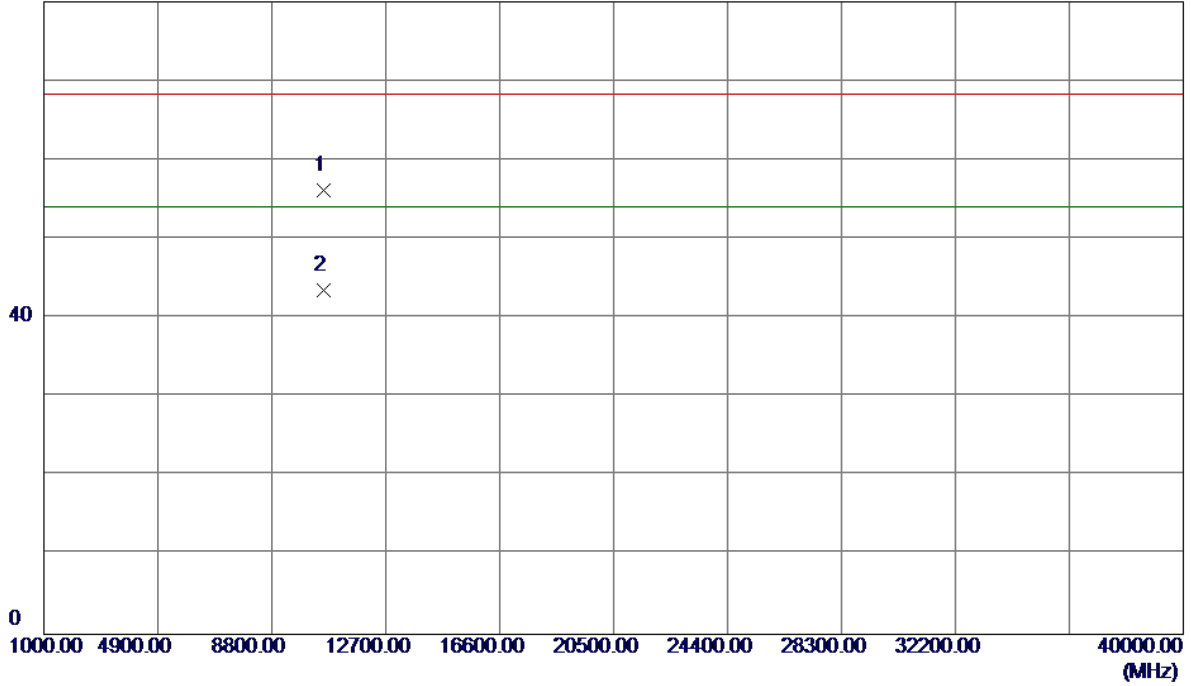


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 10580.8949 | 40.72 | 15.39 | 56.11 | 68.30 | -12.19 | Peak | |
| 2 * | 10579.9700 | 28.18 | 15.39 | 43.57 | 54.00 | -10.43 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX AC80 Mode 5290MHz |

Horizontal

115 dBuV/m

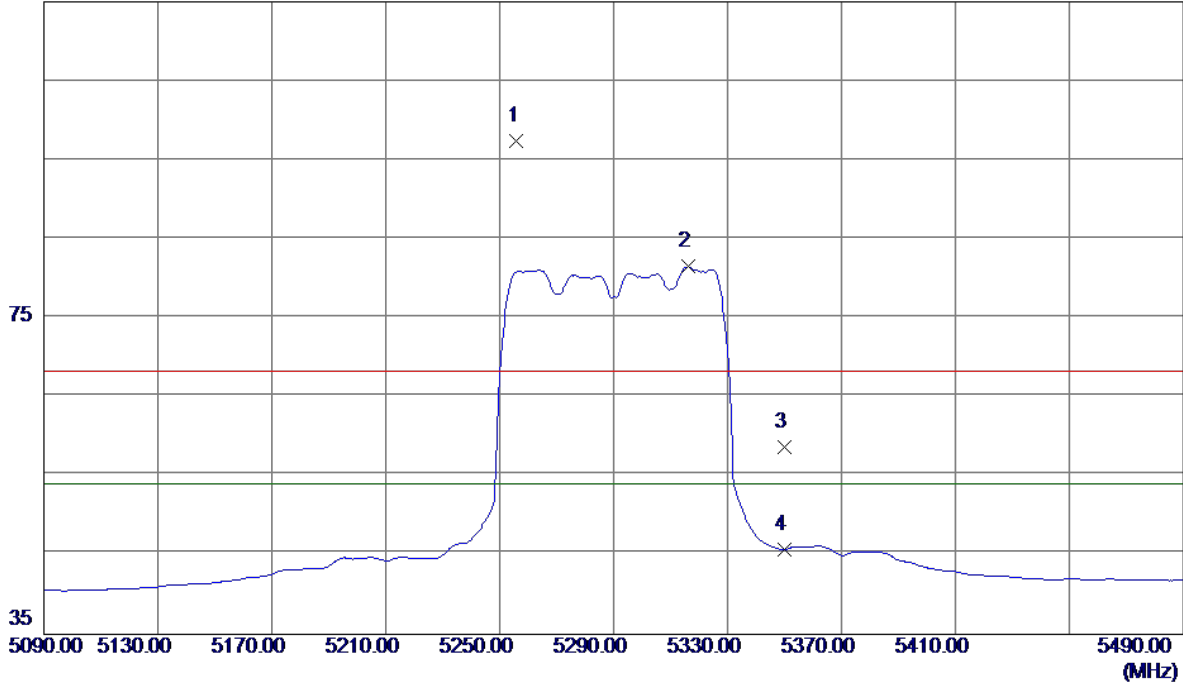


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5256.0000 | 56.36 | 40.97 | 97.33 | 68.30 | 29.03 | Peak | No Limit |
| 2 | 5316.4000 | 40.31 | 41.17 | 81.48 | 54.00 | 27.48 | AVG | No Limit |
| 3 | 5350.0000 | 17.40 | 41.28 | 58.68 | 68.30 | -9.62 | Peak | |
| 4 | 5350.0000 | 4.44 | 41.28 | 45.72 | 54.00 | -8.28 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX AC80 Mode 5290MHz |

Horizontal

80 dBuV/m

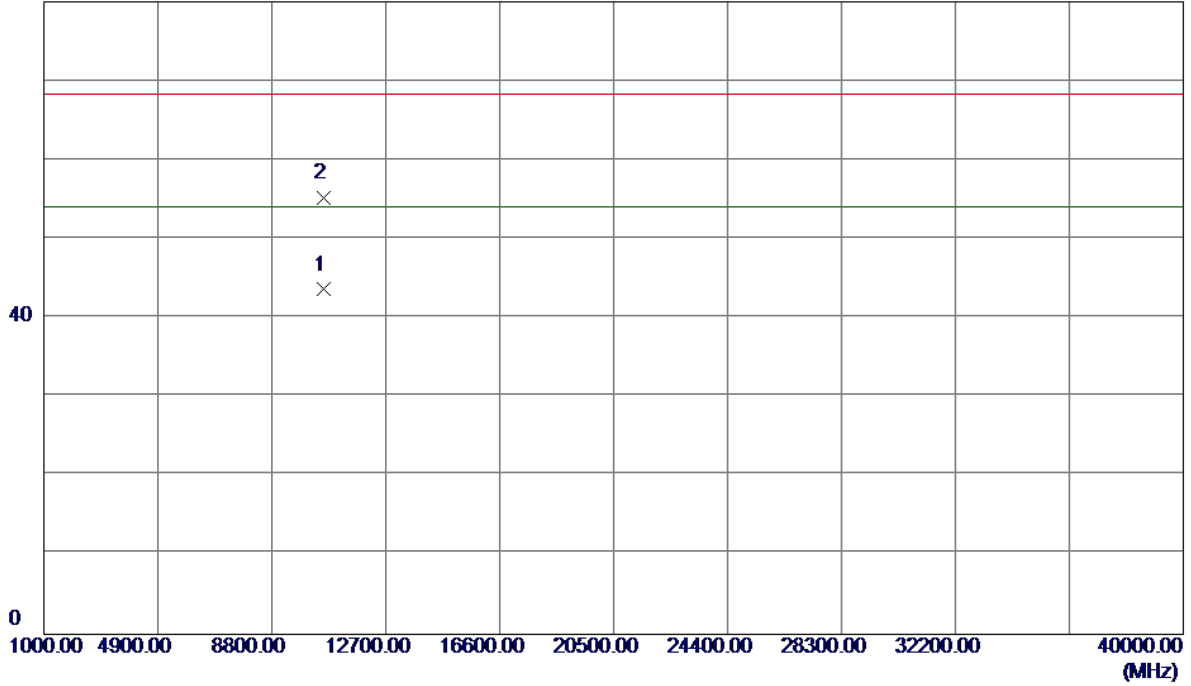


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10580.1200 | 28.21 | 15.39 | 43.60 | 54.00 | -10.40 | AVG | |
| 2 | 10580.0210 | 39.88 | 15.39 | 55.27 | 68.30 | -13.03 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5500MHz |

Vertical

115 dBuV/m

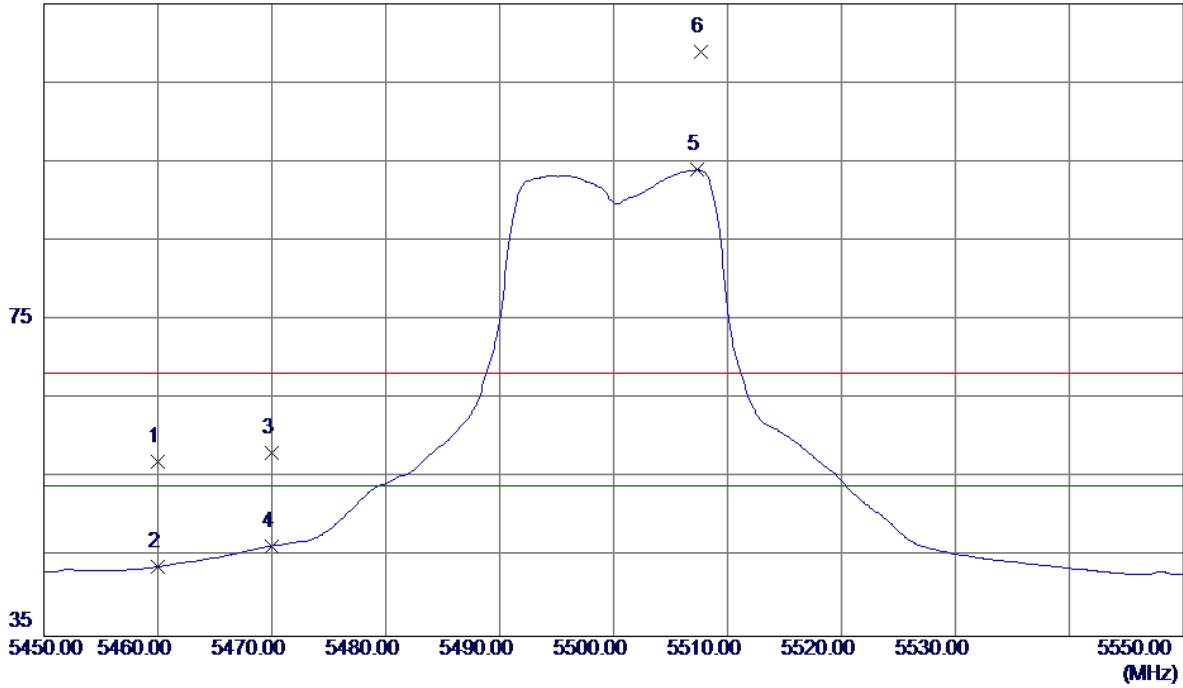


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 15.48 | 41.65 | 57.13 | 68.30 | -11.17 | Peak | |
| 2 | 5460.0000 | 2.15 | 41.65 | 43.80 | 54.00 | -10.20 | AVG | |
| 3 | 5470.0000 | 16.49 | 41.68 | 58.17 | 68.30 | -10.13 | Peak | |
| 4 | 5470.0000 | 4.75 | 41.68 | 46.43 | 54.00 | -7.57 | AVG | |
| 5 | 5507.3000 | 52.18 | 41.81 | 93.99 | 54.00 | 39.99 | AVG | No Limit |
| 6 * | 5507.7000 | 67.09 | 41.81 | 108.90 | 68.30 | 40.60 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5500MHz |

Vertical

80 dBuV/m

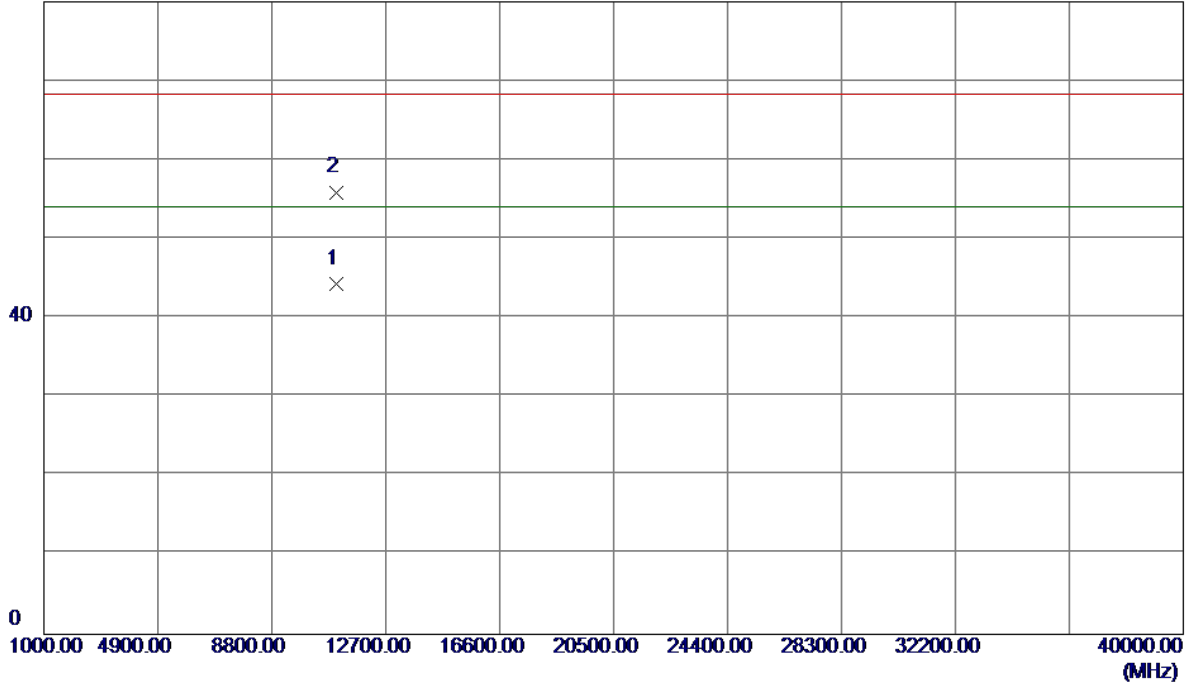


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.2200 | 28.32 | 15.93 | 44.25 | 54.00 | -9.75 | AVG | |
| 2 | 11000.0000 | 39.99 | 15.93 | 55.92 | 68.30 | -12.38 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5500MHz |

Horizontal


115 dBuV/m

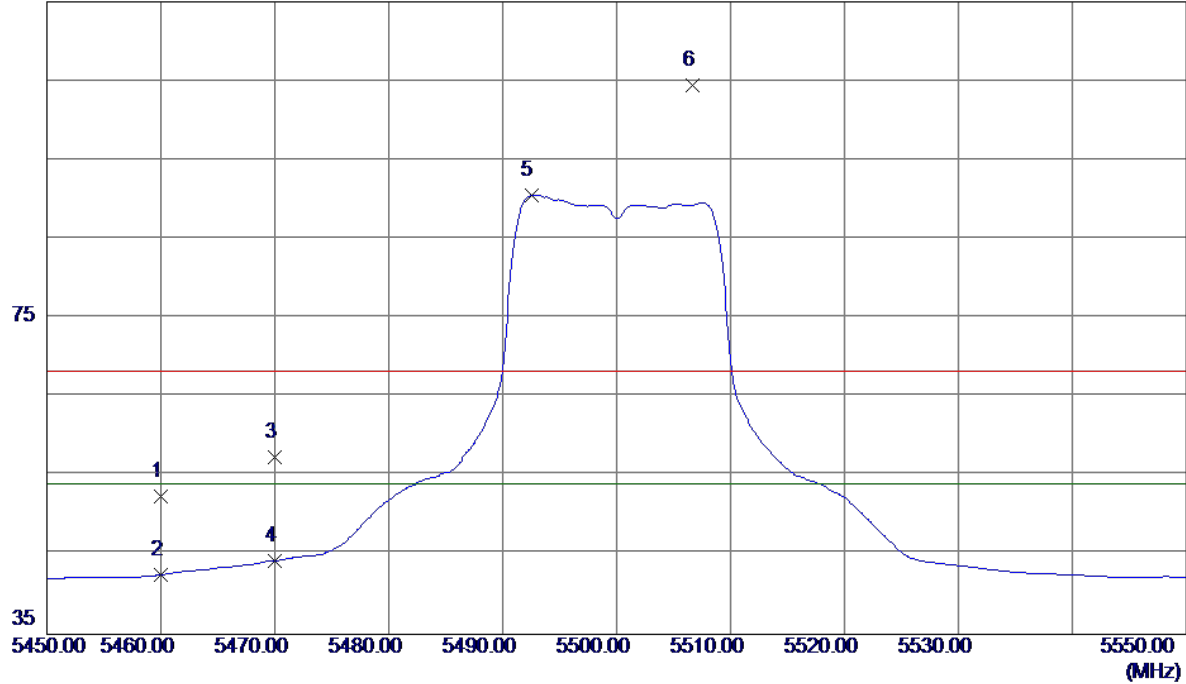

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 10.82 | 41.65 | 52.47 | 68.30 | -15.83 | Peak | |
| 2 | 5460.0000 | 0.88 | 41.65 | 42.53 | 54.00 | -11.47 | AVG | |
| 3 | 5470.0000 | 15.77 | 41.68 | 57.45 | 68.30 | -10.85 | Peak | |
| 4 | 5470.0000 | 2.65 | 41.68 | 44.33 | 54.00 | -9.67 | AVG | |
| 5 * | 5492.5000 | 48.83 | 41.76 | 90.59 | 54.00 | 36.59 | AVG | No Limit |
| 6 | 5506.7000 | 62.60 | 41.80 | 104.40 | 68.30 | 36.10 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5500MHz |

Horizontal

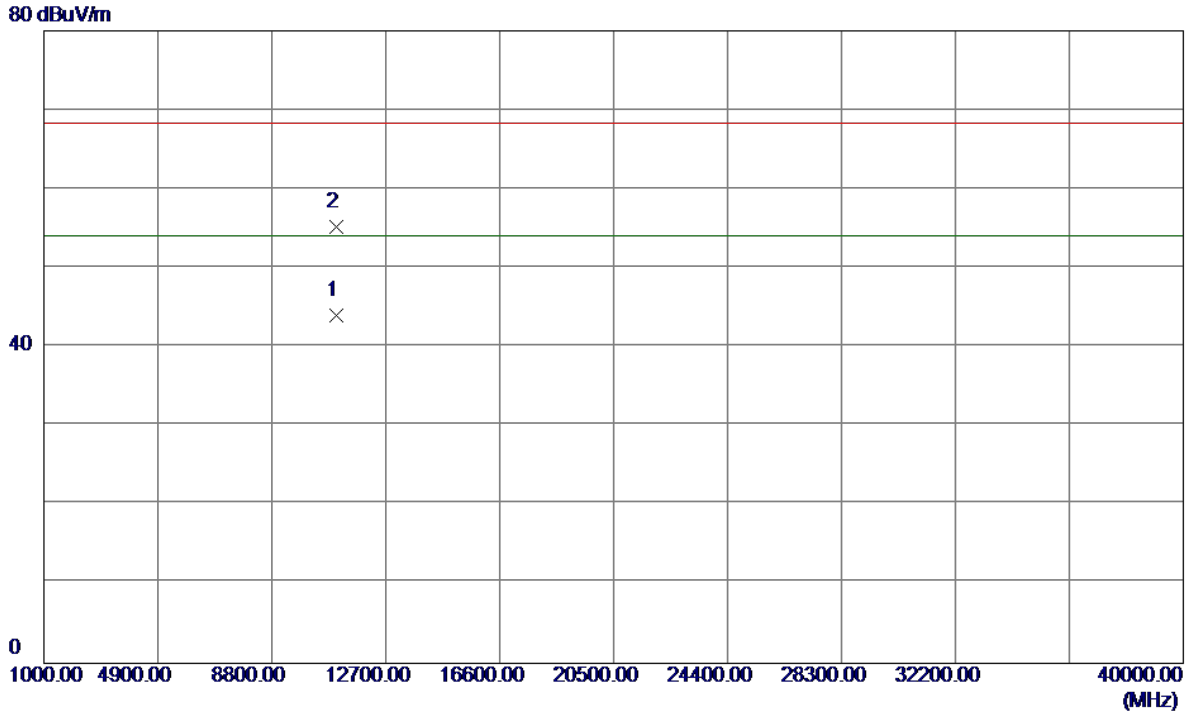


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10999.9300 | 28.08 | 15.93 | 44.01 | 54.00 | -9.99 | AVG | |
| 2 | 11000.0000 | 39.33 | 15.93 | 55.26 | 68.30 | -13.04 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5580MHz |

Vertical

115 dBuV/m

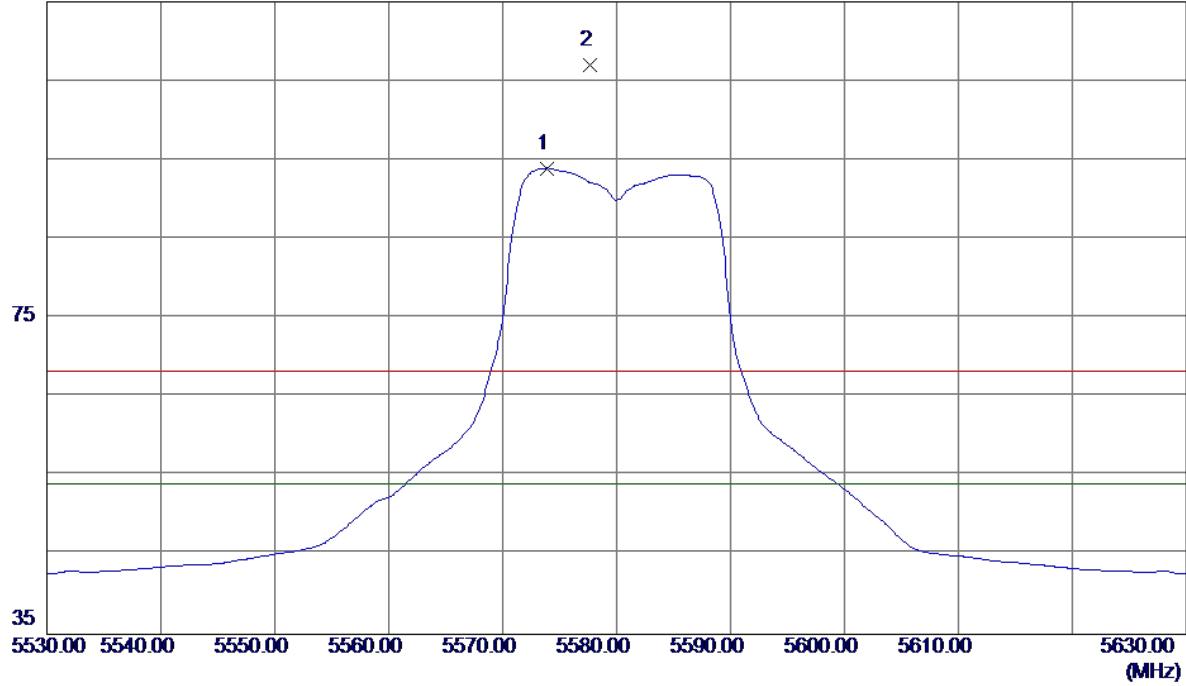


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5573.9000 | 51.92 | 42.04 | 93.96 | 54.00 | 39.96 | AVG | No Limit |
| 2 | 5577.7000 | 64.99 | 42.06 | 107.05 | 68.30 | 38.75 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5580MHz |

Vertical

80 dBuV/m

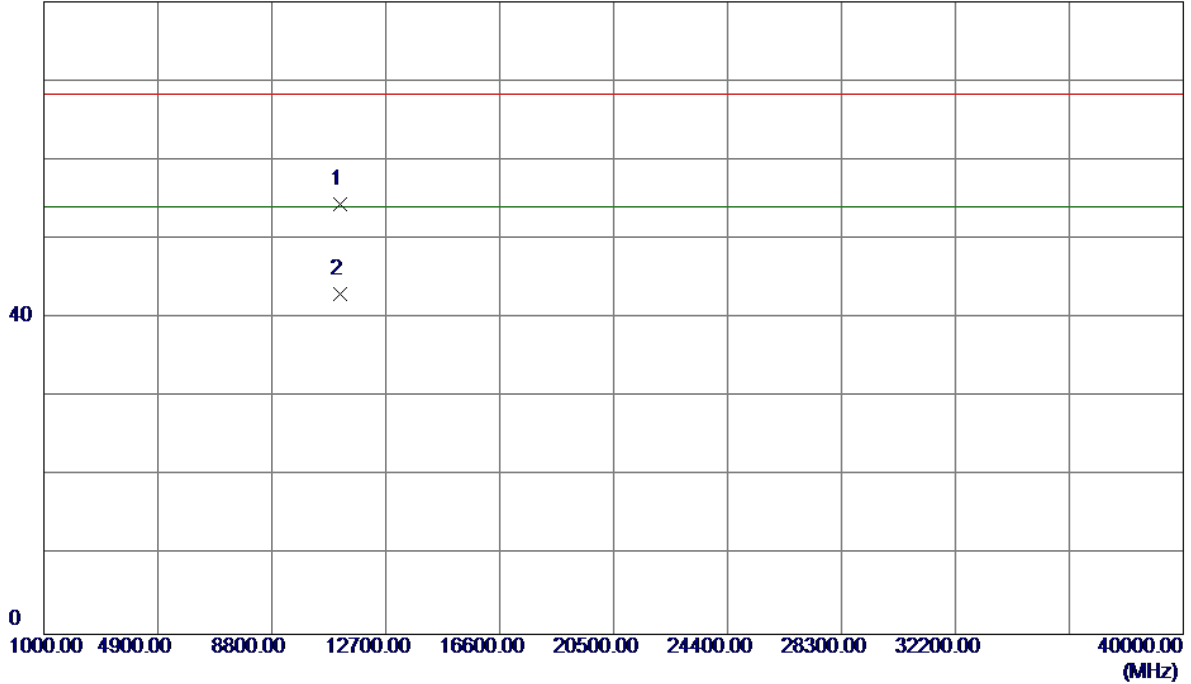


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11160.4000 | 38.69 | 15.79 | 54.48 | 68.30 | -13.82 | Peak | |
| 2 * | 11160.0599 | 27.32 | 15.79 | 43.11 | 54.00 | -10.89 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5580MHz |

Horizontal


115 dBuV/m

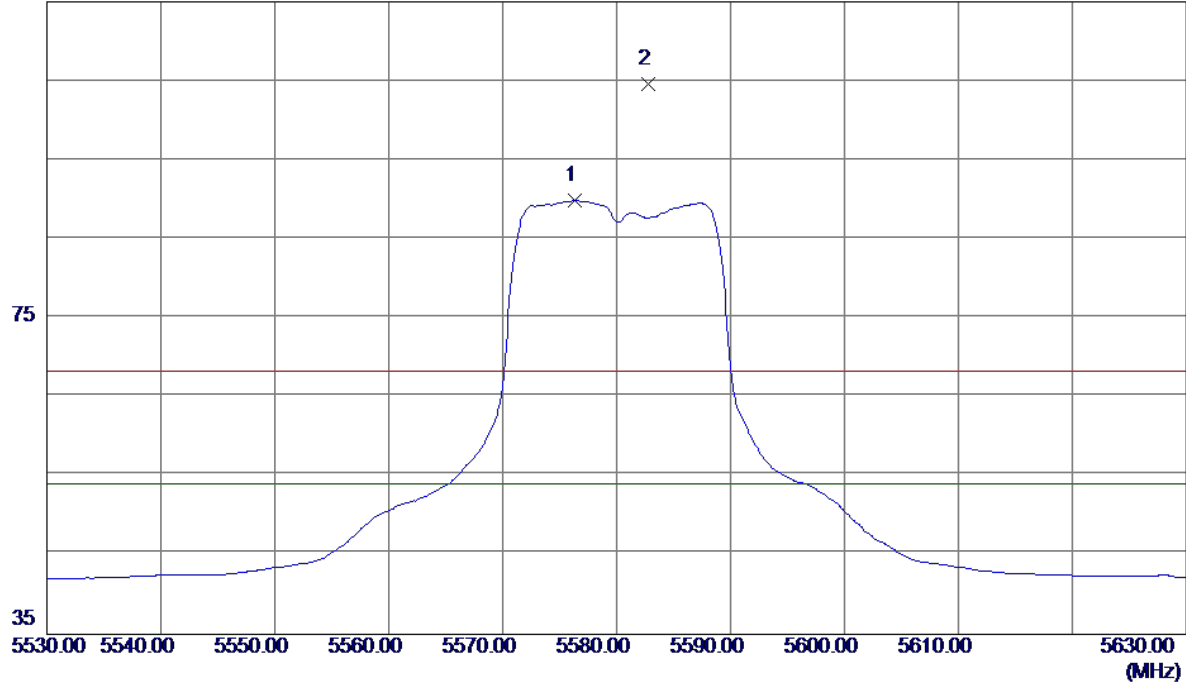

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5576.3000 | 47.82 | 42.05 | 89.87 | 54.00 | 35.87 | AVG | No Limit |
| 2 * | 5582.8000 | 62.57 | 42.07 | 104.64 | 68.30 | 36.34 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5580MHz |

Horizontal

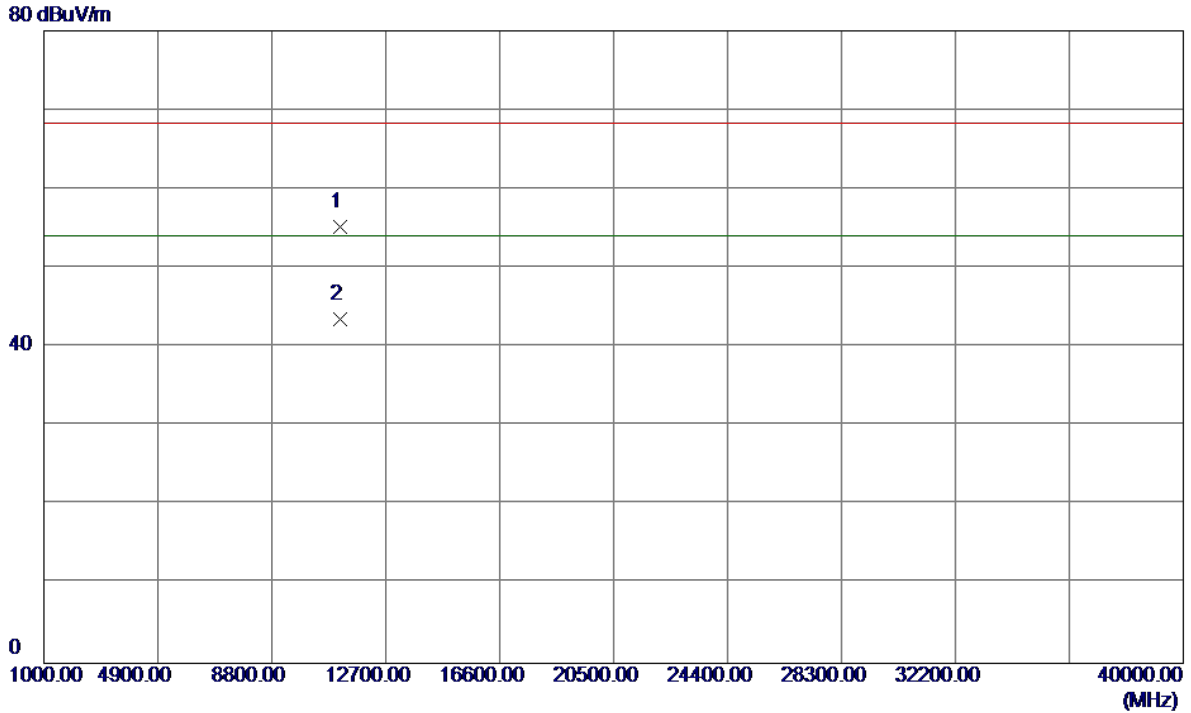


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11159.8000 | 39.46 | 15.79 | 55.25 | 68.30 | -13.05 | Peak | |
| 2 * | 11160.0599 | 27.78 | 15.79 | 43.57 | 54.00 | -10.43 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5700MHz |

Vertical


115 dBuV/m

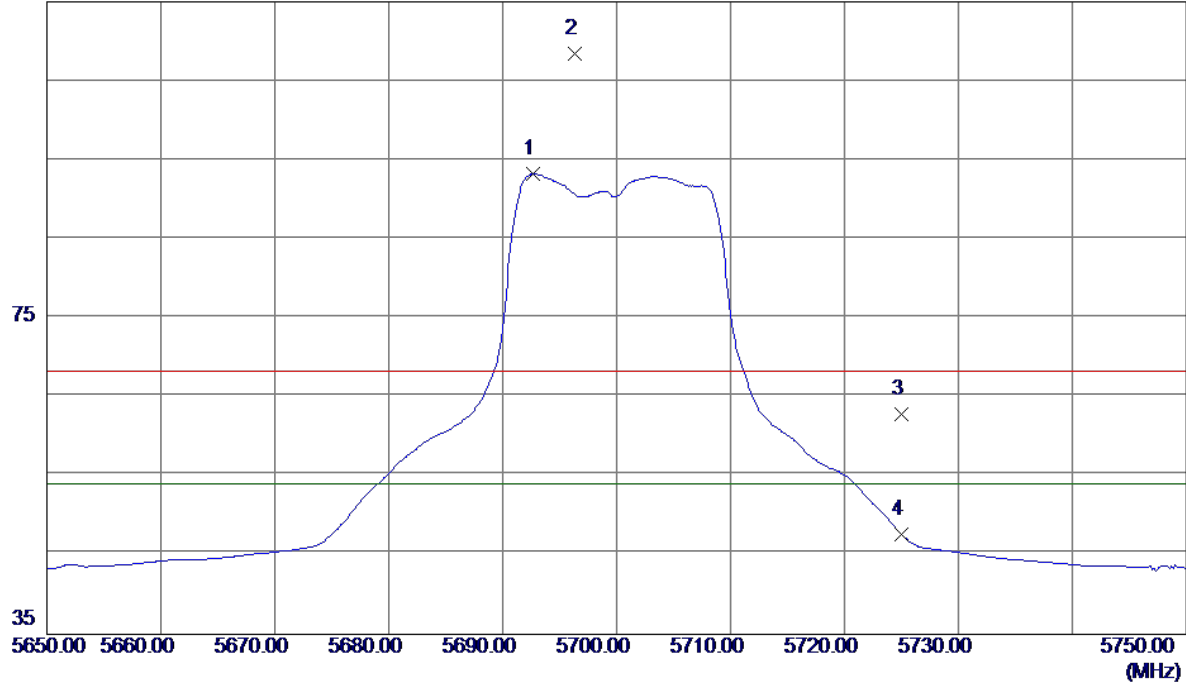

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5692.7000 | 50.74 | 42.47 | 93.21 | 54.00 | 39.21 | AVG | No Limit |
| 2 * | 5696.3000 | 65.89 | 42.48 | 108.37 | 68.30 | 40.07 | Peak | No Limit |
| 3 | 5725.0000 | 20.23 | 42.58 | 62.81 | 68.30 | -5.49 | Peak | |
| 4 | 5725.0000 | 5.05 | 42.58 | 47.63 | 54.00 | -6.37 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5700MHz |

Vertical

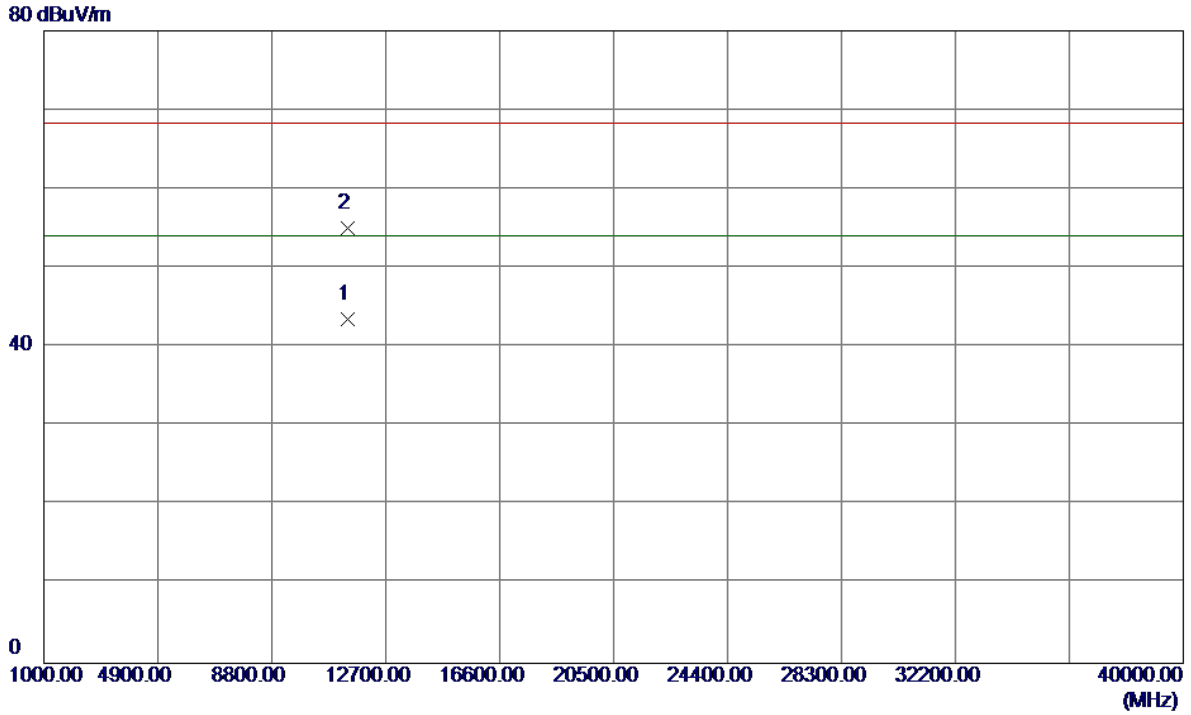


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11399.8600 | 28.02 | 15.57 | 43.59 | 54.00 | -10.41 | AVG | |
| 2 | 11400.0000 | 39.53 | 15.57 | 55.10 | 68.30 | -13.20 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5700MHz |

Horizontal

115 dBuV/m

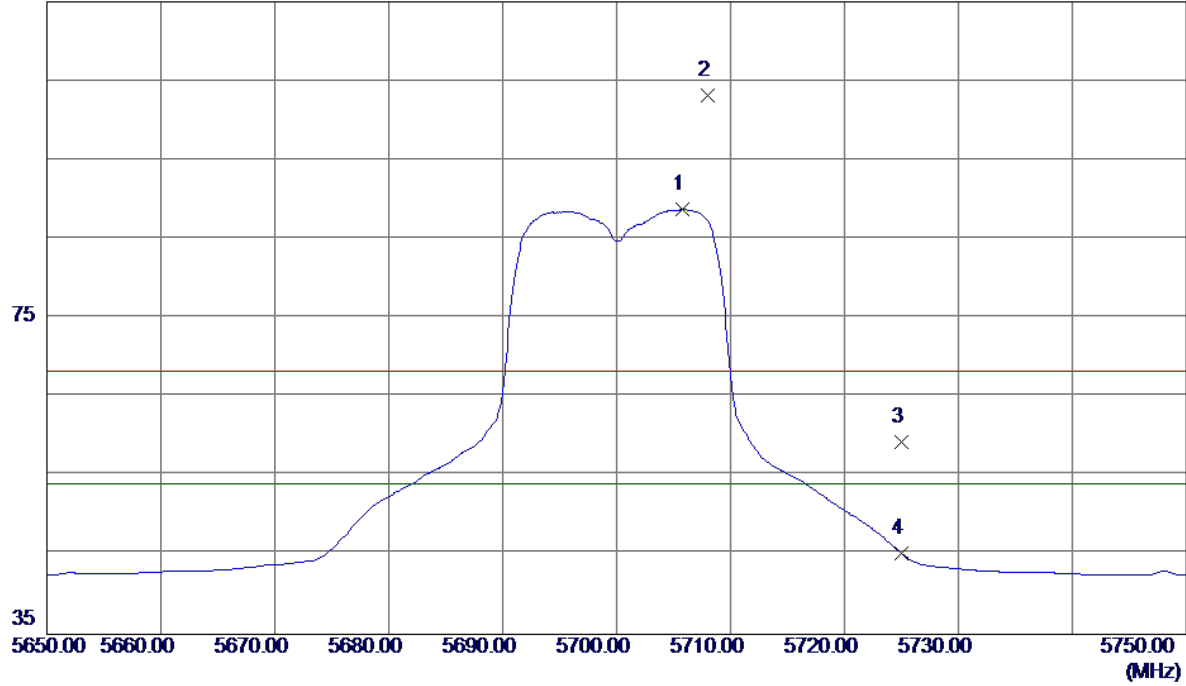


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5705.8000 | 46.19 | 42.51 | 88.70 | 54.00 | 34.70 | AVG | No Limit |
| 2 * | 5708.0000 | 60.59 | 42.52 | 103.11 | 68.30 | 34.81 | Peak | No Limit |
| 3 | 5725.0000 | 16.68 | 42.58 | 59.26 | 68.30 | -9.04 | Peak | |
| 4 | 5725.0000 | 2.66 | 42.58 | 45.24 | 54.00 | -8.76 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC20 Mode 5700MHz |

Horizontal

80 dBuV/m

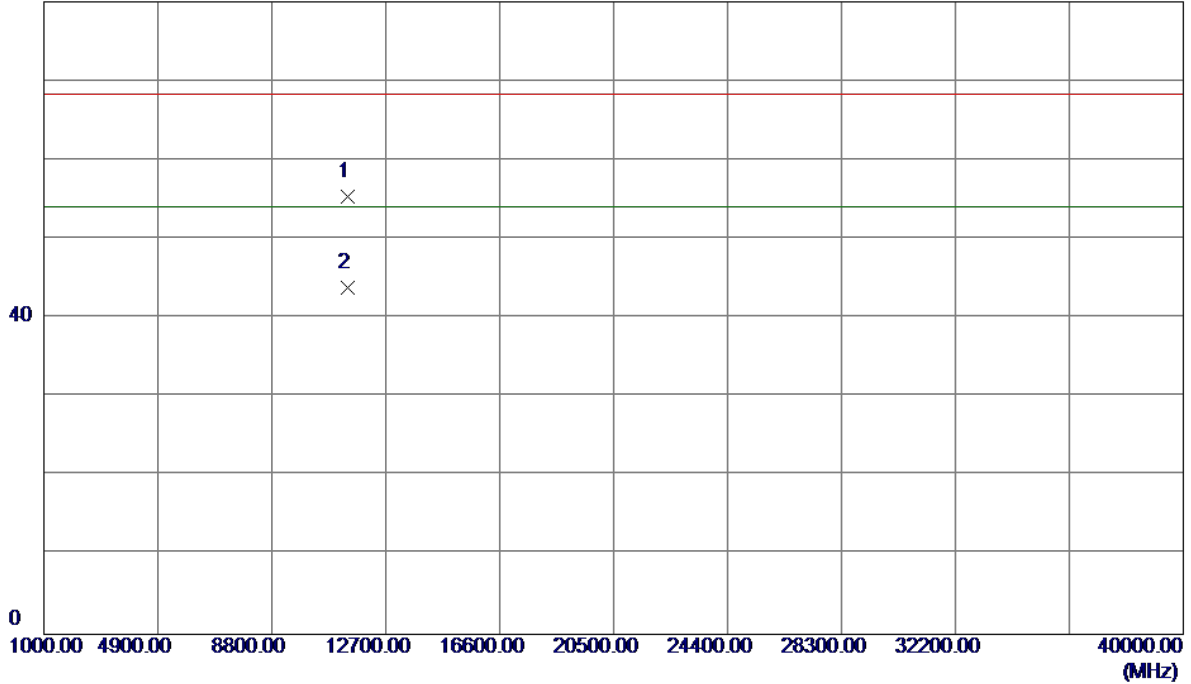


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11400.1700 | 39.75 | 15.57 | 55.32 | 68.30 | -12.98 | Peak | |
| 2 * | 11400.1100 | 28.33 | 15.57 | 43.90 | 54.00 | -10.10 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5510MHz |

Vertical


115 dBuV/m

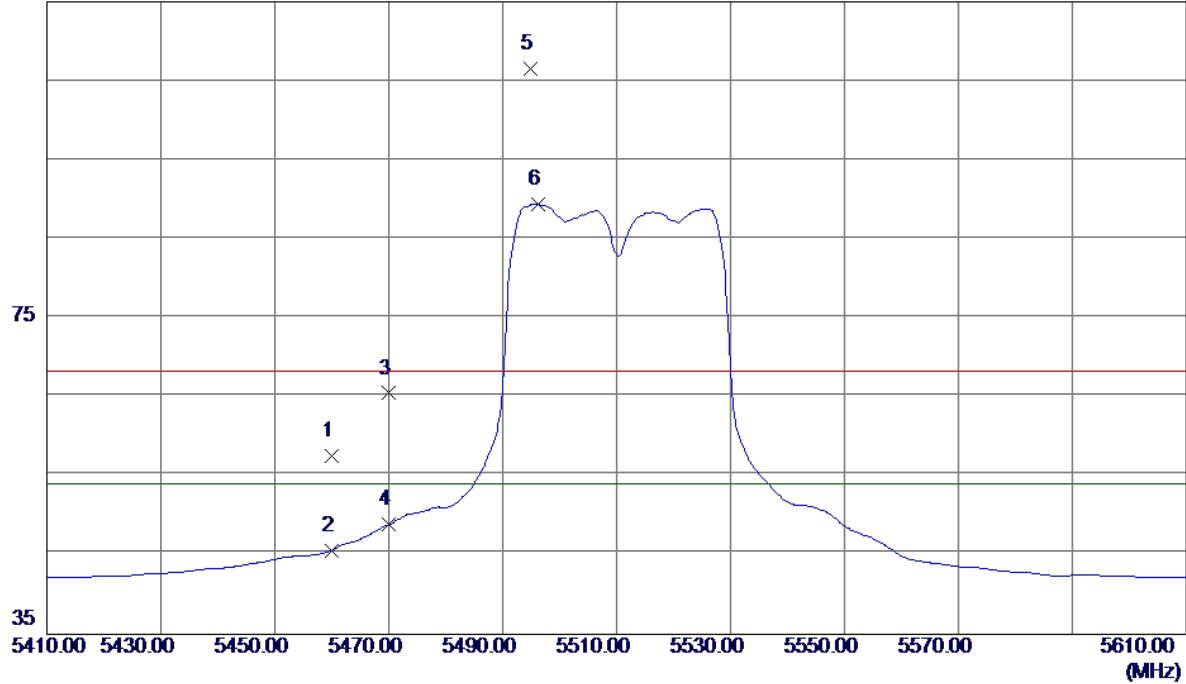

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 15.85 | 41.65 | 57.50 | 68.30 | -10.80 | Peak | |
| 2 | 5460.0000 | 3.96 | 41.65 | 45.61 | 54.00 | -8.39 | AVG | |
| 3 | 5470.0000 | 23.80 | 41.68 | 65.48 | 68.30 | -2.82 | Peak | |
| 4 | 5470.0000 | 7.17 | 41.68 | 48.85 | 54.00 | -5.15 | AVG | |
| 5 * | 5494.8000 | 64.80 | 41.76 | 106.56 | 68.30 | 38.26 | Peak | No Limit |
| 6 | 5496.2000 | 47.64 | 41.77 | 89.41 | 54.00 | 35.41 | AVG | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5510MHz |

Vertical

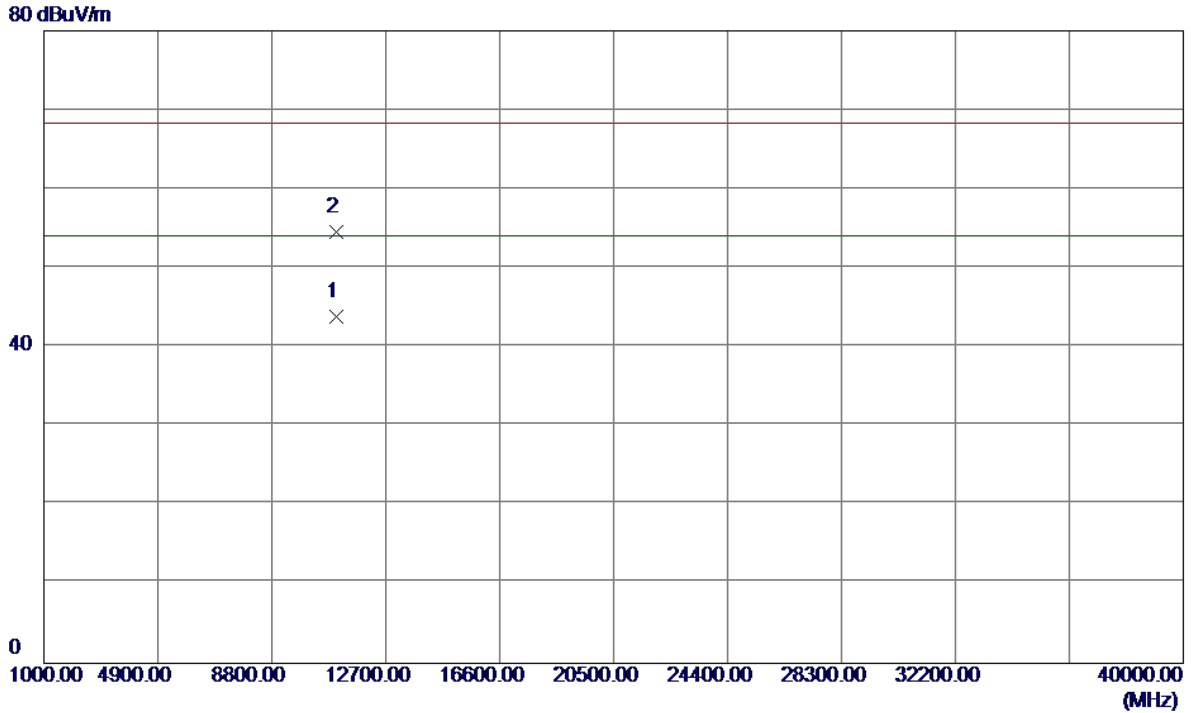


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11020.3400 | 27.92 | 15.91 | 43.83 | 54.00 | -10.17 | AVG | |
| 2 | 11020.2400 | 38.59 | 15.91 | 54.50 | 68.30 | -13.80 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5510MHz |

Horizontal


115 dBuV/m

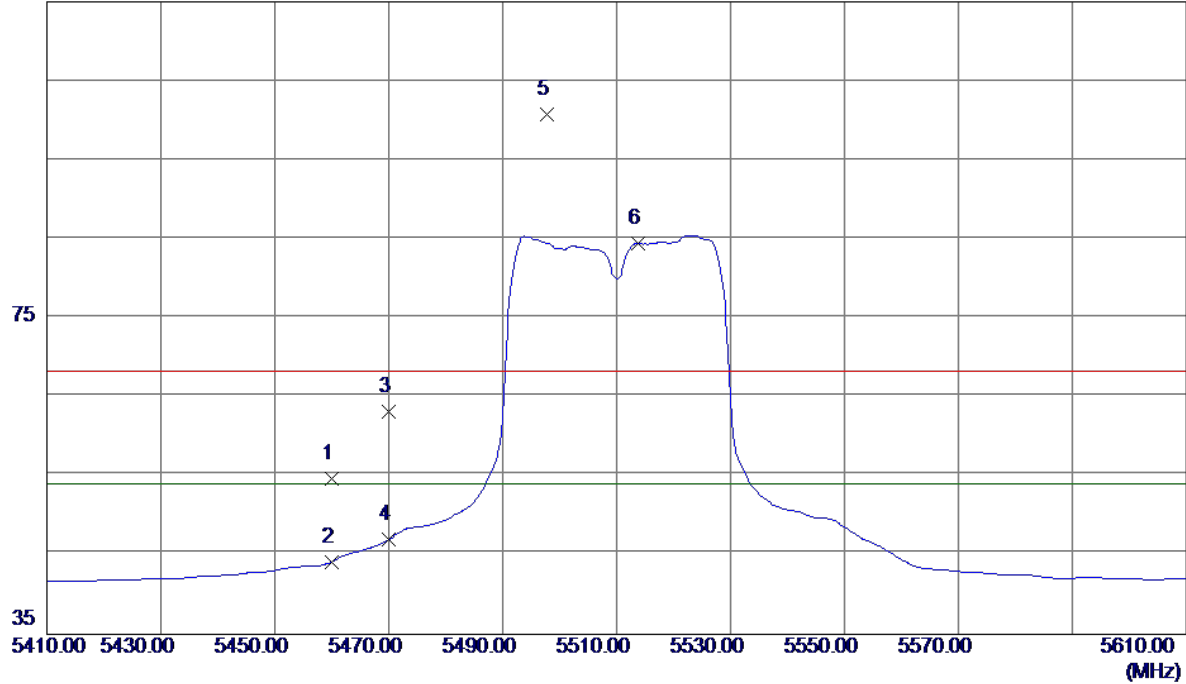

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 13.07 | 41.65 | 54.72 | 68.30 | -13.58 | Peak | |
| 2 | 5460.0000 | 2.50 | 41.65 | 44.15 | 54.00 | -9.85 | AVG | |
| 3 | 5470.0000 | 21.45 | 41.68 | 63.13 | 68.30 | -5.17 | Peak | |
| 4 | 5470.0000 | 5.26 | 41.68 | 46.94 | 54.00 | -7.06 | AVG | |
| 5 * | 5497.8000 | 58.98 | 41.77 | 100.75 | 68.30 | 32.45 | Peak | No Limit |
| 6 | 5513.8000 | 42.65 | 41.83 | 84.48 | 54.00 | 30.48 | AVG | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5510MHz |

Horizontal

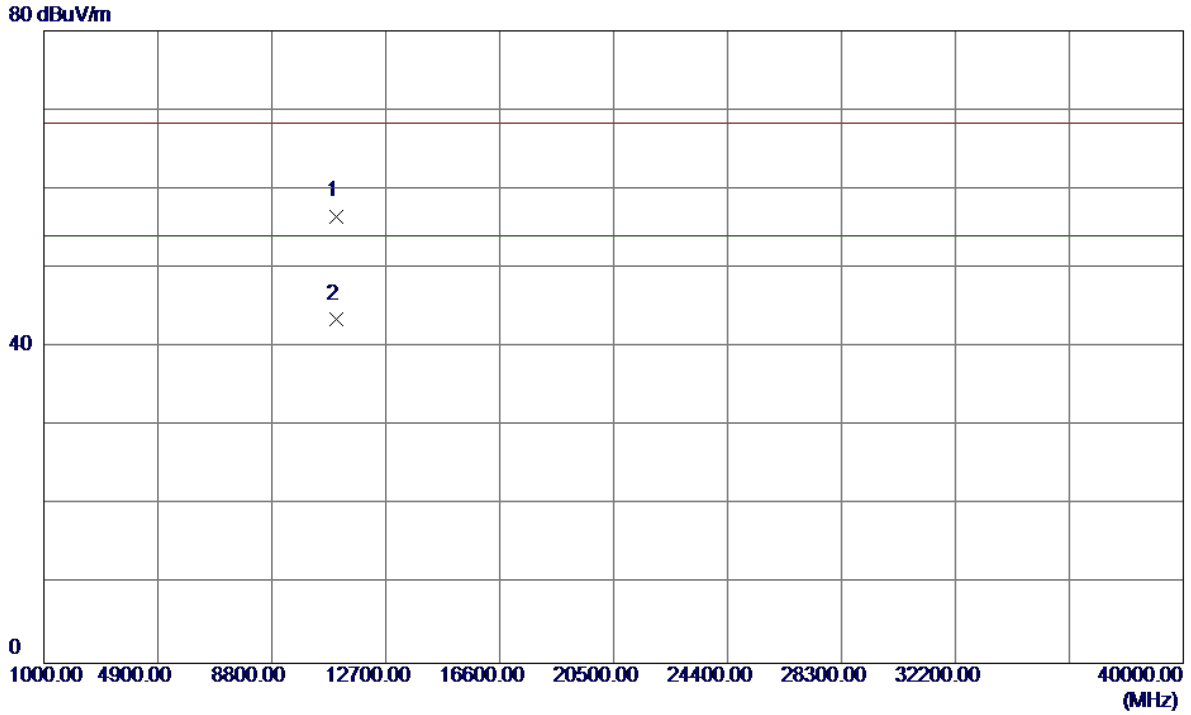


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11020.6100 | 40.65 | 15.91 | 56.56 | 68.30 | -11.74 | Peak | |
| 2 * | 11021.2200 | 27.66 | 15.91 | 43.57 | 54.00 | -10.43 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5550MHz |

Vertical


115 dBuV/m

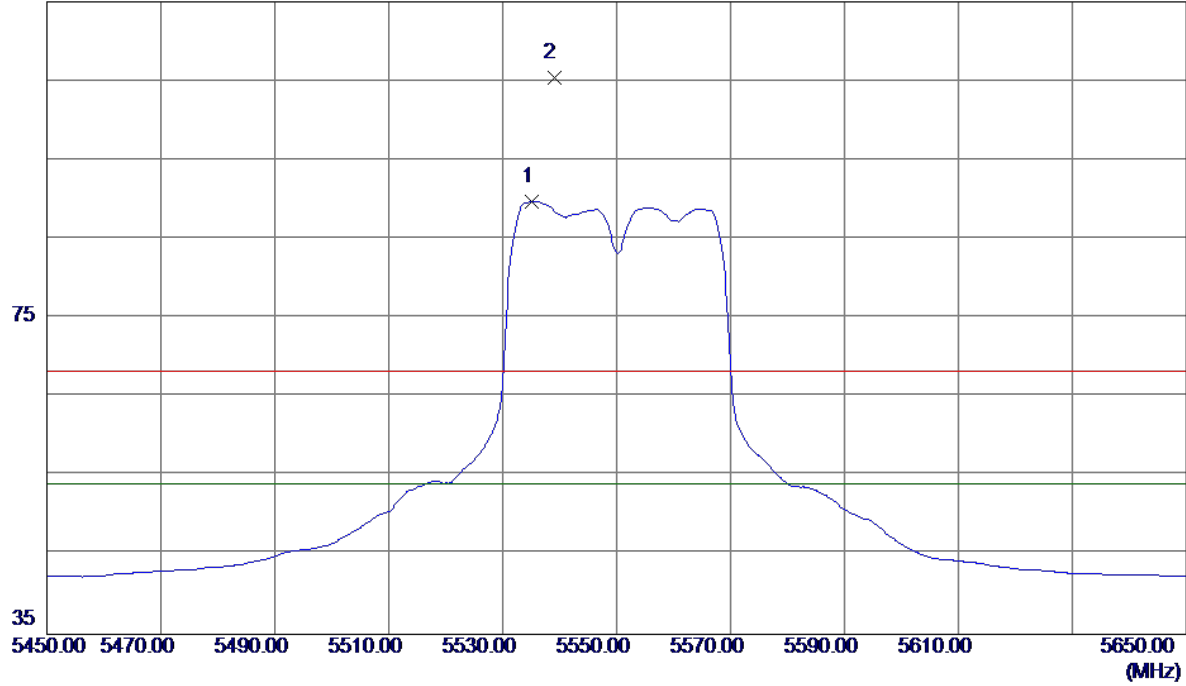

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5535.2000 | 47.86 | 41.91 | 89.77 | 54.00 | 35.77 | AVG | No Limit |
| 2 * | 5539.0000 | 63.49 | 41.92 | 105.41 | 68.30 | 37.11 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5550MHz |

Vertical

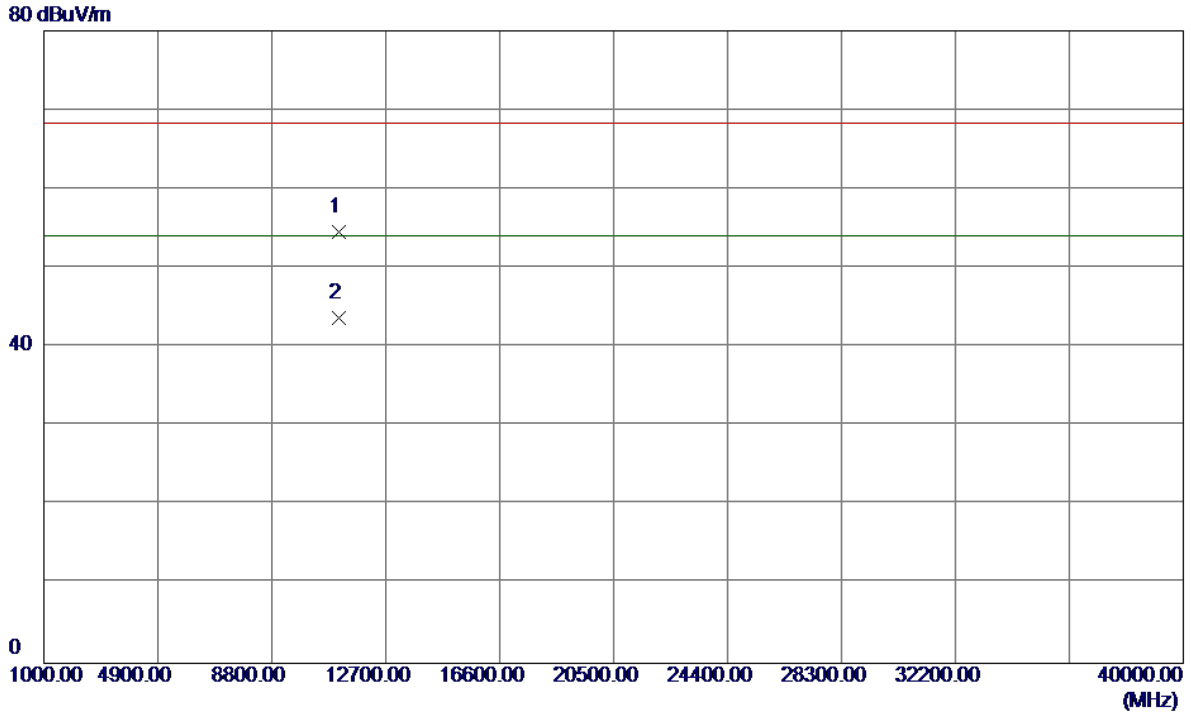


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11100.0000 | 38.68 | 15.84 | 54.52 | 68.30 | -13.78 | Peak | |
| 2 * | 11100.4500 | 27.89 | 15.84 | 43.73 | 54.00 | -10.27 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5550MHz |

Horizontal


115 dBuV/m

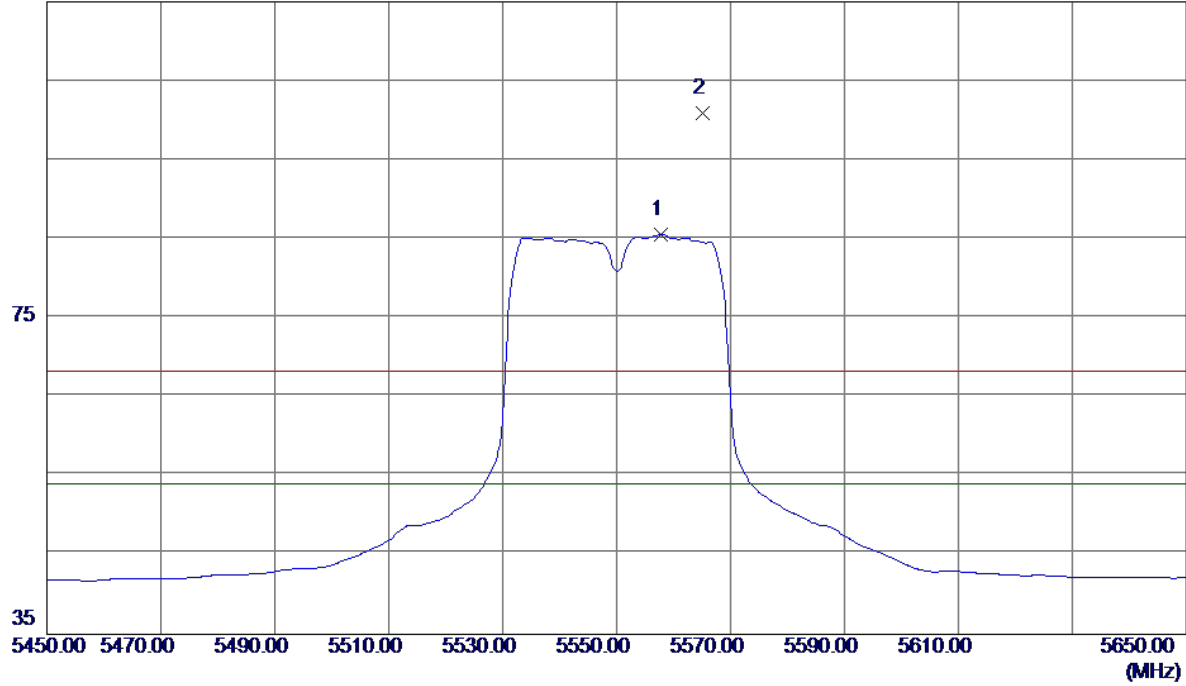

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5557.8000 | 43.57 | 41.99 | 85.56 | 54.00 | 31.56 | AVG | No Limit |
| 2 * | 5565.2000 | 58.86 | 42.01 | 100.87 | 68.30 | 32.57 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5550MHz |

Horizontal

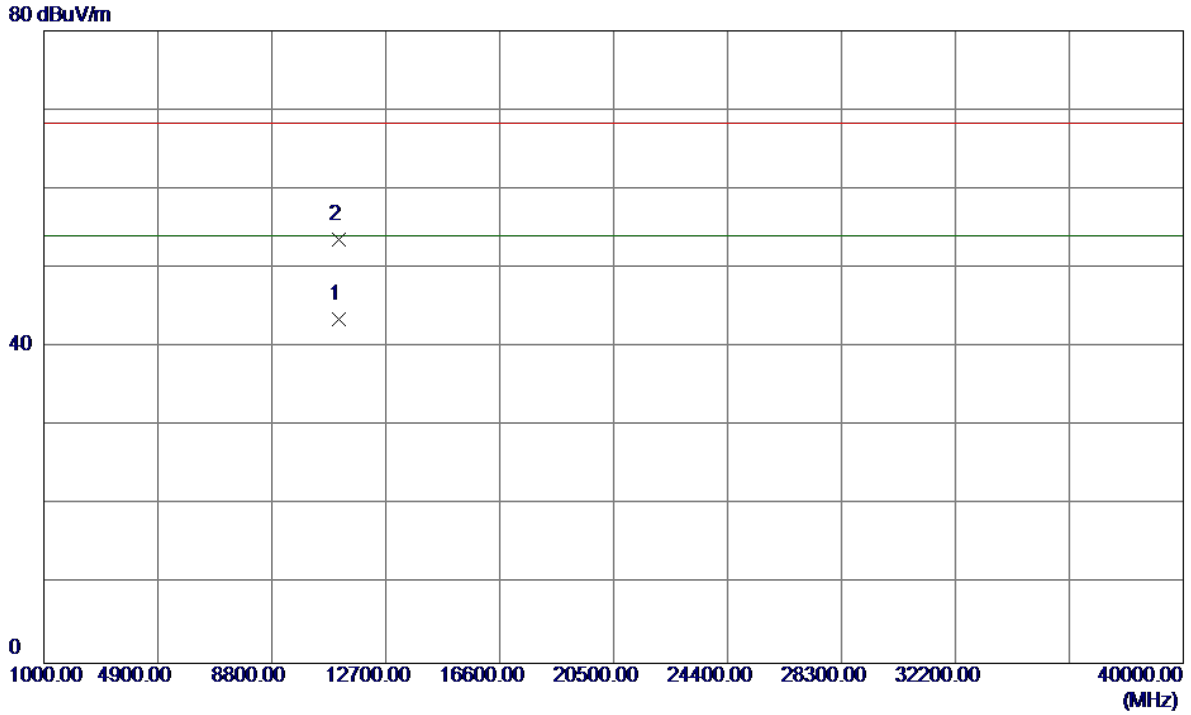


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.9100 | 27.66 | 15.84 | 43.50 | 54.00 | -10.50 | AVG | |
| 2 | 11100.1400 | 37.75 | 15.84 | 53.59 | 68.30 | -14.71 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5670MHz |

Vertical

115 dBuV/m

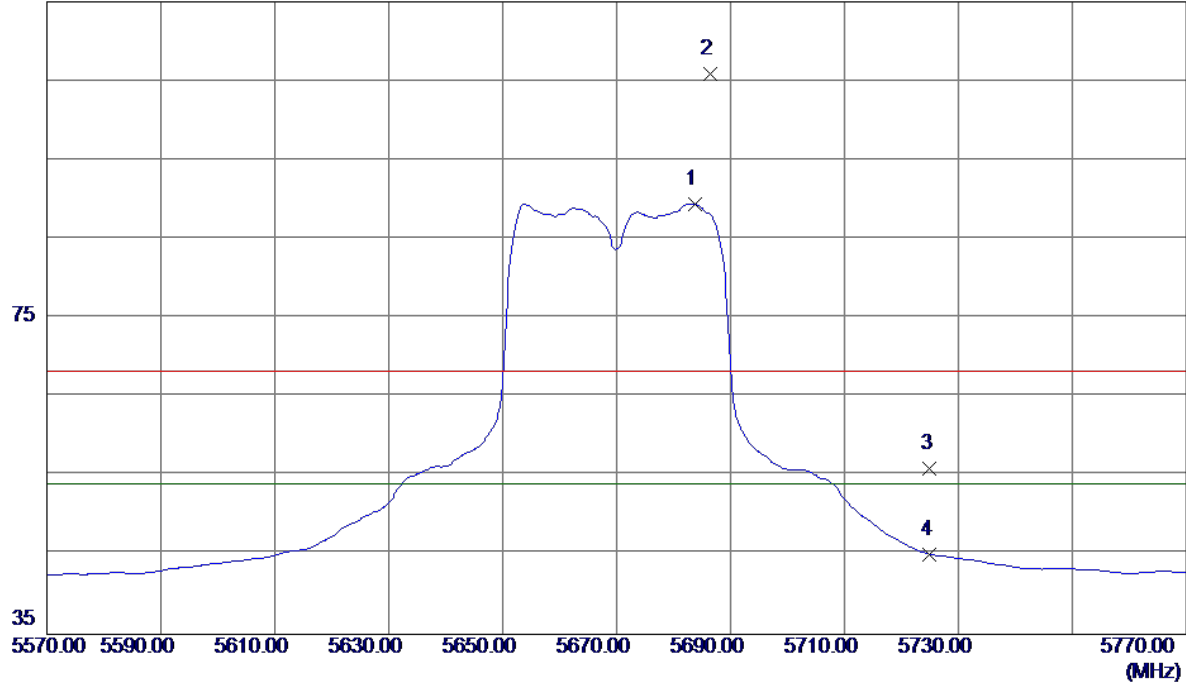


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5683.8000 | 47.00 | 42.43 | 89.43 | 54.00 | 35.43 | AVG | No Limit |
| 2 * | 5686.4000 | 63.41 | 42.44 | 105.85 | 68.30 | 37.55 | Peak | No Limit |
| 3 | 5725.0000 | 13.37 | 42.58 | 55.95 | 68.30 | -12.35 | Peak | |
| 4 | 5725.0000 | 2.53 | 42.58 | 45.11 | 54.00 | -8.89 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5670MHz |

Vertical

80 dBuV/m

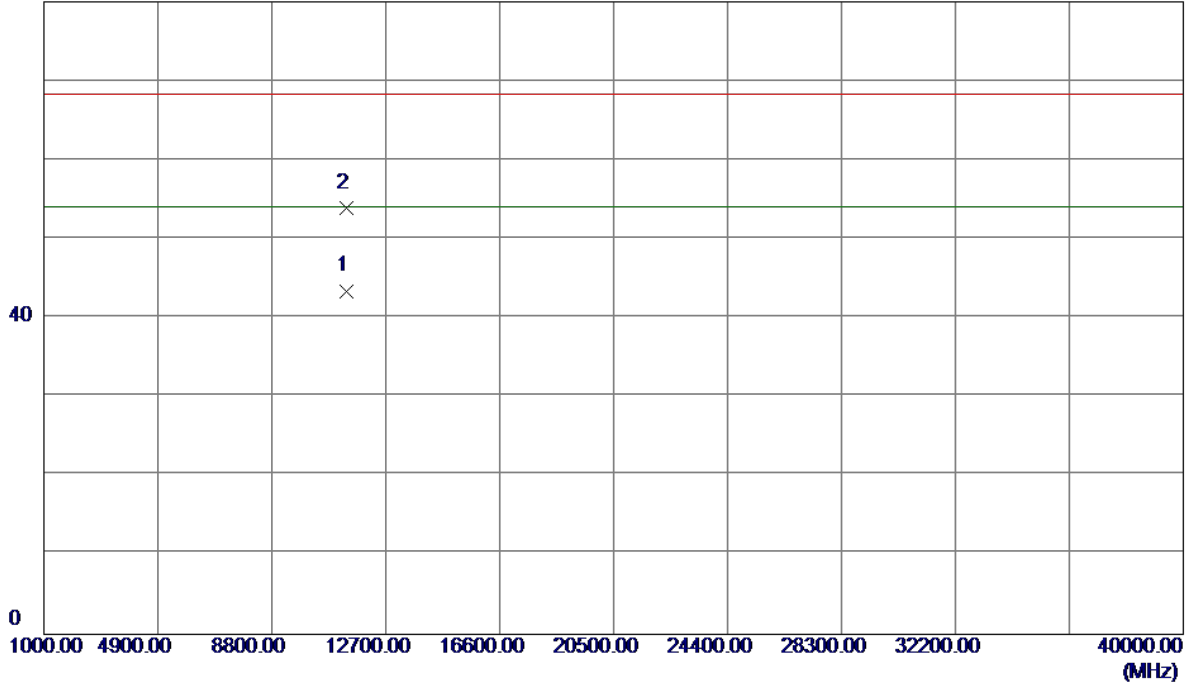


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11341.1000 | 27.82 | 15.62 | 43.44 | 54.00 | -10.56 | AVG | |
| 2 | 11341.0800 | 38.27 | 15.62 | 53.89 | 68.30 | -14.41 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5670MHz |

Horizontal

115 dBuV/m

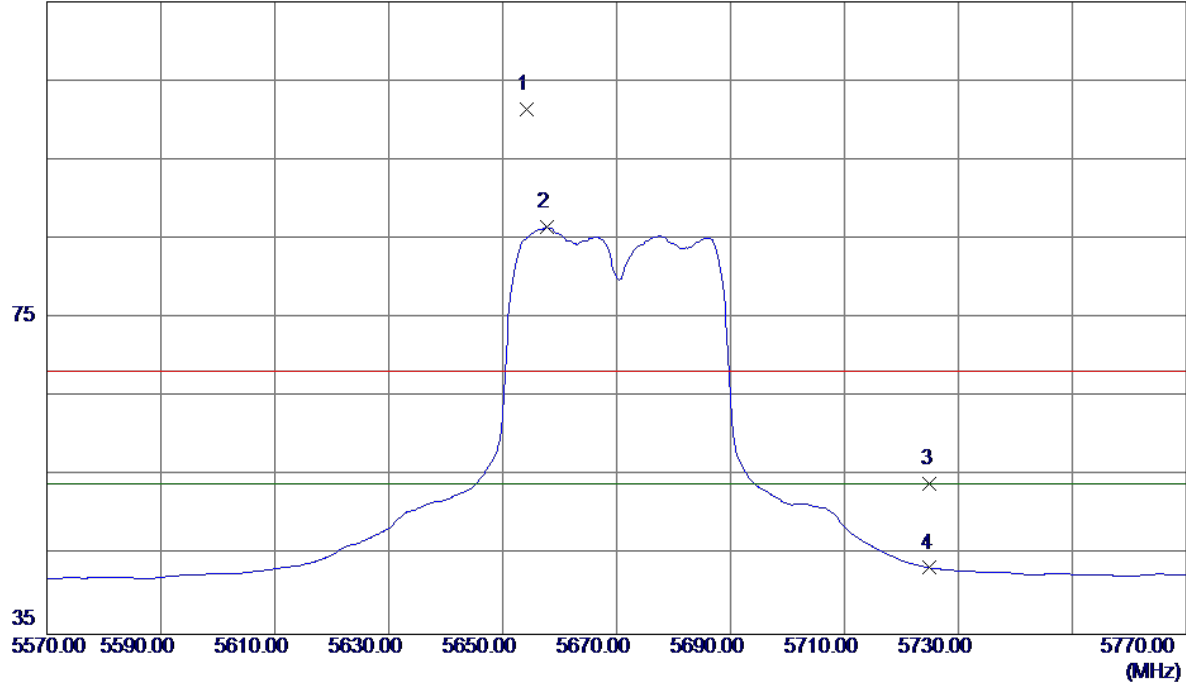


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5654.2000 | 59.11 | 42.33 | 101.44 | 68.30 | 33.14 | Peak | No Limit |
| 2 | 5657.8000 | 44.12 | 42.34 | 86.46 | 54.00 | 32.46 | AVG | No Limit |
| 3 | 5725.0000 | 11.47 | 42.58 | 54.05 | 68.30 | -14.25 | Peak | |
| 4 | 5725.0000 | 0.82 | 42.58 | 43.40 | 54.00 | -10.60 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC40 Mode 5670MHz |

Horizontal

80 dBuV/m

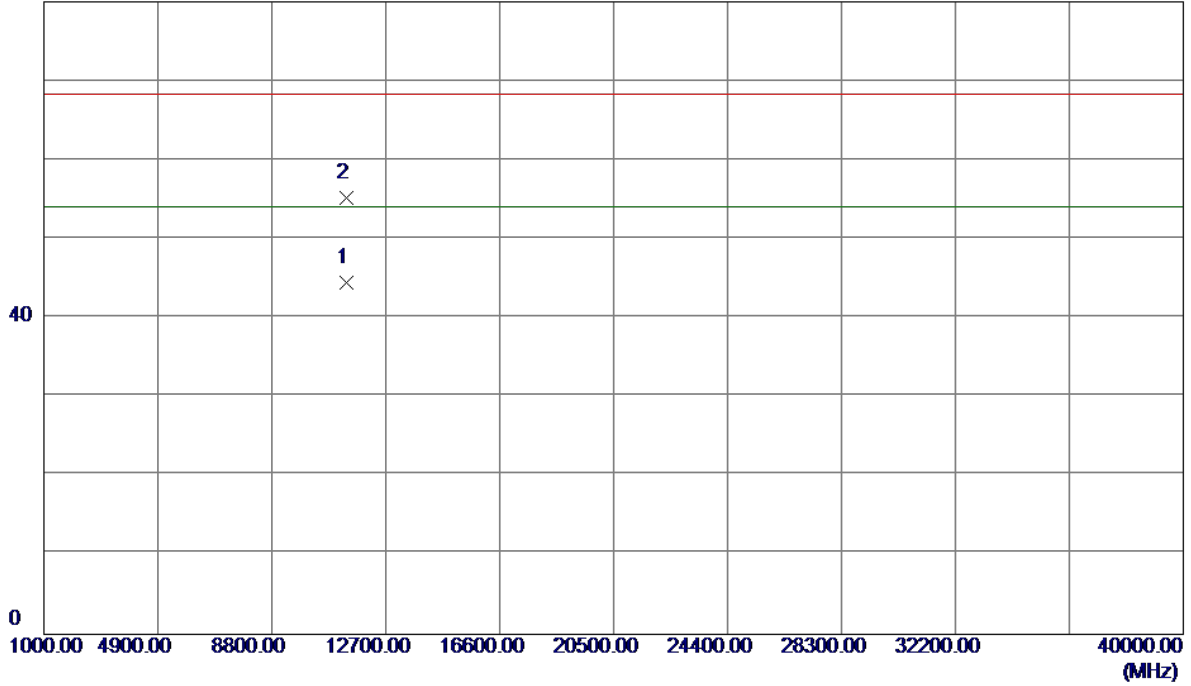


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11339.1700 | 28.84 | 15.62 | 44.46 | 54.00 | -9.54 | AVG | |
| 2 | 11340.1200 | 39.52 | 15.62 | 55.14 | 68.30 | -13.16 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5530MHz |

Vertical

115 dBuV/m

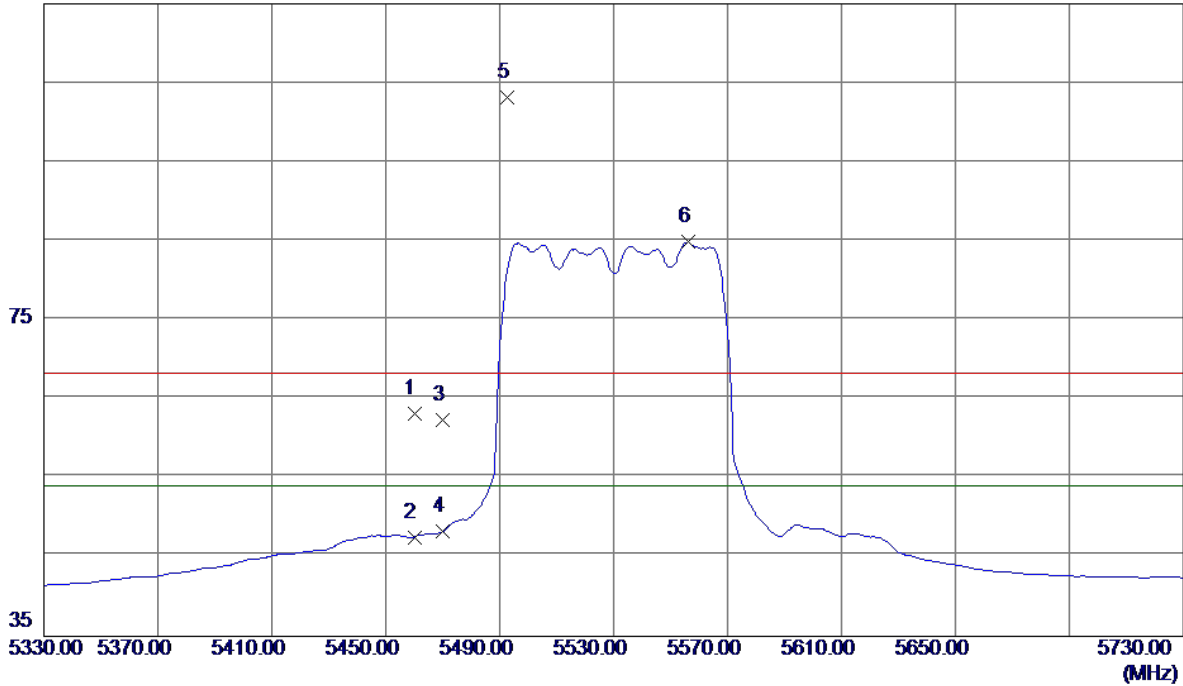


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 21.48 | 41.65 | 63.13 | 68.30 | -5.17 | Peak | |
| 2 | 5460.0000 | 5.88 | 41.65 | 47.53 | 54.00 | -6.47 | AVG | |
| 3 | 5470.0000 | 20.65 | 41.68 | 62.33 | 68.30 | -5.97 | Peak | |
| 4 | 5470.0000 | 6.55 | 41.68 | 48.23 | 54.00 | -5.77 | AVG | |
| 5 * | 5492.8000 | 61.41 | 41.76 | 103.17 | 68.30 | 34.87 | Peak | No Limit |
| 6 | 5556.4000 | 42.87 | 41.98 | 84.85 | 54.00 | 30.85 | AVG | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5530MHz |

Vertical

80 dBuV/m

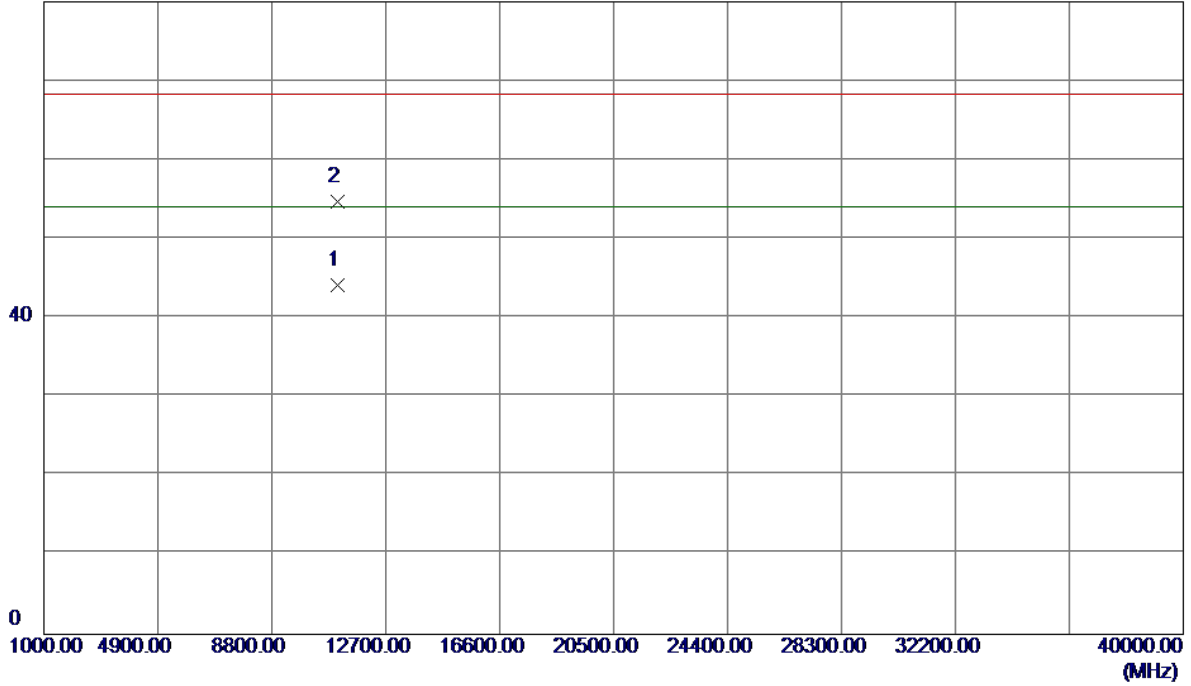


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.1400 | 28.31 | 15.88 | 44.19 | 54.00 | -9.81 | AVG | |
| 2 | 11060.2300 | 38.82 | 15.88 | 54.70 | 68.30 | -13.60 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5530MHz |

Horizontal


115 dBuV/m

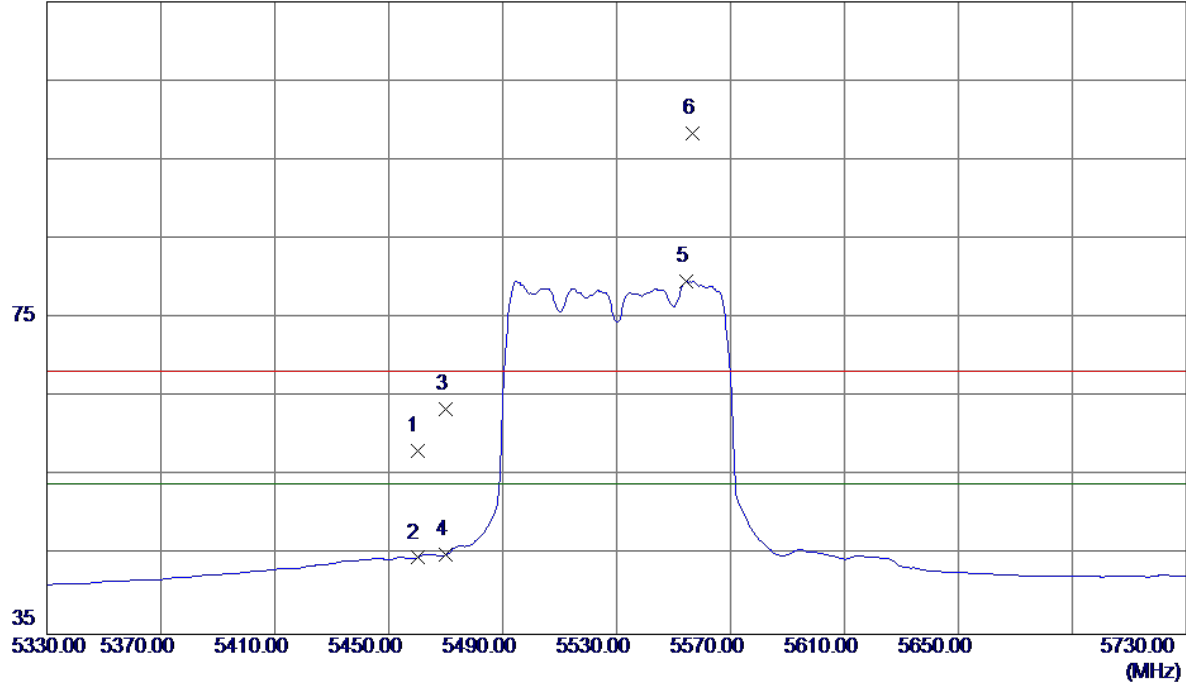

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 16.59 | 41.65 | 58.24 | 68.30 | -10.06 | Peak | |
| 2 | 5460.0000 | 3.03 | 41.65 | 44.68 | 54.00 | -9.32 | AVG | |
| 3 | 5470.0000 | 21.77 | 41.68 | 63.45 | 68.30 | -4.85 | Peak | |
| 4 | 5470.0000 | 3.38 | 41.68 | 45.06 | 54.00 | -8.94 | AVG | |
| 5 | 5554.4000 | 37.66 | 41.97 | 79.63 | 54.00 | 25.63 | AVG | No Limit |
| 6 * | 5556.8000 | 56.32 | 41.98 | 98.30 | 68.30 | 30.00 | Peak | No Limit |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5530MHz |

Horizontal

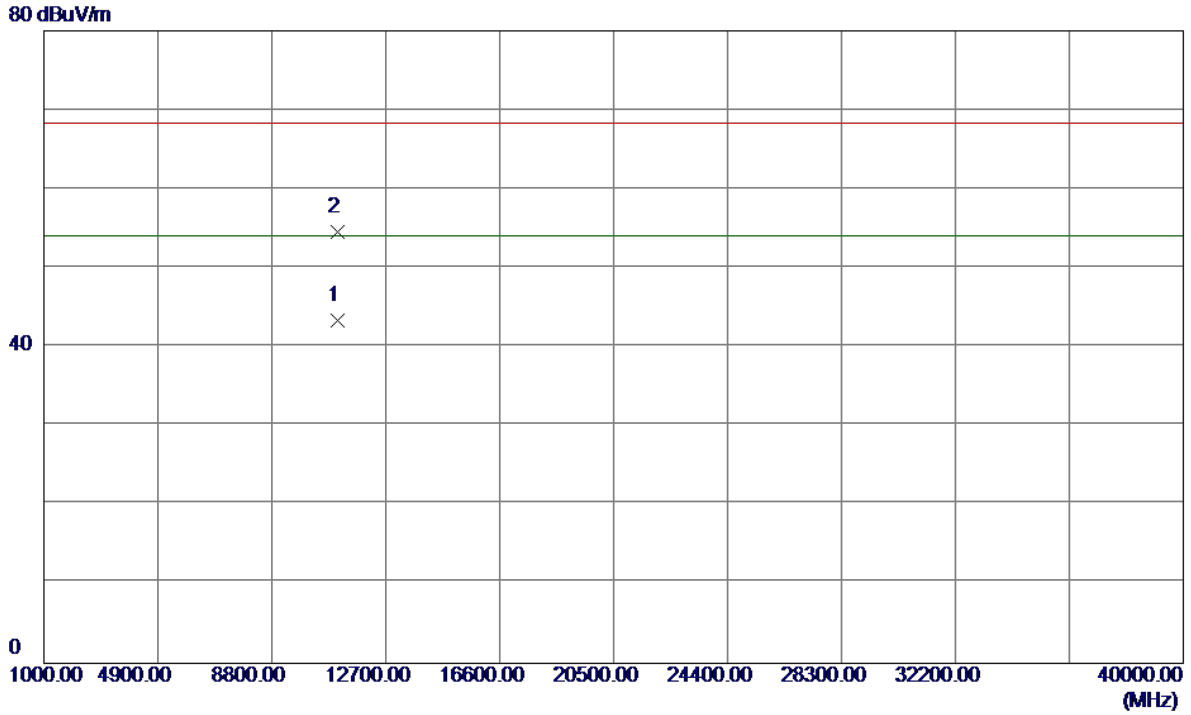


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11059.8800 | 27.55 | 15.88 | 43.43 | 54.00 | -10.57 | AVG | |
| 2 | 11060.2500 | 38.61 | 15.88 | 54.49 | 68.30 | -13.81 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5610MHz |

Vertical


115 dBuV/m

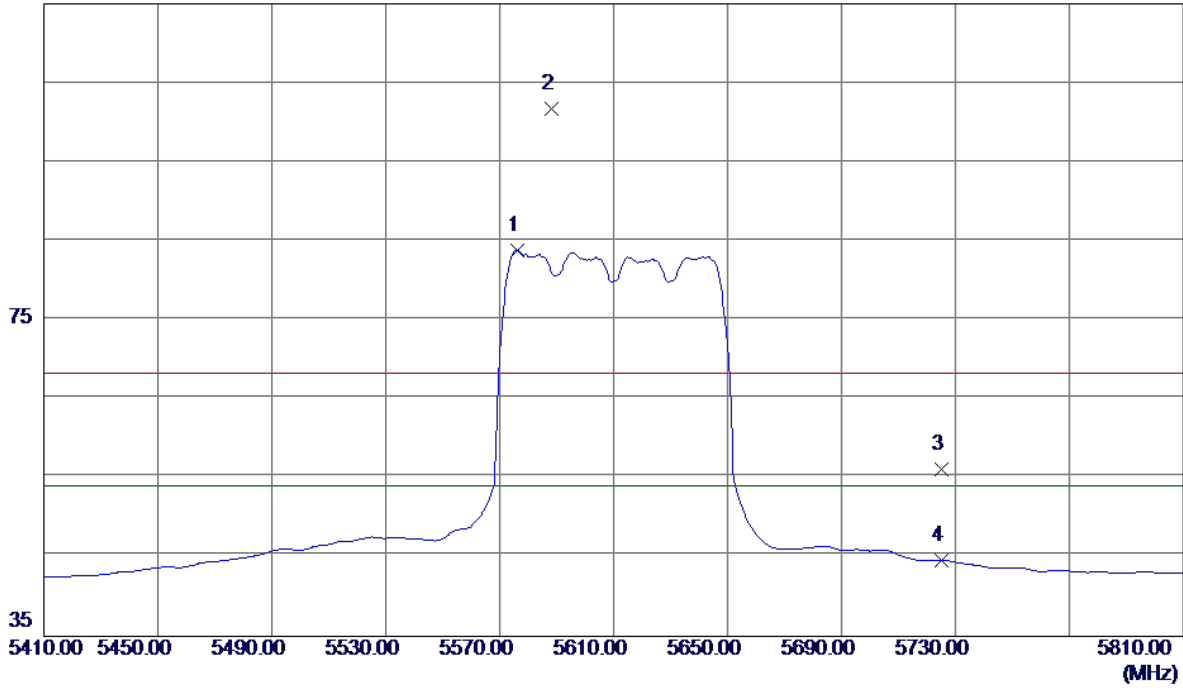

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5576.4000 | 41.78 | 42.05 | 83.83 | 54.00 | 29.83 | AVG | No Limit |
| 2 * | 5588.4000 | 59.57 | 42.09 | 101.66 | 68.30 | 33.36 | Peak | No Limit |
| 3 | 5725.0000 | 13.53 | 42.58 | 56.11 | 68.30 | -12.19 | Peak | |
| 4 | 5725.0000 | 2.03 | 42.58 | 44.61 | 54.00 | -9.39 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5610MHz |

Vertical

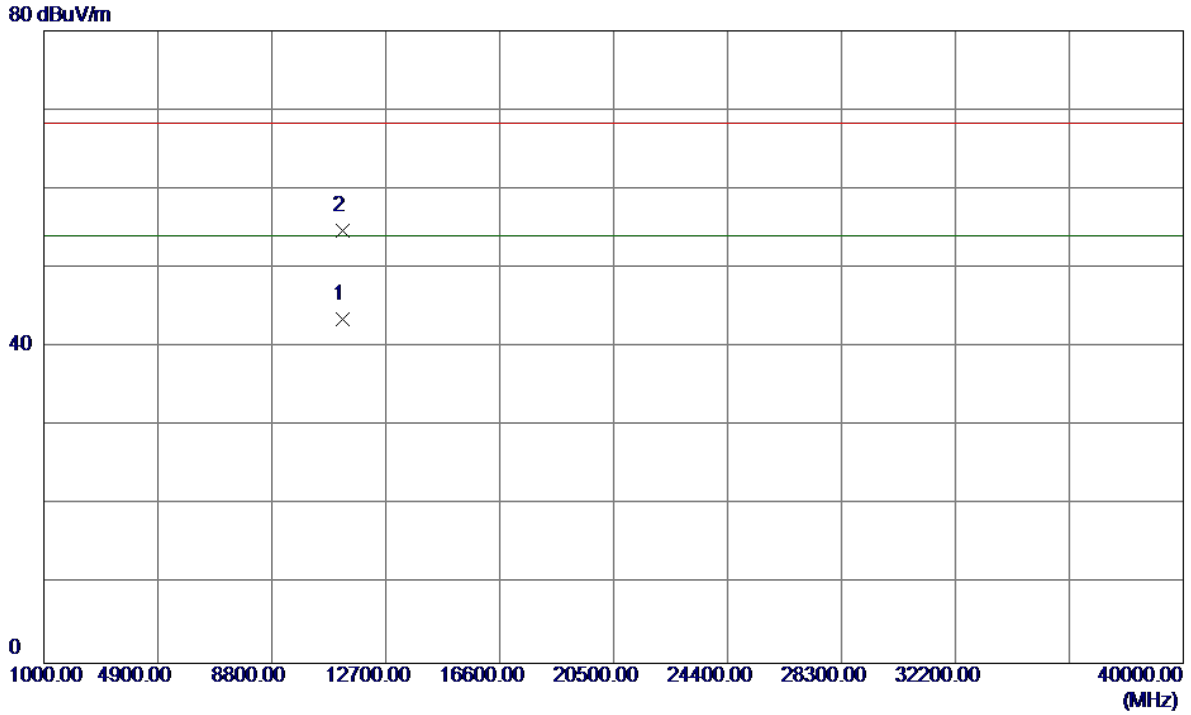


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11220.8700 | 27.77 | 15.73 | 43.50 | 54.00 | -10.50 | AVG | |
| 2 | 11220.5599 | 39.00 | 15.73 | 54.73 | 68.30 | -13.57 | Peak | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5610MHz |

Horizontal


115 dBuV/m

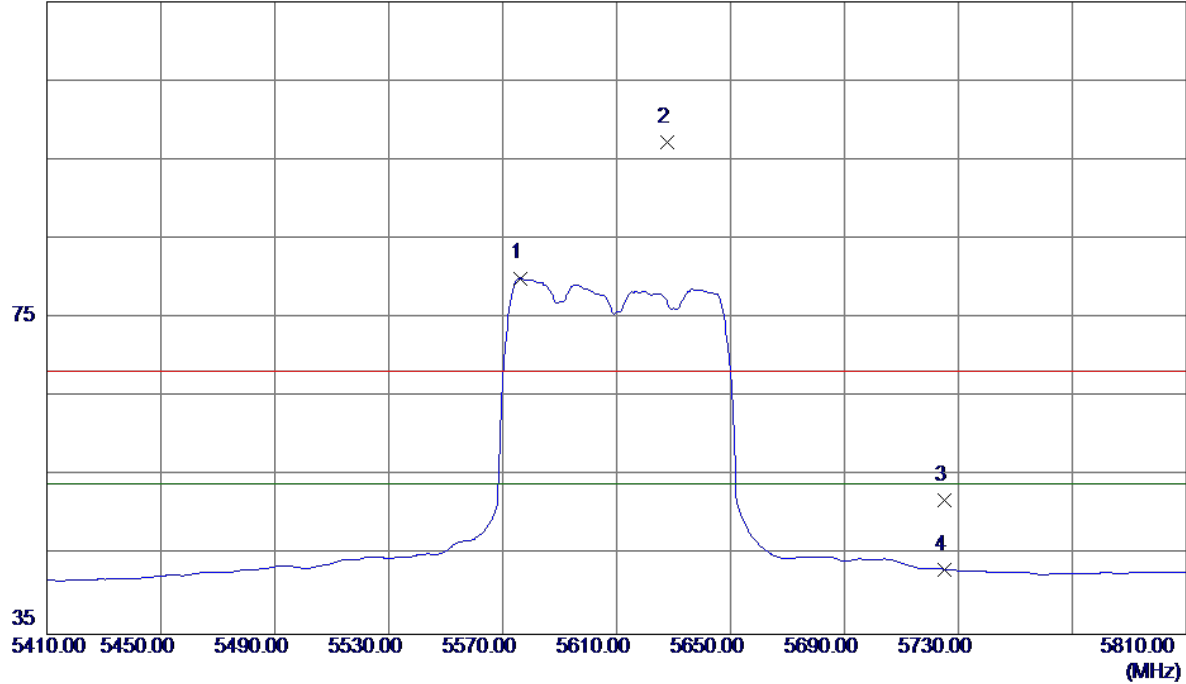

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5576.4000 | 37.99 | 42.05 | 80.04 | 54.00 | 26.04 | AVG | No Limit |
| 2 * | 5627.6000 | 55.08 | 42.23 | 97.31 | 68.30 | 29.01 | Peak | No Limit |
| 3 | 5725.0000 | 9.39 | 42.58 | 51.97 | 68.30 | -16.33 | Peak | |
| 4 | 5725.0000 | 0.64 | 42.58 | 43.22 | 54.00 | -10.78 | AVG | |

| | |
|-------------------|-------------------------------|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX AC80 Mode 5610MHz |


Horizontal

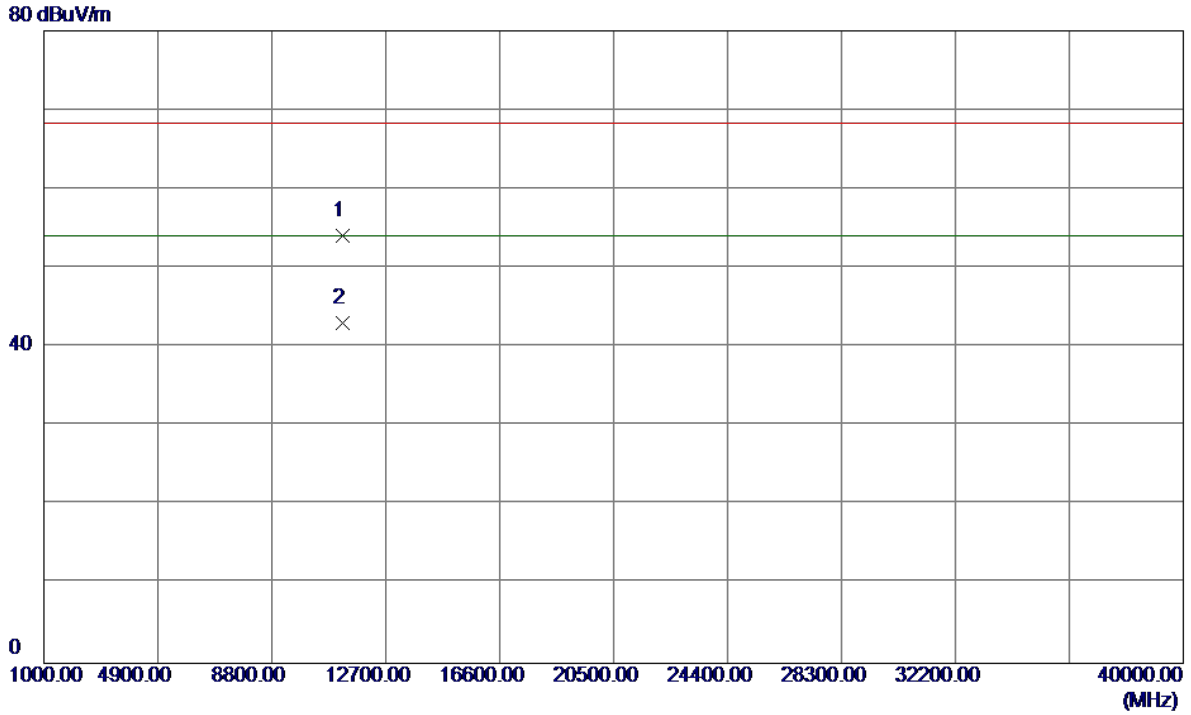

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11220.3200 | 38.29 | 15.73 | 54.02 | 68.30 | -14.28 | Peak | |
| 2 * | 11220.1400 | 27.26 | 15.73 | 42.99 | 54.00 | -11.01 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Vertical

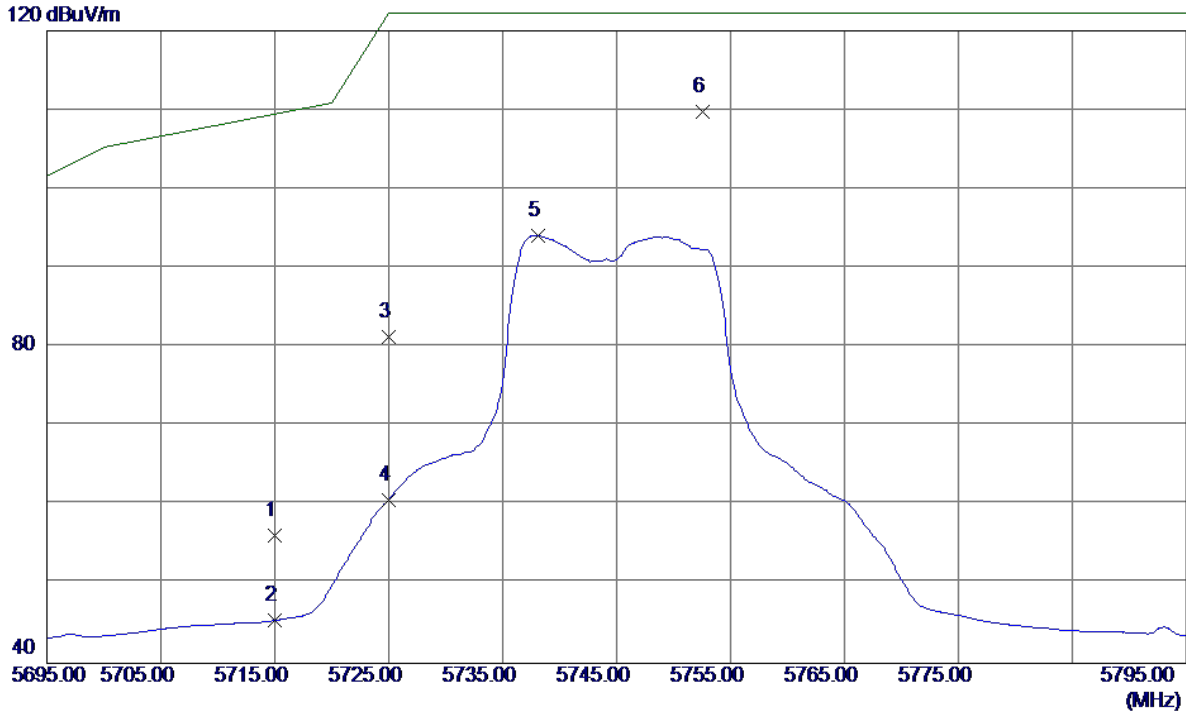


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 13.67 | 42.55 | 56.22 | 109.50 | -53.28 | Peak | |
| 2 | 5715.0000 | 2.88 | 42.55 | 45.43 | 109.50 | -64.07 | AVG | |
| 3 | 5725.0000 | 38.65 | 42.58 | 81.23 | 122.30 | -41.07 | Peak | |
| 4 | 5725.0000 | 18.12 | 42.58 | 60.70 | 122.30 | -61.60 | AVG | |
| 5 | 5738.1000 | 51.44 | 42.63 | 94.07 | 122.30 | -28.23 | AVG | |
| 6 * | 5752.6000 | 67.07 | 42.68 | 109.75 | 122.30 | -12.55 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |

Vertical


80 dBuV/m

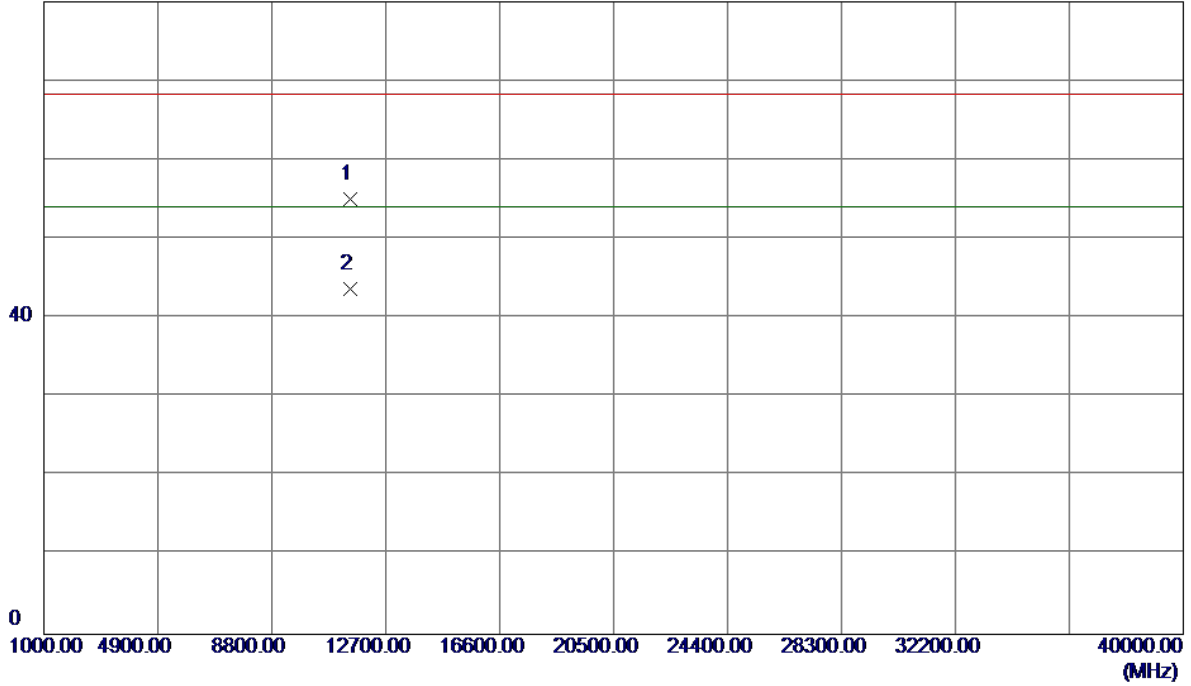

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11489.8900 | 39.56 | 15.49 | 55.05 | 68.30 | -13.25 | Peak | |
| 2 * | 11490.1700 | 28.24 | 15.49 | 43.73 | 54.00 | -10.27 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |


Horizontal

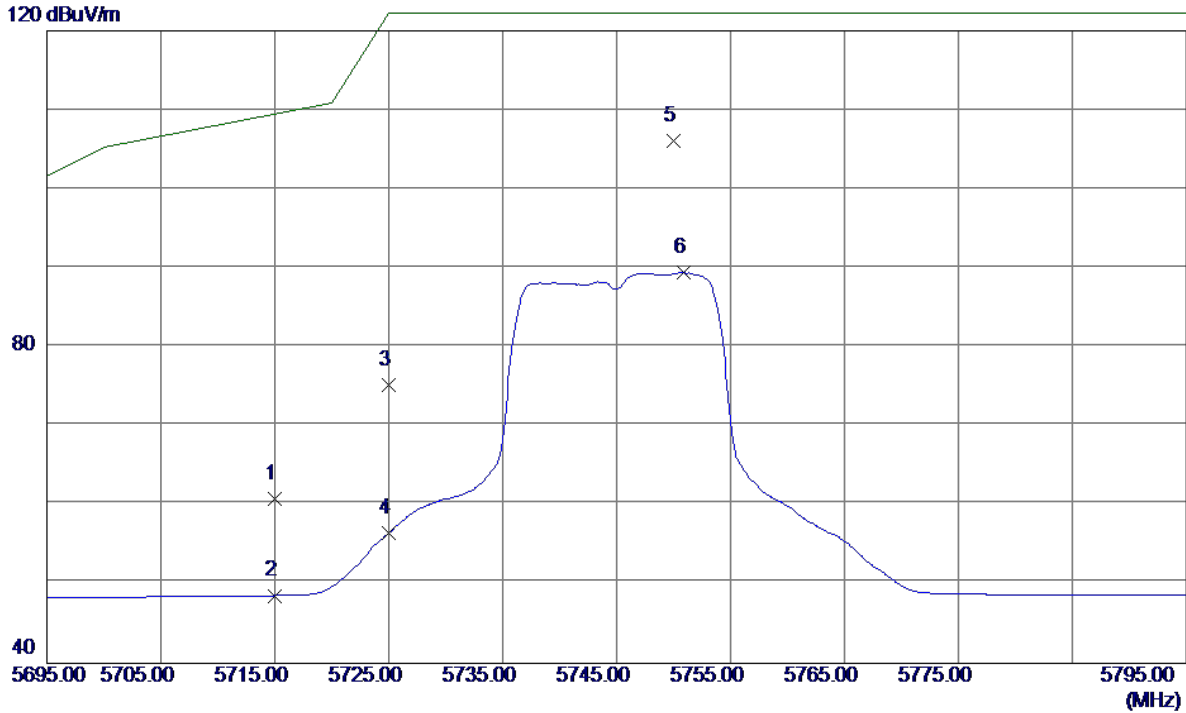

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 18.30 | 42.55 | 60.85 | 109.50 | -48.65 | Peak | |
| 2 | 5715.0000 | 6.01 | 42.55 | 48.56 | 109.50 | -60.94 | AVG | |
| 3 | 5725.0000 | 32.68 | 42.58 | 75.26 | 122.30 | -47.04 | Peak | |
| 4 | 5725.0000 | 13.89 | 42.58 | 56.47 | 122.30 | -65.83 | AVG | |
| 5 * | 5750.0000 | 63.39 | 42.67 | 106.06 | 122.30 | -16.24 | Peak | |
| 6 | 5750.9000 | 46.80 | 42.67 | 89.47 | 122.30 | -32.83 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5745MHz |


Horizontal

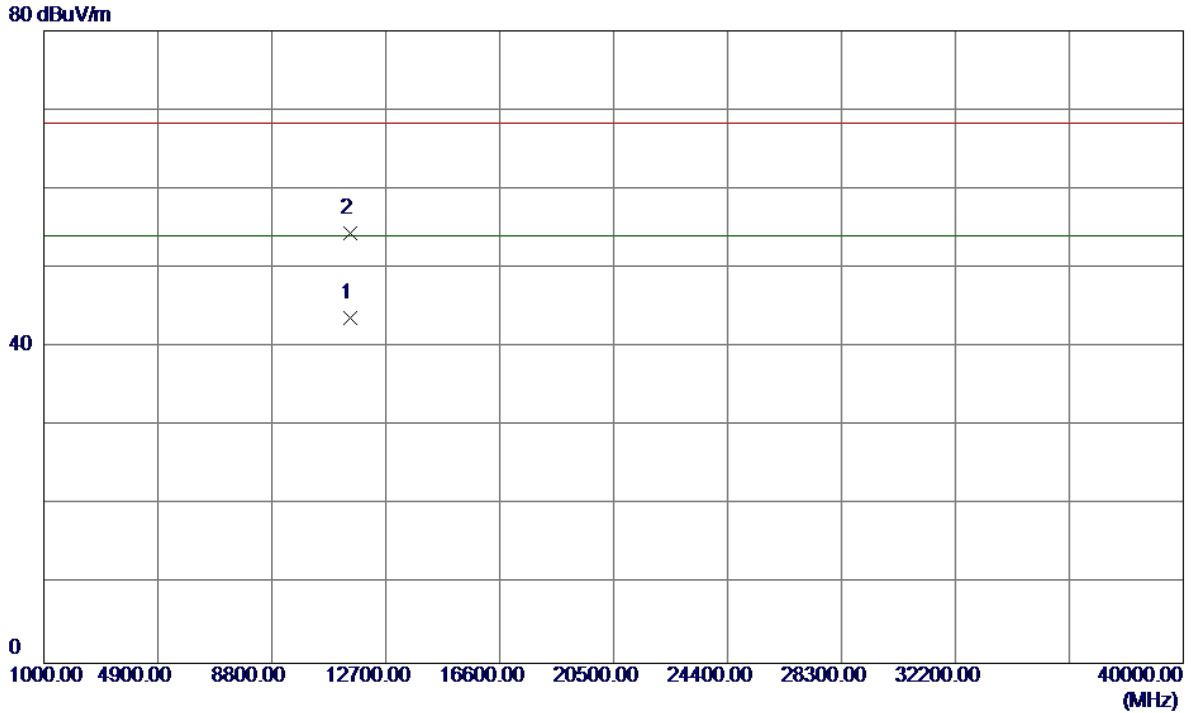

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.6000 | 28.21 | 15.49 | 43.70 | 54.00 | -10.30 | AVG | |
| 2 | 11490.0500 | 38.86 | 15.49 | 54.35 | 68.30 | -13.95 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Vertical

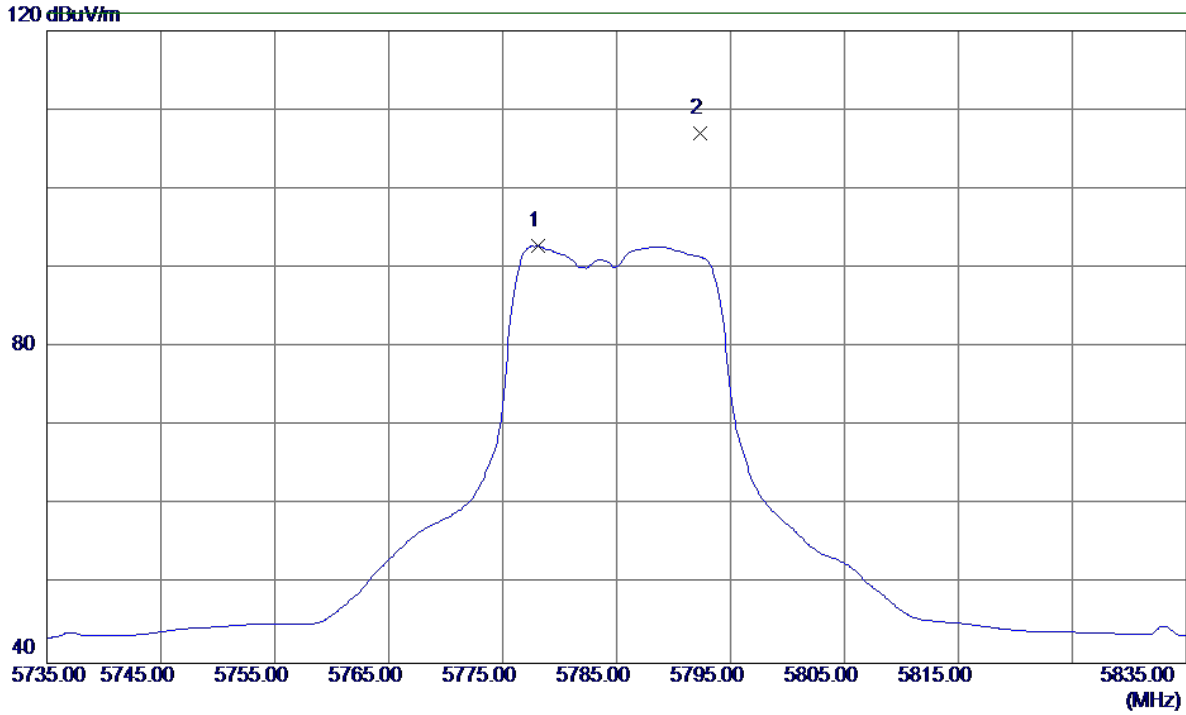


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5778.1000 | 49.98 | 42.77 | 92.75 | 122.30 | -29.55 | AVG | |
| 2 * | 5792.3000 | 64.18 | 42.82 | 107.00 | 122.30 | -15.30 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |

Vertical


80 dBuV/m

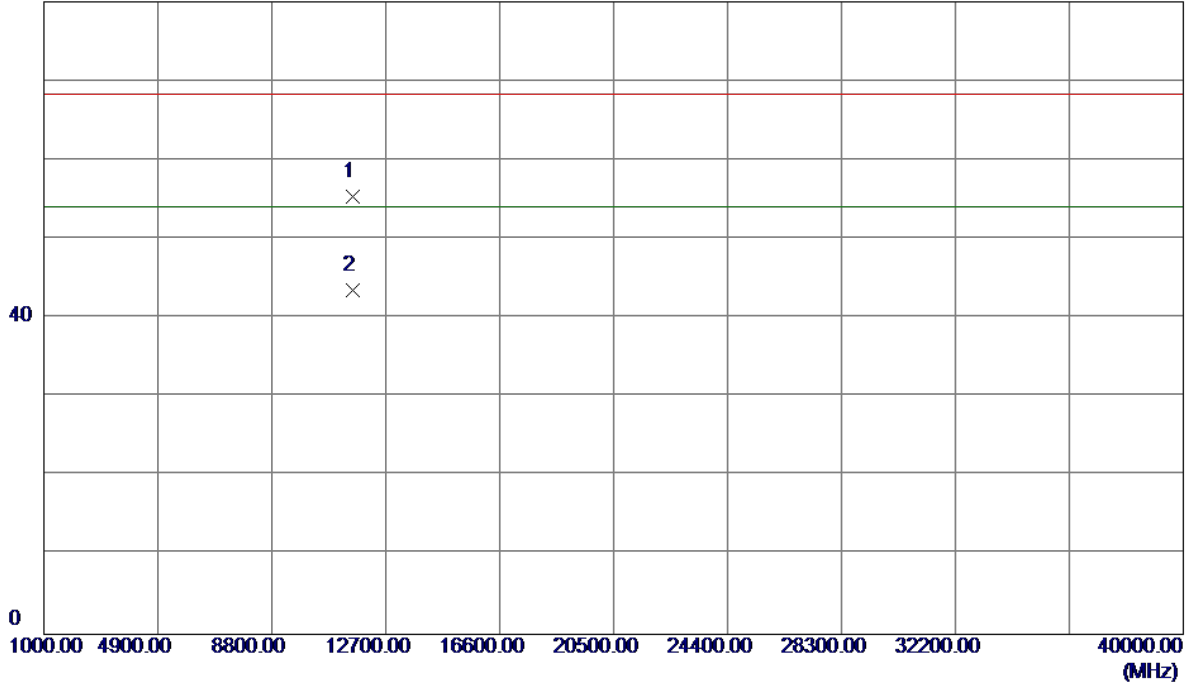

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11569.7300 | 39.89 | 15.48 | 55.37 | 68.30 | -12.93 | Peak | |
| 2 * | 11569.8099 | 28.06 | 15.48 | 43.54 | 54.00 | -10.46 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |


Horizontal

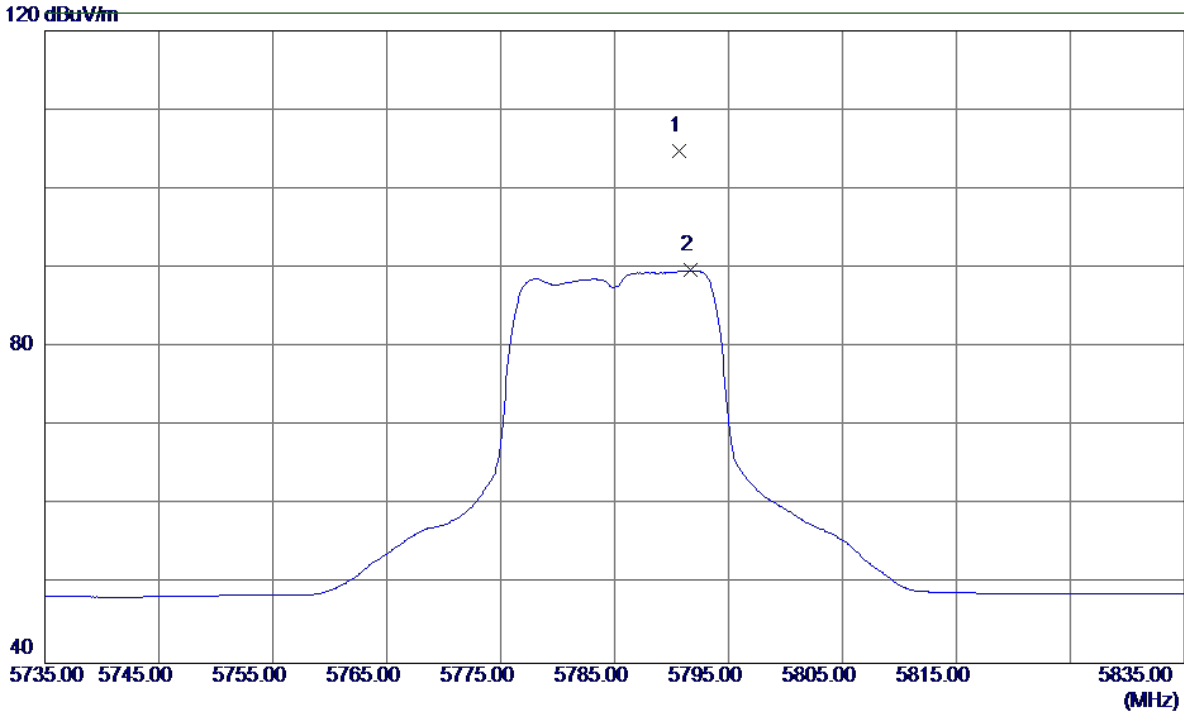

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5790.7000 | 62.02 | 42.81 | 104.83 | 122.30 | -17.47 | Peak | |
| 2 | 5791.7000 | 46.86 | 42.82 | 89.68 | 122.30 | -32.62 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5785MHz |


Horizontal

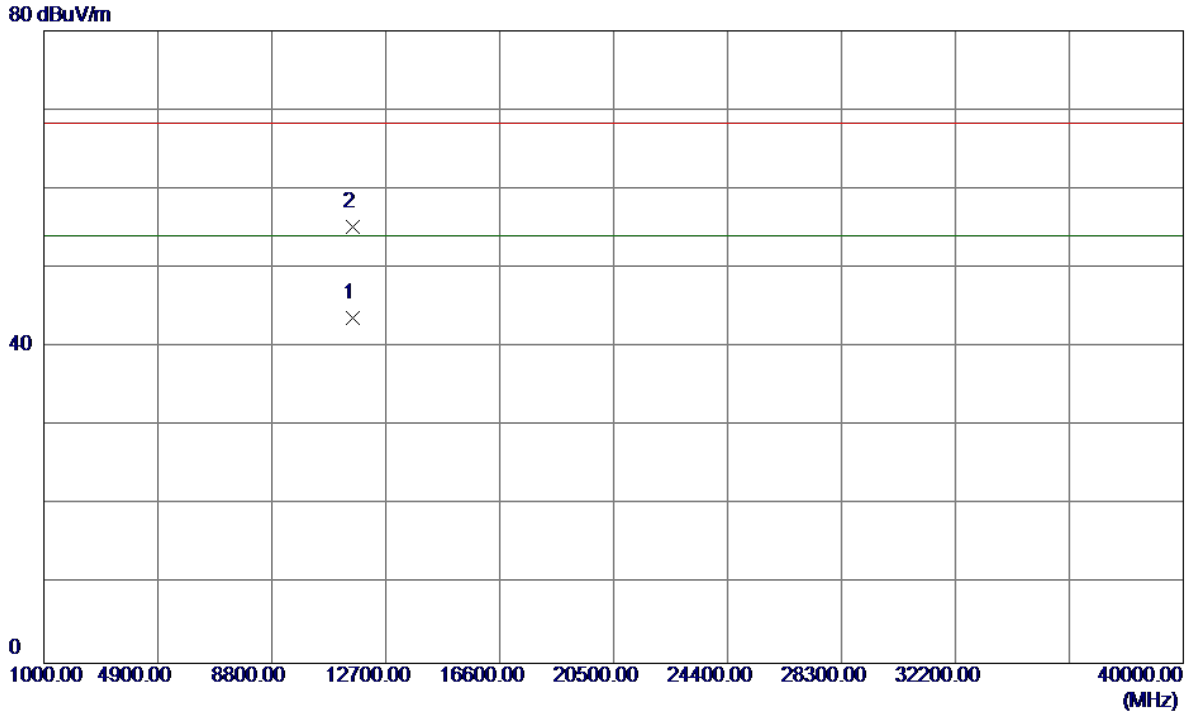

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11569.8500 | 28.13 | 15.48 | 43.61 | 54.00 | -10.39 | AVG | |
| 2 | 11570.3000 | 39.71 | 15.48 | 55.19 | 68.30 | -13.11 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


Vertical

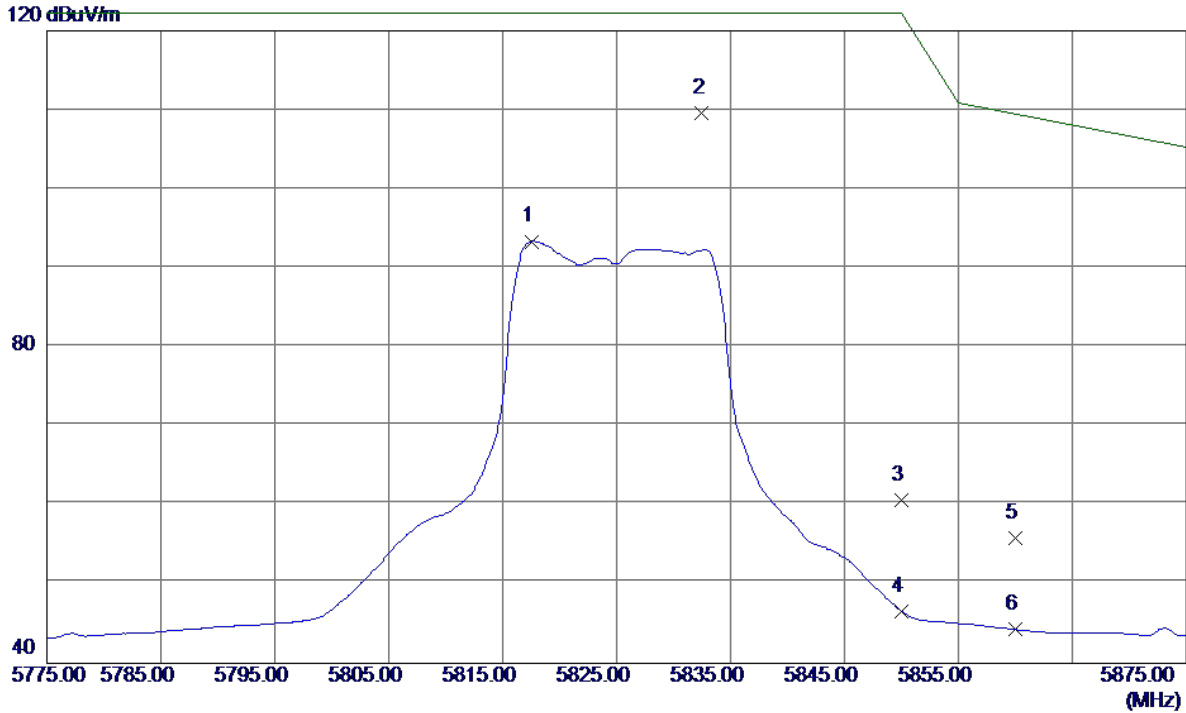

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5817.6000 | 50.45 | 42.91 | 93.36 | 122.30 | -28.94 | AVG | |
| 2 * | 5832.5000 | 66.63 | 42.96 | 109.59 | 122.30 | -12.71 | Peak | |
| 3 | 5850.0000 | 17.59 | 43.03 | 60.62 | 122.30 | -61.68 | Peak | |
| 4 | 5850.0000 | 3.56 | 43.03 | 46.59 | 122.30 | -75.71 | AVG | |
| 5 | 5860.0000 | 12.77 | 43.06 | 55.83 | 109.50 | -53.67 | Peak | |
| 6 | 5860.0000 | 1.21 | 43.06 | 44.27 | 109.50 | -65.23 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


Vertical

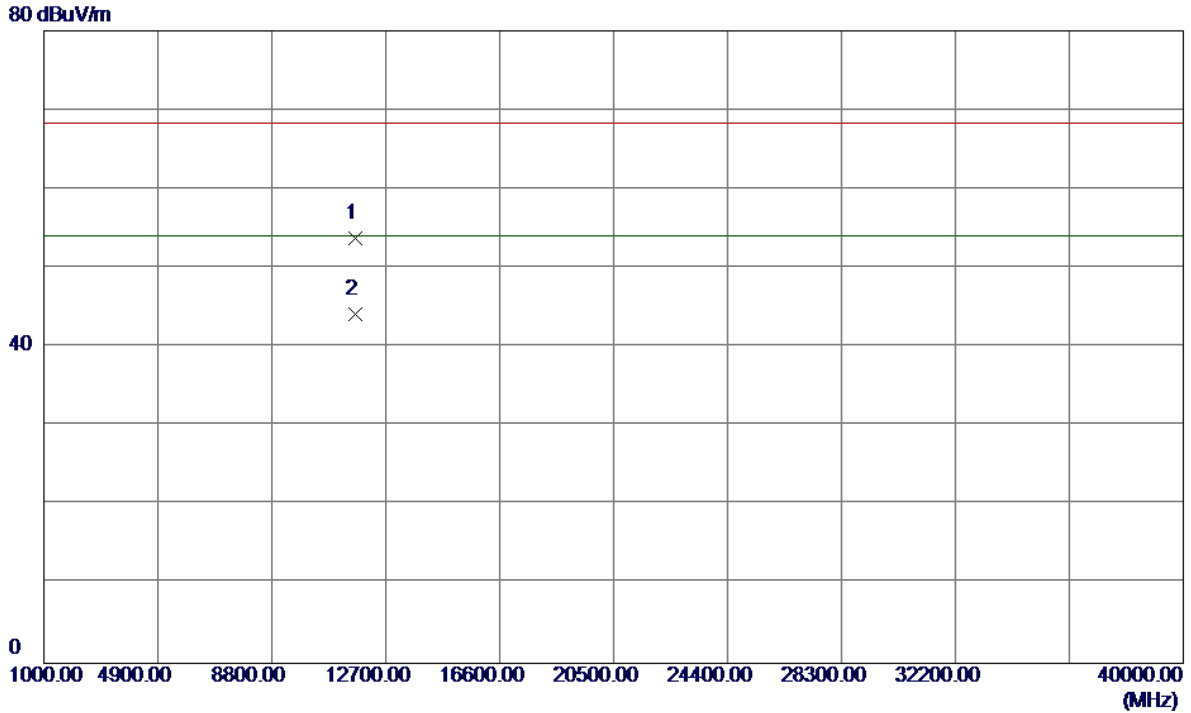

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11650.2500 | 38.32 | 15.48 | 53.80 | 68.30 | -14.50 | Peak | |
| 2 * | 11650.1300 | 28.61 | 15.48 | 44.09 | 54.00 | -9.91 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


Horizontal

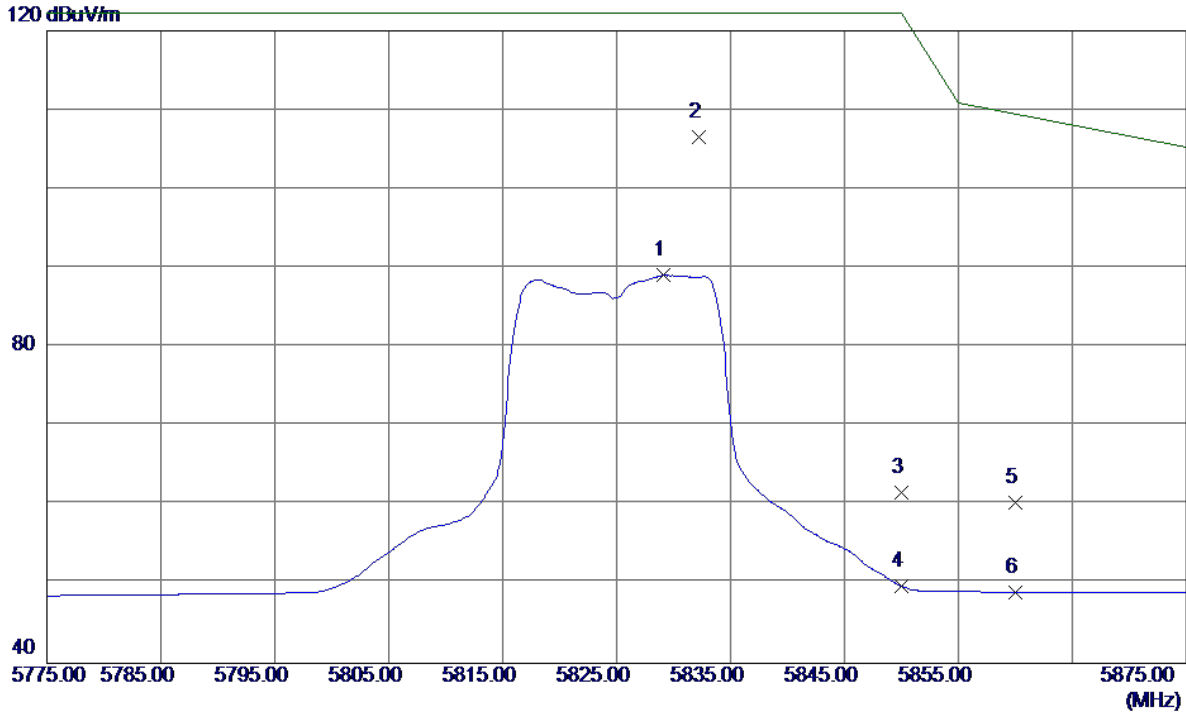

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5829.1000 | 46.12 | 42.95 | 89.07 | 122.30 | -33.23 | AVG | |
| 2 * | 5832.2000 | 63.67 | 42.96 | 106.63 | 122.30 | -15.67 | Peak | |
| 3 | 5850.0000 | 18.56 | 43.03 | 61.59 | 122.30 | -60.71 | Peak | |
| 4 | 5850.0000 | 6.74 | 43.03 | 49.77 | 122.30 | -72.53 | AVG | |
| 5 | 5860.0000 | 17.28 | 43.06 | 60.34 | 109.50 | -49.16 | Peak | |
| 6 | 5860.0000 | 5.92 | 43.06 | 48.98 | 109.50 | -60.52 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


Horizontal

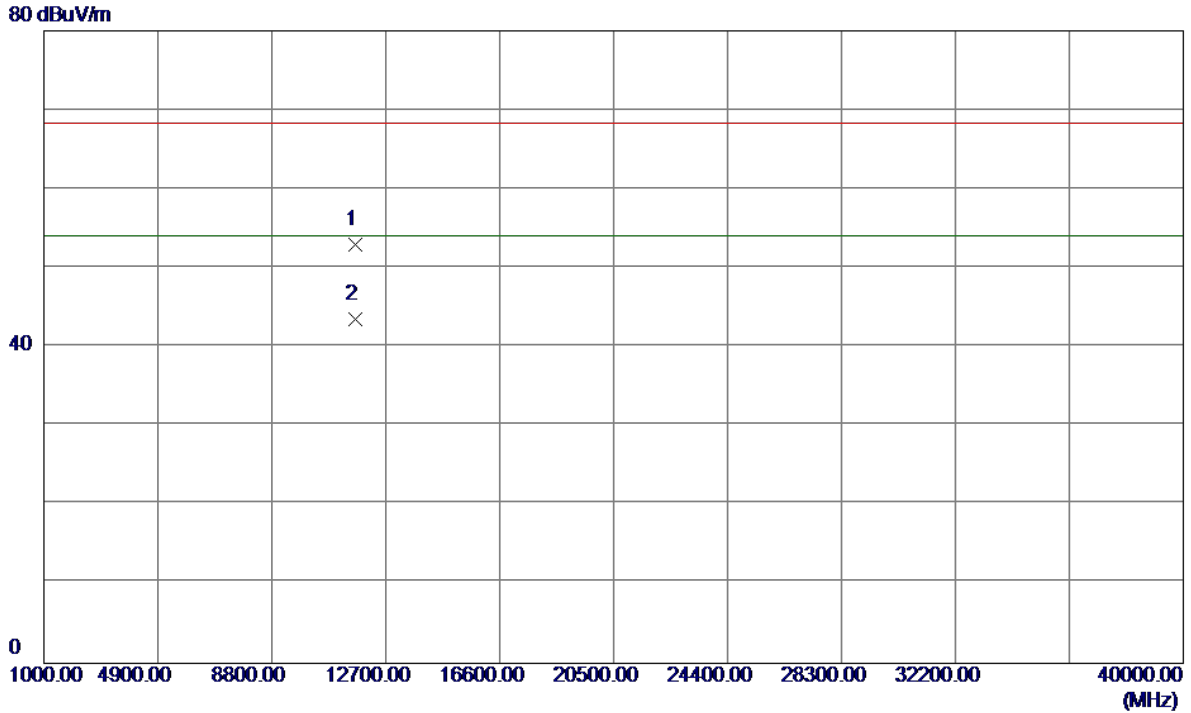

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11649.8800 | 37.52 | 15.48 | 53.00 | 68.30 | -15.30 | Peak | |
| 2 * | 11649.8800 | 28.04 | 15.48 | 43.52 | 54.00 | -10.48 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


Vertical

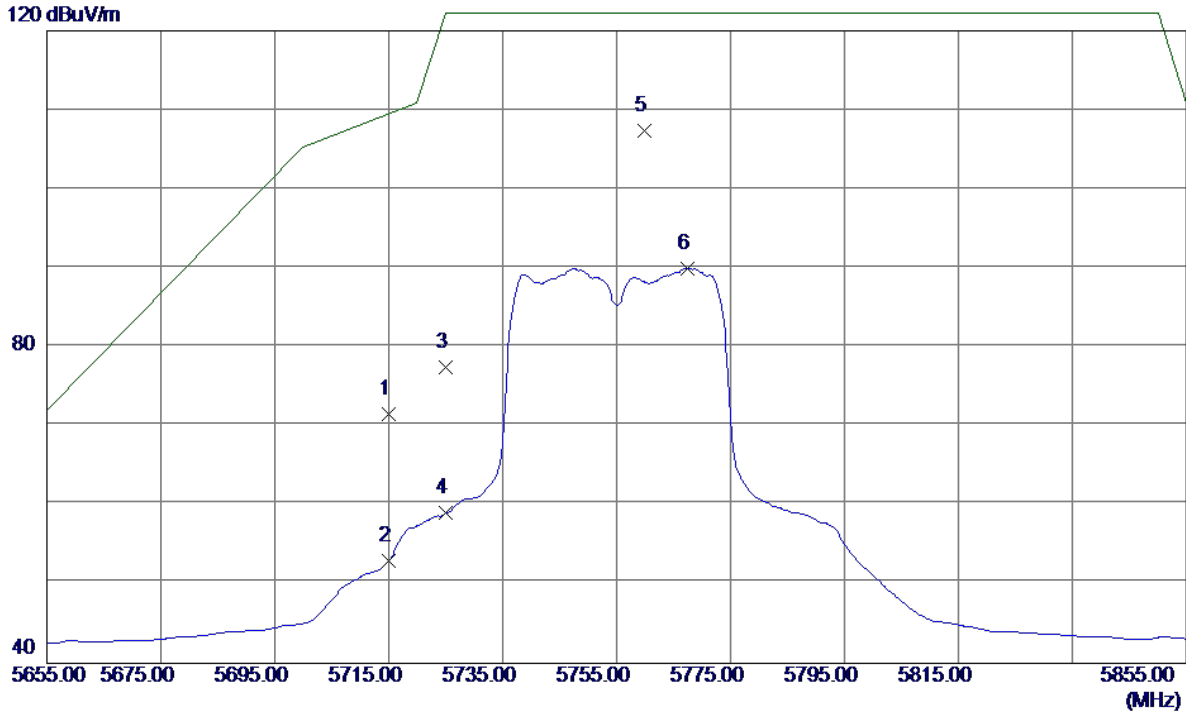

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 29.05 | 42.55 | 71.60 | 109.50 | -37.90 | Peak | |
| 2 | 5715.0000 | 10.43 | 42.55 | 52.98 | 109.50 | -56.52 | AVG | |
| 3 | 5725.0000 | 34.92 | 42.58 | 77.50 | 122.30 | -44.80 | Peak | |
| 4 | 5725.0000 | 16.39 | 42.58 | 58.97 | 122.30 | -63.33 | AVG | |
| 5 * | 5759.8000 | 64.71 | 42.70 | 107.41 | 122.30 | -14.89 | Peak | |
| 6 | 5767.4000 | 47.23 | 42.73 | 89.96 | 122.30 | -32.34 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


Vertical

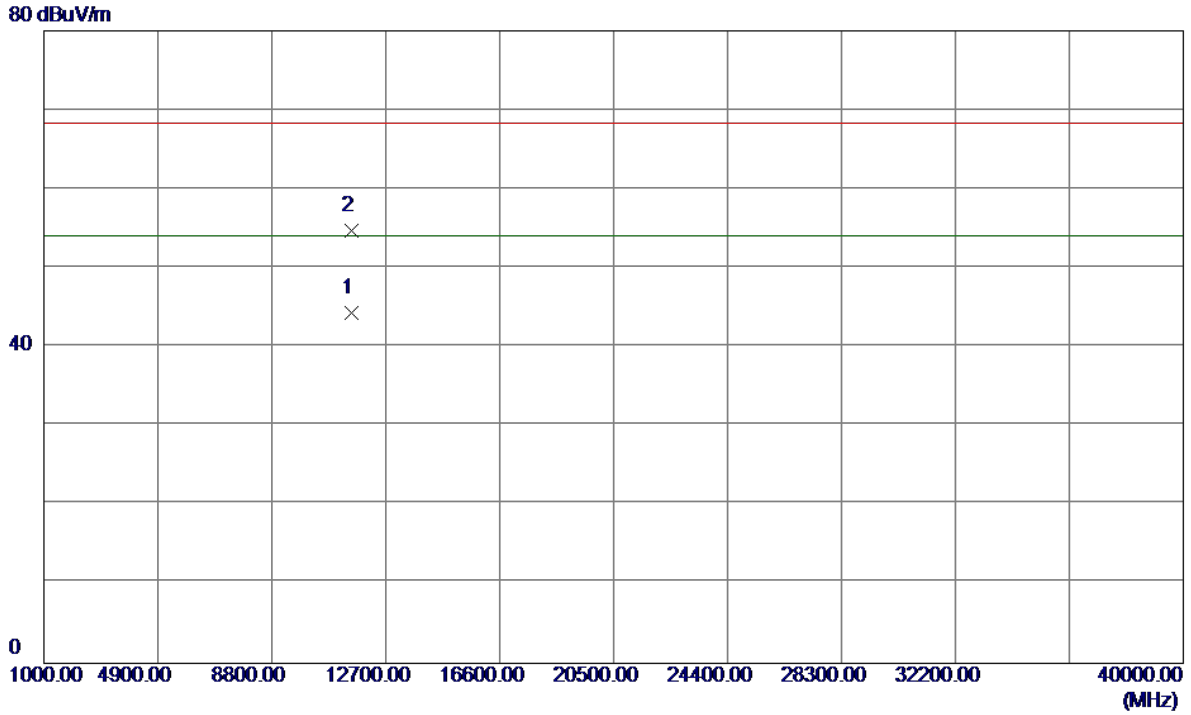

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.4400 | 28.89 | 15.48 | 44.37 | 54.00 | -9.63 | AVG | |
| 2 | 11510.8480 | 39.27 | 15.48 | 54.75 | 68.30 | -13.55 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Horizontal

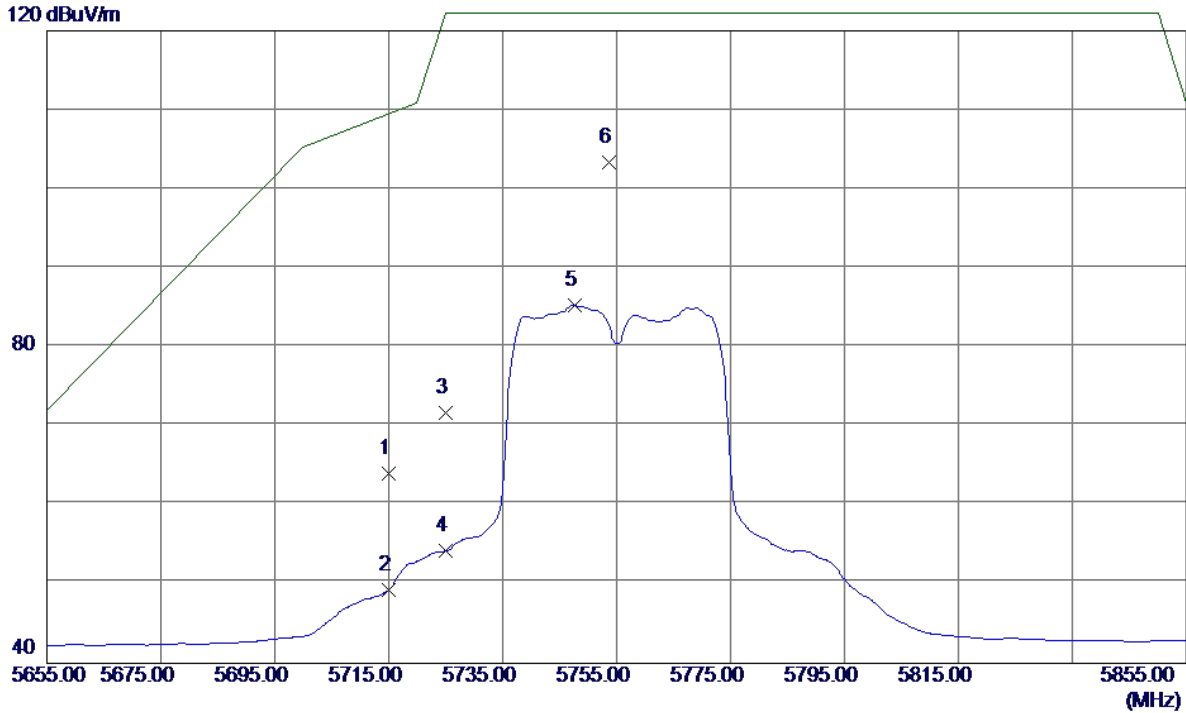


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 21.44 | 42.55 | 63.99 | 109.50 | -45.51 | Peak | |
| 2 | 5715.0000 | 6.75 | 42.55 | 49.30 | 109.50 | -60.20 | AVG | |
| 3 | 5725.0000 | 29.16 | 42.58 | 71.74 | 122.30 | -50.56 | Peak | |
| 4 | 5725.0000 | 11.64 | 42.58 | 54.22 | 122.30 | -68.08 | AVG | |
| 5 | 5747.6000 | 42.62 | 42.66 | 85.28 | 122.30 | -37.02 | AVG | |
| 6 * | 5753.6000 | 60.61 | 42.68 | 103.29 | 122.30 | -19.01 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |

Horizontal


80 dBuV/m

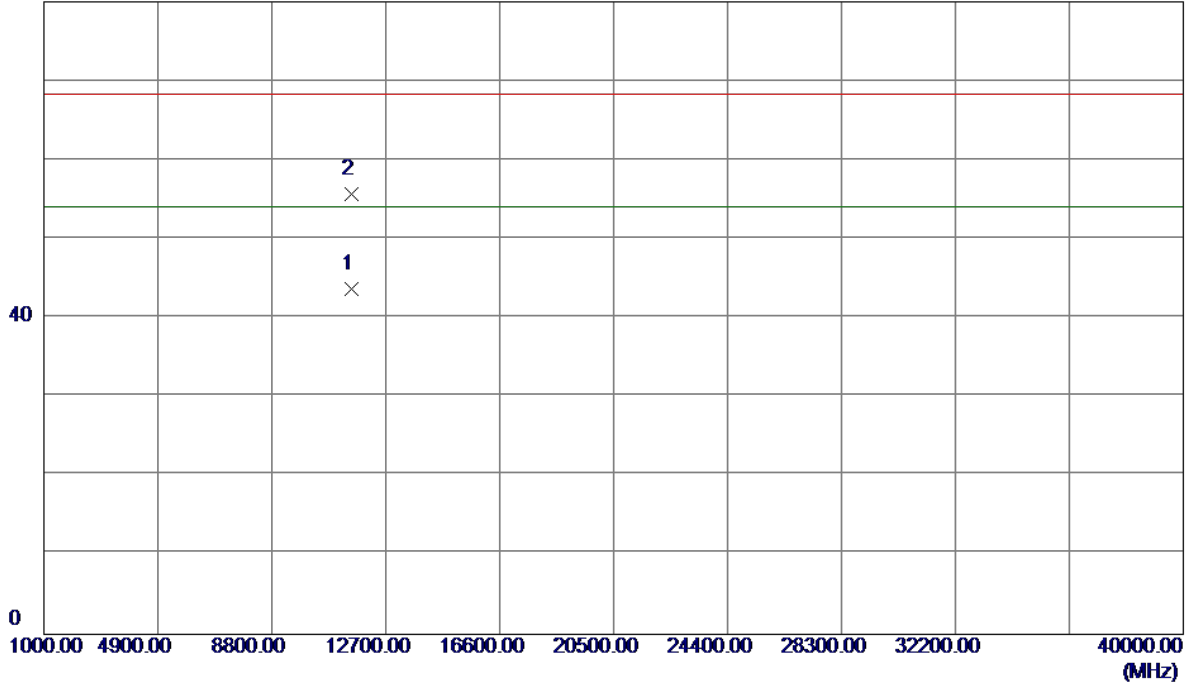

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11509.1200 | 28.18 | 15.48 | 43.66 | 54.00 | -10.34 | AVG | |
| 2 | 11510.7900 | 40.26 | 15.48 | 55.74 | 68.30 | -12.56 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


Vertical

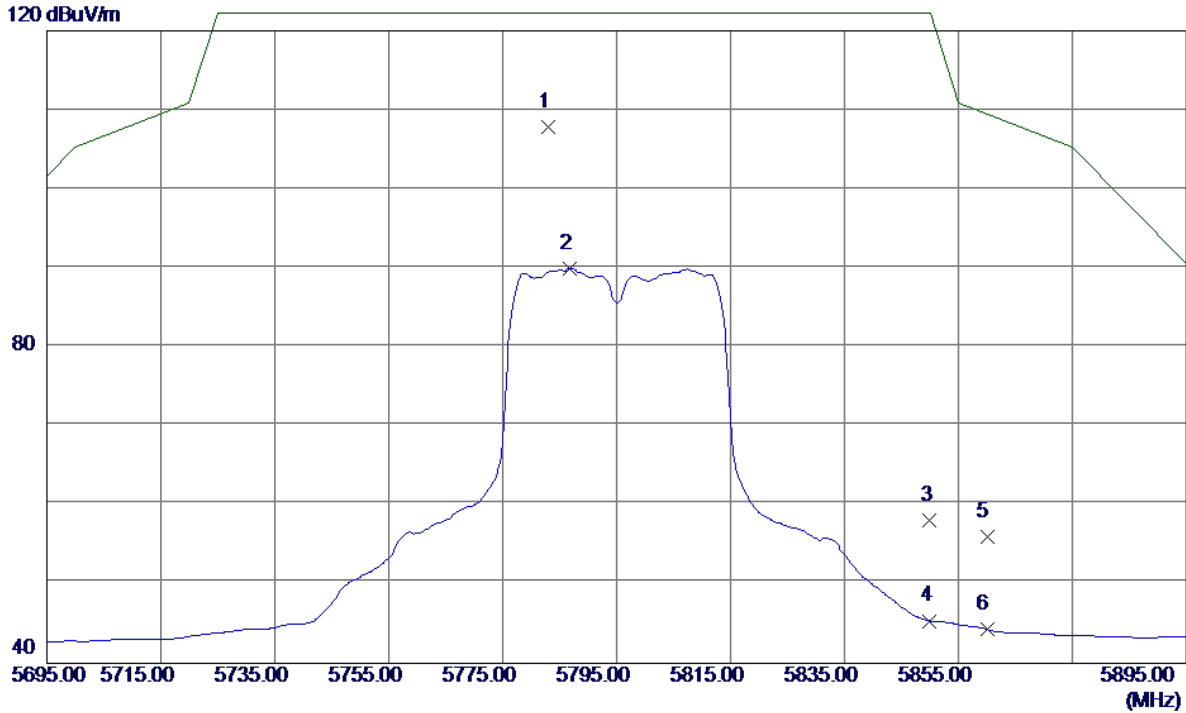

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5783.0000 | 65.03 | 42.79 | 107.82 | 122.30 | -14.48 | Peak | |
| 2 | 5786.8000 | 47.13 | 42.80 | 89.93 | 122.30 | -32.37 | AVG | |
| 3 | 5850.0000 | 14.99 | 43.03 | 58.02 | 122.30 | -64.28 | Peak | |
| 4 | 5850.0000 | 2.33 | 43.03 | 45.36 | 122.30 | -76.94 | AVG | |
| 5 | 5860.0000 | 12.97 | 43.06 | 56.03 | 109.50 | -53.47 | Peak | |
| 6 | 5860.0000 | 1.23 | 43.06 | 44.29 | 109.50 | -65.21 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


Vertical

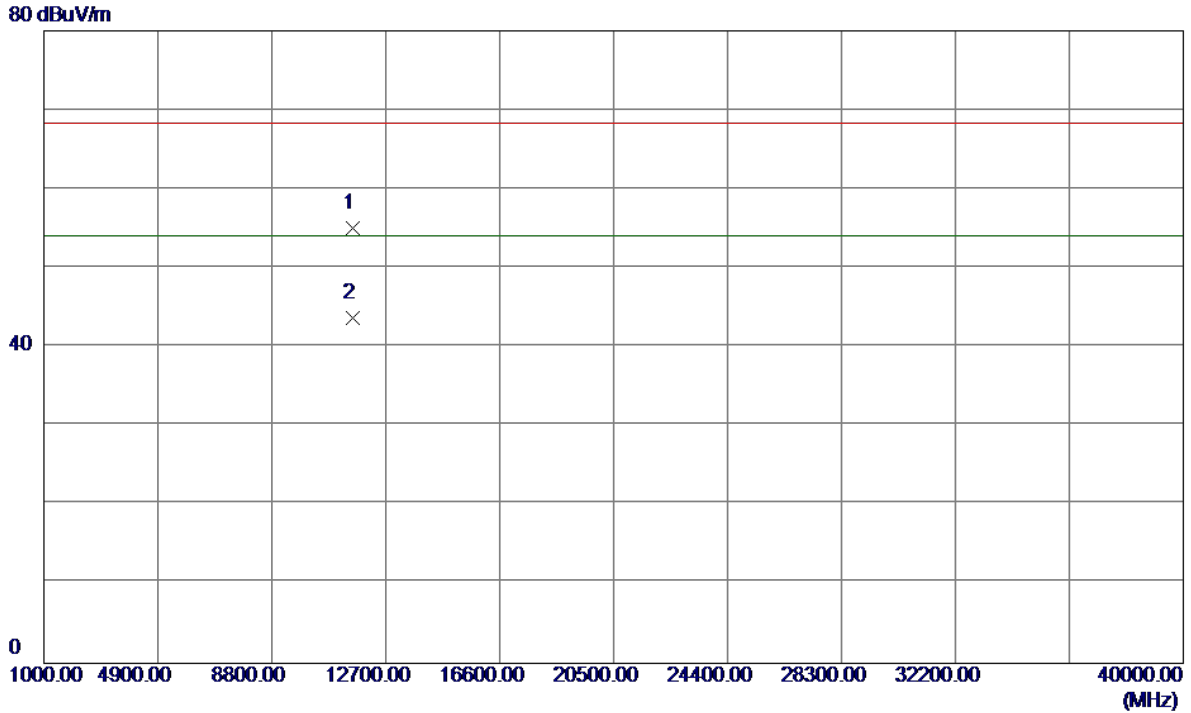

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11590.1700 | 39.52 | 15.48 | 55.00 | 68.30 | -13.30 | Peak | |
| 2 * | 11590.1500 | 28.13 | 15.48 | 43.61 | 54.00 | -10.39 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


Horizontal

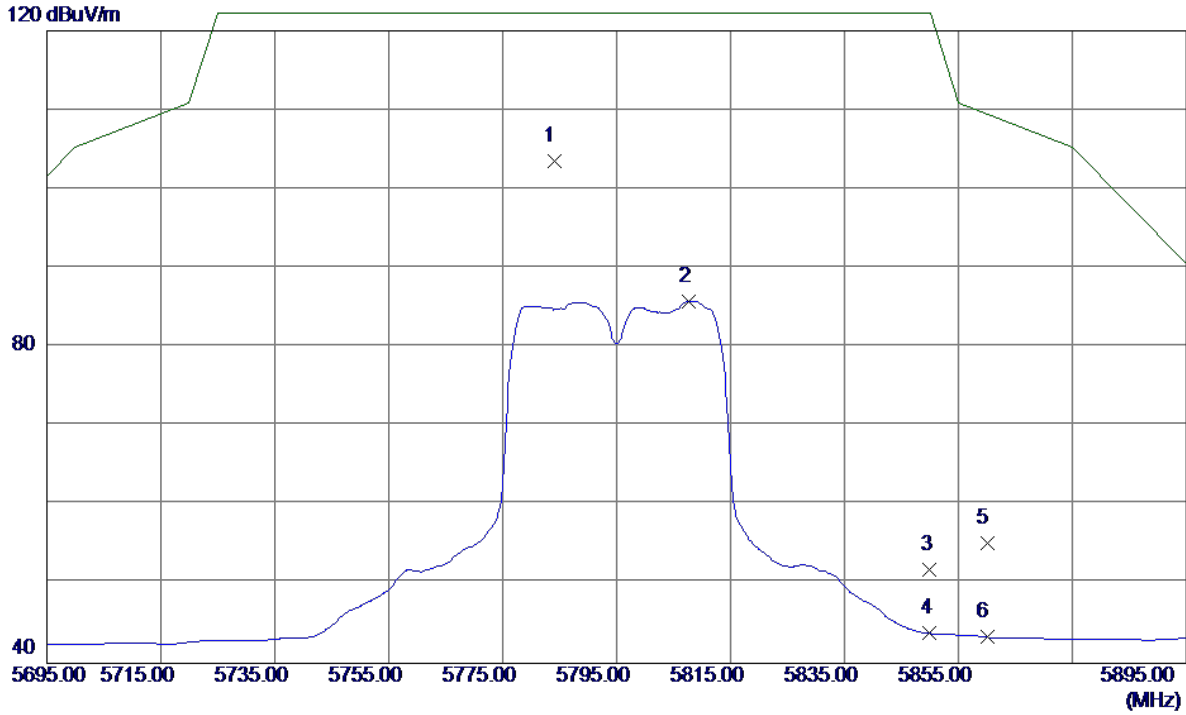

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5784.0000 | 60.68 | 42.79 | 103.47 | 122.30 | -18.83 | Peak | |
| 2 | 5807.6000 | 42.96 | 42.87 | 85.83 | 122.30 | -36.47 | AVG | |
| 3 | 5850.0000 | 8.76 | 43.03 | 51.79 | 122.30 | -70.51 | Peak | |
| 4 | 5850.0000 | 0.74 | 43.03 | 43.77 | 122.30 | -78.53 | AVG | |
| 5 | 5860.0000 | 12.13 | 43.06 | 55.19 | 109.50 | -54.31 | Peak | |
| 6 | 5860.0000 | 0.25 | 43.06 | 43.31 | 109.50 | -66.19 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


Horizontal

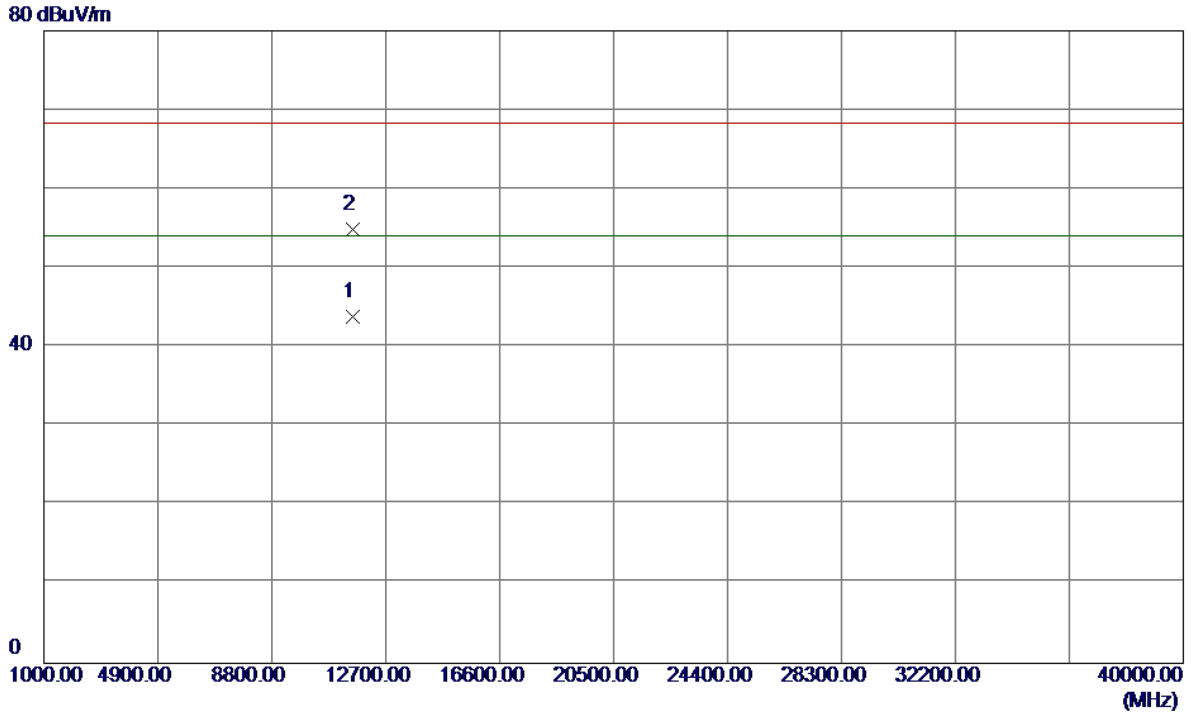

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11589.0900 | 28.39 | 15.48 | 43.87 | 54.00 | -10.13 | AVG | |
| 2 | 11591.9000 | 39.40 | 15.48 | 54.88 | 68.30 | -13.42 | Peak | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Vertical

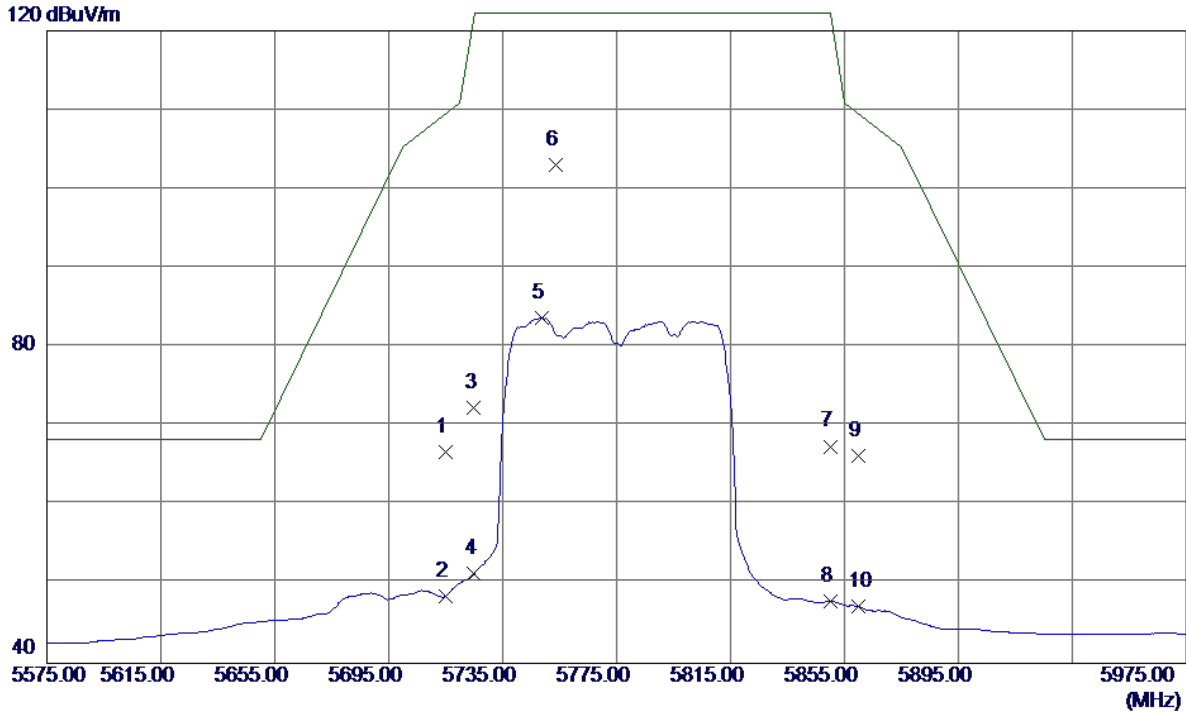


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 24.10 | 42.55 | 66.65 | 109.50 | -42.85 | Peak | |
| 2 | 5715.0000 | 5.99 | 42.55 | 48.54 | 109.50 | -60.96 | AVG | |
| 3 | 5725.0000 | 29.80 | 42.58 | 72.38 | 122.30 | -49.92 | Peak | |
| 4 | 5725.0000 | 8.79 | 42.58 | 51.37 | 122.30 | -70.93 | AVG | |
| 5 | 5748.6000 | 41.09 | 42.66 | 83.75 | 122.30 | -38.55 | AVG | |
| 6 * | 5753.8000 | 60.38 | 42.68 | 103.06 | 122.30 | -19.24 | Peak | |
| 7 | 5850.0000 | 24.41 | 43.03 | 67.44 | 122.30 | -54.86 | Peak | |
| 8 | 5850.0000 | 4.81 | 43.03 | 47.84 | 122.30 | -74.46 | AVG | |
| 9 | 5860.0000 | 23.23 | 43.06 | 66.29 | 109.50 | -43.21 | Peak | |
| 10 | 5860.0000 | 4.09 | 43.06 | 47.15 | 109.50 | -62.35 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Vertical


80 dBuV/m

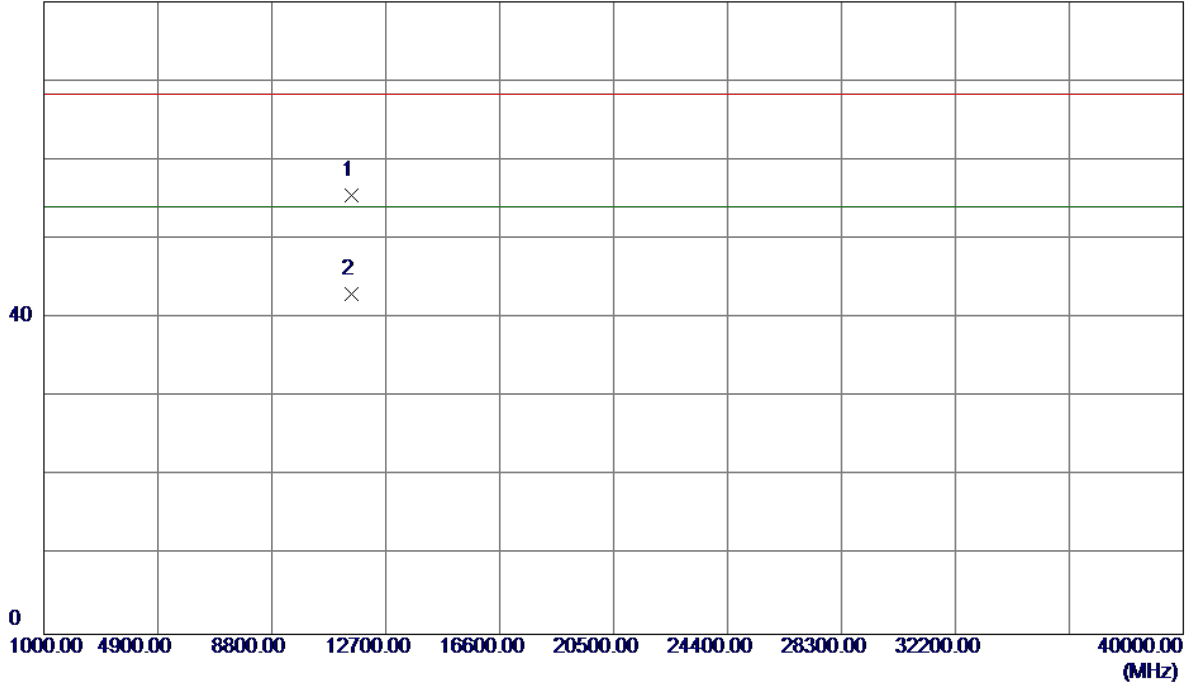

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11549.5800 | 39.99 | 15.48 | 55.47 | 68.30 | -12.83 | Peak | |
| 2 * | 11549.9700 | 27.58 | 15.48 | 43.06 | 54.00 | -10.94 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Horizontal

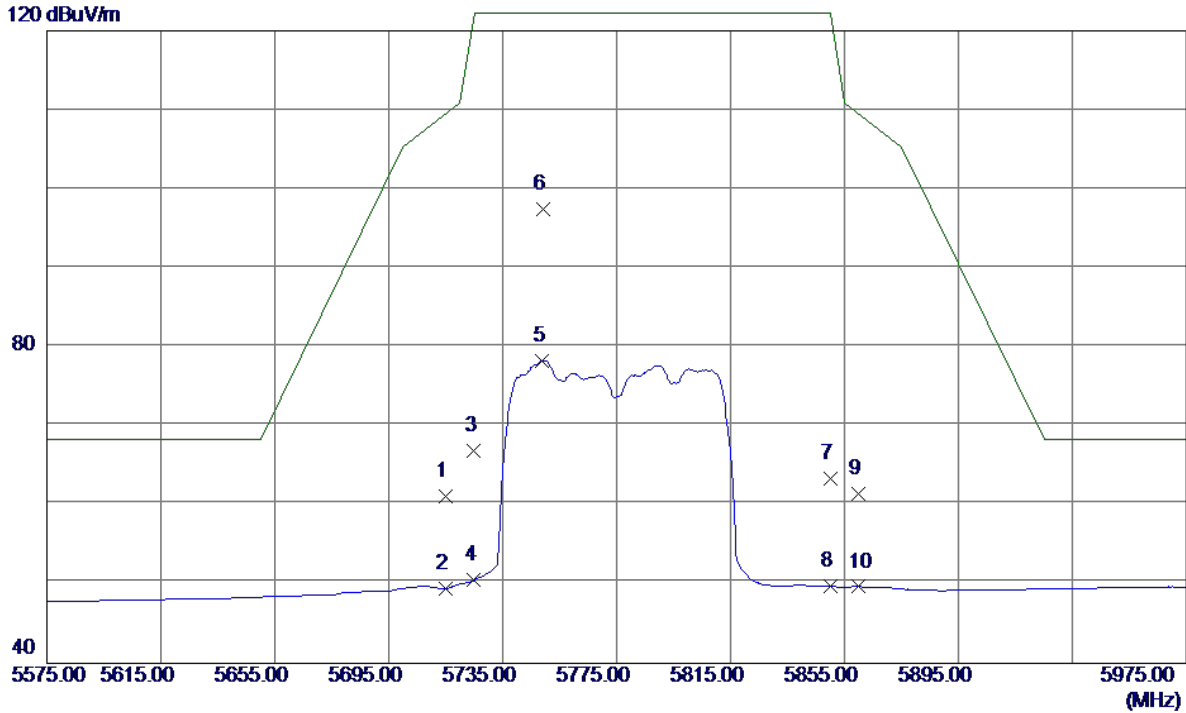


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5715.0000 | 18.54 | 42.55 | 61.09 | 109.50 | -48.41 | Peak | |
| 2 | 5715.0000 | 6.88 | 42.55 | 49.43 | 109.50 | -60.07 | AVG | |
| 3 | 5725.0000 | 24.35 | 42.58 | 66.93 | 122.30 | -55.37 | Peak | |
| 4 | 5725.0000 | 7.92 | 42.58 | 50.50 | 122.30 | -71.80 | AVG | |
| 5 | 5749.0000 | 35.59 | 42.67 | 78.26 | 122.30 | -44.04 | AVG | |
| 6 * | 5749.4000 | 54.72 | 42.67 | 97.39 | 122.30 | -24.91 | Peak | |
| 7 | 5850.0000 | 20.35 | 43.03 | 63.38 | 122.30 | -58.92 | Peak | |
| 8 | 5850.0000 | 6.71 | 43.03 | 49.74 | 122.30 | -72.56 | AVG | |
| 9 | 5860.0000 | 18.33 | 43.06 | 61.39 | 109.50 | -48.11 | Peak | |
| 10 | 5860.0000 | 6.62 | 43.06 | 49.68 | 109.50 | -59.82 | AVG | |

| | |
|------------------|-----------------------------|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

Horizontal

80 dBuV/m

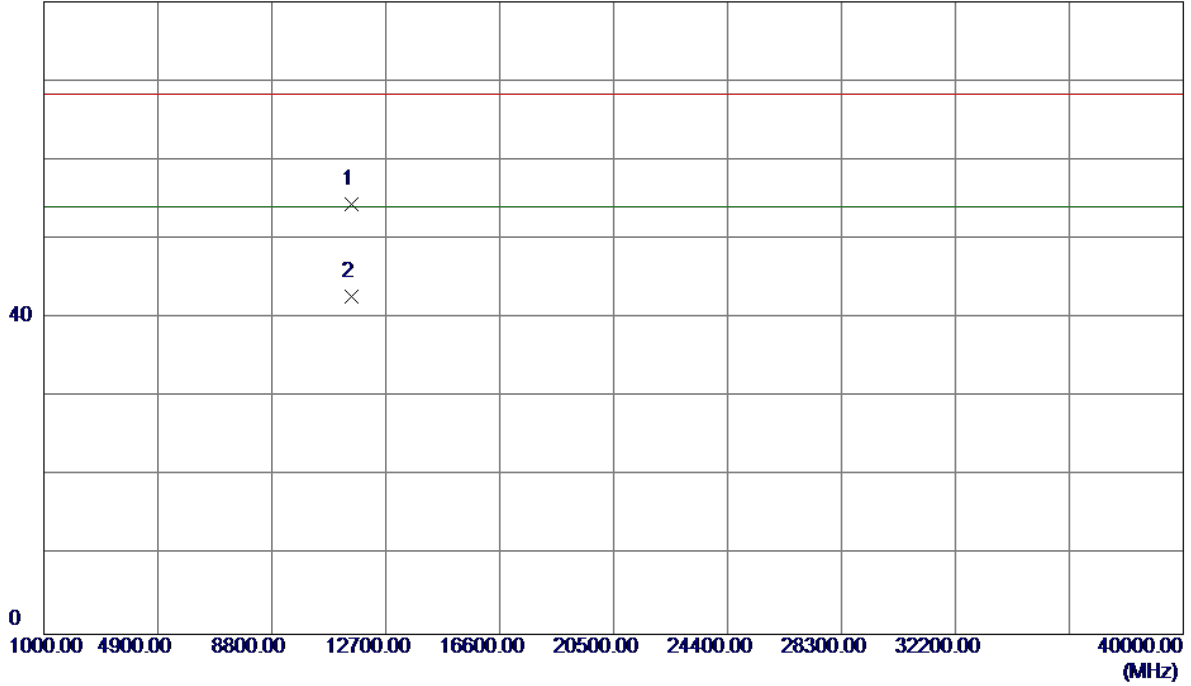

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11550.1700 | 38.88 | 15.48 | 54.36 | 68.30 | -13.94 | Peak | |
| 2 * | 11550.2400 | 27.18 | 15.48 | 42.66 | 54.00 | -11.34 | AVG | |

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.03 msec

T_{Total} : 2.14 msec

Duty cycle: 94.86%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.23

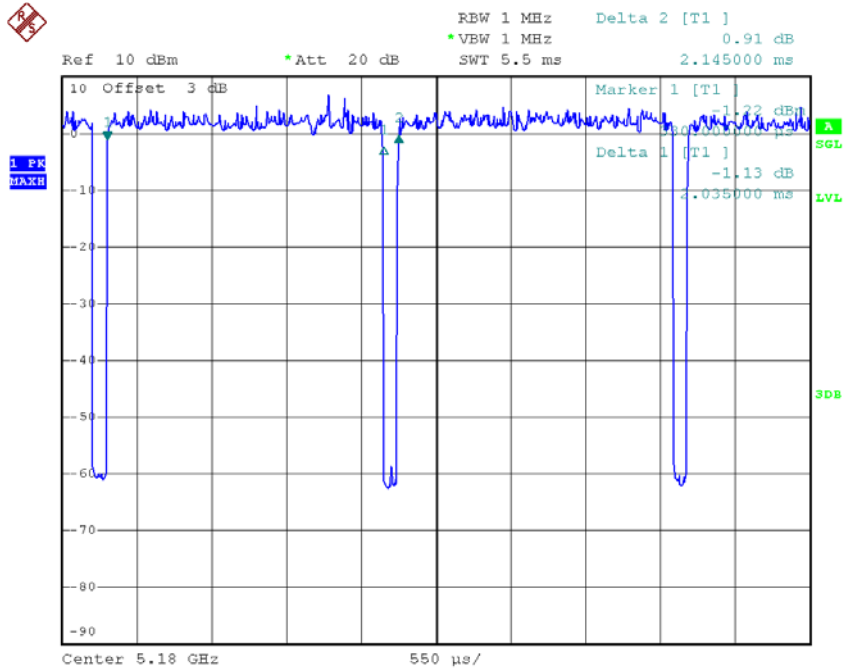

Date: 10.JUL.2017 12:00:43

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.89 msec

T_{Total} : 2.00 msec

Duty cycle: 94.50%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.25

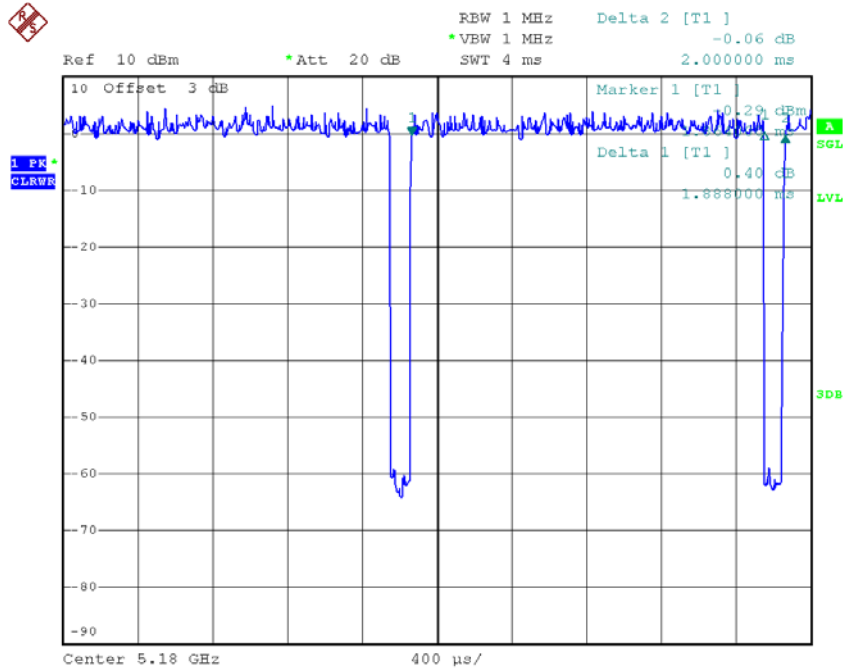

Date: 10. JUL.2017 12:01:18

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.90 msec

T_{Total} : 1.03 msec

Duty cycle: 87.38%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.59

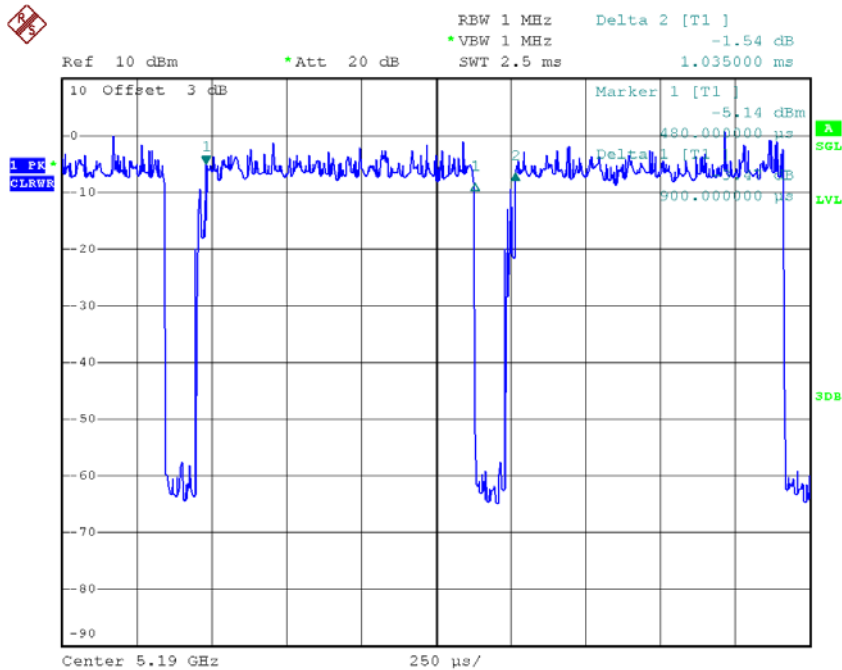

Date: 10. JUL.2017 12:06:23

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.90 msec

T_{Total} : 2.01 msec

Duty cycle: 94.53%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.24

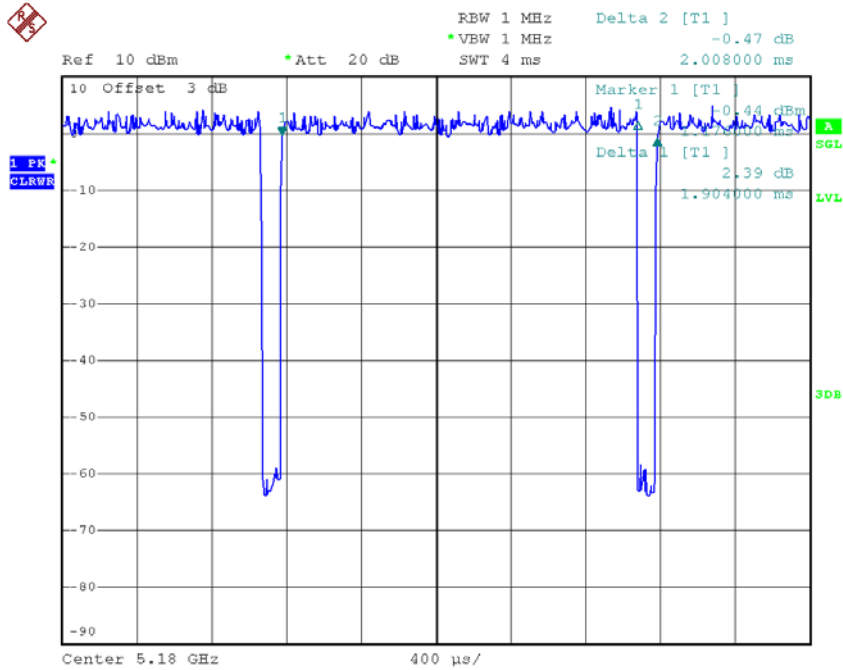

Date: 10. JUL.2017 12:02:03

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.92 msec

T_{Total} : 1.04 msec

Duty cycle: 88.46%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.53

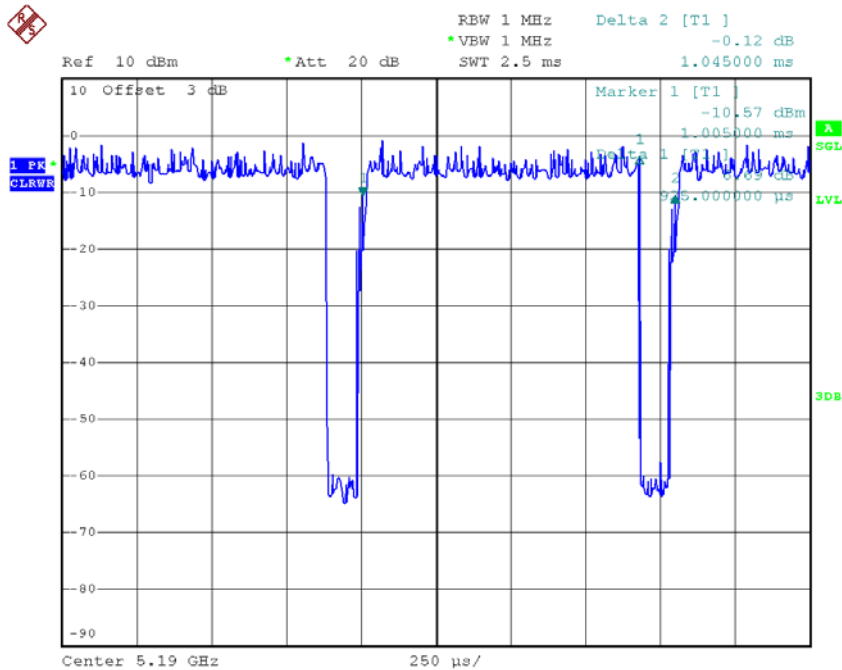

Date: 10. JUL.2017 12:06:57

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.44 msec

T_{Total} : 0.54 msec

Duty cycle: 81.48%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.89

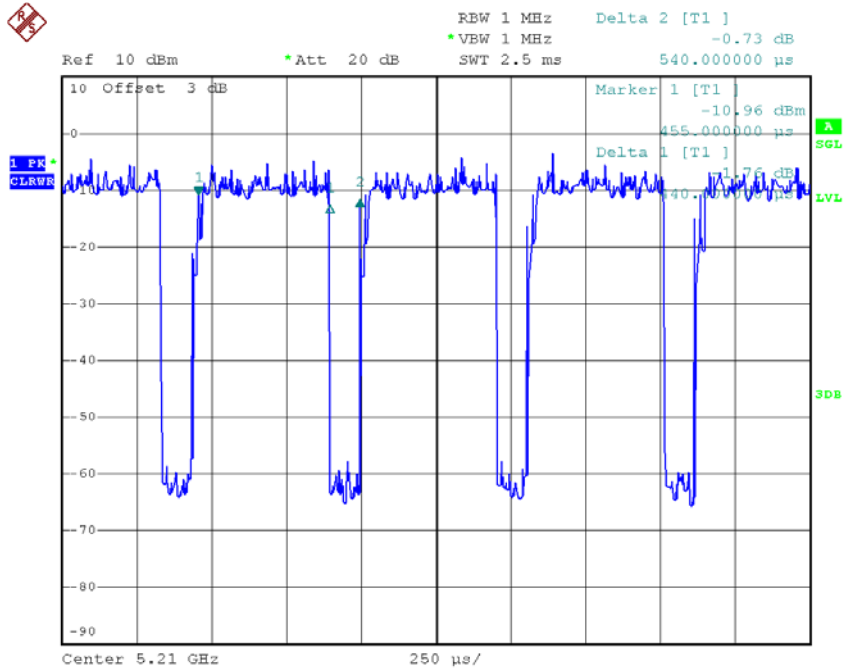


Date: 10. JUL. 2017 12:07:32

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH36 | 5180 | 19.75 | 16.40 |
| CH40 | 5200 | 19.39 | 16.40 |
| CH48 | 5240 | 19.40 | 16.40 |

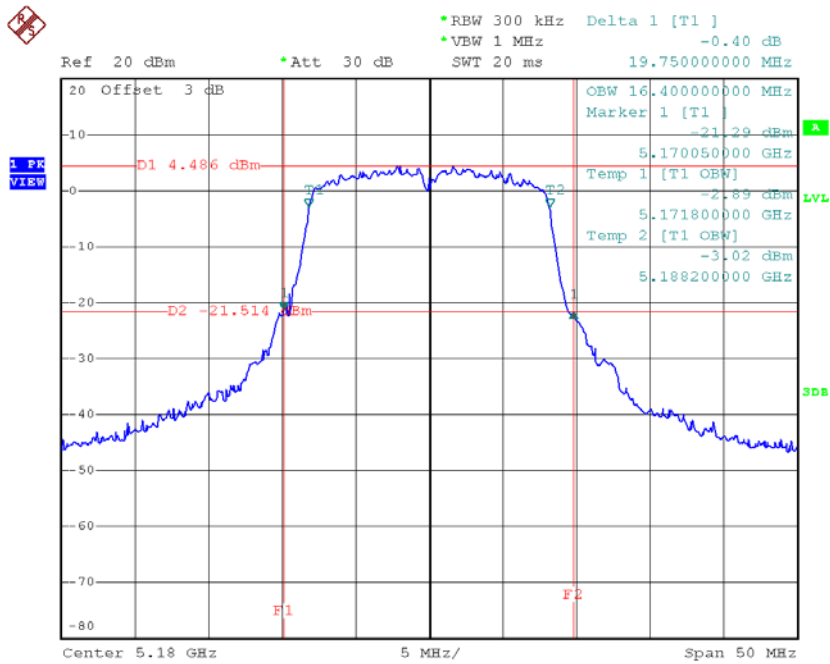TX CH36


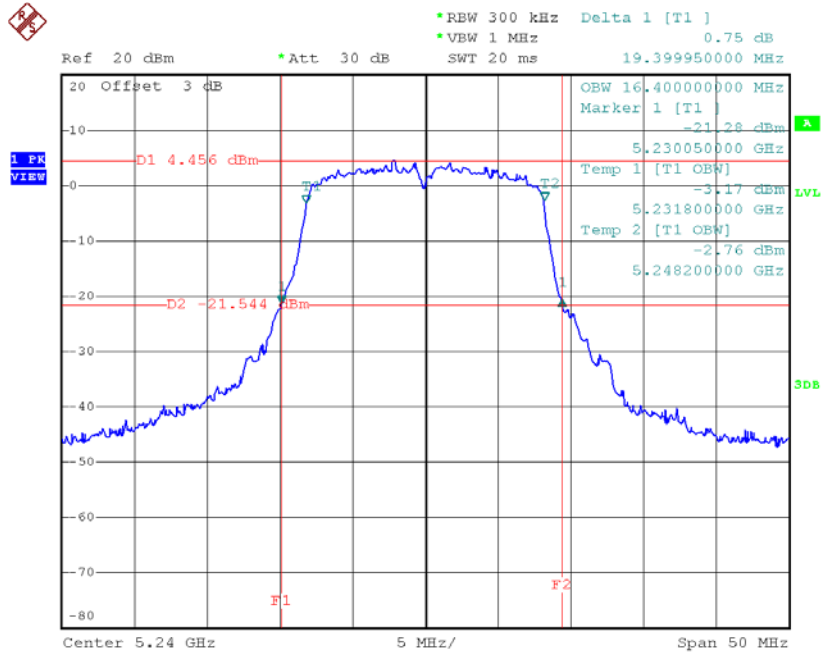
Date: 17.JUL.2017 10:53:19

TX CH40

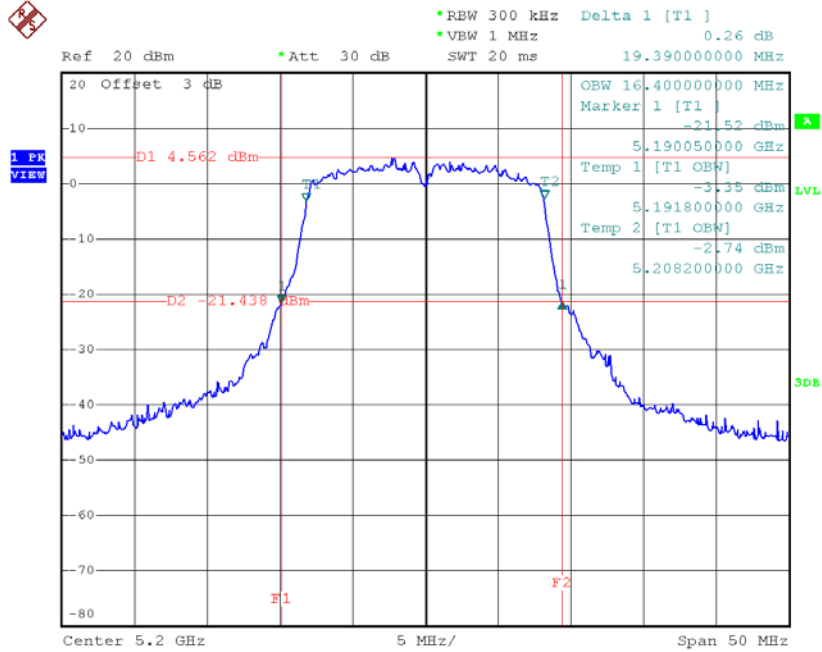

Date: 10. JUL.2017 10:55:01


TX CH48



Date: 10. JUL.2017 10:56:37


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH36 | 5180 | 19.39 | 16.40 |
| CH40 | 5200 | 20.60 | 17.50 |
| CH48 | 5240 | 20.75 | 17.50 |

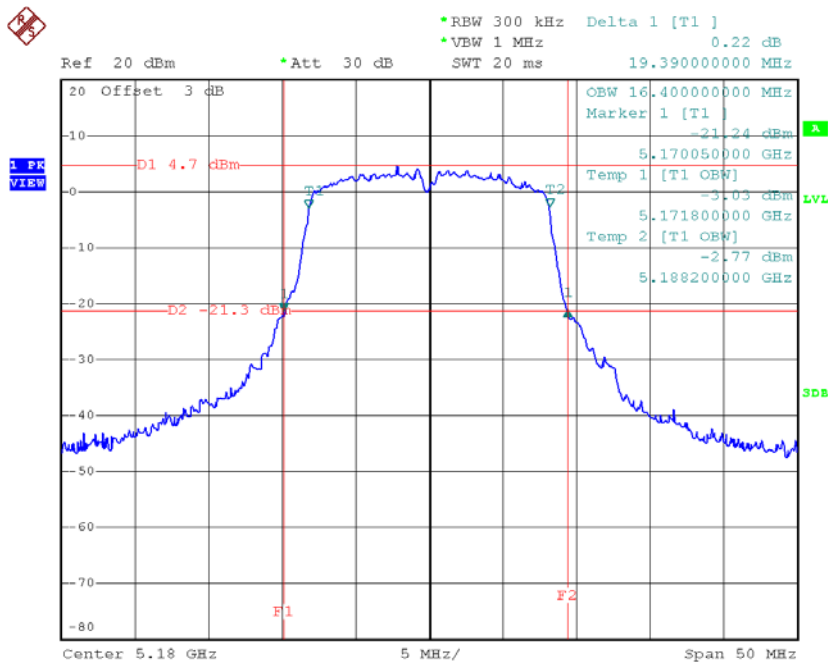TX CH36


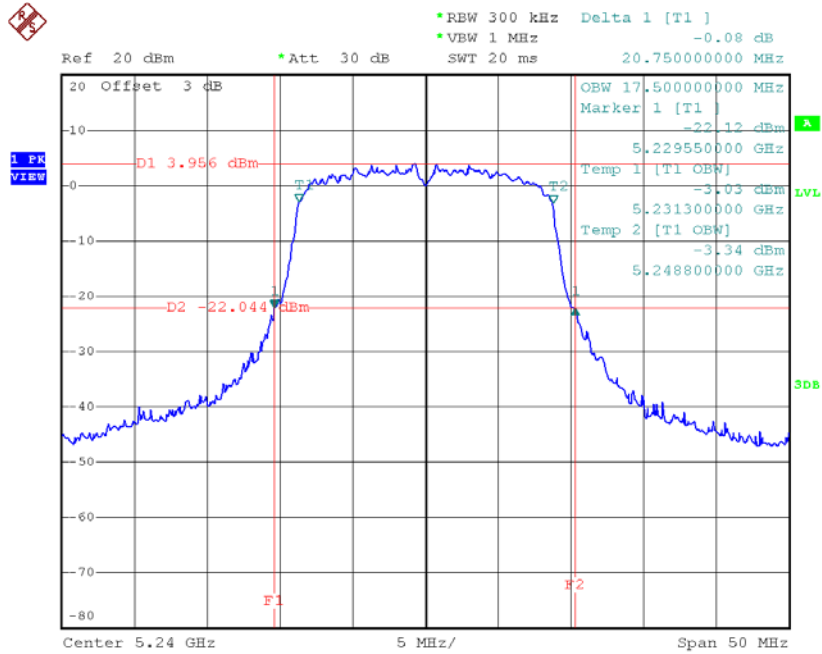
Date: 10. JUL.2017 11:43:04

TX CH40

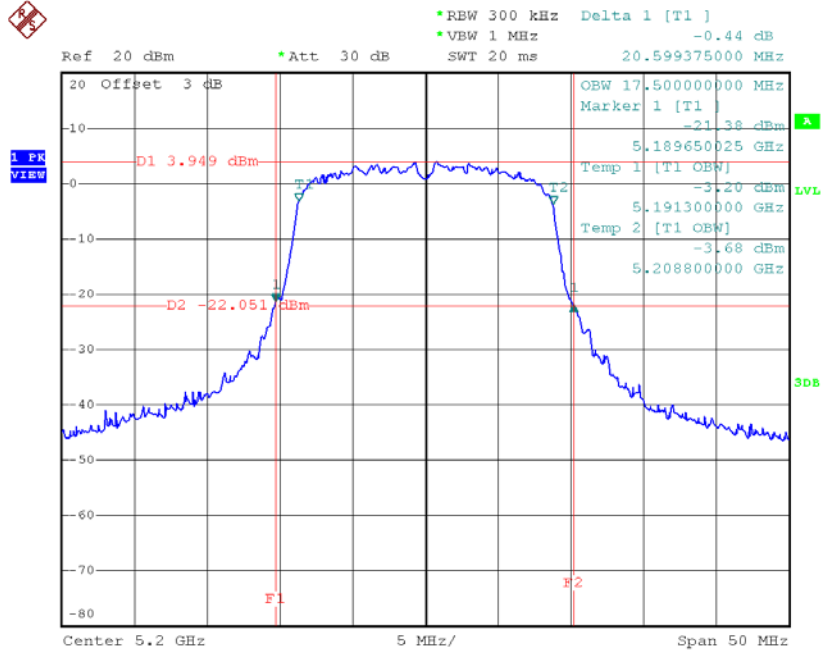

Date: 10. JUL.2017 11:46:10

TX CH48




Date: 10. JUL.2017 11:47:38

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH38 | 5190 | 40.51 | 36.00 |
| CH46 | 5230 | 40.30 | 35.80 |

TX CH38

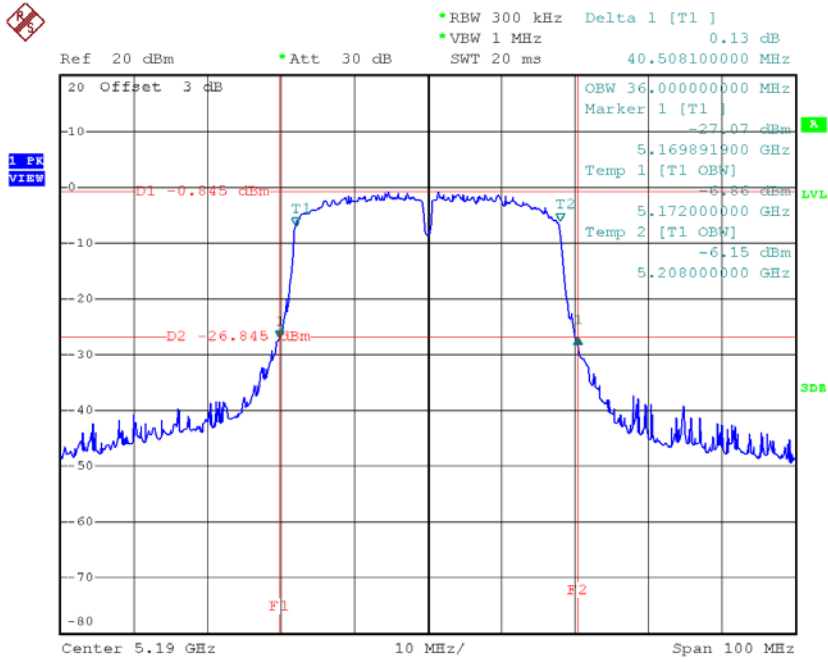

Date: 10. JUL.2017 16:55:58


TX CH46

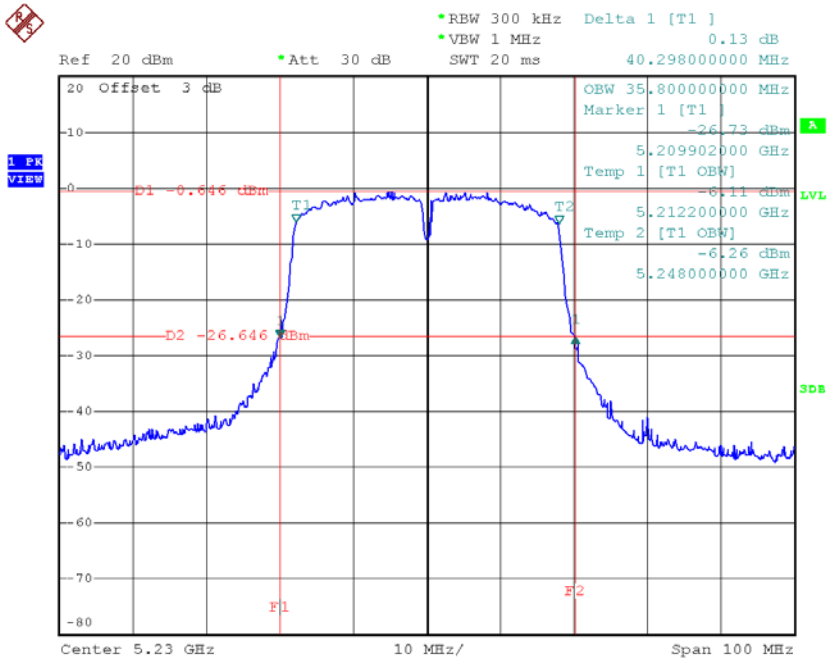

Date: 10. JUL.2017 16:58:47


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH52 | 5260 | 19.29 | 16.40 |
| CH60 | 5300 | 19.20 | 16.40 |
| CH64 | 5320 | 19.39 | 16.40 |

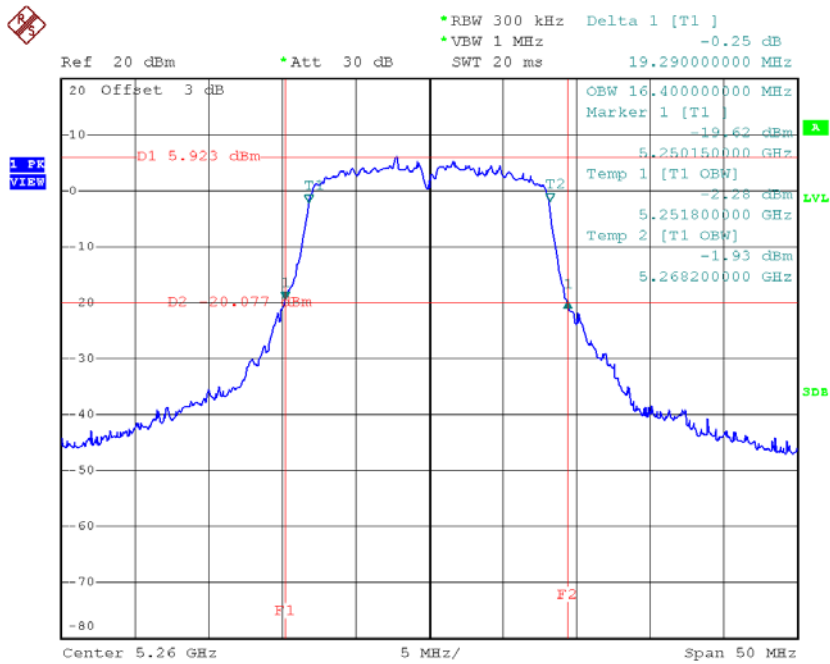TX CH52


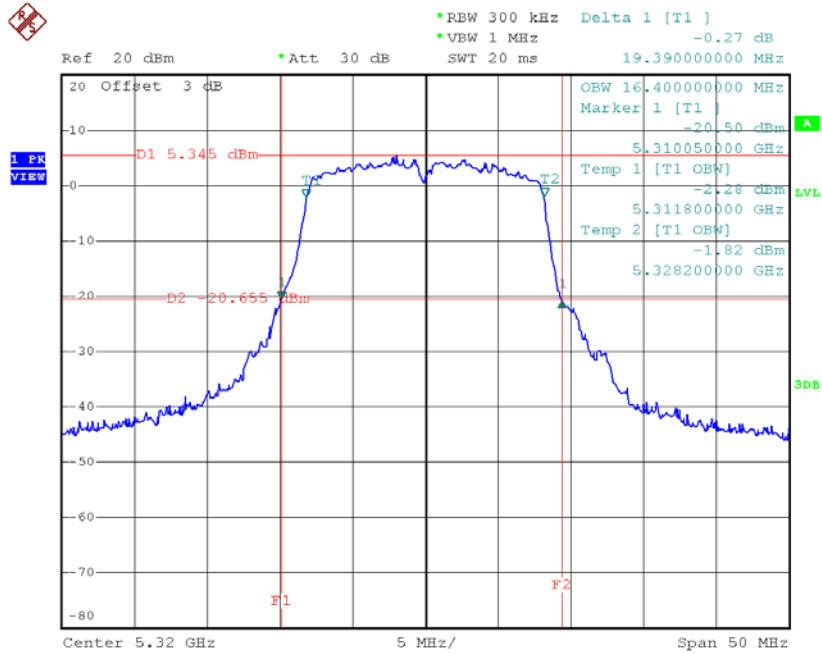
Date: 10. JUL.2017 10:58:32

TX CH60

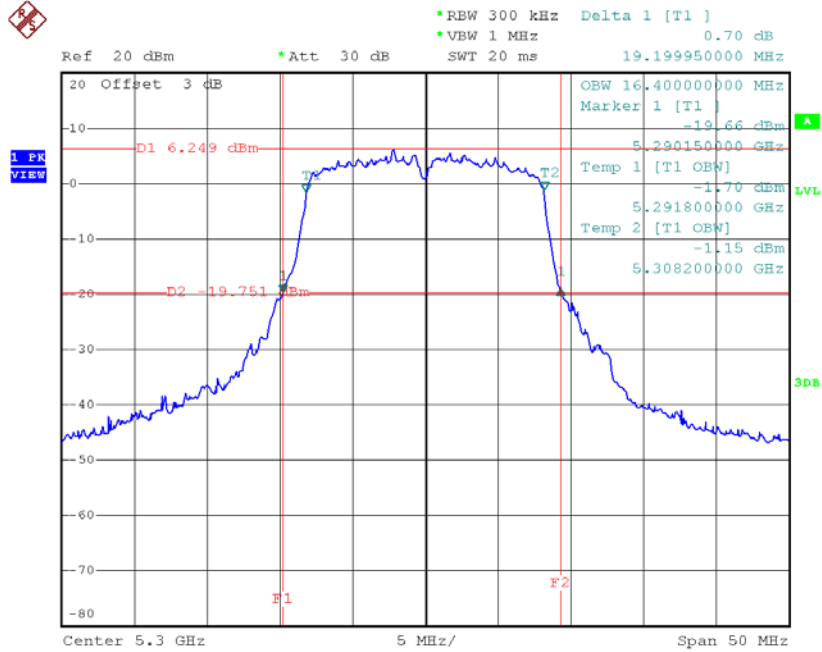

Date: 10. JUL.2017 11:00:14

TX CH64




Date: 10. JUL.2017 11:01:38

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH52 | 5260 | 20.65 | 17.50 |
| CH60 | 5300 | 20.40 | 17.50 |
| CH64 | 5320 | 20.50 | 17.50 |

TX CH52

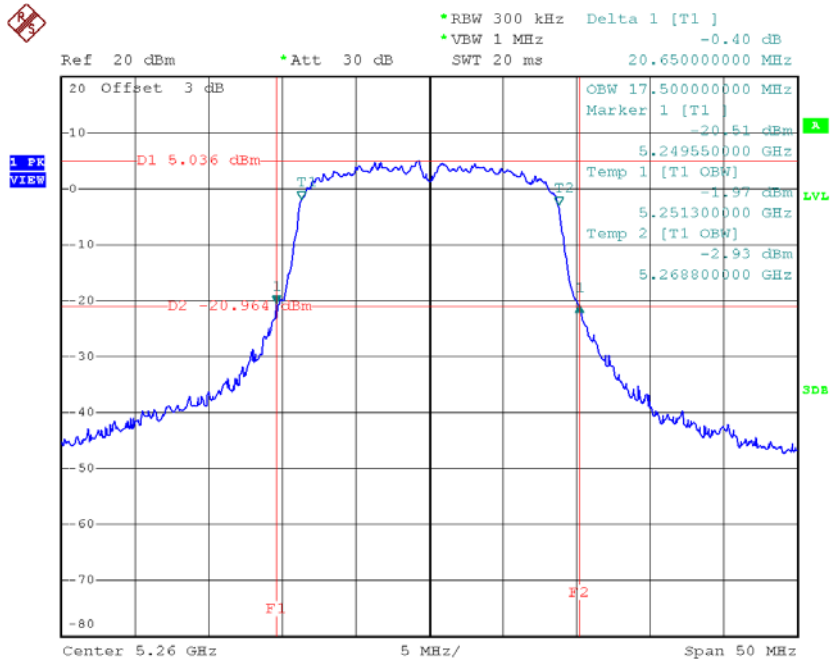


Date: 10.JUL.2017 11:49:51

TX CH60

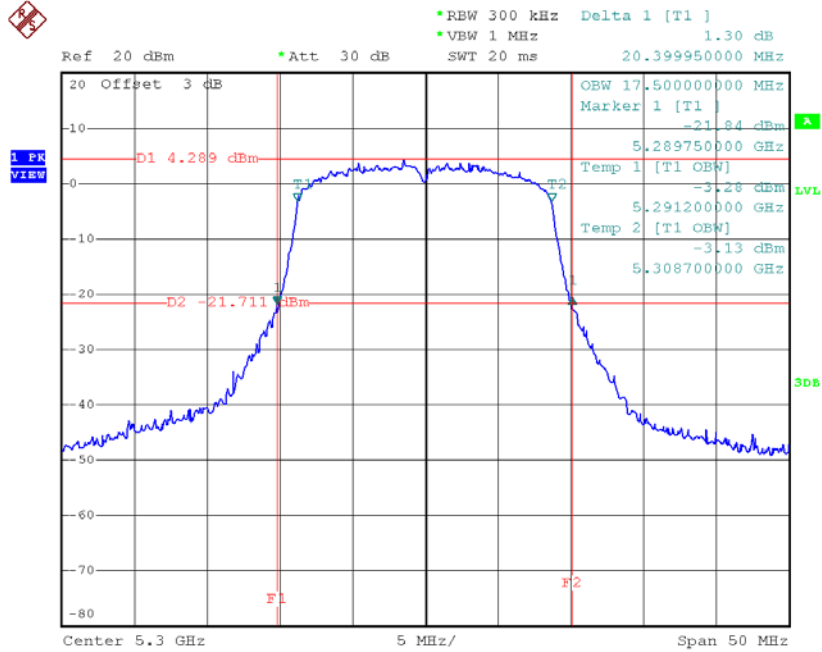

Date: 10. JUL.2017 18:13:33

TX CH64

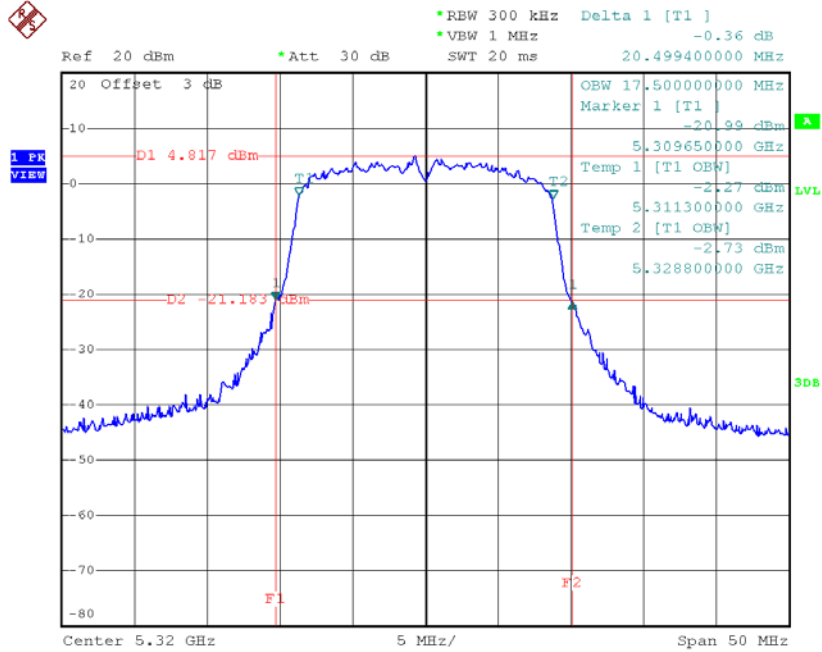


Date: 10. JUL.2017 11:53:49

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH54 | 5270 | 40.90 | 36.00 |
| CH62 | 5310 | 40.39 | 36.00 |

TX CH54

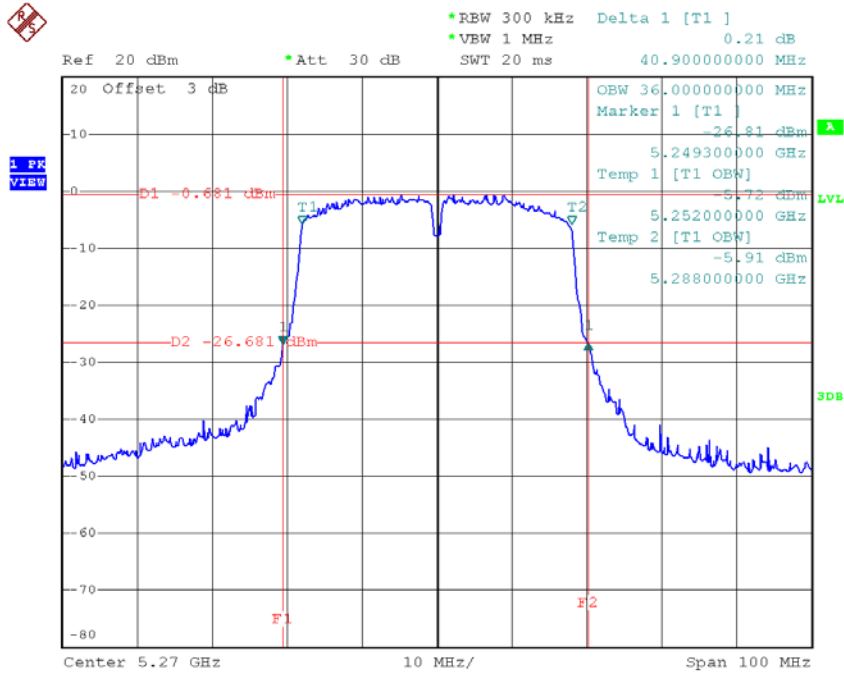

Date: 10. JUL.2017 17:00:53


TX CH62

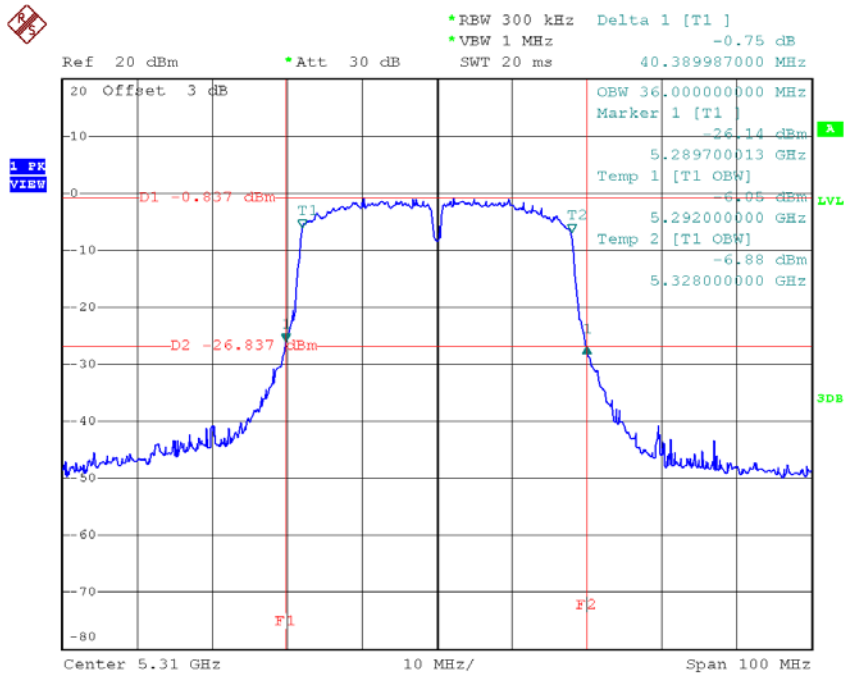

Date: 10. JUL.2017 17:02:47


Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH100 | 5500 | 19.31 | 16.30 |
| CH116 | 5580 | 19.29 | 16.40 |
| CH140 | 5700 | 19.49 | 16.40 |

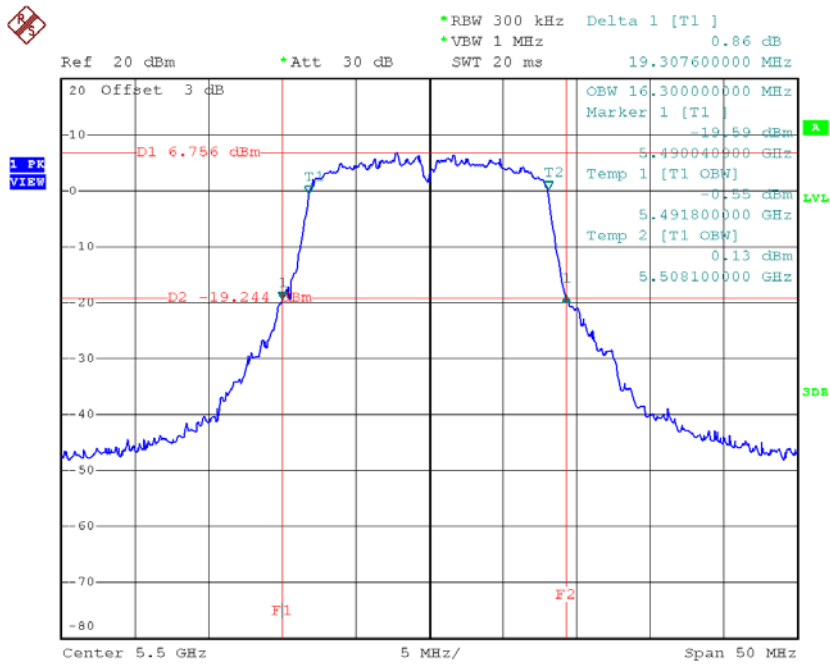TX CH100


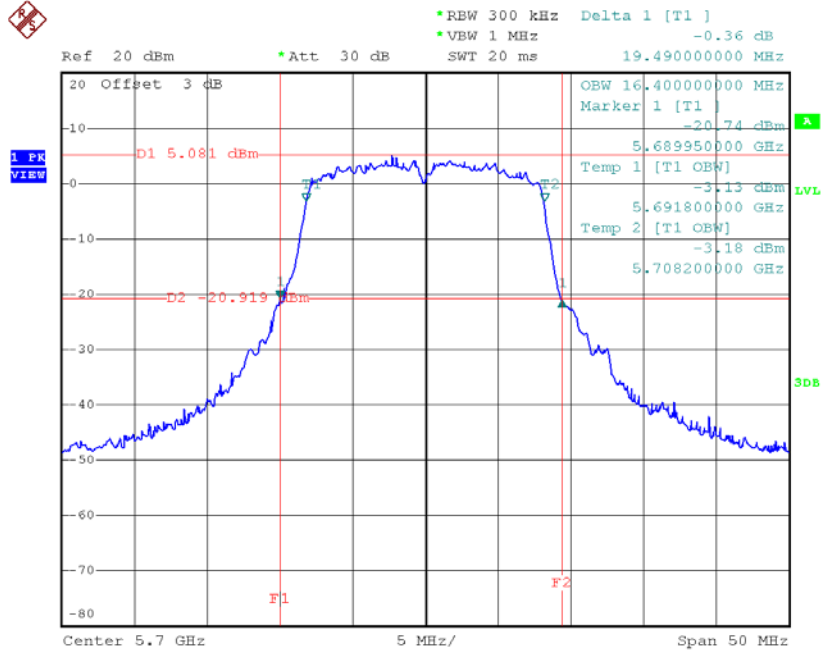
Date: 10.JUL.2017 11:05:57

TX CH116

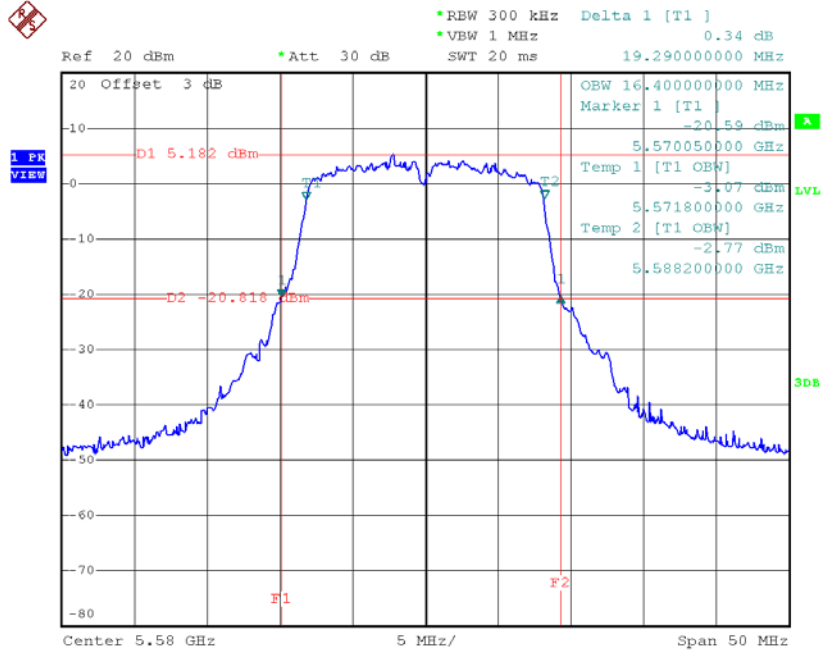

Date: 10. JUL.2017 11:11:30

TX CH140




Date: 10. JUL.2017 11:24:16

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH100 | 5500 | 20.49 | 17.50 |
| CH116 | 5580 | 20.55 | 17.50 |
| CH140 | 5700 | 20.30 | 17.50 |

TX CH100

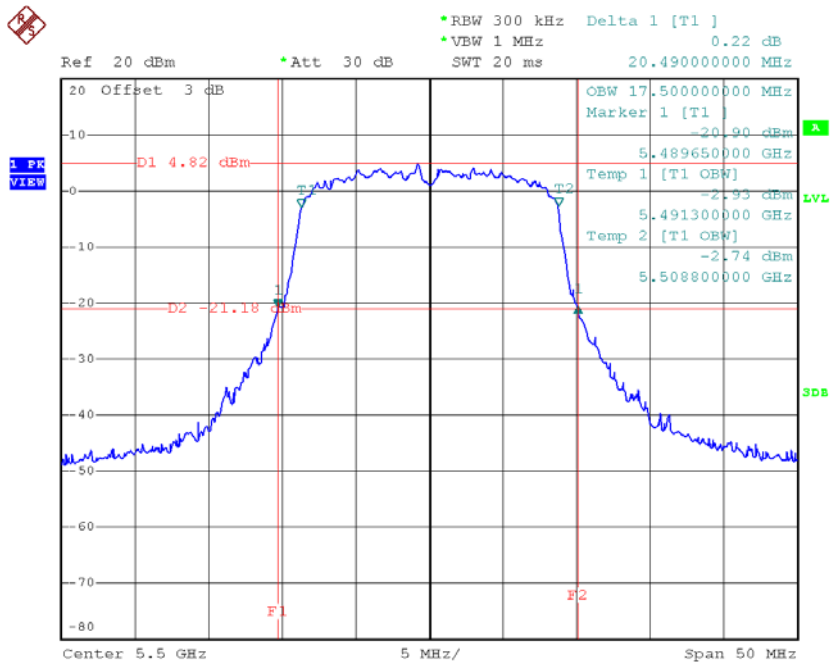


Date: 10.JUL.2017 11:56:44

TX CH116

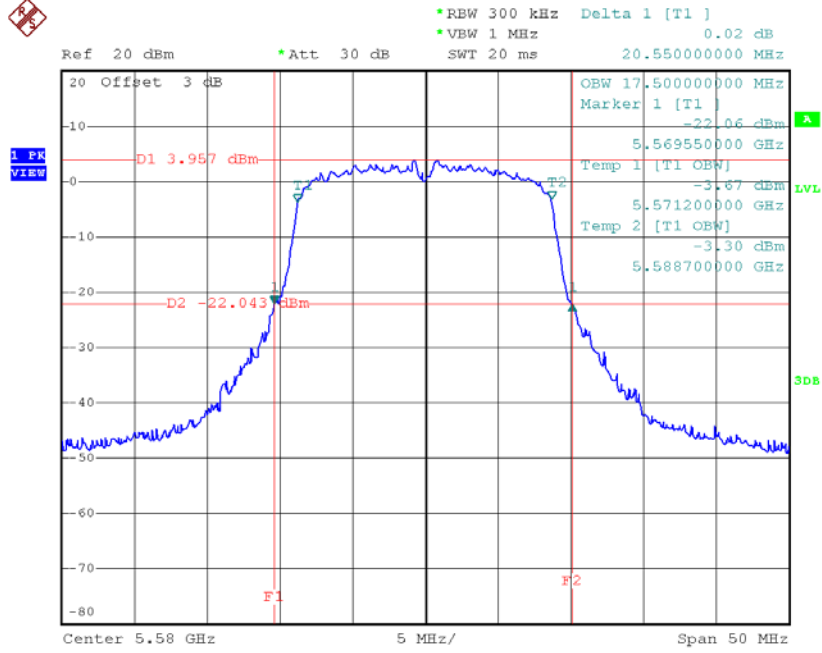

Date: 10. JUL.2017 11:58:48

TX CH140

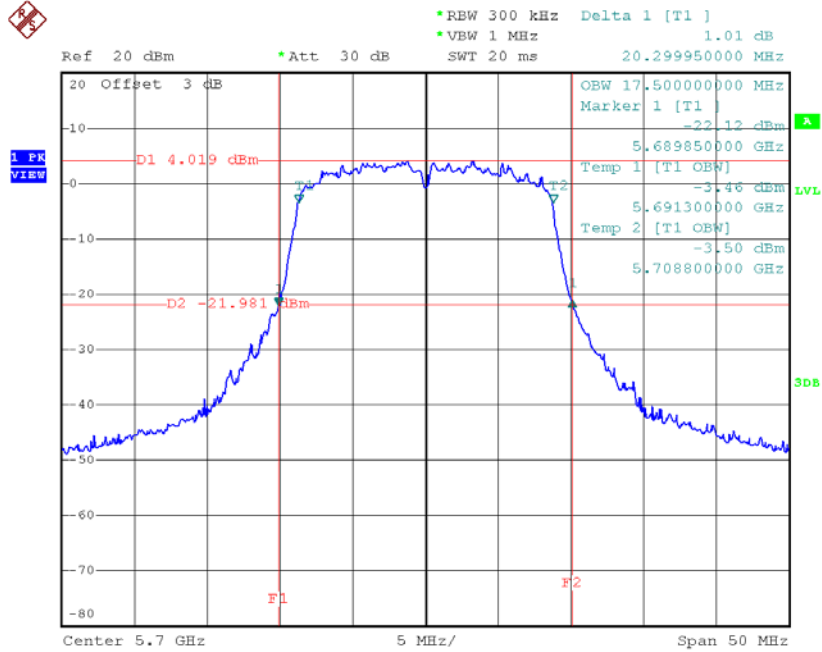


Date: 10. JUL.2017 12:02:51

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH102 | 5510 | 40.40 | 36.00 |
| CH110 | 5550 | 40.21 | 36.00 |
| CH134 | 5670 | 39.99 | 36.00 |

TX CH102

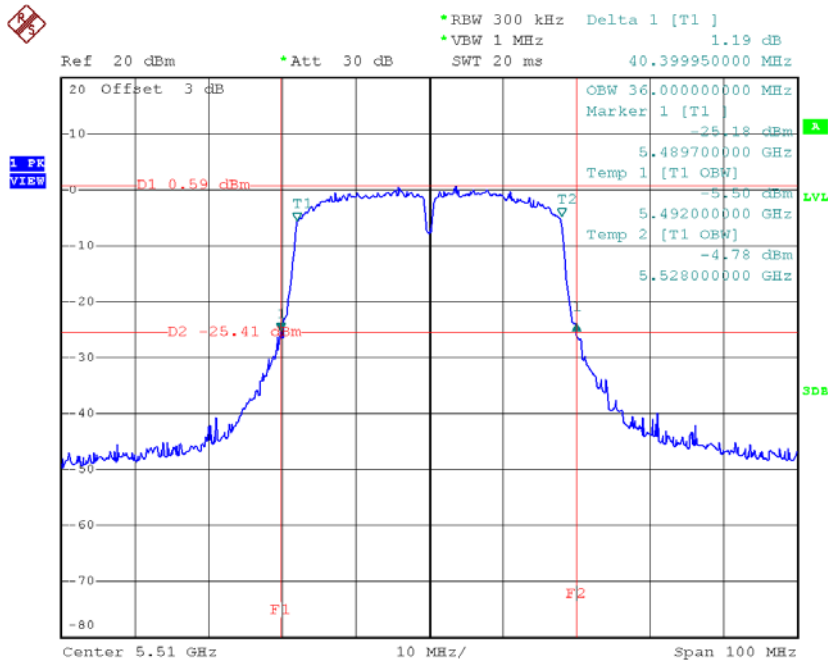


Date: 10. JUL.2017 17:04:31

TX CH110

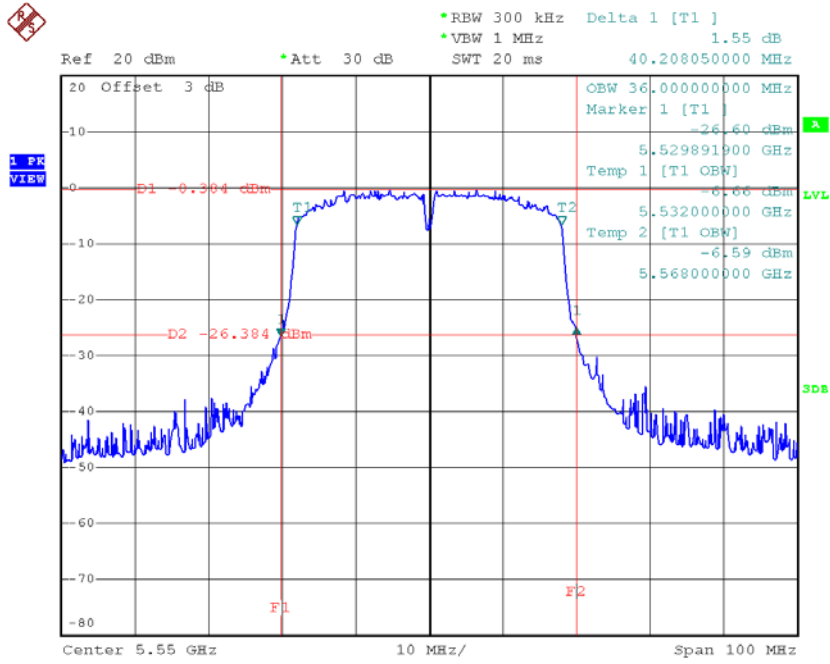

Date: 10. JUL.2017 17:06:22


TX CH134

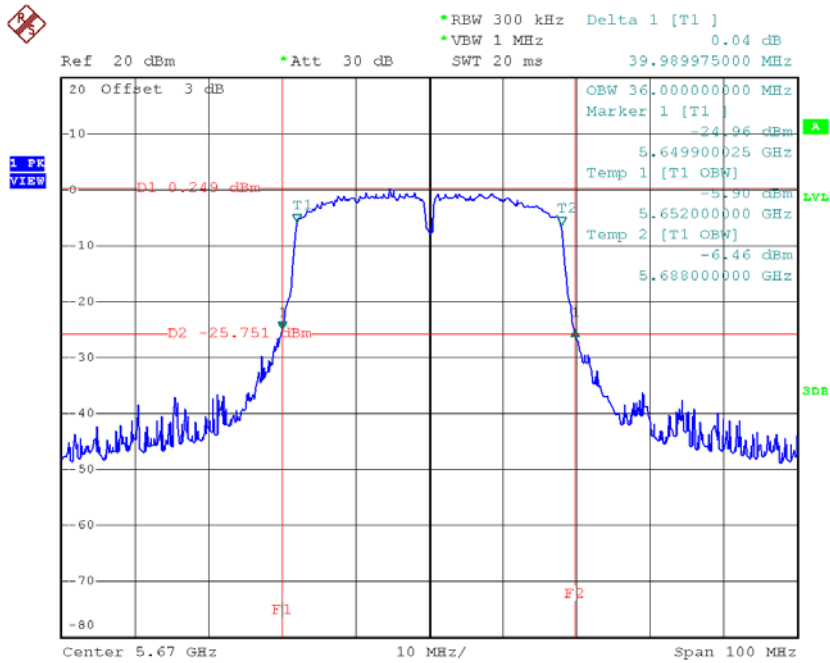

Date: 10. JUL.2017 17:07:54


Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 15.20 | 16.30 | >=500 |
| CH157 | 5785 | 15.30 | 16.30 | >=500 |
| CH165 | 5825 | 15.65 | 16.40 | >=500 |

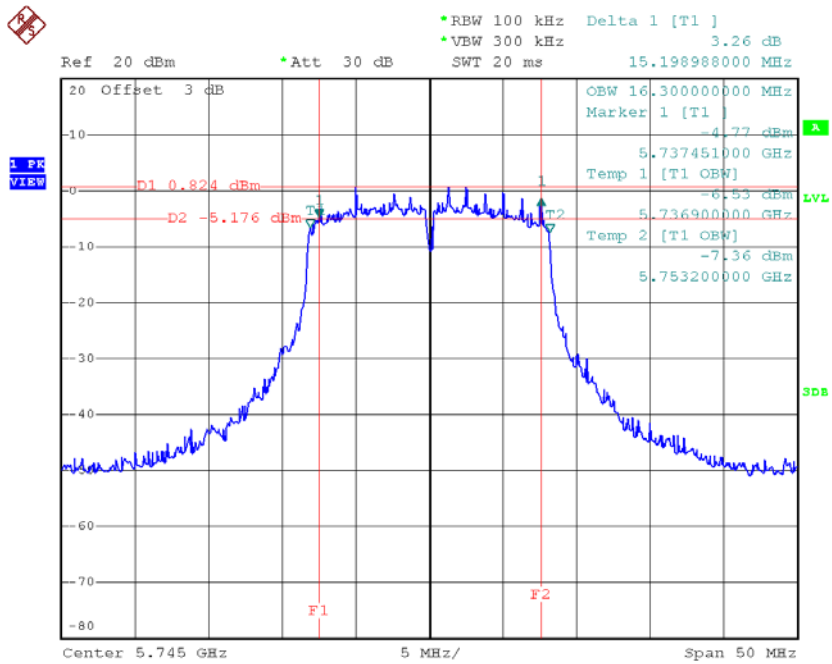TX CH 149


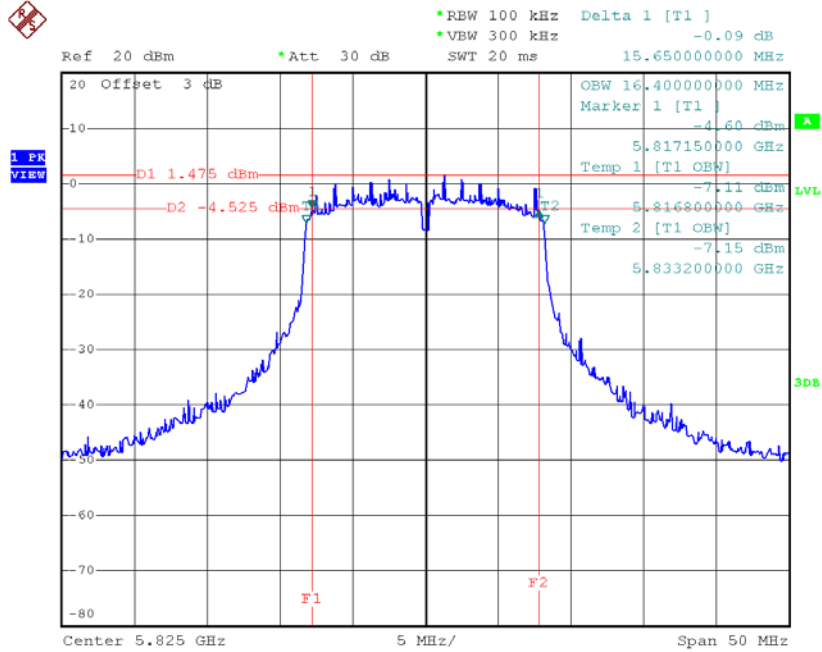
Date: 10. JUL.2017 11:28:48

TX CH 157

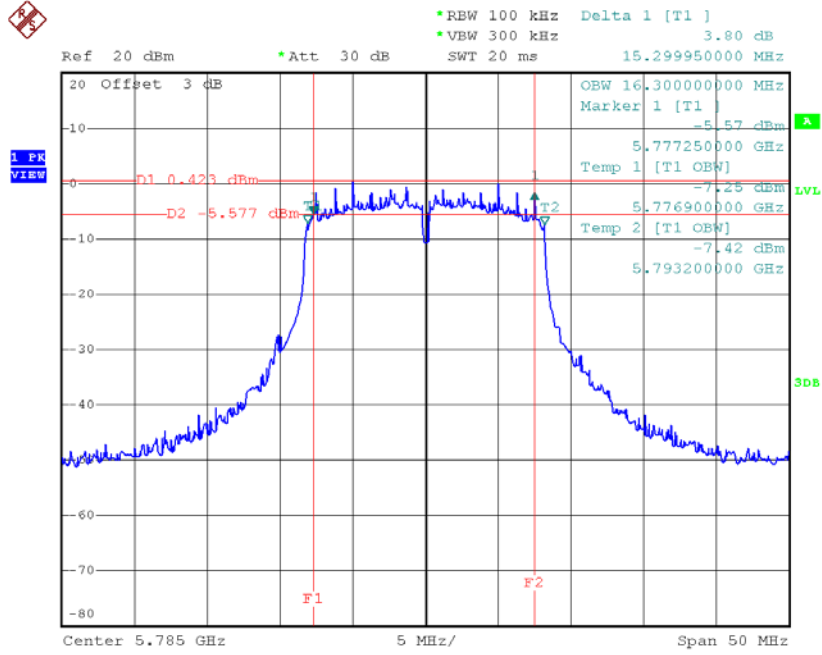

Date: 10. JUL.2017 11:30:45


TX CH 165



Date: 10. JUL.2017 11:35:54


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 15.19 | 17.40 | >=500 |
| CH157 | 5785 | 15.10 | 17.50 | >=500 |
| CH165 | 5825 | 15.15 | 17.40 | >=500 |

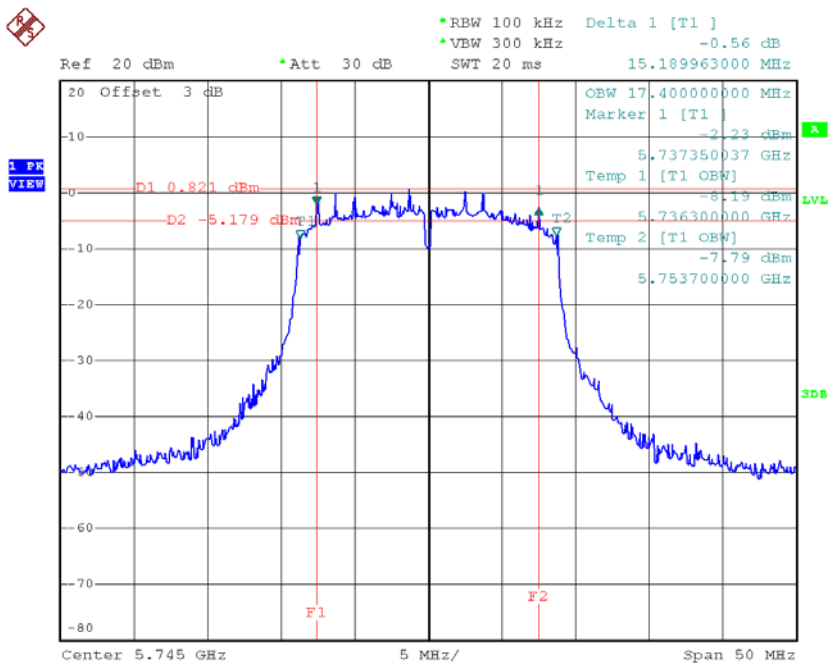TX CH 149


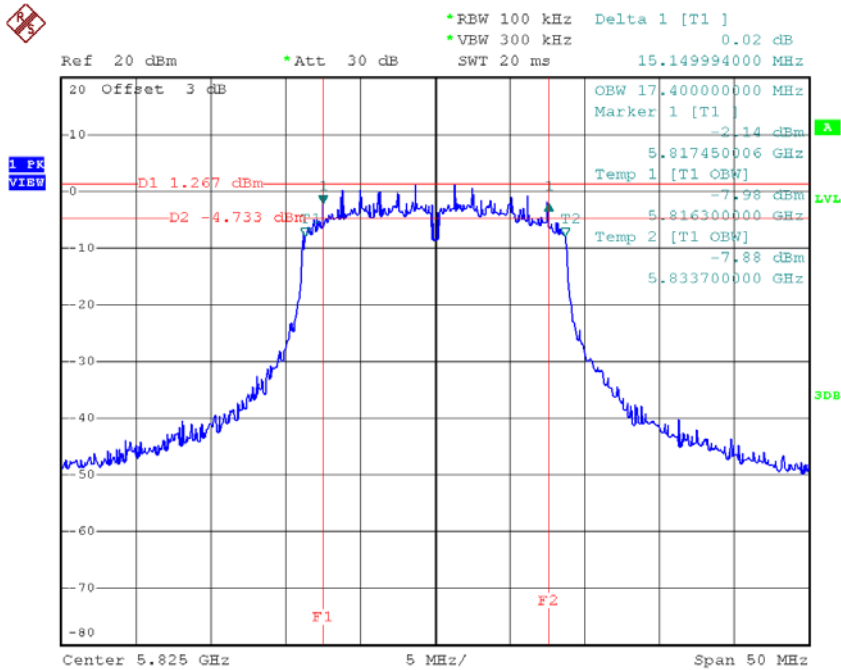
Date: 10. JUL.2017 12:05:03

TX CH 157

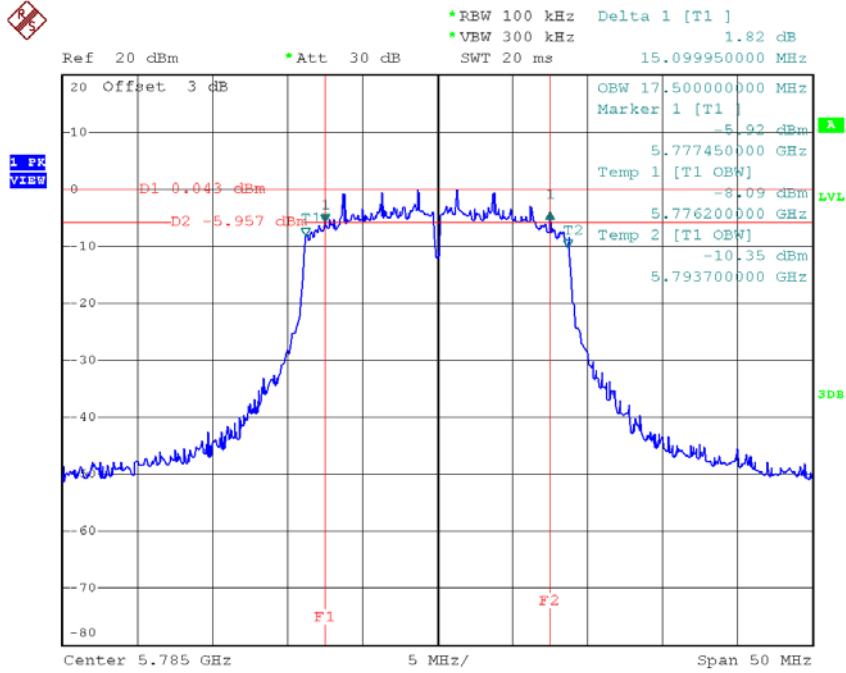

Date: 10. JUL.2017 12:15:56

TX CH 165




Date: 10. JUL.2017 12:19:34

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH151 | 5755 | 35.30 | 36.00 | >=500 |
| CH159 | 5795 | 35.40 | 35.80 | >=500 |

TX CH 151

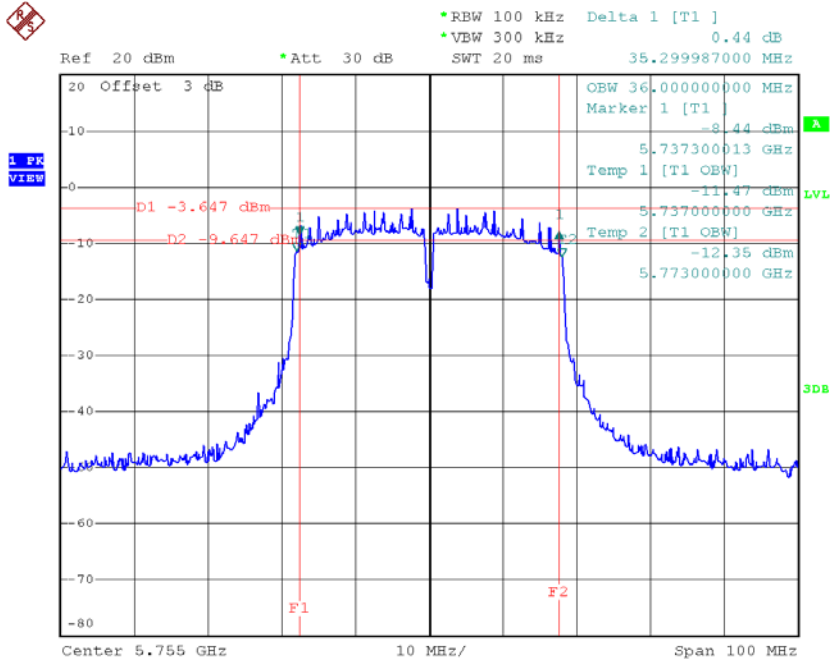

Date: 10. JUL.2017 17:10:00

TX CH 159

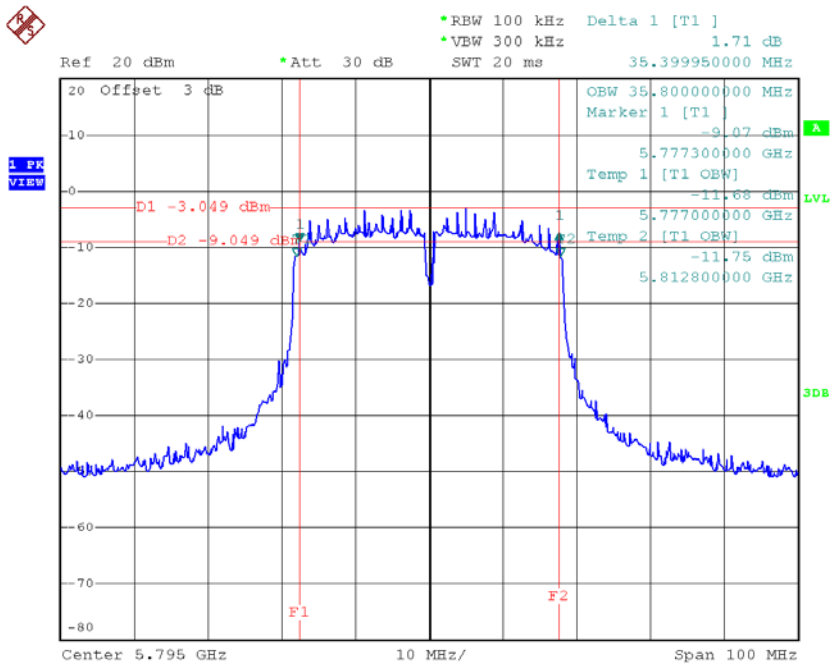


Date: 10. JUL.2017 17:12:01

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH36 | 5180 | 20.55 | 17.50 |
| CH40 | 5200 | 20.41 | 17.40 |
| CH48 | 5240 | 20.59 | 17.60 |

TX CH36

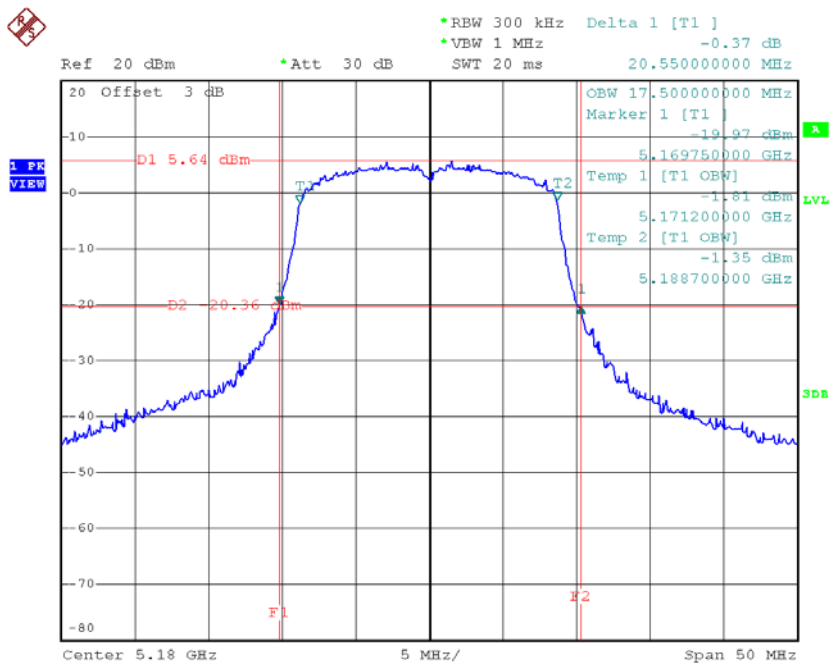


Date: 10. JUL.2017 16:19:07

TX CH40

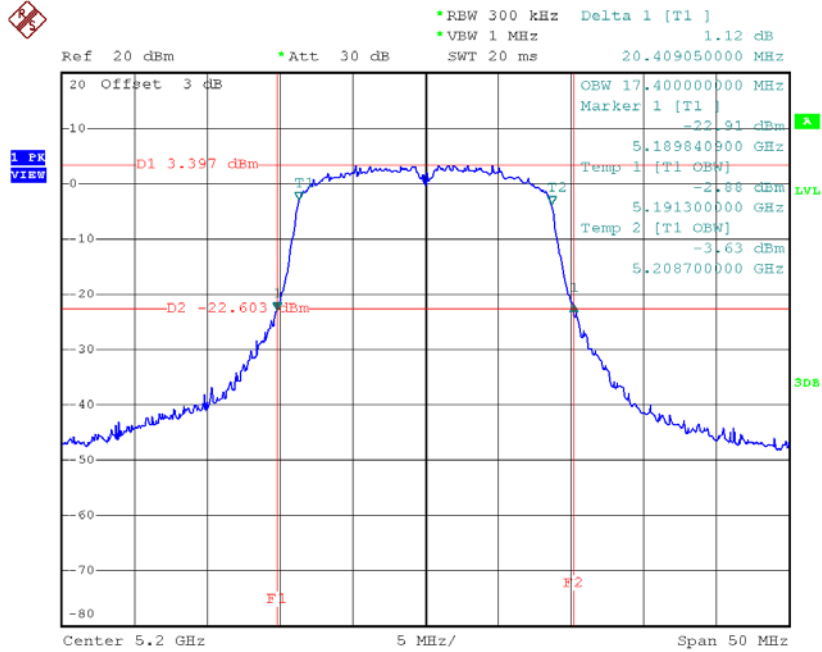

Date: 10. JUL.2017 16:21:00

TX CH48

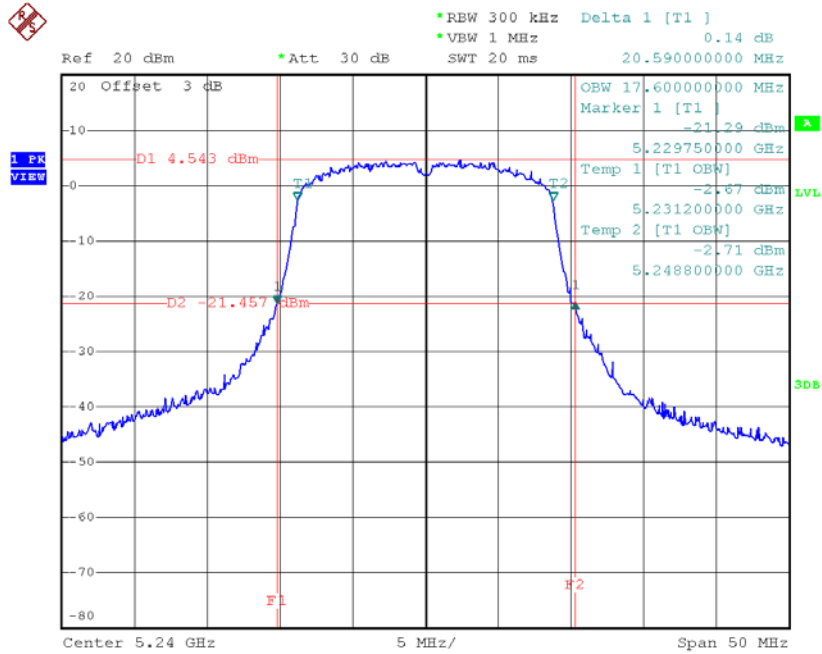


Date: 7. JUL.2017 16:22:40

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH38 | 5190 | 40.01 | 36.00 |
| CH46 | 5230 | 40.70 | 36.00 |

TX CH38

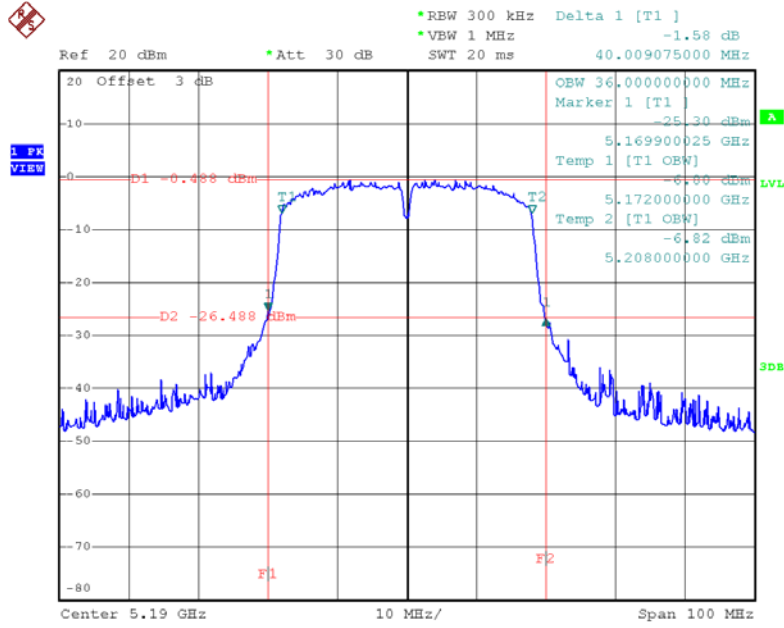

Date: 10. JUL.2017 17:21:13

TX CH46

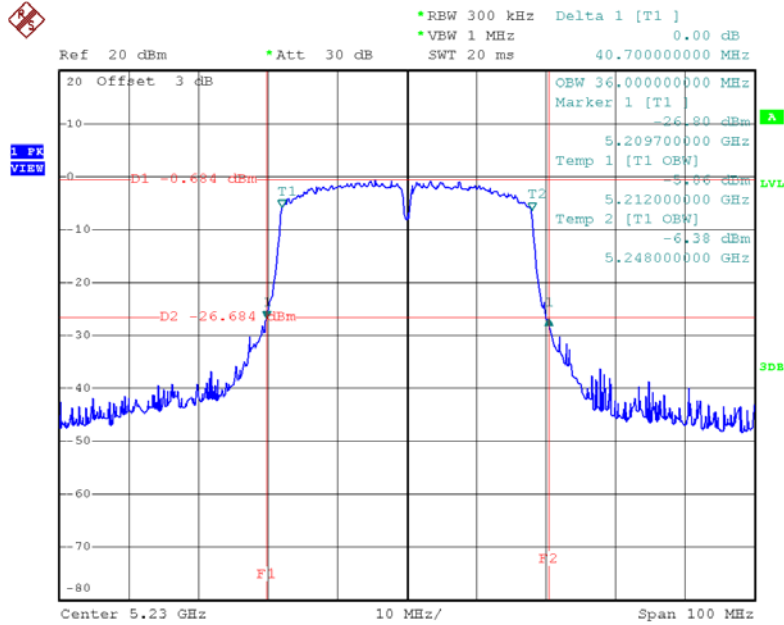


Date: 10. JUL.2017 17:23:30

Test Mode: UNII-1/TX AC80 Mode_CH42

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH42 | 5210 | 81.80 | 75.20 |

TX CH42

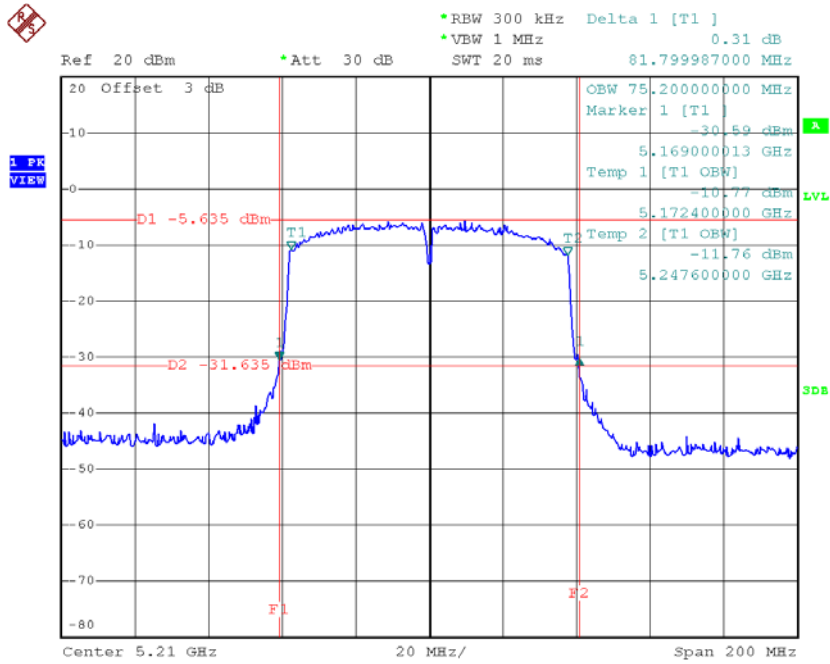


Date: 10. JUL.2017 17:55:58

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH52 | 5260 | 20.15 | 17.60 |
| CH60 | 5300 | 20.40 | 17.50 |
| CH64 | 5320 | 20.65 | 17.50 |

TX CH52

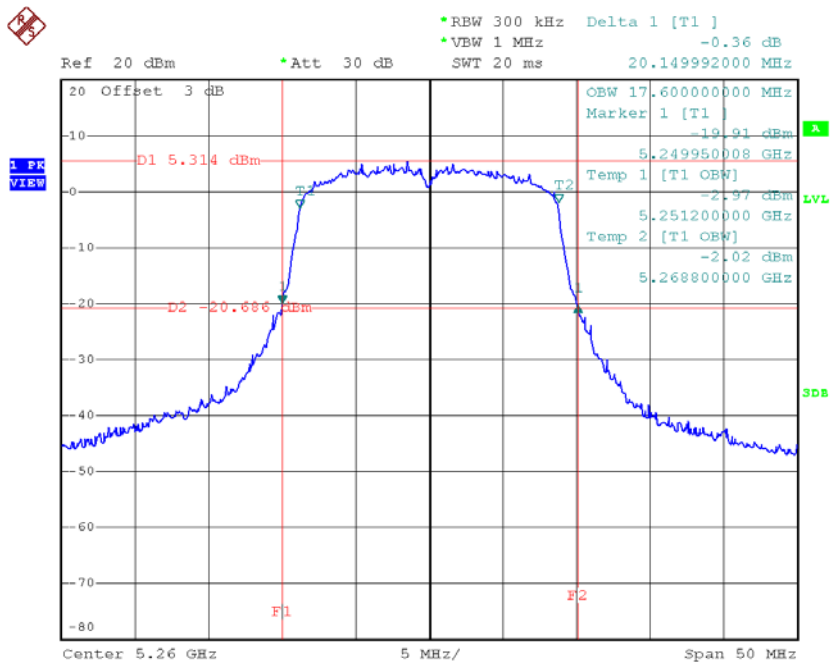


Date: 10. JUL.2017 16:32:26

TX CH60

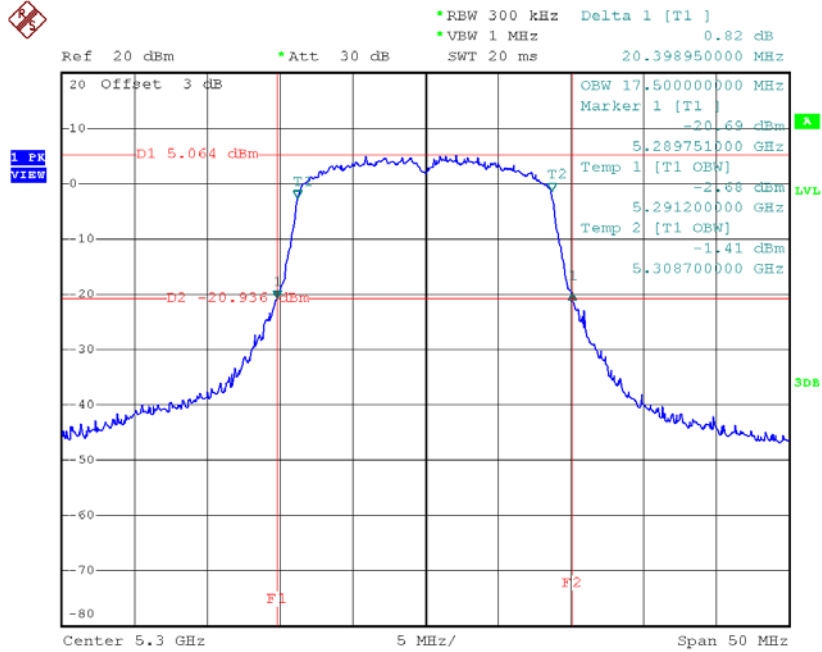

Date: 10. JUL.2017 16:35:28

TX CH64

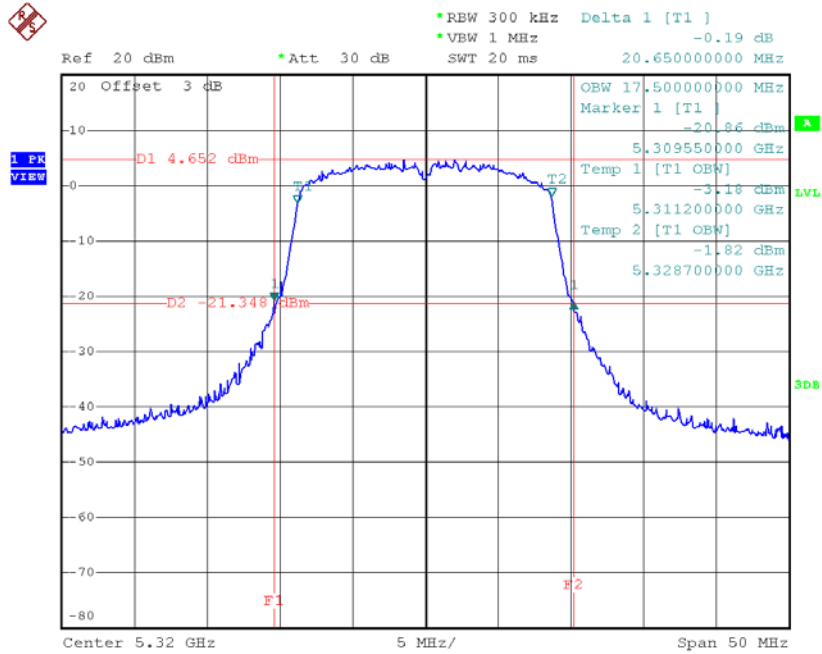


Date: 10. JUL.2017 16:37:10

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH54 | 5270 | 40.90 | 36.00 |
| CH62 | 5310 | 40.50 | 36.00 |

TX CH54

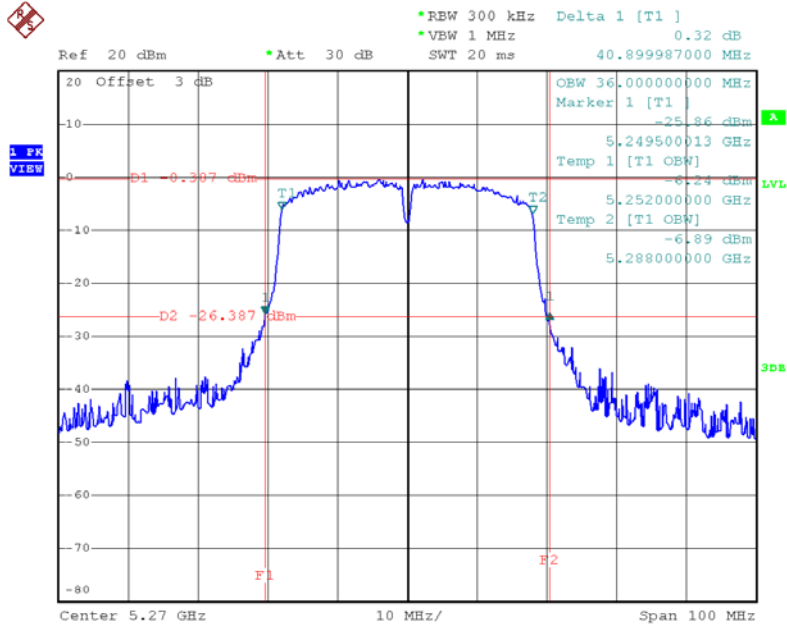

Date: 10. JUL.2017 17:25:16

TX CH62

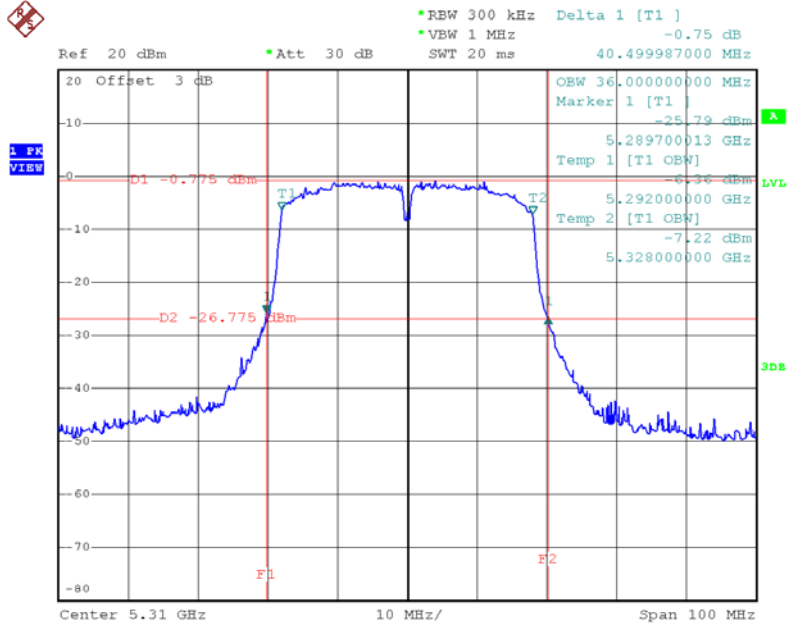


Date: 10. JUL.2017 17:28:42

Test Mode: UNII-2A/TX AC80 Mode_CH58

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH58 | 5290 | 81.80 | 75.20 |


TX CH58

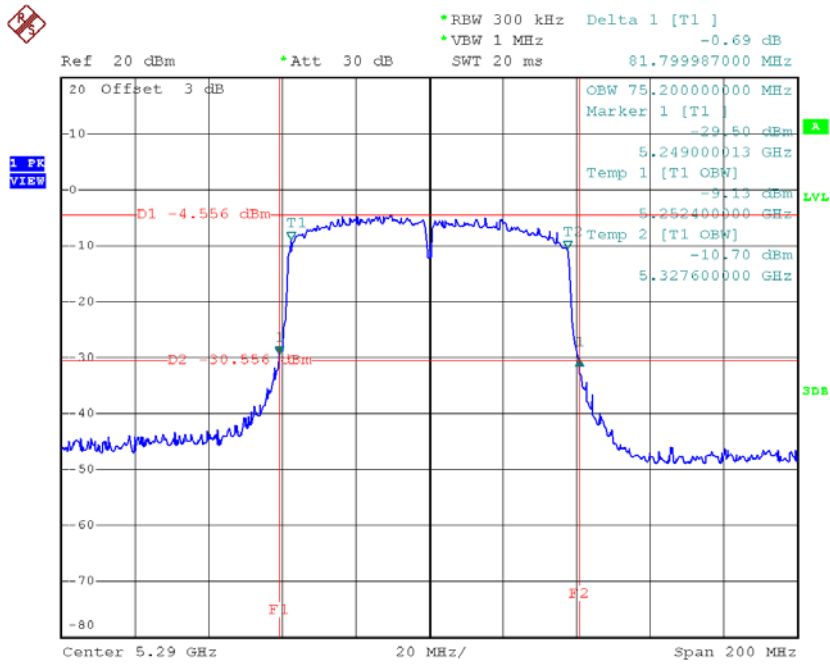

Date: 10. JUL.2017 17:58:28


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH100 | 5500 | 20.65 | 17.40 |
| CH116 | 5580 | 20.55 | 17.60 |
| CH140 | 5700 | 20.59 | 17.50 |

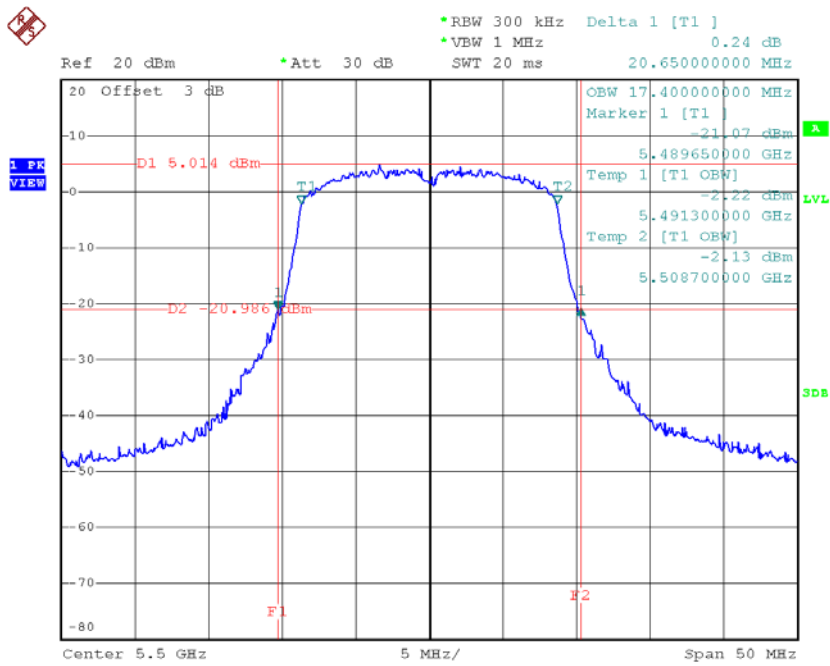TX CH100


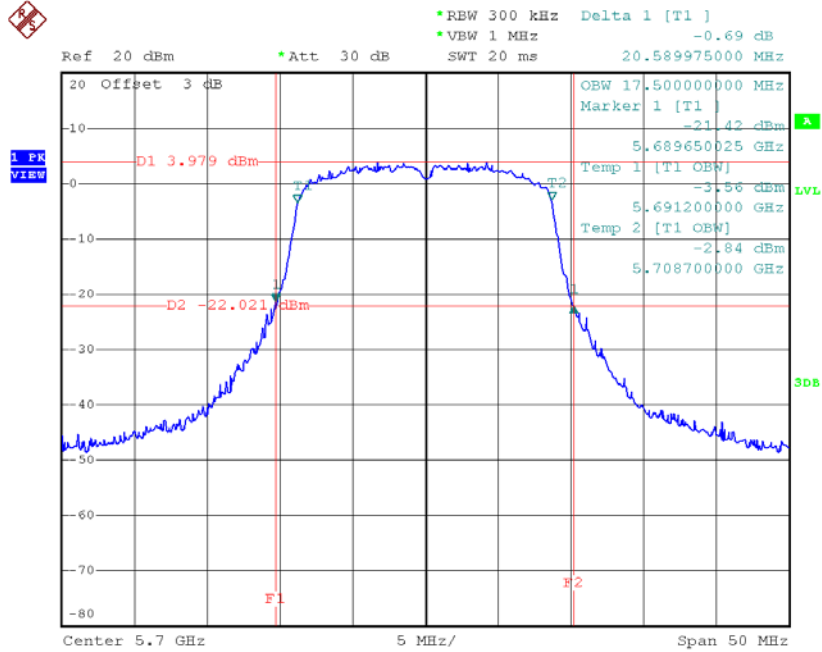
Date: 10. JUL.2017 16:42:49

TX CH116

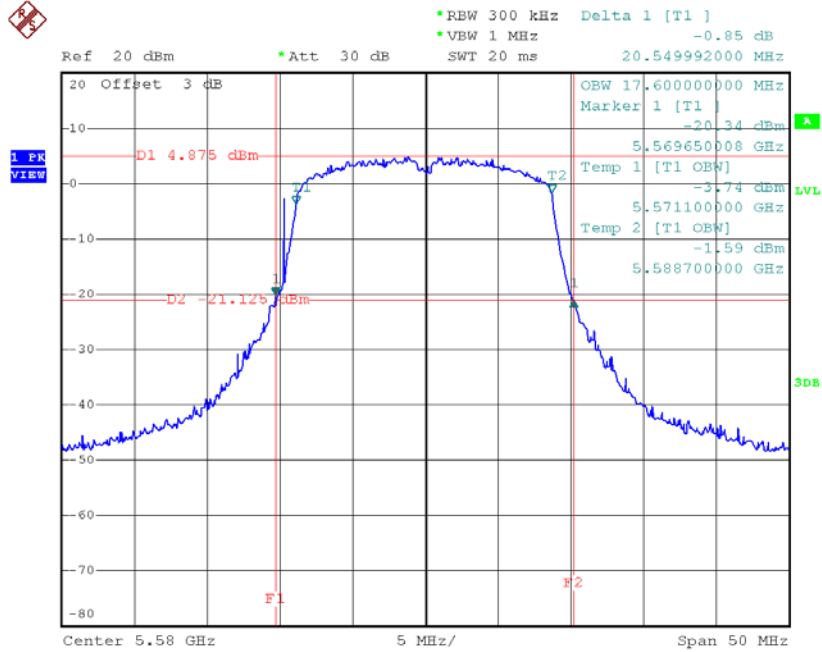

Date: 10.JUL.2017 16:44:36


TX CH140



Date: 10.JUL.2017 16:46:12


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH102 | 5510 | 40.70 | 36.00 |
| CH110 | 5550 | 40.39 | 36.00 |
| CH134 | 5670 | 40.19 | 36.00 |

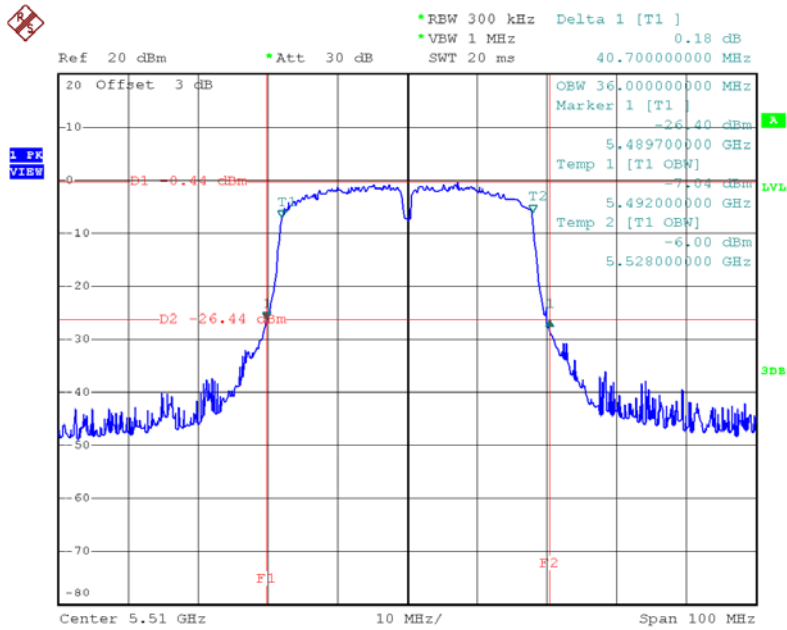TX CH102


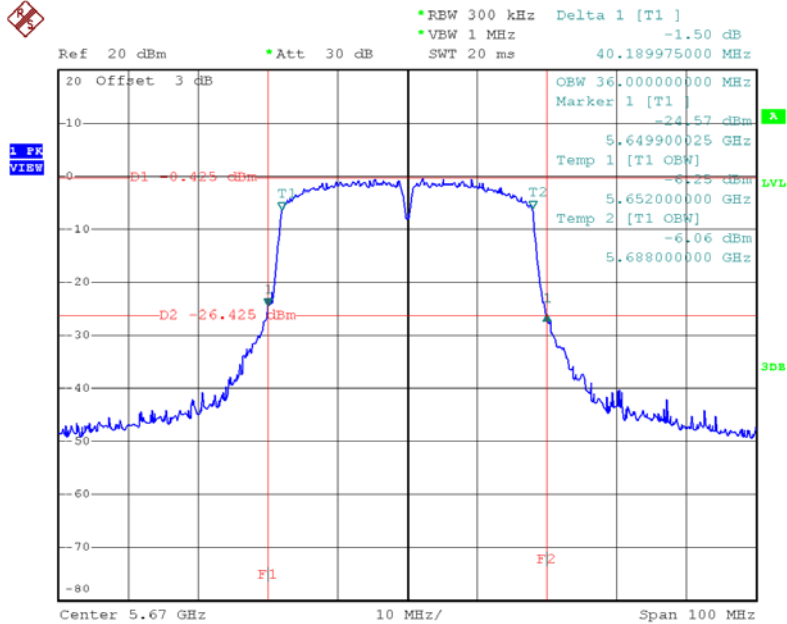
Date: 10. JUL. 2017 17:35:48

TX CH110

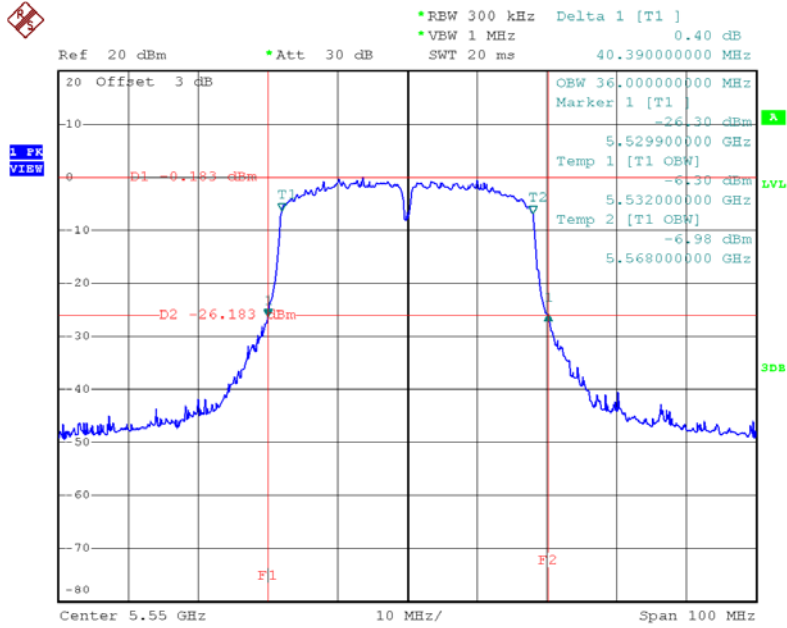

Date: 10. JUL.2017 17:41:02

TX CH134




Date: 10. JUL.2017 17:44:24

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH106 | 5530 | 81.00 | 75.20 |
| CH122 | 5610 | 81.60 | 75.20 |

TX CH106

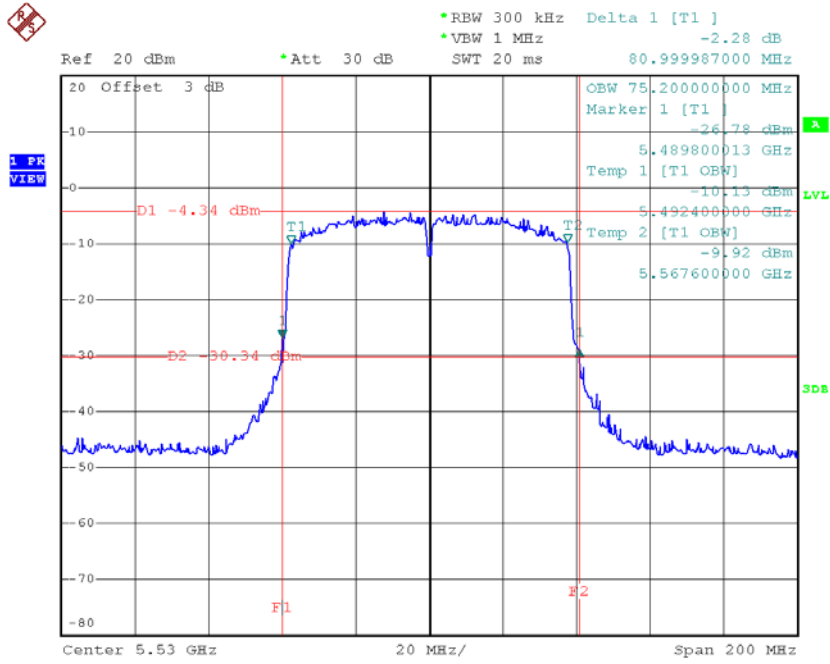

Date: 10. JUL.2017 18:01:26

TX CH122

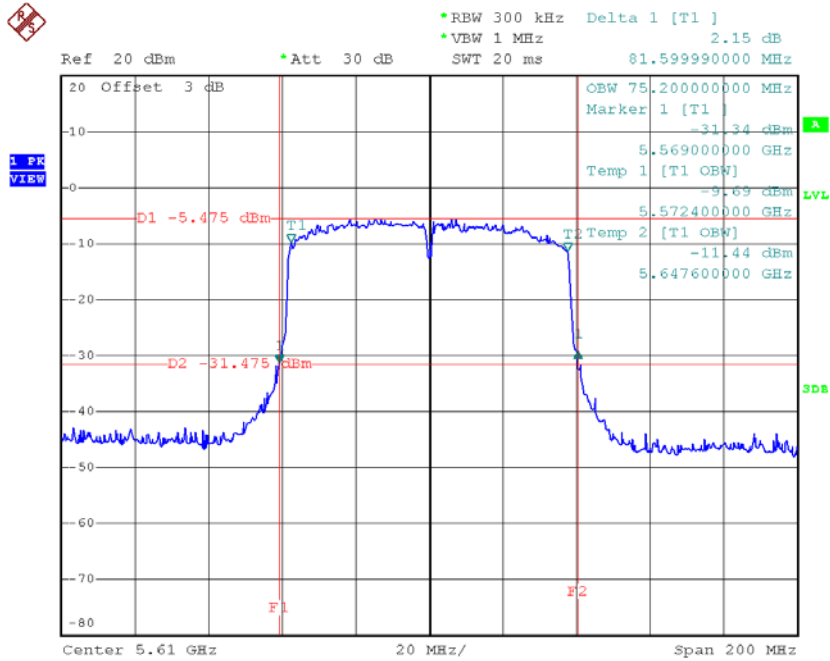


Date: 10. JUL.2017 18:04:18

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149 | 5745 | 15.60 | 17.40 | >=500 |
| CH157 | 5785 | 15.20 | 17.40 | >=500 |
| CH165 | 5825 | 15.80 | 17.40 | >=500 |

TX CH 149

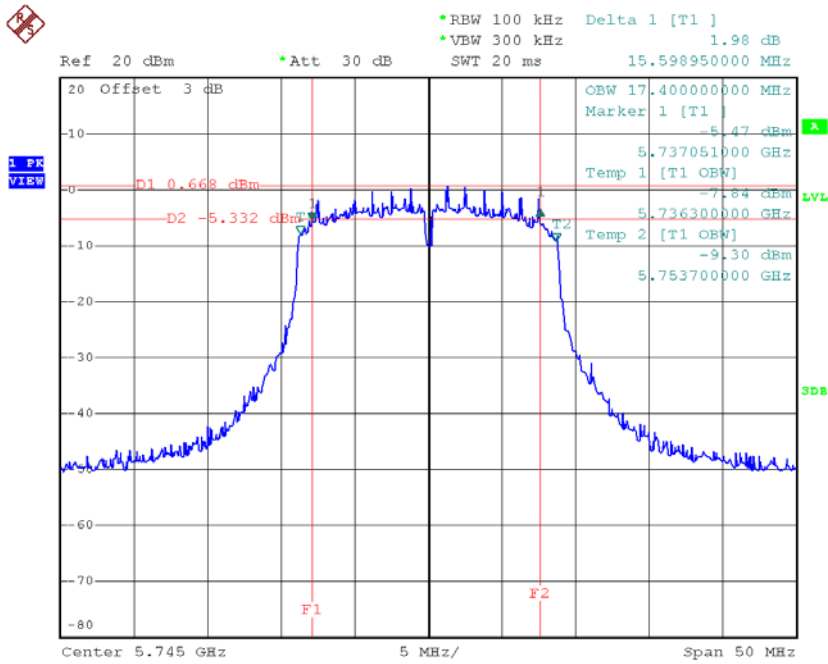


Date: 10. JUL. 2017 16:48:17

TX CH 157

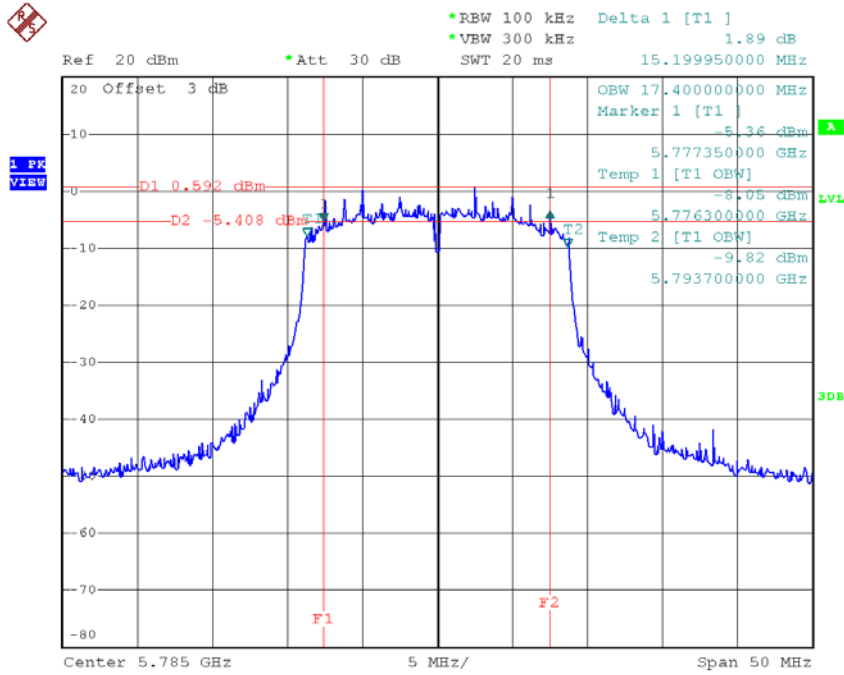

Date: 10. JUL.2017 16:50:18

TX CH 165

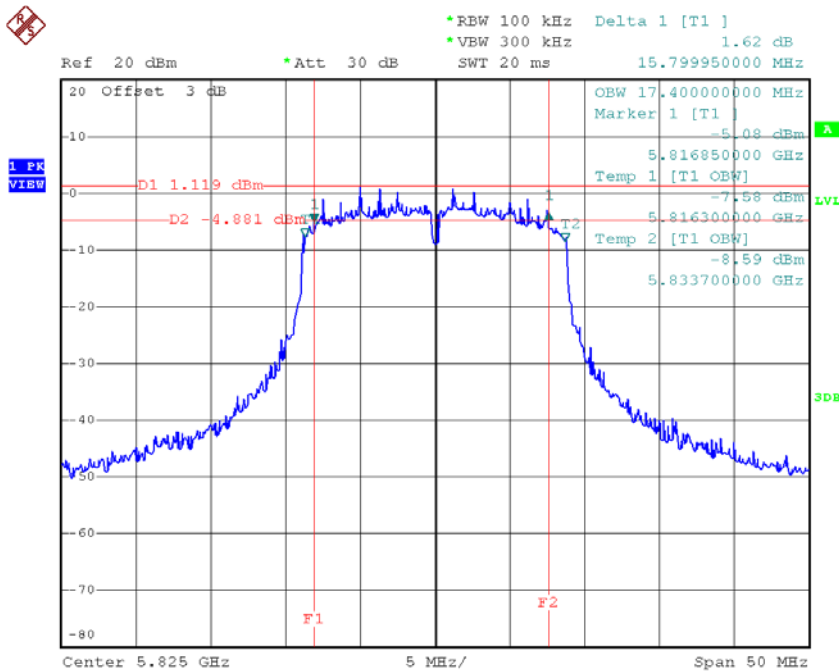


Date: 10. JUL.2017 16:52:07

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH151 | 5755 | 35.30 | 36.00 | >=500 |
| CH159 | 5795 | 34.20 | 35.80 | >=500 |

TX CH 151

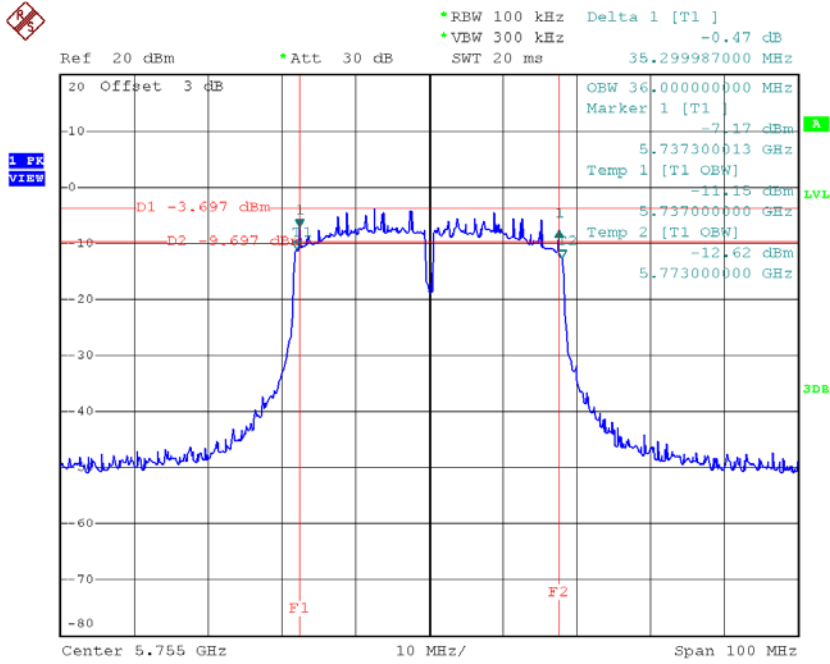

Date: 10. JUL.2017 17:46:23


TX CH 159

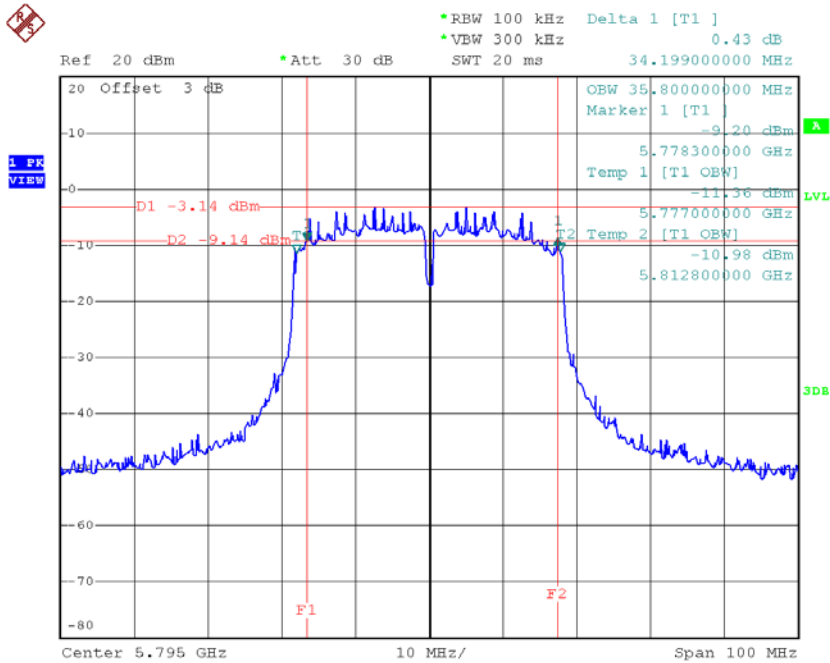

Date: 10. JUL.2017 17:48:20

Test Mode: UNII-3/ TX AC80 Mode_CH155

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH155 | 5775 | 74.20 | 74.80 | >=500 |

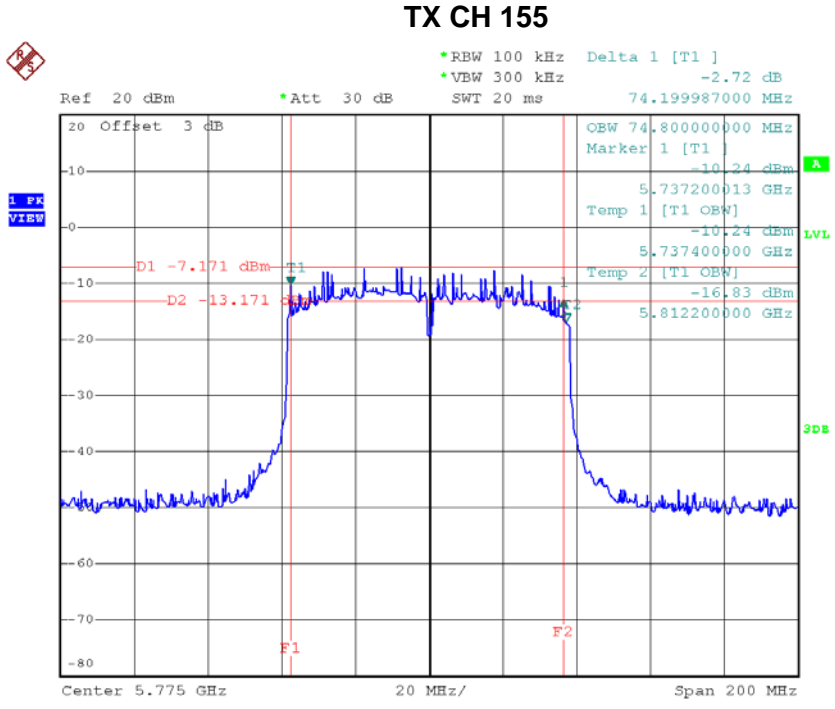

Date: 10.JUL.2017 18:07:35

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 15.84 | 0.23 | 16.07 | 24.00 | 0.25 |
| CH40 | 5200 | 15.80 | 0.23 | 16.03 | 24.00 | 0.25 |
| CH48 | 5240 | 15.52 | 0.23 | 15.75 | 24.00 | 0.25 |

Test Mode: UNII-1/TX A Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 15.90 | 0.23 | 16.13 | 24.00 | 0.25 |
| CH40 | 5200 | 15.58 | 0.23 | 15.81 | 24.00 | 0.25 |
| CH48 | 5240 | 15.09 | 0.23 | 15.32 | 24.00 | 0.25 |

Test Mode: UNII-1/TX A Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36 | 5180 | 19.11 | 24.00 | 0.25 |
| CH40 | 5200 | 18.93 | 24.00 | 0.25 |
| CH48 | 5240 | 18.55 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N20 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 15.89 | 0.25 | 16.14 | 24.00 | 0.25 |
| CH40 | 5200 | 15.77 | 0.25 | 16.02 | 24.00 | 0.25 |
| CH48 | 5240 | 15.46 | 0.25 | 15.71 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N20 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 15.82 | 0.25 | 16.07 | 24.00 | 0.25 |
| CH40 | 5200 | 15.43 | 0.25 | 15.68 | 24.00 | 0.25 |
| CH48 | 5240 | 14.73 | 0.25 | 14.98 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N20 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36 | 5180 | 19.12 | 24.00 | 0.25 |
| CH40 | 5200 | 18.86 | 24.00 | 0.25 |
| CH48 | 5240 | 18.37 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N40 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38 | 5190 | 14.97 | 0.59 | 15.56 | 24.00 | 0.25 |
| CH46 | 5230 | 14.99 | 0.59 | 15.58 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N40 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38 | 5190 | 14.97 | 0.59 | 15.56 | 24.00 | 0.25 |
| CH46 | 5230 | 14.07 | 0.59 | 14.66 | 24.00 | 0.25 |

Test Mode: UNII-1/TX N40 Mode _Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38 | 5190 | 18.57 | 24.00 | 0.25 |
| CH46 | 5230 | 18.15 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX A Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52 | 5260 | 15.42 | 0.23 | 15.65 | 24.00 | 0.25 |
| CH60 | 5300 | 15.56 | 0.23 | 15.79 | 24.00 | 0.25 |
| CH64 | 5320 | 16.00 | 0.23 | 16.23 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX A Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52 | 5260 | 14.93 | 0.23 | 15.16 | 24.00 | 0.25 |
| CH60 | 5300 | 14.60 | 0.23 | 14.83 | 24.00 | 0.25 |
| CH64 | 5320 | 15.39 | 0.23 | 15.62 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX A Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52 | 5260 | 18.42 | 24.00 | 0.25 |
| CH60 | 5300 | 18.35 | 24.00 | 0.25 |
| CH64 | 5320 | 18.94 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N20 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52 | 5260 | 15.94 | 0.25 | 16.19 | 24.00 | 0.25 |
| CH60 | 5300 | 15.98 | 0.25 | 16.23 | 24.00 | 0.25 |
| CH64 | 5320 | 15.72 | 0.25 | 15.97 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N20 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52 | 5260 | 15.10 | 0.25 | 15.35 | 24.00 | 0.25 |
| CH60 | 5300 | 14.72 | 0.25 | 14.97 | 24.00 | 0.25 |
| CH64 | 5320 | 14.76 | 0.25 | 15.01 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N20 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52 | 5260 | 18.80 | 24.00 | 0.25 |
| CH60 | 5300 | 18.66 | 24.00 | 0.25 |
| CH64 | 5320 | 18.53 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N40 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54 | 5270 | 14.88 | 0.59 | 15.47 | 24.00 | 0.25 |
| CH62 | 5310 | 14.72 | 0.59 | 15.31 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N40 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54 | 5270 | 13.94 | 0.59 | 14.53 | 24.00 | 0.25 |
| CH62 | 5310 | 13.70 | 0.59 | 14.29 | 24.00 | 0.25 |

Test Mode: UNII-2A/TX N40 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54 | 5270 | 18.03 | 24.00 | 0.25 |
| CH62 | 5310 | 17.84 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX A Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100 | 5500 | 15.58 | 0.23 | 15.81 | 24.00 | 0.25 |
| CH116 | 5580 | 15.96 | 0.23 | 16.19 | 24.00 | 0.25 |
| CH140 | 5700 | 15.98 | 0.23 | 16.21 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX A Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100 | 5500 | 15.64 | 0.23 | 15.87 | 24.00 | 0.25 |
| CH116 | 5580 | 15.74 | 0.23 | 15.97 | 24.00 | 0.25 |
| CH140 | 5700 | 15.46 | 0.23 | 15.69 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX A Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100 | 5500 | 18.85 | 24.00 | 0.25 |
| CH116 | 5580 | 19.09 | 24.00 | 0.25 |
| CH140 | 5700 | 18.97 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N20 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100 | 5500 | 16.06 | 0.25 | 16.31 | 24.00 | 0.25 |
| CH116 | 5580 | 15.79 | 0.25 | 16.04 | 24.00 | 0.25 |
| CH140 | 5700 | 15.98 | 0.25 | 16.23 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N20 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100 | 5500 | 16.03 | 0.25 | 16.28 | 24.00 | 0.25 |
| CH116 | 5580 | 15.37 | 0.25 | 15.62 | 24.00 | 0.25 |
| CH140 | 5700 | 15.23 | 0.25 | 15.48 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N20 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100 | 5500 | 19.31 | 24.00 | 0.25 |
| CH116 | 5580 | 18.85 | 24.00 | 0.25 |
| CH140 | 5700 | 18.88 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N40 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102 | 5510 | 14.97 | 0.59 | 15.56 | 24.00 | 0.25 |
| CH110 | 5550 | 14.39 | 0.59 | 14.98 | 24.00 | 0.25 |
| CH134 | 5670 | 14.73 | 0.59 | 15.32 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N40 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102 | 5510 | 15.08 | 0.59 | 15.67 | 24.00 | 0.25 |
| CH110 | 5550 | 14.48 | 0.59 | 15.07 | 24.00 | 0.25 |
| CH134 | 5670 | 14.63 | 0.59 | 15.22 | 24.00 | 0.25 |

Test Mode: UNII-2C/TX N40 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102 | 5510 | 18.62 | 24.00 | 0.25 |
| CH110 | 5550 | 18.03 | 24.00 | 0.25 |
| CH134 | 5670 | 18.28 | 24.00 | 0.25 |

Test Mode: UNII-3/ TX A Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 15.88 | 0.23 | 16.11 | 30.00 | 1.00 |
| CH157 | 5785 | 15.89 | 0.23 | 16.12 | 30.00 | 1.00 |
| CH165 | 5825 | 15.70 | 0.23 | 15.93 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX A Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 15.64 | 0.23 | 15.87 | 30.00 | 1.00 |
| CH157 | 5785 | 16.00 | 0.23 | 16.23 | 30.00 | 1.00 |
| CH165 | 5825 | 15.88 | 0.23 | 16.11 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX A Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149 | 5745 | 19.00 | 30.00 | 1.00 |
| CH157 | 5785 | 19.18 | 30.00 | 1.00 |
| CH165 | 5825 | 19.03 | 30.00 | 1.00 |

Test Mode: UNII-3/TX N20 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 15.51 | 0.25 | 15.76 | 30.00 | 1.00 |
| CH157 | 5785 | 15.87 | 0.25 | 16.12 | 30.00 | 1.00 |
| CH165 | 5825 | 15.36 | 0.25 | 15.61 | 30.00 | 1.00 |

Test Mode: UNII-3/TX N20 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149 | 5745 | 15.04 | 0.25 | 15.29 | 30.00 | 1.00 |
| CH157 | 5785 | 15.99 | 0.25 | 16.24 | 30.00 | 1.00 |
| CH165 | 5825 | 15.10 | 0.25 | 15.35 | 30.00 | 1.00 |

Test Mode: UNII-3/TX N20 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149 | 5745 | 18.54 | 30.00 | 1.00 |
| CH157 | 5785 | 19.19 | 30.00 | 1.00 |
| CH165 | 5825 | 18.49 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX N40 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151 | 5755 | 14.84 | 0.59 | 15.43 | 30.00 | 1.00 |
| CH159 | 5795 | 14.48 | 0.59 | 15.07 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX N40 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151 | 5755 | 14.94 | 0.59 | 15.53 | 30.00 | 1.00 |
| CH159 | 5795 | 14.55 | 0.59 | 15.14 | 30.00 | 1.00 |

Test Mode: UNII-3/ TX N40 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151 | 5755 | 18.49 | 30.00 | 1.00 |
| CH159 | 5795 | 18.11 | 30.00 | 1.00 |

Test Mode: UNII-1/TX AC20 Mode_ANT 1

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 16.02 | 0.24 | 16.26 | 24.00 | 0.25 |
| CH40 | 5200 | 15.99 | 0.24 | 16.23 | 24.00 | 0.25 |
| CH48 | 5240 | 15.76 | 0.24 | 16.00 | 24.00 | 0.25 |

Test Mode: UNII-1/TX AC20 Mode_ANT 2

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36 | 5180 | 16.01 | 0.24 | 16.25 | 24.00 | 0.25 |
| CH40 | 5200 | 15.76 | 0.24 | 16.00 | 24.00 | 0.25 |
| CH48 | 5240 | 15.06 | 0.24 | 15.30 | 24.00 | 0.25 |

Test Mode: UNII-1/TX AC20 Mode_Total

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36 | 5180 | 19.27 | 24.00 | 0.25 |
| CH40 | 5200 | 19.13 | 24.00 | 0.25 |
| CH48 | 5240 | 18.68 | 24.00 | 0.25 |