

Radio Satellite Communication Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-0 Telefax: -9075

Test report No.: 2-3535-01-02/04 This test report consists of 62 pages Page 1 (62)

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3463 (IC)





Independent ETSI compliance test house



Accredited Bluetooth<sup>TM</sup> Test Facility (BQTF)

Test report no.: 2-3535-01-02/04

FCC Part 24/15 Type: CT 8558 FCC ID: RXXCT8558



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 2 (62)

## **Table of Contents**

- 1 General information
  - 1.1 Notes
  - 1.2 Testing laboratory
  - 1.3 Details of applicant
  - 1.4 Application details
  - 1.5 Test item
  - 1.6 Test standards
- 2 Technical test
  - 2.1 Summary of test results
  - 2.2 Test report



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 3 (62)

#### 1 General information

#### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

### 1.2 Testing laboratory

CETECOM ICT Services GmbH Untertürkheimer Straße 6 - 10 66117 Saarbrücken

Germany

Telefone : + 49 681 598 - 9100
Telefax : + 49 681 598 - 9075
E-mail : info@ict.cetecom.de
Internet : www.cetecom-ict.de

### **Accredited testing laboratory**

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-081/94-D0

Listed by: Federal Communications Commission (FCC)

Identification/Registration No: 90462 Accredited Bluetooth Test Facility (BQTF)

BLUETOOTH<sup>TM</sup> is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

### 1.3 Details of applicant

Name : Cellon France
Street : Route D`Angers

City: 72093 Le Mans Cedex 9

Country: France

Telephon: + 33 2-4341-1805 Telefax: + 33 2-4341-1229

Contact: Mr. Kefi Ben Ali Telephone: + 33 2-4341-1805 e-mail: + 33 2-4341-1229

#### 1.4 Application details

Date of receipt of application : 2004-02-13 Date of receipt of test item : 2004-02-26

Date of test : 2004-03-01 to 2004-03-02



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 4 (62)

1.5 Test item

Type of equipment : **Tripple Band GSM/PCS Mobile Phone (900/1800/1900 MHz)** 

Type designation

Manufacturer : applicant

Street

City :

Country

Additional information :

Frequency : 1850.2 – 1909.8 MHz

Type of modulation : 300KGXW /
Number of channels : 300 (PCS1900)
Antenna : Integrated antenna

Power supply (DC) : 3.7 V

Power supply (AC) : 220 - 240V (50Hz)

Output power GSM 1900 : cond : 29.3 dBm Peak , ERP: 29.55 dBm (Burst);

EIRP: 31.7 dBm (Burst)

Type of equipment : Temperature range :  $-30^{\circ}\text{C} - +60^{\circ}\text{C}$ 

FCC – ID : RXXCT8558

IC

Hardware : PR 2

Software : 021600020202

S/No : 000030

1.6 Test standards: FCC Part 24

FCC Part 15



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 5 (62)

#### 2 Technical test

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link (GPRS mode 10)).

### **Remarks:**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### **FINAL VERDICT: PASS**

Technical responsibility for area of testing:

2004-03-03	<b>RSC 8431</b>	Gillmann D.	
Date	Section	Name	Signature

Technical responsibility for area of testing:

2004-03-03	RSC8412	Hausknecht D.	W. Laus kum
Date	Section	Name	Signature



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 6 (62)

### 2.2 Test report

**TEST REPORT** 

Test report no.: 2-3535-01-02/04

**Test site** 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 7 (62) TEST REPORT REFERENCE LIST OF MEASUREMENTS PARAMETER TO BE MEASURED **PAGE** Part PCS 1900 **POWER OUTPUT** 8 SUBCLAUSE § 24.232 FREQUENCY STABILITY **SUBCLAUSE § 24.235 10** AFC FREQ ERROR vs. VOLTAGE 12 AFC FREQ ERROR vs. TEMPERATURE 13 **EMISSIONS LIMITS** 13 **SUBCLAUSE §24.238** RECEIVER SPURIOUS RADIATION **SUBCLAUSE § 15.109** 23 CONDUCTED SPURIOUS EMISSIONS 28 BLOCK EDGE COMPLIANCE FOR BLOCK A AND C 37 OCCUPIED BANDWIDTH **SUBCLAUSE §2.989 39** TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS 49



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 8 (62)

### **POWER OUTPUT**

**SUBCLAUSE § 24.232** 

### **Summary:**

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### **Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation. The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average) This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

### **Limits:**

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

### **Power Measurements:**

#### **Conducted:**

		Peak	Average in the burst
Frequency	Power Step	Output Power	Output Power
(MHz)		(dBm)	(dBm)
1850.2	0	29.3	29.2
1880.0	0	29.0	28.9
1909.8	0	28.8	28.7
Measuremen	t uncertainty	±0.:	5 dB



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 9 (62)

#### **EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

#### Method of Measurement:

- 1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 2. A "reference path loss" is established as Pin + 2.1 Pr.
- 3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
- 4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
- 5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
- 6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
- 7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi.

#### **Limits:**

Power Step	Burst PEAK EIRP (dBm)
0	<33

#### Power Measurements ( Radiated )

Frequency	Power Step	BURST PEAK EIRP (dBm)		MODULATION AVERAGE (dBm)	
(MHz)		EIRP	ERP	EIRP	ERP
1850.2	0	29.1	26.95	20.1	17.95
1880.0	0	29.1	26.95	20.1	17.95
1909.8	0	28.8	26.65	19.8	17.65
Measurement uncertainty		±3 dB			



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 10 (62)

### FREQUENCY STABILITY

**SUBCLAUSE § 24.235** 

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the mobile station to overnight soak at -30 C.
- 3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal 3.8 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.8 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
- 6. Subject the mobile station to overnight soak at +60 C.
- 7. With the mobile station, powered with 3.8 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
- 8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
- 9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.8 V dc.



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 11 (62)

## AFC FREQ ERROR vs. VOLTAGE


Voltage	Frequency Error	Frequency Error	Frequency Error
( <b>V</b> )	(Hz)	(%)	(ppm)
3.3	-38	-0,00000202	-0,0202
3.4	-34	-0,00000181	-0,0181
3.5	-20	-0,00000106	-0,0106
3.6	-12	-0,00000064	-0,0064
3.7	-4	-0,00000021	-0,0021
3.8	12	0,00000064	0,0064
3.9	18	0,00000096	0,0096
4.0	20	0,00000106	0,0106
4.1	14	0,0000074	0,0074
4.2	22	0,00000117	0,0117
4.3	28	0,00000149	0,0149
4.4	32	0,00000170	0,0170


### AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE	Frequency Error	Frequency Error	Frequency Error
(°C)	(Hz)	(%)	(ppm)
-30	6	-0,00000117	-0,0117
-20	1	-0,00000053	-0,0053
-10	-7	0,00000165	0,0165
±0.0	-15	0,00000261	0,0261
+10	-12	0,00000202	0,0202
+20	-18	0,00000138	0,0138
+30	-25	0,00000074	0,0074
+40	-32	0,00000149	0,0149
+50	-38	0,00000128	0,0128
+60	-43	0,00000160	0,0160



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 12 (62)

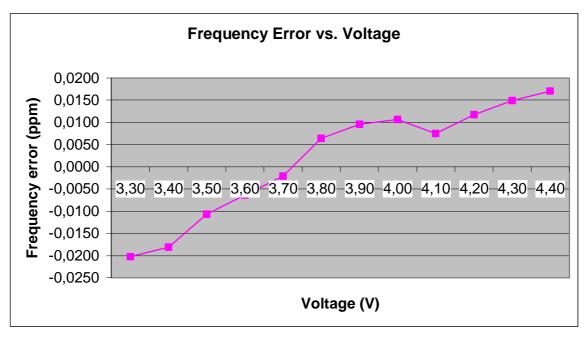

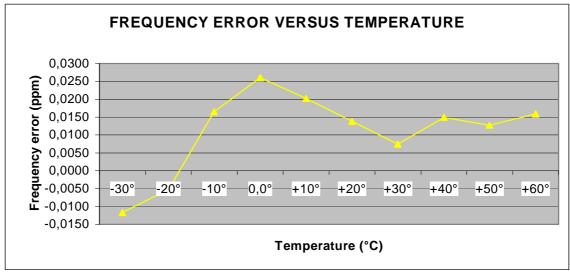



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 13 (62)

### **EMISSIONS LIMITS**

§24.238

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 14 (62)

#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

#### **RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:**

	EM	ISSION LIMITAT	IONS	
f (MHz)	amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
	•	CH 512		
1 850.2	29.1	-13.0		carrier
		(42.1 dBc)	75.2	complies
		CH 661		
1 880.0	29.1	-13.0 (42.1 dBc)		carrier
		CH 810		
1 909.8	28.8	-13.0		carrier
		(41.8 dBc)		
Measurement uncertainty ± 0.5dB				



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 15 (62)

#### FCC Rule 47

### Part 15 Magnetics


EUT: CT 8558 Manufacturer: Cellon

Operating Condition: Traffic mode
Test Site: Cetecom, Room 6

Operator: Gillmann
Test Specification: 15.109
Comment: 220 V/50Hz

Start of Test: 01.03.04 / 13:18:21


### Traffic mode (this is valid for all 3 channels up to 30 MHz)

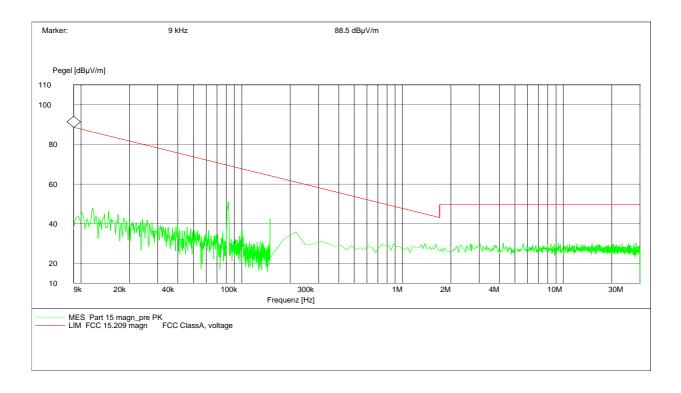



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 16 (62)

### Channel 512 (up to 4 GHz)

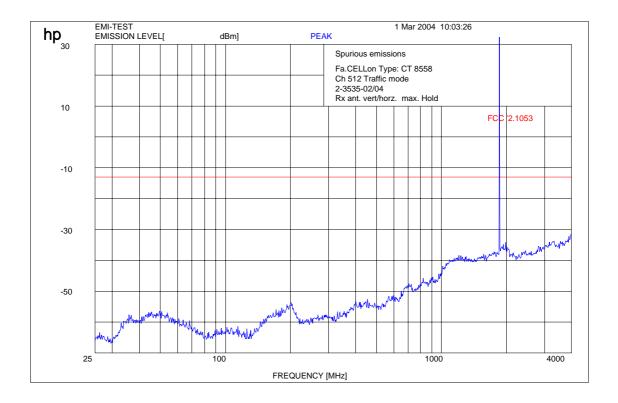


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1GHz : RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 17 (62)

### Channel 512 (up to 12 GHz)

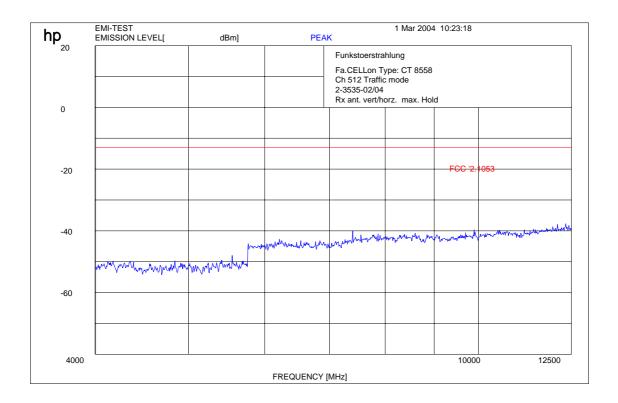

f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 18 (62)

### Channel 512: - 25 GHz valid for all three channels




RBW 1 MHz VBW 3 MHz SWT100 ms

Ref 30	dBm		Att 1	) dB	SWT10				
30 Off	set 20	dВ							
20									
10									
0									
-10									
10	D1 -13 d	lBm ———							
-20									
-30									بالمرا المراد
Thirth program	W. hayan	many water	ulunun 1414.	wwwww	mehmen	moreon	mmm	Mysemm	www.
-40									
-50									
-60									
-70									
Start 1	2 GHz	<u> </u>		1.3	GHz/			Stop	25 GHz



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 19 (62)

### Channel 661 (up to 4 GHz)

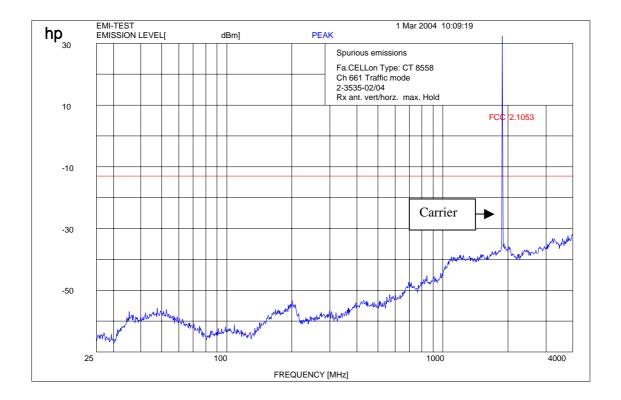


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter.



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 20 (62)

### Channel 661 (up to 12 GHz)

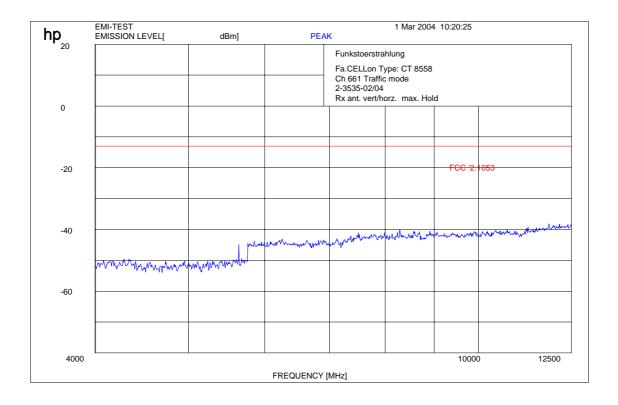


f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$ 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 21 (62)

### Channel 810 up to 4 GHz

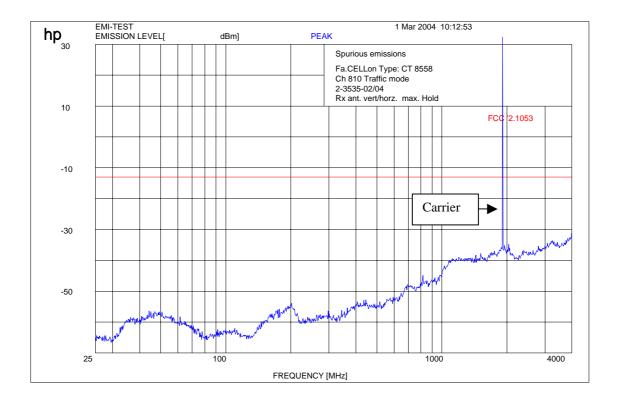


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz} : RBW/VBW 1 \text{ MHz}$ 

Carrier suppressed with a rejection filter



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 22 (62)

### Channel 810 up to 12 GHz

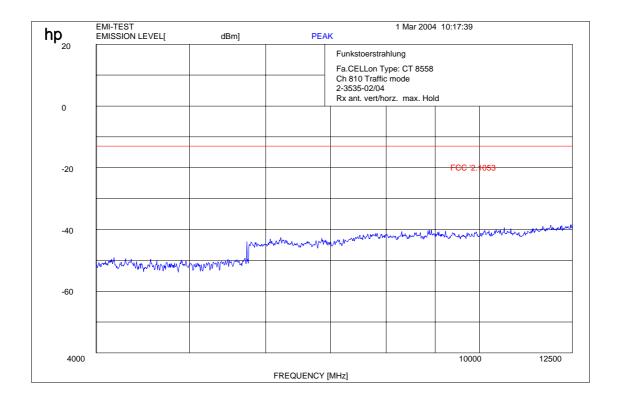

f < 1 GHz: RBW/VBW: 100 kHz  $f \ge 1 \text{ GHz}: RBW/VBW 1 \text{ MHz}$ 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 23 (62)

# **RECEIVER SPURIOUS RADIATION Radiated**

§ 15.109

	SPURIOUS EMISSIONS LEVEL (μV/m)							
(	CH 512,661,81	10						
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (μV/m)
no	peaks	found						
no	peaks	Touriu						
Meası	rement unce	rtainty			±3 (	lB		

**f≥1GHz:RBW/VBW:1MHz** 

f < 1 GHz: RBW/VBW: 100 kHz

H = Horizontal; V= Vertical

Measurement distance see table

Limits SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 24 (62)

### Recalculated from 300m or 30m to 3m with 40db/decade according FCC rules.

FCC Rule 47

#### Part 15 Magnetics


EUT: CT 8558 Manufacturer: Cellon Operating Condition: Idle mode

Test Site: Cetecom, Room 6

Operator: Gillmann
Test Specification: 15.109
Comment: 220 V/ 50Hz

Start of Test: 01.03.04 / 13:26:58

### Idle Mode (this is valid for all 3 channels up to 30 MHz)

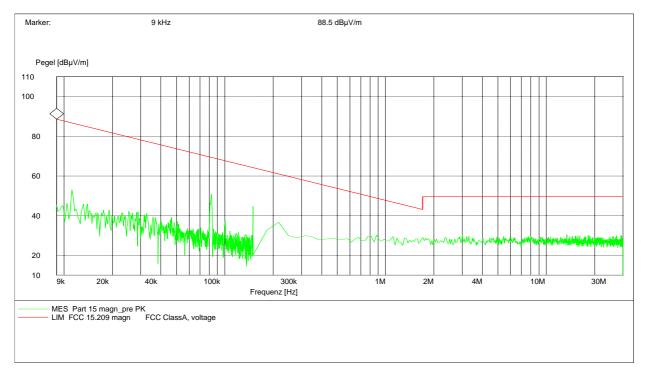

For peak measurement we use 100 kHz RBW/VBW
For CISPR QP measurement we use 200 Hz from 9 kHz to 150kHz
9 kHz for 150 kHz to 30 MHz


Limits SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705 – 30.0	30 / 29.5 dBμV/m	30	



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 25 (62)

### **Idle-Mode (up to 4 GHz)**

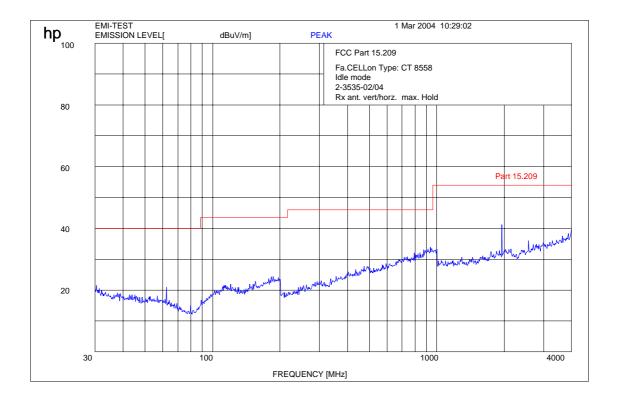


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1GHz: RBW/VBW 1 \text{ MHz}$ 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 26 (62)

### Idle-Mode (this is valid up to 12 GHz)

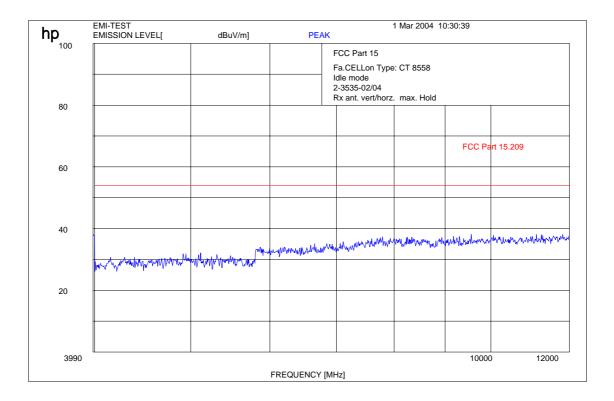


f < 1 GHz : RBW/VBW: 100 kHz  $f \ge 1GHz : RBW/VBW 1 \text{ MHz}$ 



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 27 (62)

### Idle-Mode (this is valid up to 25 GHz)



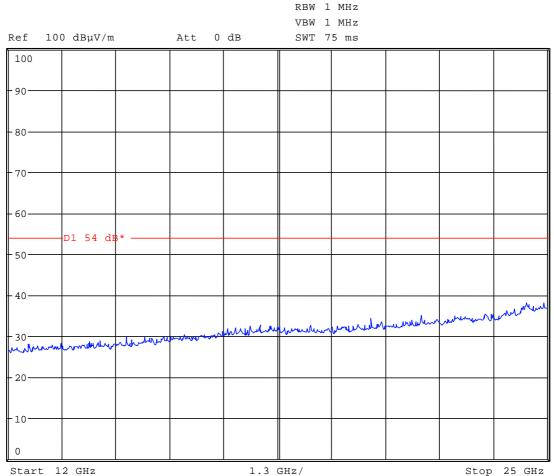

For this measurement we used a special wideband horn antenna and a low noise preamp.



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 28 (62)

### **CONDUCTED SPURIOUS EMISSIONS**

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### **USPCS Transmitter**

### **Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


EMISSION LIMITATIONS					
f (MHz)	Amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results	
CH 512					
1 850.200	29.3	-13.0		carrier	
1 849.998	- 16.8	(42.3 dBc)	46.1	carrier	
6 126.292	- 39.6		68.9	complies	
CH 661					
1 880.000	29.0	-13.0		carrier	
6 328.743	- 40.7	(42.0 dBc)	69.7	complies	
CH 810					
1909.800	28.8	-13.0		carrier	
1 908.800	- 32.7	(41.8 dBc)	61.5	carrier	
1 910.018	- 15.5		44.3	carrier	
5 843.995	- 42.5		71.3	complies	
Measuremen	nt uncertainty		± 0.5dB		



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 29 (62)

### **Measurements:**

Channel: 512

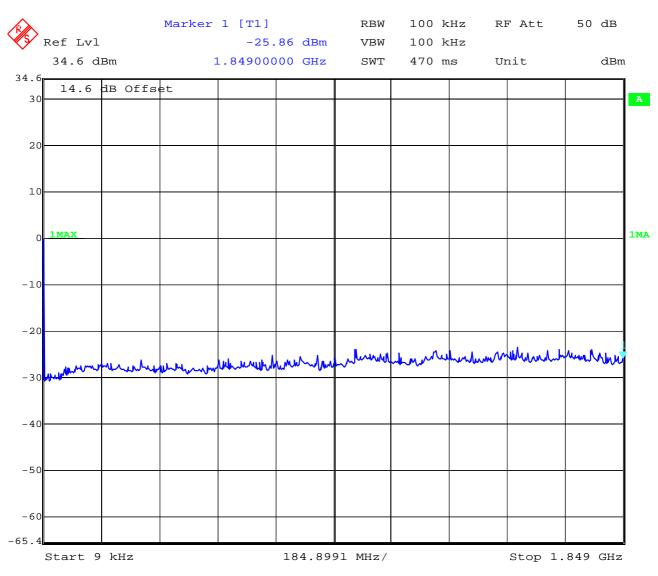


Date: 2.MAR.2004 08:41:15



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 30 (62)


#### **Channel 512**

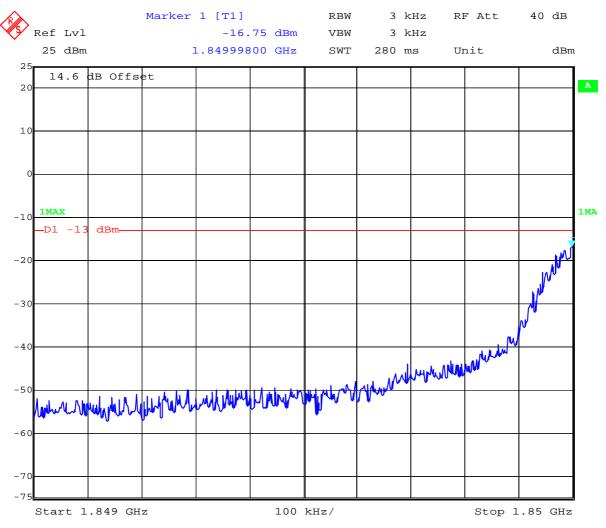



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 31 (62)

### **Channel 512**

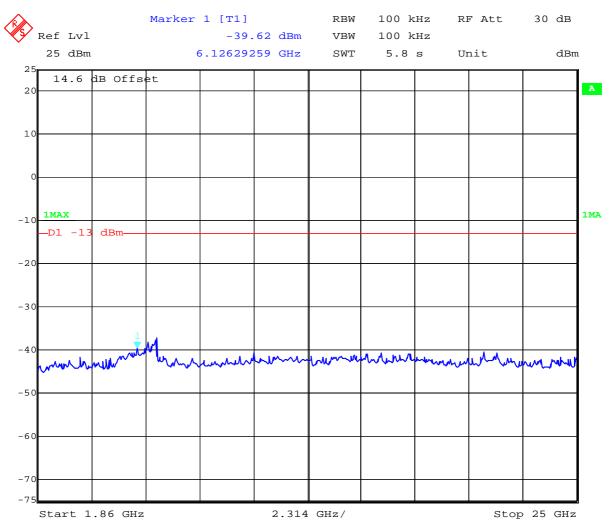


Date: 2.MAR.2004 08:47:43



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 32 (62)

### **Channel 661**

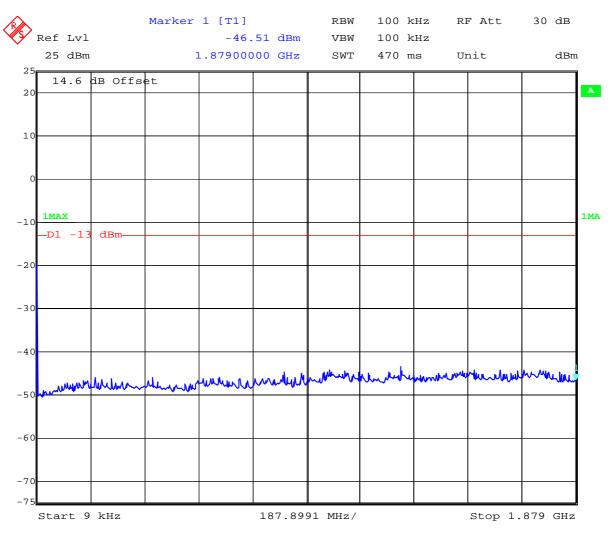


Date: 2.MAR.2004 08:48:50



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 33 (62)

### **Channel 661**

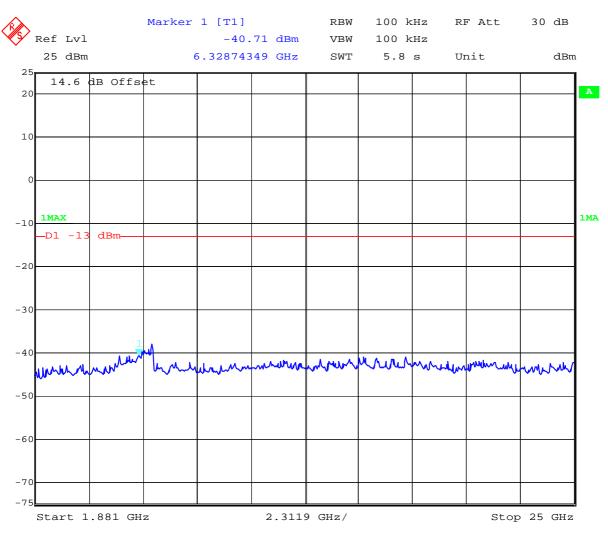


Date: 2.MAR.2004 08:49:47



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 34 (62)

### **Channel 810**

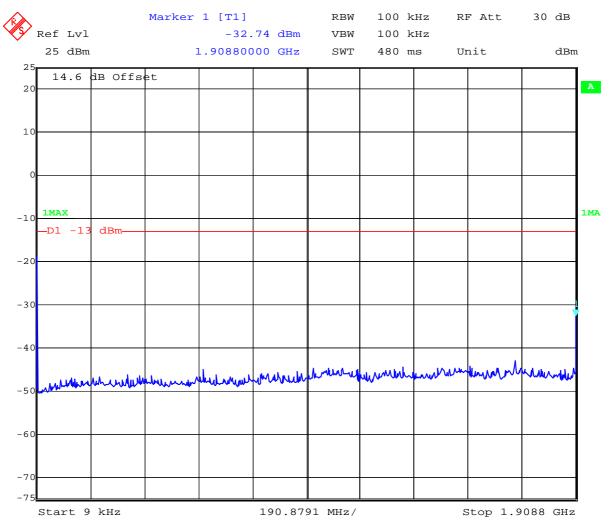


Date: 2.MAR.2004 08:50:58



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 35 (62)

#### **Channel 810**

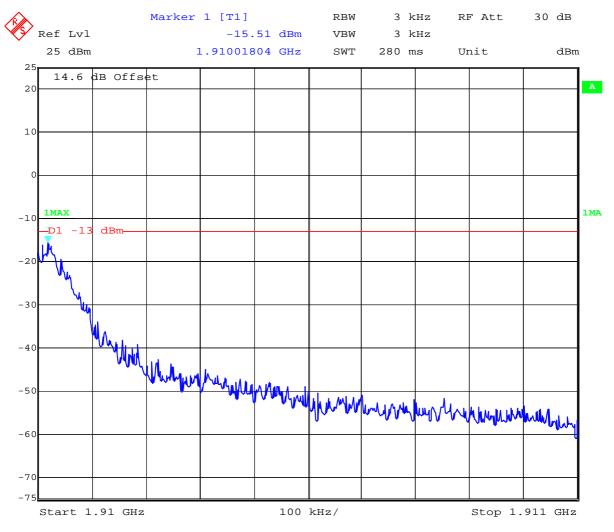


Date: 2.MAR.2004 08:52:02



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 36 (62)

### **Channel 810**

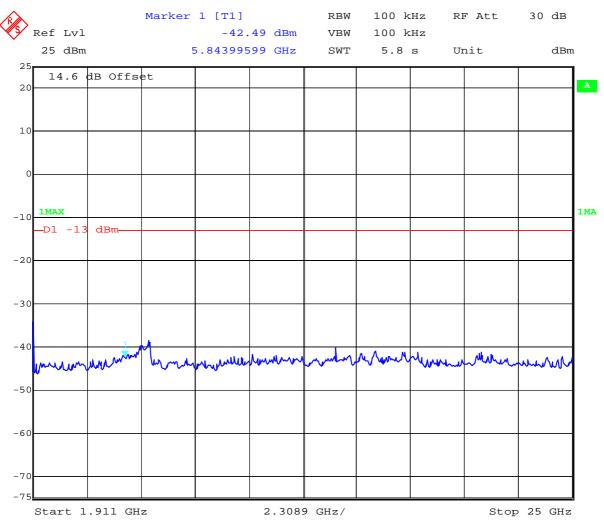

Date: 2.MAR.2004 08:53:00



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 37 (62)

### BLOCK EDGE COMPLIANCE FOR BLOCK A AND C


#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### **Measurements:**

#### **Block A Channel 512**

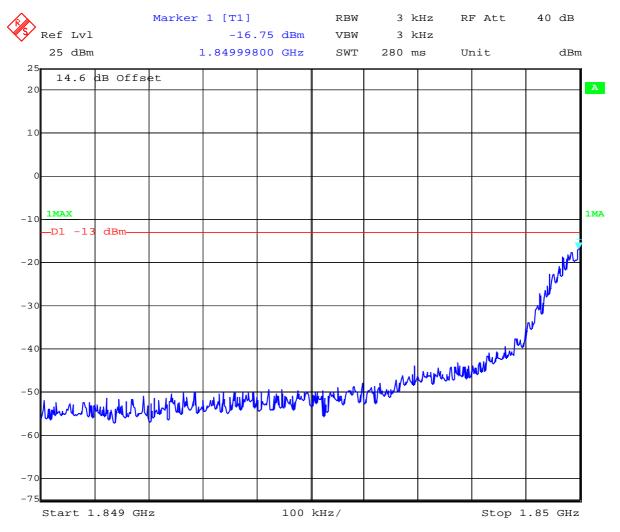


Date: 2.MAR.2004 08:44:44



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 38 (62)

#### **Block C Channel 810**

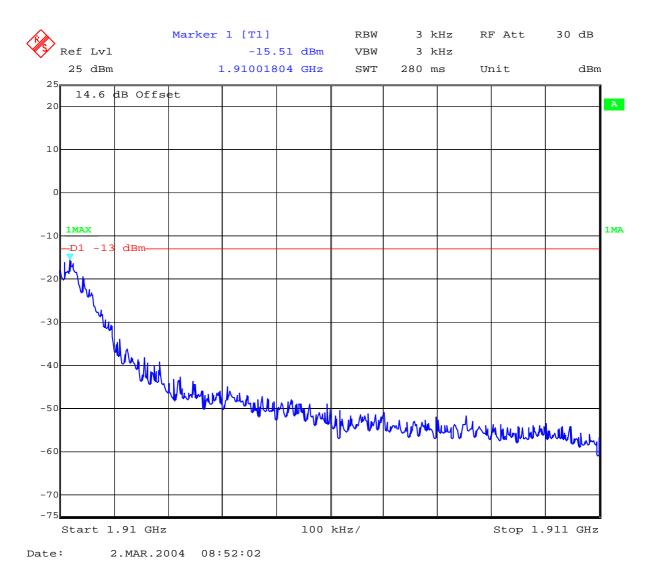



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 39 (62)

#### **OCCUPIED BANDWIDTH**

**§2.989** 

#### **Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.


Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	292.585	318.637
1880.0 MHz	288.577	320.641
1909.8 MHz	292.585	322.645

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 299.7 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 40 (62)

Channel 512 99% Occupied Bandwidth

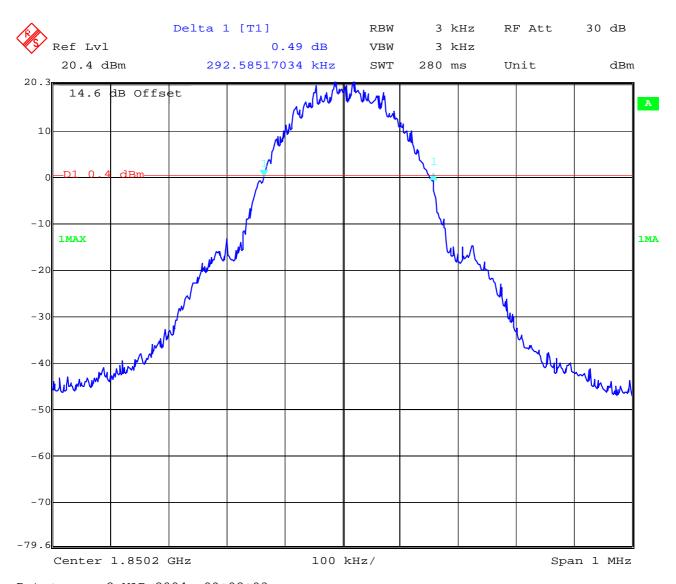


Date: 2.MAR.2004 09:02:03



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 41 (62)

### Channel 512 -26 dBc Bandwidth

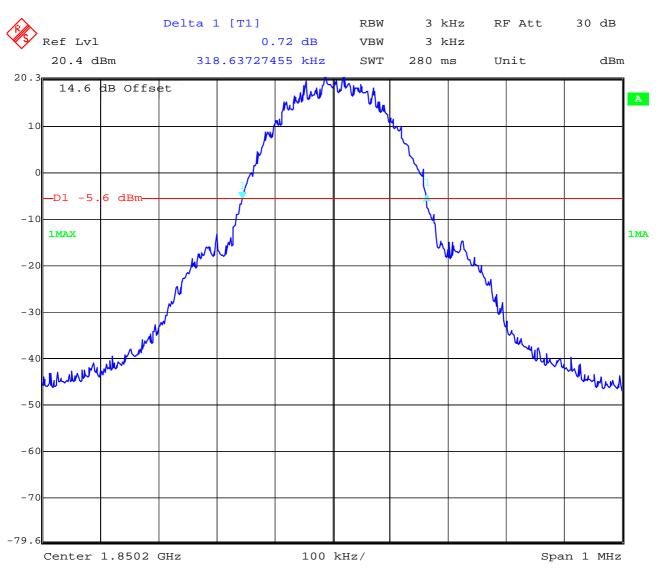


Date: 2.MAR.2004 09:03:09



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 42 (62)

### Channel 661 99% Occupied Bandwidth

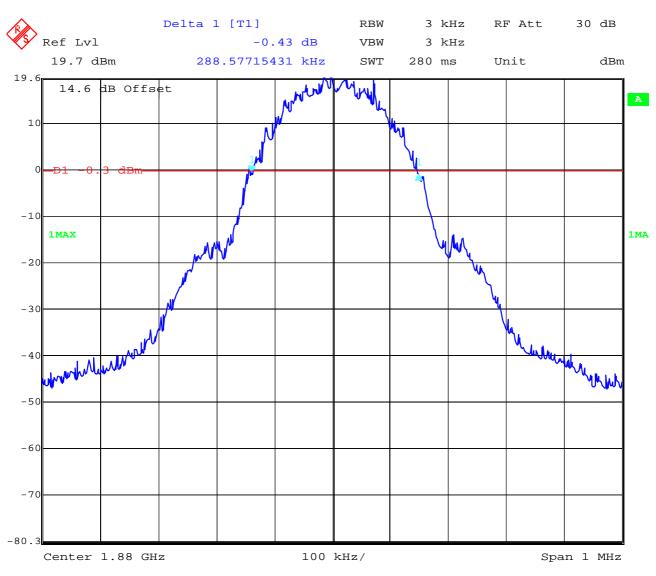


Date: 2.MAR.2004 09:06:39



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 43 (62)


### Channel 661 -26 dBc Bandwidth

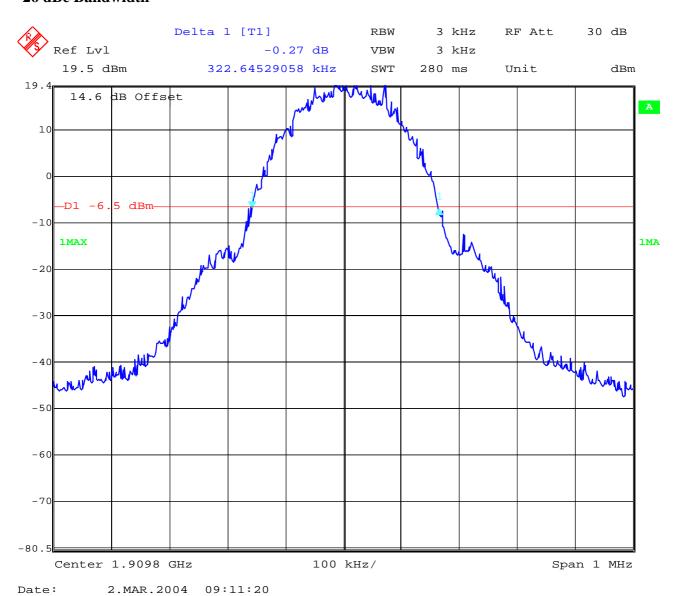



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 44 (62)

### Channel 810 99% Occupied Bandwidth

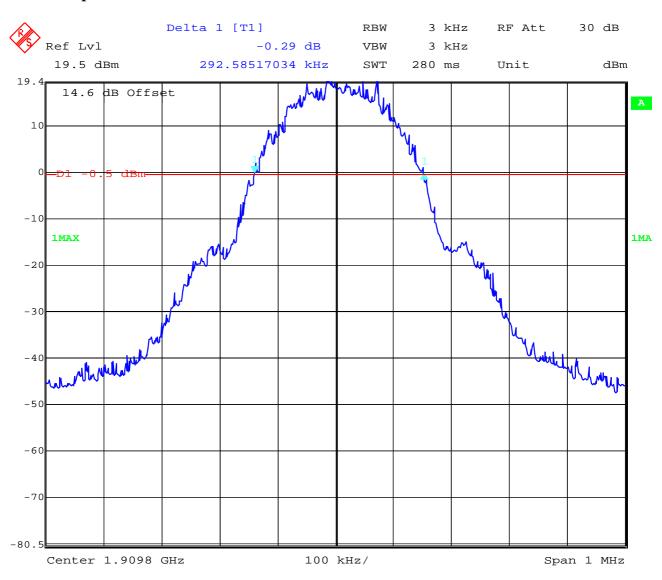


Date: 2.MAR.2004 09:10:29



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 45 (62)

# Channel 810 -26 dBc Bandwidth

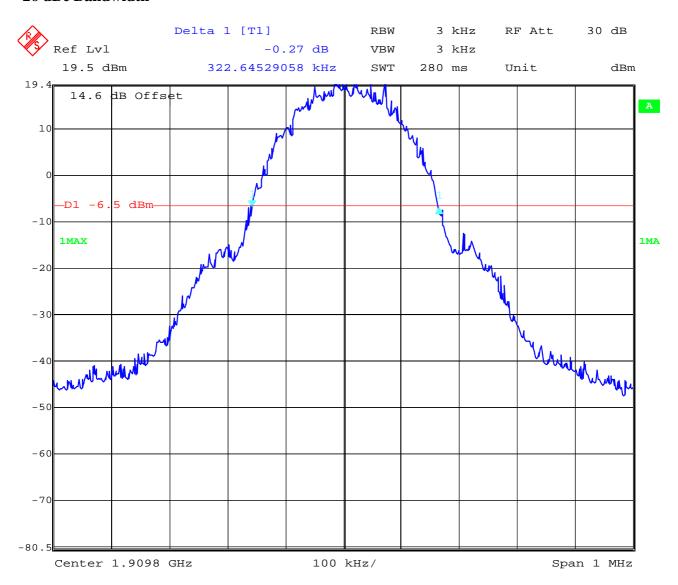

Date: 2.MAR.2004 09:11:20



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 46 (62)

#### ADDITIONAL MEASUREMENTS FOR ANCILLARY EQUIPMENT PART 15.109

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

#### **Ancillary equipment:**

No ancillary equipment



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 47 (62)

### **CONDUCTED EMISSIONS**

§ 15:107/207

#### CISPR 22

EUT: CT 8558 with AC/DC adapter

Manufacturer: Cellon


Operating Condition: Traffic mode

Test Site: CETECOM ICT Services GmbH, Room 006

Operator: Gillmann
Test Specification: EN 55022

Start of Test: 01.03.04 / 12:48:44

SCAN TABLE: "EN 55022 V"

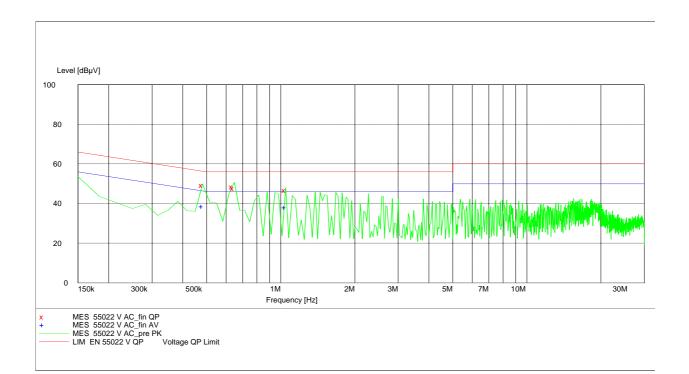



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 48 (62)

### **CONDUCTED EMISSIONS**

§ 15:107/207

#### CISPR 22

EUT: CT 8558 with AC/DC adapter


Manufacturer: Cellon Operating Condition: Idle mode

Test Site: CETECOM ICT Services GmbH, Room 006

Operator: Gillmann
Test Specification: EN 55022

Start of Test: 01.03.04 / 13:08:21

#### SCAN TABLE: "EN 55022 V"

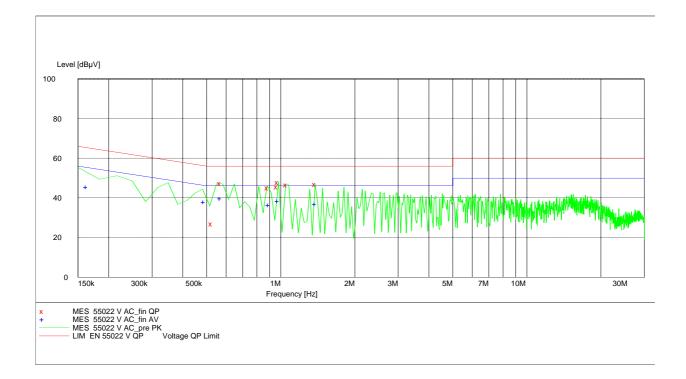



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 49 (62)

### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

01         Spectrum Analyzer         8566 A         Hewlett-Packard         1925A           02         Analyzer Display         8566 A         Hewlett-Packard         1925A           03         Oscilloscope         7633         Tektronix         2300           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 04           05         System Power Supply         6038 A         Hewlett-Packard         2248A           06         Signal Generator         8662 A         Hewlett-Packard         2215G           07         Signal Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008 <t< th=""><th>- 1 NT -</th></t<>	- 1 NT -
02         Analyzer Display         8566 A         Hewlett-Packard         1925A           03         Oscilloscope         7633         Tektronix         2300           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 04           05         System Power Supply         6038 A         Hewlett-Packard         2248A           06         Signal Generator         8662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2237A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hew	al No.
03         Oscilloscope         7633         Tektronix         2300           04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 04           05         System Power Supply         6038 A         Hewlett-Packard         2848A           06         Signal Generator         8662 A         Hewlett-Packard         2215G           07         Signal Generator         A662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hew	
04         Radio Communication Analyzer         CMTA 54         Rohde & Schwarz         894 04           05         System Power Supply         6038 A         Hewlett-Packard         2848A           06         Signal Generator         8111 A         Hewlett-Packard         2215G           07         Signal Generator         8662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2237A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber	
Analyzer	
05         System Power Supply         6038 A         Hewlett-Packard         2848A           06         Signal Generator         8111 A         Hewlett-Packard         2215G           07         Signal Generator         8662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         266           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         8740c           18         Spectrum Analyzer         85660 B         Hewlett-Packard </td <td>43/010</td>	43/010
06         Signal Generator         8111 A         Hewlett-Packard         2215G           07         Signal Generator         8662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         8740c           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85650 A         Hewlett-Packard <td></td>	
07         Signal Generator         8662 A         Hewlett-Packard         2224A           08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         266           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard<	
08         Function Generator         AFGU         Rohde & Schwarz         862 48           09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         266           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard </td <td></td>	
09         Regulating Transformer         MPL         Erfi         913           10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         <	A01012
10         LISN         NNLA 8120         Schwarzbeck         8120           11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         3	80/032
11         Relay-Matrix         PSU         Rohde & Schwarz         893 28           12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         26-           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco	350
12         Power-Meter         436 A         Hewlett-Packard         2101A           13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         264           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         213           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz <t< td=""><td>0331</td></t<>	0331
13         Power-Sensor         8484 A         Hewlett-Packard         2237A           14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         264           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         215           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz	85/020
14         Power-Sensor         8482 A         Hewlett-Packard         2237A           15         Modulation Meter         9008         Racal-Dana         264           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         215           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwar	12378
15         Modulation Meter         9008         Racal-Dana         264           16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A10156
16         Frequency Counter         5340 A         Hewlett-Packard         1532A           17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         303           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	100616
17         Anechoic Chamber          MWB         87400           18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         373           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         303           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	647
18         Spectrum Analyzer         85660 B         Hewlett-Packard         2747A           19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         373           23         Log. Per. Antenna         3146         Emco         21           24         Double Ridged Horn         3115         Emco         303           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A03899
19         Analyzer Display         85662 A         Hewlett-Packard         2816A           20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         305           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	00/002
20         Quasi Peak Adapter         85650 A         Hewlett-Packard         2811A           21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A05306
21         RF-Preselector         85685 A         Hewlett-Packard         2833A           22         Biconical Antenna         3104         Emco         373           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         303           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A16541
22         Biconical Antenna         3104         Emco         375           23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         305           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A01131
23         Log. Per. Antenna         3146         Emco         213           24         Double Ridged Horn         3115         Emco         308           25         EMI-Testreceiver         ESAI         Rohde & Schwarz         863 18           26         EMI-Analyzer-Display         ESAI-D         Rohde & Schwarz         862 77           27         Biconical Antenna         HK 116         Rohde & Schwarz         888 94	A00768
24Double Ridged Horn3115Emco30825EMI-TestreceiverESAIRohde & Schwarz863 1826EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 7727Biconical AntennaHK 116Rohde & Schwarz888 94	758
25EMI-TestreceiverESAIRohde & Schwarz863 1826EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 7727Biconical AntennaHK 116Rohde & Schwarz888 94	130
26EMI-Analyzer-DisplayESAI-DRohde & Schwarz862 7727Biconical AntennaHK 116Rohde & Schwarz888 94	088
27 Biconical Antenna HK 116 Rohde & Schwarz 888 94	80/013
	71/008
28 Log. Per. Antenna HI. 223 Robde & Schwarz 825 58	45/013
	84/002
Ü	39/002
30 Highpass HM985955 FSY Microwave 00	01
31 Amplifier P42-GA29 Tron-Tech B 23	3602
32 Anechoic Chamber Frankonia	
33 Control Computer PSM 7 Rohde & Schwarz 834 62	21/004
*	63/010
	08/010



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 50 (62)

### TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Туре	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn	3115	EMCO	9107-3696
	Antenna 1-26.5 GHz			
50	Microw. Sys. Amplifier 0.5-	8317A	Hewlett Packard	3123A00105
	26.5 GHz			
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55				
	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
56 57	AC 2 Phase V-Network AC-3 Phase V-Network	ESH3-Z5 ESH2-Z5	Rohde & Schwarz Rohde & Schwarz	894 981/019 882 394/007
56 57 58	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply	ESH3-Z5 ESH2-Z5 6032A	Rohde & Schwarz Rohde & Schwarz Rohde & Schwarz	894 981/019 882 394/007 2933A05441
56 57 58 59	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver	ESH3-Z5 ESH2-Z5 6032A ESVP.52	Rohde & Schwarz Rohde & Schwarz Rohde & Schwarz Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021
56 57 58 59 60	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026
56 57 58 59 60 61	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002
56 57 58 59 60 61 62	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029
56 57 58 59 60 61 62 63	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029 828 628/007
56 57 58 59 60 61 62 63 64	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU FSIQ 26	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029 828 628/007 119.6001.27
56 57 58 59 60 61 62 63 64 65	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029 828 628/007
56 57 58 59 60 61 62 63 64 65 66	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU FSIQ 26	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029 828 628/007 119.6001.27
56 57 58 59 60 61 62 63 64 65	AC 2 Phase V-Network AC-3 Phase V-Network Power Supply RF-Test Receiver Spectrum Monitor RF-Test Receiver Relay Matrix Relay Matrix Spectrum Analyzer	ESH3-Z5 ESH2-Z5 6032A ESVP.52 EZM ESH3 PSU PSU FSIQ 26	Rohde & Schwarz	894 981/019 882 394/007 2933A05441 881 487/021 883 086/026 881 515/002 882 943/029 828 628/007 119.6001.27



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 51 (62)






Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 52 (62)






Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 53 (62)

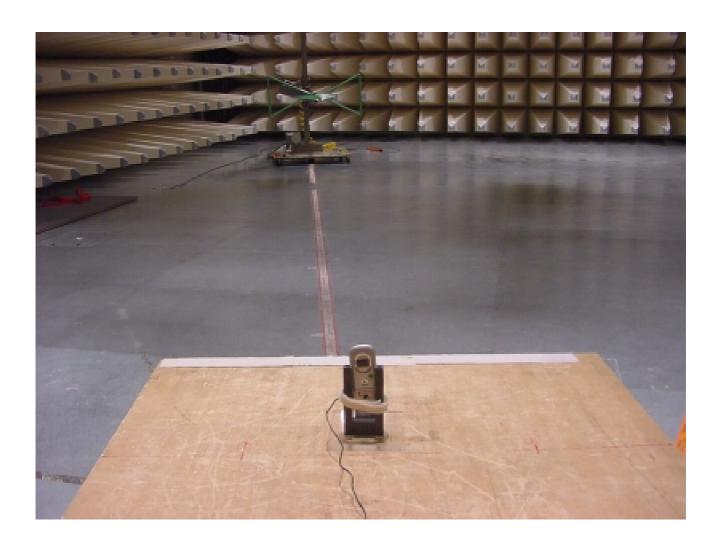



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 54 (62)

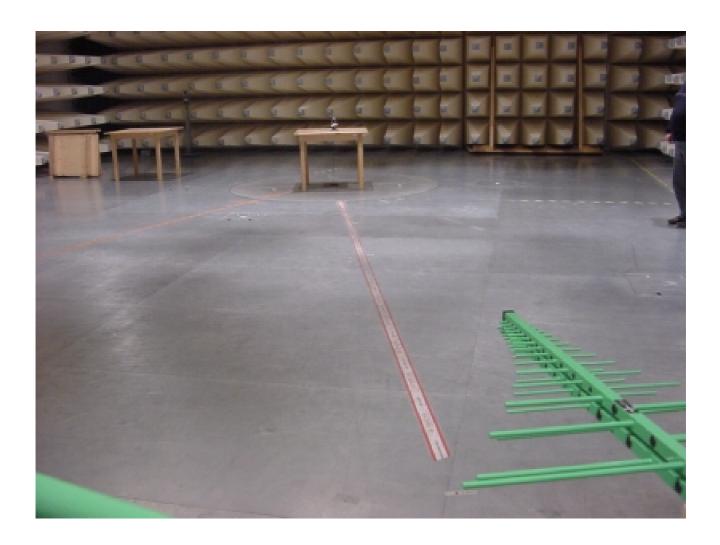



Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 55 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 56 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 57 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 58 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 59 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 60 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 61 (62)





Test report no..: 2-3535-01-02/04 Date: 2004-03-03 Page 62 (62)

