

Appendix A. Test Result of Maximum Conducted Output Power


SISO A

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11a	5180	--	17.26	--	17.26	24	--	Pass
	5200	--	20.38	--	20.38	24	--	Pass
	5240	--	20.75	--	20.75	24	--	Pass
	5260	23.65	20.71	--	20.71	24	24.74	Pass
	5280	22.81	20.72	--	20.72	24	24.58	Pass
	5320	21.89	17.21	--	17.21	24	24.40	Pass
	5500	21.93	16.43	--	16.43	24	24.41	Pass
	5600	22.61	20.88	--	20.88	24	24.54	Pass
	5700	22.01	17.17	--	17.17	24	24.43	Pass
	5745	--	21.74	--	21.74	30	--	Pass
	5785	--	21.12	--	21.12	30	--	Pass
	5825	--	21.24	--	21.24	30	--	Pass


Note: Total Power = Output Power + Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11n (20 MHz)	5180	--	16.94	--	16.94	24	--	Pass
	5200	--	19.75	--	19.75	24	--	Pass
	5240	--	20.84	--	20.84	24	--	Pass
	5260	25.05	20.91	--	20.91	24	24.99	Pass
	5280	24.29	20.64	--	20.64	24	24.85	Pass
	5320	23.53	16.74	--	16.74	24	24.72	Pass
	5500	22.41	16.11	--	16.11	24	24.50	Pass
	5600	23.29	20.75	--	20.75	24	24.67	Pass
	5700	22.57	18.10	--	18.10	24	24.54	Pass
	5720(U-NII-2C)	17.99	19.95	0.00	19.95	24	23.55	Pass
	5720(U-NII-3)	--	14.38	0.00	14.38	30	--	Pass
	5745	--	21.63	--	21.63	30	--	Pass
	5785	--	21.06	--	21.06	30	--	Pass
	5825	--	21.22	--	21.22	30	--	Pass

Note: Total Power = Output Power + Duty factor.

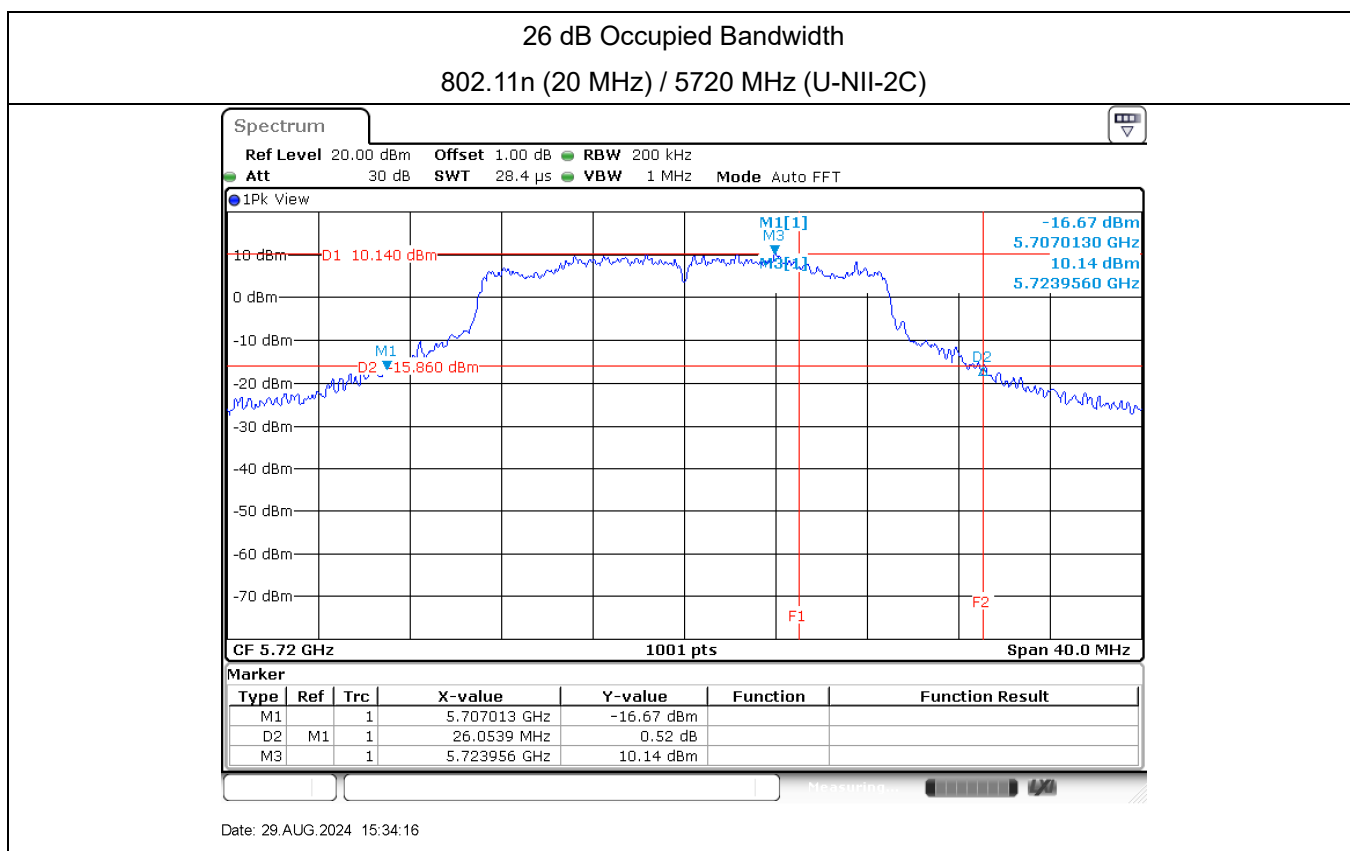


Maximum conducted output power
5720 MHz (U-NII-2C)

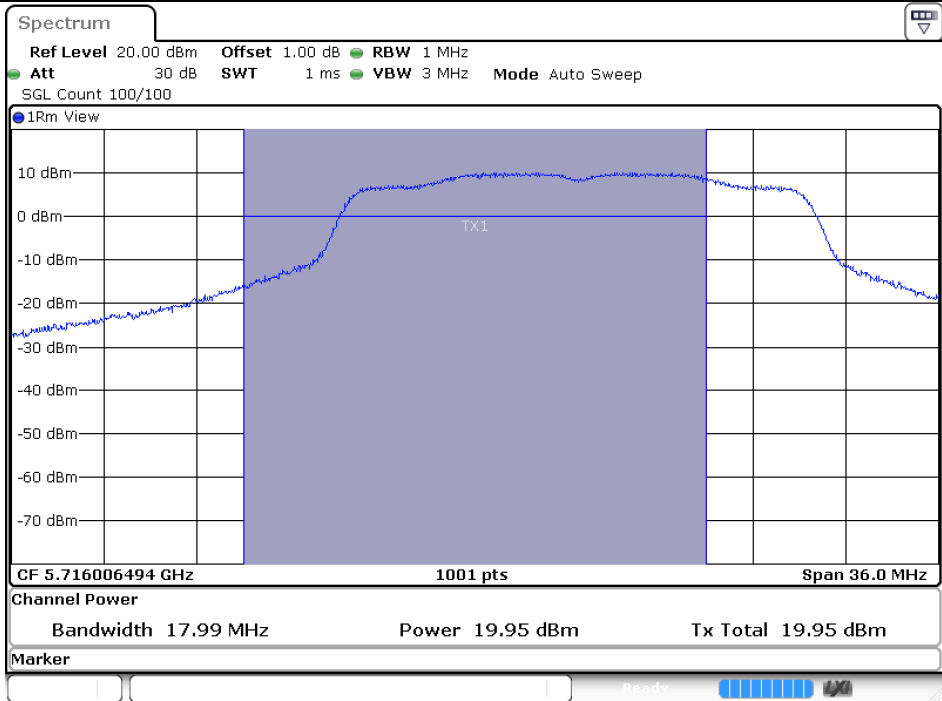

Date: 29.AUG.2024 15:37:30


Maximum conducted output power
5720 MHz (U-NII-3)

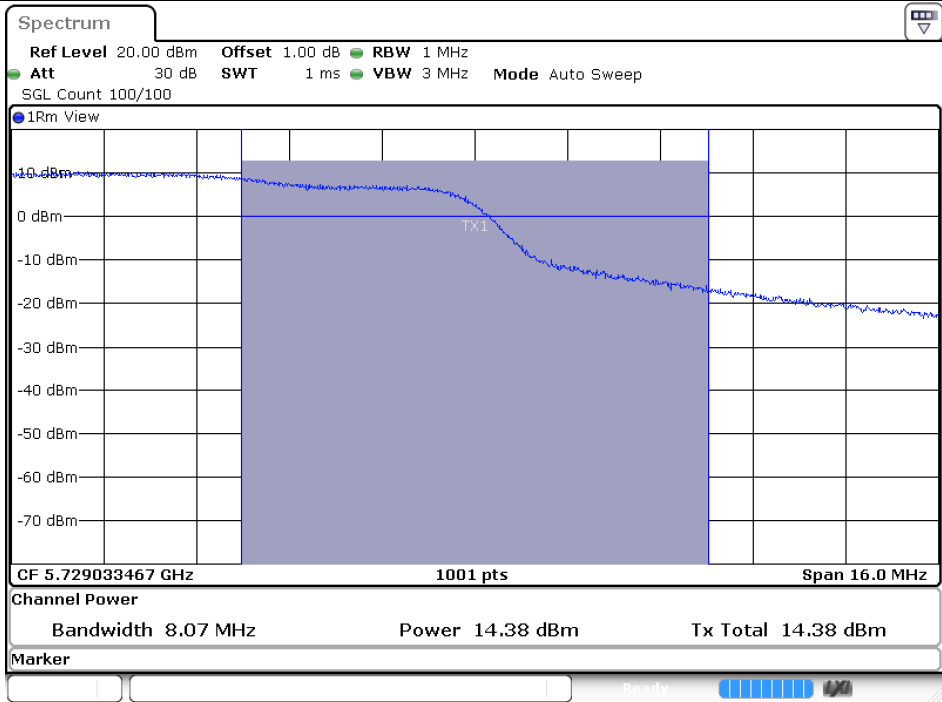


Date: 29.AUG.2024 15:37:32

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11n (40 MHz)	5190	--	17.66	--	17.66	24	--	Pass
	5230	--	19.25	--	19.25	24	--	Pass
	5270	42.19	18.21	--	18.21	24	27.25	Pass
	5310	41.79	15.16	--	15.16	24	27.21	Pass
	5510	43.71	17.15	--	17.15	24	27.41	Pass
	5590	41.95	20.95	--	20.95	24	27.23	Pass
	5670	43.47	18.24	--	18.24	24	27.38	Pass
	5710(U-NII-2C)	35.86	20.11	0.00	20.11	24	26.55	Pass
	5710(U-NII-3)	--	10.16	0.00	10.16	30	--	Pass
	5755	--	19.12	--	19.23	30	--	Pass
	5795	--	19.68	--	19.68	30	--	Pass

Note: Total Power = Output Power + Duty factor.

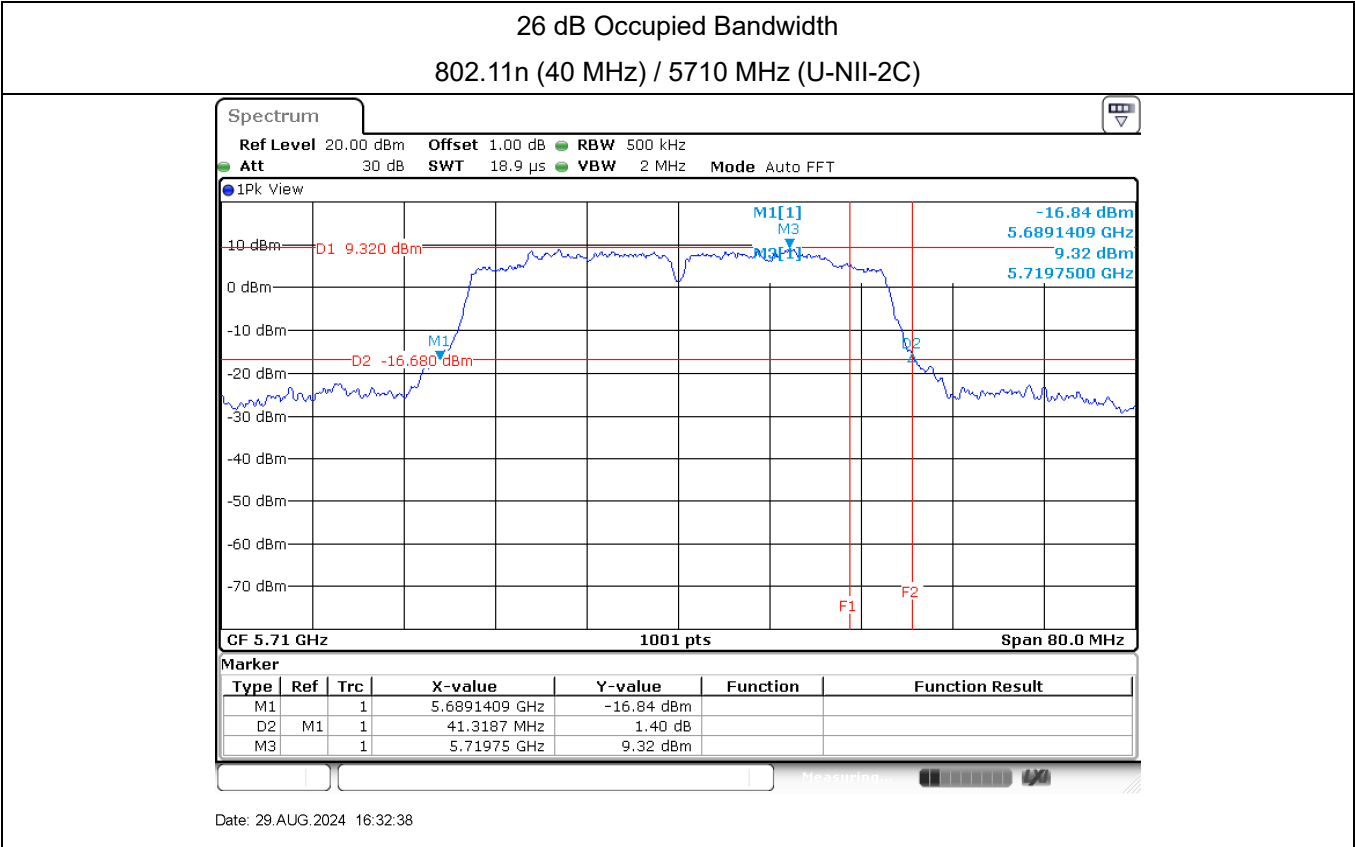


Maximum conducted output power
5710 MHz (U-NII-2C)

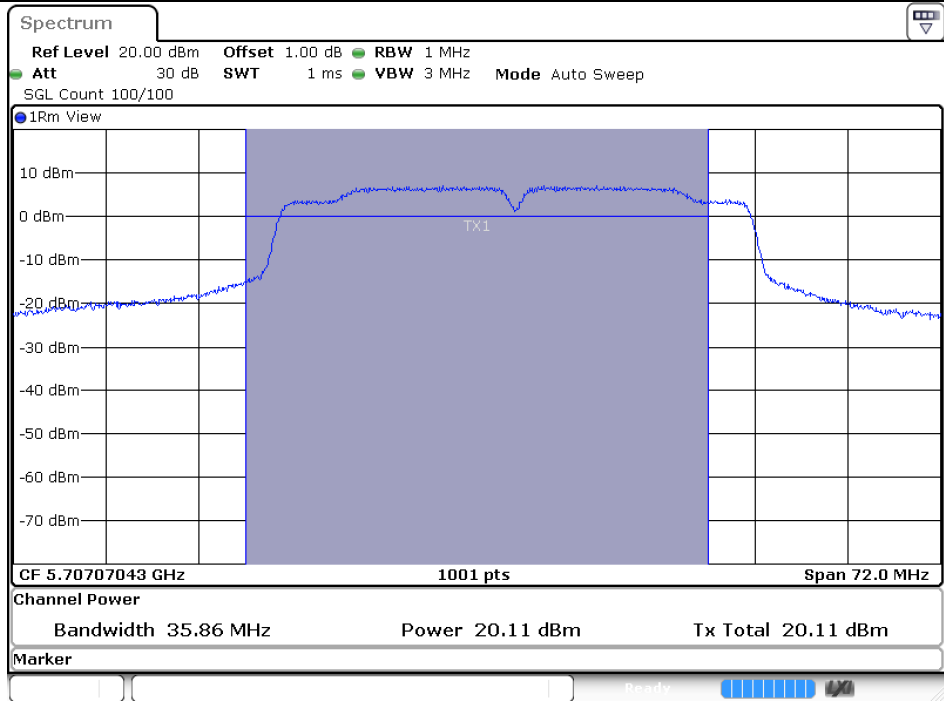

Date: 29.AUG.2024 16:35:38


Maximum conducted output power
5710 MHz (U-NII-3)

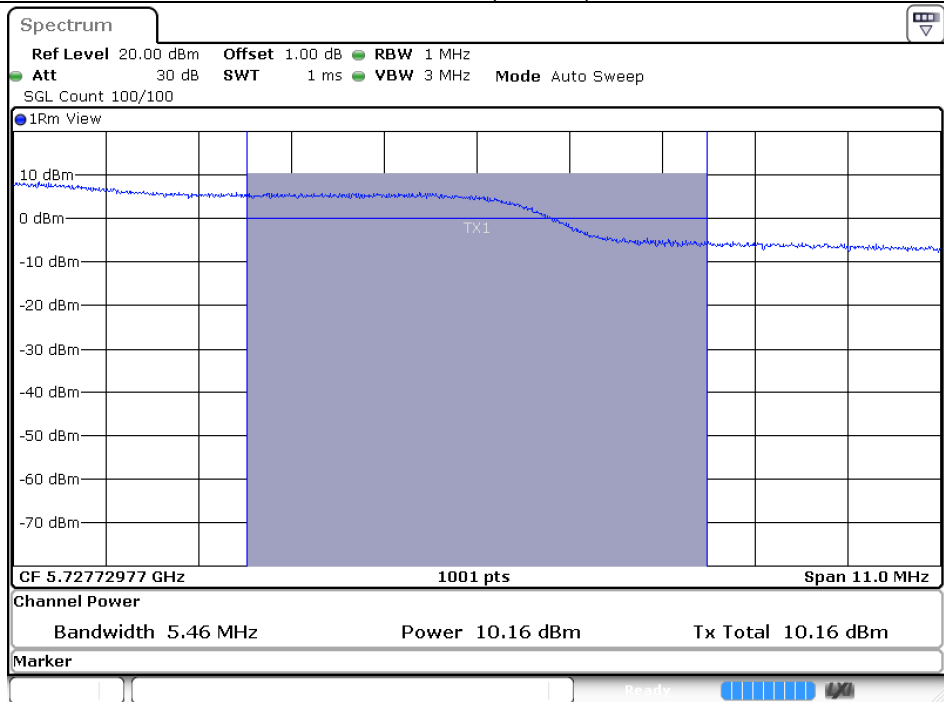


Date: 29.AUG.2024 16:33:22

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11ac (80 MHz)	5210	--	17.54	--	17.54	24	--	Pass
	5290	83.11	16.12	--	16.12	24	30.20	Pass
	5530	82.63	17.92	--	17.92	24	30.17	Pass
	5610	113.48	20.19	--	20.19	24	31.55	Pass
	5690(U-NII-2C)	113.01	20.98	0.00	20.98	24	31.53	Pass
	5690(U-NII-3)	--	4.55	0.00	4.55	30	--	Pass
	5775	--	19.11	--	19.11	30	--	Pass

Note: Total Power = Output Power + Duty factor.

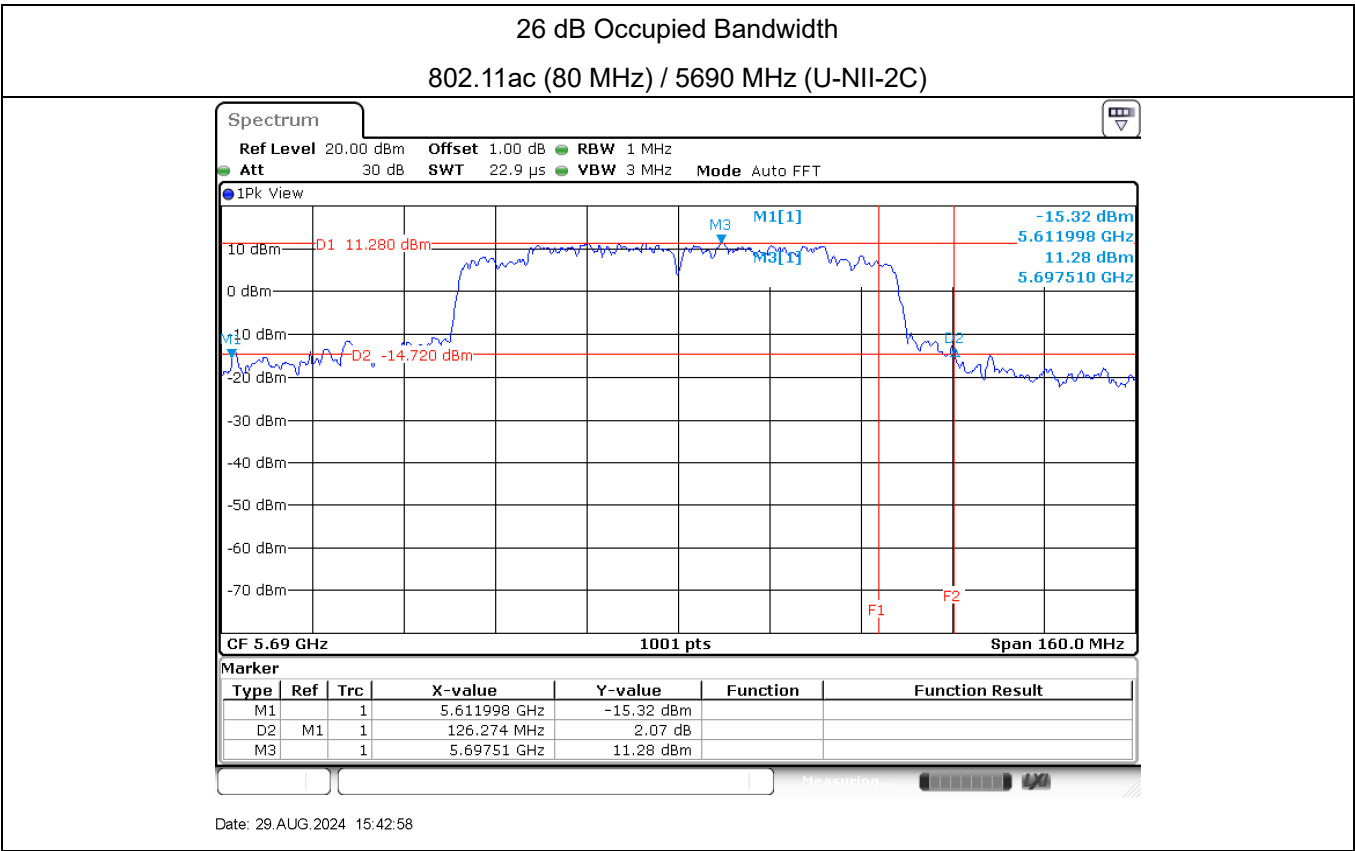


Maximum conducted output power
5690 MHz (U-NII-2C)

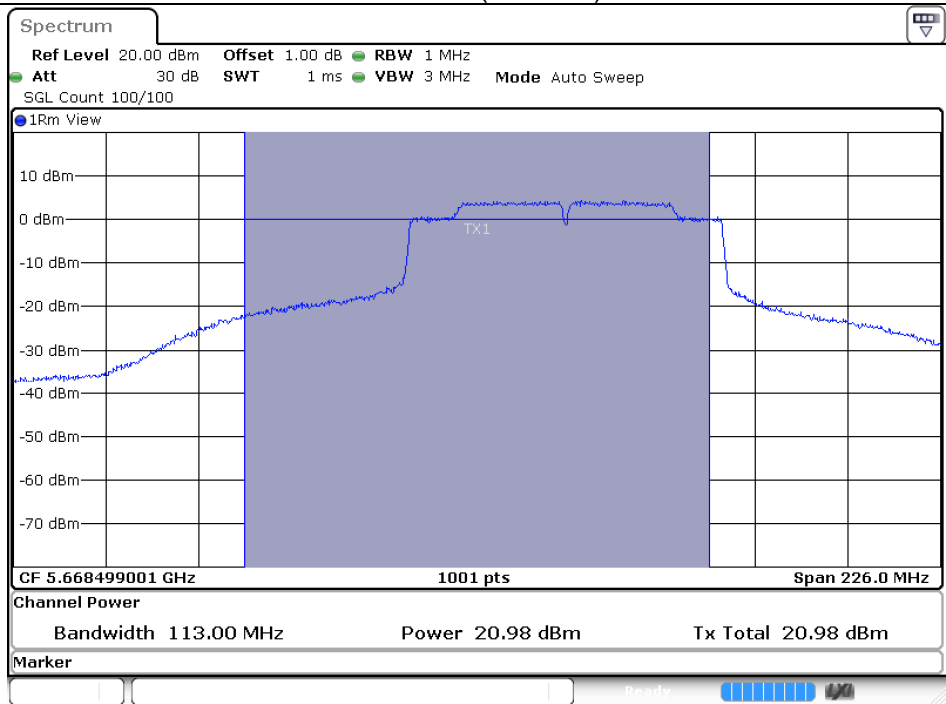


Date: 29.AUG.2024 15:43:19

Maximum conducted output power
5690 MHz (U-NII-3)

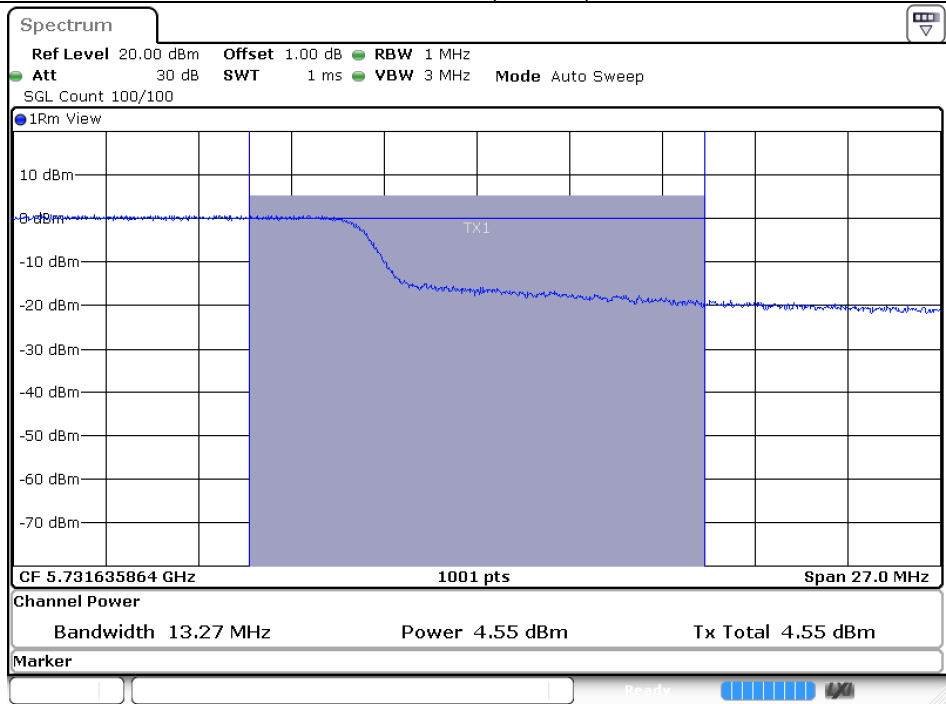

Date: 29.AUG.2024 15:43:22

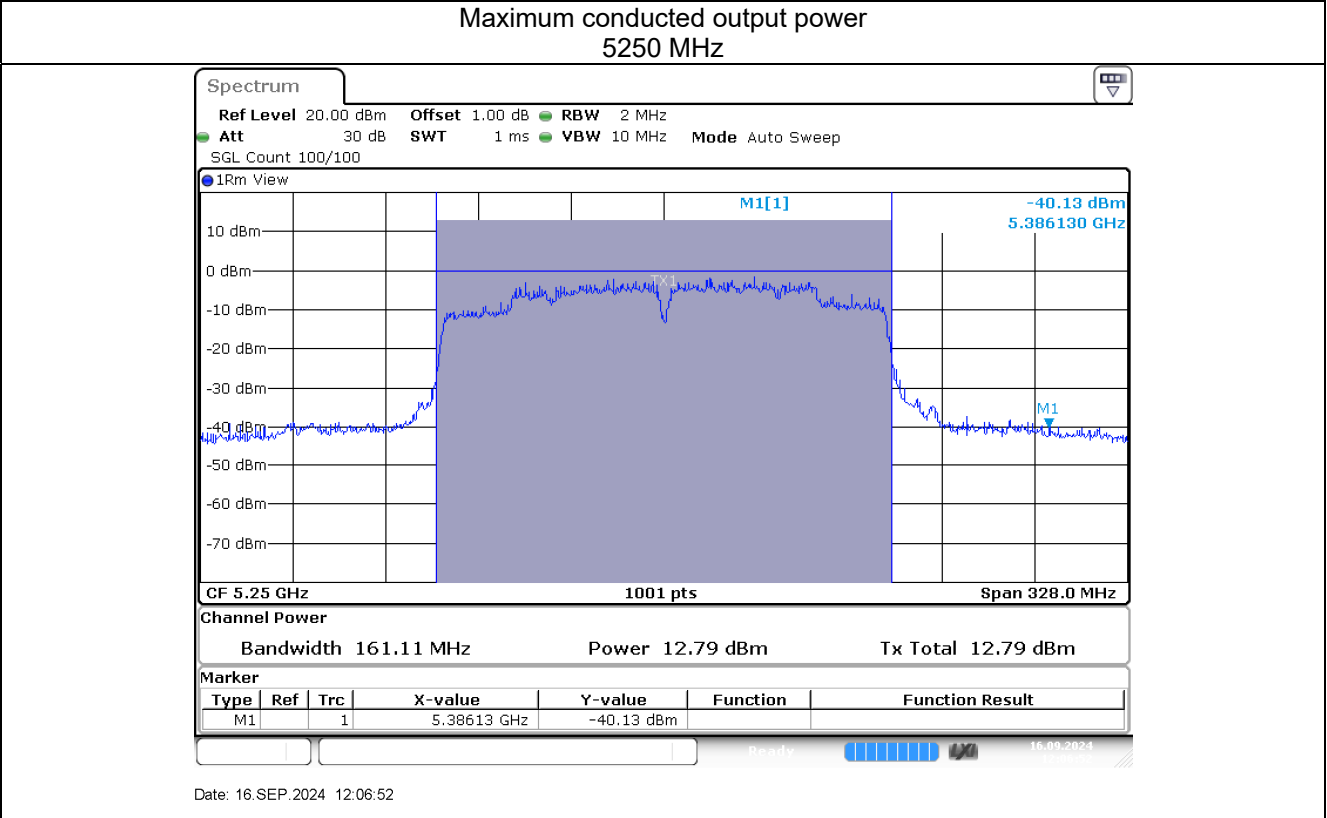


SISO B

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11a	5180	--	17.45	--	17.45	24	--	Pass
	5200	--	20.34	--	20.34	24	--	Pass
	5240	--	20.82	--	20.82	24	--	Pass
	5260	23.45	21.35	--	21.35	24	24.70	Pass
	5280	22.85	21.19	--	21.19	24	24.59	Pass
	5320	23.25	16.87	--	16.87	24	24.66	Pass
	5500	22.41	17.26	--	17.26	24	24.50	Pass
	5600	23.37	21.13	--	21.13	24	24.69	Pass
	5700	22.49	18.33	--	18.33	24	24.52	Pass
	5745	--	21.77	--	21.77	30	--	Pass
	5785	--	21.16	--	21.16	30	--	Pass
	5825	--	21.20	--	21.20	30	--	Pass


Note: Total Power = Output Power + Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11n (20 MHz)	5180	--	17.21	--	17.21	24	--	Pass
	5200	--	20.35	--	20.35	24	--	Pass
	5240	--	20.75	--	20.75	24	--	Pass
	5260	25.37	21.22	--	21.22	24	25.04	Pass
	5280	24.53	20.91	--	20.91	24	24.90	Pass
	5320	22.97	17.12	--	17.12	24	24.61	Pass
	5500	22.77	16.88	--	16.88	24	24.57	Pass
	5600	23.29	21.12	--	21.12	24	24.67	Pass
	5700	22.81	18.62	--	18.62	24	24.58	Pass
	5720(U-NII-2C)	20.07	19.92	0.00	19.92	24	24.03	Pass
	5720(U-NII-3)	--	14.64	0.00	14.64	30	--	Pass
	5745	--	20.68	--	20.68	30	--	Pass
	5785	--	21.11	--	21.11	30	--	Pass
	5825	--	21.30	--	21.30	30	--	Pass

Note: Total Power = Output Power + Duty factor.

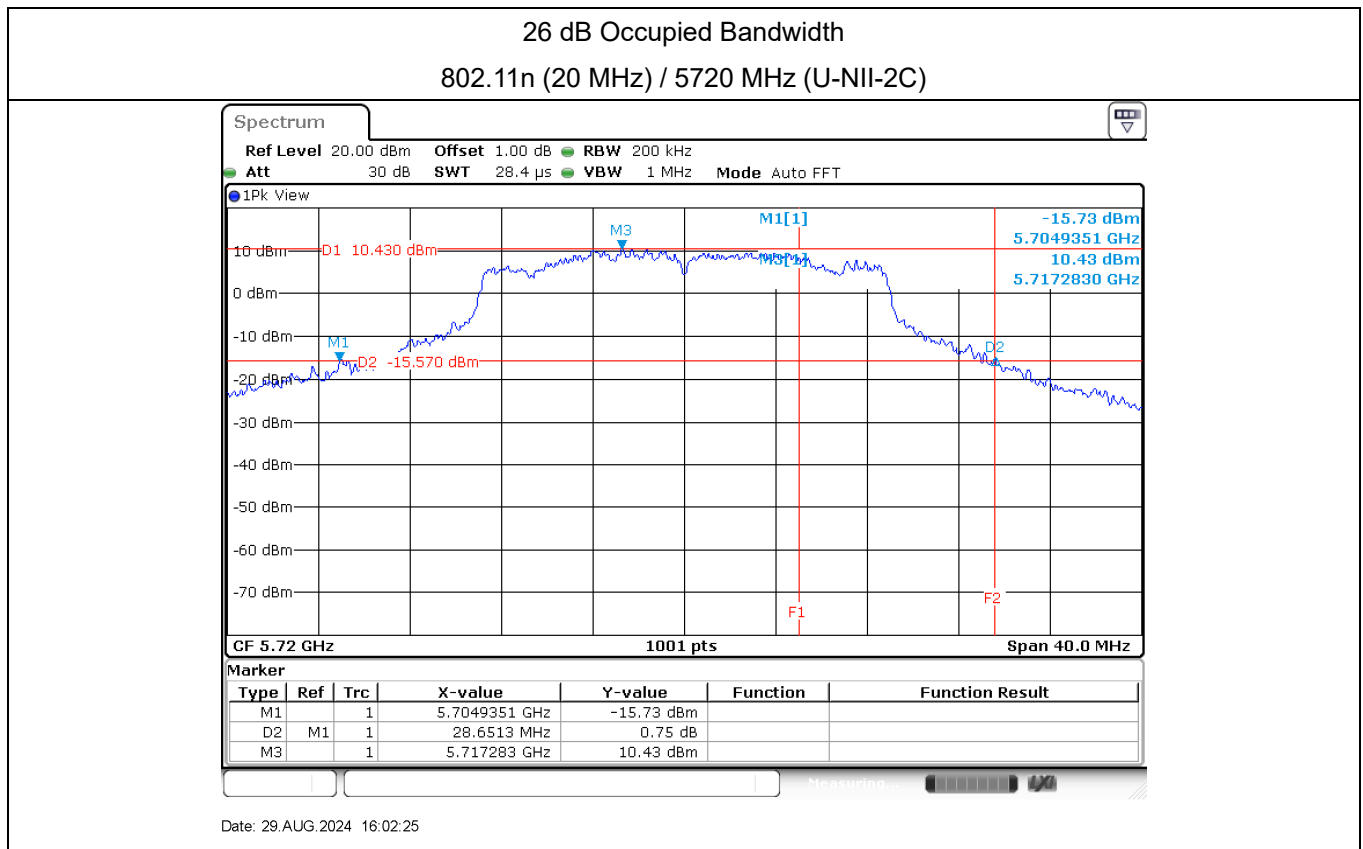


Maximum conducted output power
5720 MHz (U-NII-2C)

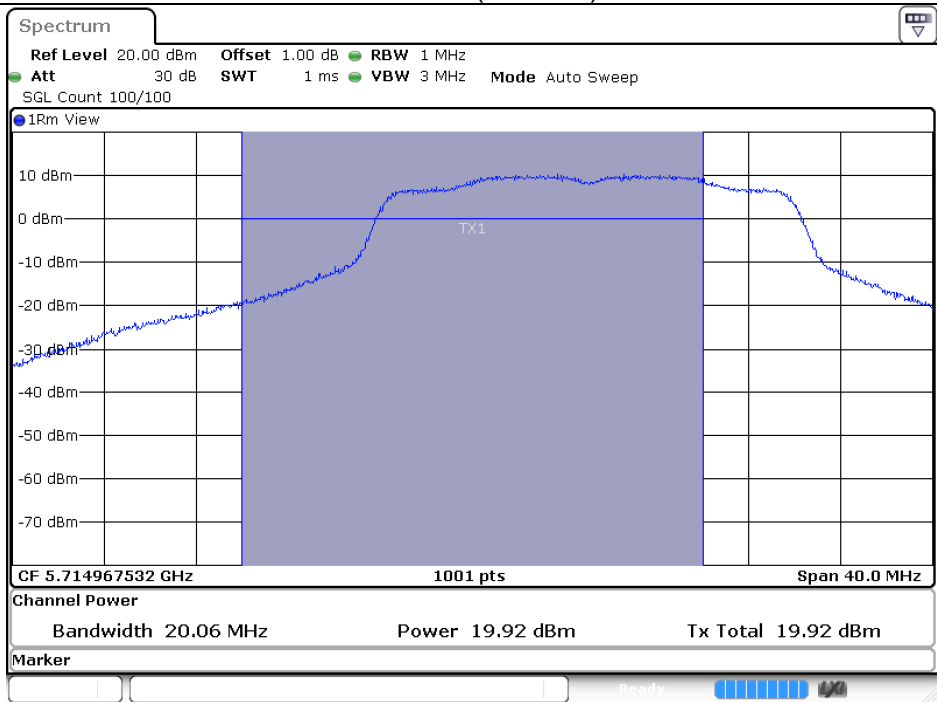

Date: 29.AUG.2024 16:02:37


Maximum conducted output power
5720 MHz (U-NII-3)

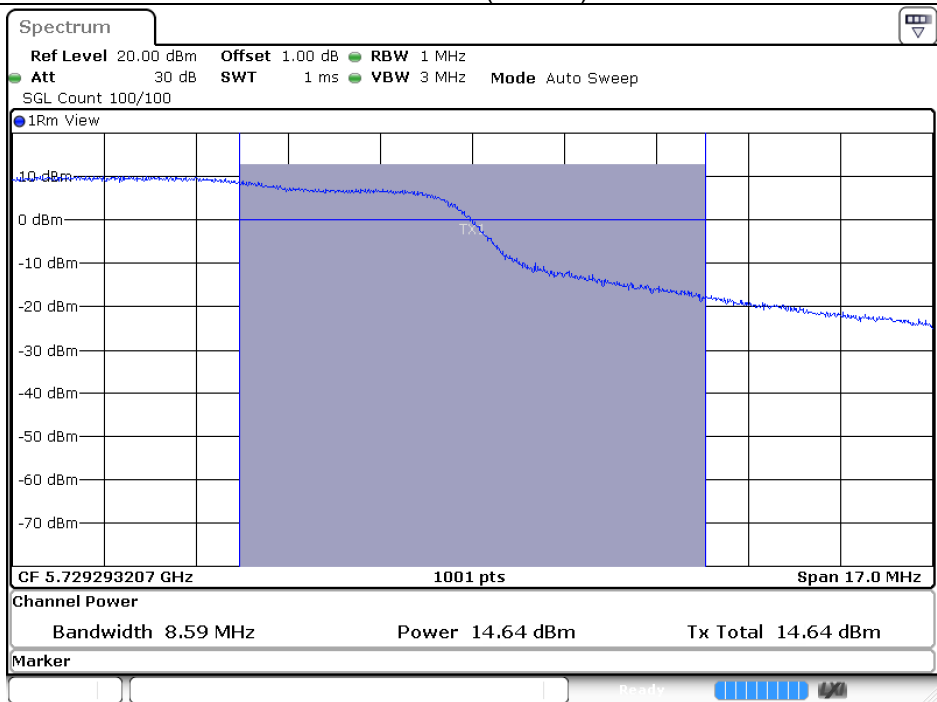


Date: 29.AUG.2024 16:02:40

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11n (40 MHz)	5190	--	17.33	--	17.33	24	--	Pass
	5230	--	18.42	--	18.42	24	--	Pass
	5270	42.03	18.42	--	18.42	24	27.24	Pass
	5310	42.03	15.36	--	15.36	24	27.24	Pass
	5510	42.59	17.12	--	17.12	24	27.29	Pass
	5590	41.55	21.22	--	21.22	24	27.19	Pass
	5670	42.35	18.69	--	18.69	24	27.27	Pass
	5710(U-NII-2C)	53.28	20.44	0.00	20.44	24	28.27	Pass
	5710(U-NII-3)	--	10.45	0.00	10.45	30	--	Pass
	5755	--	19.21	--	19.21	30	--	Pass
	5795	--	20.14	--	20.14	30	--	Pass

Note: Total Power = Output Power + Duty factor.

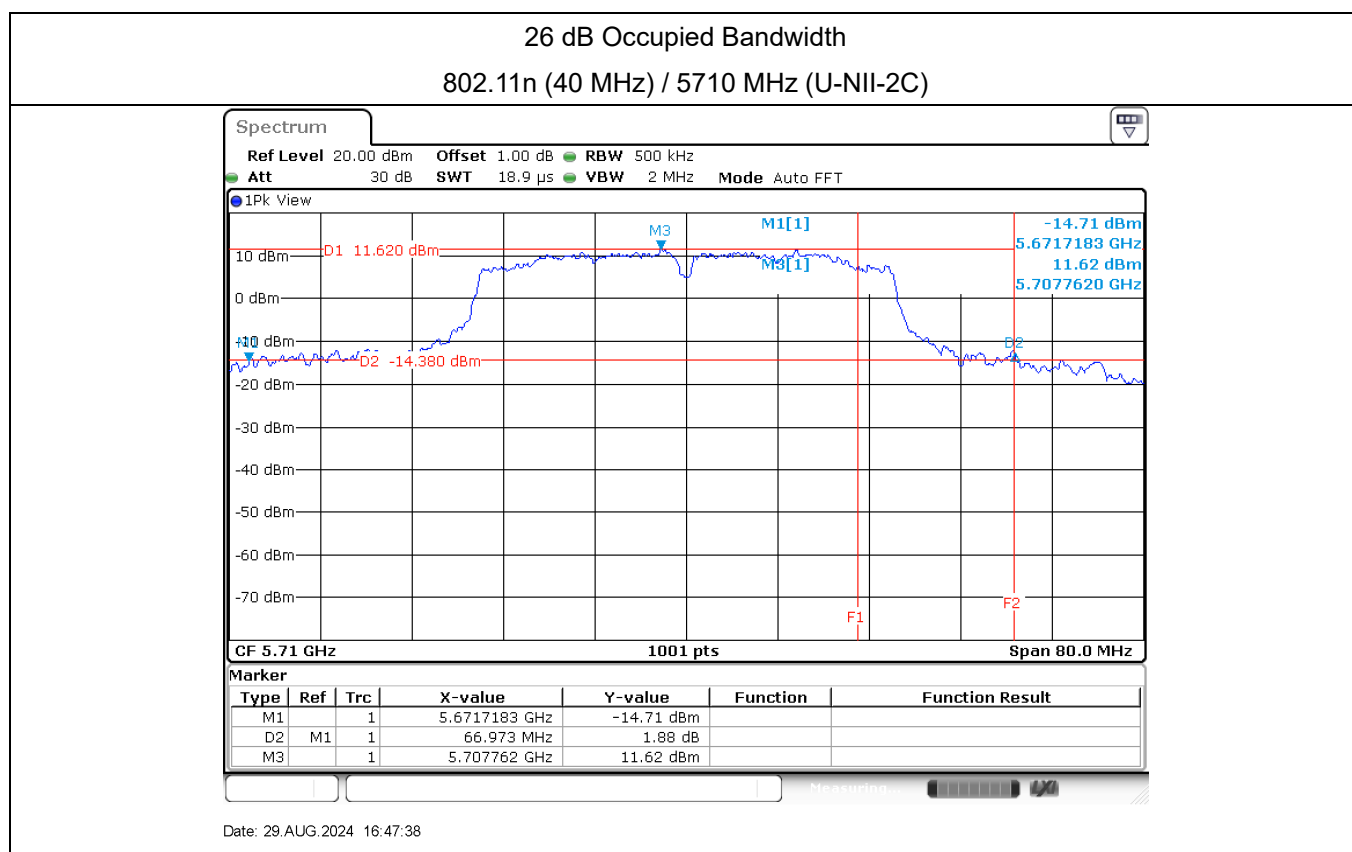


Maximum conducted output power
5710 MHz (U-NII-2C)

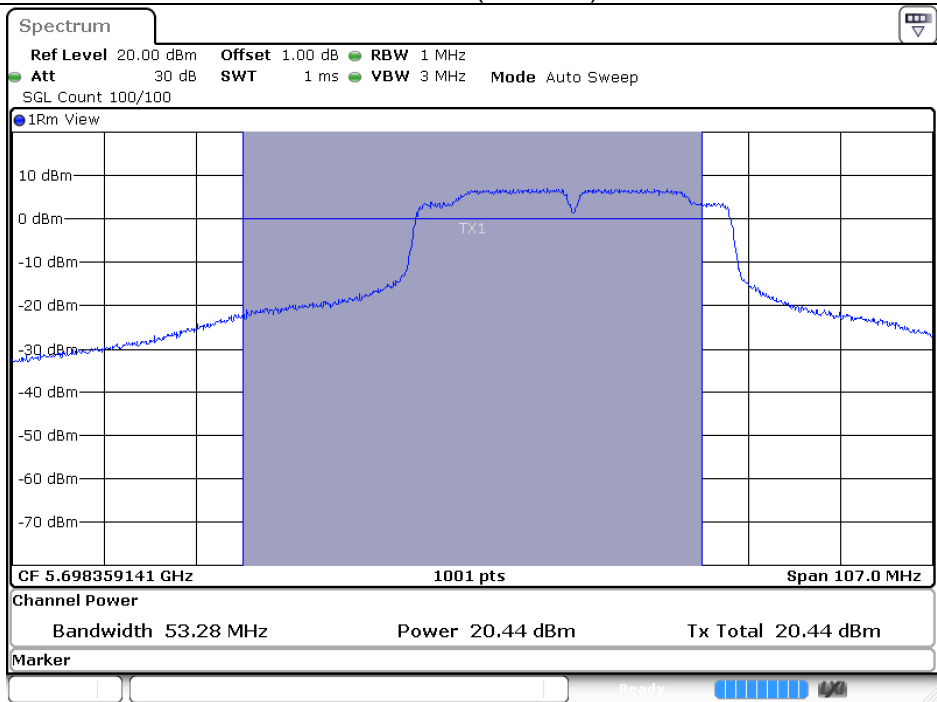

Date: 29.AUG.2024 16:47:43


Maximum conducted output power
5710 MHz (U-NII-3)

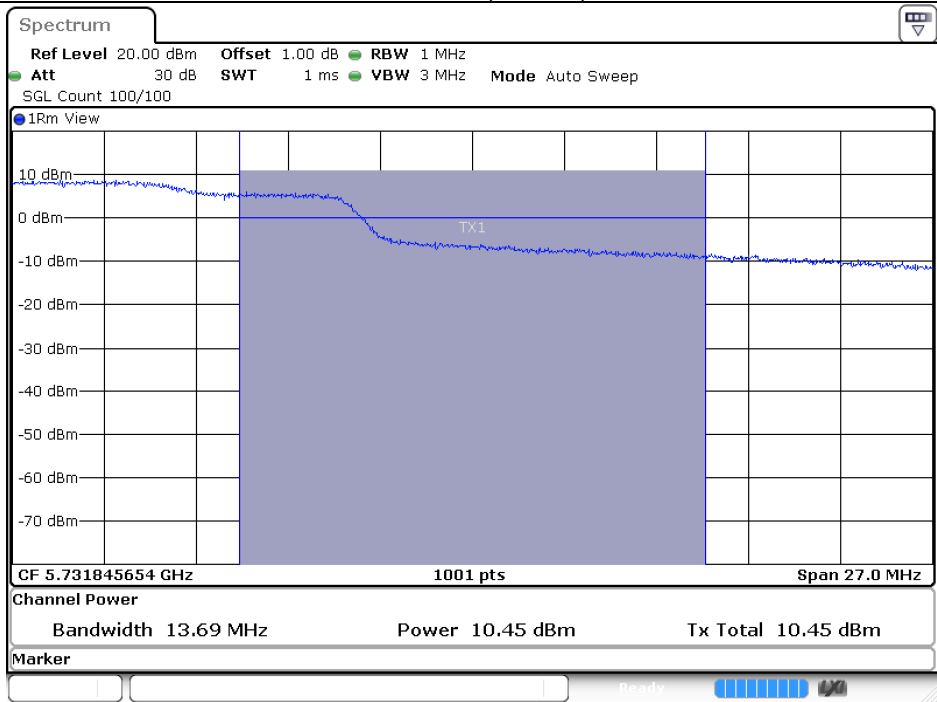


Date: 29.AUG.2024 16:48:14

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11ac (80 MHz)	5210	--	17.68	--	17.68	24	--	Pass
	5290	83.11	16.00	--	16.00	24	30.20	Pass
	5530	84.39	17.33	--	17.33	24	30.26	Pass
	5610	88.23	20.07	--	20.07	24	30.46	Pass
	5690(U-NII-2C)	80.23	20.72	--	20.72	24	30.04	Pass
	5690(U-NII-3)	--	4.28	--	4.28	30	--	Pass
	5775	--	17.78	--	17.78	30	--	Pass

Note: Total Power = Output Power + Duty factor.

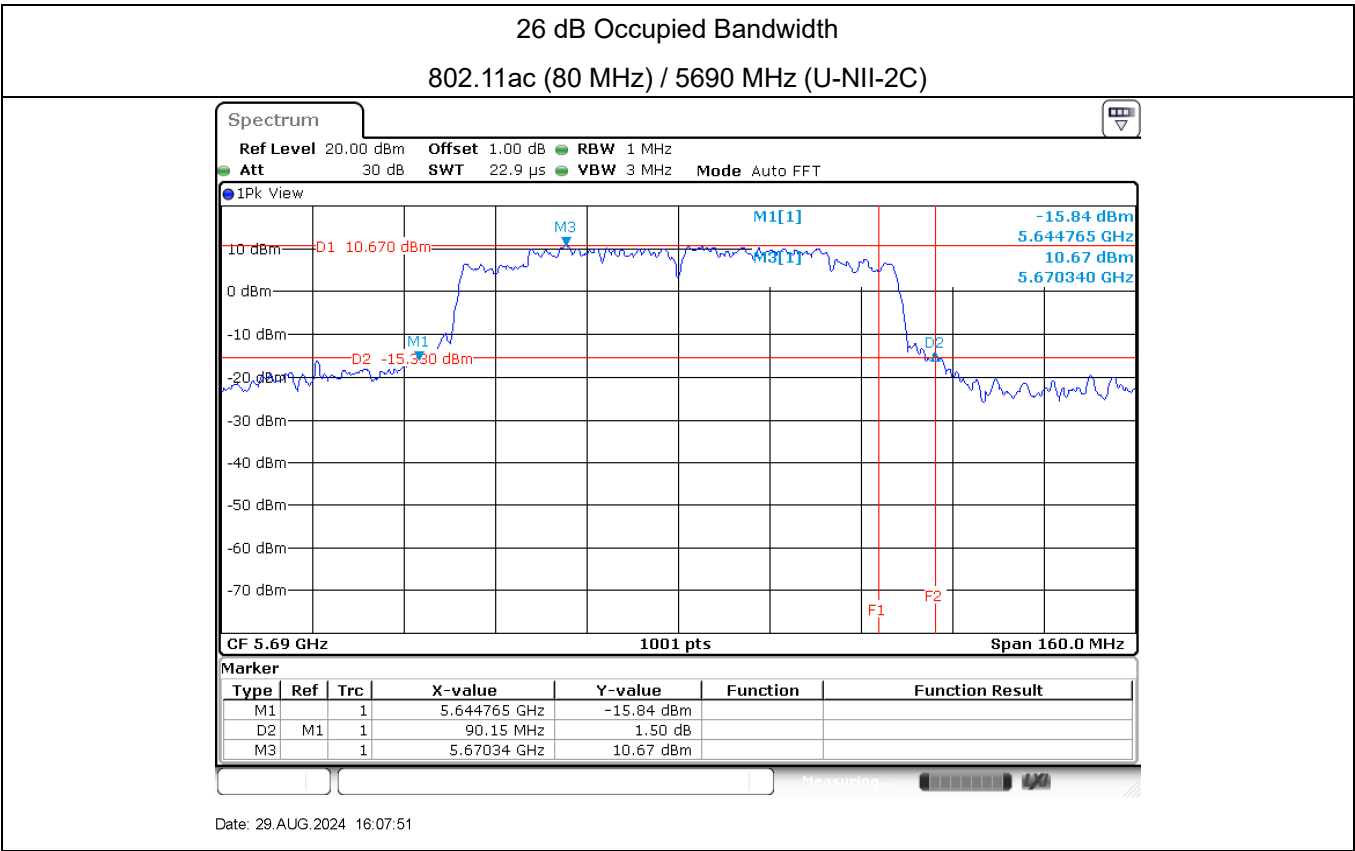


Maximum conducted output power
5690 MHz (U-NII-2C)

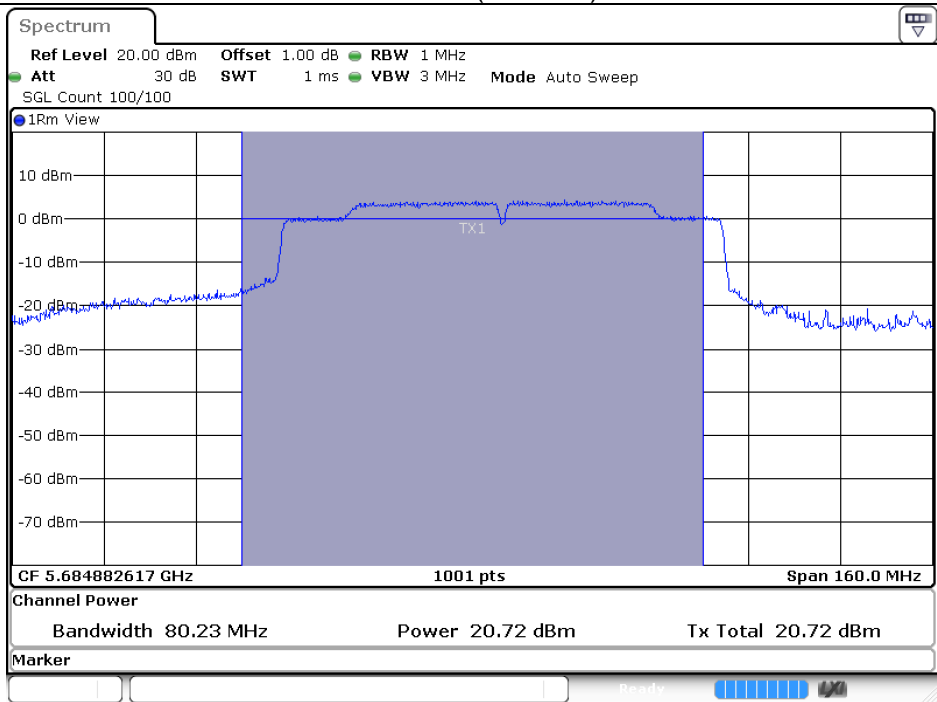

Date: 29.AUG.2024 16:08:18


Maximum conducted output power
5690 MHz (U-NII-3)

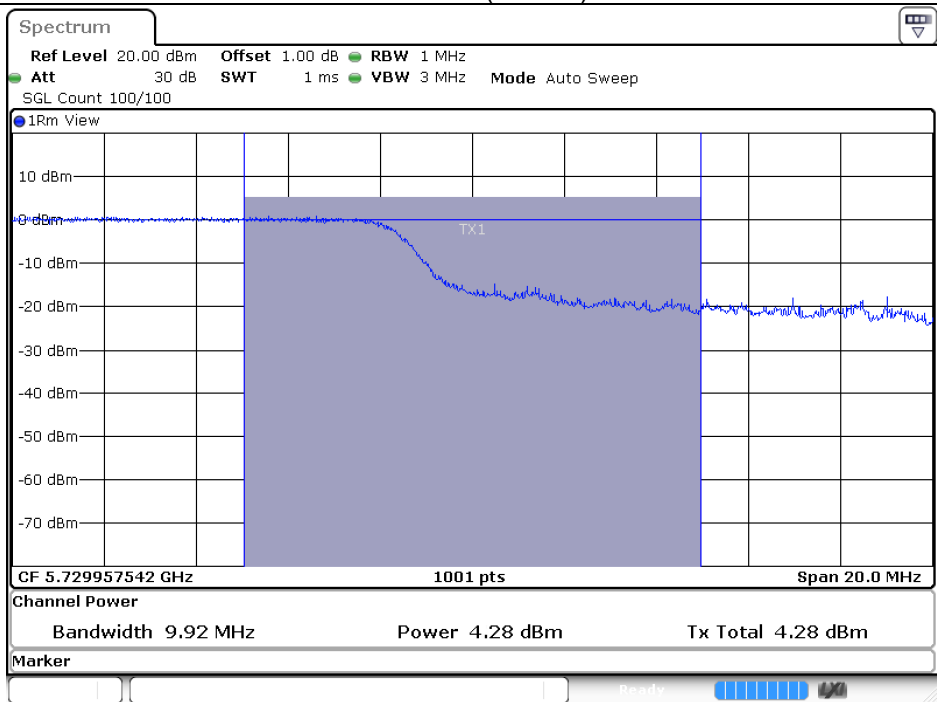


Date: 29.AUG.2024 16:08:20

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11ac (160 MHz)	5250	162.39	13.19	0.00	13.19	24	33.11	Pass
	5570	163.03	14.77	--	14.77	24	33.12	Pass

Note: Total Power = Output Power + Duty factor.

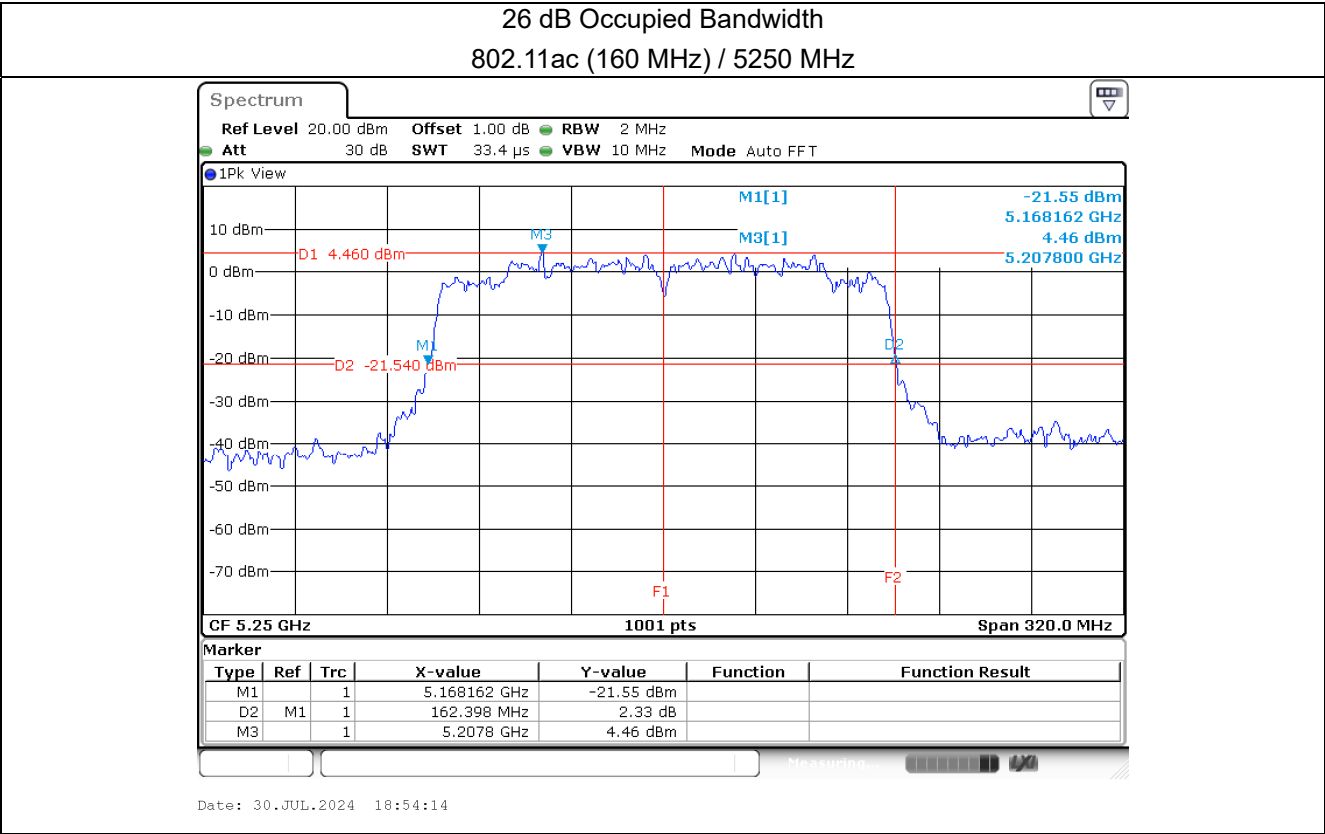

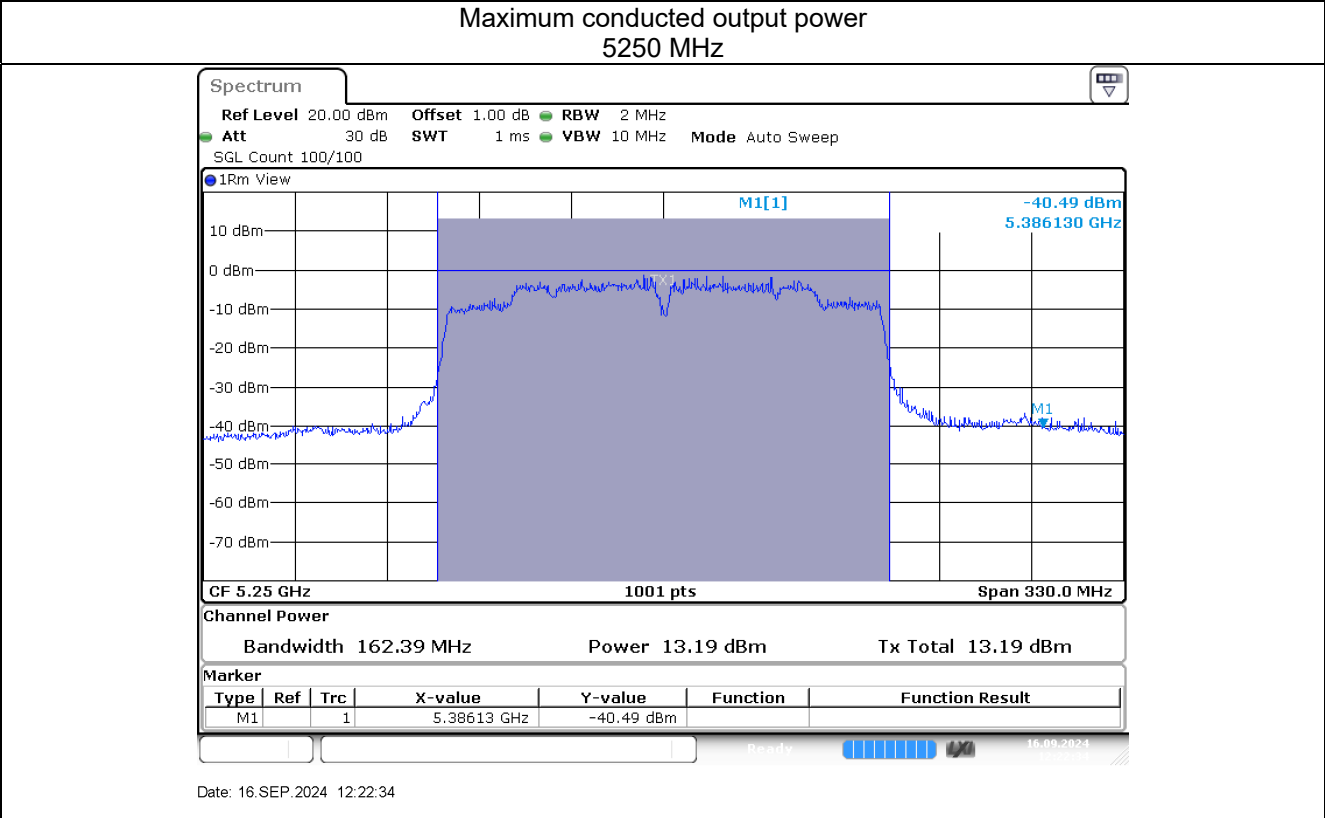


MIMO


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11n (20 MHz)	5180	--	17.05	17.37	--	20.22	24	--	Pass
	5200	--	18.95	18.85	--	21.91	24	--	Pass
	5240	--	19.66	19.53	--	22.61	24	--	Pass
	5260	22.53	19.93	20.47	--	23.22	24	24.53	Pass
	5280	22.93	19.42	19.40	--	22.42	24	24.60	Pass
	5320	21.93	16.05	16.25	--	19.16	24	24.41	Pass
	5500	23.21	16.58	16.84		19.72	24	24.66	Pass
	5600	23.77	19.68	19.79		22.75	24	24.76	Pass
	5700	23.25	16.74	17.01		19.89	24	24.66	Pass
	5720(U-NII-2C)	19.87	18.56	19.03	0.00	21.81	24	23.98	Pass
	5720(U-NII-3)	--	14.39	14.76	0.00	17.59	30	24.53	Pass
	5745	--	21.14	21.30	--	24.23	30	--	Pass
	5785	--	21.63	21.78	--	24.72	30	--	Pass
	5825	--	21.33	21.51	--	24.43	30	--	Pass

Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

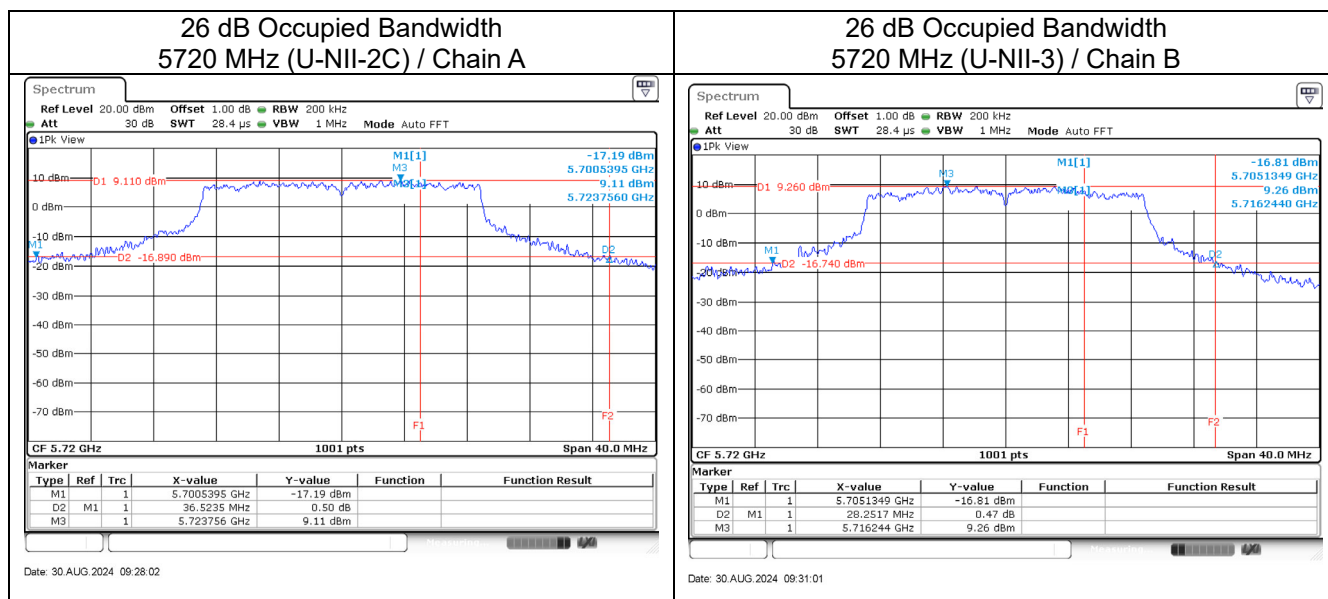


Maximum conducted output power
5720 MHz (U-NII-2C) / Chain A

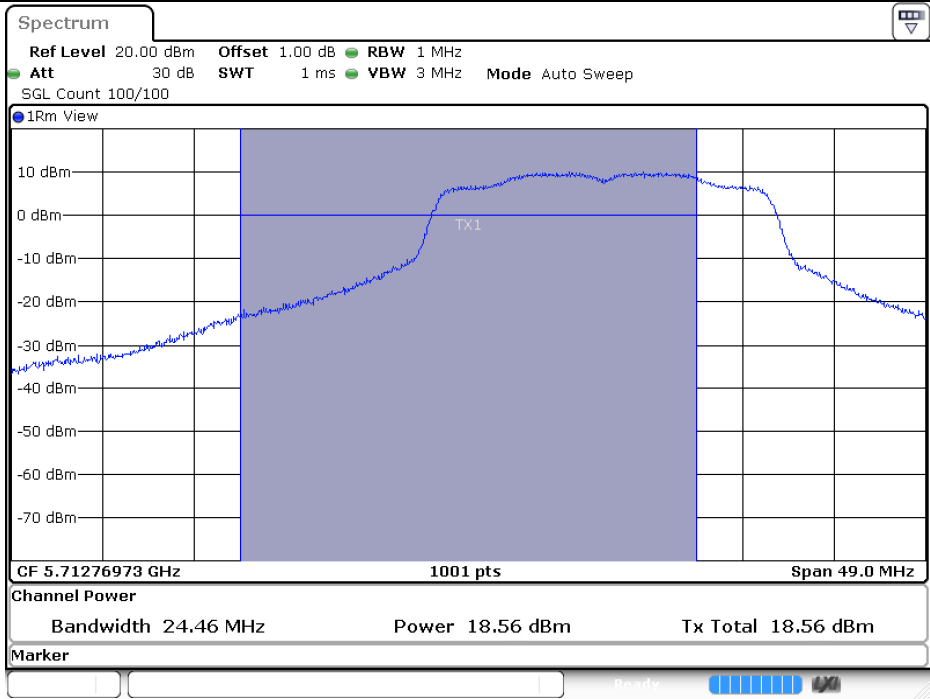


Date: 30.AUG.2024 09:29:52

Maximum conducted output power
5720 MHz (U-NII-3) / Chain A

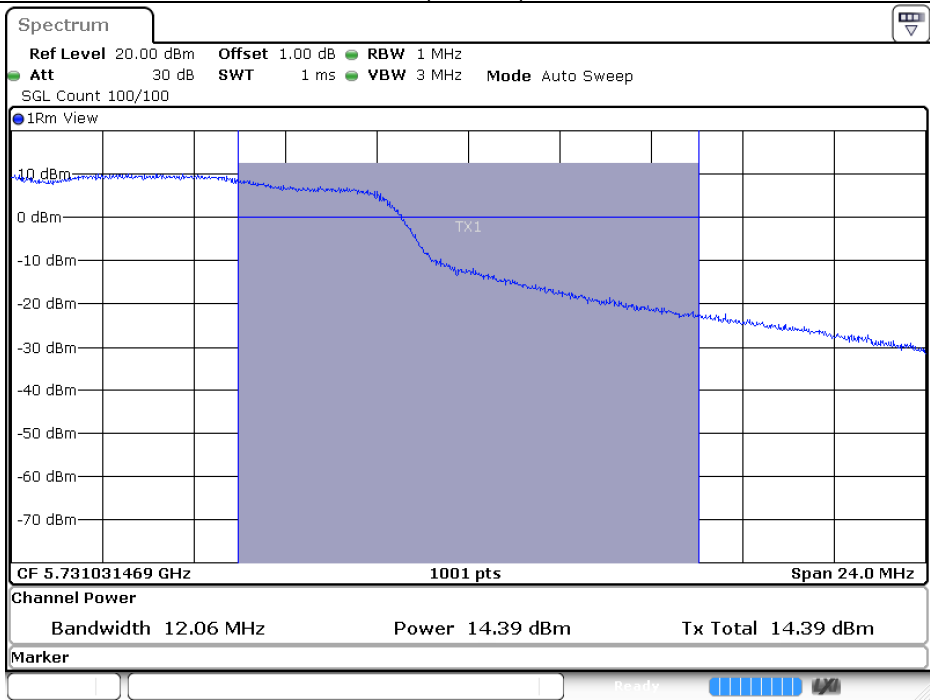


Date: 30.AUG.2024 09:29:54

Maximum conducted output power
5720 MHz (U-NII-2C) / Chain B

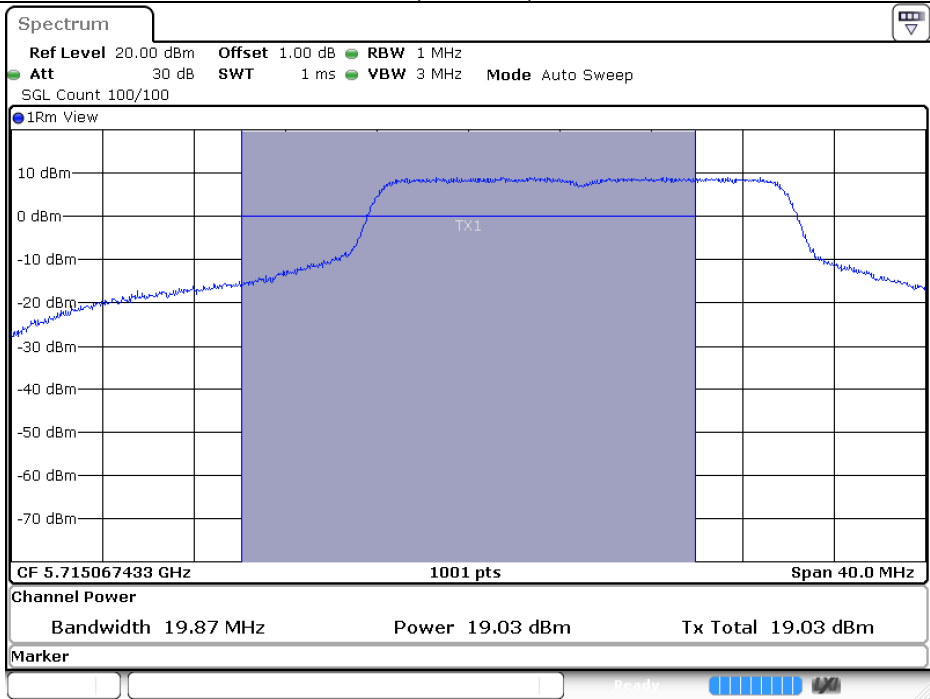

Date: 30.AUG.2024 09:31:31

Maximum conducted output power
5720 MHz (U-NII-3) / Chain B

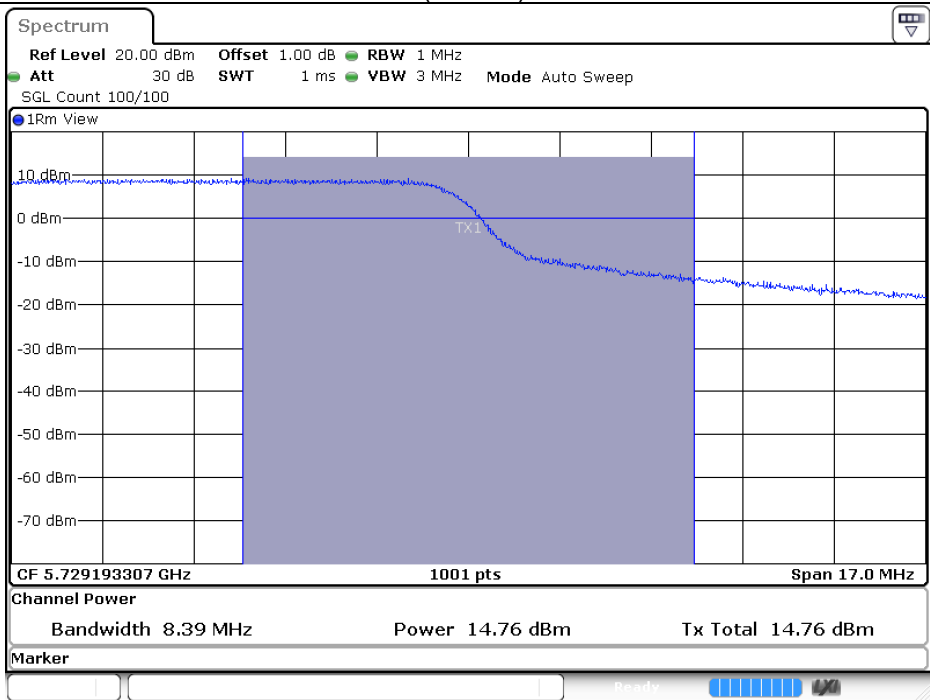


Date: 30.AUG.2024 09:31:34


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11n (40 MHz)	5190	--	14.35	14.40	--	17.39	24	--	Pass
	5230	--	18.15	18.03	--	21.10	24	--	Pass
	5270	40.75	16.88	17.38	--	20.15	24	27.10	Pass
	5310	41.79	14.85	14.90	--	17.89	24	27.21	Pass
	5510	43.79	16.31	16.39	--	19.36	24	27.41	Pass
	5590	40.59	19.78	20.63	--	23.24	24	27.08	Pass
	5670	41.95	16.33	16.40	--	19.38	24	27.23	Pass
	5710(U-NII-2C)	36.34	18.29	20.36	0.00	22.46	24	26.60	Pass
	5710(U-NII-3)	--	8.34	10.07	0.00	12.30	30	--	Pass
	5755	--	18.83	18.37	--	21.62	30	--	Pass
	5795	--	20.07	19.58	--	22.84	30	--	Pass

Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

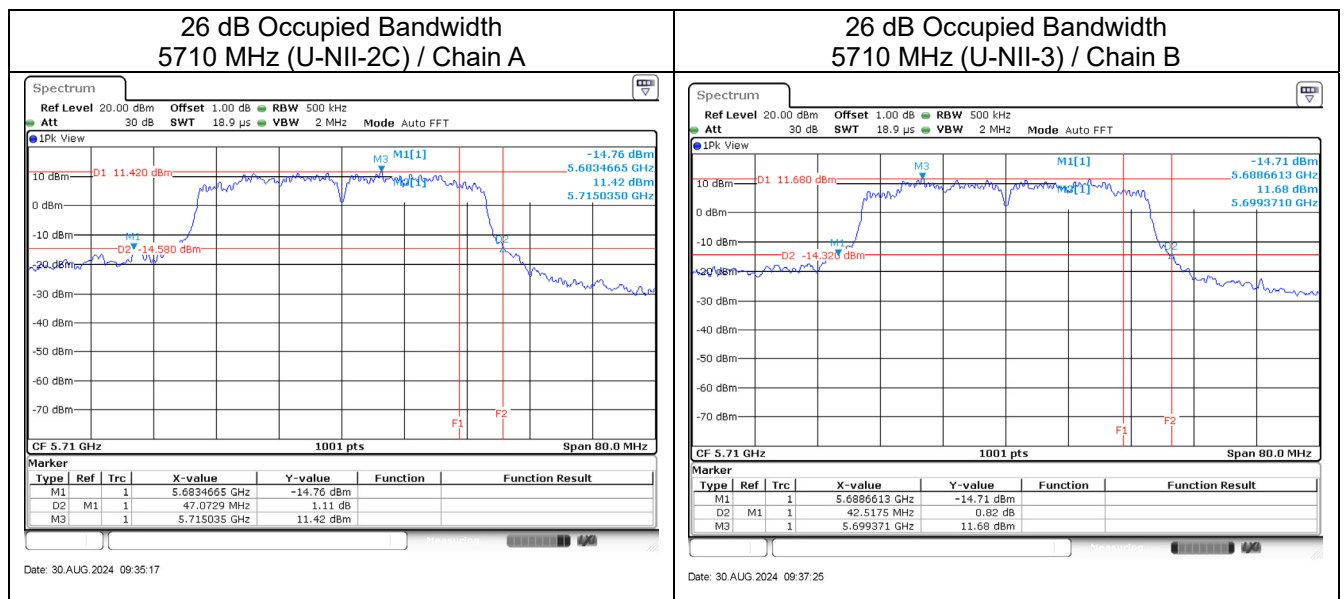


Maximum conducted output power
5710 MHz (U-NII-2C) / Chain A

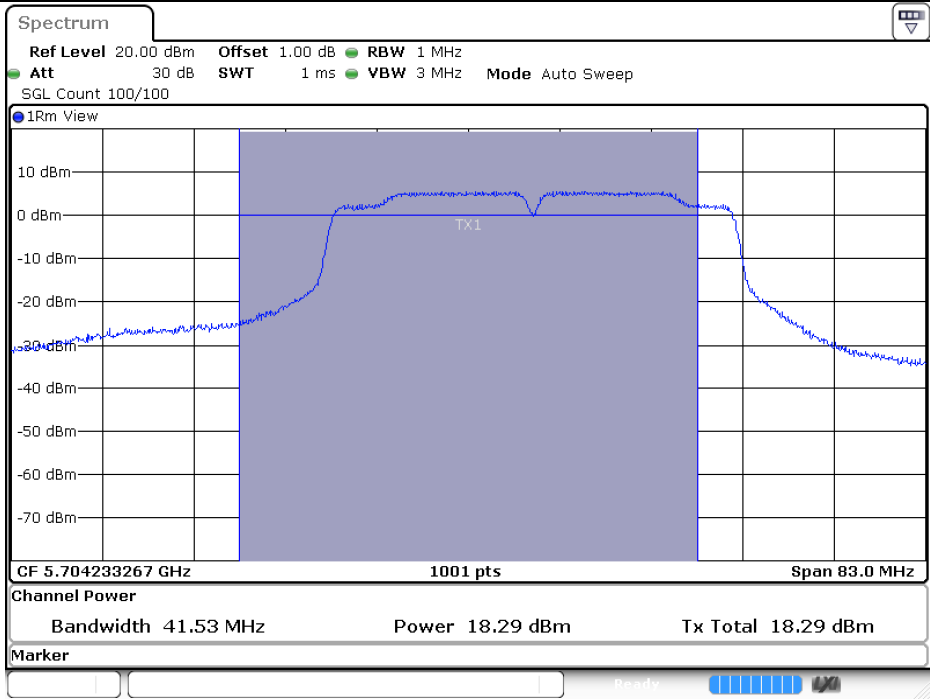


Date: 30.AUG.2024 09:35:32

Maximum conducted output power
5710 MHz (U-NII-3) / Chain A

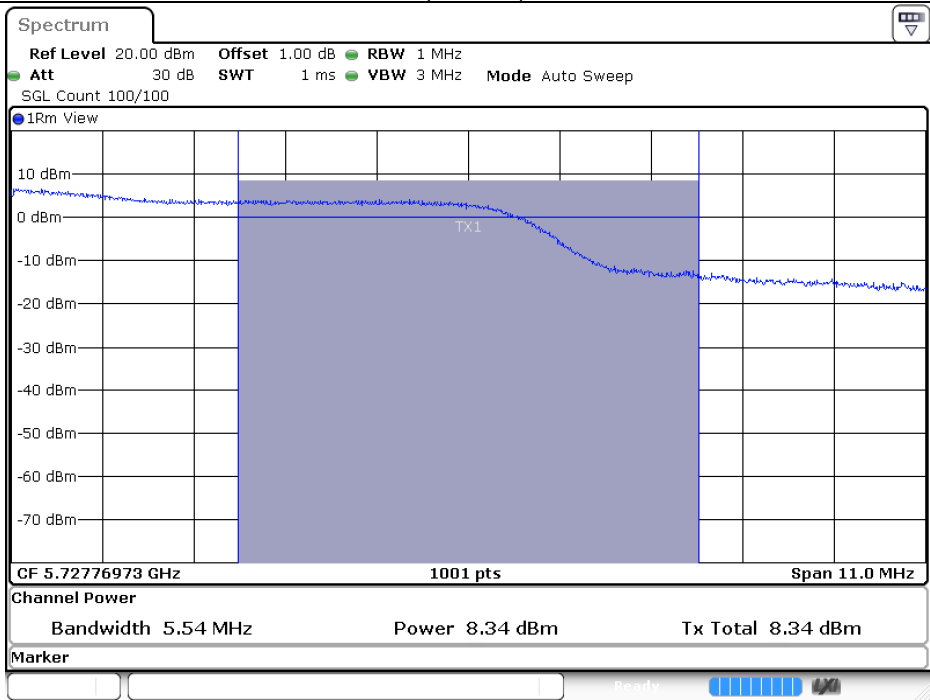


Date: 30.AUG.2024 09:36:04

Maximum conducted output power
5710 MHz (U-NII-2C) / Chain B

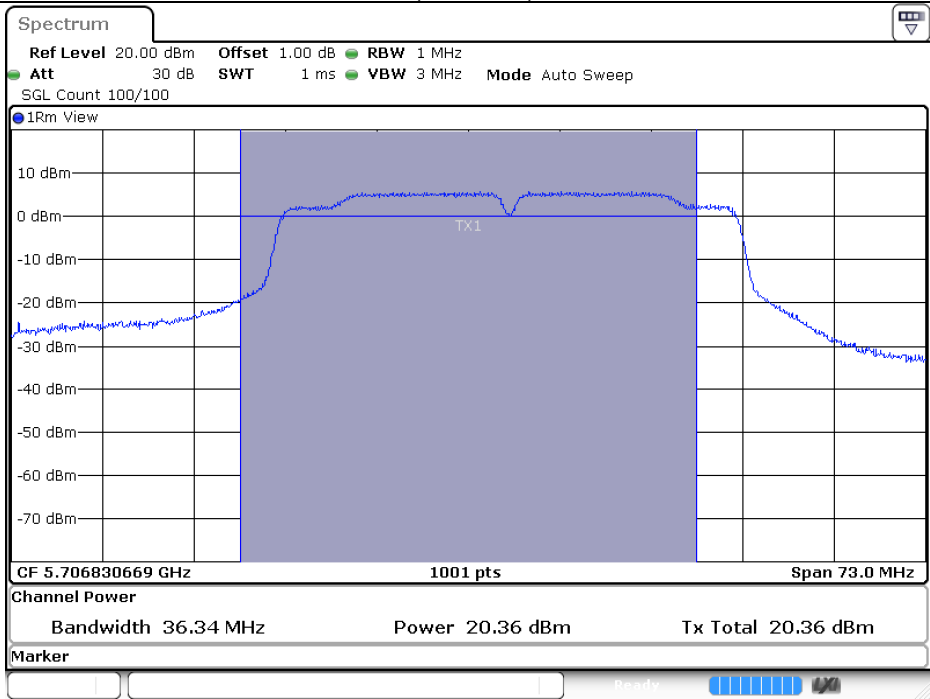

Date: 30.AUG.2024 09:38:15

Maximum conducted output power
5710 MHz (U-NII-3) / Chain B

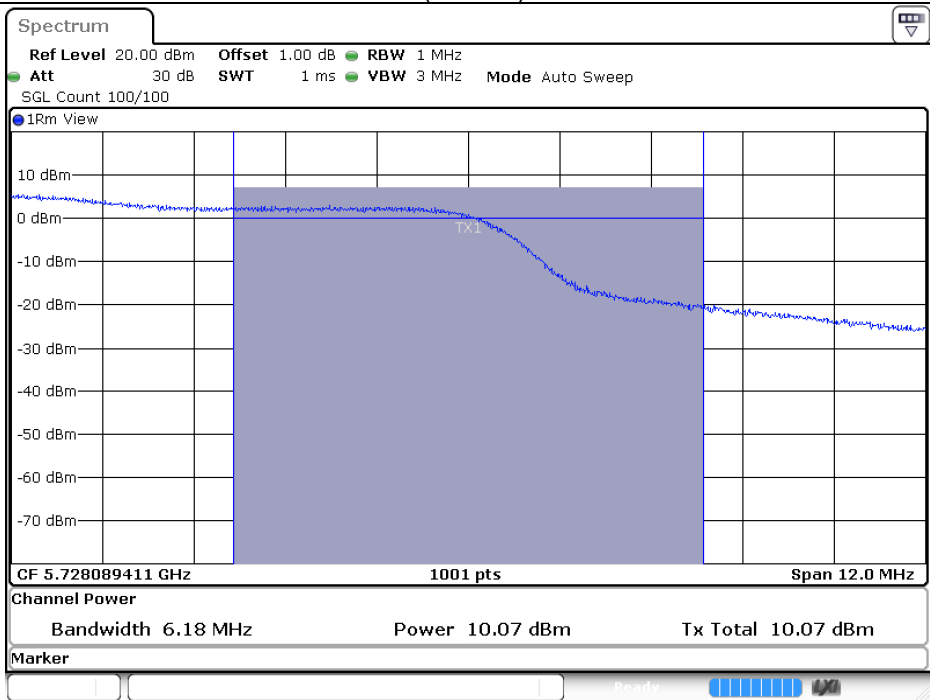


Date: 30.AUG.2024 09:38:17


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	--	14.61	13.79	--	17.23	24	--	Pass
	5290	81.83	13.75	13.82	--	16.80	24	--	Pass
	5530	83.91	15.15	14.96	--	18.07	24	30.24	Pass
	5610	82.63	19.71	20.26	--	23.00	24	30.17	Pass
	5690(U-NII-2C)	78.48	20.06	20.60	0.00	23.35	24	29.95	Pass
	5690(U-NII-3)	--	3.73	4.47	0.00	7.13	30	--	Pass
	5775	--	16.38	16.45	--	19.43	30	--	Pass

Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

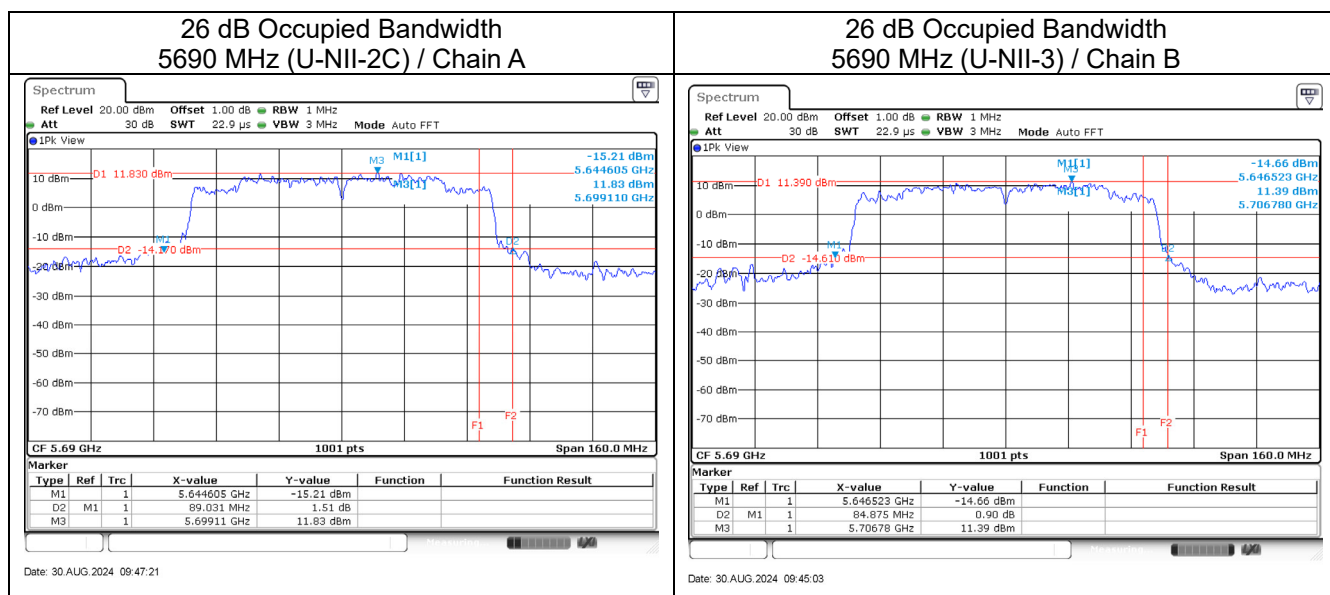


Maximum conducted output power
5690 MHz (U-NII-2C) / Chain A

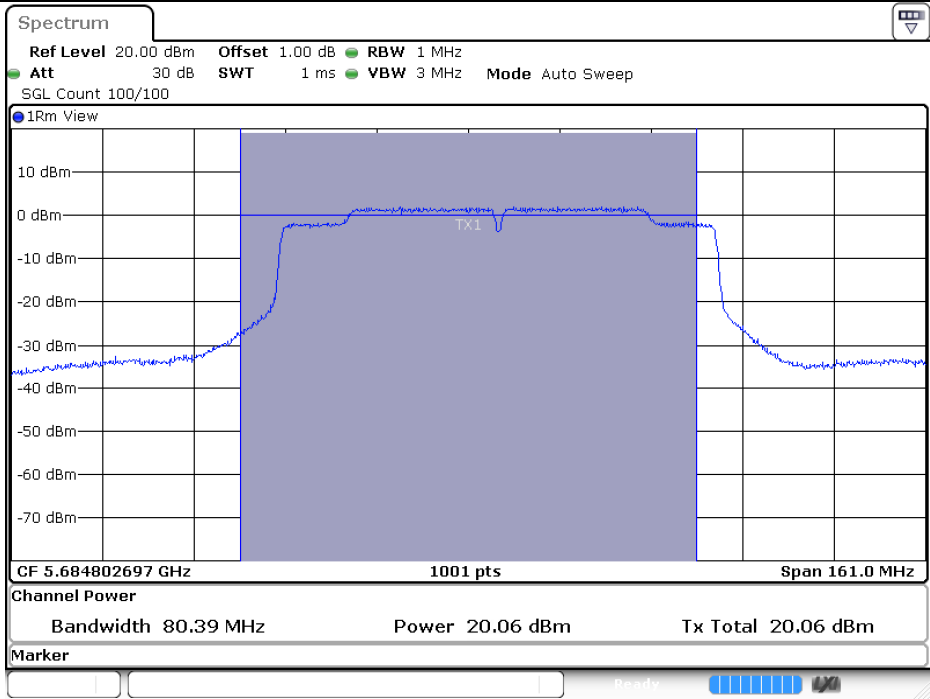


Date: 30.AUG.2024 09:48:22

Maximum conducted output power
5690 MHz (U-NII-3) / Chain A

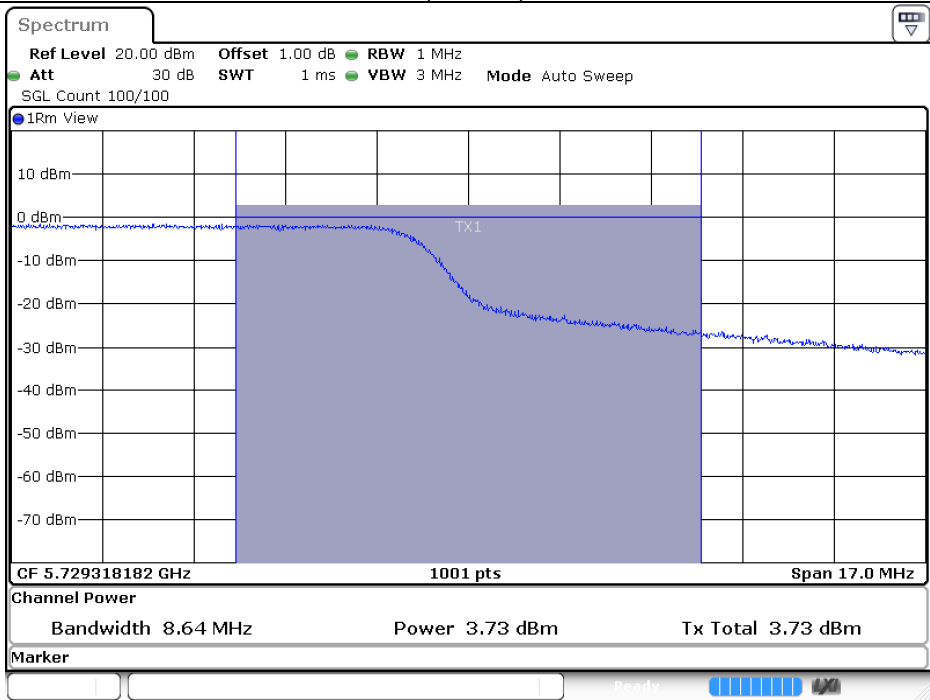


Date: 30.AUG.2024 09:48:25

Maximum conducted output power
5690 MHz (U-NII-2C) / Chain B

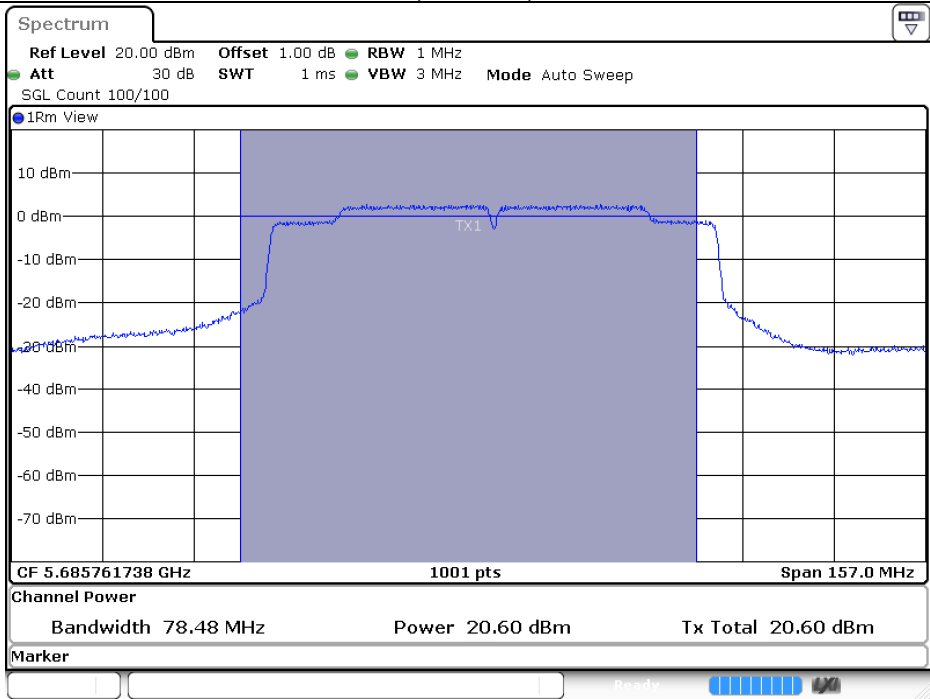

Date: 30.AUG.2024 09:46:28

Maximum conducted output power
5690 MHz (U-NII-3) / Chain B

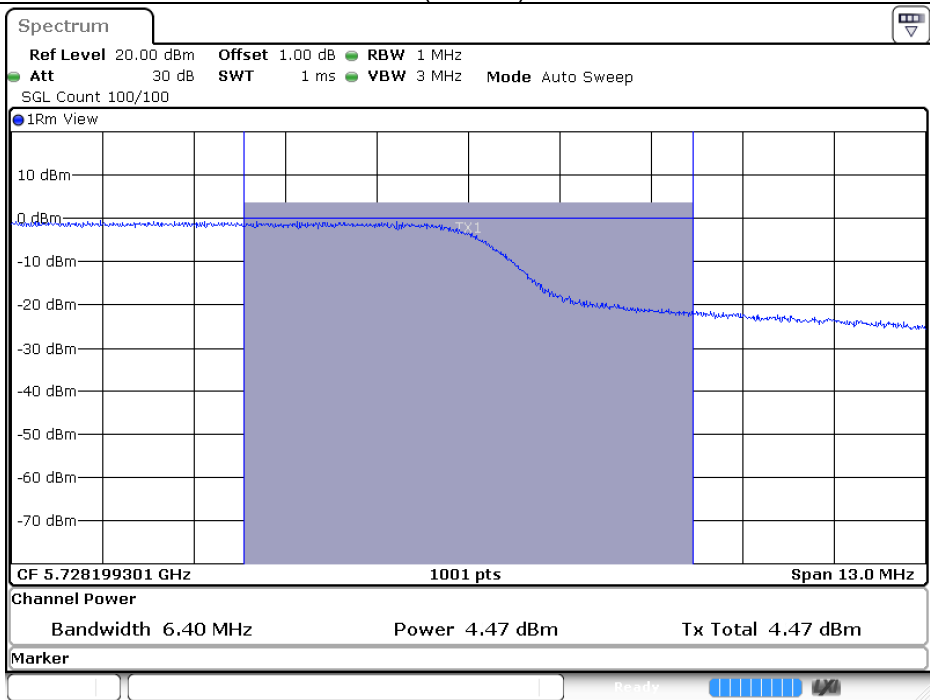


Date: 30.AUG.2024 09:46:31


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (160 MHz)	5250	162.07	10.77	9.82	0.12	13.45	24	33.10	Pass
	5570	161.75	13.36	12.96	--	16.17	24	33.09	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

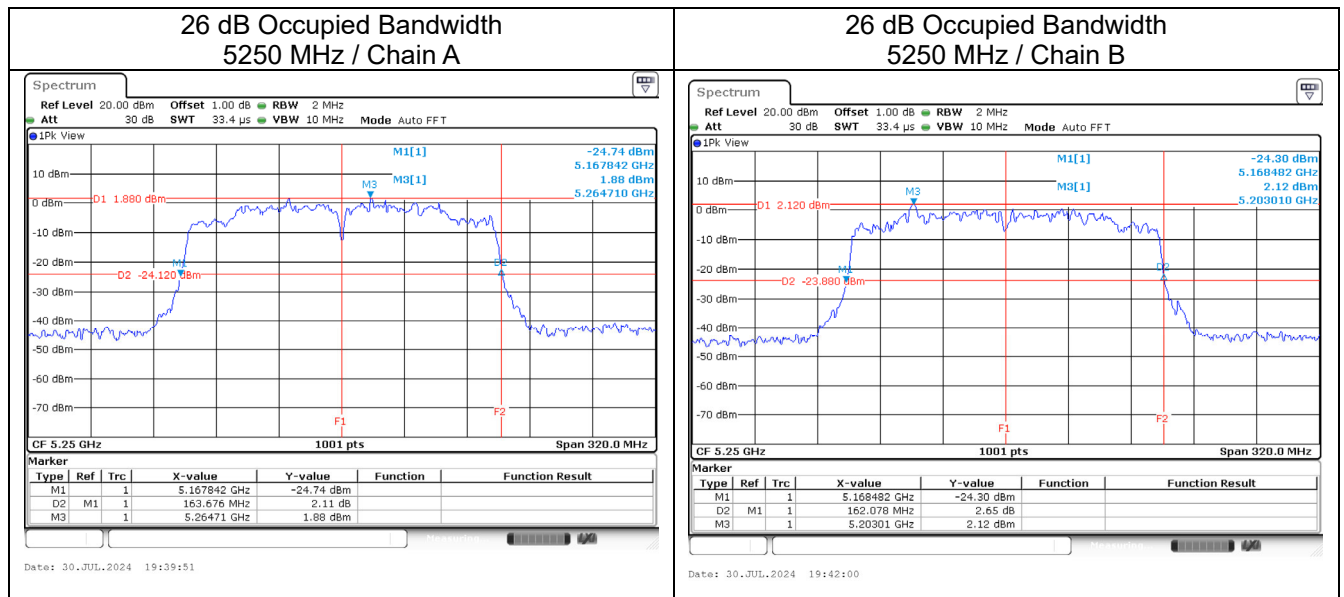


Maximum conducted output power
5250 MHz / Chain A

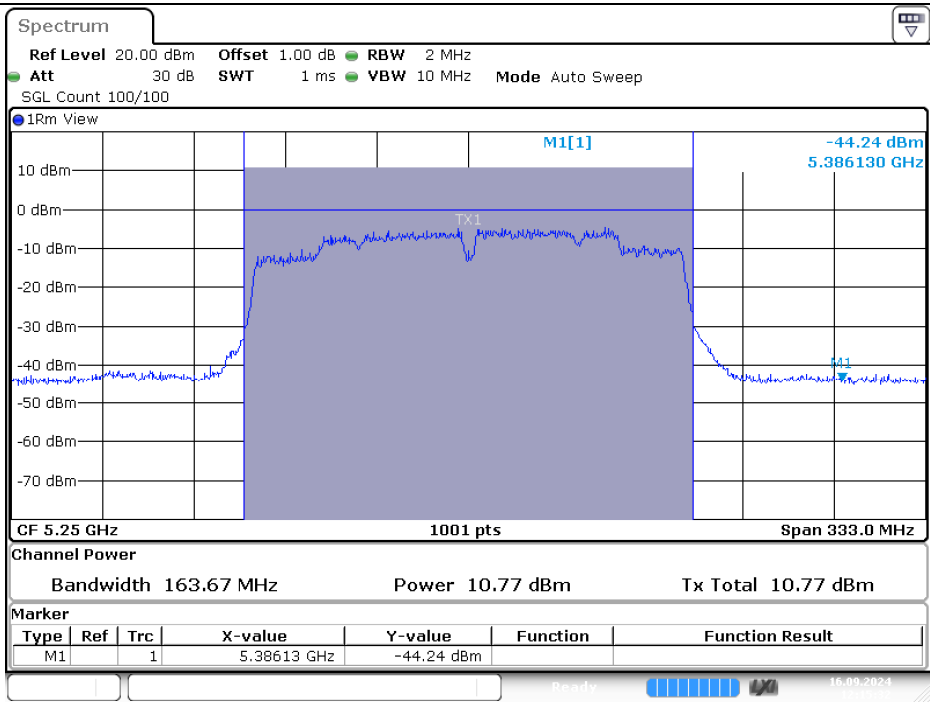

Date: 16.SEP.2024 12:15:33

Maximum conducted output power
5250 MHz / Chain B

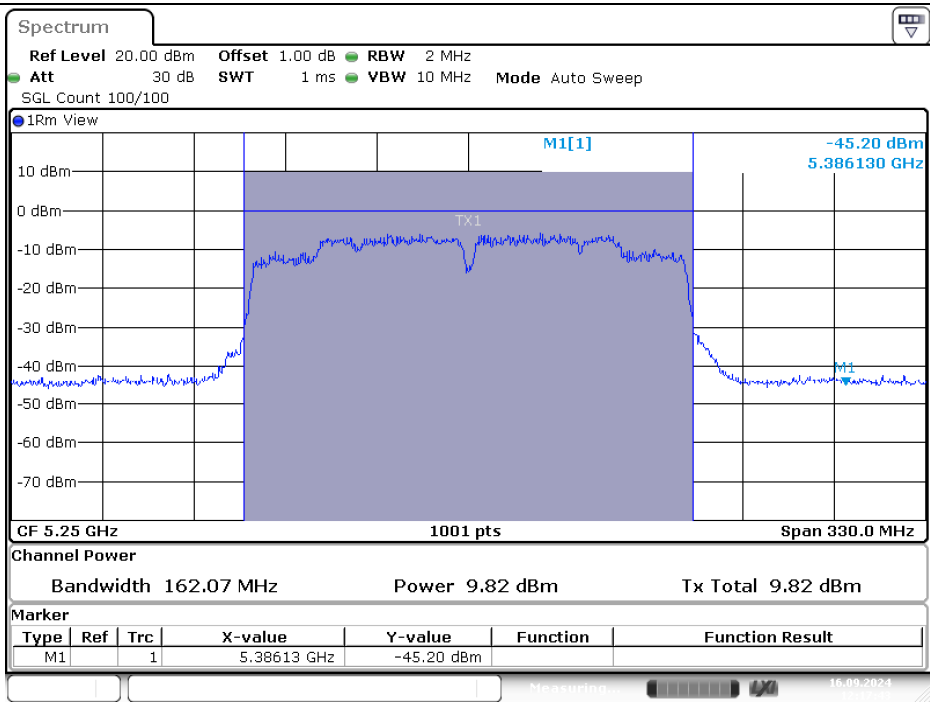

Date: 16.SEP.2024 12:17:43


Appendix B. Test Result of Transmitter Radiated Spurious Emission

SISO A

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5180MHz
Test by :nova

Level (dBuV/m)

Date: 2024-08-08

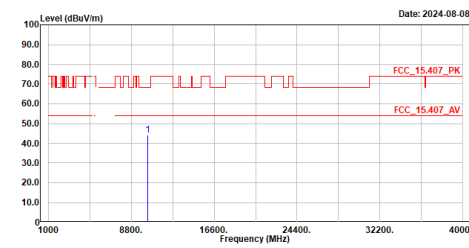

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	44.00	68.22	-24.22	41.22	2.78	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :nova

Level (dBuV/m)

Date: 2024-08-08

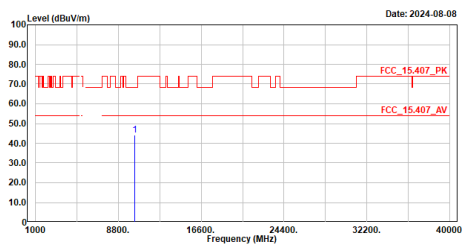

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	44.27	68.22	-23.95	41.49	2.78	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5200MHz
Test by :nova

Level (dBuV/m)

Date: 2024-08-08

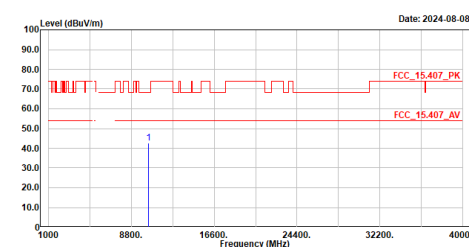

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	42.51	68.22	-25.71	39.80	2.71	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5200MHz
Test by :nova

Level (dBuV/m)

Date: 2024-08-08

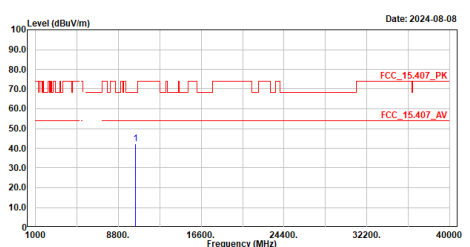


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	42.89	68.22	-26.13	39.38	2.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :nova

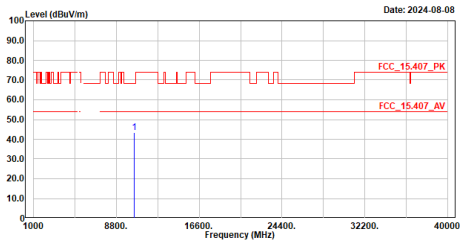

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	43.53	68.22	-24.69	40.75	2.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :nova

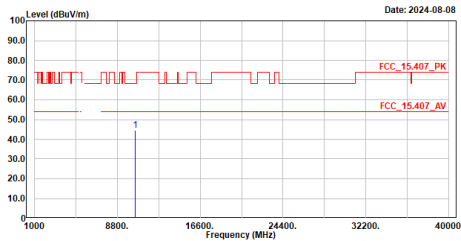

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	44.63	68.22	-23.59	41.85	2.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5260MHz
Test by :nova

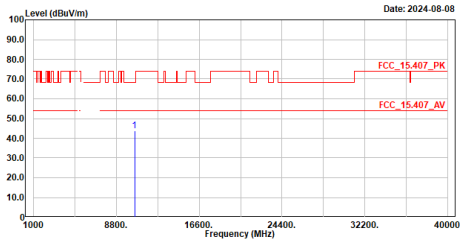

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	43.95	68.22	-24.27	41.05	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5260MHz
Test by :nova

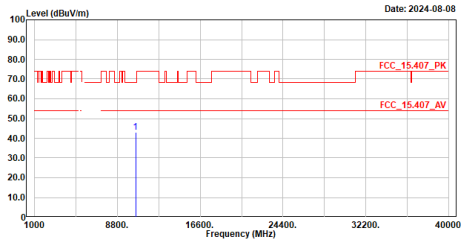

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	42.93	68.22	-25.29	40.03	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5280MHz
Test by :nova

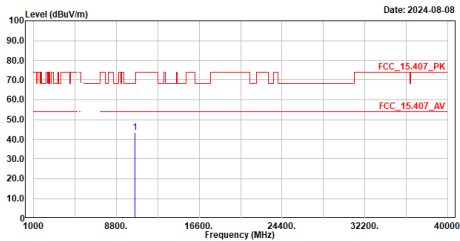

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10560.000	43.43	68.22	-24.79	40.51	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5280MHz
Test by :nova

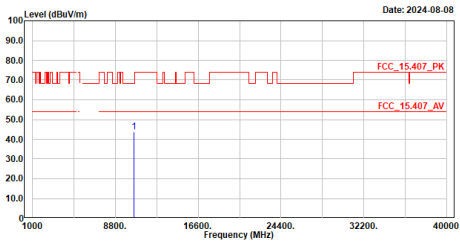

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10560.000	43.76	68.22	-24.46	40.84	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5320MHz
Test by :nova

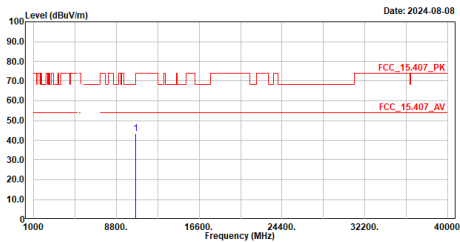

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10640.000	43.42	74.00	-30.58	40.35	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5320MHz
Test by :nova

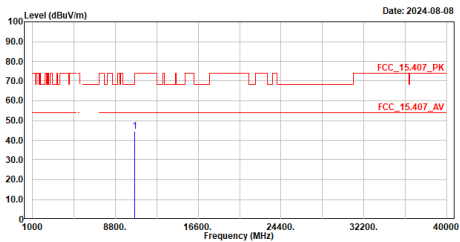

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10640.000	44.65	74.00	-29.35	41.58	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5500MHz
Test by :Rock

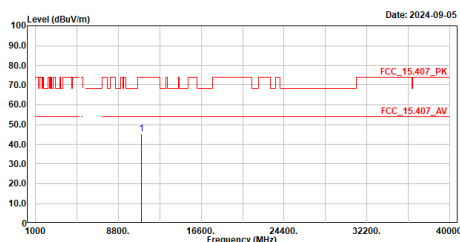


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.24	74.00	-28.76	41.95	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5500MHz
Test by :Rock

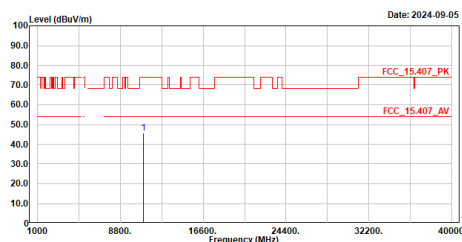


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.79	74.00	-28.21	42.50	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5600MHz
Test by :Rock

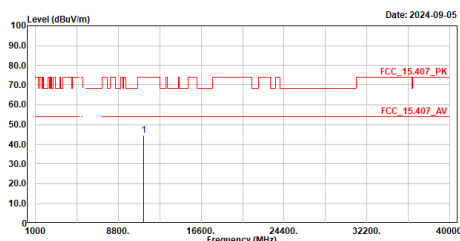


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11200.000	44.38	74.00	-29.62	40.57	3.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5600MHz
Test by :Rock

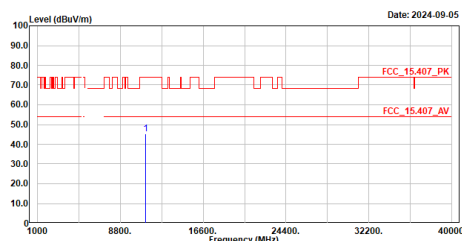


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11200.000	45.17	74.00	-28.83	41.36	3.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5700MHz
Test by :Rock

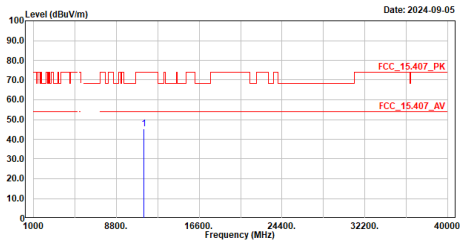

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11400.000	45.19	74.00	-28.81	41.07	4.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5700MHz
Test by :Rock

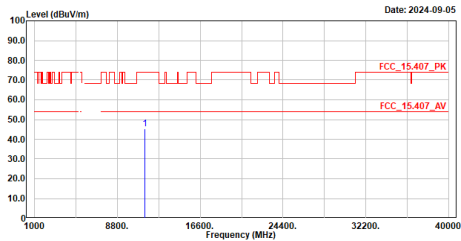

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11400.000	45.15	74.00	-28.85	41.03	4.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5745MHz
Test by :Rock

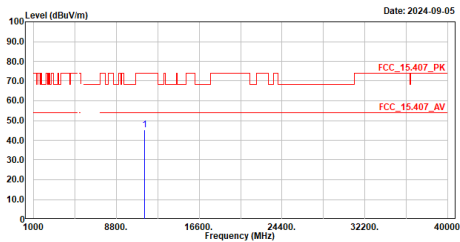

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	45.18	74.00	-28.82	40.99	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5745MHz
Test by :Rock

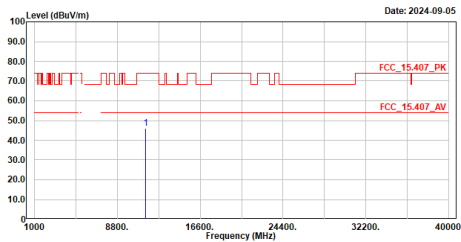

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	45.88	74.00	-28.12	41.69	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5785MHz
Test by :Rock

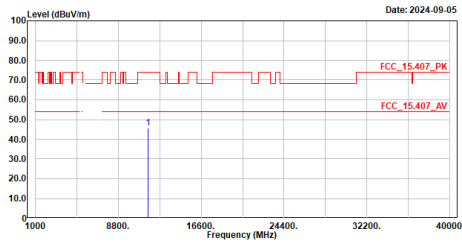


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	45.72	74.00	-28.28	41.48	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5785MHz
Test by :Rock

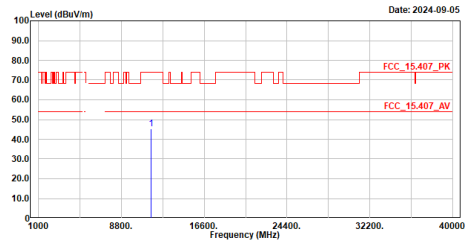


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	45.47	74.00	-28.53	41.23	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5825MHz
Test by :Rock

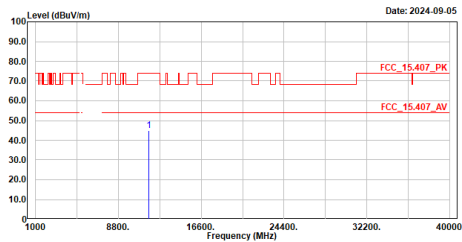


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	44.73	74.00	-29.27	40.55	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5825MHz
Test by :Rock

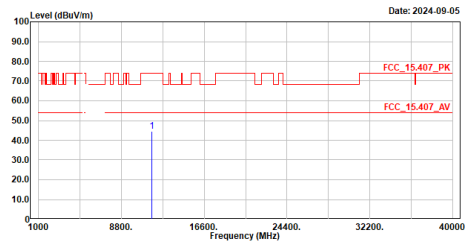


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	44.62	74.00	-29.38	40.44	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5180MHz
Test by :nova

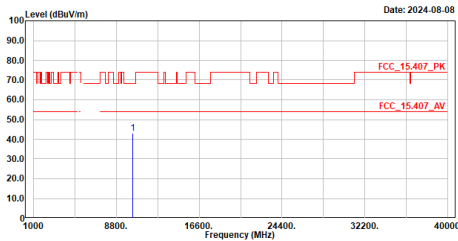

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	43.00	68.22	-25.22	40.22	2.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5180MHz
Test by :nova

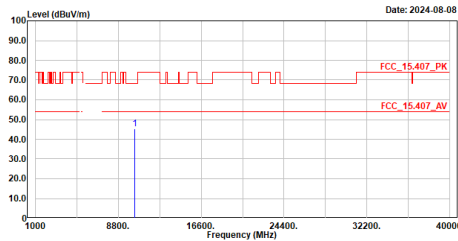

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	45.27	68.22	-22.95	42.49	2.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5200MHz
Test by :nova

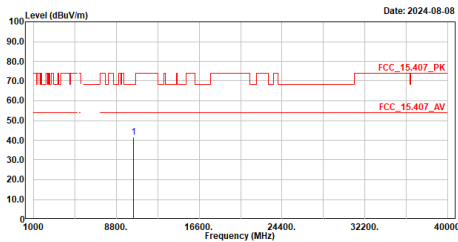

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	41.51	68.22	-26.71	38.80	2.71	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5200MHz
Test by :nova

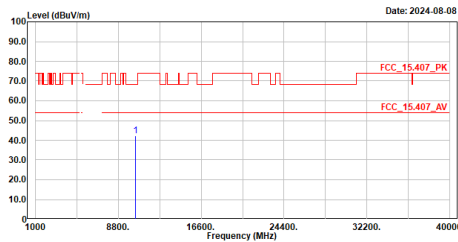

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	42.09	68.22	-26.13	39.38	2.71	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5240MHz
Test by :nova

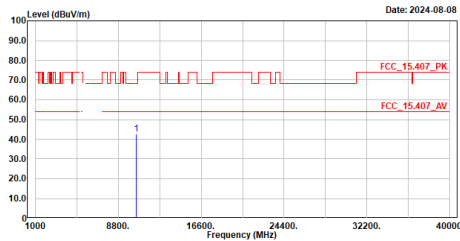


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	42.53	68.22	-25.69	39.75	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5240MHz
Test by :nova

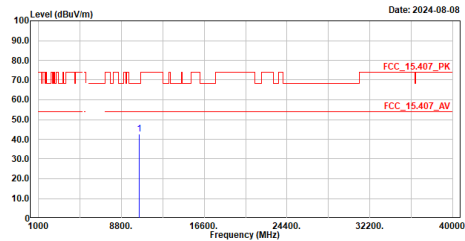


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	42.63	68.22	-25.59	39.85	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5260MHz
Test by :nova

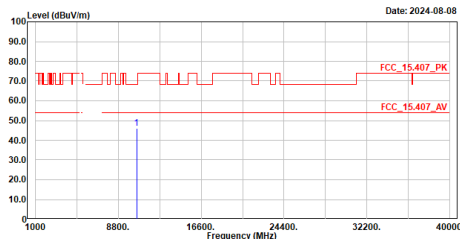


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	45.95	68.22	-22.27	43.05	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5260MHz
Test by :nova

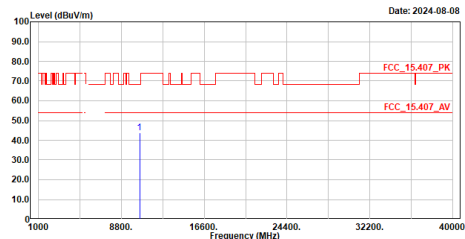


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	43.93	68.22	-24.29	41.03	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5280MHz
Test by :nova

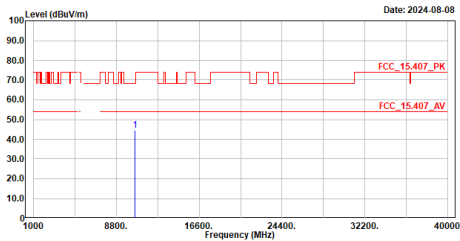

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10560.000	44.43	68.22	-23.79	41.51	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5280MHz
Test by :nova

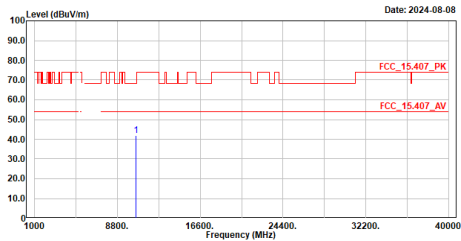

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10560.000	41.76	68.22	-26.46	38.84	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5320MHz
Test by :nova

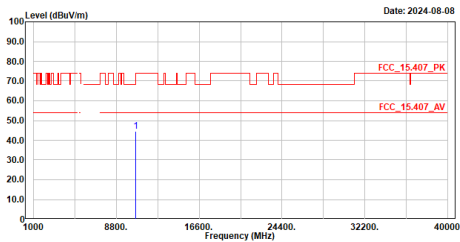

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10640.000	44.42	74.00	-29.58	41.35	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5320MHz
Test by :nova

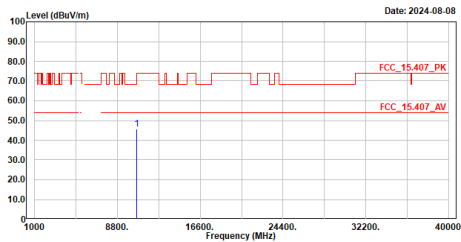

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10640.000	45.65	74.00	-28.35	42.58	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5500MHz
Test by :Rock

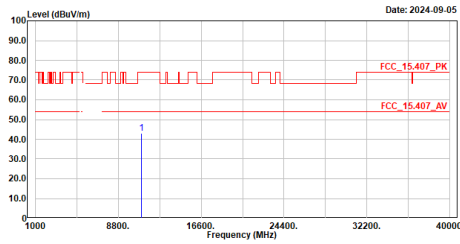


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11000.000	42.96	74.00	-31.04	39.67	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5500MHz
Test by :Rock

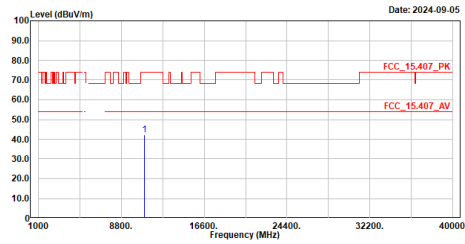


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11000.000	42.44	74.00	-31.56	39.15	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5600MHz
Test by :Rock

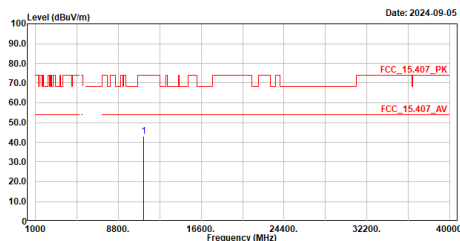


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11200.000	43.18	74.00	-30.82	39.37	3.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5600MHz
Test by :Rock

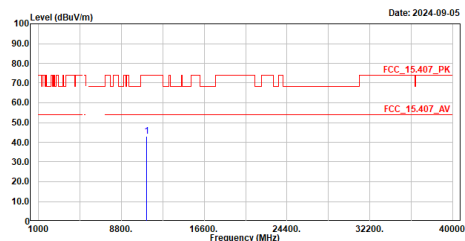


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11200.000	43.08	74.00	-30.92	39.27	3.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5700MHz
Test by :Rock

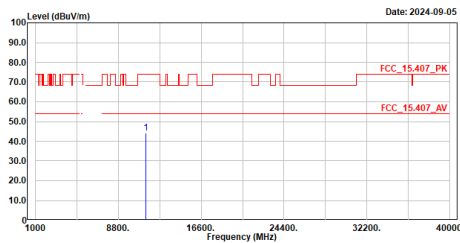


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11400.000	43.97	74.00	-30.03	39.85	4.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5700MHz
Test by :Rock

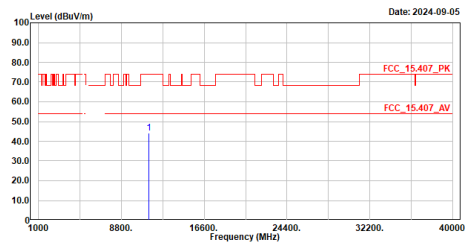


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11400.000	44.18	74.00	-29.82	40.06	4.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5720MHz
Test by :Rock

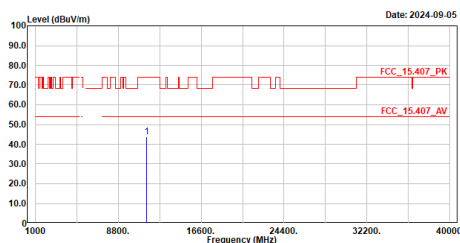


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11440.000	43.76	74.00	-30.24	39.53	4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5720MHz
Test by :Rock

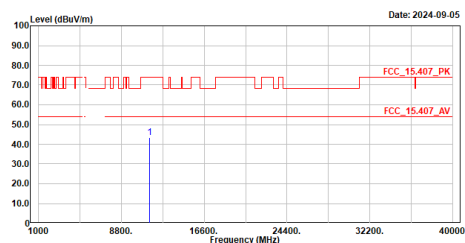


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11440.000	43.46	74.00	-30.54	39.23	4.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5745MHz
Test by :Rock

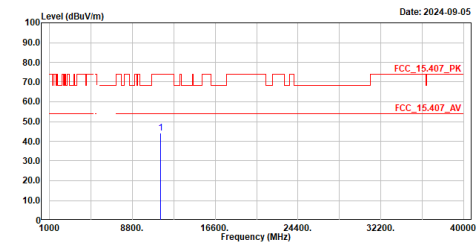

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	43.97	74.00	-30.03	39.78	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5745MHz
Test by :Rock

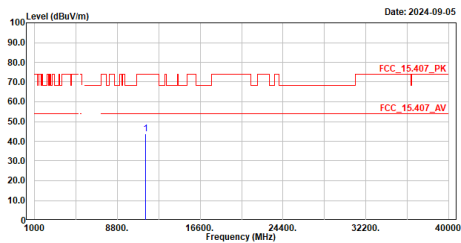

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	43.74	74.00	-30.26	39.55	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5785MHz
Test by :Rock

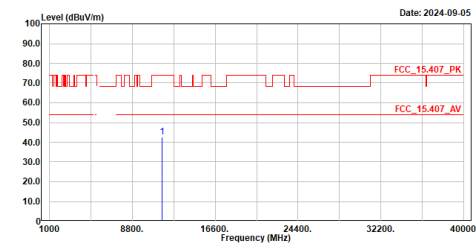

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	42.74	74.00	-31.26	38.50	4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5785MHz
Test by :Rock

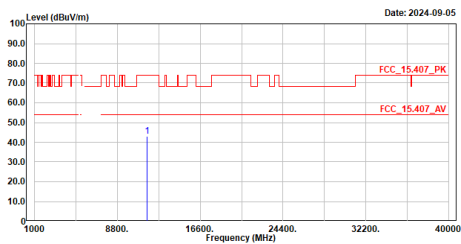

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	43.00	74.00	-31.00	38.76	4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_5825MHz
Test by :Rock

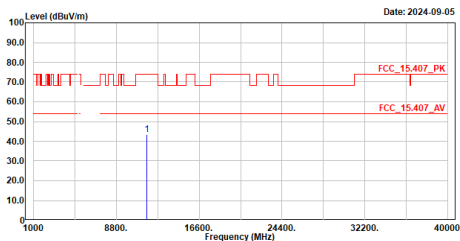

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	43.27	74.00	-30.73	39.09	4.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_5825MHz
Test by :Rock

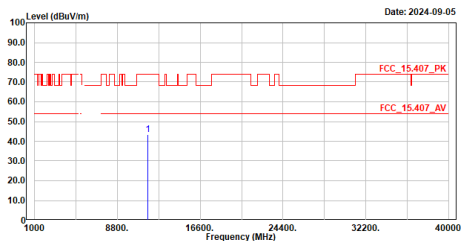

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	43.46	74.00	-30.54	39.28	4.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5190MHz
Test by :nova

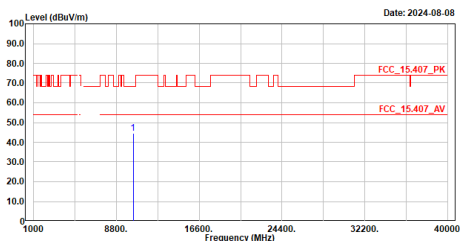

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	44.65	68.22	-23.57	41.91	2.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5190MHz
Test by :nova

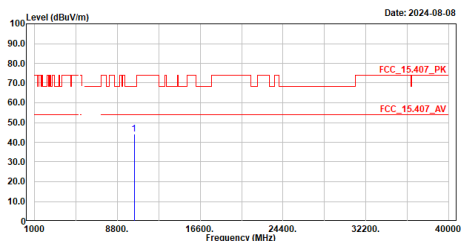

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	44.17	68.22	-24.05	41.43	2.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5230MHz
Test by :nova

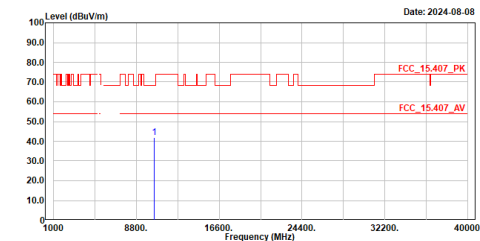

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	41.70	68.22	-26.52	39.00	2.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5230MHz
Test by :nova

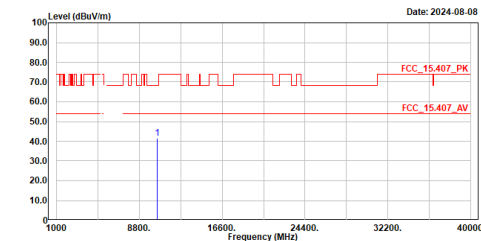

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	41.43	68.22	-26.79	38.73	2.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5270MHz
Test by :nova

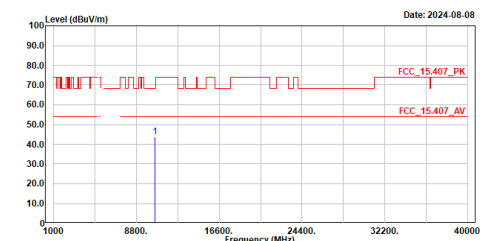

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10540.000	43.81	68.22	-24.41	40.91	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5270MHz
Test by :nova

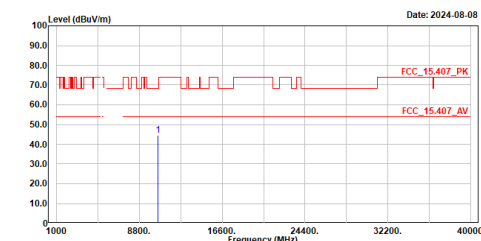

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10540.000	44.34	68.22	-23.88	41.44	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5310MHz
Test by :nova

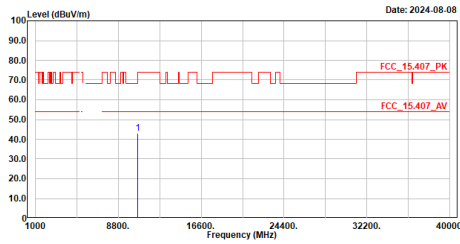


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10620.000	43.16	74.00	-30.84	40.12	3.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5310MHz
Test by :nova

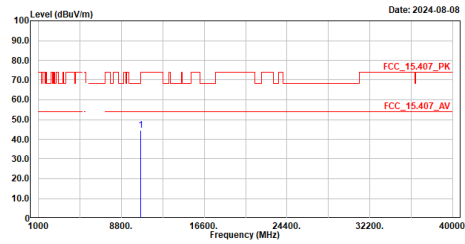


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10620.000	44.39	74.00	-29.61	41.35	3.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5510MHz
Test by :Rock

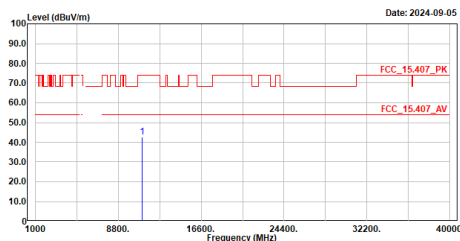


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11020.000	42.54	74.00	-31.46	39.20	3.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5510MHz
Test by :Rock

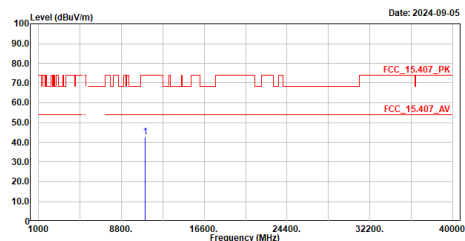


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11020.000	42.48	74.00	-31.52	39.14	3.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5590MHz
Test by :Rock

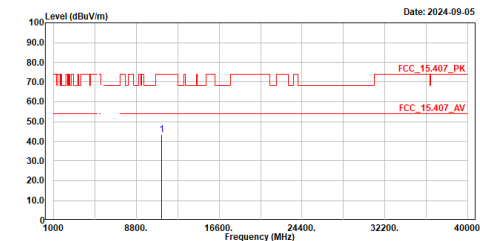

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11180.000	43.56	74.00	-30.44	39.81	3.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5590MHz
Test by :Rock

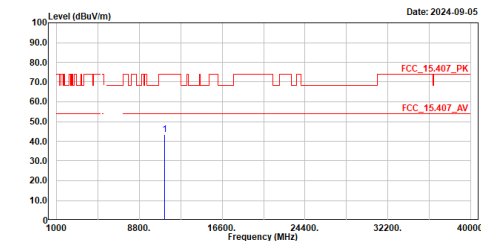

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11180.000	43.41	74.00	-30.59	39.66	3.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5670MHz
Test by :Rock

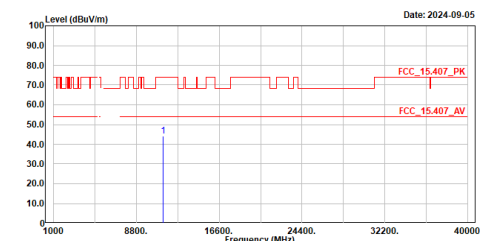

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11340.000	44.04	74.00	-29.96	39.93	4.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5670MHz
Test by :Rock

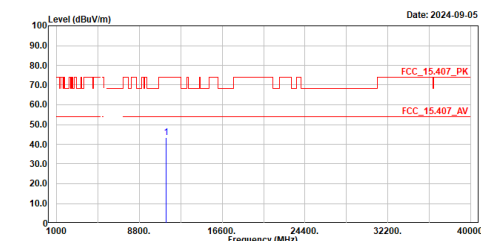

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11340.000	43.33	74.00	-30.67	39.22	4.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5710MHz
Test by :Rock

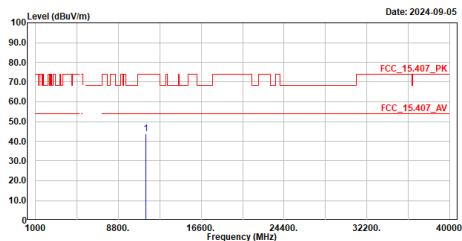

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11420.000	43.77	74.00	-30.23	39.60	4.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5710MHz
Test by :Rock

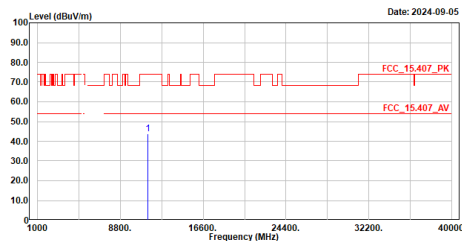

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11420.000	43.61	74.00	-30.39	39.44	4.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5755MHz
Test by :Rock

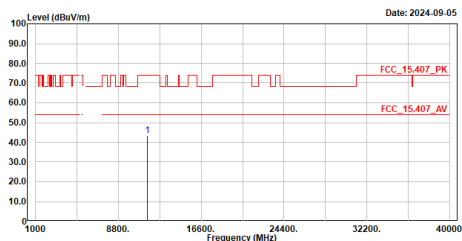

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	43.33	74.00	-30.67	39.14	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5755MHz
Test by :Rock

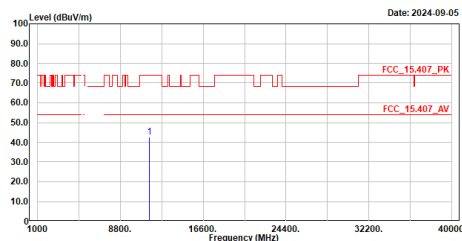

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	42.78	74.00	-31.22	38.59	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_5795MHz
Test by :Rock

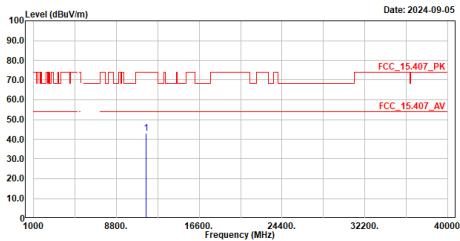

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	42.98	74.00	-31.02	38.76	4.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_5795MHz
Test by :Rock

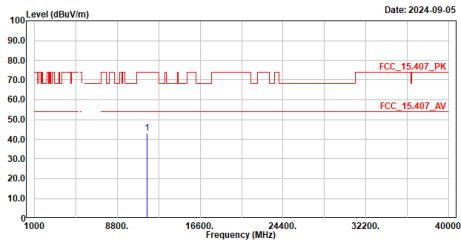

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	43.03	74.00	-30.97	38.81	4.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5210MHz
Test by :nova

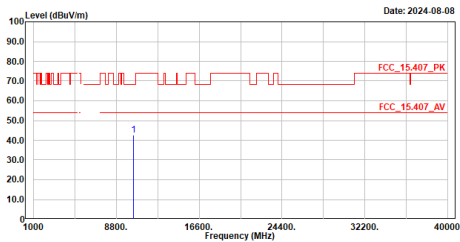

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	42.54	68.22	-25.68	39.88	2.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5210MHz
Test by :nova

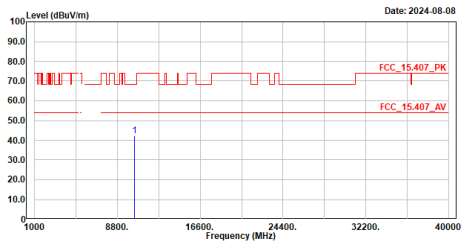

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	42.44	68.22	-25.78	39.78	2.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5290MHz
Test by :nova

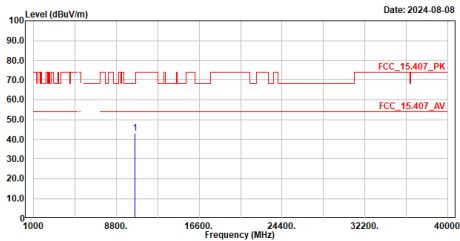

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10580.000	43.08	68.22	-25.14	40.11	2.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5290MHz
Test by :nova

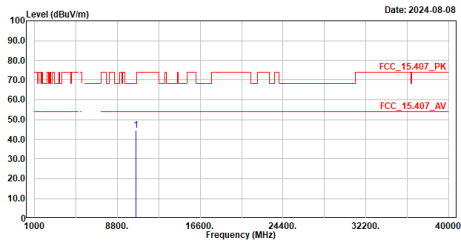

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10580.000	44.36	68.22	-23.86	41.39	2.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5530MHz
Test by :Rock

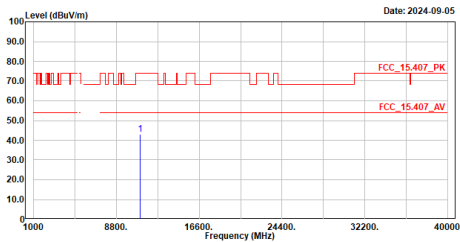

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11060.000	43.11	74.00	-30.89	39.66	3.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5530MHz
Test by :Rock

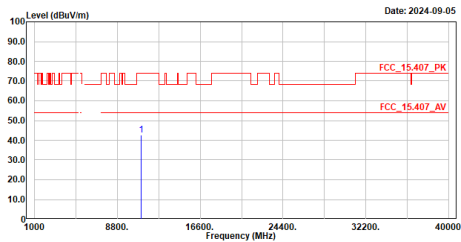

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11060.000	42.66	74.00	-31.34	39.21	3.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5610MHz
Test by :Rock

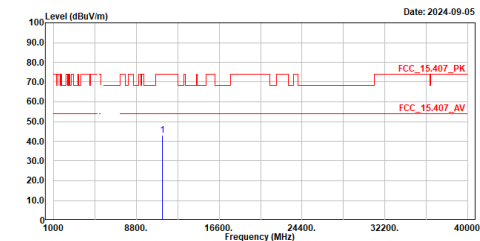

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11220.000	42.92	74.00	-31.08	39.03	3.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5610MHz
Test by :Rock

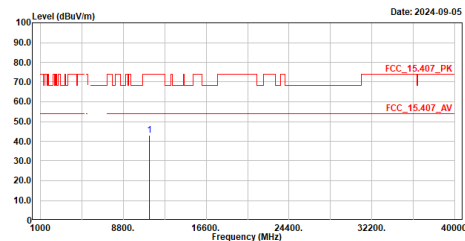

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11220.000	42.98	74.00	-31.02	39.09	3.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5690MHz
Test by :Rock

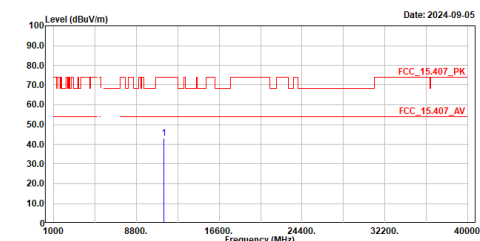

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11380.000	43.19	74.00	-30.81	39.08	4.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5690MHz
Test by :Rock

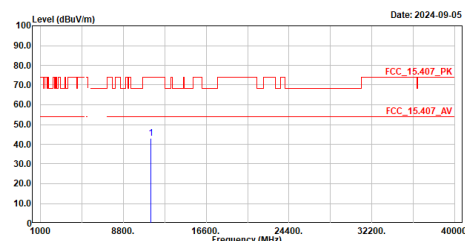

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11380.000	43.13	74.00	-30.87	39.02	4.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5775MHz
Test by :Rock

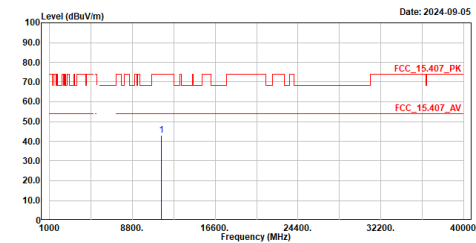

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	42.85	74.00	-31.15	38.59	4.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5775MHz
Test by :Rock

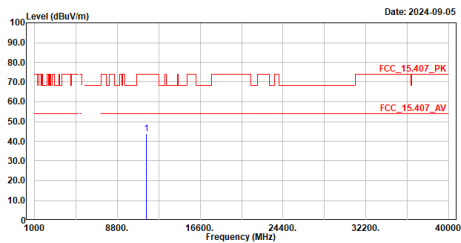

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	43.65	74.00	-30.35	39.39	4.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac160_5250MHz
Test by :nova

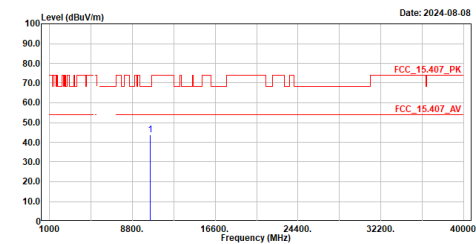

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10500.000	43.80	68.22	-24.42	40.92	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac160_5250MHz
Test by :nova

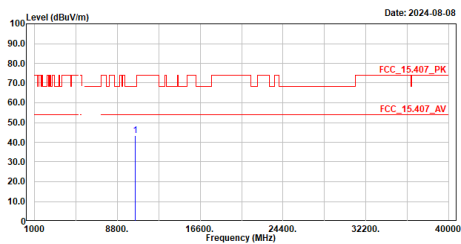

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10500.000	43.45	68.22	-24.77	40.57	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac160_5570MHz
Test by :Rock

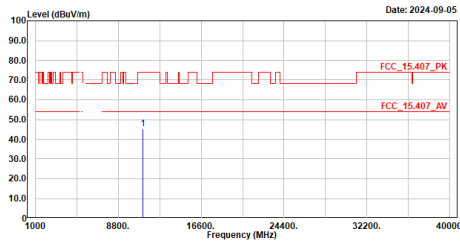


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11140.000	45.11	74.00	-28.89	41.47	3.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac160_5570MHz
Test by :Rock

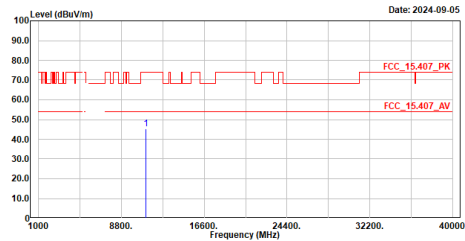


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11140.000	45.22	74.00	-28.78	41.58	3.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac160_5570MHz
Test by :Rock

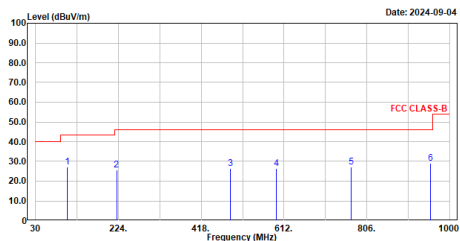


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	104.302	27.09	43.50	-16.41	54.31	-27.22	QP
2	219.829	25.69	46.00	-20.31	51.58	-25.89	QP
3	486.094	26.50	46.00	-19.50	44.33	-17.83	QP
4	594.152	26.32	46.00	-19.68	41.53	-15.21	QP
5	769.431	27.06	46.00	-18.94	39.38	-12.32	QP
6	955.477	28.89	46.00	-17.11	39.06	-10.17	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac160_5570MHz
Test by :Rock

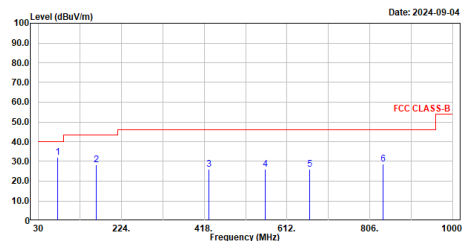


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	74.329	32.15	40.00	-7.85	59.27	-27.12	QP
2	165.800	28.18	43.50	-15.32	51.92	-23.74	QP
3	428.476	26.04	46.00	-19.96	45.29	-19.25	QP
4	561.560	26.17	46.00	-19.83	42.37	-16.20	QP
5	665.544	26.17	46.00	-19.83	40.38	-14.21	QP
6	837.234	28.80	46.00	-17.20	40.49	-11.69	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Rock

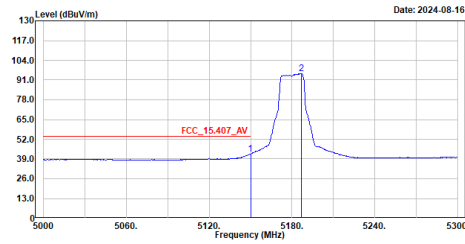


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	42.22	54.00	-11.78	27.76	14.46	Average
2	5186.900	95.15	-----	-----	80.71	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Rock

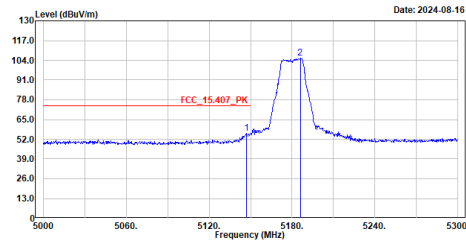


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.300	55.89	74.00	-18.11	41.43	14.46	Peak
2	5186.000	105.27	-----	-----	90.83	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Rock

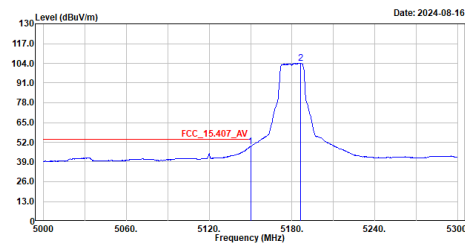


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	49.19	54.00	-4.81	34.73	14.46	Average
2	5186.300	103.89	-----	-----	89.45	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Rock

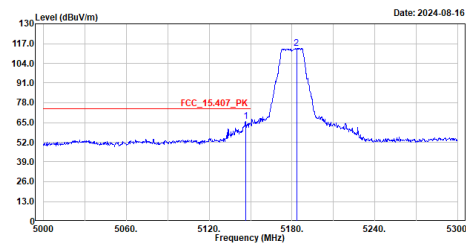


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.400	65.86	74.00	-8.14	51.40	14.46	Peak
2	5183.300	113.95	-----	-----	99.51	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5320MHz
Test by :Rock

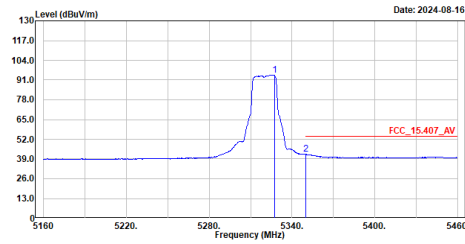


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5327.400	94.42	-----	-----	80.03	14.39	Average
2	5350.200	42.10	54.00	-11.90	27.73	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5320MHz
Test by :Rock

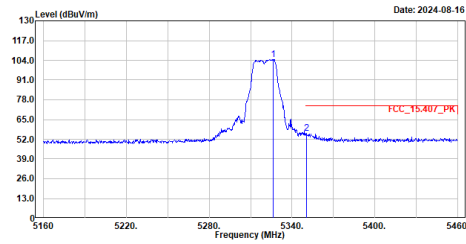


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5326.500	104.54	-----	-----	90.15	14.39	Peak
2	5350.500	56.17	74.00	-17.83	41.80	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5320MHz
Test by :Rock

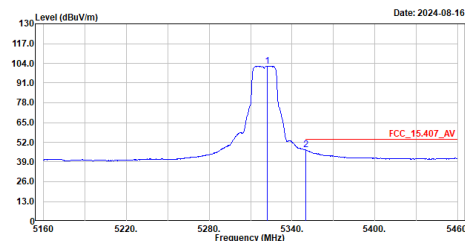


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5322.000	102.24	-----	-----	87.84	14.40	Average
2	5350.200	46.91	54.00	-7.09	32.54	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5320MHz
Test by :Rock

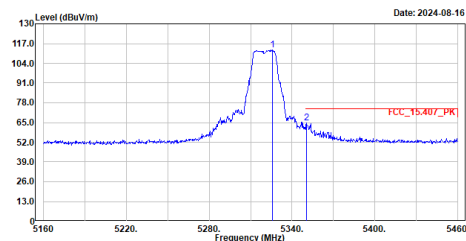


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5325.600	112.66	-----	-----	98.27	14.39	Peak
2	5350.500	64.85	74.00	-9.15	50.48	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5500MHz
Test by :Rock

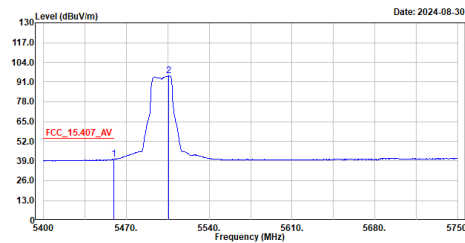


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5459.500	40.35	54.00	-13.65	25.67	14.68	Average
2	5505.700	95.00	-----	-----	80.08	14.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5500MHz
Test by :Rock

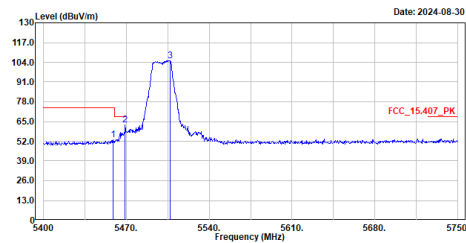


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5458.800	52.98	74.00	-21.02	38.30	14.68	Peak
2	5468.950	62.70	68.22	-5.52	47.97	14.73	Peak
3	5507.100	105.02	-----	-----	90.09	14.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5500MHz
Test by :Rock

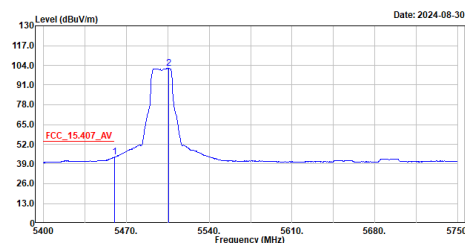


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5459.850	43.42	54.00	-10.58	28.74	14.68	Average
2	5506.850	102.00	-----	-----	87.08	14.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5500MHz
Test by :Rock

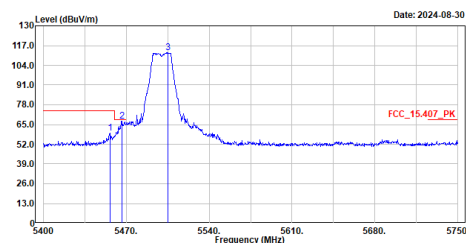


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5456.000	59.58	74.00	-14.42	44.92	14.66	Peak
2	5466.150	67.37	68.22	-0.85	52.67	14.70	Peak
3	5505.000	112.21	-----	-----	97.29	14.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5700MHz
Test by :Rock

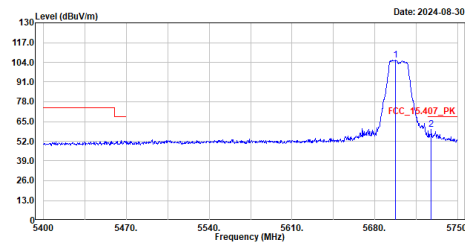


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5697.500	105.44	-----	89.38	16.06	Peak	
2	5727.600	59.66	68.22	-8.56	43.45	16.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5700MHz
Test by :Rock

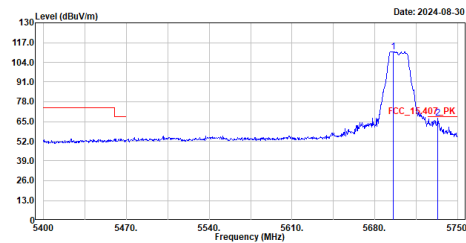


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5695.400	111.06	-----	95.02	16.04	Peak	
2	5733.200	67.43	68.22	-0.79	51.19	16.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5745MHz
Test by :Rock

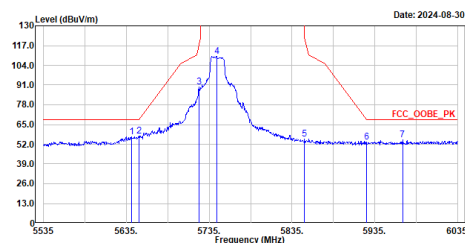


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5641.500	57.12	68.20	-11.08	41.54	15.58	Peak
2	5650.000	57.41	68.21	-10.80	41.77	15.64	Peak
3	5722.500	89.65	116.50	-26.85	73.46	16.19	Peak
4	5744.000	109.92	-----	93.63	16.29	Peak	
5	5850.000	55.66	122.20	-66.54	39.33	16.33	Peak
6	5925.000	53.29	68.21	-14.92	36.86	16.43	Peak
7	5968.500	54.84	68.20	-13.36	38.37	16.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5745MHz
Test by :Rock

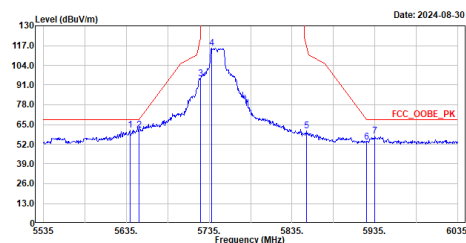


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5639.500	61.27	68.20	-6.93	45.71	15.56	Peak
2	5650.000	61.53	68.21	-6.68	45.89	15.64	Peak
3	5724.500	95.39	121.06	-25.67	79.19	16.20	Peak
4	5738.000	115.24	-----	98.98	16.26	Peak	
5	5853.000	60.80	115.36	-54.56	44.46	16.34	Peak
6	5925.000	53.65	68.21	-14.56	37.22	16.43	Peak
7	5935.000	57.54	68.20	-10.66	41.11	16.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n_5625MHz
Test by :Rock

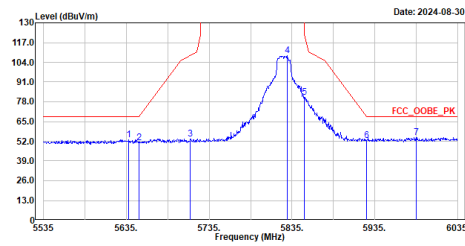


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5638.000	52.93	68.20	-15.27	37.38	15.55	Peak
2	5650.000	51.21	68.21	-17.00	35.57	15.64	Peak
3	5712.500	53.70	108.70	-55.00	37.56	16.14	Peak
4	5829.000	108.27	-----	-----	91.92	16.35	Peak
5	5850.000	80.94	122.20	-41.26	64.61	16.33	Peak
6	5925.000	52.34	68.21	-15.87	35.91	16.43	Peak
7	5985.000	54.66	68.20	-13.54	38.18	16.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n_5825MHz
Test by :Rock

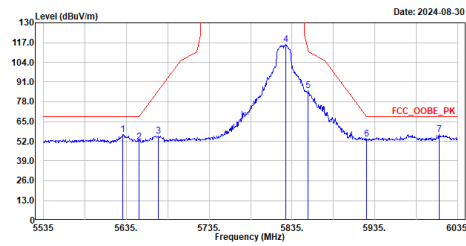


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5631.000	56.24	68.20	-11.96	40.74	15.50	Peak
2	5650.000	51.54	68.21	-16.67	35.90	15.64	Peak
3	5674.000	55.58	85.96	-30.38	39.73	15.85	Peak
4	5827.500	115.86	-----	-----	99.51	16.35	Peak
5	5854.500	85.42	111.94	-26.52	69.08	16.34	Peak
6	5925.000	53.45	68.21	-14.76	37.02	16.43	Peak
7	6012.500	56.47	68.20	-11.73	39.93	16.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5180MHz
Test by :Rock

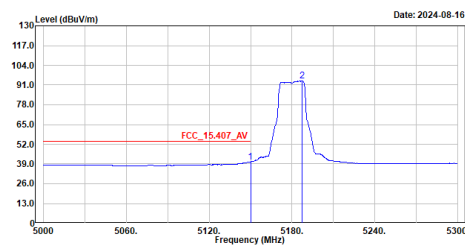


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	40.43	54.00	-13.57	25.97	14.46	Average
2	5187.500	93.80	-----	-----	79.36	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5180MHz
Test by :Rock

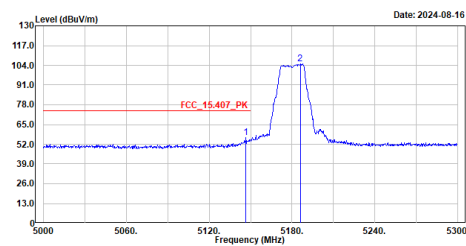


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5146.700	56.60	74.00	-17.40	42.14	14.46	Peak
2	5186.000	104.82	-----	-----	90.38	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5180MHz
Test by :Rock

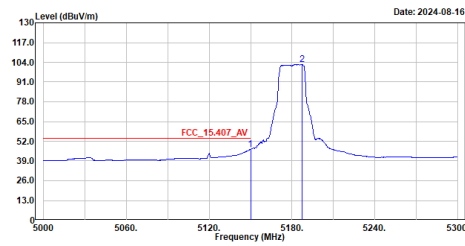


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	46.70	54.00	-7.30	32.24	14.46	Average
2	5187.200	102.64	-----	-----	88.20	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5180MHz
Test by :Rock

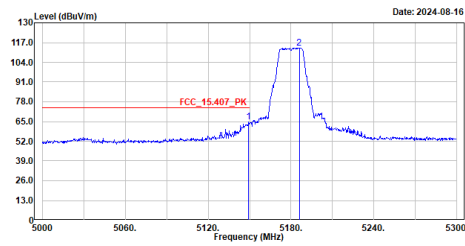


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	64.79	74.00	-9.21	50.33	14.46	Peak
2	5186.000	113.52	-----	-----	99.08	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5320MHz
Test by :Rock

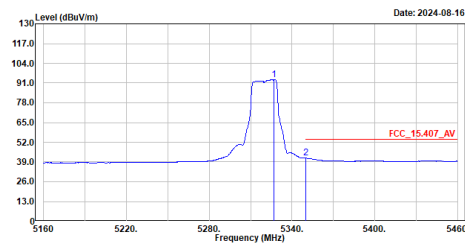


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5326.000	93.24	-----	-----	78.85	14.39	Average
2	5350.200	41.52	54.00	-12.48	27.15	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5320MHz
Test by :Rock

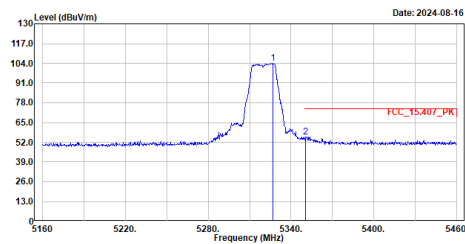


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5327.100	103.95	-----	-----	89.56	14.39	Peak
2	5350.500	55.55	74.00	-18.45	41.18	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5320MHz
Test by :Rock

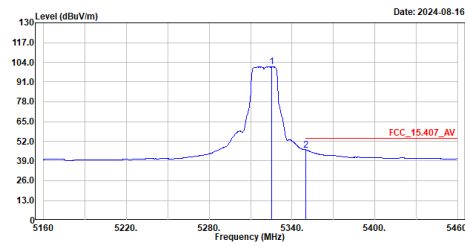


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5325.300	101.00	-----	-----	86.61	14.39	Average
2	5350.200	46.27	54.00	-7.73	31.90	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5320MHz
Test by :Rock

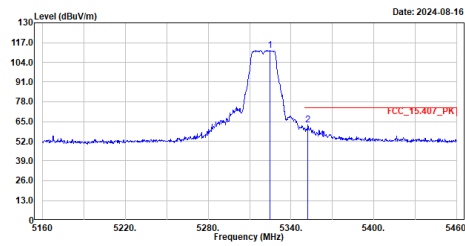


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5324.700	112.06	-----	-----	97.67	14.39	Peak
2	5352.300	62.95	74.00	-11.05	48.58	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5500MHz
Test by :Rock

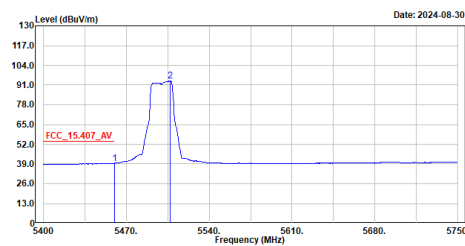


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	39.44	54.00	-14.56	24.76	14.68	Average
2	5507.100	93.49	-----	-----	78.56	14.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5500MHz
Test by :Rock

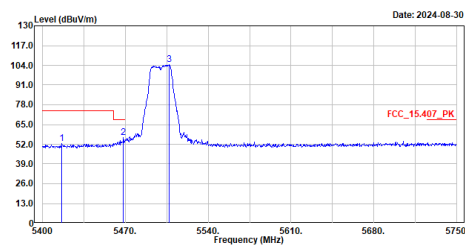


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5416.450	52.63	74.00	-21.37	38.18	14.45	Peak
2	5468.250	56.31	68.22	-11.91	41.59	14.72	Peak
3	5507.100	104.30	-----	-----	89.37	14.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5500MHz
Test by :Rock

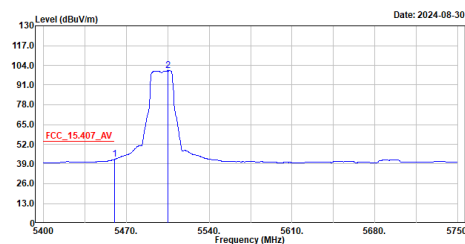


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	41.96	54.00	-12.04	27.28	14.68	Average
2	5505.000	100.43	-----	-----	85.51	14.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5500MHz
Test by :Rock

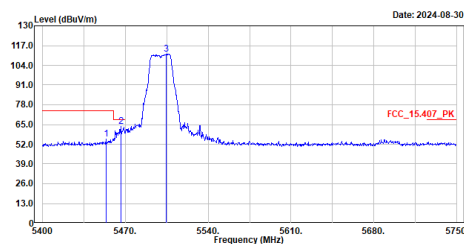


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5453.550	55.51	74.00	-18.49	40.87	14.64	Peak
2	5466.150	63.78	68.22	-4.44	49.08	14.70	Peak
3	5504.300	111.49	-----	-----	96.57	14.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_5700MHz
Test by :Rock

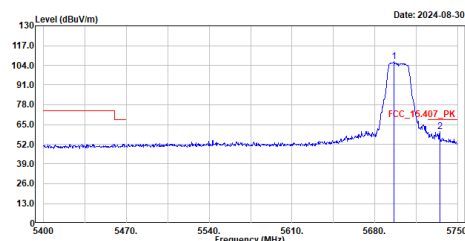


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5696.100	106.28	-----	-----	90.23	16.05	Peak
2	5734.950	68.38	68.22	-7.84	44.13	16.25	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_5700MHz
Test by :Rock

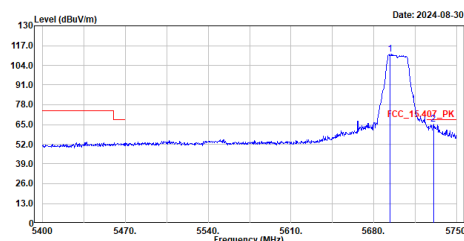

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5693.650	111.58	-----	-----	95.55	16.03	Peak
2	5730.400	65.12	68.22	-3.10	48.89	16.23	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

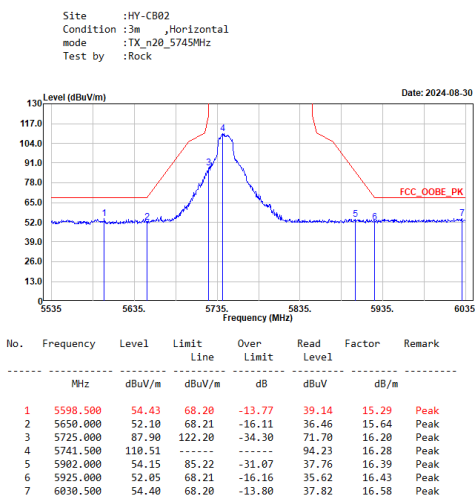


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

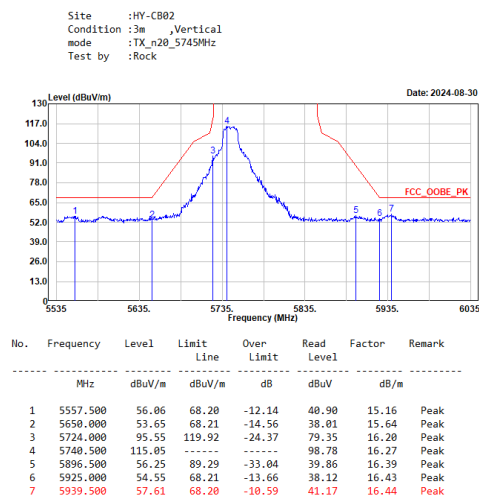


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

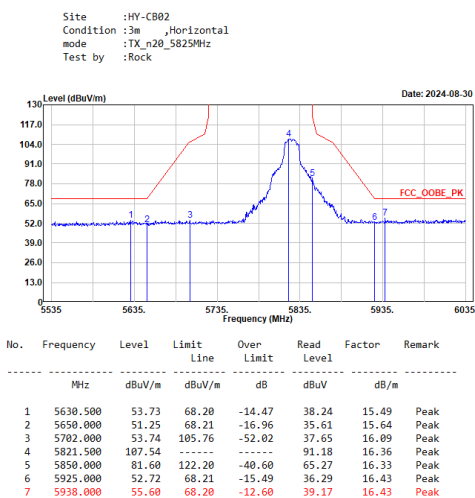

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

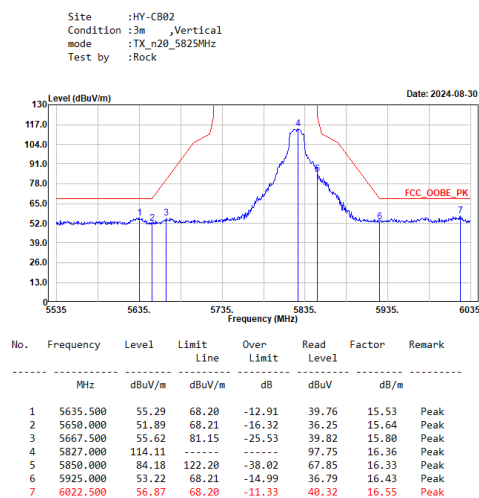

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5190MHz
Test by :Rock

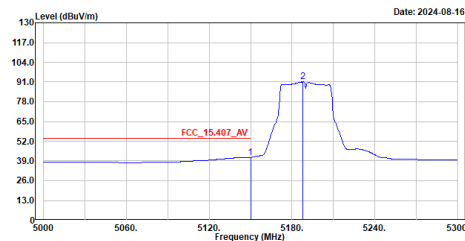

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	41.36	54.00	-12.64	26.90	14.46	Average
2	5187.800	91.05	-----	-----	76.62	14.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5190MHz
Test by :Rock

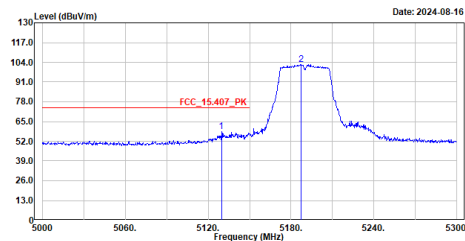

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5129.600	58.39	74.00	-15.61	43.95	14.44	Peak
2	5187.200	102.64	-----	-----	88.20	14.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5190MHz
Test by :Rock

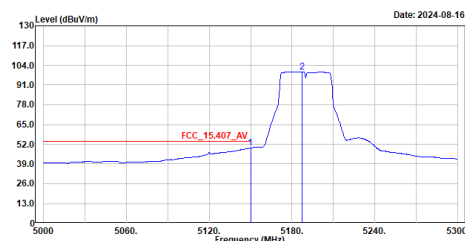

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	49.44	54.00	-4.56	34.98	14.46	Average
2	5187.200	99.60	-----	-----	85.16	14.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5190MHz
Test by :Rock

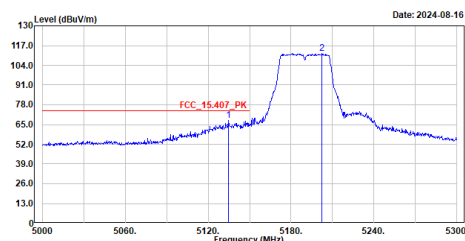

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5134.700	67.91	74.00	-6.09	53.47	14.44	Peak
2	5202.500	111.88	-----	-----	97.46	14.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5310MHz
Test by :Rock

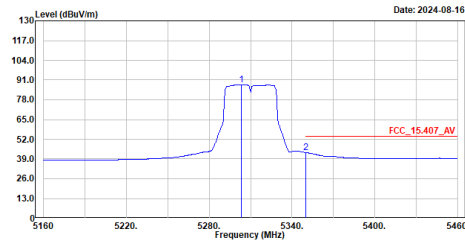


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5303.400	88.05	-----	-----	73.63	14.42	Average
2	5350.200	43.19	54.00	-10.81	28.82	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5310MHz
Test by :Rock

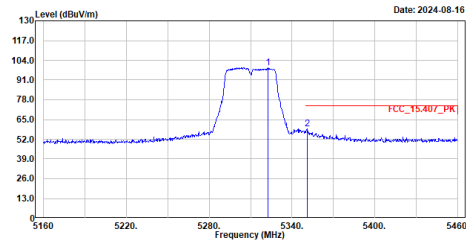


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5322.600	99.29	-----	-----	84.90	14.39	Peak
2	5351.100	58.85	74.00	-15.15	44.48	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5310MHz
Test by :Rock

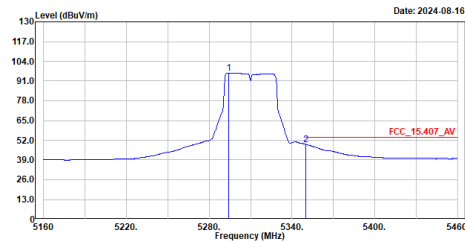


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5294.400	96.31	-----	-----	81.88	14.43	Average
2	5350.200	49.23	54.00	-4.77	34.86	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5310MHz
Test by :Rock

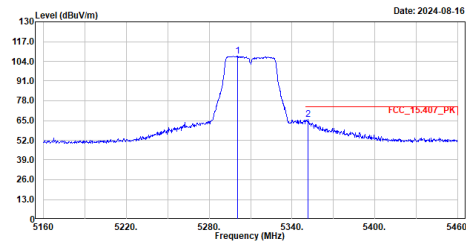


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5300.400	107.57	-----	-----	93.14	14.43	Peak
2	5351.400	65.66	74.00	-8.34	51.29	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5510MHz
Test by :Rock

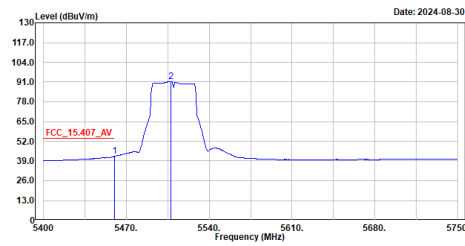


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	42.10	54.00	-11.90	27.42	14.68	Average
2	5507.800	91.37	-----	-----	76.44	14.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5510MHz
Test by :Rock

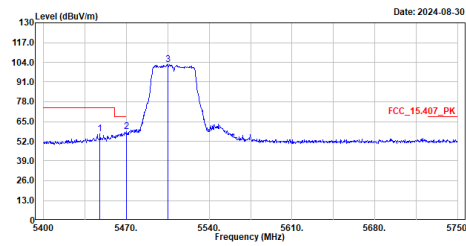


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5447.600	56.97	74.00	-17.03	42.36	14.61	Peak
2	5470.000	58.27	68.22	-9.95	43.53	14.74	Peak
3	5505.000	102.32	-----	-----	87.40	14.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5510MHz
Test by :Rock

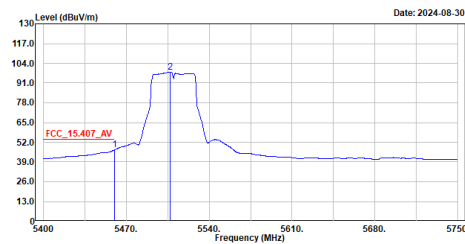


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	46.93	54.00	-7.07	32.25	14.68	Average
2	5507.100	98.09	-----	-----	83.16	14.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5510MHz
Test by :Rock

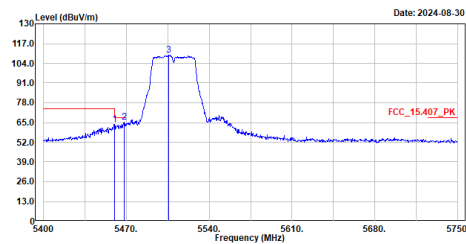


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	63.90	74.00	-10.10	49.22	14.68	Peak
2	5467.900	65.04	68.22	-3.18	50.32	14.72	Peak
3	5505.700	109.51	-----	-----	94.59	14.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5670MHz
Test by :Rock

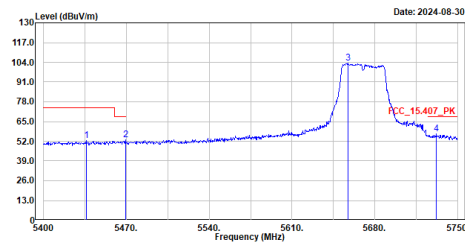


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5436.050	52.43	74.00	-21.57	37.89	14.54	Peak
2	5469.300	53.21	68.22	-15.01	38.48	14.73	Peak
3	5657.250	103.49	-----	-----	87.79	15.70	Peak
4	5732.150	57.11	68.22	-11.11	48.87	16.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5670MHz
Test by :Rock

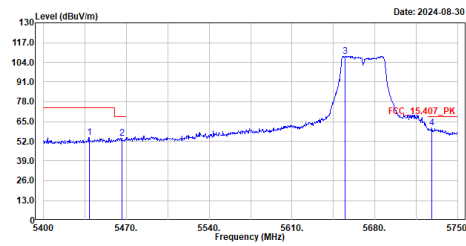


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5438.500	54.49	74.00	-19.51	39.94	14.55	Peak
2	5466.150	54.06	68.22	-14.16	39.36	14.70	Peak
3	5654.800	108.08	-----	-----	92.40	15.68	Peak
4	5727.950	61.06	68.22	-7.16	44.85	16.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5755MHz
Test by :Rock

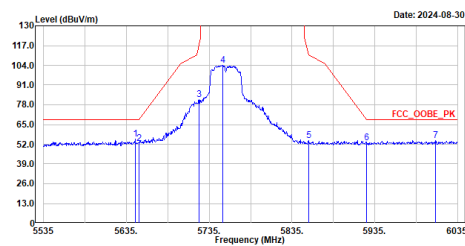


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.500	55.19	68.20	-13.01	39.59	15.60	Peak
2	5650.000	52.72	68.21	-15.49	37.08	15.64	Peak
3	5722.500	81.46	116.50	-35.04	65.27	16.19	Peak
4	5751.500	104.10	-----	-----	87.77	16.33	Peak
5	5855.000	54.43	110.80	-56.37	38.09	16.34	Peak
6	5925.000	52.98	68.21	-15.23	36.55	16.43	Peak
7	6008.500	54.46	68.20	-13.74	37.93	16.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5755MHz
Test by :Rock

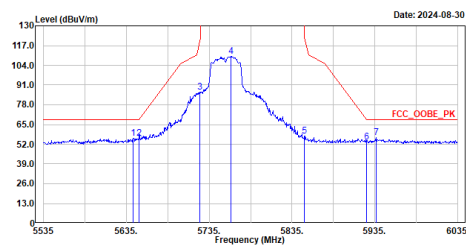


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.500	56.17	68.20	-12.03	40.58	15.59	Peak
2	5650.000	55.87	68.21	-12.34	40.23	15.64	Peak
3	5724.000	86.54	119.92	-33.38	70.34	16.20	Peak
4	5761.000	109.72	-----	-----	93.39	16.33	Peak
5	5850.000	57.53	122.20	-64.67	41.20	16.33	Peak
6	5925.000	53.66	68.21	-14.55	37.23	16.43	Peak
7	5936.500	56.27	68.20	-11.93	39.84	16.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_5795MHz
Test by :Rock

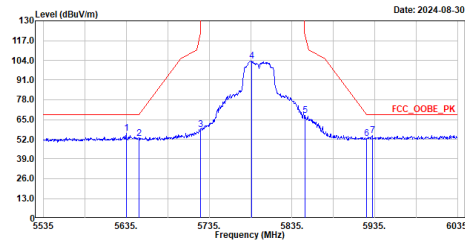


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5635.000	56.06	68.20	-12.14	40.53	15.53	Peak
2	5650.000	52.35	68.21	-15.86	36.71	15.64	Peak
3	5725.000	58.49	122.20	-63.71	42.29	16.20	Peak
4	5786.500	103.37	-----	-----	87.01	16.36	Peak
5	5850.500	67.66	121.06	-53.40	51.33	16.33	Peak
6	5925.000	52.69	68.21	-15.52	36.26	16.43	Peak
7	5932.000	54.36	68.20	-13.84	37.93	16.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_5795MHz
Test by :Rock

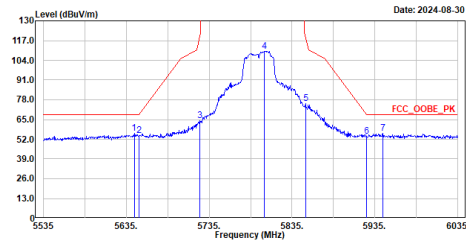


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5644.500	56.07	68.20	-12.13	40.47	15.60	Peak
2	5650.000	54.64	68.21	-13.57	39.00	15.64	Peak
3	5723.500	64.20	118.78	-54.58	48.01	16.19	Peak
4	5801.500	109.86	-----	-----	93.48	16.38	Peak
5	5851.500	75.43	118.78	-43.35	59.10	16.33	Peak
6	5925.000	53.80	68.21	-14.41	37.37	16.43	Peak
7	5944.500	55.93	68.20	-12.27	39.49	16.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5210MHz
Test by :Rock

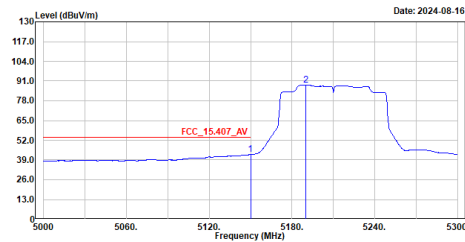


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	42.61	54.00	-11.39	28.15	14.46	Average
2	5189.900	88.47	-----	-----	74.04	14.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5210MHz
Test by :Rock

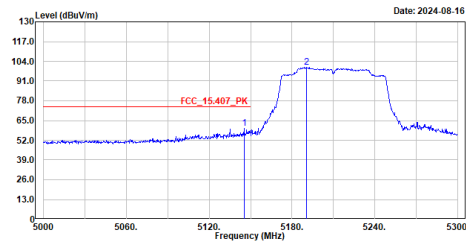


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.200	59.99	74.00	-14.01	45.53	14.46	Peak
2	5190.800	99.92	-----	-----	85.49	14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5210MHz
Test by :Rock

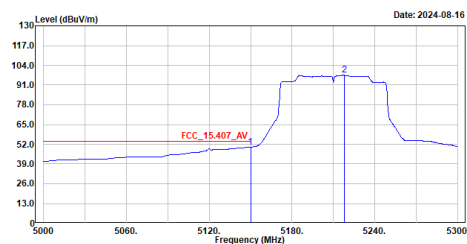


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	50.15	54.00	-3.85	35.69	14.46	Average
2	5217.800	97.47	-----	-----	83.06	14.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5210MHz
Test by :Rock

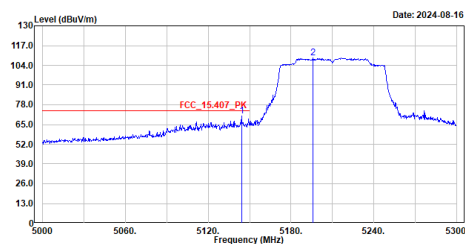


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.300	70.47	74.00	-3.53	56.01	14.46	Peak
2	5195.900	108.81	-----	-----	94.38	14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5290MHz
Test by :Rock

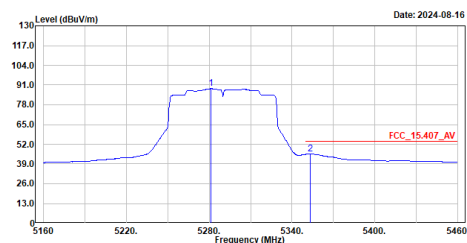


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5281.500	88.60	-----	-----	74.18	14.42	Average
2	5353.200	45.57	54.00	-8.43	31.21	14.36	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5290MHz
Test by :Rock

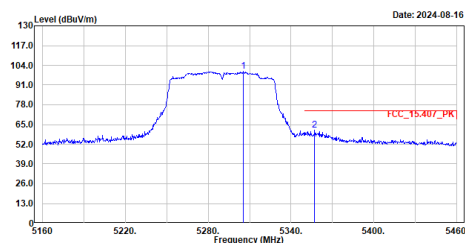


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5305.200	100.07	-----	-----	85.64	14.43	Peak
2	5357.100	61.18	74.00	-12.82	46.81	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5290MHz
Test by :Rock

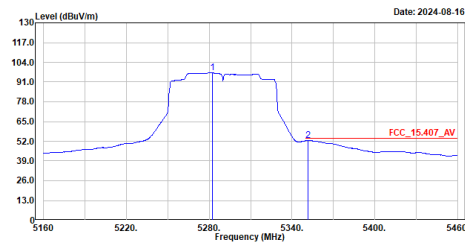


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5282.100	97.01	-----	-----	82.59	14.42	Average
2	5351.400	52.51	54.00	-1.49	38.14	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5290MHz
Test by :Rock

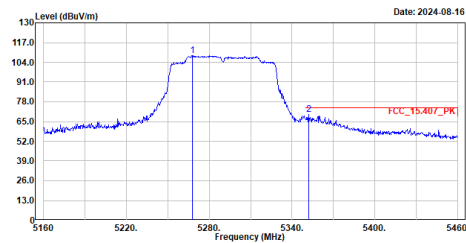


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5267.700	108.49	-----	-----	94.07	14.42	Peak
2	5352.300	69.60	74.00	-4.40	55.23	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5530MHz
Test by :Rock

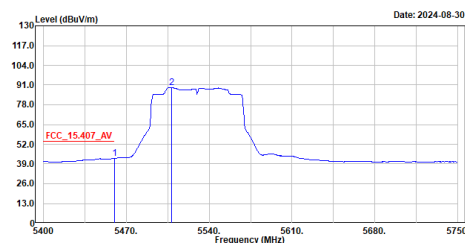


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5459.850	42.79	54.00	-11.21	28.11	14.68	Average
2	5508.500	89.33	-----	-----	74.40	14.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5530MHz
Test by :Rock

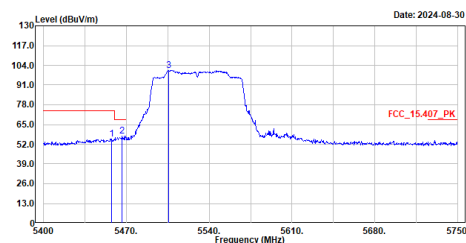


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5457.750	55.64	74.00	-18.36	40.97	14.67	Peak
2	5466.500	57.44	68.22	-10.78	42.72	14.72	Peak
3	5505.700	100.78	-----	-----	85.86	14.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5530MHz
Test by :Rock

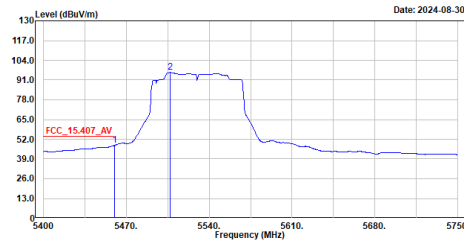


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	47.97	54.00	-6.03	33.29	14.68	Average
2	5507.100	95.94	-----	-----	81.01	14.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5530MHz
Test by :Rock

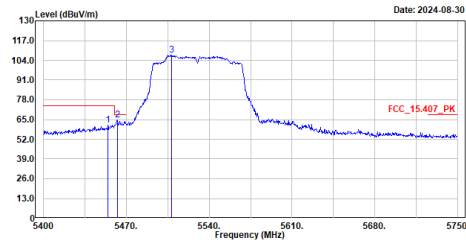


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5454.600	61.53	74.00	-12.47	46.88	14.65	Peak
2	5462.300	64.60	68.22	-3.62	49.91	14.69	Peak
3	5508.150	107.47	-----	-----	92.54	14.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac80_5775MHz
Test by :Rock

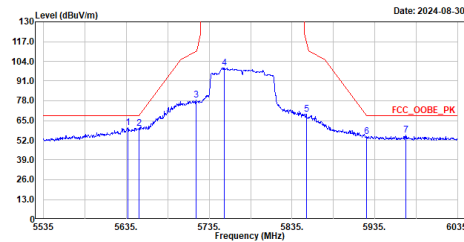


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5636.500	60.21	68.20	-7.99	44.67	15.54	Peak
2	5650.000	59.73	68.21	-8.48	44.09	15.64	Peak
3	5719.000	78.27	110.52	-32.25	62.09	16.18	Peak
4	5753.000	99.55	-----	-----	83.22	16.33	Peak
5	5852.500	69.07	116.50	-47.43	52.73	16.34	Peak
6	5925.000	54.35	68.21	-13.86	37.92	16.43	Peak
7	5972.500	55.30	68.20	-12.90	38.83	16.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac80_5775MHz
Test by :Rock

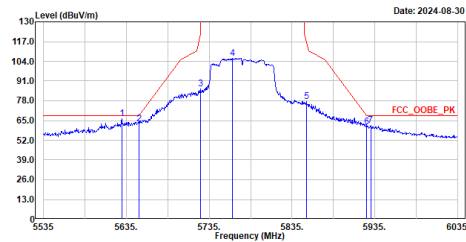


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5639.500	66.04	68.20	-2.16	50.55	15.49	Peak
2	5650.000	62.83	68.21	-5.38	47.19	15.64	Peak
3	5724.500	85.78	121.06	-35.28	69.58	16.20	Peak
4	5763.000	106.15	-----	-----	89.82	16.33	Peak
5	5852.500	77.30	116.50	-39.20	60.96	16.34	Peak
6	5925.000	60.88	68.21	-7.33	44.45	16.43	Peak
7	5930.000	61.79	68.20	-6.41	45.36	16.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5250MHz_Band 1
Test by :Rock

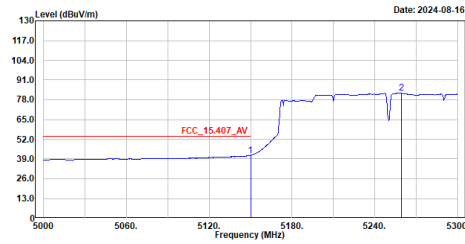


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5150.000	41.42	54.00	-12.58	26.96	14.46	Average
2	5259.200	82.43	-----	-----	68.02	14.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5250MHz_Band 1
Test by :Rock

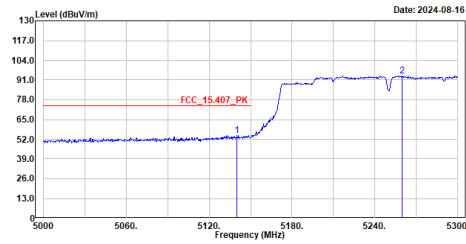


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5140.100	54.68	74.00	-19.32	40.24	14.44	Peak
2	5259.800	93.75	-----	-----	79.34	14.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5250MHz_Band 1
Test by :Rock

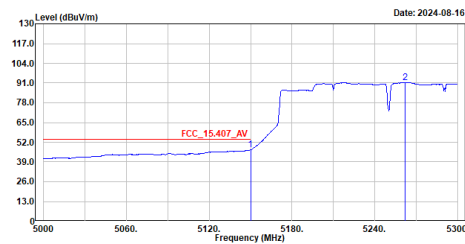


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5150.000	47.03	54.00	-6.97	32.57	14.46	Average
2	5261.900	91.29	-----	-----	76.88	14.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5250MHz_Band 1
Test by :Rock

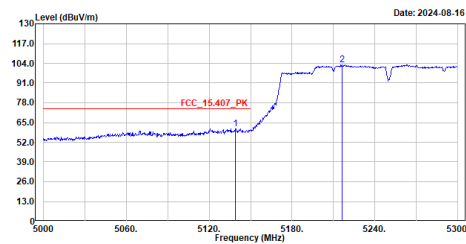


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5139.200	61.03	74.00	-12.97	46.59	14.44	Peak
2	5216.300	102.97	-----	-----	88.55	14.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5250MHz_Band 2
Test by :Rock

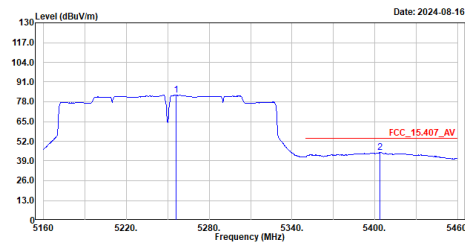


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5256.000	82.34	84.00	-1.66	67.93	14.41	Average
2	5403.600	44.53	54.00	-9.47	30.16	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5250MHz_Band 2
Test by :Rock

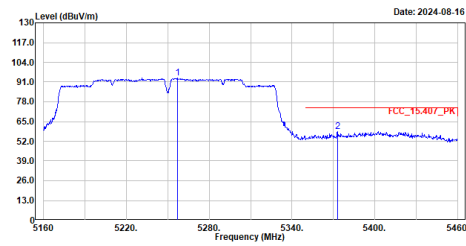


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5256.000	93.65	84.00	9.65	79.24	14.41	Peak
2	5373.000	58.25	74.00	-15.75	43.89	14.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5250MHz_Band 2
Test by :Rock

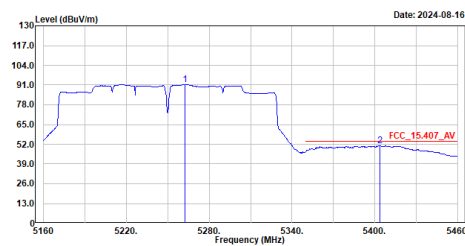


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5262.600	91.32	84.00	7.32	76.91	14.41	Average
2	5403.600	51.03	54.00	-2.97	36.66	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5250MHz_Band 2
Test by :Rock

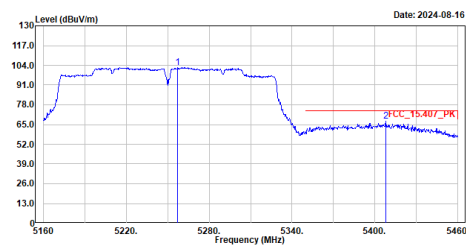


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5257.200	102.64	84.00	18.64	88.23	14.41	Peak
2	5408.100	67.01	74.00	-6.99	52.62	14.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5570MHz
Test by :Rock

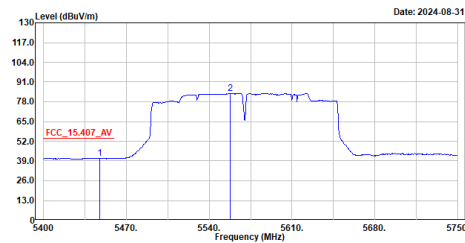


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5447.600	40.90	54.00	-13.10	26.29	14.61	Average
2	5557.500	83.52	-----	-----	68.36	15.16	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac160_5570MHz
Test by :Rock

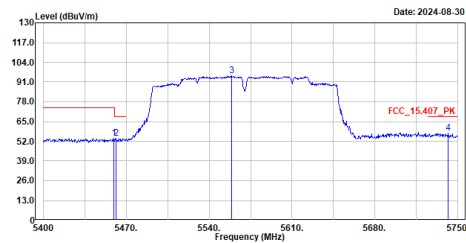


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5459.150	53.92	74.00	-20.08	39.24	14.68	Peak
2	5461.250	53.86	68.22	-14.36	39.17	14.69	Peak
3	5558.900	95.26	-----	-----	80.09	15.17	Peak
4	5741.950	57.46	68.22	-10.76	41.18	16.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5570MHz
Test by :Rock

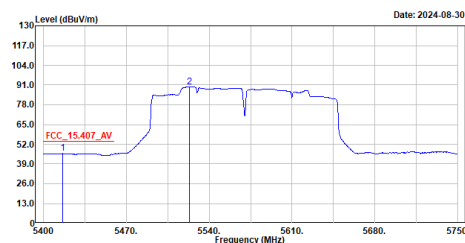


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5416.100	45.91	54.00	-8.09	31.47	14.44	Average
2	5523.550	89.88	-----	-----	74.87	15.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac160_5570MHz
Test by :Rock

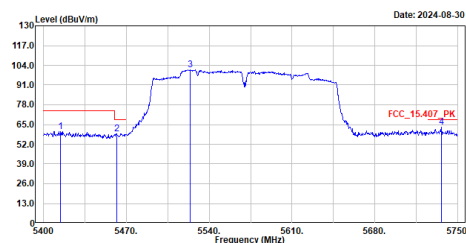

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5414.350	60.53	74.00	-13.47	46.09	14.44	Peak
2	5461.950	59.04	68.22	-9.18	44.35	14.69	Peak
3	5524.250	101.08	-----	-----	86.06	15.02	Peak
4	5736.350	63.49	68.22	-4.73	47.23	16.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.