

TEST REPORT

Reference No..... : WTX24X05101436W004
FCC ID..... : S3K5GCPE1
Applicant..... : Global Telecom Corp
Address..... : 17901 Von Karman Ave, Suite 600, Irvine, California 92614 United States of America
Manufacturer..... : Global Telecom Corp
Address..... : 17901 Von Karman Ave, Suite 600, Irvine, California 92614 United States of America
Product Name..... : 5G Indoor CPE
Model No..... : TITAN 5000
Standards..... : FCC Part 22, FCC Part 27
Date of Receipt sample..... : 2024-05-06
Date of Test..... : 2024-05-06 to 2024-07-03
Date of Issue..... : 2024-07-03
Test Report Form No..... : WTX_Part 22_Part 27W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

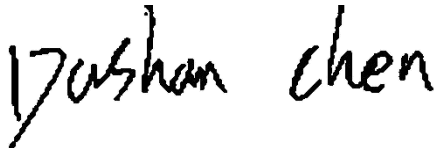

Dashan Chen

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	11
1.3 TEST METHODOLOGY	11
1.4 TEST FACILITY	11
1.5 EUT SETUP AND TEST MODE	12
1.6 MEASUREMENT UNCERTAINTY	13
1.7 TEST EQUIPMENT LIST AND DETAILS	14
2. SUMMARY OF TEST RESULTS	17
3. RF OUTPUT POWER.....	18
3.1 STANDARD APPLICABLE	18
3.2 TEST PROCEDURE	18
3.3 SUMMARY OF TEST RESULTS/PLOTS	18
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	51
4.1 STANDARD APPLICABLE	51
4.2 TEST PROCEDURE	51
4.3 SUMMARY OF TEST RESULTS	51
5. EMISSION BANDWIDTH	52
5.1 STANDARD APPLICABLE	52
5.2 TEST PROCEDURE	52
5.3 SUMMARY OF TEST RESULTS/PLOTS	52
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	53
6.1 STANDARD APPLICABLE	53
6.2 TEST PROCEDURE	53
6.3 SUMMARY OF TEST RESULTS/PLOTS	54
7. SPURIOUS RADIATED EMISSIONS	55
7.1 STANDARD APPLICABLE	55
7.2 TEST PROCEDURE	55
7.3 SUMMARY OF TEST RESULTS/PLOTS	55
8. FREQUENCY STABILITY	94
8.1 STANDARD APPLICABLE	94
8.2 TEST PROCEDURE	94
8.3 SUMMARY OF TEST RESULTS/PLOTS	94
APPENDIX PHOTOGRAPHS	95

Report version

Version No.	Date of issue	Description
Rev.00	2024-07-03	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	5G Indoor CPE
Trade Name:	Global Telecom, TITAN
Model No.:	TITAN 5000
Adding Model(s):	/
Rated Voltage:	DC12V
Battery:	/
Adapter Model:	RD1202000
	Input:AC100-240 50/60Hz 1.0A
	Output:DC12V2.0A

Technical Characteristics of EUT:	
5G	
Support Networks:	5G NR
Support Band:	n2, n5, n7, n12, n13, n25, n26, n30, n38, n41, n71, n77, n78
CA DL only:	CA_n2A-n2A; CA_n5A-n5A; CA_n7B; CA_n7A-n7A; CA_n25A-n25A; CA_n71B; CA_n71A-n71A;
EN-DC Mode	DC_12A_n25A; DC_12A_n2A; DC_12A_n2A-n38A; DC_12A_n2A-n41A; DC_12A_n2A-n78A; DC_12A_n30A; DC_12A_n38A; DC_12A_n38A-n78A; DC_12A_n41A; DC_12A_n41A-n78A; DC_12A_n77A; DC_12A_n77A-n77A; DC_12A_n78A; DC_12A_n78A-n78A; DC_12A_n7A; DC_12A_n7A-n78A; DC_12A-30A_n2A; DC_12A-30A_n77A; DC_12A-30A_n77A-n77A; DC_13A_n25A; DC_13A_n2A; DC_13A_n2A-n77A; DC_13A_n77A; DC_13A_n77C; DC_13A_n78A; DC_13A_n78A-n78A; DC_13A_n7A; DC_13A_n7A-n78A; DC_13A-2A_n2A-n77A; DC_13A-46A_n2A; DC_13A-46A_n77A; DC_13A-46A-46A_n77A; DC_14A_n2A; DC_14A_n30A; DC_14A_n77A; DC_14A_n77A-n77A; DC_14A-30A_n2A; DC_14A-30A_n77A; DC_14A-30A_n77A-n77A; DC_1C_n78A; DC_25A_n41A; DC_25A_n77A; DC_25A_n78A; DC_25A-25A_n41A; DC_25A-25A_n77A; DC_25A-25A_n78A; DC_25A-41C_n41A; DC_26A_n25A; DC_26A_n41A; DC_26A_n78A; DC_26A_n78A-n78A; DC_2A_n12A; DC_2A_n14A; DC_2A_n30A; DC_2A_n38A; DC_2A_n38A-n71A; DC_2A_n38A-n78A; DC_2A_n41A; DC_2A_n41A-n41A; DC_2A_n41A-n71A; DC_2A_n41A-n78A; DC_2A_n41C; DC_2A_n5A; DC_2A_n5A-n77A; DC_2A_n71A; DC_2A_n71A-n78A; DC_2A_n77A; DC_2A_n77A-n77A; DC_2A_n77C; DC_2A_n78A; DC_2A_n78A-n78A; DC_2A_n7A; DC_2A_n7A-n78A; DC_2A-12A_n25A; DC_2A-12A_n2A; DC_2A-12A_n30A; DC_2A-12A_n41A; DC_2A-12A_n77A; DC_2A-12A_n78A; DC_2A-12A_n78A-n78A; DC_2A-12A_n7A; DC_2A-12A-30A_n2A; DC_2A-12A-30A_n77A; DC_2A-13A_n25A; DC_2A-13A_n2A; DC_2A-13A_n77A; DC_2A-13A_n77C; DC_2A-14A_n2A; DC_2A-14A_n30A; DC_2A-14A_n77A; DC_2A-14A-30A_n2A; DC_2A-14A-30A_n77A; DC_2A-2A_n12A; DC_2A-2A_n14A; DC_2A-2A_n30A; DC_2A-2A_n38A; DC_2A-2A_n41A; DC_2A-2A_n5A; DC_2A-2A_n5A-n77A; DC_2A-2A_n71A; DC_2A-2A_n77A; DC_2A-2A_n77C; DC_2A-2A_n78A; DC_2A-2A_n7A; DC_2A-2A-12A_n30A; DC_2A-2A-12A_n38A;

	DC_2A-2A-12A_n41A; DC_2A-2A-12A_n77A; DC_2A-2A-12A_n78A; DC_2A-2A-12A_n7A; DC_2A-2A-12A-30A_n77A; DC_2A-2A-13A_n77A; DC_2A-2A-13A_n77C; DC_2A-2A-14A_n30A; DC_2A-2A-14A_n77A; DC_2A-2A-2A_n14A; DC_2A-2A-30A_n12A; DC_2A-2A-30A_n14A; DC_2A-2A-30A_n5A; DC_2A-2A-30A_n77A; DC_2A-2A-46A_n5A; DC_2A-2A-46C_n5A; DC_2A-2A-46D_n5A; DC_2A-2A-5A_n30A; DC_2A-2A-5A_n41A; DC_2A-2A-5A_n5A; DC_2A-2A-5A_n77A; DC_2A-2A-5A_n77C; DC_2A-2A-5A_n78A; DC_2A-2A-5A_n7A; DC_2A-2A-5A-30A_n5A; DC_2A-2A-5A-30A_n77A; DC_2A-2A-5A-7A_n78A; DC_2A-2A-71A_n38A; DC_2A-2A-71A_n41A; DC_2A-2A-71A_n78A; DC_2A-2A-71A_n7A; DC_2A-2A-7A_n12A; DC_2A-2A-7A_n71A; DC_2A-2A-7A_n78A; DC_2A-2A-7A-12A_n78A; DC_2A-2A-7A-71A_n78A; DC_2A-30A_n12A; DC_2A-30A_n14A; DC_2A-30A_n2A; DC_2A-30A_n5A; DC_2A-30A_n77A; DC_2A-46A_n41A; DC_2A-46A_n41A-n41A; DC_2A-46A_n5A; DC_2A-46A_n71A; DC_2A-46A_n71A-n41A; DC_2A-46A_n77A; DC_2A-46A-46A_n77A; DC_2A-46C_n41A; DC_2A-46C_n41A-n41A; DC_2A-46C_n5A; DC_2A-46C_n71A; DC_2A-46D_n41A; DC_2A-46D_n41A-n41A; DC_2A-46D_n5A; DC_2A-46D_n71A; DC_2A-46E_n5A; DC_2A-4A_n38A; DC_2A-4A_n41A; DC_2A-4A-7A-7A_n5A; DC_2A-4A-7A-7A_n71A; DC_2A-4A-7A-7A_n78A; DC_2A-5A_n25A; DC_2A-5A_n2A; DC_2A-5A_n30A; DC_2A-5A_n38A; DC_2A-5A_n41A; DC_2A-5A_n5A; DC_2A-5A_n77A; DC_2A-5A_n77C; DC_2A-5A_n78A; DC_2A-5A_n78A-n78A; DC_2A-5A_n7A; DC_2A-5A-30A_n2A; DC_2A-5A-30A_n5A; DC_2A-5A-30A_n77A; DC_2A-5A-5A_n2A; DC_2A-5A-7A_n25A; DC_2A-5A-7A_n2A; DC_2A-5A-7A_n78A; DC_2A-5B_n2A; DC_2A-71A_n25A; DC_2A-71A_n2A; DC_2A-71A_n38A; DC_2A-71A_n41A; DC_2A-71A_n71A; DC_2A-71A_n77A; DC_2A-71A_n78A; DC_2A-71A_n7A; DC_2A-7A_n12A; DC_2A-7A_n25A; DC_2A-7A_n2A; DC_2A-7A_n5A; DC_2A-7A_n71A; DC_2A-7A_n78A; DC_2A-7A_n78A-n78A; DC_2A-7A_n7A; DC_2A-7A-12A_n25A; DC_2A-7A-12A_n2A; DC_2A-7A-12A_n78A; DC_2A-7A-71A_n25A; DC_2A-7A-71A_n2A; DC_2A-7A-71A_n78A; DC_2A-7A-7A_n25A; DC_2A-7A-7A_n5A; DC_2A-7A-7A_n78A-n78A; DC_2A-7C_n25A; DC_2A-7C_n5A; DC_2A-7C_n78A; DC_2A-7C_n78A-n78A; DC_2C_n41A;
--	---

	DC_2C_n71A; DC_30A_n12A; DC_30A_n14A; DC_30A_n2A; DC_30A_n5A; DC_30A_n5A-n77A; DC_30A_n77A; DC_30A_n77A-n77A; DC_38A_n78A; DC_41A_n77A; DC_41A_n77A-n77A; DC_41A_n78A; DC_41A_n78A-n78A; DC_41A-41A_n78A; DC_41A-42A_n77A; DC_41A-42A_n77A-n77A; DC_41A-42A_n78A; DC_41A-42C_n77A; DC_41A-42C_n77A-n77A; DC_41A-42C_n78A; DC_41C_n77A; DC_41C_n77A-n77A; DC_41C_n78A; DC_41C_n78A-n78A; DC_41C-42A_n77A; DC_41C-42A_n77A-n77A; DC_41C-42A_n78A; DC_41C-42C_n77A; DC_41C-42C_n77A-n77A; DC_41C-42C_n78A; DC_41D_n78A; DC_4A_n2A; DC_4A_n38A; DC_4A_n41A; DC_4A_n78A; DC_4A_n78A-n78A; DC_4A_n7A; DC_5A_n25A; DC_5A_n2A; DC_5A_n2A-n38A; DC_5A_n2A-n41A; DC_5A_n2A-n77A; DC_5A_n2A-n78A; DC_5A_n30A; DC_5A_n38A; DC_5A_n38A-n78A; DC_5A_n41A; DC_5A_n41A-n78A; DC_5A_n77A; DC_5A_n77A-n77A; DC_5A_n77C; DC_5A_n78A; DC_5A_n78A-n78A; DC_5A_n7A; DC_5A_n7A-n78A; DC_5A-2A_n2A-n77A; DC_5A-30A_n2A; DC_5A-30A_n5A; DC_5A-30A_n77A; DC_5A-30A_n77A-n77A; DC_5A-5A_n2A; DC_5A-7A_n25A; DC_5A-7A_n2A; DC_5A-7A_n77A; DC_5A-7A_n78A; DC_5A-7A_n7A; DC_5A-7A-7A_n78A; DC_5A-7C_n78A; DC_5A-7C_n7A; DC_5B_n2A; DC_71A_n25A; DC_71A_n2A; DC_71A_n2A-n38A; DC_71A_n2A-n41A; DC_71A_n2A-n78A; DC_71A_n38A; DC_71A_n38A-n78A; DC_71A_n41A; DC_71A_n41A-n78A; DC_71A_n77A; DC_71A_n78A; DC_71A_n7A; DC_71A_n7A-n78A; DC_7A_n12A; DC_7A_n25A; DC_7A_n2A; DC_7A_n2A-n78A; DC_7A_n5A; DC_7A_n5A-n78A; DC_7A_n71A; DC_7A_n71A-n78A; DC_7A_n77A; DC_7A_n77A-n77A; DC_7A_n78A; DC_7A_n78A-n78A; DC_7A_n78C; DC_7A-12A_n25A; DC_7A-12A_n2A; DC_7A-12A_n77A; DC_7A-12A_n78A; DC_7A-12A_n7A; DC_7A-25A_n77A; DC_7A-25A_n78A; DC_7A-25A-25A_n77A; DC_7A-25A-25A_n78A; DC_7A-26A_n78A; DC_7A-46A_n78A; DC_7A-46C_n78A; DC_7A-46D_n78A; DC_7A-46E_n78A; DC_7A-71A_n25A; DC_7A-71A_n2A; DC_7A-71A_n77A; DC_7A-71A_n78A; DC_7A-71A_n7A; DC_7A-7A_n25A; DC_7A-7A_n5A; DC_7A-7A_n77A; DC_7A-7A_n77A-n77A; DC_7A-7A_n78A; DC_7A-7A_n78A-n78A; DC_7A-7A-25A_n77A; DC_7A-7A-25A_n78A; DC_7A-7A-25A-25A_n77A; DC_7A-7A-25A-25A_n78A; DC_7A-7A-26A_n78A; DC_7C_n25A; DC_7C_n2A; DC_7C_n5A; DC_7C_n77A;
--	--

	DC_7C_n77A-n77A; DC_7C_n78A; DC_7C_n78A-n78A; DC_7C-25A_n77A; DC_7C-25A_n78A; DC_7C-25A-25A_n77A; DC_7C-25A-25A_n78A
Uplink Frequency:	5G NR n2: Tx: 1850-1910MHz, 5G NR n5: Tx: 824-849MHz, 5G NR n7: Tx: 2500-2570MHz, 5G NR n12: Tx: 699-716MHz 5G NR n13: Tx: 777-787MHz 5G NR n25: Tx: 1850-1915MHz 5G NR n26: Tx: 824-849MHz 5G NR n30: Tx: 2305-2315MHz 5G NR n38: Tx: 2570-2620MHz 5G NR n41: Tx: 2496-2690MHz 5G NR n71: Tx: 663-698MHz 5G NR n77: Tx: 3450-3550MHz 5G NR n77: Tx: 3700-3980MHz 5G NR n78: Tx: 3450-3550MHz 5G NR n78: Tx: 3700-3800MHz
Downlink Frequency:	5G NR n2: Rx: 1930-1990MHz 5G NR n5: Rx: 869-894MHz, 5G NR n7: Rx: 2620-2690MHz, 5G NR n12: Rx: 729-746MHz, 5G NR n13: Rx: 746-756MHz, 5G NR n25: Rx: 1930-1995MHz 5G NR n26: Rx: 869-894MHz 5G NR n30: Rx: 2350-2360MHz 5G NR n38: Rx: 2570-2620MHz 5G NR n41: Rx: 2496-2690MHz 5G NR n71: Rx: 617-652MHz 5G NR n77: Rx: 3450-3550MHz 5G NR n77: Rx: 3700-3980MHz 5G NR n78: Rx: 3450-3550MHz 5G NR n78: Rx: 3700-3800MHz
RF Output Power:	5G NR n2: 22.49dBm 5G NR n5: 23.80dBm 5G NR n7: 24.24dBm 5G NR n12: 23.84dBm 5G NR n13: 23.26dBm 5G NR n25: 22.67dBm 5G NR n26: 23.60dBm 5G NR n30: 22.69dBm 5G NR n38: 23.97dBm 5G NR n41: 26.33dBm

	5G NR n71:24.18dBm 5G NR n77(3450-3550MHz): 25.52dBm 5G NR n77(3700-3980MHz): 27.00dBm 5G NR n78(3450-3550MHz): 25.69dBm 5G NR n78(3700-3800MHz): 26.11dBm DC_2A_n14A: 23.62dBm DC_2A_n41A: 25.14dBm DC_4A_n71A: 24.37dBm DC_5A_n38A: 22.58dBm DC_5A_n77A(3450-3550MHz): 24.53dBm DC_5A_n77A(3700-3980MHz): 25.99dBm DC_7A_n12A: 23.33dBm DC_13A_n7A: 23.26dBm DC_14A_n30A: 22.86dBm DC_26A_n25A: 20.93dBm DC_30A_n5A: 23.85dBm DC_71A_n2A: 21.69dBm DC_71A_n78A(3450-3550MHz): 23.35dBm DC_71A_n78A(3700-3800MHz): 25.46dBm
Type of Emission:	5G NR n2: 17M9G7D, 17M9W7D 5G NR n5: 17M9G7D, 17M9W7D 5G NR n7: 17M9G7D, 17M9W7D 5G NR n12:13M4G7D, 13M4W7D 5G NR n13: 8M95G7D, 8M96W7D 5G NR n25: 17M9G7D, 17M9W7D 5G NR n26: 17M9G7D, 17M9W7D 5G NR n30: 8M95G7D, 8M94W7D 5G NR n38: 35M8G7D, 35M8W7D 5G NR n41: 96M3G7D, 96M5W7D 5G NR n71: 17M9G7D, 17M9W7D 5G NR n77(3450-3550MHz): 96M3G7D, 96M4W7D 5G NR n77(3700-3980MHz): 96M3G7D, 96M4W7D 5G NR n78(3450-3550MHz): 96M3G7D, 96M4W7D 5G NR n78(3700-3800MHz): 96M3G7D, 96M4W7D DC_2A_n14A: 8M96G7D, 8M95W7D DC_2A_n41A: 96M0G7D, 96M1W7D DC_4A_n71A: 17M9G7D, 17M9W7D DC_5A_n38A: 35M8G7D, 35M8W7D DC_5A_n77A(3450-3550MHz): 96M4G7D, 96M4W7D DC_5A_n77A(3700-3980MHz): 96M6G7D, 96M7W7D DC_7A_n12A: 13M4G7D, 13M4W7D DC_13A_n7A: 17M9G7D, 17M9W7D DC_14A_n30A: 8M95G7D, 8M95W7D

	DC_26A_n25A: 17M9G7D, 17M9W7D DC_30A_n5A: 17M8G7D, 17M8W7D DC_71A_n2A: 17M9G7D, 17M9W7D DC_71A_n78A(3450-3550MHz): 96M5G7D, 96M3W7D DC_71A_n78A(3700-3800MHz): 96M2G7D, 96M2W7D
Type of Modulation:	DFT-s-OFDM: PI/2 BPSK QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
Antenna Type:	FPC Antenna
Antenna Gain:	5G NR n2: 2.94dBi 5G NR n5: 3.36dBi 5G NR n7: 3.26dBi 5G NR n12: 5.38dBi 5G NR n13: 5.18dBi 5G NR n25: 2.94dBi 5G NR n26(824-849MHz):3.36dBi 5G NR n30: 3.39dBi 5G NR n38:3.83dBi 5G NR n41:3.83dBi 5G NR n71: 5.38dBi 5G NR n77(3450-3550): 4.36dBi 5G NR n77(3700-3980): 3.66dBi 5G NR n78(3450-3550): 4.36dBi 5G NR n78(3700-3800): 3.34dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Private Land Mobile Radio Services.

FCC Rules Part 27: Miscellaneous Wireless Communications Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

KDB 971168 D01 Power Meas License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	5G NR n2	Low, Middle, High Channels
TM2	5G NR n5	Low, Middle, High Channels
TM3	5G NR n7	Low, Middle, High Channels
TM4	5G NR n12	Low, Middle, High Channels
TM5	5G NR n13	Low, Middle, High Channels
TM6	5G NR n25	Low, Middle, High Channels
TM7	5G NR n26	Low, Middle, High Channels
TM8	5G NR n30	Low, Middle, High Channels
TM9	5G NR n38	Low, Middle, High Channels
TM10	5G NR n41	Low, Middle, High Channels
TM11	5G NR n71	Low, Middle, High Channels
TM12	5G NR n77(3450-3550MHz)	Low, Middle, High Channels
TM13	5G NR n77(3700-3980MHz)	Low, Middle, High Channels
TM14	5G NR n78(3450-3550MHz)	Low, Middle, High Channels
TM15	5G NR n77(3700-3800MHz)	Low, Middle, High Channels

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.50	Unshielded	Without Ferrite
Network Cable	1.15	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi 100-14IBD	PF0F4ABV

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2024-02-27	2025-02-26
WTXE1091A 1001	UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY574505 25	2024-02-27	2025-02-26
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2024-02-24	2025-02-23
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2024-02-24	2025-02-23
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2024-02-29	2025-02-28
WTXE1088A 1001-2	EXA Signal Analyzer	KEYSIGHT	N9010B	MY590704 94	2024-02-24	2025-02-23
WTXE1092A 1001-2	Band Reject Filter Group	Tonscend	JS0806-F	20180603 19	2024-03-23	2025-03-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26

1001						
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
☐ Chamber B: Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
☒ Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Radiated Emission B)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Radiated Emission C)*	Farad	EZ-EMC	RA-03A1-2
5G NR Test Ssystem	Tonscend	TS-1120	V2.4.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§22.913(a), §27.50(d)	RF Output Power	Compliant
§27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §27.53(h)	Spurious Radiation Emissions	Compliant
§22.917(a), §27.53(h)	Out of Band Emissions	Compliant
§22.355, §27.54	Frequency Stability	Compliant

3. RF Output Power

3.1 Standard Applicable


According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

3.2 Test Procedure

- Conducted output power test method:

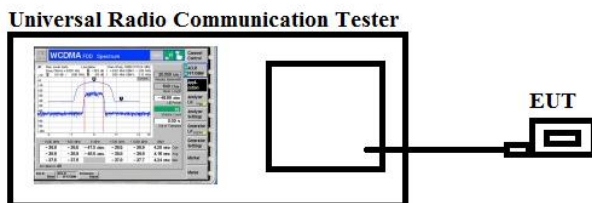

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

Max. Radiated Power:

5G NR n2

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.76	PASS
	MCH	23.59	PASS
	HCH	23.34	PASS
CP-QPSK	LCH	23.29	PASS
	MCH	23.28	PASS
	HCH	23.16	PASS
CP-16QAM	LCH	23.71	PASS
	MCH	23.53	PASS
	HCH	23.62	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.53	PASS
	MCH	23.60	PASS
	HCH	23.28	PASS
CP-QPSK	LCH	23.37	PASS
	MCH	23.45	PASS
	HCH	23.29	PASS
CP-16QAM	LCH	23.34	PASS
	MCH	23.30	PASS
	HCH	23.29	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.65	PASS
	MCH	23.25	PASS
	HCH	23.72	PASS
CP-QPSK	LCH	23.61	PASS
	MCH	23.35	PASS
	HCH	23.49	PASS
CP-16QAM	LCH	23.29	PASS
	MCH	23.34	PASS
	HCH	23.70	PASS

Channel Bandwidth: 20MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.72	PASS
	MCH	23.61	PASS
	HCH	23.29	PASS
CP-QPSK	LCH	23.65	PASS
	MCH	23.45	PASS
	HCH	23.34	PASS
CP-16QAM	LCH	23.25	PASS
	MCH	23.36	PASS
	HCH	23.74	PASS

5G NR n5

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.29	PASS
	MCH	23.34	PASS
	HCH	23.50	PASS
CP-QPSK	LCH	23.34	PASS
	MCH	23.28	PASS
	HCH	23.39	PASS
CP-16QAM	LCH	23.47	PASS
	MCH	23.25	PASS
	HCH	23.40	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.19	PASS
	MCH	23.28	PASS
	HCH	23.57	PASS
CP-QPSK	LCH	23.36	PASS
	MCH	23.49	PASS
	HCH	23.25	PASS
CP-16QAM	LCH	23.34	PASS
	MCH	23.80	PASS
	HCH	23.29	PASS

Channel Bandwidth: 15 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.48	PASS
	MCH	23.37	PASS
	HCH	23.59	PASS
CP-QPSK	LCH	23.62	PASS
	MCH	23.70	PASS
	HCH	23.34	PASS
CP-16QAM	LCH	23.65	PASS
	MCH	23.28	PASS
	HCH	23.72	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.51	PASS
	MCH	23.60	PASS
	HCH	23.47	PASS
CP-QPSK	LCH	23.25	PASS
	MCH	23.36	PASS
	HCH	23.49	PASS
CP-16QAM	LCH	23.72	PASS
	MCH	23.53	PASS
	HCH	23.61	PASS

5G NR n7

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.72	PASS
	MCH	24.51	PASS
	HCH	24.25	PASS
CP-QPSK	LCH	24.03	PASS
	MCH	24.34	PASS
	HCH	24.51	PASS
CP-16QAM	LCH	24.28	PASS
	MCH	24.16	PASS
	HCH	24.72	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.29	PASS
	MCH	24.64	PASS
	HCH	24.33	PASS
CP-QPSK	LCH	24.61	PASS
	MCH	24.53	PASS
	HCH	24.62	PASS
CP-16QAM	LCH	24.17	PASS
	MCH	24.82	PASS
	HCH	24.54	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.19	PASS
	MCH	24.25	PASS
	HCH	24.36	PASS
CP-QPSK	LCH	24.48	PASS
	MCH	24.16	PASS
	HCH	24.34	PASS
CP-16QAM	LCH	24.50	PASS
	MCH	24.28	PASS
	HCH	24.39	PASS

Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.18	PASS
	MCH	24.25	PASS
	HCH	24.39	PASS
CP-QPSK	LCH	24.46	PASS
	MCH	24.25	PASS
	HCH	24.39	PASS
CP-16QAM	LCH	24.12	PASS
	MCH	24.76	PASS
	HCH	24.29	PASS

5G NR n12

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.62	PASS
	MCH	23.39	PASS
	HCH	23.45	PASS
CP-QPSK	LCH	23.72	PASS
	MCH	23.61	PASS
	HCH	23.29	PASS
CP-16QAM	LCH	23.57	PASS
	MCH	23.25	PASS
	HCH	23.39	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.49	PASS
	MCH	23.57	PASS
	HCH	23.62	PASS
CP-QPSK	LCH	23.34	PASS
	MCH	23.29	PASS
	HCH	23.38	PASS
CP-16QAM	LCH	23.45	PASS
	MCH	23.36	PASS
	HCH	23.21	PASS

Channel Bandwidth: 15 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.62	PASS
	MCH	23.59	PASS
	HCH	23.37	PASS
CP-QPSK	LCH	23.52	PASS
	MCH	23.60	PASS
	HCH	23.18	PASS
CP-16QAM	LCH	23.63	PASS
	MCH	23.57	PASS
	HCH	23.18	PASS

5G NR n13

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.45	PASS
	MCH	23.36	PASS
	HCH	23.72	PASS
CP-QPSK	LCH	23.18	PASS
	MCH	23.39	PASS
	HCH	23.45	PASS
CP-16QAM	LCH	23.29	PASS
	MCH	23.34	PASS
	HCH	23.18	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	MCH	23.62	PASS
CP-QPSK	MCH	23.15	PASS
CP-16QAM	MCH	23.34	PASS

5G NR n25

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.72	PASS
	MCH	23.19	PASS
	HCH	23.62	PASS
CP-QPSK	LCH	23.34	PASS
	MCH	23.72	PASS
	HCH	23.59	PASS
CP-16QAM	LCH	23.34	PASS
	MCH	23.62	PASS
	HCH	23.37	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.39	PASS
	MCH	23.42	PASS
	HCH	23.51	PASS
CP-QPSK	LCH	23.62	PASS
	MCH	23.34	PASS
	HCH	23.18	PASS
CP-16QAM	LCH	23.75	PASS
	MCH	23.36	PASS
	HCH	23.21	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.70	PASS
	MCH	23.51	PASS
	HCH	23.29	PASS
CP-QPSK	LCH	23.34	PASS
	MCH	23.72	PASS
	HCH	23.63	PASS
CP-16QAM	LCH	23.70	PASS
	MCH	23.51	PASS
	HCH	23.60	PASS

Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.57	PASS
	MCH	23.62	PASS
	HCH	23.36	PASS
CP-QPSK	LCH	23.93	PASS
	MCH	23.69	PASS
	HCH	23.02	PASS
CP-16QAM	LCH	23.27	PASS
	MCH	23.48	PASS
	HCH	23.49	PASS

5G NR n26

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.72	PASS
	MCH	23.53	PASS
	HCH	23.70	PASS
CP-QPSK	LCH	23.62	PASS
	MCH	23.39	PASS
	HCH	23.45	PASS
CP-16QAM	LCH	23.28	PASS
	MCH	23.34	PASS
	HCH	23.62	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.27	PASS
	MCH	23.65	PASS
	HCH	23.31	PASS
CP-QPSK	LCH	23.28	PASS
	MCH	23.39	PASS
	HCH	23.41	PASS
CP-16QAM	LCH	23.62	PASS
	MCH	23.57	PASS
	HCH	23.12	PASS

Channel Bandwidth: 15 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.29	PASS
	MCH	23.36	PASS
	HCH	23.57	PASS
CP-QPSK	LCH	23.12	PASS
	MCH	23.39	PASS
	HCH	23.28	PASS
CP-16QAM	LCH	23.45	PASS
	MCH	23.36	PASS
	HCH	23.20	PASS
Channel Bandwidth: 20 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.74	PASS
	MCH	23.61	PASS
	HCH	23.43	PASS
CP-QPSK	LCH	23.51	PASS
	MCH	23.62	PASS
	HCH	23.90	PASS
CP-16QAM	LCH	23.87	PASS
	MCH	23.52	PASS
	HCH	23.39	PASS

5G NR n30

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	21.76	PASS
	MCH	21.63	PASS
	HCH	21.35	PASS
CP-QPSK	LCH	21.41	PASS
	MCH	21.72	PASS
	HCH	21.63	PASS
CP-16QAM	LCH	21.22	PASS
	MCH	21.32	PASS
	HCH	21.64	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	MCH	21.62	PASS
CP-QPSK	MCH	21.10	PASS
CP-16QAM	MCH	21.07	PASS

5G NR n38

Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.59	PASS
	MCH	24.36	PASS
	HCH	24.48	PASS
CP-QPSK	LCH	24.25	PASS
	MCH	24.37	PASS
	HCH	24.13	PASS
CP-16QAM	LCH	24.67	PASS
	MCH	24.29	PASS
	HCH	24.34	PASS

Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.70	PASS
	MCH	24.69	PASS
	HCH	24.76	PASS
CP-QPSK	LCH	24.47	PASS
	MCH	24.36	PASS
	HCH	24.28	PASS
CP-16QAM	LCH	24.19	PASS
	MCH	24.21	PASS
	HCH	24.65	PASS
Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.37	PASS
	MCH	24.56	PASS
	HCH	24.28	PASS
CP-QPSK	LCH	24.34	PASS
	MCH	24.72	PASS
	HCH	24.61	PASS
CP-16QAM	LCH	24.70	PASS
	MCH	24.38	PASS
	HCH	24.45	PASS
Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.71	PASS
	MCH	24.36	PASS
	HCH	24.29	PASS
CP-QPSK	LCH	24.45	PASS
	MCH	24.70	PASS
	HCH	24.36	PASS
CP-16QAM	LCH	24.29	PASS
	MCH	24.86	PASS
	HCH	24.57	PASS

Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.36	PASS
	MCH	24.29	PASS
	HCH	24.35	PASS
CP-QPSK	LCH	24.49	PASS
	MCH	24.31	PASS
	HCH	24.16	PASS
CP-16QAM	LCH	24.70	PASS
	MCH	24.28	PASS
	HCH	24.34	PASS

5G NR n41

Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.49	PASS
	MCH	24.35	PASS
	HCH	24.21	PASS
CP-QPSK	LCH	24.39	PASS
	MCH	24.57	PASS
	HCH	24.28	PASS
CP-16QAM	LCH	24.34	PASS
	MCH	24.62	PASS
	HCH	24.57	PASS
Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.65	PASS
	MCH	24.37	PASS
	HCH	24.28	PASS
CP-QPSK	LCH	24.31	PASS
	MCH	24.54	PASS
	HCH	24.62	PASS
CP-16QAM	LCH	24.39	PASS
	MCH	24.28	PASS
	HCH	24.51	PASS
Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.67	PASS
	MCH	24.53	PASS
	HCH	24.29	PASS
CP-QPSK	LCH	24.18	PASS
	MCH	24.72	PASS
	HCH	24.65	PASS
CP-16QAM	LCH	24.34	PASS
	MCH	24.29	PASS
	HCH	24.41	PASS

Channel Bandwidth: 50 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.70	PASS
	MCH	24.65	PASS
	HCH	24.39	PASS
CP-QPSK	LCH	24.28	PASS
	MCH	24.71	PASS
	HCH	24.62	PASS
CP-16QAM	LCH	24.59	PASS
	MCH	24.31	PASS
	HCH	24.39	PASS
Channel Bandwidth: 60 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.42	PASS
	MCH	24.36	PASS
	HCH	24.21	PASS
CP-QPSK	LCH	24.57	PASS
	MCH	24.62	PASS
	HCH	24.70	PASS
CP-16QAM	LCH	24.65	PASS
	MCH	24.34	PASS
	HCH	24.72	PASS
Channel Bandwidth: 70 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.53	PASS
	MCH	24.21	PASS
	HCH	24.70	PASS
CP-QPSK	LCH	24.65	PASS
	MCH	24.34	PASS
	HCH	24.29	PASS
CP-16QAM	LCH	24.16	PASS
	MCH	24.72	PASS
	HCH	24.80	PASS

Channel Bandwidth: 80 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.41	PASS
	MCH	24.39	PASS
	HCH	24.26	PASS
CP-QPSK	LCH	24.37	PASS
	MCH	24.65	PASS
	HCH	24.70	PASS
CP-16QAM	LCH	24.58	PASS
	MCH	24.42	PASS
	HCH	24.53	PASS
Channel Bandwidth: 90 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.72	PASS
	MCH	24.65	PASS
	HCH	24.34	PASS
CP-QPSK	LCH	24.72	PASS
	MCH	24.66	PASS
	HCH	24.38	PASS
CP-16QAM	LCH	24.25	PASS
	MCH	24.61	PASS
	HCH	25.71	PASS
Channel Bandwidth: 100 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	24.86	PASS
	MCH	24.25	PASS
	HCH	24.39	PASS
CP-QPSK	LCH	24.45	PASS
	MCH	24.34	PASS
	HCH	24.70	PASS
CP-16QAM	LCH	24.62	PASS
	MCH	24.71	PASS
	HCH	24.58	PASS

5G NR n71

Channel Bandwidth: 5 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.78	PASS
	MCH	23.65	PASS
	HCH	23.34	PASS
CP-QPSK	LCH	23.29	PASS
	MCH	23.45	PASS
	HCH	23.70	PASS
CP-16QAM	LCH	23.19	PASS
	MCH	23.27	PASS
	HCH	23.61	PASS
Channel Bandwidth: 10 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.71	PASS
	MCH	23.56	PASS
	HCH	23.34	PASS
CP-QPSK	LCH	23.60	PASS
	MCH	23.55	PASS
	HCH	23.38	PASS
CP-16QAM	LCH	23.43	PASS
	MCH	23.70	PASS
	HCH	23.12	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.39	PASS
	MCH	23.27	PASS
	HCH	23.30	PASS
CP-QPSK	LCH	23.18	PASS
	MCH	23.46	PASS
	HCH	23.37	PASS
CP-16QAM	LCH	23.59	PASS
	MCH	23.28	PASS
	HCH	23.17	PASS

Channel Bandwidth: 20 MHz			
Modulation	Channel	E.r.p [dBm]	Verdict
DFT-QPSK	LCH	23.52	PASS
	MCH	23.19	PASS
	HCH	23.39	PASS
CP-QPSK	LCH	23.41	PASS
	MCH	23.57	PASS
	HCH	23.26	PASS
CP-16QAM	LCH	23.48	PASS
	MCH	23.92	PASS
	HCH	23.62	PASS

5G NR n77(3450-3550MHz)

Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.84	PASS
	MCH	26.72	PASS
	HCH	26.65	PASS
CP-QPSK	LCH	26.39	PASS
	MCH	26.41	PASS
	HCH	26.66	PASS
CP-16QAM	LCH	26.72	PASS
	MCH	26.53	PASS
	HCH	26.82	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.71	PASS
	MCH	26.65	PASS
	HCH	26.38	PASS
CP-QPSK	LCH	26.72	PASS
	MCH	26.69	PASS
	HCH	26.71	PASS
CP-16QAM	LCH	26.59	PASS
	MCH	26.34	PASS
	HCH	26.65	PASS

Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.74	PASS
	MCH	26.86	PASS
	HCH	26.15	PASS
CP-QPSK	LCH	26.34	PASS
	MCH	26.29	PASS
	HCH	26.45	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.19	PASS
	HCH	26.58	PASS
Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.47	PASS
	MCH	26.15	PASS
	HCH	26.71	PASS
CP-QPSK	LCH	26.65	PASS
	MCH	26.34	PASS
	HCH	26.78	PASS
CP-16QAM	LCH	26.52	PASS
	MCH	26.39	PASS
	HCH	26.46	PASS
Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.77	PASS
	MCH	26.80	PASS
	HCH	26.63	PASS
CP-QPSK	LCH	26.57	PASS
	MCH	26.29	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.56	PASS
	MCH	26.82	PASS
	HCH	26.34	PASS

Channel Bandwidth: 50 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.71	PASS
	MCH	26.80	PASS
	HCH	26.62	PASS
CP-QPSK	LCH	26.59	PASS
	MCH	26.40	PASS
	HCH	26.49	PASS
CP-16QAM	LCH	26.93	PASS
	MCH	26.57	PASS
	HCH	26.82	PASS
Channel Bandwidth: 60 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.29	PASS
	MCH	26.37	PASS
	HCH	26.48	PASS
CP-QPSK	LCH	26.57	PASS
	MCH	26.25	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.61	PASS
	HCH	26.75	PASS
Channel Bandwidth: 70 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.49	PASS
	MCH	26.57	PASS
	HCH	26.68	PASS
CP-QPSK	LCH	26.72	PASS
	MCH	26.38	PASS
	HCH	26.49	PASS
CP-16QAM	LCH	26.67	PASS
	MCH	26.02	PASS
	HCH	26.70	PASS

Channel Bandwidth: 80 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.59	PASS
	MCH	26.34	PASS
	HCH	26.70	PASS
CP-QPSK	LCH	26.59	PASS
	MCH	26.15	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.72	PASS
	MCH	26.59	PASS
	HCH	26.11	PASS
Channel Bandwidth: 90 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.77	PASS
	MCH	26.64	PASS
	HCH	26.32	PASS
CP-QPSK	LCH	26.86	PASS
	MCH	26.25	PASS
	HCH	26.12	PASS
CP-16QAM	LCH	26.34	PASS
	MCH	26.70	PASS
	HCH	26.15	PASS
Channel Bandwidth: 100 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.79	PASS
	MCH	26.62	PASS
	HCH	26.39	PASS
CP-QPSK	LCH	26.48	PASS
	MCH	26.28	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.12	PASS
	MCH	26.77	PASS
	HCH	26.53	PASS

5G NR n77(3700-3980MHz)

Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.82	PASS
	MCH	26.63	PASS
	HCH	26.49	PASS
CP-QPSK	LCH	26.25	PASS
	MCH	26.37	PASS
	HCH	26.51	PASS
CP-16QAM	LCH	26.59	PASS
	MCH	26.34	PASS
	HCH	26.60	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.72	PASS
	MCH	26.65	PASS
	HCH	26.49	PASS
CP-QPSK	LCH	26.37	PASS
	MCH	26.58	PASS
	HCH	26.29	PASS
CP-16QAM	LCH	26.45	PASS
	MCH	26.71	PASS
	HCH	26.66	PASS
Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.70	PASS
	MCH	26.62	PASS
	HCH	26.18	PASS
CP-QPSK	LCH	26.34	PASS
	MCH	26.70	PASS
	HCH	26.52	PASS
CP-16QAM	LCH	26.39	PASS
	MCH	26.45	PASS
	HCH	26.39	PASS

Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.27	PASS
	MCH	26.34	PASS
	HCH	26.65	PASS
CP-QPSK	LCH	26.70	PASS
	MCH	26.58	PASS
	HCH	26.45	PASS
CP-16QAM	LCH	26.97	PASS
	MCH	26.12	PASS
	HCH	26.69	PASS
Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.44	PASS
	MCH	26.80	PASS
	HCH	26.72	PASS
CP-QPSK	LCH	26.34	PASS
	MCH	26.85	PASS
	HCH	26.39	PASS
CP-16QAM	LCH	26.21	PASS
	MCH	26.70	PASS
	HCH	26.83	PASS
Channel Bandwidth: 50 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.63	PASS
	MCH	26.72	PASS
	HCH	26.19	PASS
CP-QPSK	LCH	26.48	PASS
	MCH	26.28	PASS
	HCH	26.71	PASS
CP-16QAM	LCH	26.63	PASS
	MCH	26.50	PASS
	HCH	26.48	PASS

Channel Bandwidth: 60 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.39	PASS
	MCH	26.19	PASS
	HCH	26.92	PASS
CP-QPSK	LCH	26.16	PASS
	MCH	26.99	PASS
	HCH	26.26	PASS
CP-16QAM	LCH	26.37	PASS
	MCH	26.80	PASS
	HCH	26.52	PASS
Channel Bandwidth: 70 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.34	PASS
	MCH	26.59	PASS
	HCH	26.25	PASS
CP-QPSK	LCH	26.27	PASS
	MCH	26.65	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.72	PASS
	MCH	26.39	PASS
	HCH	26.51	PASS
Channel Bandwidth: 80 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.63	PASS
	MCH	26.28	PASS
	HCH	26.72	PASS
CP-QPSK	LCH	26.65	PASS
	MCH	26.34	PASS
	HCH	26.61	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.86	PASS
	HCH	26.70	PASS

Channel Bandwidth: 90 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.59	PASS
	MCH	26.18	PASS
	HCH	26.72	PASS
CP-QPSK	LCH	26.51	PASS
	MCH	26.62	PASS
	HCH	26.57	PASS
CP-16QAM	LCH	26.34	PASS
	MCH	26.77	PASS
	HCH	26.59	PASS
Channel Bandwidth: 100 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.75	PASS
	MCH	26.61	PASS
	HCH	26.69	PASS
CP-QPSK	LCH	26.75	PASS
	MCH	26.36	PASS
	HCH	26.32	PASS
CP-16QAM	LCH	26.65	PASS
	MCH	26.39	PASS
	HCH	26.40	PASS

5G NR n78(3450-3550MHz)

Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.82	PASS
	MCH	26.59	PASS
	HCH	26.34	PASS
CP-QPSK	LCH	26.79	PASS
	MCH	26.40	PASS
	HCH	26.72	PASS
CP-16QAM	LCH	26.69	PASS
	MCH	26.70	PASS
	HCH	26.85	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.39	PASS
	MCH	26.28	PASS
	HCH	26.49	PASS
CP-QPSK	LCH	26.59	PASS
	MCH	26.47	PASS
	HCH	26.13	PASS
CP-16QAM	LCH	26.59	PASS
	MCH	26.12	PASS
	HCH	26.76	PASS
Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.86	PASS
	MCH	26.34	PASS
	HCH	26.76	PASS
CP-QPSK	LCH	26.83	PASS
	MCH	26.54	PASS
	HCH	26.39	PASS
CP-16QAM	LCH	26.28	PASS
	MCH	26.97	PASS
	HCH	26.26	PASS

Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.47	PASS
	MCH	26.12	PASS
	HCH	26.34	PASS
CP-QPSK	LCH	26.51	PASS
	MCH	26.70	PASS
	HCH	26.76	PASS
CP-16QAM	LCH	26.12	PASS
	MCH	26.75	PASS
	HCH	26.34	PASS
Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.86	PASS
	MCH	26.96	PASS
	HCH	26.24	PASS
CP-QPSK	LCH	26.82	PASS
	MCH	26.70	PASS
	HCH	26.39	PASS
CP-16QAM	LCH	26.57	PASS
	MCH	26.28	PASS
	HCH	26.14	PASS
Channel Bandwidth: 50 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.76	PASS
	MCH	26.25	PASS
	HCH	26.39	PASS
CP-QPSK	LCH	26.45	PASS
	MCH	26.62	PASS
	HCH	26.19	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.15	PASS
	HCH	26.37	PASS

Channel Bandwidth: 60 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.17	PASS
	MCH	26.25	PASS
	HCH	26.39	PASS
CP-QPSK	LCH	26.86	PASS
	MCH	26.43	PASS
	HCH	26.72	PASS
CP-16QAM	LCH	26.59	PASS
	MCH	26.43	PASS
	HCH	26.36	PASS
Channel Bandwidth: 70 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.47	PASS
	MCH	26.32	PASS
	HCH	26.69	PASS
CP-QPSK	LCH	26.43	PASS
	MCH	26.18	PASS
	HCH	26.72	PASS
CP-16QAM	LCH	26.62	PASS
	MCH	26.53	PASS
	HCH	26.48	PASS
Channel Bandwidth: 80 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.86	PASS
	MCH	26.25	PASS
	HCH	26.72	PASS
CP-QPSK	LCH	26.49	PASS
	MCH	26.36	PASS
	HCH	26.73	PASS
CP-16QAM	LCH	26.63	PASS
	MCH	26.72	PASS
	HCH	26.59	PASS

Channel Bandwidth: 90 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.69	PASS
	MCH	26.75	PASS
	HCH	26.34	PASS
CP-QPSK	LCH	26.70	PASS
	MCH	26.39	PASS
	HCH	26.48	PASS
CP-16QAM	LCH	26.21	PASS
	MCH	26.70	PASS
	HCH	26.19	PASS
Channel Bandwidth: 100 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.75	PASS
	MCH	26.34	PASS
	HCH	26.27	PASS
CP-QPSK	LCH	26.35	PASS
	MCH	26.72	PASS
	HCH	26.19	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.65	PASS
	HCH	26.86	PASS

5G NR n78(3700-3800MHz)

Channel Bandwidth: 10 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.29	PASS
	MCH	26.25	PASS
	HCH	26.34	PASS
CP-QPSK	LCH	26.68	PASS
	MCH	26.70	PASS
	HCH	26.59	PASS
CP-16QAM	LCH	26.34	PASS
	MCH	26.25	PASS
	HCH	26.36	PASS
Channel Bandwidth: 15 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.70	PASS
	MCH	26.65	PASS
	HCH	26.81	PASS
CP-QPSK	LCH	26.59	PASS
	MCH	26.70	PASS
	HCH	26.65	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.19	PASS
	HCH	26.57	PASS
Channel Bandwidth: 20 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.82	PASS
	MCH	26.49	PASS
	HCH	26.53	PASS
CP-QPSK	LCH	26.62	PASS
	MCH	26.19	PASS
	HCH	26.34	PASS
CP-16QAM	LCH	26.72	PASS
	MCH	26.59	PASS
	HCH	26.12	PASS

Channel Bandwidth: 30 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.34	PASS
	MCH	26.76	PASS
	HCH	26.28	PASS
CP-QPSK	LCH	26.39	PASS
	MCH	26.47	PASS
	HCH	26.51	PASS
CP-16QAM	LCH	26.62	PASS
	MCH	26.34	PASS
	HCH	26.86	PASS
Channel Bandwidth: 40 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.86	PASS
	MCH	26.34	PASS
	HCH	26.51	PASS
CP-QPSK	LCH	26.82	PASS
	MCH	26.61	PASS
	HCH	26.59	PASS
CP-16QAM	LCH	26.36	PASS
	MCH	26.70	PASS
	HCH	26.81	PASS
Channel Bandwidth: 50 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.79	PASS
	MCH	26.53	PASS
	HCH	26.45	PASS
CP-QPSK	LCH	26.34	PASS
	MCH	26.72	PASS
	HCH	26.16	PASS
CP-16QAM	LCH	26.87	PASS
	MCH	26.53	PASS
	HCH	26.70	PASS

Channel Bandwidth: 60 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.72	PASS
	MCH	26.39	PASS
	HCH	26.51	PASS
CP-QPSK	LCH	26.70	PASS
	MCH	26.53	PASS
	HCH	26.86	PASS
CP-16QAM	LCH	26.70	PASS
	MCH	26.19	PASS
	HCH	26.48	PASS
Channel Bandwidth: 70 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.72	PASS
	MCH	26.73	PASS
	HCH	26.56	PASS
CP-QPSK	LCH	26.34	PASS
	MCH	26.72	PASS
	HCH	26.53	PASS
CP-16QAM	LCH	26.71	PASS
	MCH	26.60	PASS
	HCH	26.59	PASS
Channel Bandwidth: 80 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.82	PASS
	MCH	26.69	PASS
	HCH	26.37	PASS
CP-QPSK	LCH	26.35	PASS
	MCH	26.29	PASS
	HCH	26.64	PASS
CP-16QAM	LCH	26.83	PASS
	MCH	26.79	PASS
	HCH	26.46	PASS

Channel Bandwidth: 90 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	LCH	26.34	PASS
	MCH	26.52	PASS
	HCH	26.18	PASS
CP-QPSK	LCH	26.39	PASS
	MCH	26.27	PASS
	HCH	26.35	PASS
CP-16QAM	LCH	26.46	PASS
	MCH	26.29	PASS
	HCH	26.48	PASS
Channel Bandwidth: 100 MHz			
Modulation	Channel	E.i.r.p [dBm]	Verdict
DFT-QPSK	MCH	26.72	PASS
CP-QPSK	MCH	26.65	PASS
CP-16QAM	MCH	26.34	PASS

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

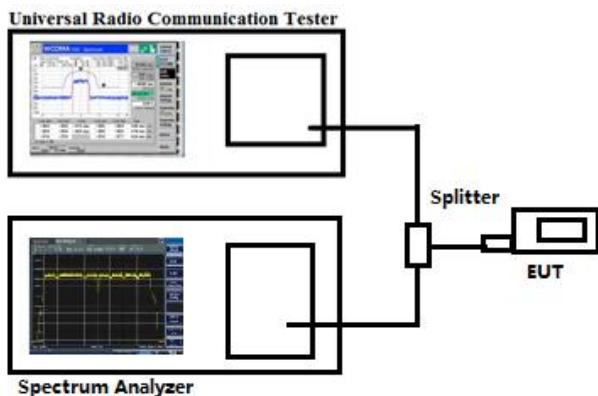

4.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

5. Emission Bandwidth

5.1 Standard Applicable


According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

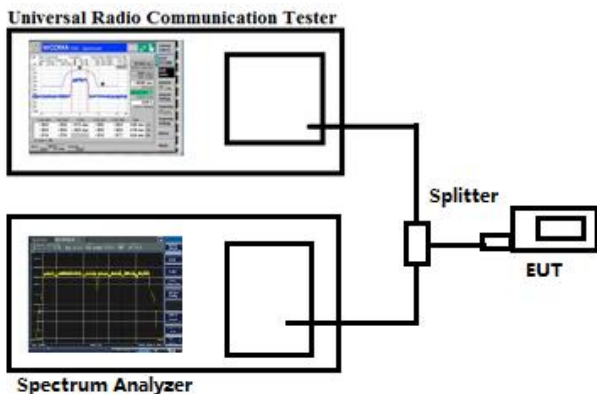

5.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test result: Pass

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5MHz.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

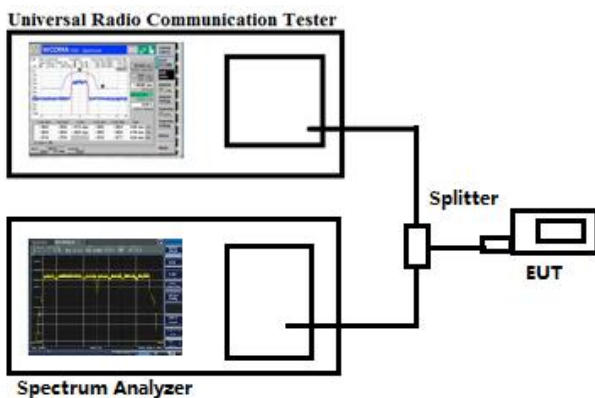

6.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission

Test result: Pass

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

➤ Spurious Emissions Below 1GHz

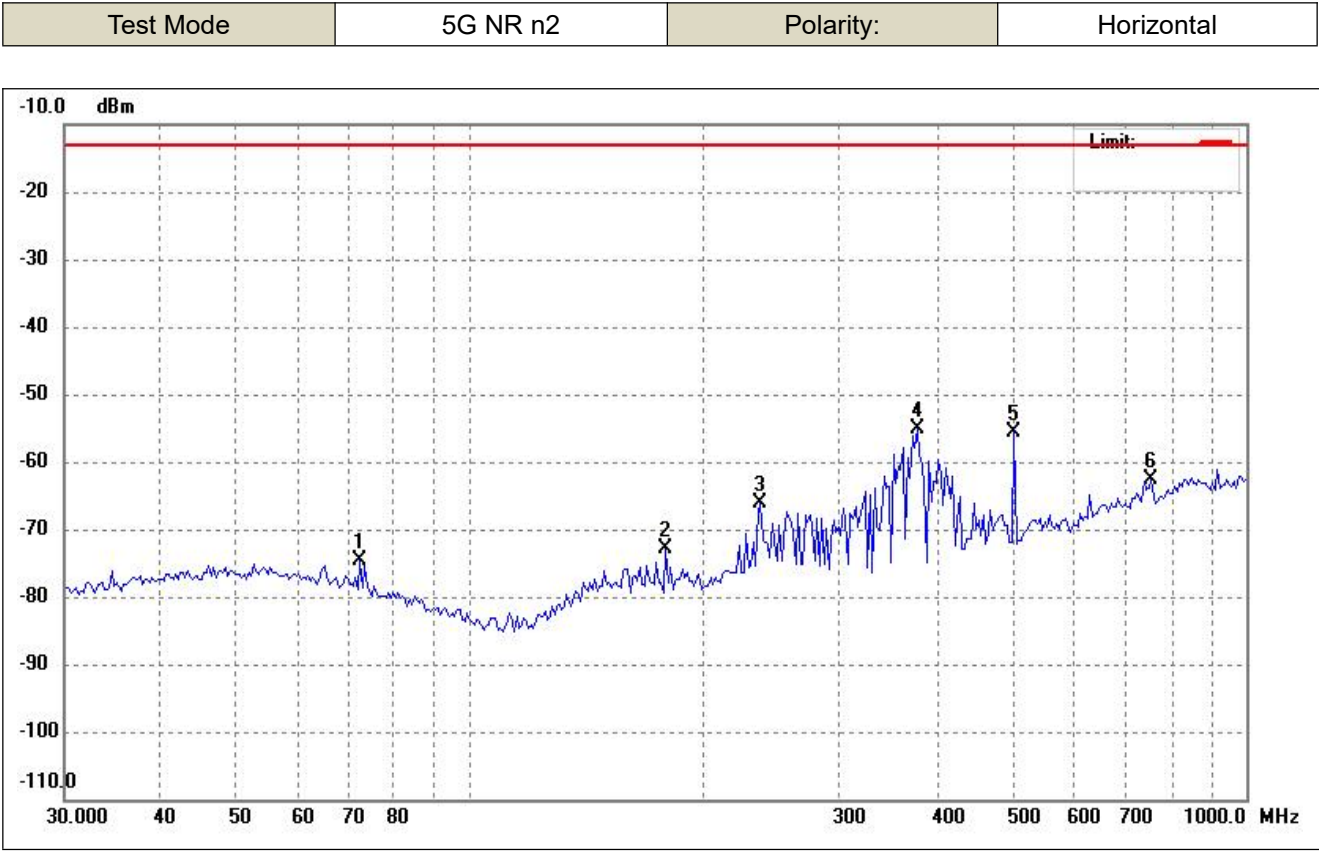


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-75.26	0.68	-74.58	-13.00	-61.58	ERP
2	178.7697	-73.77	0.98	-72.79	-13.00	-59.79	ERP
3	236.7928	-72.50	6.28	-66.22	-13.00	-53.22	ERP
4	376.5228	-59.82	4.58	-55.24	-13.00	-42.24	ERP
5	502.2473	-63.03	7.31	-55.72	-13.00	-42.72	ERP
6	754.9628	-73.79	11.20	-62.59	-13.00	-49.59	ERP

Test Mode	5G NR n2	Polarity:	Vertical
-----------	----------	-----------	----------

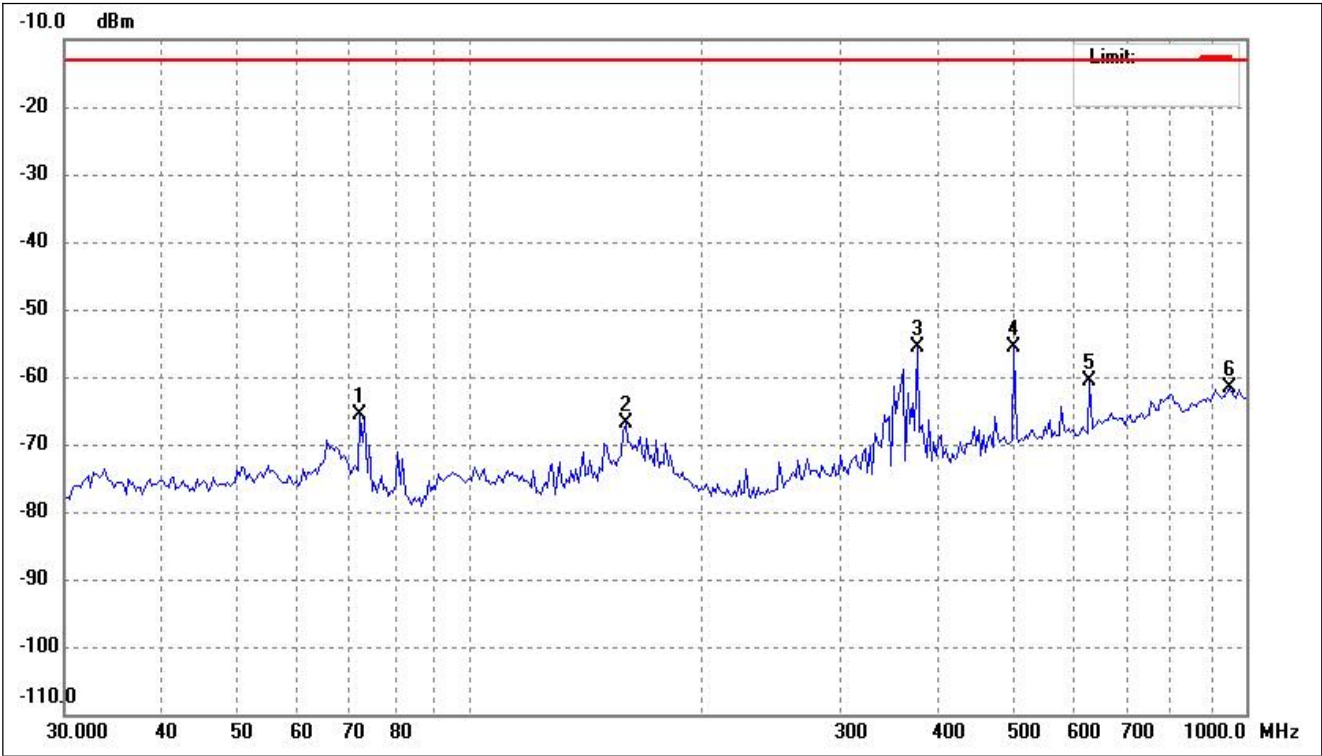


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-68.13	2.50	-65.63	-13.00	-52.63	ERP
2	158.6399	-74.23	7.39	-66.84	-13.00	-53.84	ERP
3	376.5228	-60.45	4.89	-55.56	-13.00	-42.56	ERP
4	502.2473	-62.90	7.21	-55.69	-13.00	-42.69	ERP
5	628.8936	-69.77	9.19	-60.58	-13.00	-47.58	ERP
6	952.0001	-74.31	12.64	-61.67	-13.00	-48.67	ERP

Test Mode	5G NR n5	Polarity:	Horizontal
-----------	----------	-----------	------------

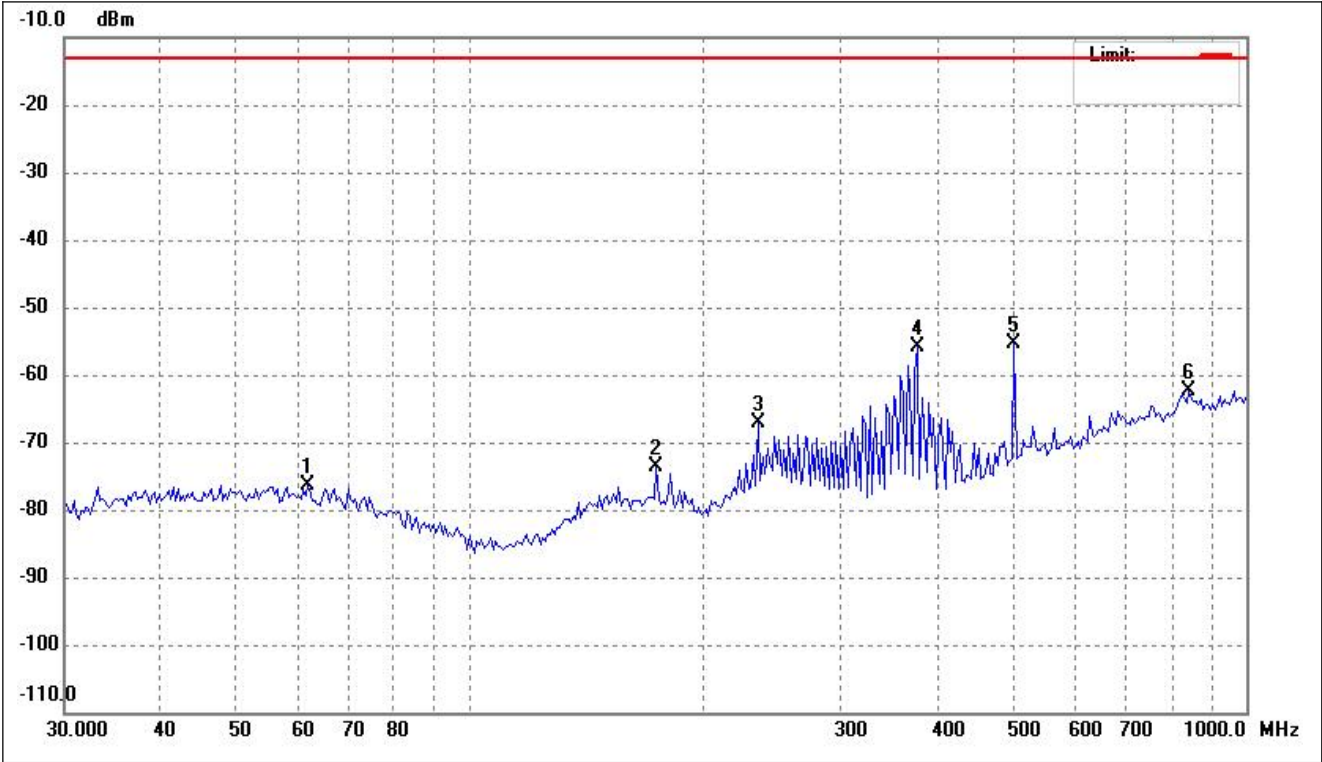


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	61.8676	-78.42	2.06	-76.36	-13.00	-63.36	ERP
2	173.8147	-74.59	0.98	-73.61	-13.00	-60.61	ERP
3	235.1346	-73.16	6.00	-67.16	-13.00	-54.16	ERP
4	376.5228	-60.52	4.58	-55.94	-13.00	-42.94	ERP
5	502.2473	-62.77	7.31	-55.46	-13.00	-42.46	ERP
6	844.8028	-75.99	13.63	-62.36	-13.00	-49.36	ERP

Test Mode	5G NR n5	Polarity:	Vertical
-----------	----------	-----------	----------

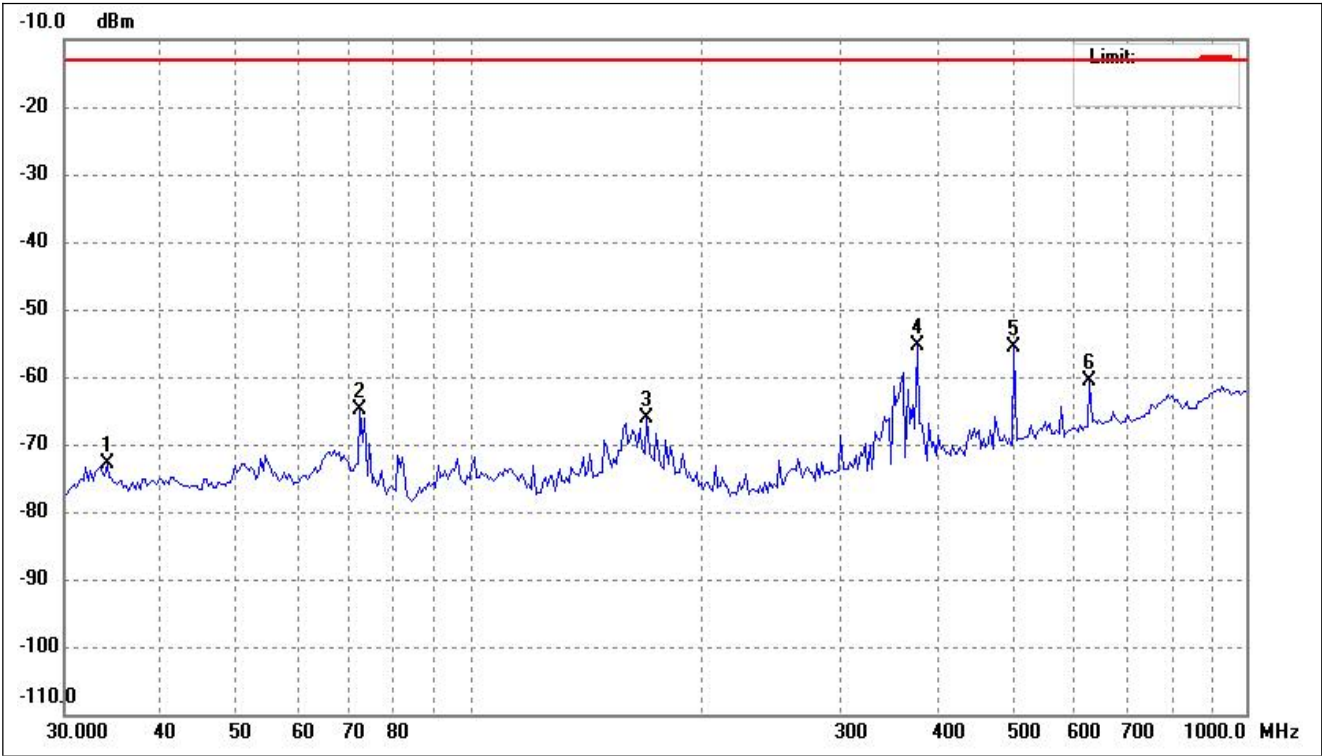


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	34.0451	-74.89	1.98	-72.91	-13.00	-59.91	ERP
2	72.2111	-67.42	2.50	-64.92	-13.00	-51.92	ERP
3	168.9970	-72.45	6.35	-66.10	-13.00	-53.10	ERP
4	376.5228	-60.30	4.89	-55.41	-13.00	-42.41	ERP
5	502.2473	-62.76	7.21	-55.55	-13.00	-42.55	ERP
6	628.8936	-69.77	9.19	-60.58	-13.00	-47.58	ERP

Test Mode	5G NR n7	Polarity:	Horizontal
-----------	----------	-----------	------------

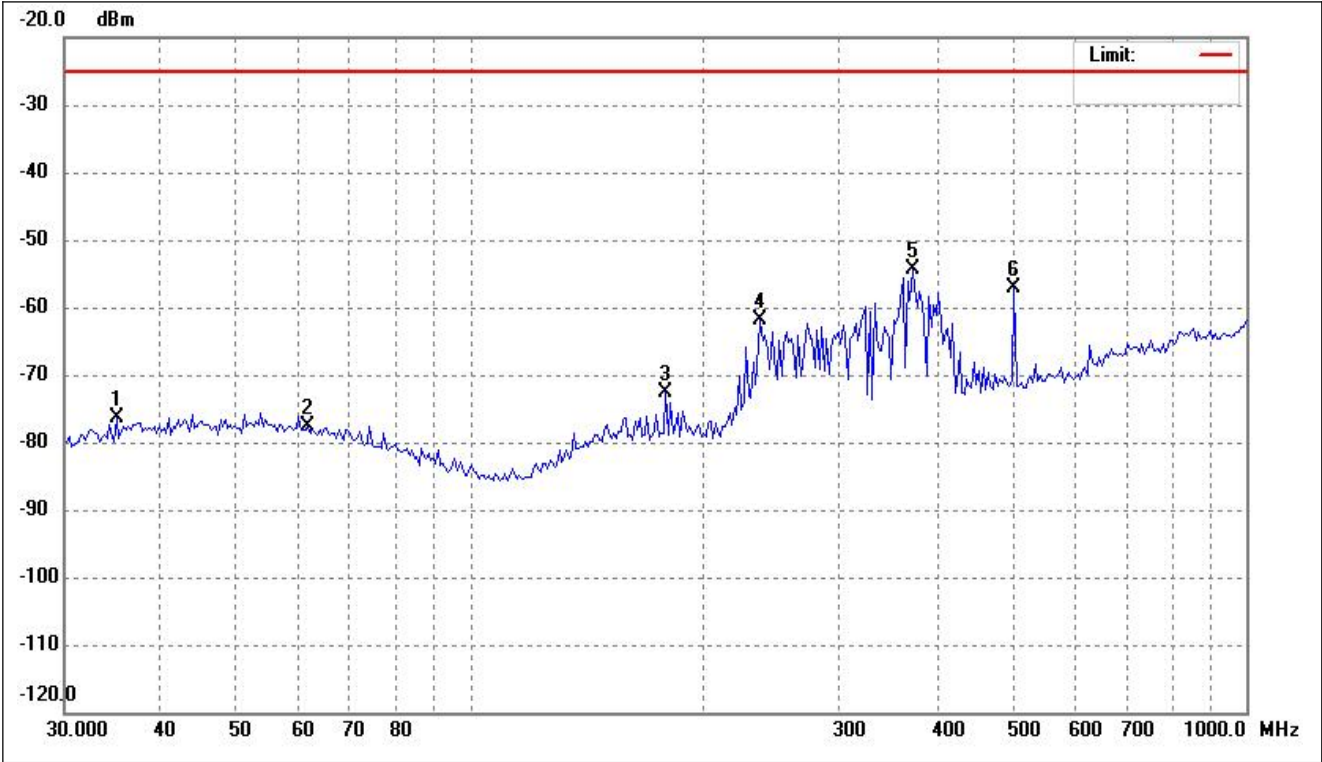


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	35.0157	-78.55	2.08	-76.47	-25.00	-51.47	ERP
2	61.8676	-79.65	2.06	-77.59	-25.00	-52.59	ERP
3	178.7697	-73.54	0.98	-72.56	-25.00	-47.56	ERP
4	236.7928	-68.16	6.28	-61.88	-25.00	-36.88	ERP
5	371.2680	-58.94	4.57	-54.37	-25.00	-29.37	ERP
6	502.2472	-64.33	7.31	-57.02	-25.00	-32.02	ERP

Test Mode	5G NR n7	Polarity:	Vertical
-----------	----------	-----------	----------

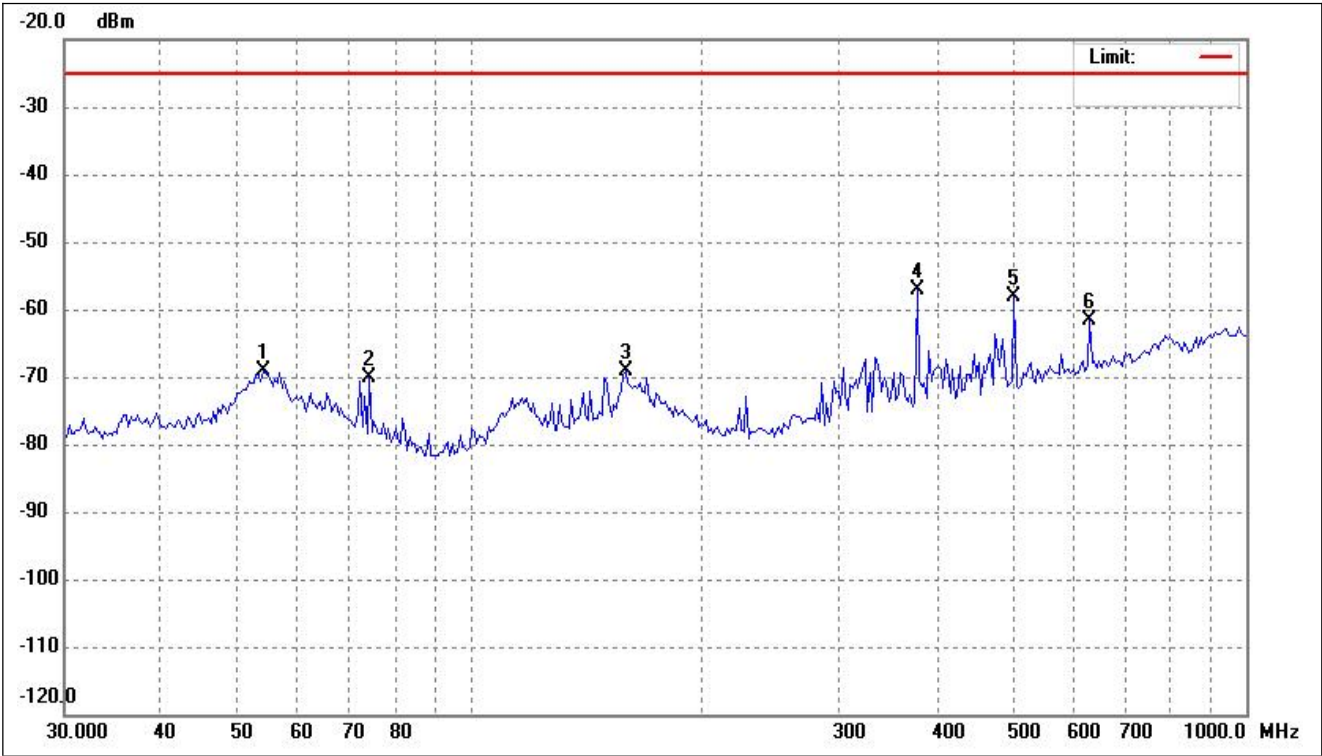


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.1349	-72.58	3.42	-69.16	-25.00	-44.16	ERP
2	74.2696	-71.95	1.94	-70.01	-25.00	-45.01	ERP
3	158.6399	-76.51	7.39	-69.12	-25.00	-44.12	ERP
4	376.5228	-62.03	4.89	-57.14	-25.00	-32.14	ERP
5	502.2472	-65.31	7.21	-58.10	-25.00	-33.10	ERP
6	628.8936	-70.72	9.19	-61.53	-25.00	-36.53	ERP

Test Mode	5G NR n12	Polarity:	Horizontal
-----------	-----------	-----------	------------

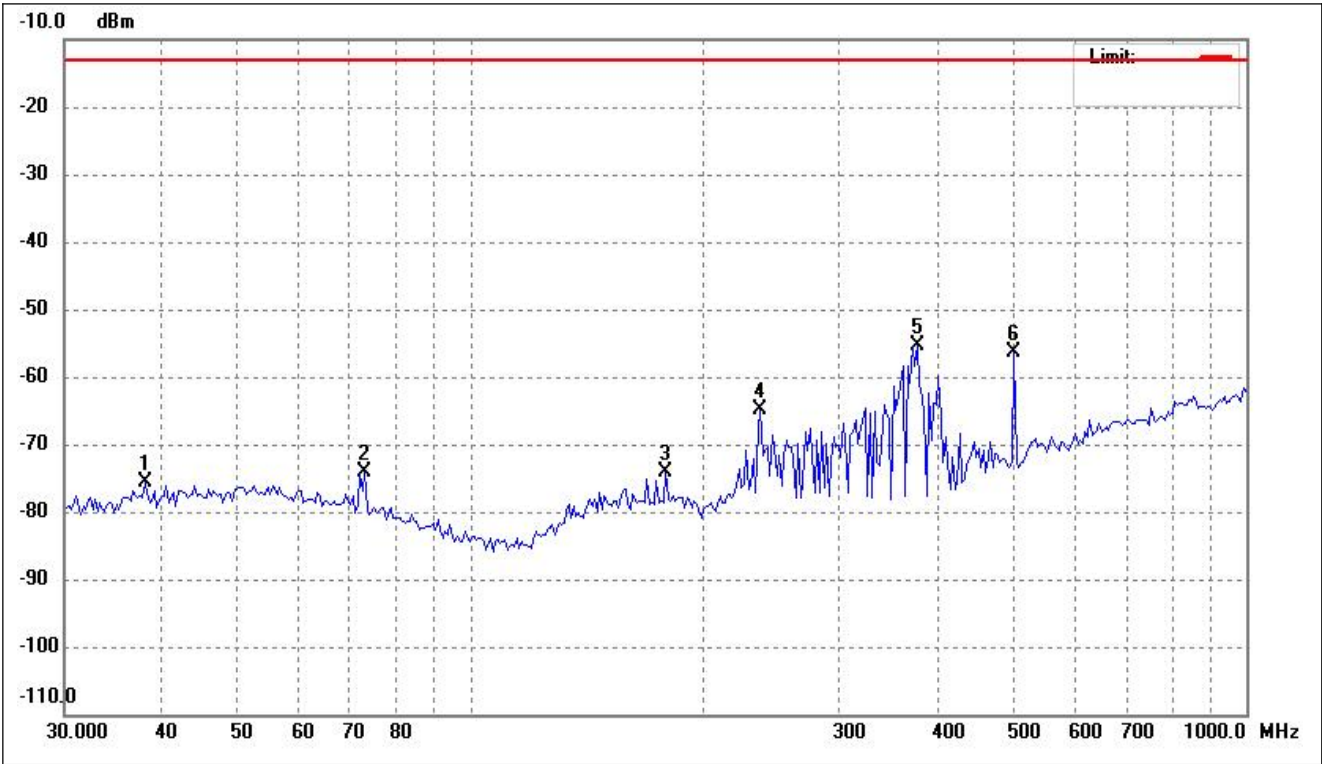


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.0965	-77.89	2.37	-75.52	-13.00	-62.52	ERP
2	73.2331	-74.58	0.50	-74.08	-13.00	-61.08	ERP
3	178.7697	-75.09	0.98	-74.11	-13.00	-61.11	ERP
4	236.7928	-71.23	6.28	-64.95	-13.00	-51.95	ERP
5	376.5228	-60.02	4.58	-55.44	-13.00	-42.44	ERP
6	502.2473	-63.77	7.31	-56.46	-13.00	-43.46	ERP

Test Mode	5G NR n12	Polarity:	Vertical
-----------	-----------	-----------	----------

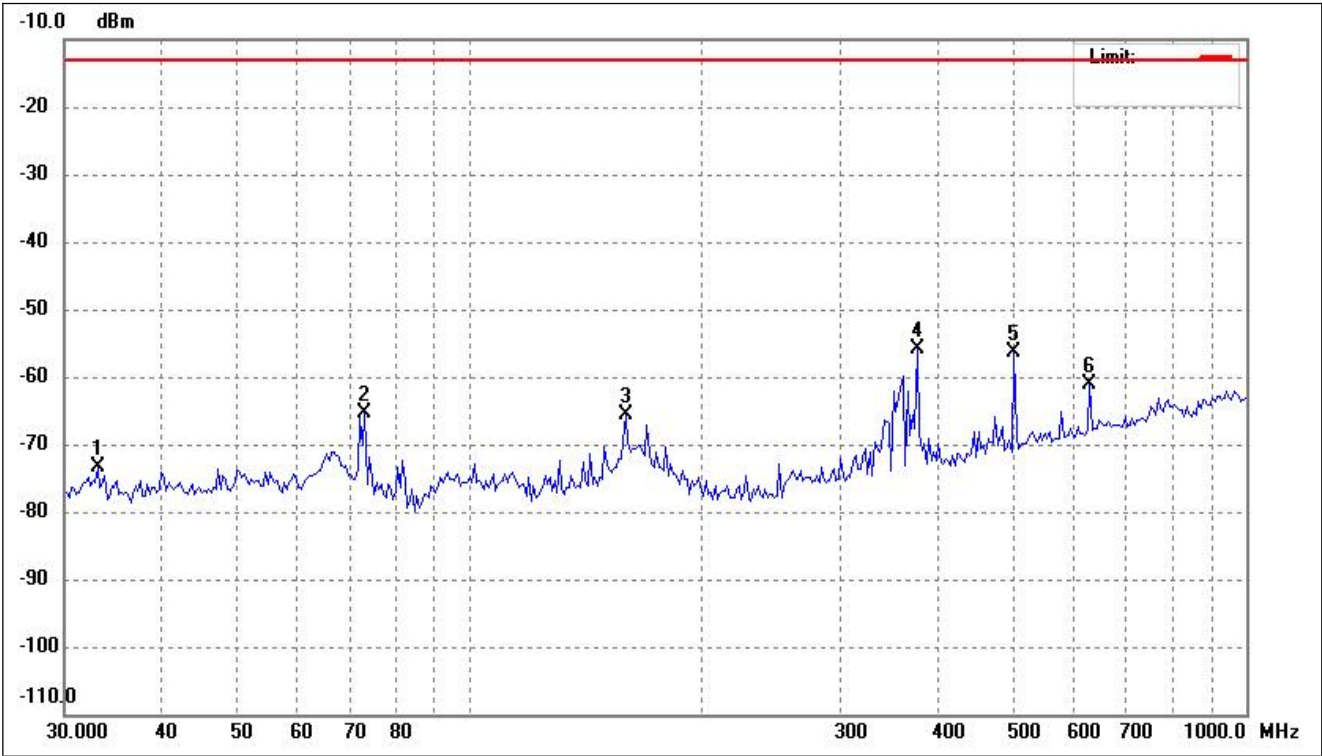


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.1015	-75.25	1.89	-73.36	-13.00	-60.36	ERP
2	73.2331	-67.61	2.22	-65.39	-13.00	-52.39	ERP
3	158.6399	-73.01	7.39	-65.62	-13.00	-52.62	ERP
4	376.5228	-60.64	4.89	-55.75	-13.00	-42.75	ERP
5	502.2473	-63.51	7.21	-56.30	-13.00	-43.30	ERP
6	628.8936	-70.24	9.19	-61.05	-13.00	-48.05	ERP

Test Mode	5G NR n13	Polarity:	Horizontal
-----------	-----------	-----------	------------

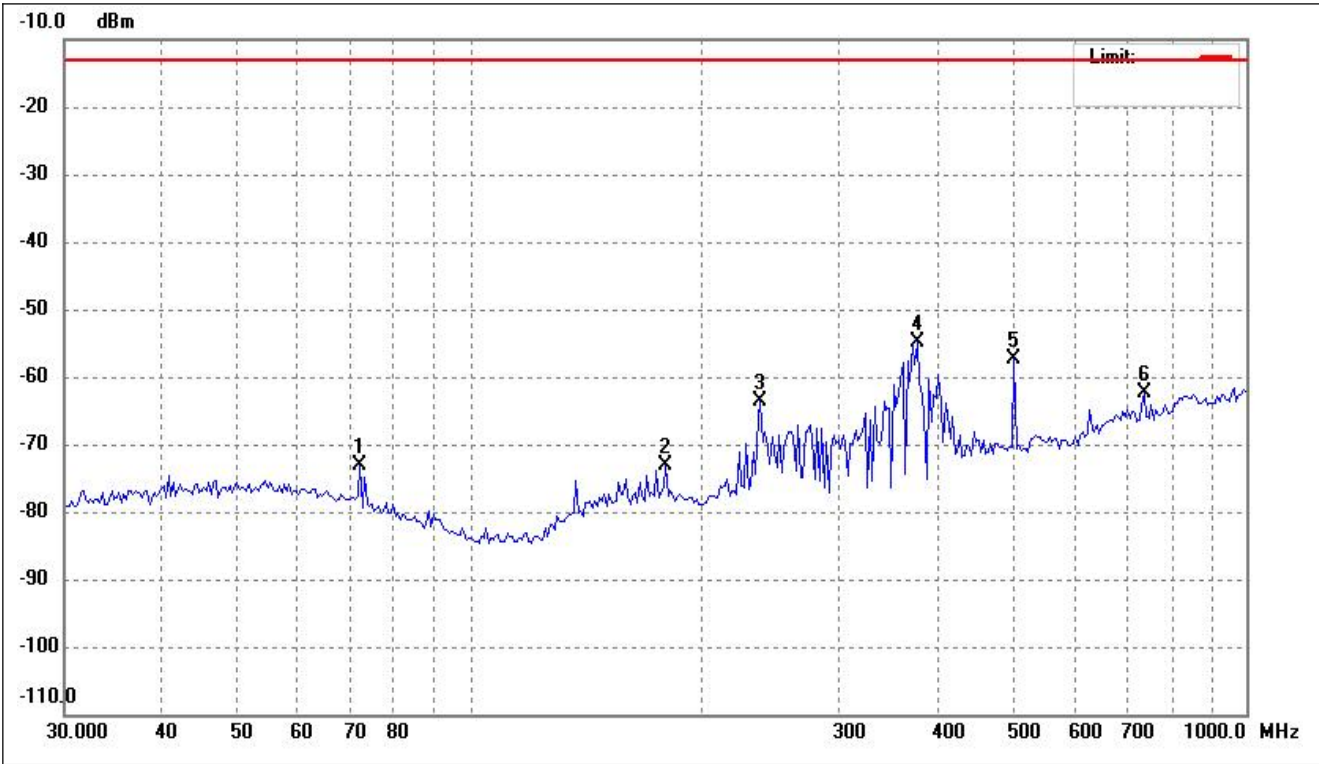


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-73.77	0.68	-73.09	-13.00	-60.09	ERP
2	178.7697	-74.20	0.98	-73.22	-13.00	-60.22	ERP
3	236.7928	-69.94	6.28	-63.66	-13.00	-50.66	ERP
4	376.5228	-59.41	4.58	-54.83	-13.00	-41.83	ERP
5	502.2473	-64.61	7.31	-57.30	-13.00	-44.30	ERP
6	739.2136	-73.51	11.14	-62.37	-13.00	-49.37	ERP

Test Mode	5G NR n13	Polarity:	Vertical
-----------	-----------	-----------	----------

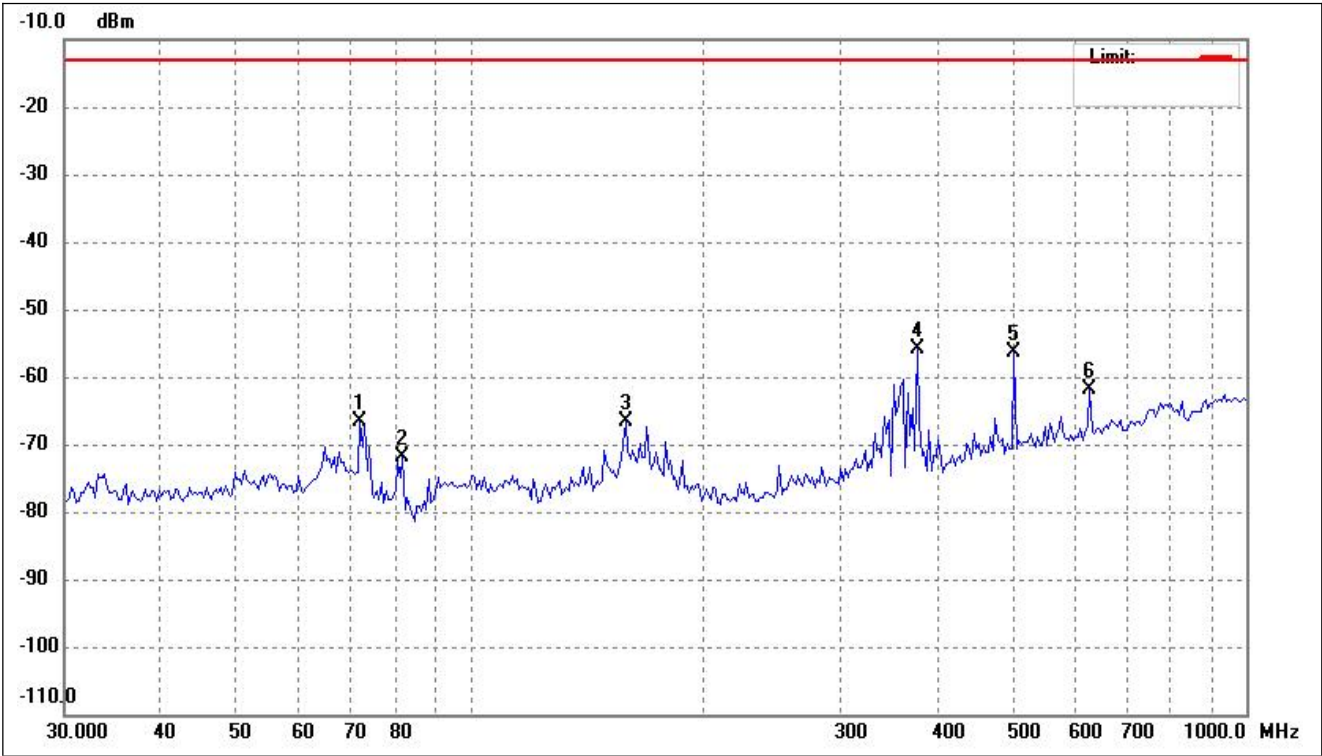


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-69.20	2.50	-66.70	-13.00	-53.70	ERP
2	81.9478	-71.79	-0.12	-71.91	-13.00	-58.91	ERP
3	158.6399	-73.97	7.39	-66.58	-13.00	-53.58	ERP
4	376.5228	-60.68	4.89	-55.79	-13.00	-42.79	ERP
5	502.2473	-63.57	7.21	-56.36	-13.00	-43.36	ERP
6	628.8936	-71.01	9.19	-61.82	-13.00	-48.82	ERP

Test Mode	5G NR n25	Polarity:	Horizontal
-----------	-----------	-----------	------------

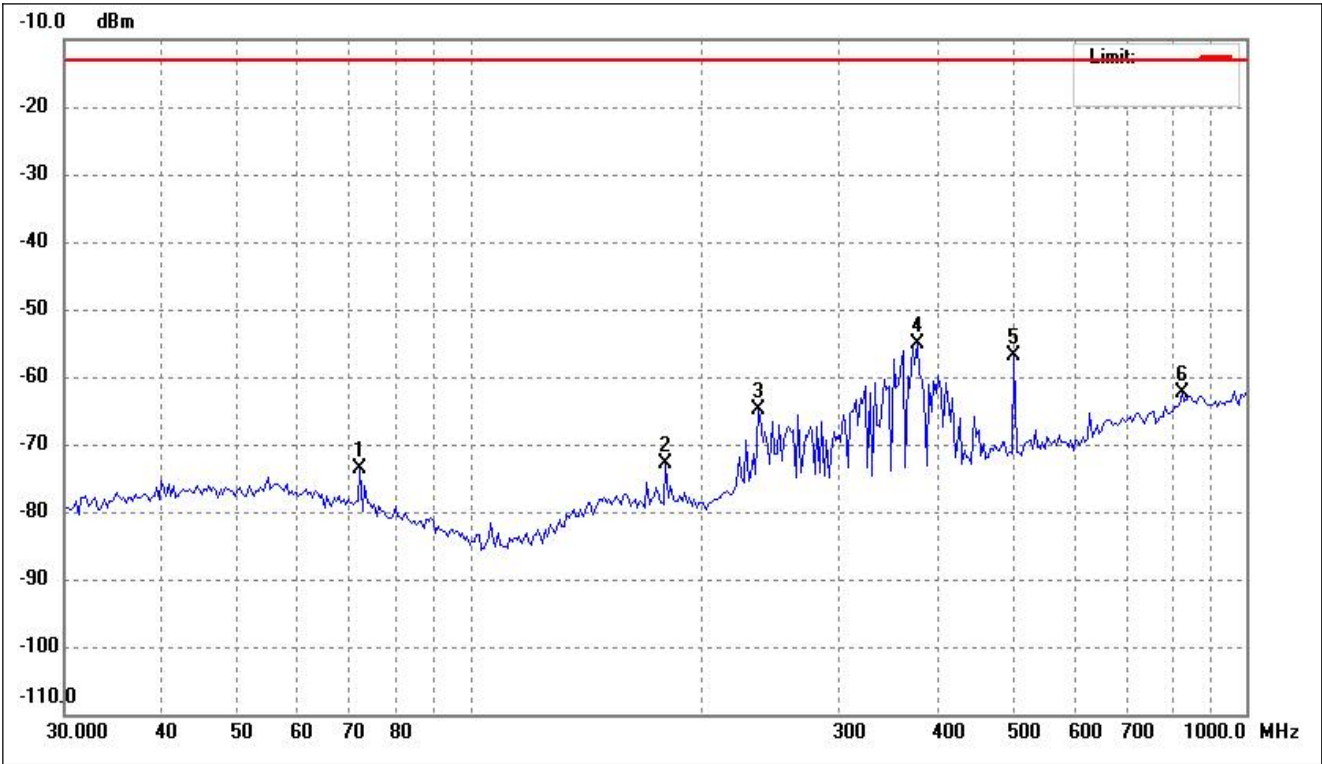


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-74.18	0.68	-73.50	-13.00	-60.50	ERP
2	178.7697	-73.83	0.98	-72.85	-13.00	-59.85	ERP
3	235.1346	-70.96	6.00	-64.96	-13.00	-51.96	ERP
4	376.5228	-59.59	4.58	-55.01	-13.00	-42.01	ERP
5	502.2473	-64.27	7.31	-56.96	-13.00	-43.96	ERP
6	827.1795	-75.51	13.24	-62.27	-13.00	-49.27	ERP

Test Mode	5G NR n25	Polarity:	Vertical
-----------	-----------	-----------	----------

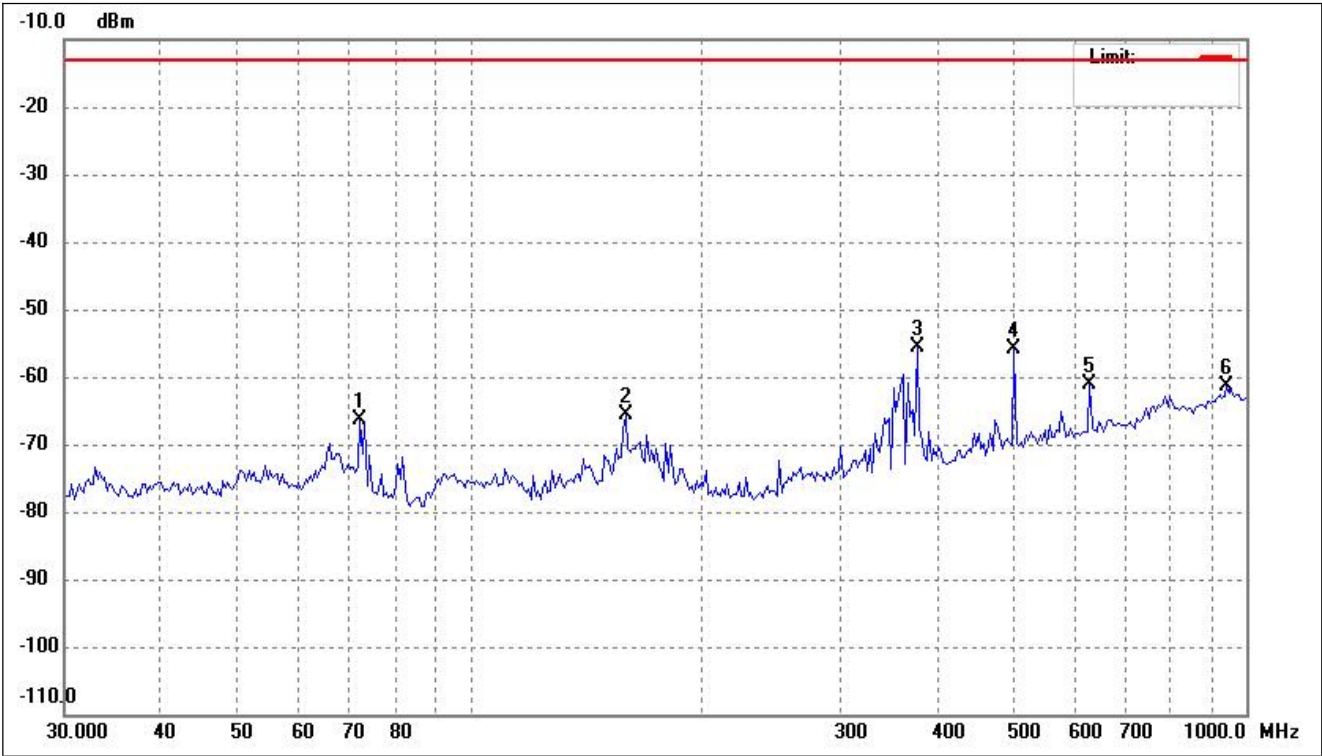


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-68.97	2.50	-66.47	-13.00	-53.47	ERP
2	158.6399	-72.96	7.39	-65.57	-13.00	-52.57	ERP
3	376.5228	-60.57	4.89	-55.68	-13.00	-42.68	ERP
4	502.2473	-63.17	7.21	-55.96	-13.00	-42.96	ERP
5	628.8936	-70.38	9.19	-61.19	-13.00	-48.19	ERP
6	945.3336	-74.02	12.59	-61.43	-13.00	-48.43	ERP

Test Mode	5G NR n26	Polarity:	Horizontal
-----------	-----------	-----------	------------

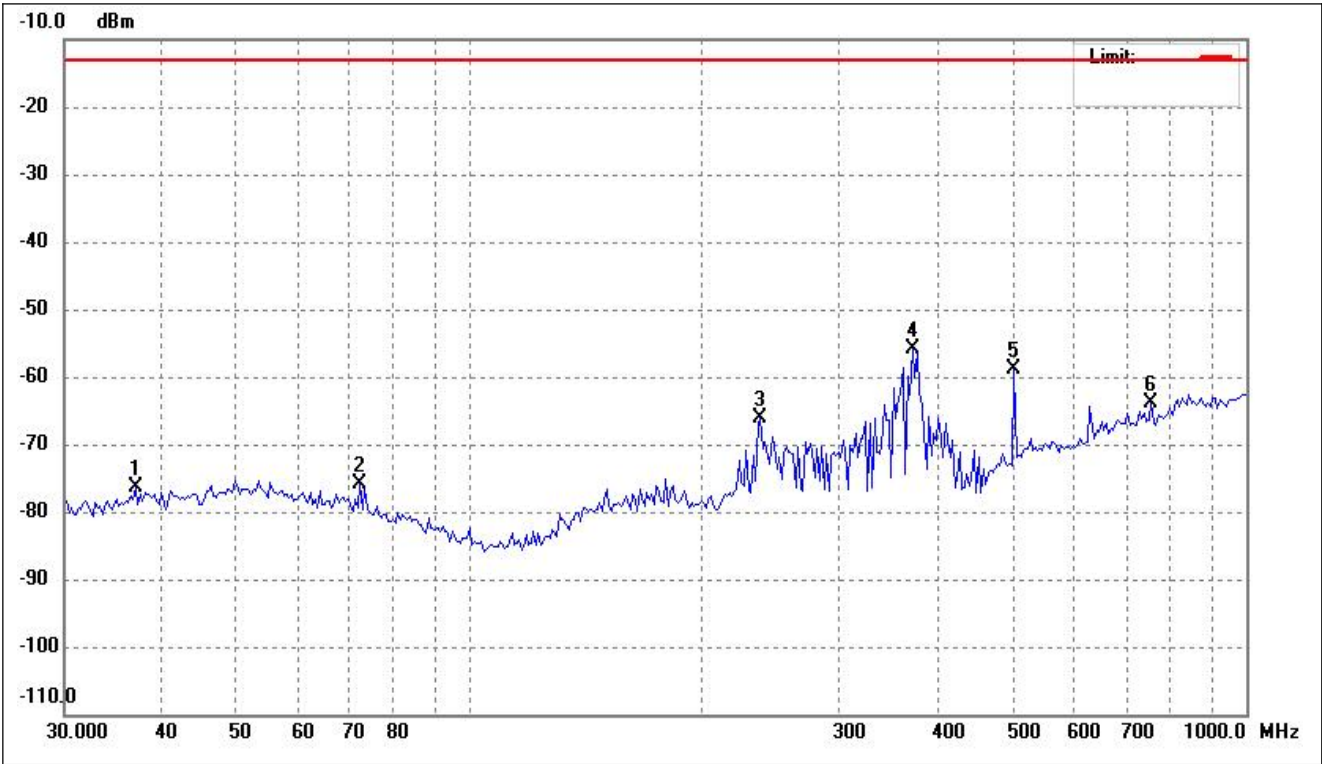


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.0405	-78.71	2.27	-76.44	-13.00	-63.44	ERP
2	72.2111	-76.53	0.68	-75.85	-13.00	-62.85	ERP
3	236.7928	-72.38	6.28	-66.10	-13.00	-53.10	ERP
4	371.2680	-60.46	4.57	-55.89	-13.00	-42.89	ERP
5	502.2473	-66.07	7.31	-58.76	-13.00	-45.76	ERP
6	754.9628	-74.95	11.20	-63.75	-13.00	-50.75	ERP

Test Mode	5G NR n26	Polarity:	Vertical
-----------	-----------	-----------	----------

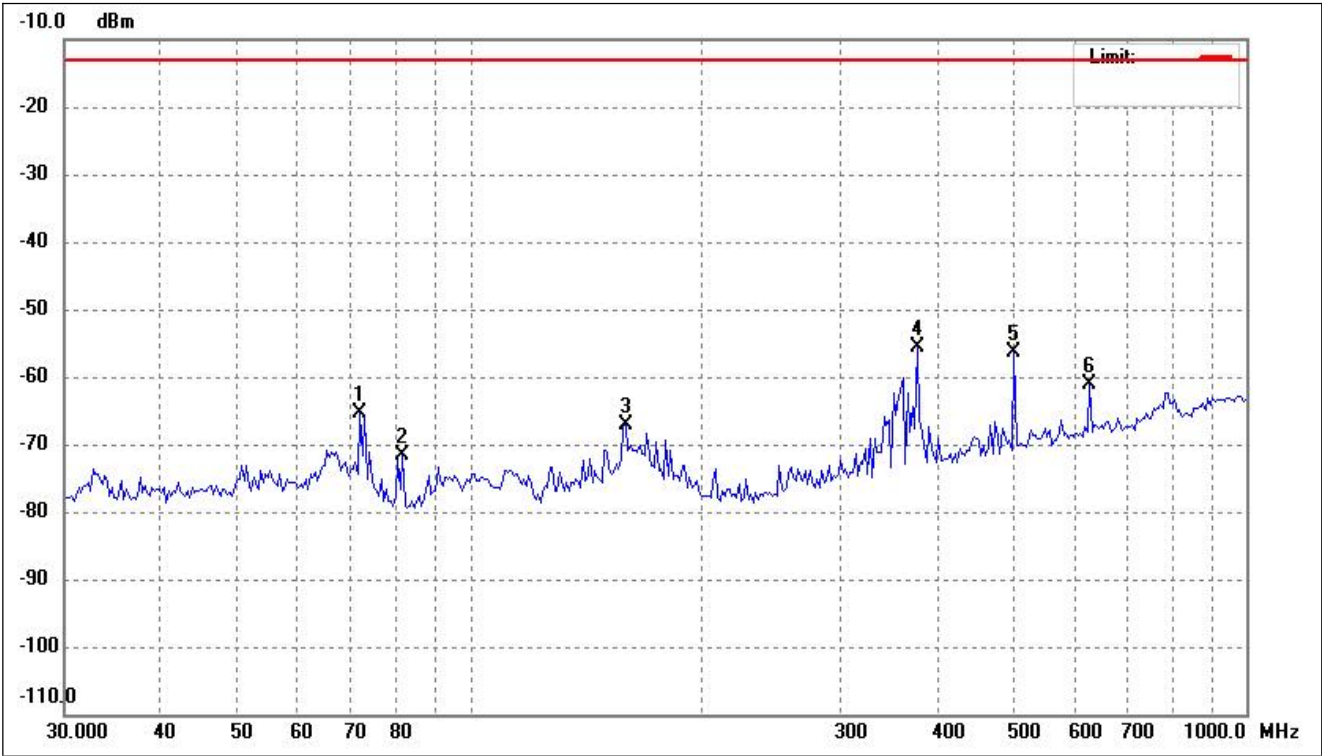


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-67.98	2.50	-65.48	-13.00	-52.48	ERP
2	81.9478	-71.46	-0.12	-71.58	-13.00	-58.58	ERP
3	158.6399	-74.58	7.39	-67.19	-13.00	-54.19	ERP
4	376.5228	-60.57	4.89	-55.68	-13.00	-42.68	ERP
5	502.2473	-63.50	7.21	-56.29	-13.00	-43.29	ERP
6	628.8936	-70.39	9.19	-61.20	-13.00	-48.20	ERP

Test Mode	5G NR n30	Polarity:	Horizontal
-----------	-----------	-----------	------------

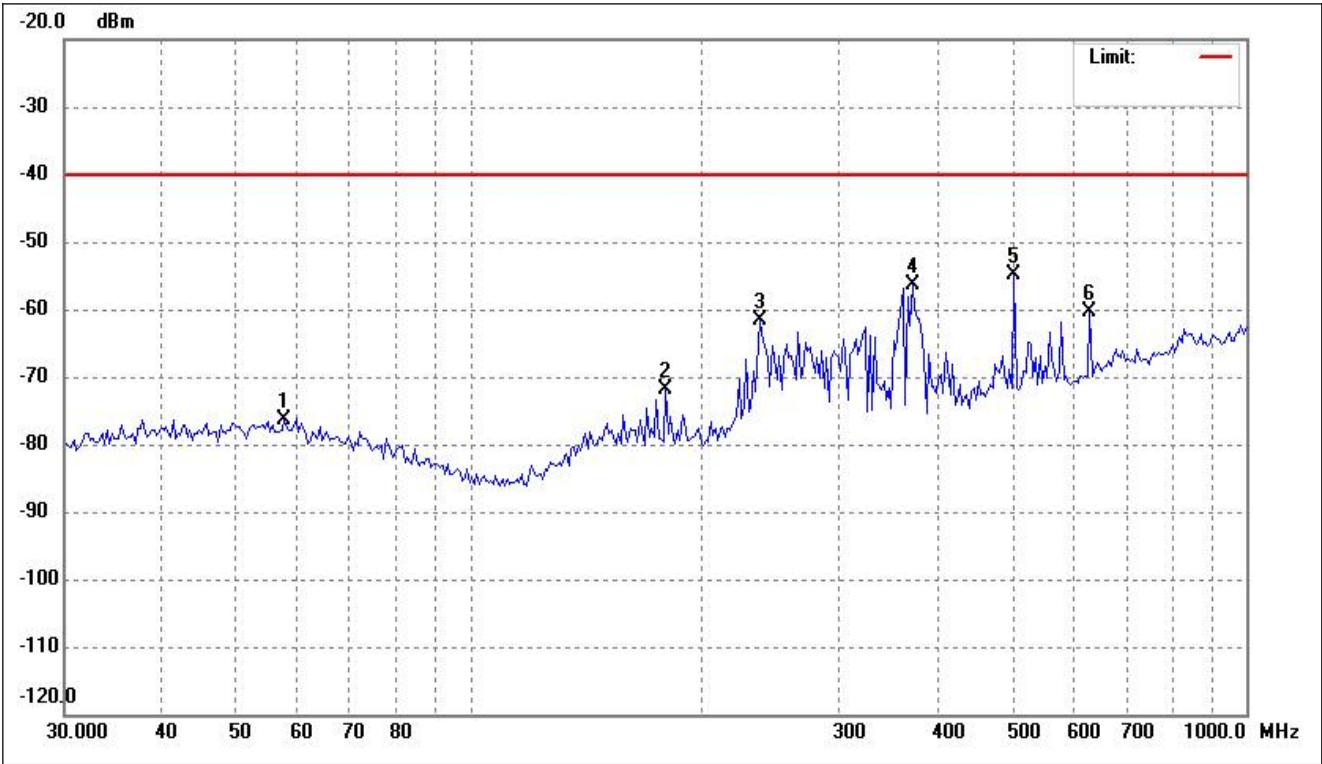


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	57.6693	-78.82	2.57	-76.25	-40.00	-36.25	ERP
2	178.7697	-72.79	0.98	-71.81	-40.00	-31.81	ERP
3	236.7928	-67.80	6.28	-61.52	-40.00	-21.52	ERP
4	371.2679	-61.01	4.57	-56.44	-40.00	-16.44	ERP
5	502.2472	-62.16	7.31	-54.85	-40.00	-14.85	ERP
6	628.8936	-69.40	9.00	-60.40	-40.00	-20.40	ERP

Test Mode	5G NR n30	Polarity:	Vertical
-----------	-----------	-----------	----------

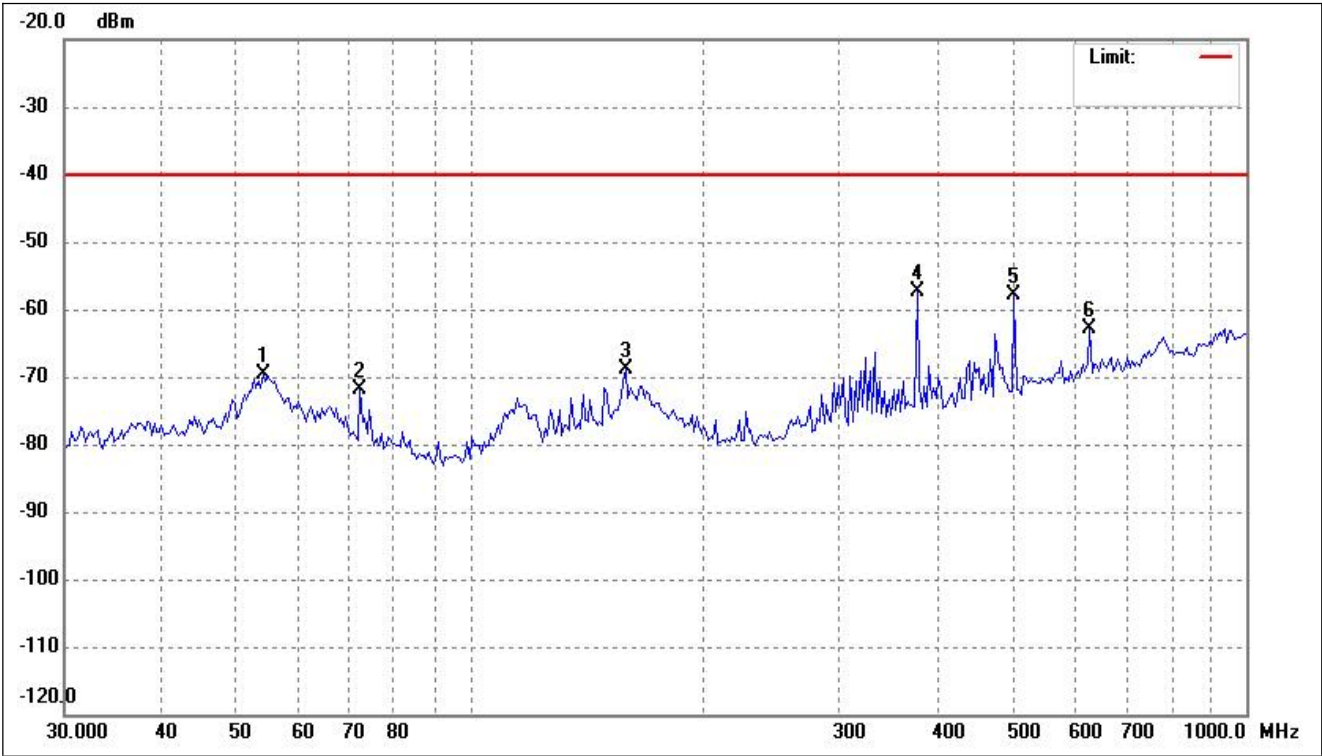


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.1349	-73.07	3.42	-69.65	-40.00	-29.65	ERP
2	72.2111	-74.30	2.50	-71.80	-40.00	-31.80	ERP
3	158.6399	-76.34	7.39	-68.95	-40.00	-28.95	ERP
4	376.5228	-62.32	4.89	-57.43	-40.00	-17.43	ERP
5	502.2472	-65.11	7.21	-57.90	-40.00	-17.90	ERP
6	628.8935	-72.17	9.19	-62.98	-40.00	-22.98	ERP

Test Mode	5G NR n38	Polarity:	Horizontal
-----------	-----------	-----------	------------

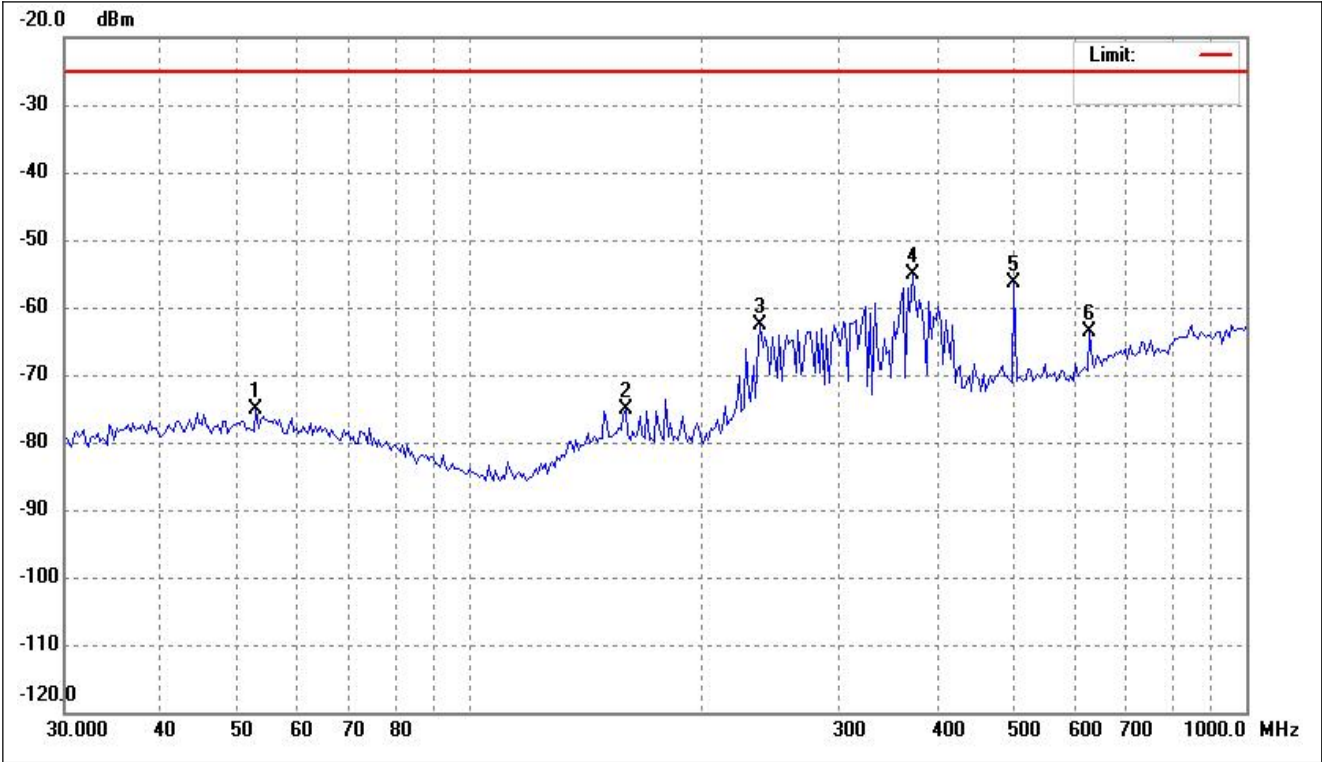


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.0056	-78.32	3.13	-75.19	-25.00	-50.19	ERP
2	158.6399	-76.06	0.97	-75.09	-25.00	-50.09	ERP
3	236.7928	-69.02	6.28	-62.74	-25.00	-37.74	ERP
4	371.2680	-59.67	4.57	-55.10	-25.00	-30.10	ERP
5	502.2472	-63.68	7.31	-56.37	-25.00	-31.37	ERP
6	628.8936	-72.73	9.00	-63.73	-25.00	-38.73	ERP

Test Mode	5G NR n38	Polarity:	Vertical
-----------	-----------	-----------	----------

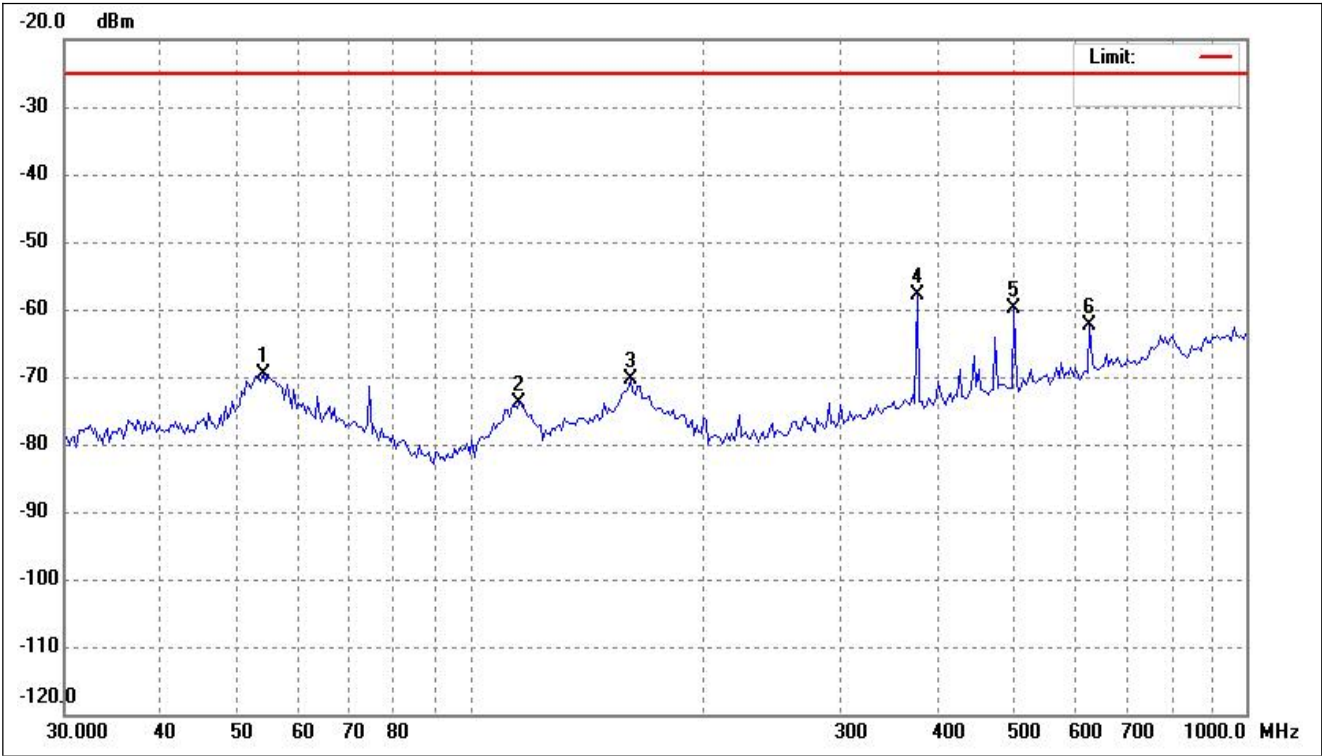


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.1349	-73.05	3.42	-69.63	-25.00	-44.63	ERP
2	115.6322	-73.34	-0.58	-73.92	-25.00	-48.92	ERP
3	160.8852	-78.11	7.76	-70.35	-25.00	-45.35	ERP
4	376.5228	-62.66	4.89	-57.77	-25.00	-32.77	ERP
5	502.2472	-67.17	7.21	-59.96	-25.00	-34.96	ERP
6	628.8936	-71.66	9.19	-62.47	-25.00	-37.47	ERP

Test Mode	5G NR n41	Polarity:	Horizontal
-----------	-----------	-----------	------------

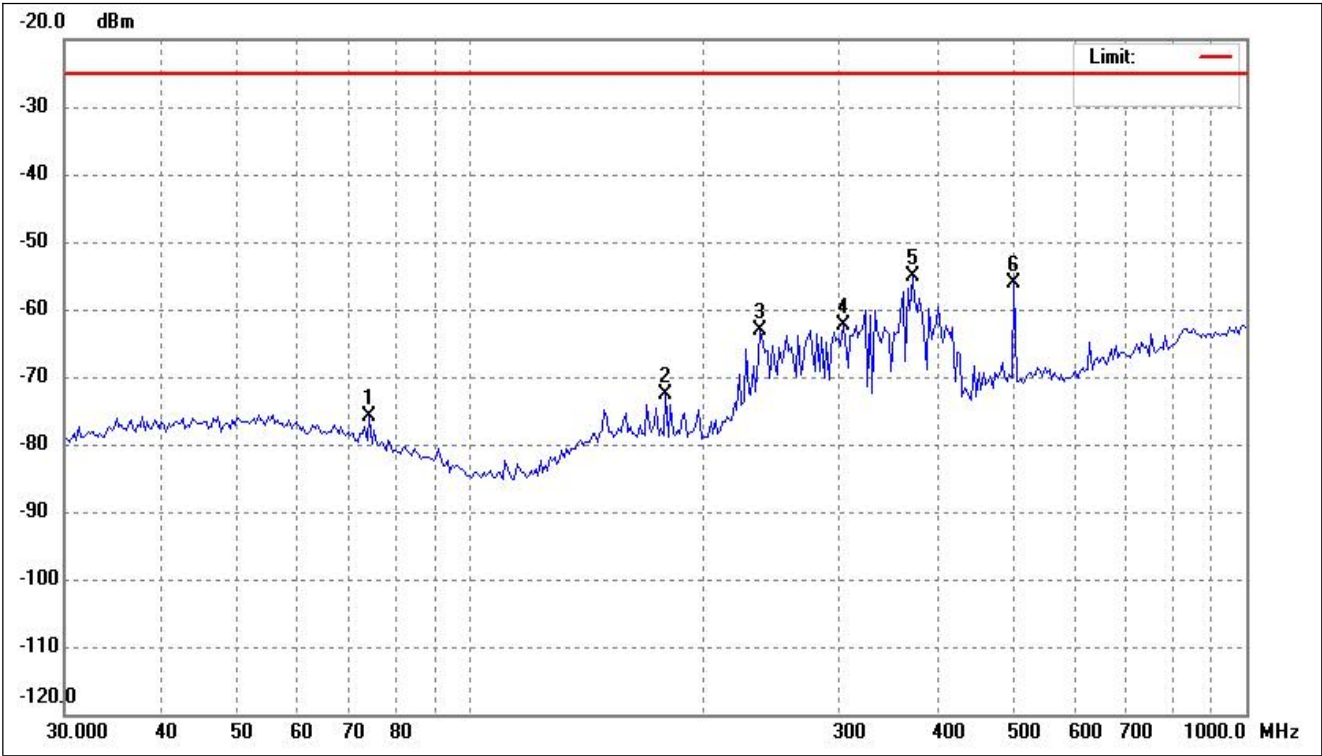


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	74.2696	-76.13	0.32	-75.81	-25.00	-50.81	ERP
2	178.7697	-73.58	0.98	-72.60	-25.00	-47.60	ERP
3	236.7927	-69.32	6.28	-63.04	-25.00	-38.04	ERP
4	302.8193	-66.71	4.40	-62.31	-25.00	-37.31	ERP
5	371.2680	-59.77	4.57	-55.20	-25.00	-30.20	ERP
6	502.2472	-63.49	7.31	-56.18	-25.00	-31.18	ERP

Test Mode	5G NR n41	Polarity:	Vertical
-----------	-----------	-----------	----------

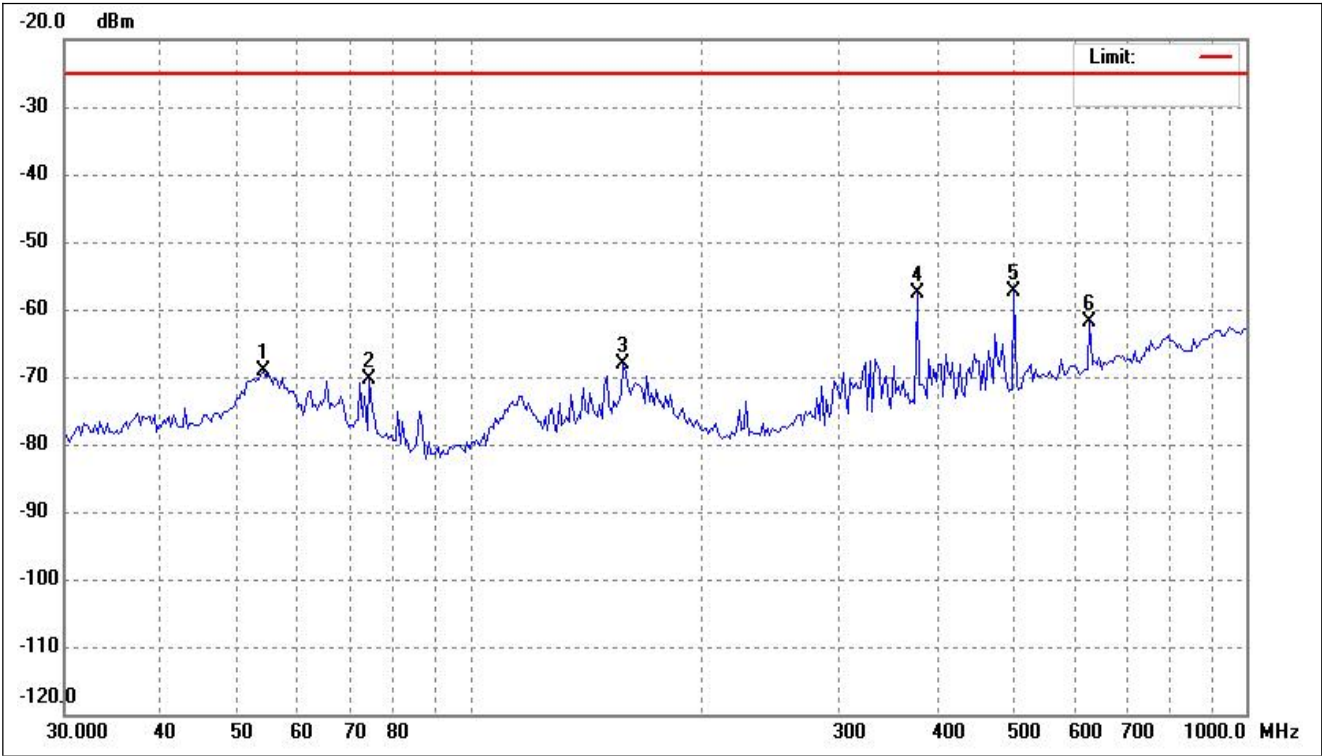


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.1349	-72.46	3.42	-69.04	-25.00	-44.04	ERP
2	74.2696	-72.23	1.94	-70.29	-25.00	-45.29	ERP
3	157.5290	-75.16	6.95	-68.21	-25.00	-43.21	ERP
4	376.5228	-62.54	4.89	-57.65	-25.00	-32.65	ERP
5	502.2472	-64.69	7.21	-57.48	-25.00	-32.48	ERP
6	628.8936	-71.15	9.19	-61.96	-25.00	-36.96	ERP

Test Mode	5G NR n71	Polarity:	Horizontal
-----------	-----------	-----------	------------

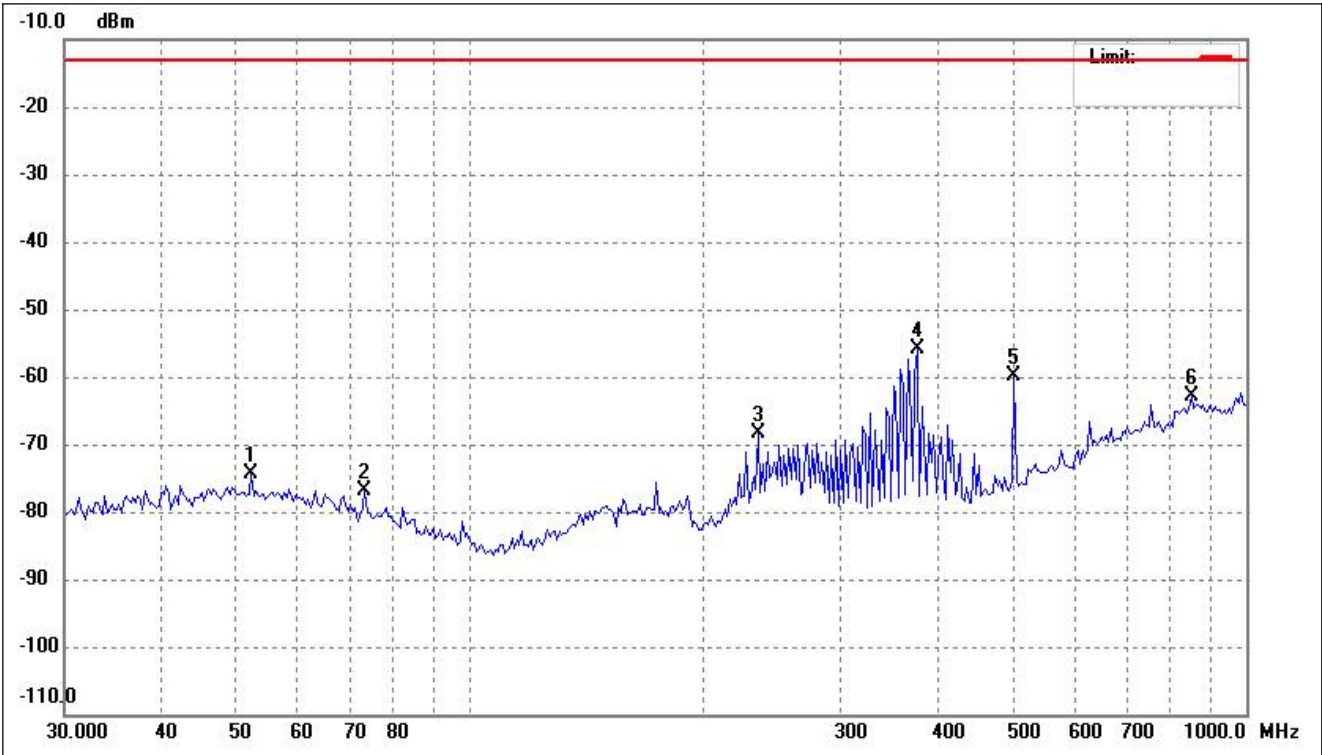


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.2659	-77.53	3.22	-74.31	-13.00	-61.31	ERP
2	73.2331	-77.42	0.50	-76.92	-13.00	-63.92	ERP
3	235.1346	-74.25	6.00	-68.25	-13.00	-55.25	ERP
4	376.5228	-60.57	4.58	-55.99	-13.00	-42.99	ERP
5	502.2473	-67.27	7.31	-59.96	-13.00	-46.96	ERP
6	850.7603	-76.46	13.61	-62.85	-13.00	-49.85	ERP

Test Mode	5G NR n71	Polarity:	Vertical
-----------	-----------	-----------	----------

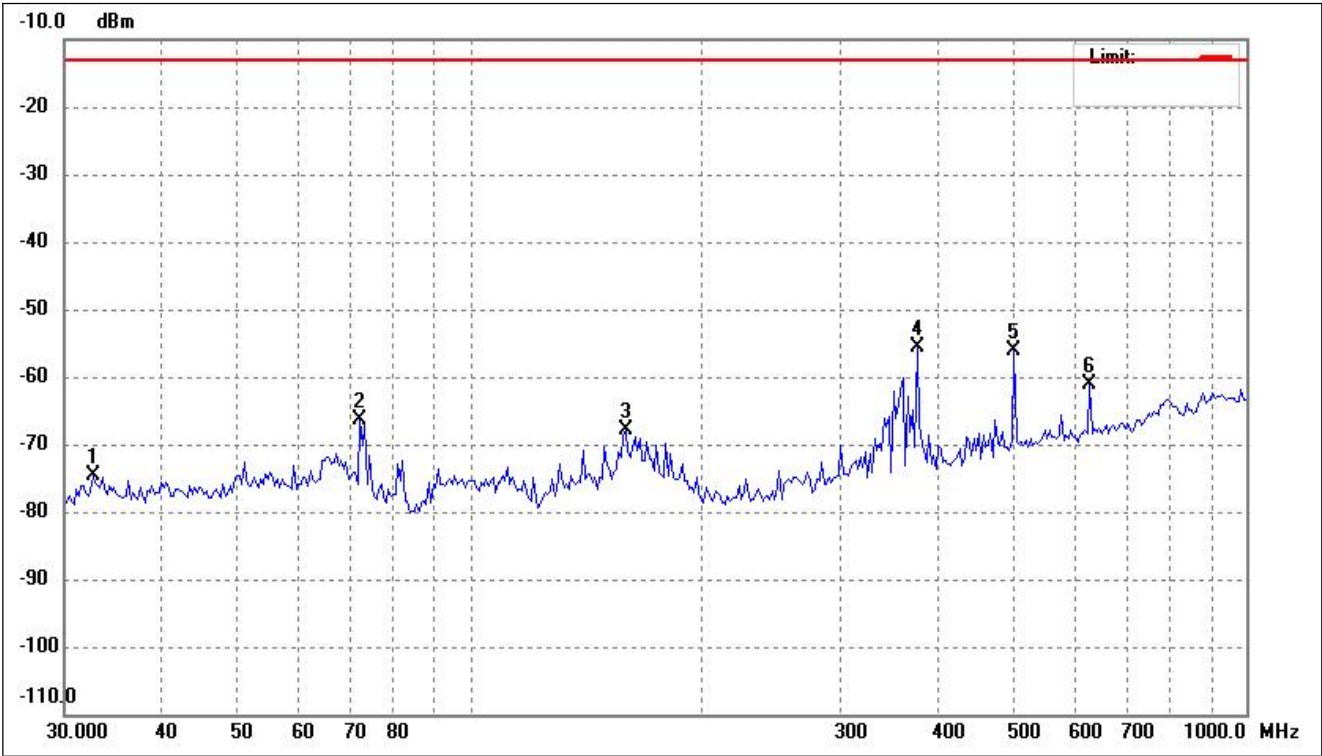


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	32.6395	-76.52	1.85	-74.67	-13.00	-61.67	ERP
2	72.2111	-68.91	2.50	-66.41	-13.00	-53.41	ERP
3	158.6399	-75.27	7.39	-67.88	-13.00	-54.88	ERP
4	376.5228	-60.51	4.89	-55.62	-13.00	-42.62	ERP
5	502.2473	-63.34	7.21	-56.13	-13.00	-43.13	ERP
6	628.8936	-70.36	9.19	-61.17	-13.00	-48.17	ERP

Test Mode	5G NR n77 (3450-3550MHz)	Polarity:	Horizontal
-----------	-----------------------------	-----------	------------

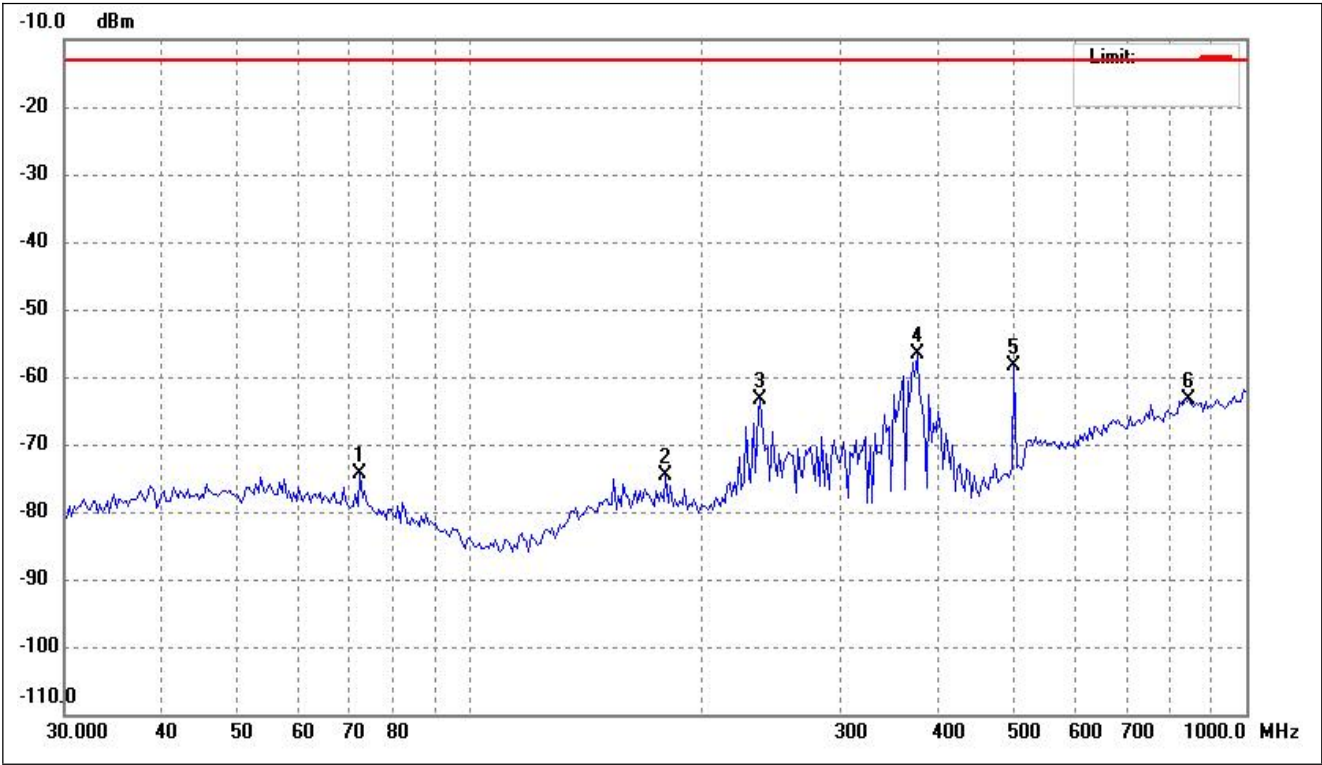


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-74.95	0.68	-74.27	-13.00	-61.27	ERP
2	178.7697	-75.60	0.98	-74.62	-13.00	-61.62	ERP
3	236.7928	-69.66	6.28	-63.38	-13.00	-50.38	ERP
4	376.5228	-61.14	4.58	-56.56	-13.00	-43.56	ERP
5	502.2473	-65.63	7.31	-58.32	-13.00	-45.32	ERP
6	844.8028	-76.96	13.63	-63.33	-13.00	-50.33	ERP

Test Mode	5G NR n77 (3450-3550MHz)	Polarity:	Vertical
-----------	-----------------------------	-----------	----------

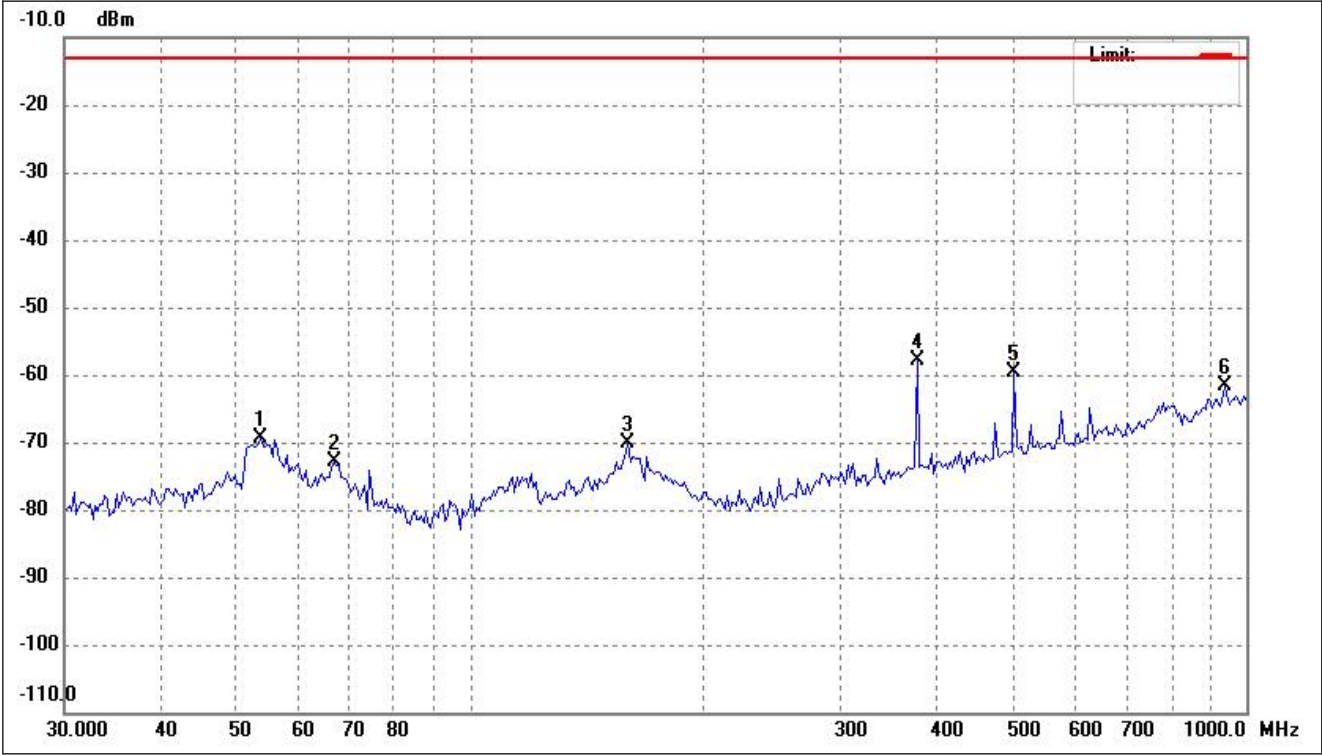


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.7559	-72.70	3.42	-69.28	-13.00	-56.28	ERP
2	66.8395	-76.04	3.15	-72.89	-13.00	-59.89	ERP
3	159.7586	-77.90	7.83	-70.07	-13.00	-57.07	ERP
4	376.5228	-62.69	4.89	-57.80	-13.00	-44.80	ERP
5	502.2473	-66.94	7.21	-59.73	-13.00	-46.73	ERP
6	938.7139	-74.08	12.54	-61.54	-13.00	-48.54	ERP

Test Mode	5G NR n77 (3700-3980MHz)	Polarity:	Horizontal
-----------	-----------------------------	-----------	------------

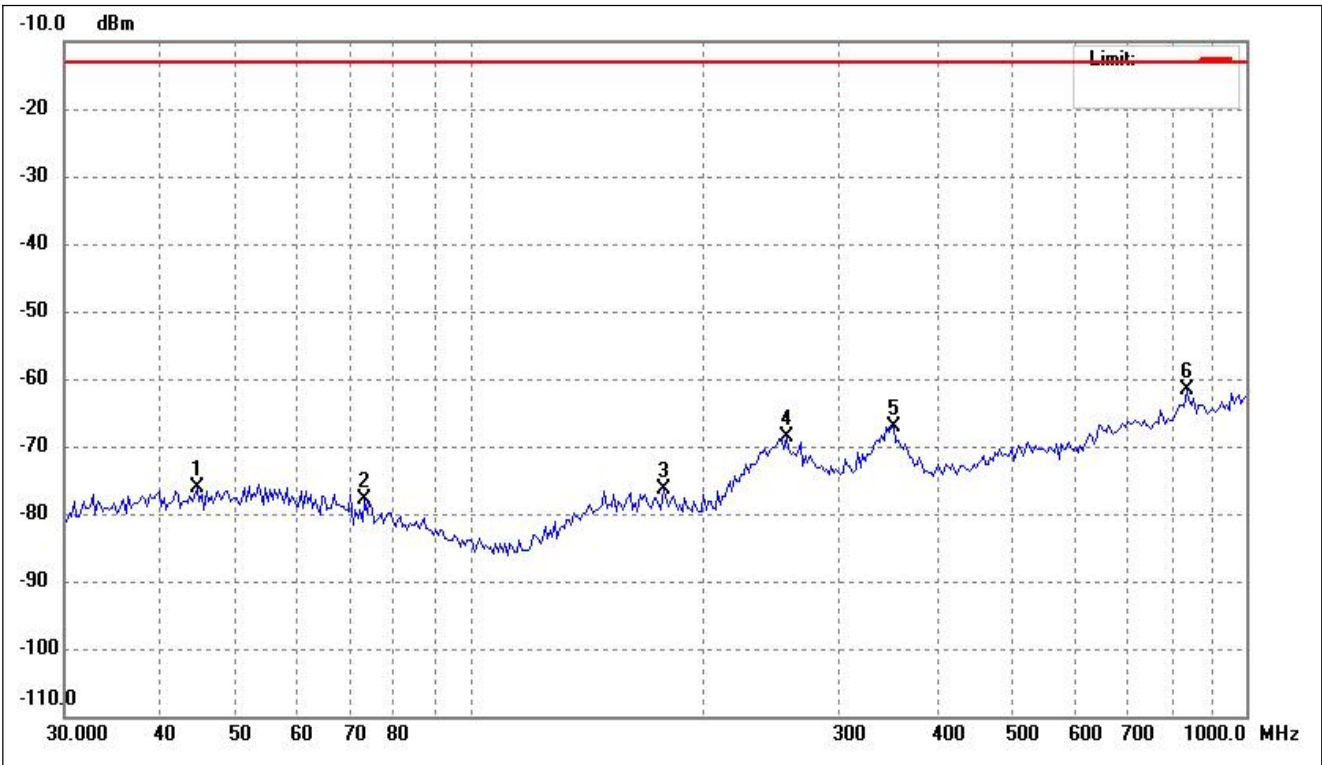


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.4657	-79.13	2.97	-76.16	-13.00	-63.16	ERP
2	73.2331	-78.41	0.50	-77.91	-13.00	-64.91	ERP
3	177.5179	-77.44	0.98	-76.46	-13.00	-63.46	ERP
4	255.8226	-76.62	8.07	-68.55	-13.00	-55.55	ERP
5	350.9722	-71.56	4.52	-67.04	-13.00	-54.04	ERP
6	838.8870	-75.23	13.50	-61.73	-13.00	-48.73	ERP

Test Mode	5G NR n77 (3700-3980MHz)	Polarity:	Vertical
-----------	-----------------------------	-----------	----------

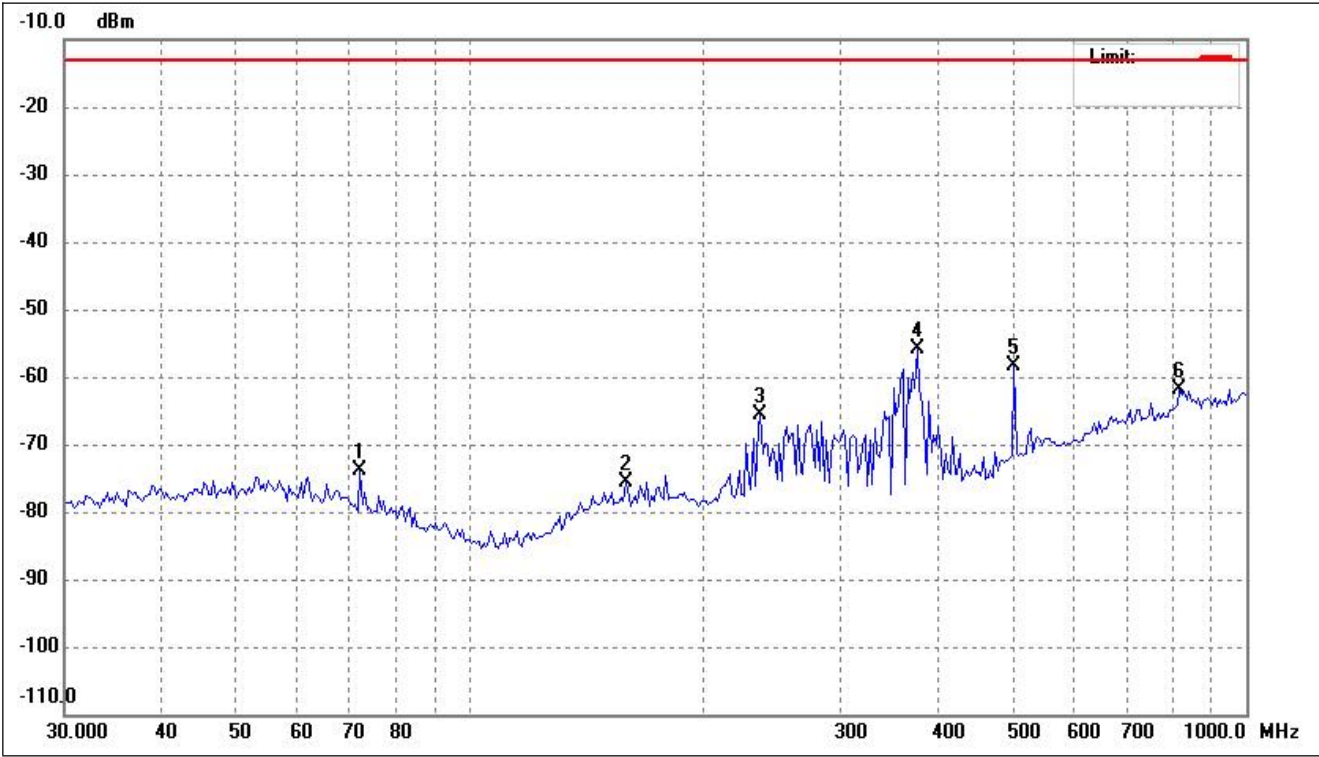


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	72.2111	-74.48	0.68	-73.80	-13.00	-60.80	ERP
2	158.6399	-76.50	0.97	-75.53	-13.00	-62.53	ERP
3	236.7928	-71.78	6.28	-65.50	-13.00	-52.50	ERP
4	376.5228	-60.54	4.58	-55.96	-13.00	-42.96	ERP
5	502.2473	-65.65	7.31	-58.34	-13.00	-45.34	ERP
6	821.3871	-74.77	12.97	-61.80	-13.00	-48.80	ERP

Test Mode	5G NR n78 (3450-3550MHz)	Polarity:	Horizontal
-----------	-----------------------------	-----------	------------

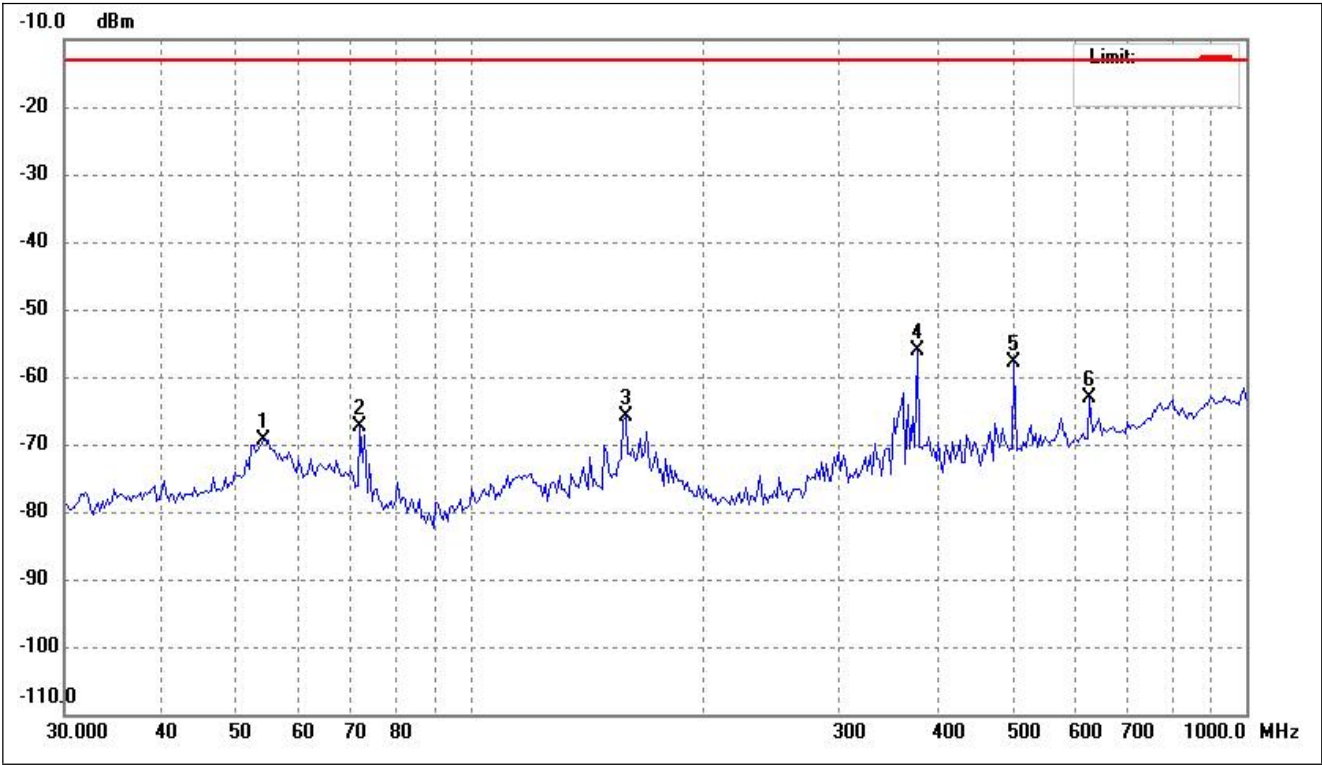


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	54.1349	-72.78	3.42	-69.36	-13.00	-56.36	ERP
2	72.2111	-69.81	2.50	-67.31	-13.00	-54.31	ERP
3	158.6399	-73.38	7.39	-65.99	-13.00	-52.99	ERP
4	376.5228	-60.92	4.89	-56.03	-13.00	-43.03	ERP
5	502.2473	-65.05	7.21	-57.84	-13.00	-44.84	ERP
6	628.8936	-72.19	9.19	-63.00	-13.00	-50.00	ERP

Test Mode	5G NR n78 (3450-3550MHz)	Polarity:	Vertical
-----------	-----------------------------	-----------	----------

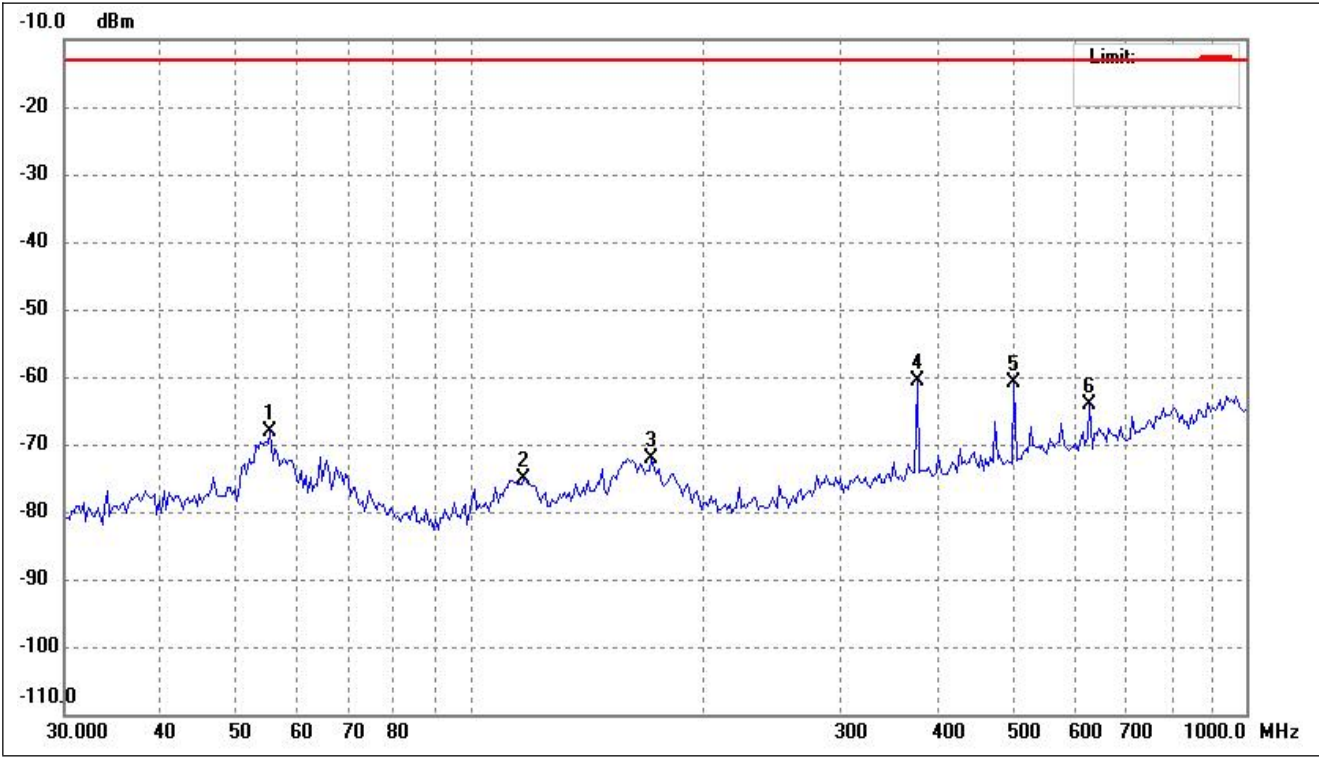


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.2883	-71.60	3.39	-68.21	-13.00	-55.21	ERP
2	117.2688	-74.66	-0.46	-75.12	-13.00	-62.12	ERP
3	171.3890	-77.99	5.93	-72.06	-13.00	-59.06	ERP
4	376.5228	-65.62	4.89	-60.73	-13.00	-47.73	ERP
5	502.2473	-68.03	7.21	-60.82	-13.00	-47.82	ERP
6	628.8936	-73.38	9.19	-64.19	-13.00	-51.19	ERP

Test Mode	5G NR n78 (3700-3800MHz)	Polarity:	Horizontal
-----------	-----------------------------	-----------	------------

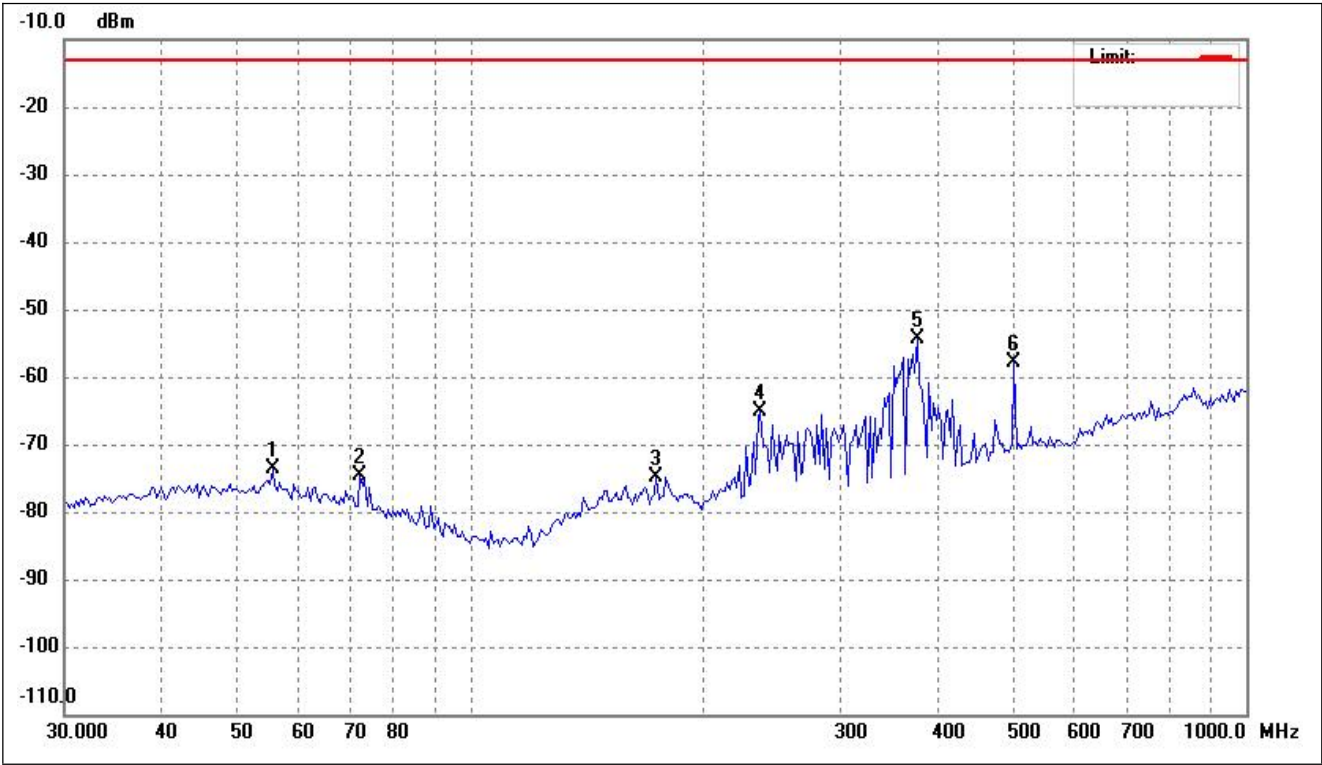

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.6782	-76.42	2.81	-73.61	-13.00	-60.61	ERP
2	72.2111	-75.23	0.68	-74.55	-13.00	-61.55	ERP
3	173.8147	-75.84	0.98	-74.86	-13.00	-61.86	ERP
4	236.7928	-71.33	6.28	-65.05	-13.00	-52.05	ERP
5	376.5228	-58.97	4.58	-54.39	-13.00	-41.39	ERP
6	502.2473	-65.06	7.31	-57.75	-13.00	-44.75	ERP

Test Mode	5G NR n78 (3700-3800MHz)	Polarity:	Vertical
-----------	-----------------------------	-----------	----------

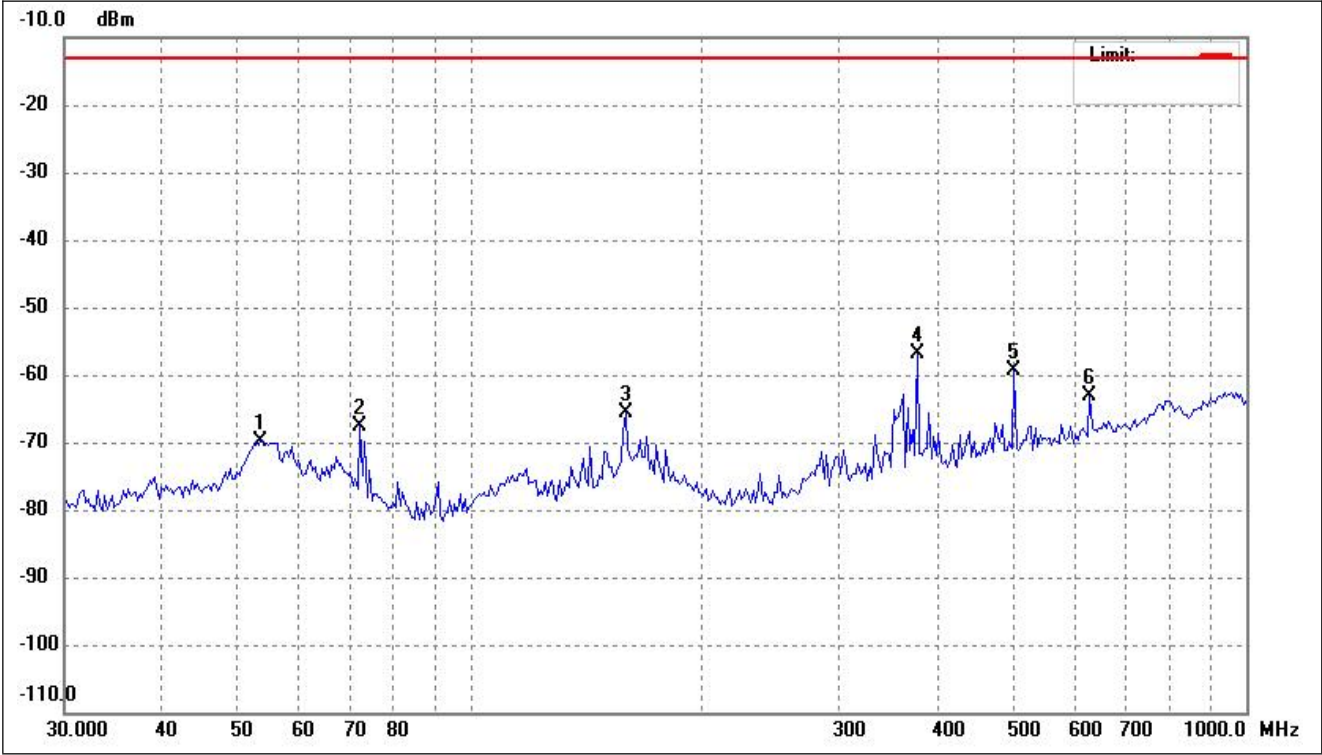

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.7559	-73.23	3.42	-69.81	-13.00	-56.81	ERP
2	72.2111	-70.22	2.50	-67.72	-13.00	-54.72	ERP
3	158.6399	-72.89	7.39	-65.50	-13.00	-52.50	ERP
4	376.5228	-61.82	4.89	-56.93	-13.00	-43.93	ERP
5	502.2473	-66.55	7.21	-59.34	-13.00	-46.34	ERP
6	628.8936	-72.26	9.19	-63.07	-13.00	-50.07	ERP

Note: Margin= (Reading+ Correct)- Limit

➤ Spurious Emissions Above 1GHz

➤ For FDD_n2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.5MHz)						
3705.00	-45.45	10.54	-34.91	-13	-21.91	H
5557.50	-52.73	13.37	-39.36	-13	-26.36	H
3705.00	-54.55	10.54	-44.01	-13	-31.01	V
5557.50	-44.55	13.37	-31.18	-13	-18.18	V
Middle Channel (1880.0MHz)						
3760.00	-55.45	10.64	-44.81	-13	-31.81	H
5640.00	-48.18	13.54	-34.64	-13	-21.64	H
3760.00	-47.27	10.64	-36.63	-13	-23.63	V
5640.00	-46.36	13.54	-32.82	-13	-19.82	V
High Channel (1907.5MHz)						
3815.00	-48.18	10.74	-37.44	-13	-24.44	H
5722.50	-52.73	13.71	-39.02	-13	-26.02	H
3815.00	-42.73	10.74	-31.99	-13	-18.99	V
5722.50	-50.00	13.71	-36.29	-13	-23.29	V

➤ For FDD_n5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.5MHz)						
1653.00	-42.73	5.78	-36.95	-13	-23.95	H
2479.50	-48.18	8.91	-39.27	-13	-26.27	H
1653.00	-54.55	5.78	-48.77	-13	-35.77	V
2479.50	-43.64	8.91	-34.73	-13	-21.73	V
Middle Channel (836.5MHz)						
1673.00	-48.18	5.11	-43.07	-13	-30.07	H
2509.50	-43.64	8.54	-35.10	-13	-22.10	H
1673.00	-50.91	5.11	-45.80	-13	-32.80	V
2509.50	-49.09	8.54	-40.55	-13	-27.55	V
High Channel (846.5MHz)						
1693.00	-51.82	5.25	-46.57	-13	-33.57	H
2539.50	-47.27	8.57	-38.70	-13	-25.70	H
1693.00	-49.09	5.25	-43.84	-13	-30.84	V
2539.50	-54.55	8.57	-45.98	-13	-32.98	V

➤ For FDD_n7 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (2502.5MHz)						
5005.0	-43.64	11.66	-31.98	-25	-6.98	H
7507.5	-48.18	15.09	-33.09	-25	-8.09	H
5005.0	-44.55	11.66	-32.89	-25	-7.89	V
7507.5	-53.64	15.09	-38.55	-25	-13.55	V
Middle Channel (2535MHz)						
5070.0	-46.36	11.78	-34.58	-25	-9.58	H
7605.0	-49.09	15.21	-33.88	-25	-8.88	H
5070.0	-53.64	11.78	-41.86	-25	-16.86	V
7605.0	-44.55	15.21	-29.34	-25	-4.34	V
High Channel (2567.5MHz)						
5135.0	-53.64	11.89	-41.75	-25	-16.75	H
7702.5	-50.00	15.32	-34.68	-25	-9.68	H
5135.0	-44.55	11.89	-32.66	-25	-7.66	V
7702.5	-55.45	15.32	-40.13	-25	-15.13	V

➤ For FDD_n12 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (701.5MHz)						
1403.00	-49.09	4.01	-45.08	-13	-32.08	H
2104.50	-45.45	7.32	-38.13	-13	-25.13	H
1403.00	-50.91	4.01	-46.90	-13	-33.90	V
2104.50	-55.45	7.32	-48.13	-13	-35.13	V
Middle Channel (707.5MHz)						
1415.00	-50.00	4.11	-45.89	-13	-32.89	H
2122.50	-47.27	7.54	-39.73	-13	-26.73	H
1415.00	-42.73	4.11	-38.62	-13	-25.62	V
2122.50	-53.64	7.54	-46.10	-13	-33.10	V
High Channel (713.5MHz)						
1427.00	-54.55	4.35	-50.20	-13	-37.20	H
2140.50	-53.64	7.88	-45.76	-13	-32.76	H
1427.00	-46.36	4.35	-42.01	-13	-29.01	V
2140.50	-50.91	7.88	-43.03	-13	-30.03	V

➤ For FDD_n13 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (779.5MHz)						
1559.00	-47.27	4.52	-42.75	-13	-29.75	H
2338.50	-43.64	7.96	-35.68	-13	-22.68	H
1559.00	-50.00	4.52	-45.48	-13	-32.48	V
2338.5	-44.55	7.96	-36.59	-13	-23.59	V
Middle Channel (782.0MHz)						
1564.00	-43.64	4.68	-38.96	-13	-25.96	H
2346.00	-43.64	8.02	-35.62	-13	-22.62	H
1564.00	-55.45	4.68	-50.77	-13	-37.77	V
2346.00	-52.73	8.05	-44.68	-13	-31.68	V
High Channel (784.5MHz)						
1569.00	-45.45	4.68	-40.77	-13	-27.77	H
2353.50	-46.36	4.85	-41.51	-13	-28.51	H
1569.00	-42.73	8.26	-34.47	-13	-21.47	V
2353.50	-46.36	4.85	-41.51	-13	-28.51	V

➤ For FDD_n25 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.5MHz)						
3705.00	-50.91	10.56	-40.35	-13	-27.35	H
5557.50	-53.64	13.38	-40.26	-13	-27.26	H
3705.00	-50.91	10.56	-40.35	-13	-27.35	V
5557.50	-54.55	13.38	-41.17	-13	-28.17	V
Middle Channel (1882.5MHz)						
3765.00	-51.82	10.64	-41.18	-13	-28.18	H
5647.50	-46.36	13.54	-32.82	-13	-19.82	H
3765.00	-45.45	10.64	-34.81	-13	-21.81	V
5647.50	-48.18	13.54	-34.64	-13	-21.64	V
High Channel (1912.5MHz)						
3825.00	-52.73	10.77	-41.96	-13	-28.96	H
5737.50	-53.64	13.75	-39.89	-13	-26.89	H
3825.00	-44.55	10.77	-33.78	-13	-20.78	V
5737.50	-47.27	13.75	-33.52	-13	-20.52	V

➤ For FDD_n26 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.7MHz)						
1649.40	-47.27	4.94	-42.33	-13	-29.33	H
2474.10	-49.09	8.46	-40.63	-13	-27.63	H
1649.40	-46.36	4.94	-41.42	-13	-28.42	V
2474.10	-53.64	8.46	-45.18	-13	-32.18	V
Middle Channel (836.5MHz)						
1673.00	-50.91	5.11	-45.80	-13	-32.80	H
2509.50	-53.64	8.54	-45.10	-13	-32.10	H
1673.00	-54.55	5.11	-49.44	-13	-36.44	V
2509.50	-51.82	8.54	-43.28	-13	-30.28	V
High Channel (848.3MHz)						
1696.60	-47.27	5.25	-42.02	-13	-29.02	H
2544.90	-51.82	8.57	-43.25	-13	-30.25	H
1696.60	-48.18	5.25	-42.93	-13	-29.93	V
2544.90	-50.00	8.57	-41.43	-13	-28.43	V

➤ For FDD_n30 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (2307.5 MHz)						
4615.00	-59.73	11.74	-47.99	-40	-7.99	H
6922.50	-58.55	12.57	-45.98	-40	-5.98	H
4615.00	-59.62	11.74	-47.88	-40	-7.88	V
6922.50	-58.36	12.57	-45.79	-40	-5.79	V
Middle Channel (2310.0MHz)						
4620.00	-59.91	11.76	-48.15	-40	-8.15	H
6930.50	-58.27	12.59	-45.68	-40	-5.68	H
4620.00	-59.65	11.76	-47.89	-40	-7.89	V
6930.50	-58.34	12.59	-45.75	-40	-5.75	V
High Channel (2312.5MHz)						
4625.00	-59.73	11.81	-47.92	-40	-7.92	H
6937.50	-58.64	12.62	-46.02	-40	-6.02	H
4625.00	-59.09	11.81	-47.28	-40	-7.28	V
6937.50	-58.11	12.62	-45.49	-40	-5.49	V

➤ For TDD_n38 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (2580MHz)						
5160.00	-47.27	12.53	-34.74	-25	-9.74	H
7740.00	-50.91	15.76	-35.15	-25	-10.15	H
5160.00	-43.64	12.53	-31.11	-25	-6.11	V
7740.00	-54.55	15.76	-38.79	-25	-13.79	V
Middle Channel (2595.0MHz)						
5190.00	-51.82	12.32	-39.50	-25	-14.50	H
7785.00	-50.91	15.98	-34.93	-25	-9.93	H
5190.00	-45.45	12.62	-32.83	-25	-7.83	V
7785.00	-51.82	15.98	-35.84	-25	-10.84	V
High Channel (2610.0MHz)						
5220.00	-42.73	13.24	-29.49	-25	-4.49	H
7830.00	-43.64	16.87	-26.77	-25	-1.77	H
5220.00	-54.55	13.24	-41.31	-25	-16.31	V
7830.00	-46.36	16.87	-29.49	-25	-4.49	V

➤ For TDD_n41 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (2506.0MHz)						
5012.0	-48.18	10.54	-37.64	-25	-12.64	H
7518.0	-55.45	14.21	-41.24	-25	-16.24	H
5012.0	-49.09	10.54	-38.55	-25	-13.55	V
7518.0	-43.64	14.21	-29.43	-25	-4.43	V
Middle Channel (2593.0MHz)						
5186.0	-52.73	11.65	-41.08	-25	-16.08	H
7779.0	-53.64	16.78	-36.86	-25	-11.86	H
5186.0	-42.73	11.65	-31.08	-25	-6.08	V
7779.0	-54.55	16.79	-37.76	-25	-12.76	V
High Channel (2680.0MHz)						
5360.0	-47.27	13.72	-33.55	-25	-8.55	H
8040.0	-48.18	17.35	-30.83	-25	-5.83	H
5360.0	-42.73	13.72	-29.01	-25	-4.01	V
8040.0	-45.45	18.35	-27.10	-25	-2.10	V

➤ For FDD_n71 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (665.5MHz)						
1331.00	-46.36	4.01	-42.35	-13	-29.35	H
1996.50	-55.45	7.42	-48.03	-13	-35.03	H
1331.00	-52.73	4.01	-48.72	-13	-35.72	V
1996.50	-43.64	7.42	-36.22	-13	-23.22	V
Middle Channel (680.5MHz)						
1361.00	-46.36	4.48	-41.88	-13	-28.88	H
2041.50	-42.73	7.93	-34.80	-13	-21.80	H
1361.00	-44.55	4.48	-40.07	-13	-27.07	V
2041.50	-42.73	7.93	-34.80	-13	-21.80	V
High Channel (695.5MHz)						
1391.00	-45.45	5.05	-40.40	-13	-27.40	H
2086.50	-53.64	8.69	-44.95	-13	-31.95	H
1391.00	-51.82	5.05	-46.77	-13	-33.77	V
2086.50	-45.45	8.69	-36.76	-13	-23.76	V

➤ For TDD_n77(3450-3550MHz) Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (3456.0MHz)						
6910.00	-54.55	15.42	-39.13	-13	-26.13	H
10365.00	-50.91	19.78	-31.13	-13	-18.13	H
6910.00	-51.82	15.42	-36.40	-13	-23.40	V
10365.00	-50.00	19.78	-30.22	-13	-17.22	V
Middle Channel (3500.0MHz)						
7000.00	-44.55	16.53	-28.02	-13	-15.02	H
10500.00	-54.55	20.15	-34.40	-13	-21.40	H
7000.00	-46.36	16.53	-29.83	-13	-16.83	V
10500.00	-45.45	20.15	-25.30	-13	-12.30	V
High Channel (3540MHz)						
7080.00	-42.73	17.15	-25.58	-13	-12.58	H
10620.00	-42.73	21.62	-21.11	-13	-8.11	H
7080.00	-43.64	17.15	-26.49	-13	-13.49	V
10620.00	-46.36	21.62	-24.74	-13	-11.74	V

➤ For TDD_n77(3700-3980MHz) Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (3710.01MHz)						
7420.00	-54.55	21.59	-32.96	-13	-19.96	H
11130.00	-42.73	24.93	-17.80	-13	-4.80	H
7420.00	-51.82	21.59	-30.23	-13	-17.23	V
11130.00	-50.91	24.93	-25.98	-13	-12.98	V
Middle Channel (3840MHz)						
7680.00	-49.09	22.64	-26.45	-13	-13.45	H
11520.00	-43.64	25.98	-17.66	-13	-4.66	H
7680.00	-50.91	22.64	-28.27	-13	-15.27	V
11520.00	-44.55	25.98	-18.57	-13	-5.57	V
High Channel (3970MHz)						
7940.00	-44.55	23.05	-21.50	-13	-8.50	H
11910.00	-51.82	26.84	-24.98	-13	-11.98	H
7940.00	-50.91	23.05	-27.86	-13	-14.86	V
11910.00	-53.64	26.84	-26.80	-13	-13.80	V

➤ For TDD_n78(3450-3550MHz) Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (3460MHz)						
7420.00	-42.73	19.24	-23.49	-13	-10.49	H
11130.00	-51.82	21.47	-30.35	-13	-17.35	H
7420.00	-42.73	19.24	-23.49	-13	-10.49	V
11130.00	-47.27	21.47	-25.80	-13	-12.80	V
Middle Channel (3500MHz)						
7680.00	-55.45	19.51	-35.94	-13	-22.94	H
11520.00	-53.64	21.78	-31.86	-13	-18.86	H
7680.00	-42.73	19.51	-23.22	-13	-10.22	V
11520.00	-50.00	21.78	-28.22	-13	-15.22	V
High Channel (3540MHz)						
7940.00	-49.09	19.75	-29.34	-13	-16.34	H
11910.00	-48.18	22.24	-25.94	-13	-12.94	H
7940.00	-55.45	19.75	-35.70	-13	-22.70	V
11910.00	-50.00	22.24	-27.76	-13	-14.76	V

➤ For TDD_n78(3700-3800MHz) Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (3705.00MHz)						
7410.00	-45.45	21.59	-23.86	-13	-10.86	H
11115.00	-46.36	24.93	-21.43	-13	-8.43	H
7410.00	-45.45	21.59	-23.86	-13	-10.86	V
11115.00	-50.00	24.93	-25.07	-13	-12.07	V
Middle Channel (3750.00MHz)						
7500.00	-54.55	22.64	-31.91	-13	-18.91	H
11250.00	-50.91	25.98	-24.93	-13	-11.93	H
7500.00	-53.64	22.64	-31.00	-13	-18.00	V
11250.00	-43.64	25.98	-17.66	-13	-4.66	V
High Channel (3795.00MHz)						
7590.00	-46.36	23.05	-23.31	-13	-10.31	H
11385.00	-55.45	26.84	-28.61	-13	-15.61	H
7590.00	-47.27	23.05	-24.22	-13	-11.22	V
11385.00	-44.55	26.84	-17.71	-13	-4.71	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355 , §27.54 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Please refer to Appendix F: Frequency Stability

Test result: Pass

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****