

Appendix for N26(824-849MHz)

Product Name: 5G Window CPE

Model No: TITAN 5100

Appendix A: Average Power Output Data

Test Result

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N26-824-849	15	5	DFT-QPSK	L	Outer_Full	22.69	PC3	PASS
N26-824-849	15	5	DFT-QPSK	L	Inner_Full	22.74	PC3	PASS
N26-824-849	15	5	DFT-QPSK	L	Edge_1RB_Left	22.75	PC3	PASS
N26-824-849	15	5	DFT-QPSK	L	Edge_1RB_Right	22.54	PC3	PASS
N26-824-849	15	5	DFT-16QAM	L	Outer_Full	21.74	PC3	PASS
N26-824-849	15	5	DFT-16QAM	L	Inner_Full	22.61	PC3	PASS
N26-824-849	15	5	DFT-16QAM	L	Edge_1RB_Left	21.44	PC3	PASS
N26-824-849	15	5	DFT-16QAM	L	Edge_1RB_Right	21.09	PC3	PASS
N26-824-849	15	5	DFT-QPSK	M	Outer_Full	22.96	PC3	PASS
N26-824-849	15	5	DFT-QPSK	M	Inner_Full	22.88	PC3	PASS
N26-824-849	15	5	DFT-QPSK	M	Edge_1RB_Left	22.93	PC3	PASS
N26-824-849	15	5	DFT-QPSK	M	Edge_1RB_Right	22.93	PC3	PASS
N26-824-849	15	5	DFT-16QAM	M	Outer_Full	21.83	PC3	PASS
N26-824-849	15	5	DFT-16QAM	M	Inner_Full	23.09	PC3	PASS
N26-824-849	15	5	DFT-16QAM	M	Edge_1RB_Left	22.26	PC3	PASS
N26-824-849	15	5	DFT-16QAM	M	Edge_1RB_Right	21.93	PC3	PASS
N26-824-849	15	5	DFT-QPSK	H	Outer_Full	22.95	PC3	PASS
N26-824-849	15	5	DFT-QPSK	H	Inner_Full	22.93	PC3	PASS

849								
N26-824-849	15	5	DFT-QPSK	H	Edge_1RB_Left	23.08	PC3	PASS
N26-824-849	15	5	DFT-QPSK	H	Edge_1RB_Right	23.14	PC3	PASS
N26-824-849	15	5	DFT-16QAM	H	Outer_Full	21.93	PC3	PASS
N26-824-849	15	5	DFT-16QAM	H	Inner_Full	23.01	PC3	PASS
N26-824-849	15	5	DFT-16QAM	H	Edge_1RB_Left	22.46	PC3	PASS
N26-824-849	15	5	DFT-16QAM	H	Edge_1RB_Right	21.82	PC3	PASS
N26-824-849	15	10	DFT-QPSK	L	Outer_Full	22.91	PC3	PASS
N26-824-849	15	10	DFT-QPSK	L	Inner_Full	22.89	PC3	PASS
N26-824-849	15	10	DFT-QPSK	L	Edge_1RB_Left	22.36	PC3	PASS
N26-824-849	15	10	DFT-QPSK	L	Edge_1RB_Right	22.63	PC3	PASS
N26-824-849	15	10	DFT-16QAM	L	Outer_Full	21.91	PC3	PASS
N26-824-849	15	10	DFT-16QAM	L	Inner_Full	22.84	PC3	PASS
N26-824-849	15	10	DFT-16QAM	L	Edge_1RB_Left	21.54	PC3	PASS
N26-824-849	15	10	DFT-16QAM	L	Edge_1RB_Right	21.41	PC3	PASS
N26-824-849	15	10	DFT-QPSK	M	Outer_Full	22.92	PC3	PASS
N26-824-849	15	10	DFT-QPSK	M	Inner_Full	22.99	PC3	PASS
N26-824-849	15	10	DFT-QPSK	M	Edge_1RB_Left	23.14	PC3	PASS
N26-824-849	15	10	DFT-QPSK	M	Edge_1RB_Right	22.87	PC3	PASS
N26-824-849	15	10	DFT-16QAM	M	Outer_Full	22.02	PC3	PASS
N26-824-849	15	10	DFT-16QAM	M	Inner_Full	22.94	PC3	PASS
N26-824-849	15	10	DFT-16QAM	M	Edge_1RB_Left	21.57	PC3	PASS

849								
N26-824-849	15	10	DFT-16QAM	M	Edge_1RB_Right	21.67	PC3	PASS
N26-824-849	15	10	DFT-QPSK	H	Outer_Full	23.08	PC3	PASS
N26-824-849	15	10	DFT-QPSK	H	Inner_Full	23.09	PC3	PASS
N26-824-849	15	10	DFT-QPSK	H	Edge_1RB_Left	23.35	PC3	PASS
N26-824-849	15	10	DFT-QPSK	H	Edge_1RB_Right	23.16	PC3	PASS
N26-824-849	15	10	DFT-16QAM	H	Outer_Full	22.14	PC3	PASS
N26-824-849	15	10	DFT-16QAM	H	Inner_Full	23.03	PC3	PASS
N26-824-849	15	10	DFT-16QAM	H	Edge_1RB_Left	22.14	PC3	PASS
N26-824-849	15	10	DFT-16QAM	H	Edge_1RB_Right	21.58	PC3	PASS
N26-824-849	15	15	DFT-QPSK	L	Outer_Full	23.06	PC3	PASS
N26-824-849	15	15	DFT-QPSK	L	Inner_Full	23.02	PC3	PASS
N26-824-849	15	15	DFT-QPSK	L	Edge_1RB_Left	23.03	PC3	PASS
N26-824-849	15	15	DFT-QPSK	L	Edge_1RB_Right	23.12	PC3	PASS
N26-824-849	15	15	DFT-16QAM	L	Outer_Full	22.03	PC3	PASS
N26-824-849	15	15	DFT-16QAM	L	Inner_Full	23.08	PC3	PASS
N26-824-849	15	15	DFT-16QAM	L	Edge_1RB_Left	21.63	PC3	PASS
N26-824-849	15	15	DFT-16QAM	L	Edge_1RB_Right	22.34	PC3	PASS
N26-824-849	15	15	DFT-QPSK	M	Outer_Full	23.01	PC3	PASS
N26-824-849	15	15	DFT-QPSK	M	Inner_Full	23.02	PC3	PASS
N26-824-849	15	15	DFT-QPSK	M	Edge_1RB_Left	22.99	PC3	PASS
N26-824-849	15	15	DFT-QPSK	M	Edge_1RB_Right	23.21	PC3	PASS

849								
N26-824-849	15	15	DFT-16QAM	M	Outer_Full	22.06	PC3	PASS
N26-824-849	15	15	DFT-16QAM	M	Inner_Full	23.03	PC3	PASS
N26-824-849	15	15	DFT-16QAM	M	Edge_1RB_Left	21.55	PC3	PASS
N26-824-849	15	15	DFT-16QAM	M	Edge_1RB_Right	22.31	PC3	PASS
N26-824-849	15	15	DFT-QPSK	H	Outer_Full	23.19	PC3	PASS
N26-824-849	15	15	DFT-QPSK	H	Inner_Full	23.27	PC3	PASS
N26-824-849	15	15	DFT-QPSK	H	Edge_1RB_Left	22.97	PC3	PASS
N26-824-849	15	15	DFT-QPSK	H	Edge_1RB_Right	23.19	PC3	PASS
N26-824-849	15	15	DFT-16QAM	H	Outer_Full	22.22	PC3	PASS
N26-824-849	15	15	DFT-16QAM	H	Inner_Full	23.22	PC3	PASS
N26-824-849	15	15	DFT-16QAM	H	Edge_1RB_Left	22.62	PC3	PASS
N26-824-849	15	15	DFT-16QAM	H	Edge_1RB_Right	21.91	PC3	PASS
N26-824-849	15	20	DFT-QPSK	L	Outer_Full	23.11	PC3	PASS
N26-824-849	15	20	DFT-QPSK	L	Inner_Full	23.02	PC3	PASS
N26-824-849	15	20	DFT-QPSK	L	Edge_1RB_Left	22.79	PC3	PASS
N26-824-849	15	20	DFT-QPSK	L	Edge_1RB_Right	23.05	PC3	PASS
N26-824-849	15	20	DFT-16QAM	L	Outer_Full	21.98	PC3	PASS
N26-824-849	15	20	DFT-16QAM	L	Inner_Full	23.12	PC3	PASS
N26-824-849	15	20	DFT-16QAM	L	Edge_1RB_Left	22.12	PC3	PASS
N26-824-849	15	20	DFT-16QAM	L	Edge_1RB_Right	21.80	PC3	PASS
N26-824-	15	20	DFT-QPSK	M	Outer_Full	23.02	PC3	PASS

849								
N26-824-849	15	20	DFT-QPSK	M	Inner_Full	23.04	PC3	PASS
N26-824-849	15	20	DFT-QPSK	M	Edge_1RB_Left	22.79	PC3	PASS
N26-824-849	15	20	DFT-QPSK	M	Edge_1RB_Right	22.80	PC3	PASS
N26-824-849	15	20	DFT-16QAM	M	Outer_Full	22.07	PC3	PASS
N26-824-849	15	20	DFT-16QAM	M	Inner_Full	23.00	PC3	PASS
N26-824-849	15	20	DFT-16QAM	M	Edge_1RB_Left	22.07	PC3	PASS
N26-824-849	15	20	DFT-16QAM	M	Edge_1RB_Right	21.97	PC3	PASS
N26-824-849	15	20	DFT-QPSK	H	Outer_Full	23.04	PC3	PASS
N26-824-849	15	20	DFT-QPSK	H	Inner_Full	23.04	PC3	PASS
N26-824-849	15	20	DFT-QPSK	H	Edge_1RB_Left	22.93	PC3	PASS
N26-824-849	15	20	DFT-QPSK	H	Edge_1RB_Right	22.95	PC3	PASS
N26-824-849	15	20	DFT-16QAM	H	Outer_Full	22.02	PC3	PASS
N26-824-849	15	20	DFT-16QAM	H	Inner_Full	23.09	PC3	PASS
N26-824-849	15	20	DFT-16QAM	H	Edge_1RB_Left	22.10	PC3	PASS
N26-824-849	15	20	DFT-16QAM	H	Edge_1RB_Right	21.90	PC3	PASS


Appendix B: Peak-to-Average Ratio for SA


Peak-to-Average Ratio(PAPR)


Test Result


Band	SCS	Bandwidth	Modulation	Channel	RB Config	DutyCycle	Factor	Result	Limit	Verdict
N26-824-849	15	5	DFT-QPSK	L	Outer_Full	100%	0.00	6.04	≤13	PASS
N26-824-849	15	5	DFT-16QAM	L	Outer_Full	100%	0.00	6.87	≤13	PASS
N26-824-849	15	5	DFT-QPSK	M	Outer_Full	100%	0.00	6.20	≤13	PASS
N26-824-849	15	5	DFT-16QAM	M	Outer_Full	100%	0.00	6.84	≤13	PASS
N26-824-849	15	5	DFT-QPSK	H	Outer_Full	100%	0.00	6.23	≤13	PASS
N26-824-849	15	5	DFT-16QAM	H	Outer_Full	100%	0.00	6.92	≤13	PASS
N26-824-849	15	10	DFT-QPSK	L	Outer_Full	100%	0.00	6.98	≤13	PASS
N26-824-849	15	10	DFT-16QAM	L	Outer_Full	100%	0.00	7.32	≤13	PASS
N26-824-849	15	10	DFT-QPSK	M	Outer_Full	100%	0.00	6.98	≤13	PASS
N26-824-849	15	10	DFT-16QAM	M	Outer_Full	100%	0.00	7.31	≤13	PASS
N26-824-849	15	10	DFT-QPSK	H	Outer_Full	100%	0.00	6.98	≤13	PASS
N26-824-849	15	10	DFT-16QAM	H	Outer_Full	100%	0.00	7.40	≤13	PASS
N26-824-849	15	15	DFT-QPSK	L	Outer_Full	100%	0.00	7.39	≤13	PASS
N26-824-849	15	15	DFT-16QAM	L	Outer_Full	100%	0.00	7.62	≤13	PASS
N26-824-849	15	15	DFT-QPSK	M	Outer_Full	100%	0.00	7.37	≤13	PASS
N26-824-849	15	15	DFT-16QAM	M	Outer_Full	100%	0.00	7.59	≤13	PASS
N26-824-849	15	15	DFT-QPSK	H	Outer_Full	100%	0.00	7.39	≤13	PASS
N26-824-849	15	15	DFT-16QAM	H	Outer_Full	100%	0.00	7.54	≤13	PASS
N26-824-849	15	20	DFT-QPSK	L	Outer_Full	100%	0.00	7.59	≤13	PASS
N26-824-849	15	20	DFT-16QAM	L	Outer_Full	100%	0.00	7.63	≤13	PASS
N26-824-849	15	20	DFT-QPSK	M	Outer_Full	100%	0.00	7.53	≤13	PASS
N26-824-849	15	20	DFT-16QAM	M	Outer_Full	100%	0.00	7.68	≤13	PASS
N26-824-849	15	20	DFT-QPSK	H	Outer_Full	100%	0.00	7.48	≤13	PASS
N26-824-849	15	20	DFT-16QAM	H	Outer_Full	100%	0.00	7.71	≤13	PASS

Test Graphs

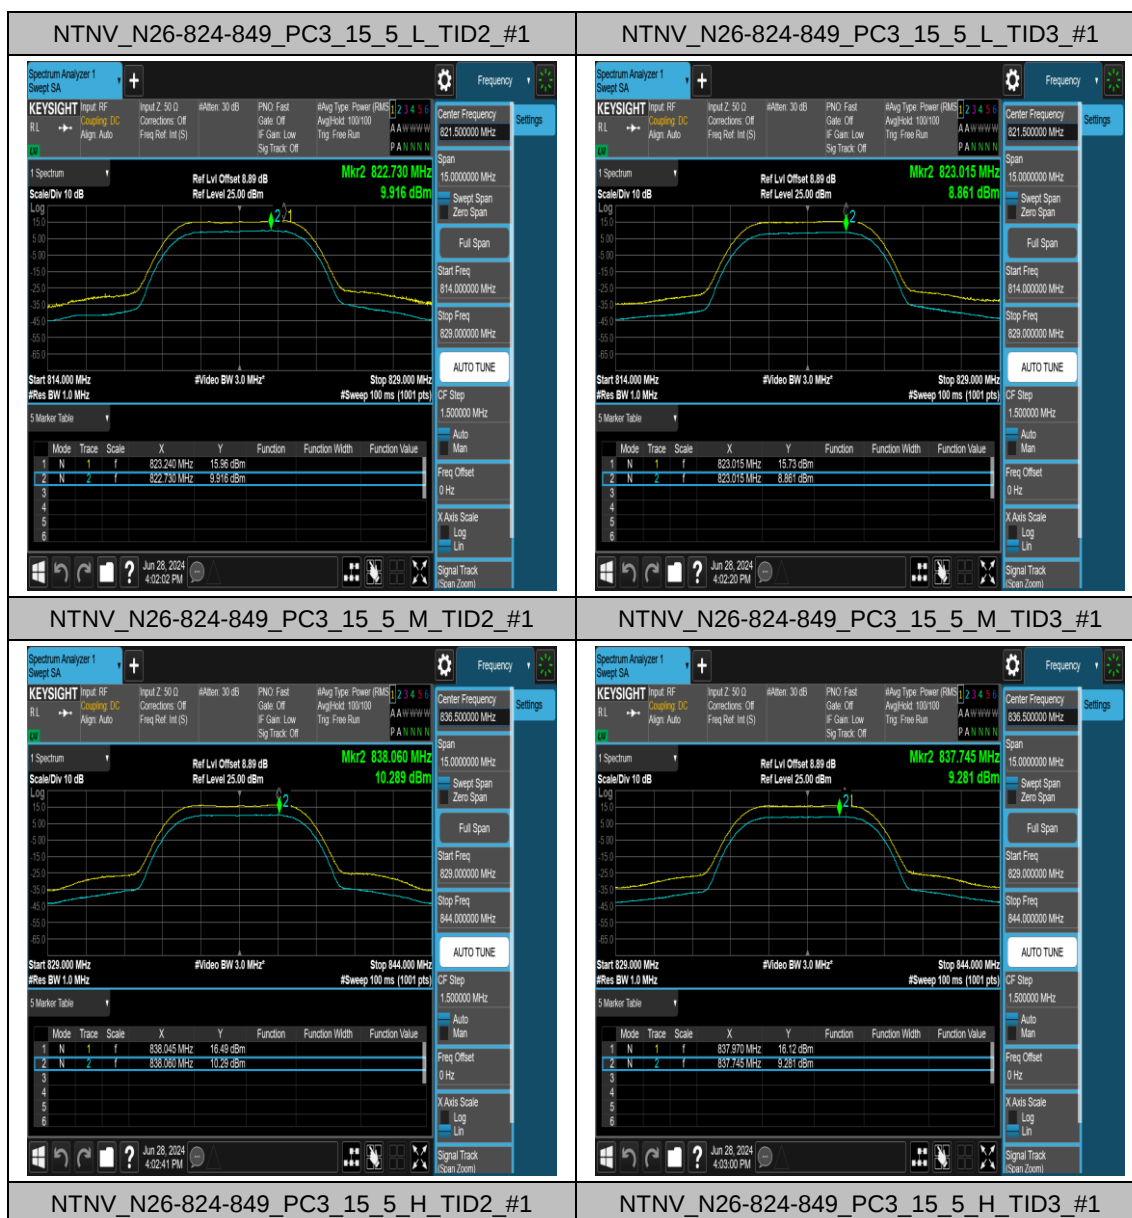

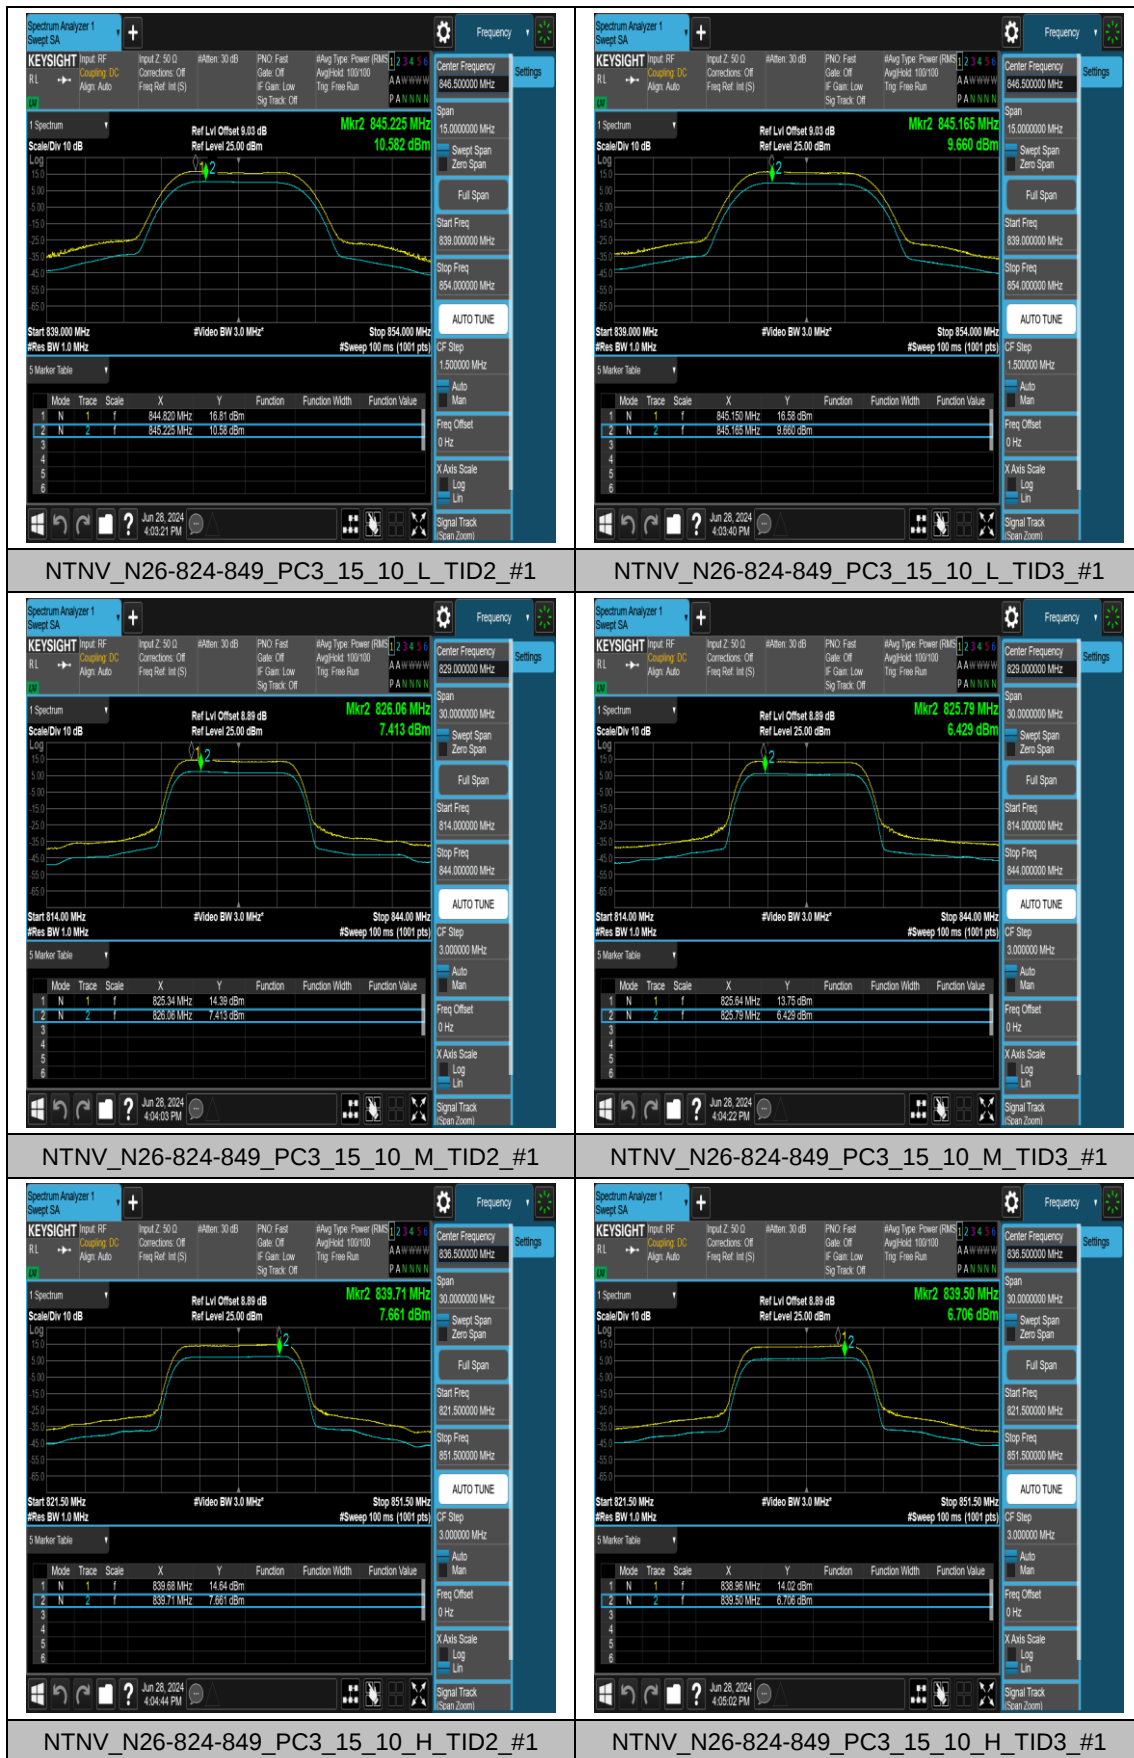

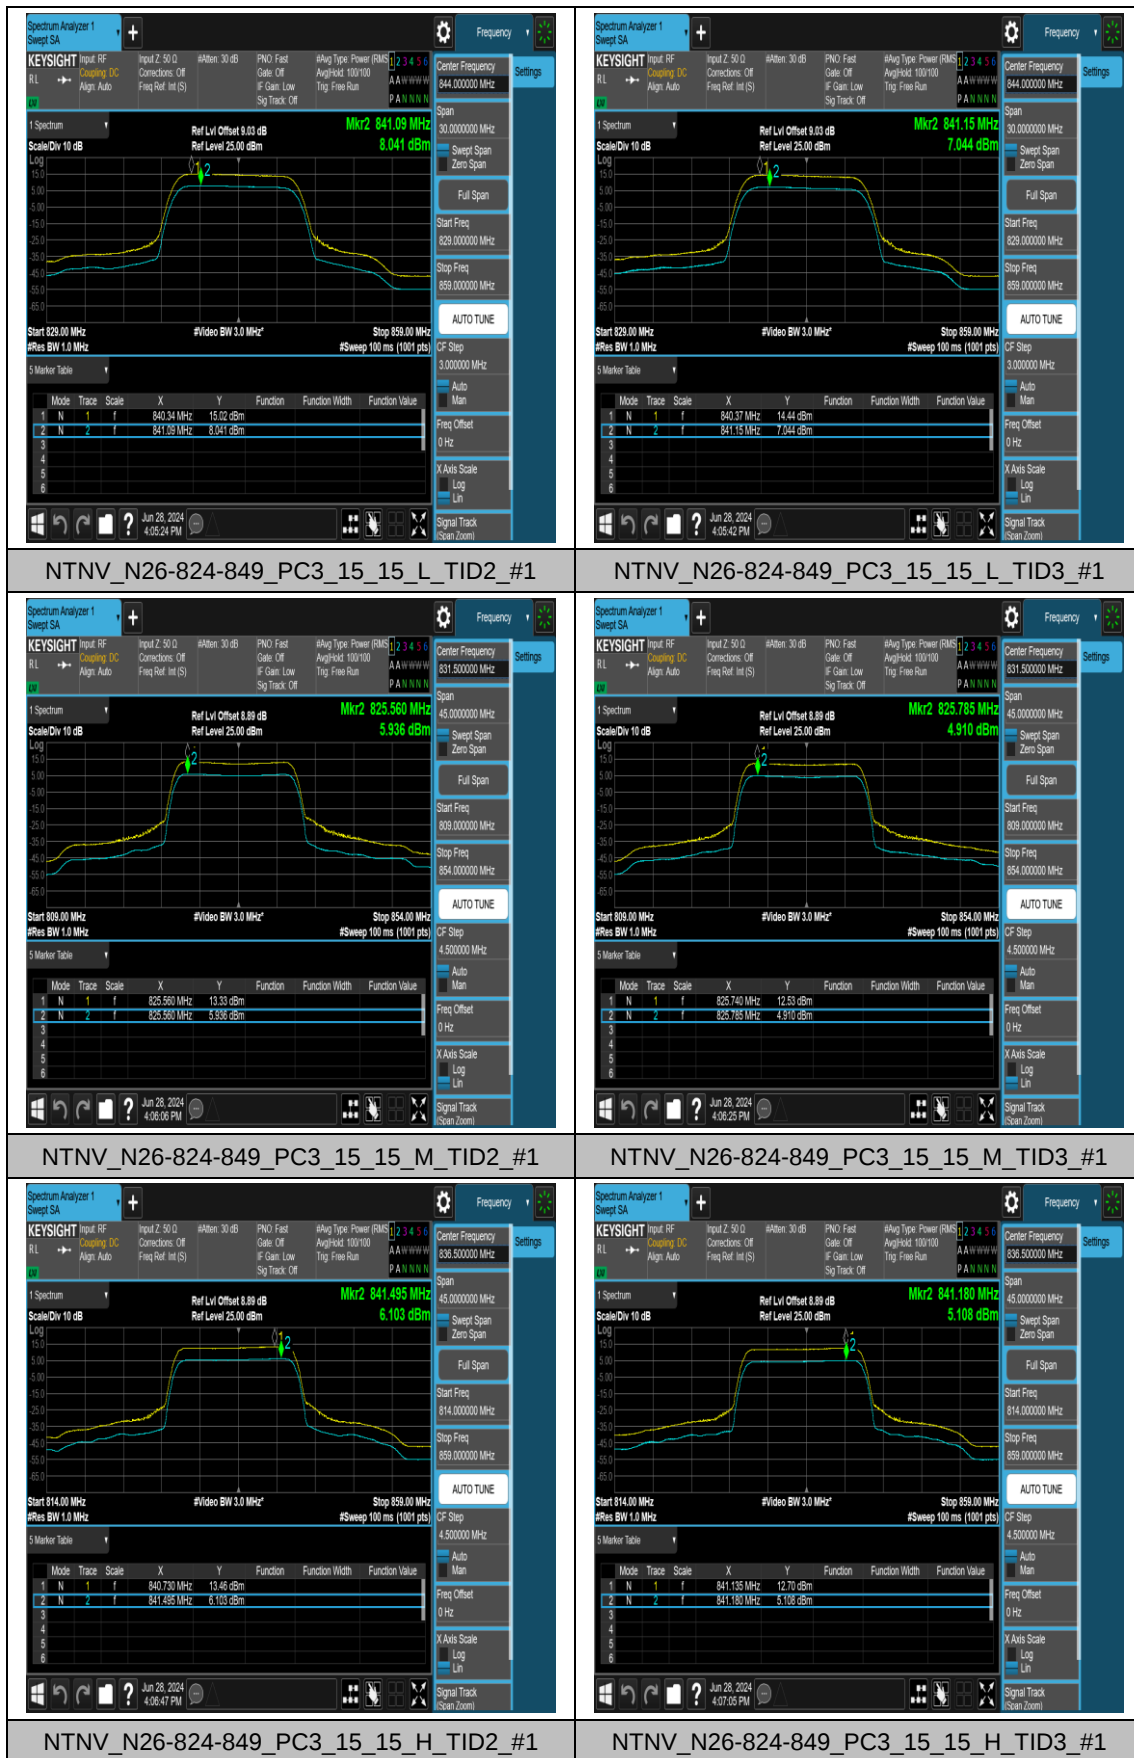

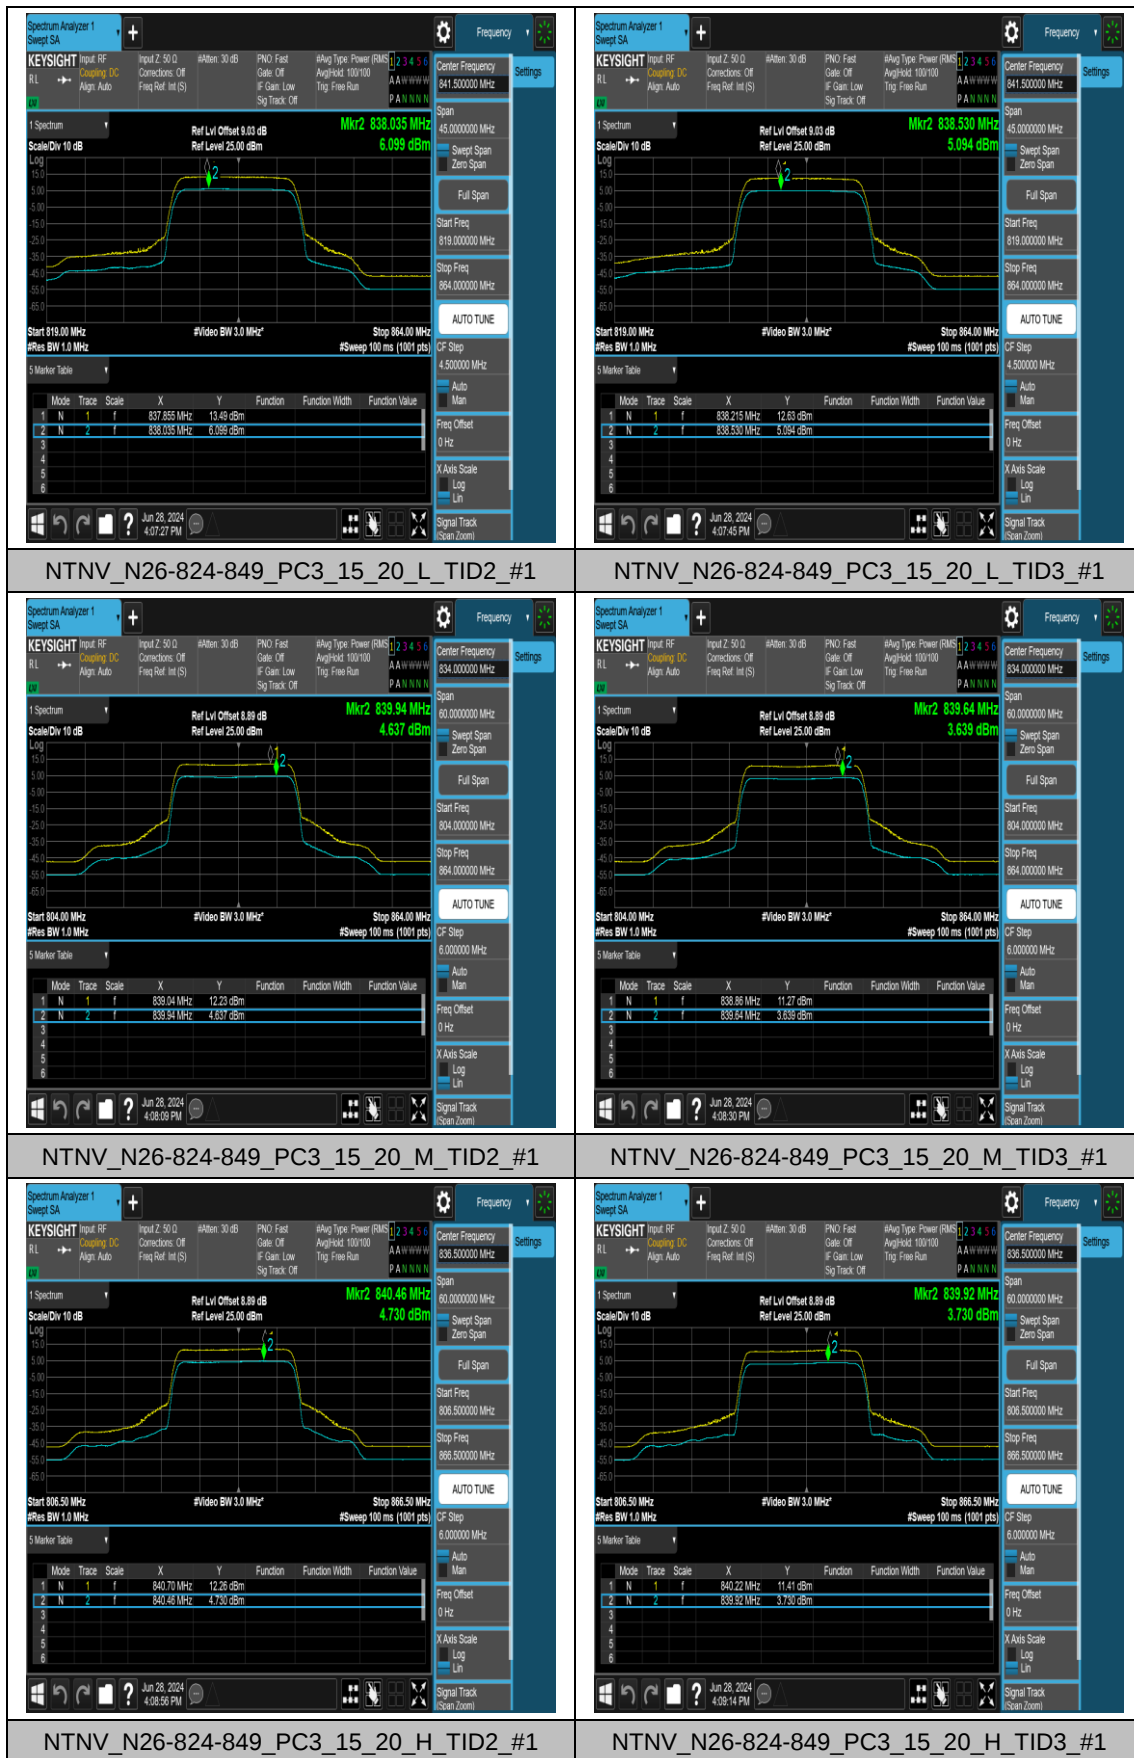




Appendix C: 26dB Bandwidth and Occupied Bandwidth for SA


Test Result

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Result (99%)	Result (26dB)	Verdict
N26-824-849	15	5	DFT-QPSK	L	Outer_Full	4.4803	5.092	PASS
N26-824-849	15	5	DFT-16QAM	L	Outer_Full	4.4760	4.958	PASS
N26-824-849	15	5	DFT-QPSK	M	Outer_Full	4.4851	5.089	PASS
N26-824-849	15	5	DFT-16QAM	M	Outer_Full	4.4859	5.122	PASS
N26-824-849	15	5	DFT-QPSK	H	Outer_Full	4.4768	5.098	PASS
N26-824-849	15	5	DFT-16QAM	H	Outer_Full	4.4785	5.033	PASS
N26-824-849	15	10	DFT-QPSK	L	Outer_Full	8.9381	9.699	PASS
N26-824-849	15	10	DFT-16QAM	L	Outer_Full	8.9415	9.743	PASS
N26-824-849	15	10	DFT-QPSK	M	Outer_Full	8.9413	9.695	PASS
N26-824-849	15	10	DFT-16QAM	M	Outer_Full	8.9417	9.676	PASS

N26-824-849	15	10	DFT-QPSK	H	Outer_Full	8.9254	9.767	PASS
N26-824-849	15	10	DFT-16QAM	H	Outer_Full	8.9310	9.669	PASS
N26-824-849	15	15	DFT-QPSK	L	Outer_Full	13.414	14.36	PASS
N26-824-849	15	15	DFT-16QAM	L	Outer_Full	13.410	14.36	PASS
N26-824-849	15	15	DFT-QPSK	M	Outer_Full	13.418	14.34	PASS
N26-824-849	15	15	DFT-16QAM	M	Outer_Full	13.433	14.33	PASS
N26-824-849	15	15	DFT-QPSK	H	Outer_Full	13.366	14.33	PASS
N26-824-849	15	15	DFT-16QAM	H	Outer_Full	13.371	14.32	PASS
N26-824-849	15	20	DFT-QPSK	L	Outer_Full	17.869	18.98	PASS
N26-824-849	15	20	DFT-16QAM	L	Outer_Full	17.856	18.92	PASS
N26-824-849	15	20	DFT-QPSK	M	Outer_Full	17.863	18.95	PASS
N26-824-849	15	20	DFT-16QAM	M	Outer_Full	17.838	18.92	PASS
N26-824-849	15	20	DFT-QPSK	H	Outer_Full	17.832	18.88	PASS
N26-824-849	15	20	DFT-16QAM	H	Outer_Full	17.807	18.84	PASS


Test Graphs

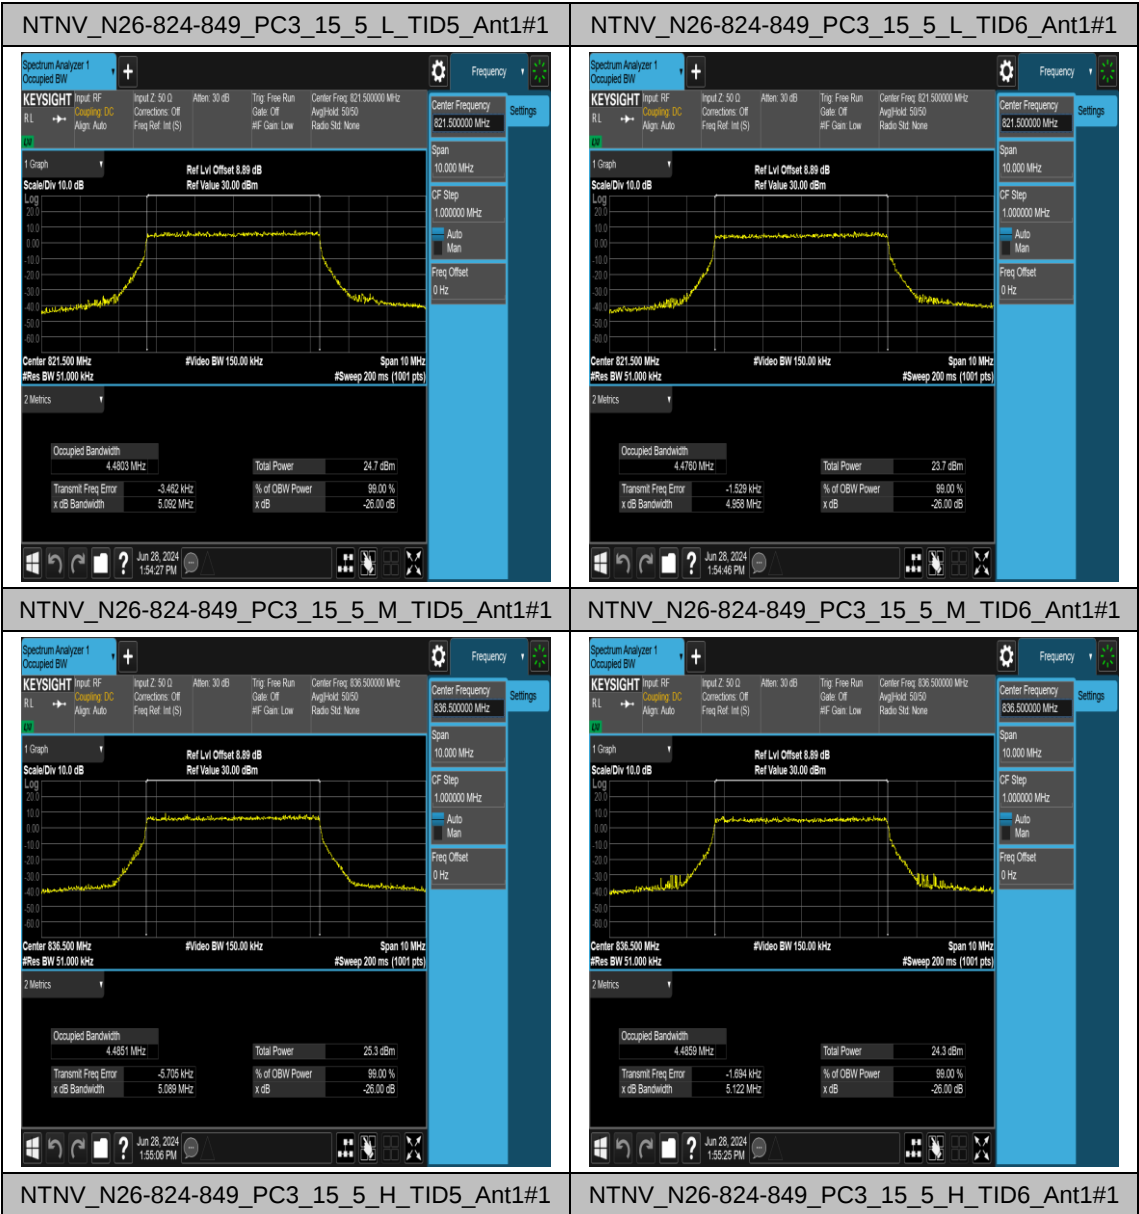

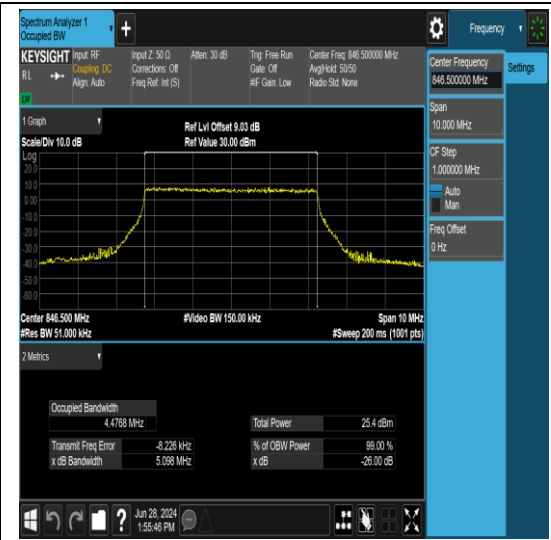


NTNV_N26-824-849_PC3_15_10_L_TID5_Ant1#

1

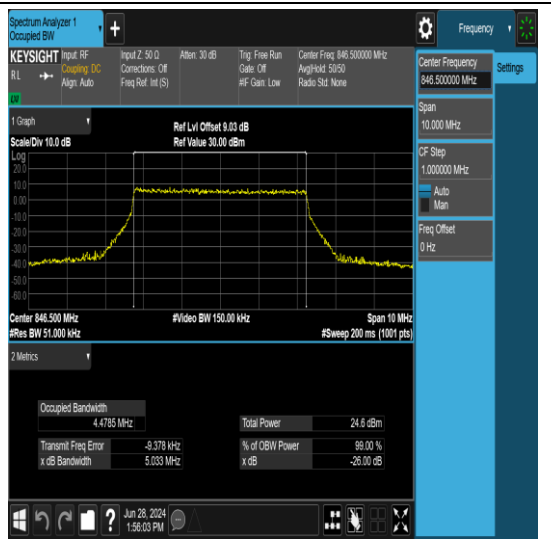


NTNV_N26-824-849_PC3_15_10_L_TID6_Ant1#

1

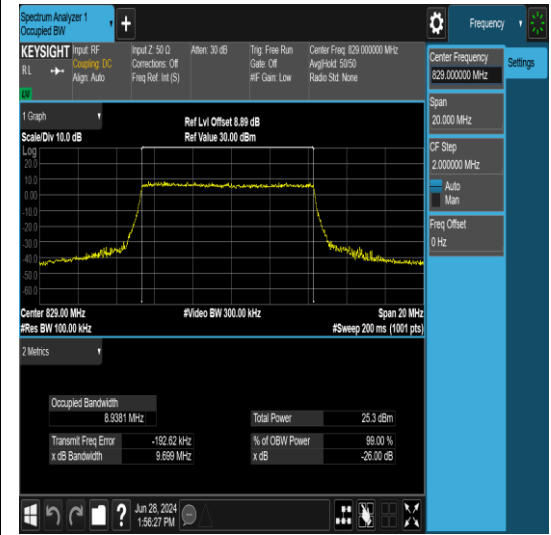



NTNV_N26-824-849_PC3_15_10_M_TID5_Ant1#


1

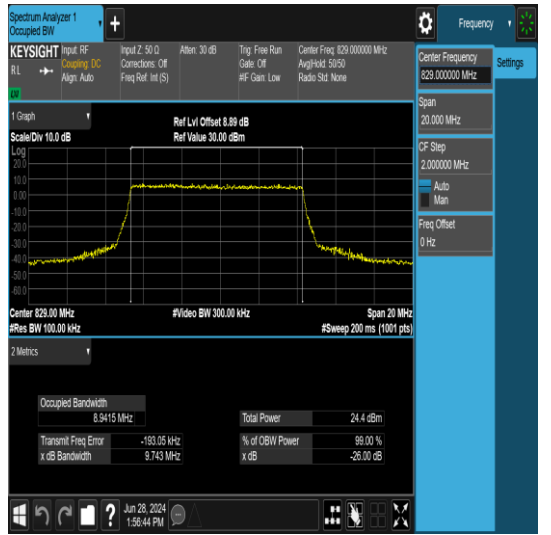



NTNV_N26-824-849_PC3_15_10_M_TID6_Ant1#

1

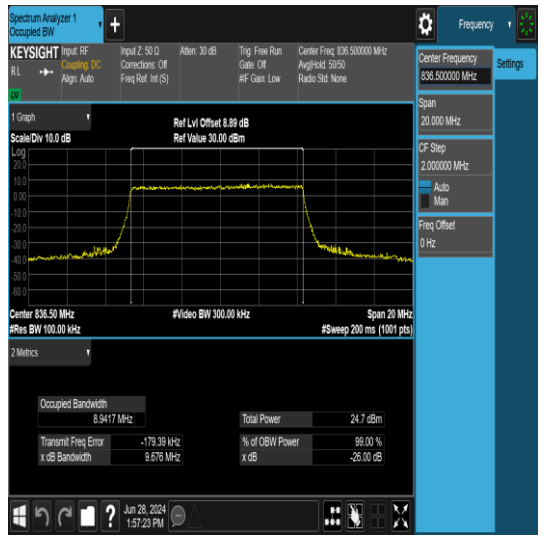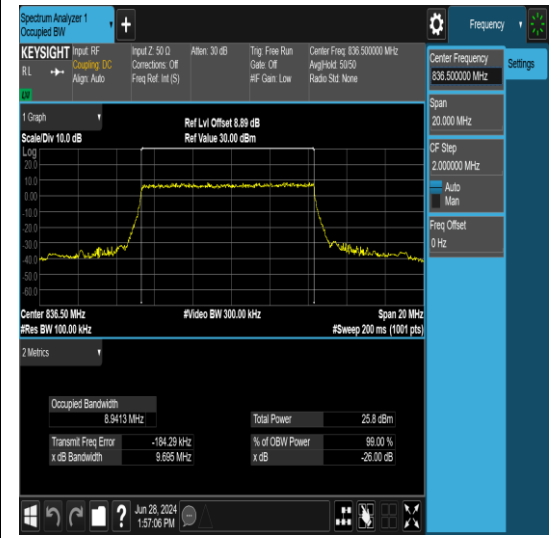

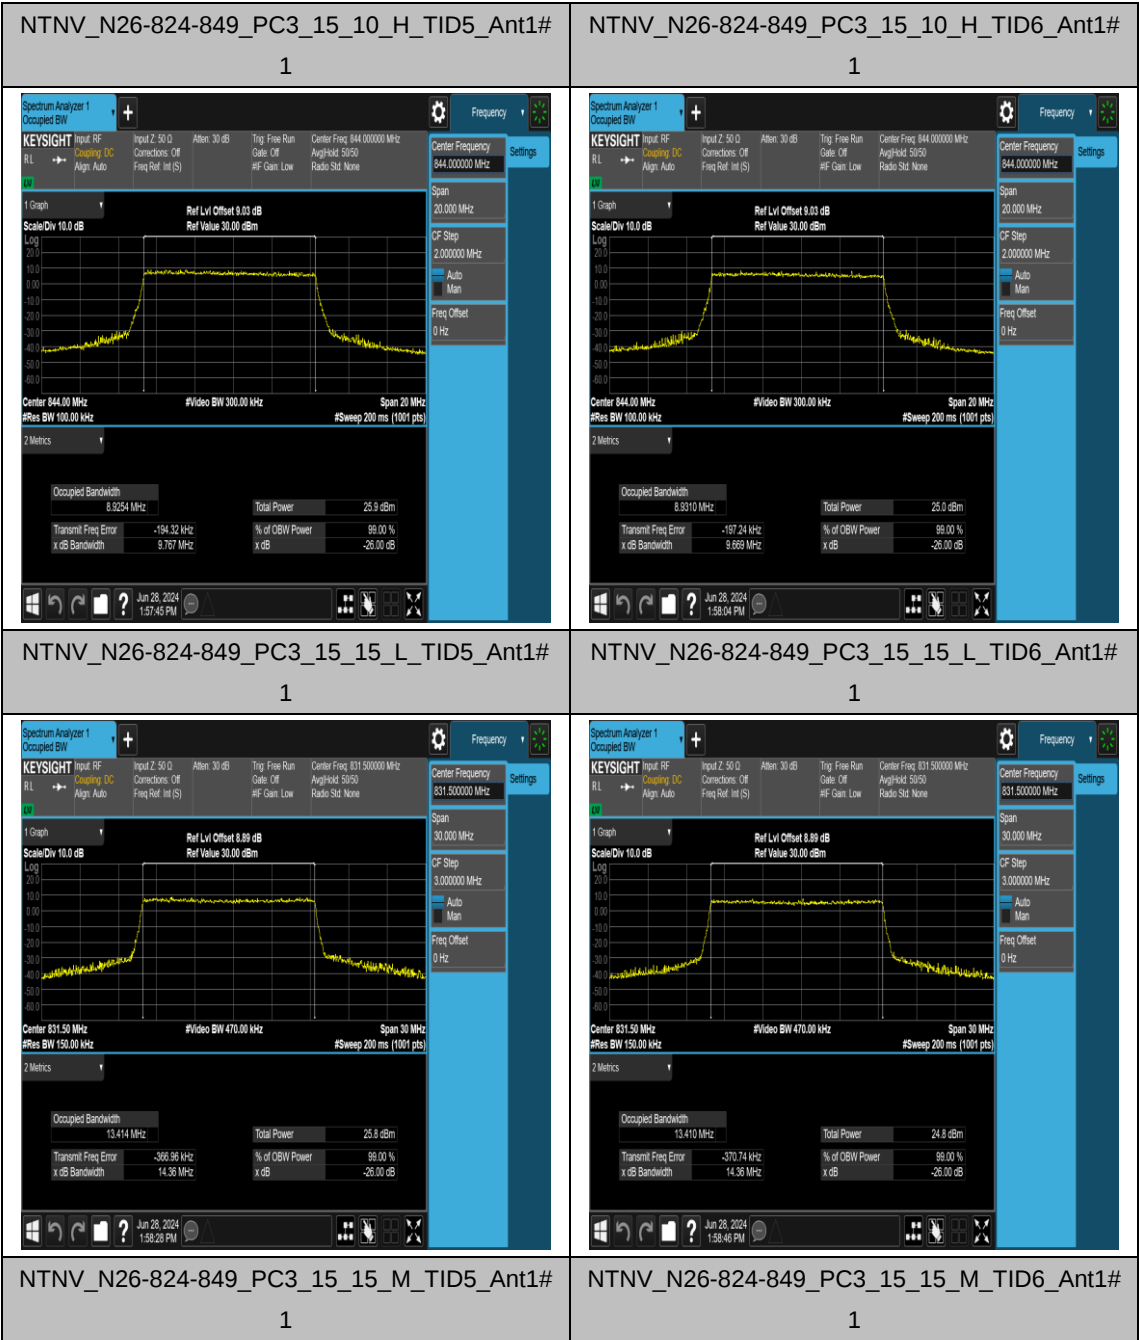

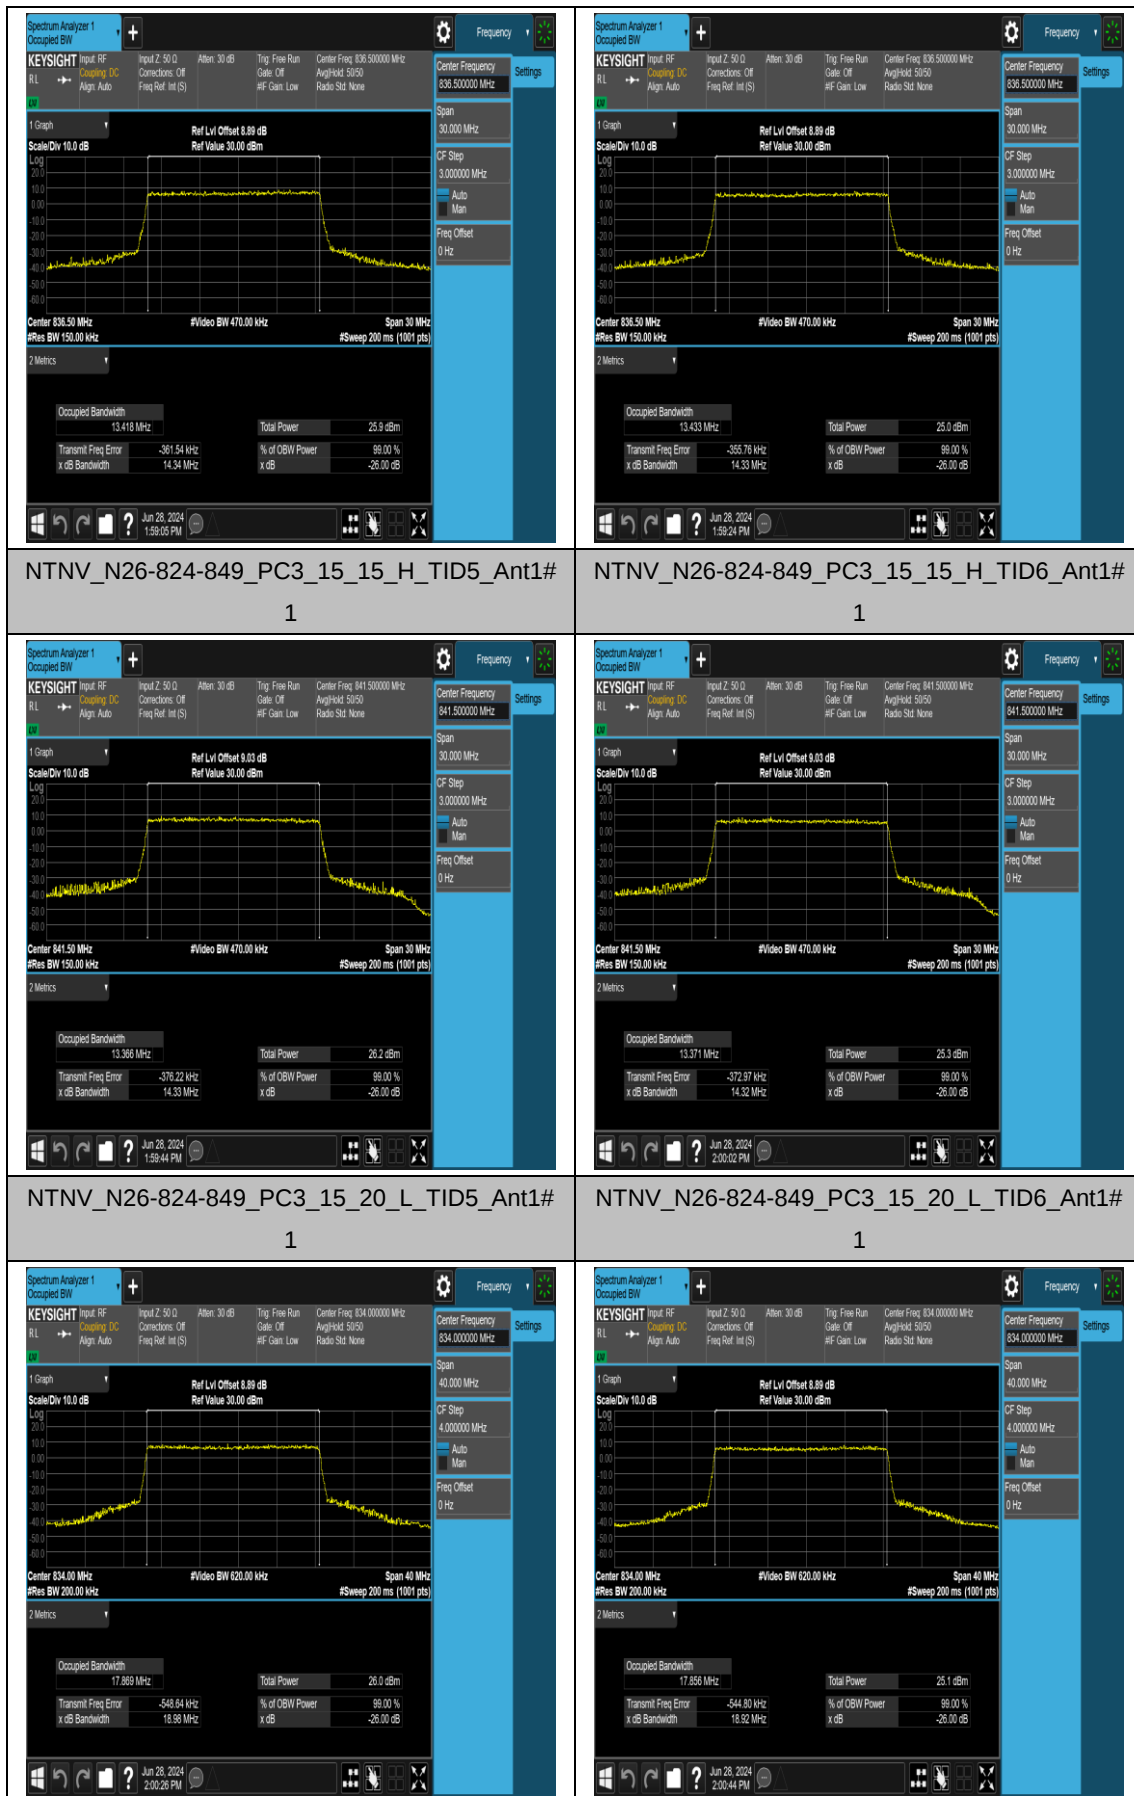

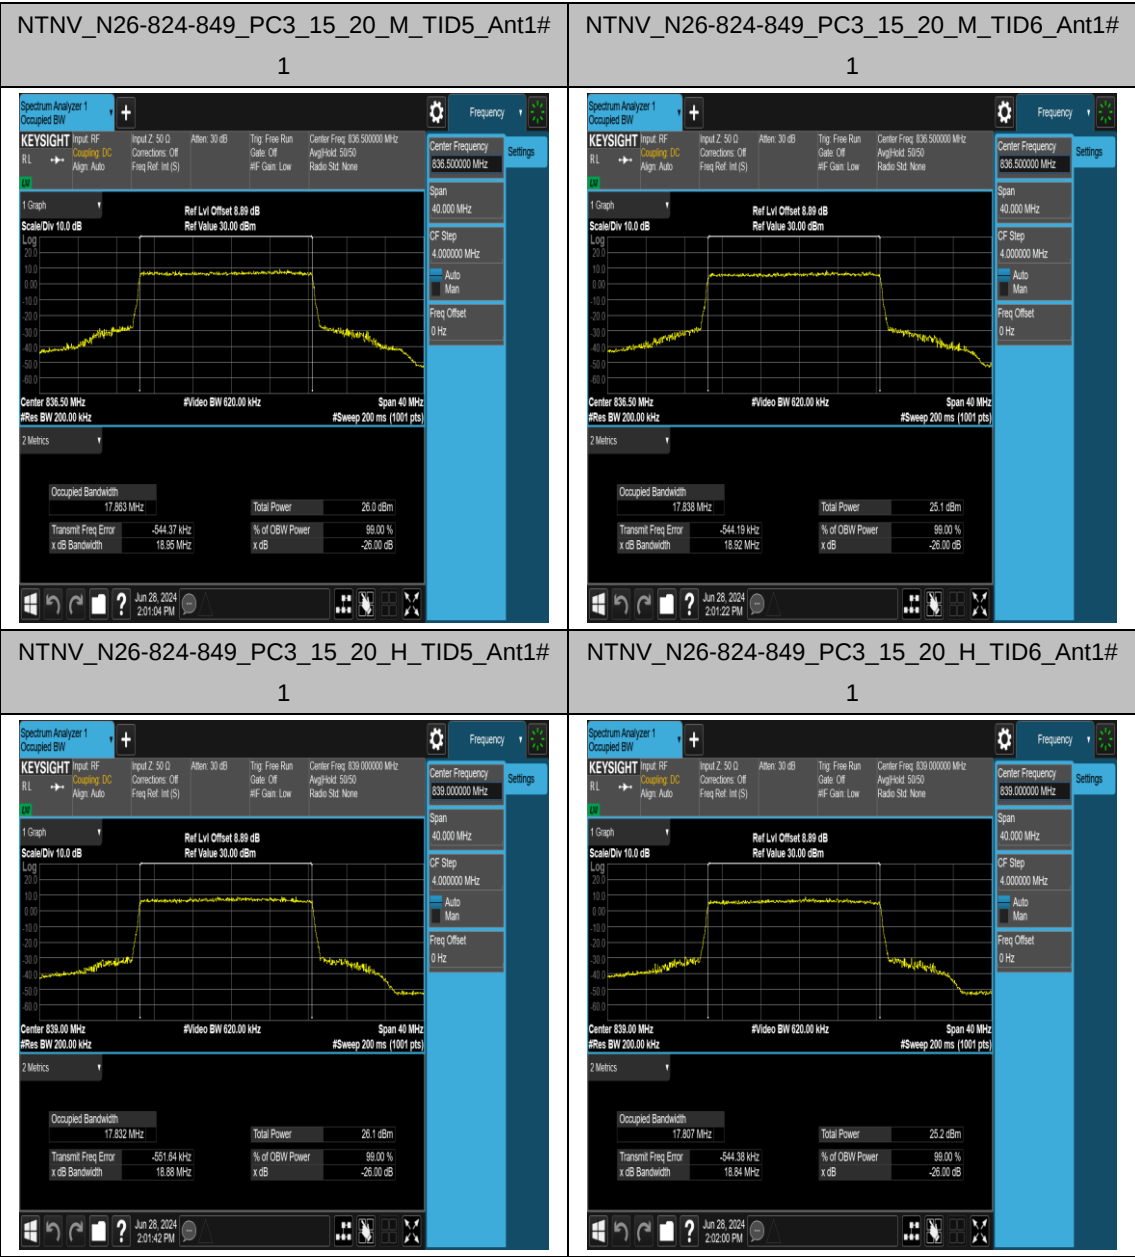



Appendix D: Band Edge for SA


Test Result

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Verdict
N26-824-849	15	5	DFT-QPSK	L	Outer_Full	PASS
N26-824-849	15	5	DFT-QPSK	L	Edge_1RB_Left	PASS
N26-824-849	15	5	DFT-QPSK	H	Outer_Full	PASS
N26-824-849	15	5	DFT-QPSK	H	Edge_1RB_Right	PASS
N26-824-849	15	10	DFT-QPSK	L	Outer_Full	PASS
N26-824-849	15	10	DFT-QPSK	L	Edge_1RB_Left	PASS
N26-824-849	15	10	DFT-QPSK	H	Outer_Full	PASS
N26-824-849	15	10	DFT-QPSK	H	Edge_1RB_Right	PASS
N26-824-849	15	15	DFT-QPSK	L	Outer_Full	PASS
N26-824-849	15	15	DFT-QPSK	L	Edge_1RB_Left	PASS
N26-824-849	15	15	DFT-QPSK	H	Outer_Full	PASS
N26-824-849	15	15	DFT-QPSK	H	Edge_1RB_Right	PASS
N26-824-849	15	20	DFT-QPSK	L	Outer_Full	PASS
N26-824-849	15	20	DFT-QPSK	L	Edge_1RB_Left	PASS
N26-824-849	15	20	DFT-QPSK	H	Outer_Full	PASS
N26-824-849	15	20	DFT-QPSK	H	Edge_1RB_Right	PASS

Test Graphs

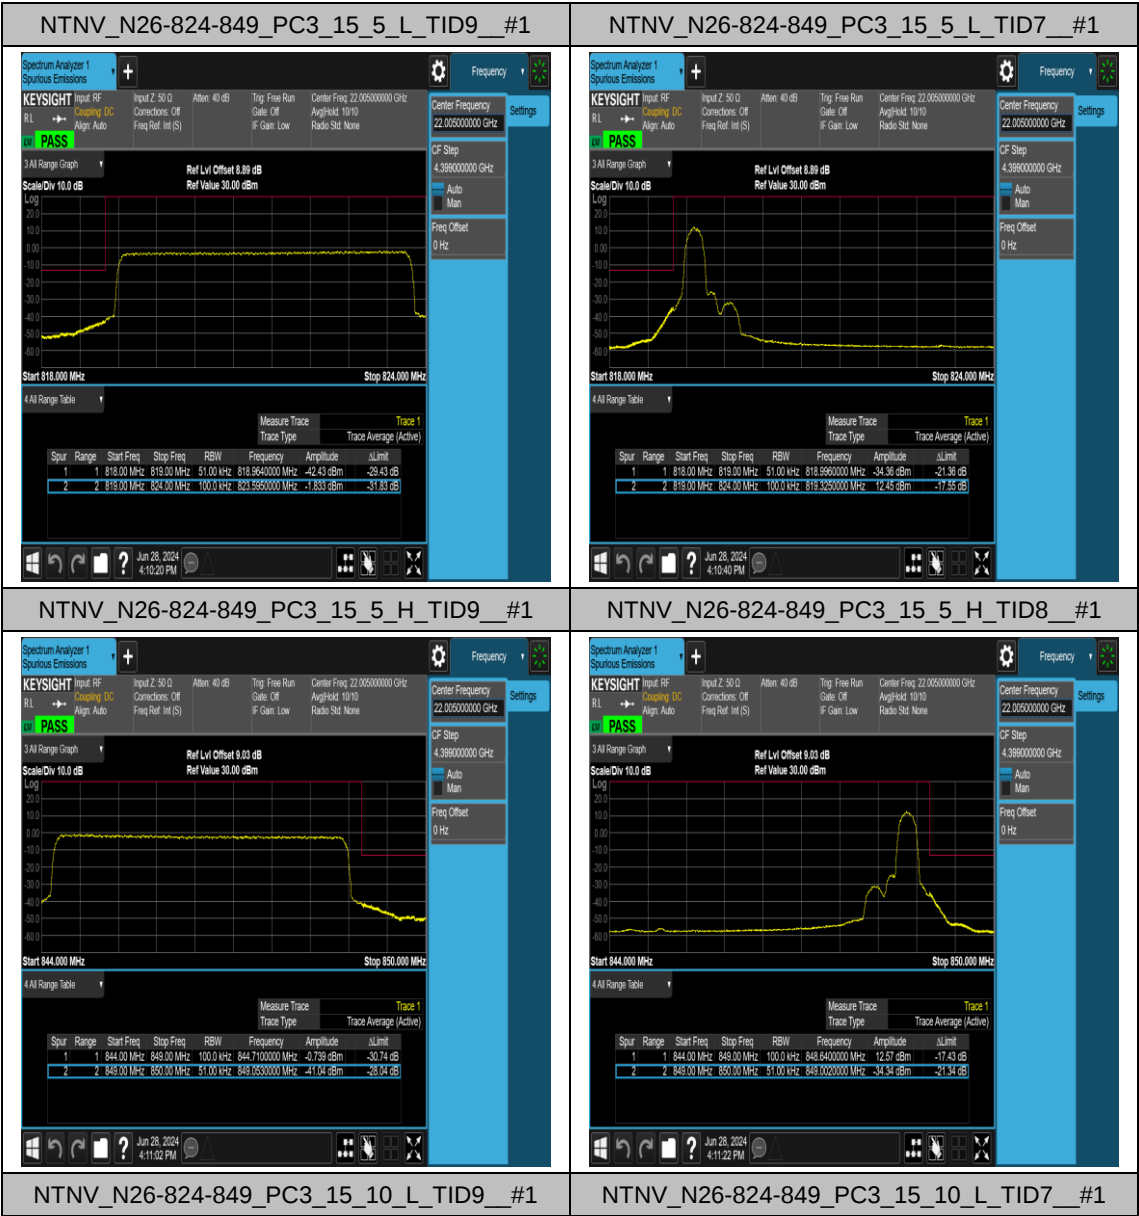

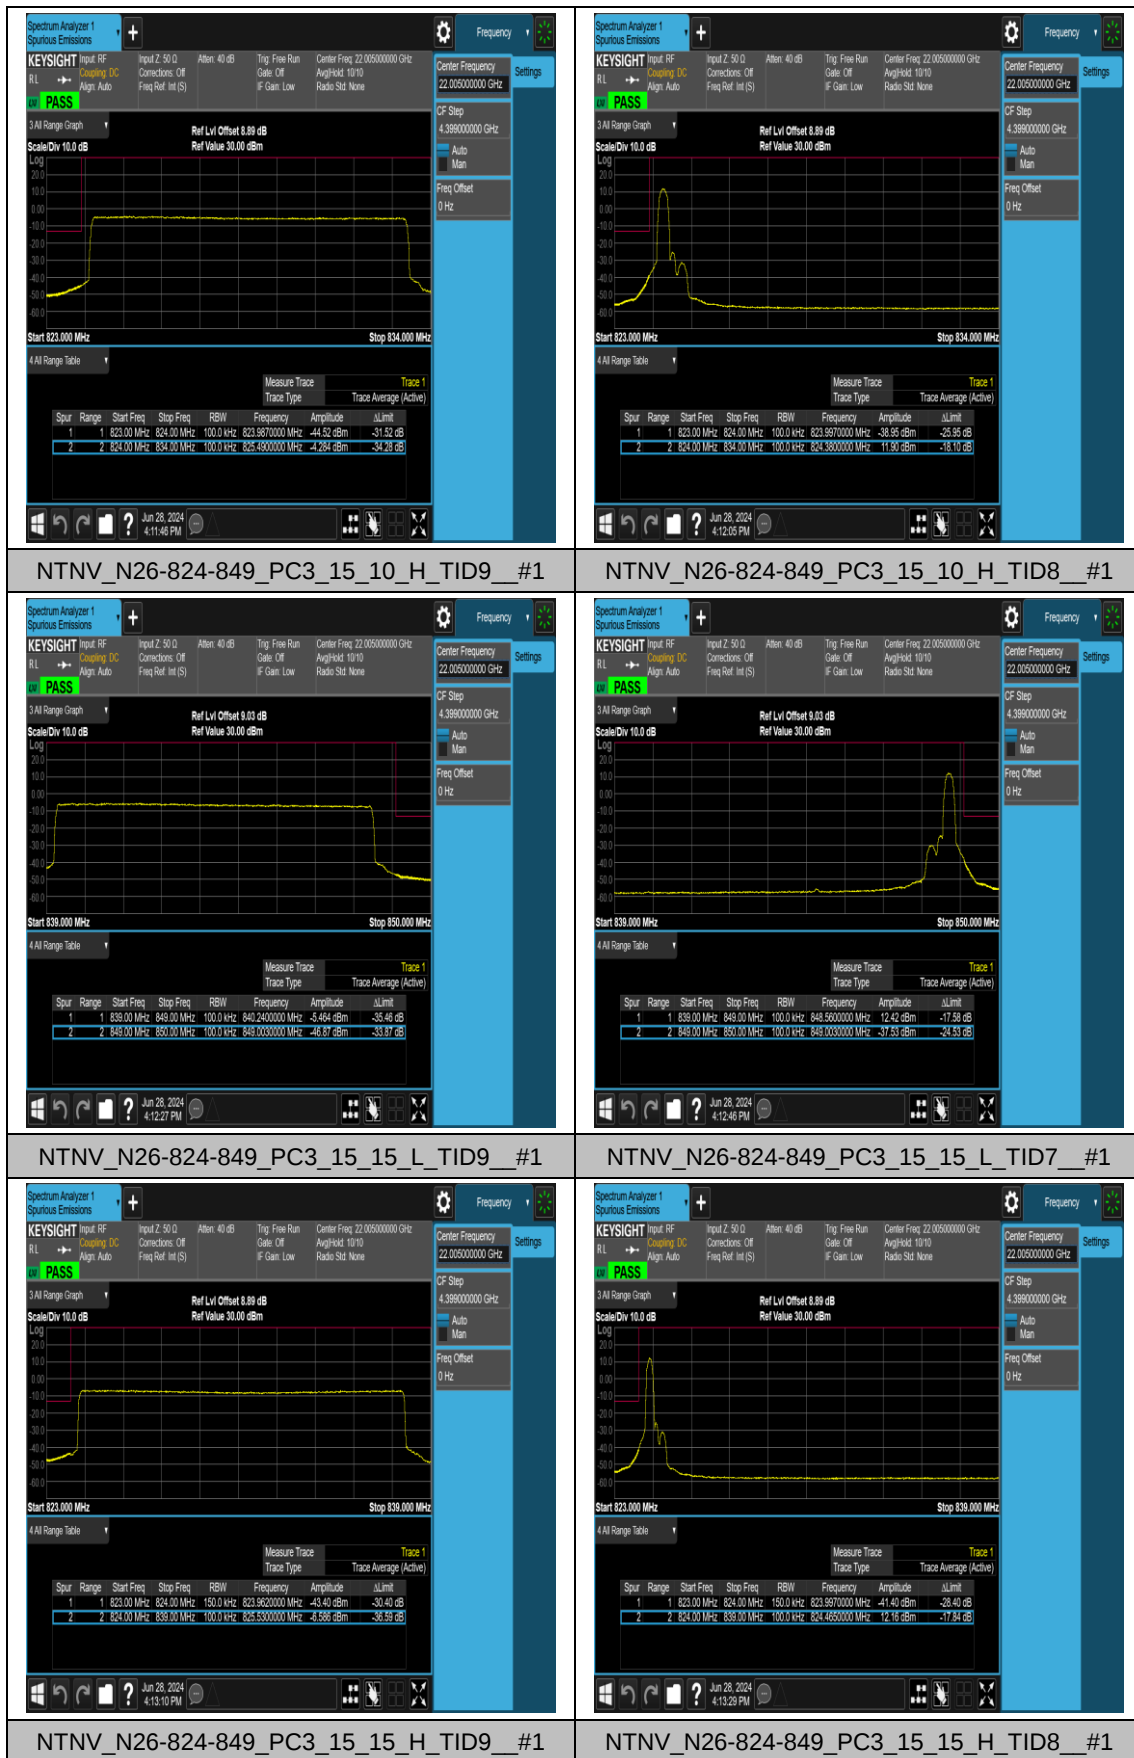

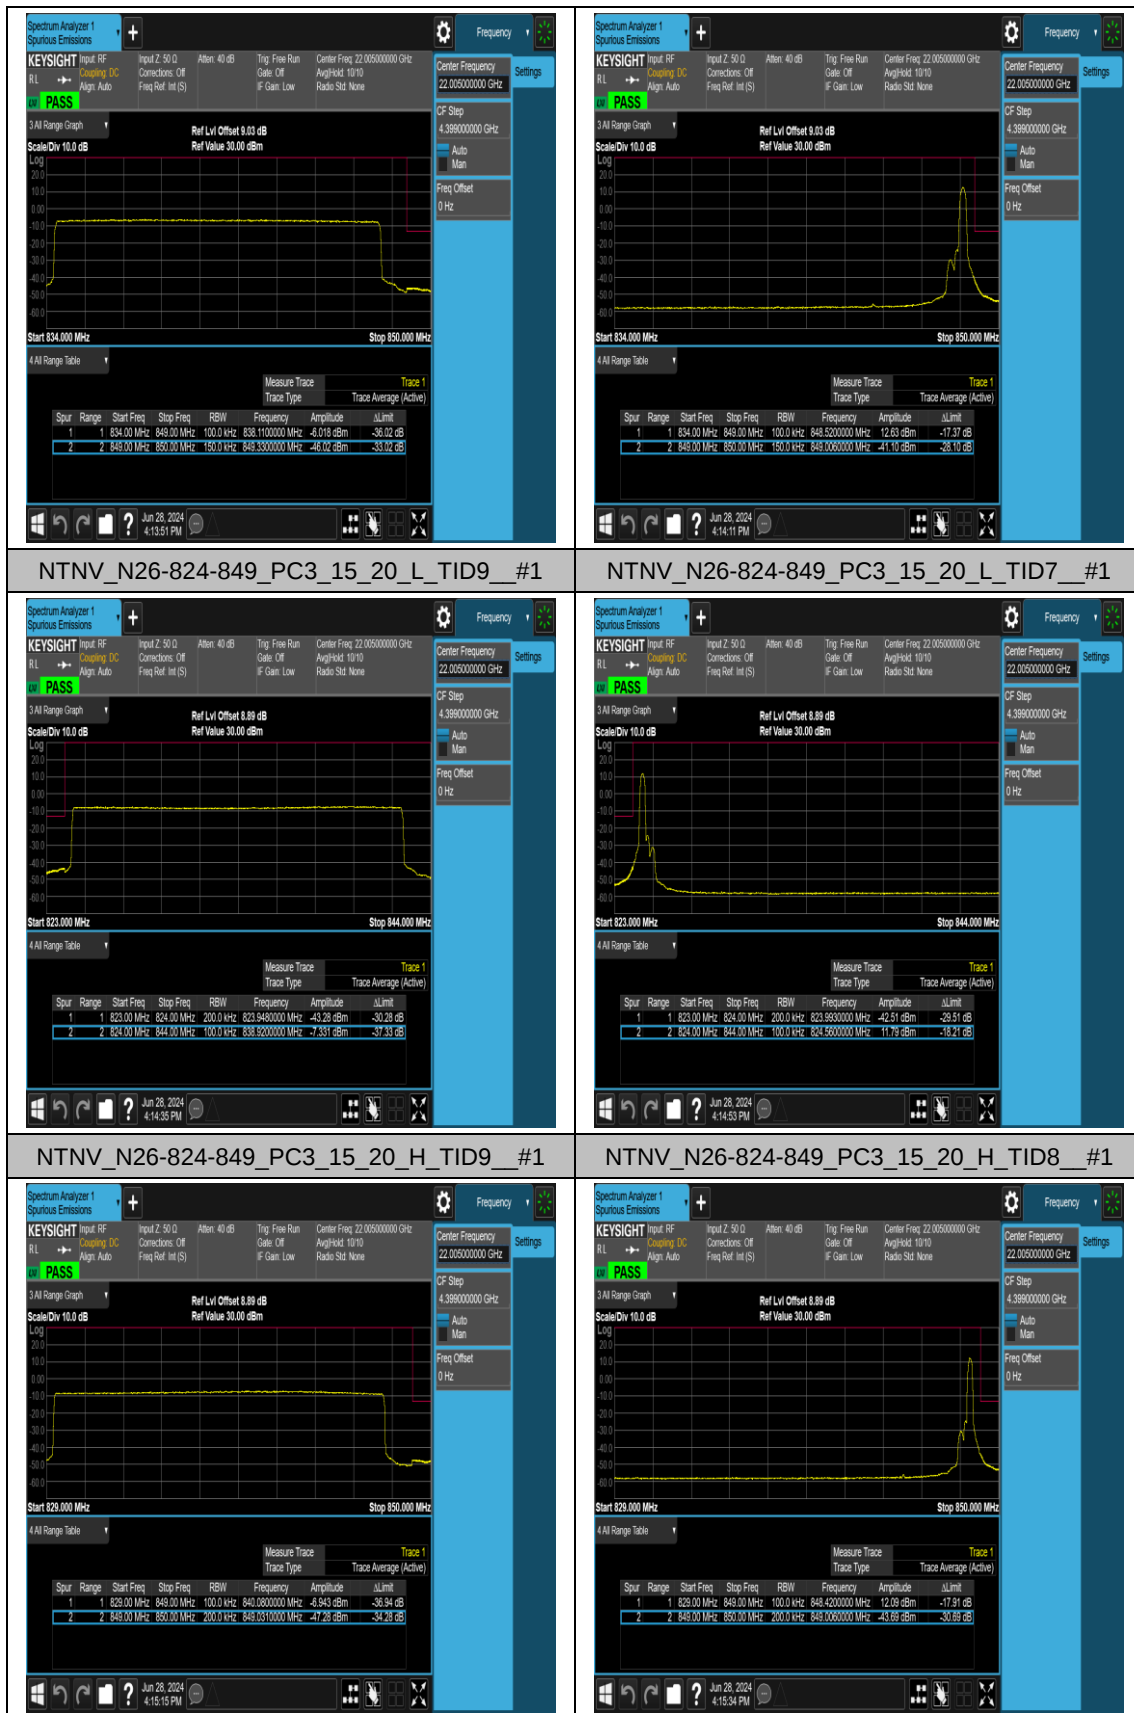

Appendix E: Conducted Spurious Emission for SA

Test Result

Band	SCS	Bandwidth	Modulation	Channel	RB Config	StartFreq	StopFreq	Result	Limit	Verdict
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	0.009	0.15	-62.91	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	0.15	30	-73.31	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	30	1000	-47.89	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	1000	3000	-36.63	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	3000	12000	-44.01	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Outer_Full	12000	20000	-45.09	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Left	0.009	0.15	-62.58	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Left	0.15	30	-71.98	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Left	30	1000	-51.92	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Left	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Left	3000	12000	-43.98	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Right	0.009	0.15	-61.93	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Right	0.15	30	-72.17	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Right	30	1000	-51.55	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Right	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	L	Edge_1RB_Right	3000	12000	-44.05	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Outer_Full	0.009	0.15	-60.61	-33	PASS
N26-8	15	5	DFT-16QAM	L	Outer_Full	0.15	30	-72.75	-23	PASS

24-849										
N26-8 24-849	15	5	DFT-16QAM	L	Outer_Full	30	1000	-48.72	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Outer_Full	1000	3000	-36.66	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Outer_Full	3000	12000	-44.21	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Left	0.009	0.15	-61.93	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Left	0.15	30	-73.43	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Left	30	1000	-51.67	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Left	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Left	3000	12000	-44.06	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Right	0.009	0.15	-62.41	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Right	0.15	30	-72.44	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Right	30	1000	-51.39	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Right	1000	3000	-36.59	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	L	Edge_1RB_Right	3000	12000	-44.19	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Outer_Full	0.009	0.15	-62.36	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Outer_Full	0.15	30	-72.41	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Outer_Full	30	1000	-51.54	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Outer_Full	1000	3000	-36.02	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Outer_Full	3000	12000	-44.17	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Left	0.009	0.15	-62.73	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Left	0.15	30	-71.83	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Left	30	1000	-51.88	-13	PASS

24-849										
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Left	1000	3000	-35.64	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Left	3000	12000	-43.89	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Right	0.009	0.15	-63.35	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Right	0.15	30	-71.38	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Right	30	1000	-51.69	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Right	1000	3000	-36.74	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	M	Edge_1RB_Right	3000	12000	-44.08	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Outer_Full	0.009	0.15	-62.56	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Outer_Full	0.15	30	-72.72	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Outer_Full	30	1000	-51.90	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Outer_Full	1000	3000	-35.57	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Outer_Full	3000	12000	-44.02	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Left	0.009	0.15	-61.86	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Left	0.15	30	-72.23	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Left	30	1000	-51.79	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Left	1000	3000	-35.25	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Left	3000	12000	-44.20	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Right	0.009	0.15	-62.82	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Right	0.15	30	-69.59	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Right	30	1000	-51.50	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Right	1000	3000	-36.59	-13	PASS

24-849										
N26-8 24-849	15	5	DFT-16QAM	M	Edge_1RB_Right	3000	12000	-44.09	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Outer_Full	0.009	0.15	-62.98	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Outer_Full	0.15	30	-72.79	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Outer_Full	30	1000	-43.58	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Outer_Full	1000	3000	-35.63	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Outer_Full	3000	12000	-44.05	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Left	0.009	0.15	-62.67	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Left	0.15	30	-72.33	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Left	30	1000	-51.80	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Left	1000	3000	-36.00	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Left	3000	12000	-44.00	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Right	0.009	0.15	-62.47	-33	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Right	0.15	30	-72.75	-23	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Right	30	1000	-50.57	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Right	1000	3000	-34.23	-13	PASS
N26-8 24-849	15	5	DFT-QPSK	H	Edge_1RB_Right	3000	12000	-35.28	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Outer_Full	0.009	0.15	-62.69	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Outer_Full	0.15	30	-71.81	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Outer_Full	30	1000	-44.99	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Outer_Full	1000	3000	-35.69	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Outer_Full	3000	12000	-36.75	-13	PASS

24-849										
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Left	0.009	0.15	-62.45	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Left	0.15	30	-71.55	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Left	30	1000	-51.87	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Left	1000	3000	-36.75	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Left	3000	12000	-44.12	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Right	0.009	0.15	-63.16	-33	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Right	0.15	30	-72.08	-23	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Right	30	1000	-50.38	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Right	1000	3000	-36.63	-13	PASS
N26-8 24-849	15	5	DFT-16QAM	H	Edge_1RB_Right	3000	12000	-44.09	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Outer_Full	0.009	0.15	-61.65	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Outer_Full	0.15	30	-73.68	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Outer_Full	30	1000	-51.64	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Outer_Full	1000	3000	-35.66	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Outer_Full	3000	12000	-44.06	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Left	0.009	0.15	-62.66	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Left	0.15	30	-71.79	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Left	30	1000	-51.51	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Left	1000	3000	-36.66	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Left	3000	12000	-44.18	-13	PASS
N26-8	15	10	DFT-QPSK	L	Edge_1RB_Right	0.009	0.15	-62.68	-33	PASS

24-849										
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Right	0.15	30	-72.60	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Right	30	1000	-51.68	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Right	1000	3000	-36.71	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	L	Edge_1RB_Right	3000	12000	-44.03	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Outer_Full	0.009	0.15	-62.75	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Outer_Full	0.15	30	-73.18	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Outer_Full	30	1000	-51.36	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Outer_Full	1000	3000	-35.62	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Outer_Full	3000	12000	-35.14	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Left	0.009	0.15	-61.91	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Left	0.15	30	-73.23	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Left	30	1000	-51.82	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Left	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Left	3000	12000	-44.16	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Right	0.009	0.15	-62.61	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Right	0.15	30	-73.08	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Right	30	1000	-51.81	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Right	1000	3000	-36.20	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	L	Edge_1RB_Right	3000	12000	-44.03	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Outer_Full	0.009	0.15	-62.08	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Outer_Full	0.15	30	-72.70	-23	PASS

24-849										
N26-8 24-849	15	10	DFT-QPSK	M	Outer_Full	30	1000	-49.52	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Outer_Full	1000	3000	-36.70	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Outer_Full	3000	12000	-44.06	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Left	0.009	0.15	-62.54	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Left	0.15	30	-70.81	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Left	30	1000	-51.77	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Left	1000	3000	-36.63	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Left	3000	12000	-44.11	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Right	0.009	0.15	-62.94	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Right	0.15	30	-71.74	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Right	30	1000	-51.62	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Right	1000	3000	-36.70	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	M	Edge_1RB_Right	3000	12000	-43.93	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Outer_Full	0.009	0.15	-61.77	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Outer_Full	0.15	30	-72.63	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Outer_Full	30	1000	-49.69	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Outer_Full	1000	3000	-35.46	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Outer_Full	3000	12000	-44.08	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Left	0.009	0.15	-62.39	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Left	0.15	30	-71.58	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Left	30	1000	-51.92	-13	PASS

24-849										
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Left	1000	3000	-35.97	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Left	3000	12000	-43.93	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Right	0.009	0.15	-62.24	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Right	0.15	30	-71.11	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Right	30	1000	-51.88	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Right	1000	3000	-36.73	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	M	Edge_1RB_Right	3000	12000	-44.06	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Outer_Full	0.009	0.15	-61.53	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Outer_Full	0.15	30	-72.60	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Outer_Full	30	1000	-44.11	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Outer_Full	1000	3000	-36.47	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Outer_Full	3000	12000	-43.88	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Left	0.009	0.15	-63.51	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Left	0.15	30	-71.73	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Left	30	1000	-51.62	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Left	1000	3000	-35.75	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Left	3000	12000	-44.09	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Right	0.009	0.15	-61.91	-33	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Right	0.15	30	-72.12	-23	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Right	30	1000	-50.96	-13	PASS
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Right	1000	3000	-36.63	-13	PASS

24-849										
N26-8 24-849	15	10	DFT-QPSK	H	Edge_1RB_Right	3000	12000	-44.11	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Outer_Full	0.009	0.15	-62.88	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Outer_Full	0.15	30	-72.25	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Outer_Full	30	1000	-46.52	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Outer_Full	1000	3000	-35.53	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Outer_Full	3000	12000	-35.27	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Left	0.009	0.15	-61.56	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Left	0.15	30	-72.68	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Left	30	1000	-47.38	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Left	1000	3000	-36.75	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Left	3000	12000	-43.96	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Right	0.009	0.15	-62.84	-33	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Right	0.15	30	-71.90	-23	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Right	30	1000	-51.41	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Right	1000	3000	-36.70	-13	PASS
N26-8 24-849	15	10	DFT-16QAM	H	Edge_1RB_Right	3000	12000	-44.14	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Outer_Full	0.009	0.15	-63.55	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Outer_Full	0.15	30	-71.91	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Outer_Full	30	1000	-50.07	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Outer_Full	1000	3000	-36.64	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Outer_Full	3000	12000	-44.08	-13	PASS

24-849										
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Left	0.009	0.15	-62.14	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Left	0.15	30	-71.12	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Left	30	1000	-51.86	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Left	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Left	3000	12000	-43.96	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Right	0.009	0.15	-63.04	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Right	0.15	30	-71.27	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Right	30	1000	-51.98	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Right	1000	3000	-36.69	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	L	Edge_1RB_Right	3000	12000	-44.01	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Outer_Full	0.009	0.15	-63.09	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Outer_Full	0.15	30	-73.42	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Outer_Full	30	1000	-50.58	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Outer_Full	1000	3000	-35.46	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Outer_Full	3000	12000	-44.05	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Left	0.009	0.15	-61.77	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Left	0.15	30	-72.15	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Left	30	1000	-51.68	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Left	1000	3000	-36.64	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Left	3000	12000	-44.02	-13	PASS
N26-8	15	15	DFT-16QAM	L	Edge_1RB_Right	0.009	0.15	-63.51	-33	PASS

24-849										
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Right	0.15	30	-72.36	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Right	30	1000	-51.90	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Right	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	L	Edge_1RB_Right	3000	12000	-44.10	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Outer_Full	0.009	0.15	-62.41	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Outer_Full	0.15	30	-73.26	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Outer_Full	30	1000	-47.21	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Outer_Full	1000	3000	-36.65	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Outer_Full	3000	12000	-44.08	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Left	0.009	0.15	-62.61	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Left	0.15	30	-71.72	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Left	30	1000	-51.66	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Left	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Left	3000	12000	-44.05	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Right	0.009	0.15	-62.98	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Right	0.15	30	-72.12	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Right	30	1000	-51.68	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Right	1000	3000	-36.60	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	M	Edge_1RB_Right	3000	12000	-43.86	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Outer_Full	0.009	0.15	-62.73	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Outer_Full	0.15	30	-72.78	-23	PASS

24-849										
N26-8 24-849	15	15	DFT-16QAM	M	Outer_Full	30	1000	-48.42	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Outer_Full	1000	3000	-36.74	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Outer_Full	3000	12000	-44.02	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Left	0.009	0.15	-63.04	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Left	0.15	30	-71.46	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Left	30	1000	-51.65	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Left	1000	3000	-36.75	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Left	3000	12000	-44.04	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Right	0.009	0.15	-62.57	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Right	0.15	30	-72.65	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Right	30	1000	-51.39	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Right	1000	3000	-35.70	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	M	Edge_1RB_Right	3000	12000	-44.17	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Outer_Full	0.009	0.15	-62.47	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Outer_Full	0.15	30	-70.68	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Outer_Full	30	1000	-45.73	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Outer_Full	1000	3000	-35.68	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Outer_Full	3000	12000	-44.00	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Left	0.009	0.15	-62.33	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Left	0.15	30	-71.86	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Left	30	1000	-51.68	-13	PASS

24-849										
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Left	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Left	3000	12000	-44.03	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Right	0.009	0.15	-62.12	-33	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Right	0.15	30	-72.95	-23	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Right	30	1000	-51.05	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Right	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	15	DFT-QPSK	H	Edge_1RB_Right	3000	12000	-44.04	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Outer_Full	0.009	0.15	-62.59	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Outer_Full	0.15	30	-72.56	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Outer_Full	30	1000	-47.81	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Outer_Full	1000	3000	-36.65	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Outer_Full	3000	12000	-44.18	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Left	0.009	0.15	-61.49	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Left	0.15	30	-72.94	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Left	30	1000	-51.73	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Left	1000	3000	-36.68	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Left	3000	12000	-44.06	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Right	0.009	0.15	-62.59	-33	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Right	0.15	30	-72.76	-23	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Right	30	1000	-51.22	-13	PASS
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Right	1000	3000	-35.94	-13	PASS

24-849										
N26-8 24-849	15	15	DFT-16QAM	H	Edge_1RB_Right	3000	12000	-43.94	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Outer_Full	0.009	0.15	-62.36	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Outer_Full	0.15	30	-73.41	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Outer_Full	30	1000	-49.87	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Outer_Full	1000	3000	-35.64	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Outer_Full	3000	12000	-44.09	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Left	0.009	0.15	-62.90	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Left	0.15	30	-71.01	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Left	30	1000	-51.37	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Left	1000	3000	-36.73	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Left	3000	12000	-44.08	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Right	0.009	0.15	-61.59	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Right	0.15	30	-70.64	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Right	30	1000	-51.69	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Right	1000	3000	-36.77	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	L	Edge_1RB_Right	3000	12000	-44.07	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Outer_Full	0.009	0.15	-61.84	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Outer_Full	0.15	30	-72.78	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Outer_Full	30	1000	-50.04	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Outer_Full	1000	3000	-36.67	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Outer_Full	3000	12000	-44.20	-13	PASS

24-849										
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Left	0.009	0.15	-62.01	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Left	0.15	30	-71.53	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Left	30	1000	-51.91	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Left	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Left	3000	12000	-44.02	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Right	0.009	0.15	-62.35	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Right	0.15	30	-71.99	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Right	30	1000	-51.81	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Right	1000	3000	-35.45	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	L	Edge_1RB_Right	3000	12000	-43.99	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Outer_Full	0.009	0.15	-62.69	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Outer_Full	0.15	30	-71.73	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Outer_Full	30	1000	-48.47	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Outer_Full	1000	3000	-35.62	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Outer_Full	3000	12000	-43.90	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Left	0.009	0.15	-62.13	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Left	0.15	30	-70.31	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Left	30	1000	-51.55	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Left	1000	3000	-36.77	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Left	3000	12000	-43.94	-13	PASS
N26-8	15	20	DFT-QPSK	M	Edge_1RB_Right	0.009	0.15	-62.92	-33	PASS

24-849										
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Right	0.15	30	-72.40	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Right	30	1000	-51.48	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Right	1000	3000	-36.67	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	M	Edge_1RB_Right	3000	12000	-44.04	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Outer_Full	0.009	0.15	-62.01	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Outer_Full	0.15	30	-73.03	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Outer_Full	30	1000	-49.30	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Outer_Full	1000	3000	-36.72	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Outer_Full	3000	12000	-43.96	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Left	0.009	0.15	-62.25	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Left	0.15	30	-73.95	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Left	30	1000	-51.73	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Left	1000	3000	-34.52	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Left	3000	12000	-44.01	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Right	0.009	0.15	-62.58	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Right	0.15	30	-72.81	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Right	30	1000	-51.59	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Right	1000	3000	-36.63	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	M	Edge_1RB_Right	3000	12000	-35.35	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Outer_Full	0.009	0.15	-61.66	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Outer_Full	0.15	30	-72.29	-23	PASS

24-849										
N26-8 24-849	15	20	DFT-QPSK	H	Outer_Full	30	1000	-46.28	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Outer_Full	1000	3000	-36.78	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Outer_Full	3000	12000	-44.11	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Left	0.009	0.15	-62.96	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Left	0.15	30	-72.45	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Left	30	1000	-51.98	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Left	1000	3000	-35.89	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Left	3000	12000	-44.05	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Right	0.009	0.15	-62.88	-33	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Right	0.15	30	-72.85	-23	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Right	30	1000	-51.72	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Right	1000	3000	-36.05	-13	PASS
N26-8 24-849	15	20	DFT-QPSK	H	Edge_1RB_Right	3000	12000	-44.15	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Outer_Full	0.009	0.15	-62.36	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Outer_Full	0.15	30	-72.08	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Outer_Full	30	1000	-47.93	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Outer_Full	1000	3000	-36.77	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Outer_Full	3000	12000	-44.16	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Left	0.009	0.15	-62.70	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Left	0.15	30	-72.87	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Left	30	1000	-51.88	-13	PASS

24-849										
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Left	1000	3000	-36.79	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Left	3000	12000	-43.95	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Right	0.009	0.15	-62.49	-33	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Right	0.15	30	-72.04	-23	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Right	30	1000	-50.99	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Right	1000	3000	-36.79	-13	PASS
N26-8 24-849	15	20	DFT-16QAM	H	Edge_1RB_Right	3000	12000	-43.76	-13	PASS