



深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

遥控器产品规格书

Remote control Specification

文件编号:

产品名称 Product name	RF402A IR/BLE Voice Remote Control
产品型号 Product NO.:	RF402A URMT47CND001
批准	
审核	
拟制	Yanling Fu

客户确认（盖章）

客户名称	审核	批准

版本记录:

版本 Version	日期 Date	姓名 Name	备注 Notes
V1.0	2020-01-10	Yanling Fu	Draft

2、目录 Index

NO.	appellation
1	规格书封面 (Approval Sheet Cover)
2	目录 (Index)
3	检验内容及要求 (Verification content & Requirement)
4	产品效果图 (Product Cosmetics drawing)
5	按键码值 (Code table)
6	产品功能 (software function)
7	遥控器原理图(Schematic diagram)
8	产品结构尺寸图纸(product structure views)
9	产品包装示意图(Packing drawing)



三、检验内容及要求 (Verification content & Requirement)

1、一般项目 (General Items)

- 1.1、适用范围 Apply for: RF402A Remote Control
- 1.2、工作环境 Working Environment: 0℃~45℃、5%~80% RH
- 1.3、存储温度 Storage Environment: -20℃~60℃, 5%~90% RH
- 1.4、试验环境 Test Environment: 5℃~35℃、45%~75% RH、86~106Kpa
- 1.5、额定电压 Rating Voltage: DC3.0V
- 1.6、适用电池 Battery: R03/AAA x2pcs
- 1.7、重量范围 Weight: 98.3g(Without battery)
- 1.8、产品尺寸: 215.00*48.00*20.00mm

2、可视检测项目 Visible Test Item

测试条件 Test Conditions

A: 正面在标准光源下 30CM 距离 10 秒以内目测 Put the top face under the standard light source and test by sight from the 30cm distance for 10 seconds

B: 其余面标准光源下 50CM 距离 5 秒以内目测 Put other sides under the standard light source and test by sight from the 50cm distance for 5 seconds

序号 No.	项目 Item	测试要求 Test Requirements
2.1	划伤、沾污、割裂、变形 Scratches, Stain and distortion of the Unit	无上述各种现象 No described situations
2.2	印刷图形及文字 Hot Stamped Graphics and Letters	内容正确、清晰、均匀、整齐 Correct, in focus and comply with the drawing
2.3	壳体配合 Match of top case and bottom case	无翘起、变形、开裂、断差。(离缝: 0.1mm; 刮手: 底刮<0.1mm, 无面刮, 电池盖与后盖弧面断差小于0.05mm, 只允许顺差, 不允许逆差) No distortion and Crack between the twoparts
2.4	表面 Appearance	材质正确、颜色一致 Correct material and color



3、 电气性能 Electric Capability

序号	项目	测试要求 Test Requirements
3.0	主控芯片 IC	Airoha AB1613
3.1	蓝牙版本 Bluetooth version	Bluetooth LE 4.2
3.2	按键数量 Number of Keys	47 Keys (including Mic. Key)
3.3	遥控器设备名称 Remote control device name	Philips TV Voice RC_5
3.4	载波频率 Carrier frequency	2402MHz ~ 2480MHz 跳频
3.5	工作电压 Working Voltage	2.3v ~3.3v
3.6	待机电流 Static Current	≤10uA 在 3.0V 电压下, 配对后的遥控器静置 30 秒后(进入深度睡眠状态)后测量其电流.At 3.0v, the paired remote is left to rest for 30 sec (deep sleep) before the current is measured.
3.7	工作电流 Working Current	RF 按键工作电流 RF Key working current≤10 mA 红外 IR<30mA 语音 voice <20mA
3.8	IR 发射距离 IR distance (工作电压 3.0V) Working Voltage(3V)	IR 方案一: 用船井电视机测试遥控器 Use the funai TV to Test the remote control: 1. Long distance 长距离 - Front (前) : 7m - LR (左右) 40°: 5m - Up (上) 15°: 5m- Down (下) 30°:5m IR 方案二: 用接收治具测试遥控器 Use the receive to Test the remote control: 1. Long distance 长距离 - Front (前) : 10m - LR 40° (左右) : 8m - Up 15° (上) : 8m - Down 30° (下) :8m
3.9	RF 发射距离 RF distance (工作电压 3.0V) Working Voltage(3V)	Measure the distance that Voice transmitting function can be guaranteed for the TV set or the PC in the specified place(the test site) 测试语音是否可以到达的指定位置的电视机/PC 的位置。 ->Distance ≥10m google 的要求是±45°, >10m.
3.10	蓝牙输出功率 RF transmission power	1dbm~5dbm
3.11	初始频率偏移 Carrier frequency offset, drift	-75KHz≤fo≤75KHz



深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

3.12	语音采样率 Audio feature	Google ATV Voice On-air data rate: 64kbps [16kHz/16bit/4:1 ADPCM Compression]and 32kbps [8kHz/16bit/4:1 ADPCM Compression] Press & Release Talk Voice timeout: 30sec
3.13	语音信噪比 Audio SNR	Evaluate the SNR of Voice data(wav.) that be captured 评估所评估语音的信噪比如下: [Google ATV Help] THD MUST be less than 5% @1kHz, (94dB SPL as referenceAudio input sensitivity: 94dB SPL as refrence sound pressure level).
3.14	低电压提示 Battery Level	- Battery Level is sent to TV by NOTIFY. Format : UINT8, Unit : percent。电视机上以%显示当前电池电量.
3.15	性能测试 Key functional test	Each key must be operated effectively.每个按键需操作有效.
3.16	睡眠 Sleep	After any button of the remote control is released, if there is no button within 30s, it will sleep completely.遥控器任一按键松开后, 如果 30s 内 无按键则彻底睡眠.
3.17	唤醒 Awake	≤500mS. Remote control in sleep, trigger any button, wake up the remote control 遥控器在睡眠状况下, 触发任一按键, 启动遥控器.
3.18	OTA 功能	支持 OTA 功能; Support OTA.
3.19	支持操作系统 Android version of TV	Android9.0 及以上版本 Android 9 Pie (Supports updates to Android 12)。



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

3.20	Battery life test 电池寿命测试	Target 12 months -Idle 理想的状态是 12 个月 • Calculate based on quiescent current Target 6 months -Active 基于静止电流计算，目前是 6 个月 • Calculate based on daily key presses and BLE voice usage 基于日常按键使用和语音使用计算 ○ Example usage: 示例使用: ■ # of Key presses over BLE per day #按键每天使用次数超过语音按键 • 200 ■ Total duration of BLE voice per day 每日语音使用总时长 • 140 seconds • 20 activities with 7 s each
3.21	Short-open test for all components 所有元器件和端子进行开路测试	Trying a short-open test for all parts and terminals 试着给所有元件和端子做开路测试 ->SHOULD be free from abnormality such as firing, excessive smoking, harmful and dangerous abnormality. 不能出现起火、浓烟等有害和危险的不正常情况。
3.22	工作原理图 Schematic	详见工作原理图. Circuit schematic is described in detail below.

4、机械性能 Mechanical Capacity

S/N	项目 Item	需求 Requirement	测试条件 Test Condition
4.1	外观检查 Appearance inspection	没有明显缺点. No obvious defect	50 厘米检查外观. Distance 50 cm to check appearance
4.2	按键行程 Key stroke	0.4mm±0.3m, The keys bounce well.具体要求手感清脆，无卡键.	力点在键中心时测量. The point of force is measured at the center of the bond
4.3	按键力 Button strength	带锅仔片按键 With metal dome:300±100g 其余键按键力 Without metal dome:200±60g	产品按放在测试平台上，用直径 4 毫米针状物按压按键，并测力的大小。Put the product on the test platform, press the button with a 4mm diameter needle and test the pressure.
4.4	耐温水测试 Warm water test	检查遥控器的表面色调有无变化,字符,标志是否被擦掉. Check whether the surface color of the	用滴管将 60℃的温水,滴在遥控器的表面的三个不同部位(包括字符,图形符号部位),每部位滴



深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

		remote control has changed and whether the characters and marks have been erased.	0.1ml,面积约 1cm ² ,然后软布擦干。Drop the 60°C warm water on the surface of the remote control in three different parts (including character and graphic symbol parts) with the dropper. Drop 0.1ml on each part, with an area of about 1cm, and then wipe the soft cloth dry.
4.5	Alcohol tolerant test 耐酒精测试	->Printing SHOULD not fade .丝印要求不掉色.	99% methanol with 4.9N load 99% 甲醇, 4.9N 的荷重 Rub the printed surface with gauze containing 99% alcohol with 4.9N load at the speed 30 times/minutes 用纱布蘸 95%的酒精, 荷重 2.94N 的力以每分钟 30 次速度擦拭印字处 *on panel (在面上的印字) --- 50 times *on rubber (在导电胶上的印字) --- 200times
4.6	Eraser test 橡皮擦测试	Printing SHOULD not fade 外观无明显磨损(壳体),丝印要求不掉色.	Rub the printed surface with a eraser (type 512N) with 5N load at the speed 60 times/minutes 用橡皮擦(型号 512N)以 5N 的荷、每分钟 60 次的频率擦拭印刷表面 *on case (壳子上的印字) --- 100 times *on rubber (导电胶上的印字) --- 100times.
4.7	Pencil scratch test(Hardness of coating) 铅笔划痕测试	->SHOULD not be injured with a pencil higher than 2H. 印字不能被高于 2H 的铅笔划伤	Scratch the printing surface with a pencil with hardness more than 2H with 7.5N load at an angle of 45°at the speed of 10cm/sec. 用硬度高于 2H 的铅笔负重 7.5N 的力,以 10cm/S 的速度在角度为 45°的状态划向印字表面
4.8	Tape test 胶带测试	->Printing SHOULD not cling to the tape, and the surface of plastic SHOULD not expose. 印字不能粘在胶带上。	Paste thecellophane tape with the length longer than 30mm on printed surface and peel it off quickly at an angle of 45°. Conduct this procedure at same point twice. 用长于 30mm 玻璃纸贴在印字的表面然后在 45°角的时候快速撕下, 在同一个点上做 2 次相同的动作.



深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

4.9	Cross cut test 百格测试	->a square SHOULD not cling to the tape. 胶带上不能粘碎屑 measure force of adhesion, count number of peeled section in cutting area. 测量附着力，计数切割区域内已剥落的截面数。	Should cut lines (11×11) at intervals of 1mm with cutting knife, 用刀每隔 1mm 割一条线（11X11） Paste the scotch tape on cutting area and peel it off quickly at an angle of 45° 在被割的区域贴上透明胶带并且在 45°角快速撕下胶带。
4.10	Waterproofing test 防水测试	Pour water 200ml on the keys, specially the gap between key and key-hole for 3 seconds, afterward wipe water immediately, check the operation. Next, after disassembly, check the surface of PCBA. 3S 钟倒 200ml 水在按键上，尤其是按键孔位置，立即把水擦干，然后检查操作。 接下来，拆开遥控器，检查 PCBA 表面。 ->RCU SHOULD operate and the surface of PCBA SHOULD not get be wet. 遥控器要正常工作，PCBA 表面不能湿。	1. Place the RCU on a horizontal surface with the top cover facing up. Do not insert batteries. 1. 遥控器正面朝上平放，不要装电池。 2. Fill a beaker with 180ml of water (Colored by orange ink), then pour the water over the keys of unit evenly from 5cm height to the top of unit. 2. 用烧杯装 180ml 的水（水用橘色墨水染上色），然后把水从 5cm 的高度倒到遥控器表面。 3. Leave the units 1 minute after pouring 180ml of water. 3. 倒完 180ml 水之后把遥控器放置 1 分钟。 4. Wipe water on the surface of the units without pressing keys. 4. 把遥控器表面上的水擦掉，不要按按键。 * Do NOT tilt or reverse during wiping. 擦拭时不要倾斜或者倒置遥控器。 * Do NOT wipe water between keys and top case. 不要擦上壳或者遥控器按键之间的水。 5. After wiping, leave the units 96 hours to dry. ※ Temperature 25 °C ± 5, humidity 50% ± 10 5. 擦拭后，把遥控器放置 96 小时干燥 ※温度是 25 °C ± 5，湿度是 50% ± 10 6. Insert batteries. All keys & MIC shall work properly. 6. 插入电池。所有按键和 MIC 要正常工作。 7. Open top case to observe inside the unit. No



			wet or mark of liquid infiltration shall be observed on the PCB (circuit patterns side). 7. 打开上壳观察内部。在电路的那一面，不能有水渍如板子的痕迹。
4.11	盐水测试 Salt water test	检查遥控器的外观是否异常.字符标志应清晰可见。Check the appearance of the remote control for abnormalities. Character markings should be clearly visible.	用浸过 20%食盐水的棉球或软布,轻轻擦拭遥控器表面(包括按键字符部位)50 次。Gently wipe the surface of the remote control (including the key characters)50 times with a cotton ball or soft cloth soaked in 20% salt water.
4.12	食用油测试 Edible oil test	检查遥控器的外观是否异常字符标志是否清晰。Check the appearance of the remote control for abnormalities. Character markings should be clearly visible.	将食用油（花生油、豆油或菜籽油）用滴管滴在遥控器表面三个不同部位（包括字符、图形符号部位），每部位滴 0.1mL，面积约 1c m²,1h 后用软布擦干。The edible oil (peanut oil, soybean oil or rapeseed oil) is dripped on the surface of the remote control with a dropper at three different parts (including character and graphic symbol parts). Each part drops 0.1ml, covering an area of about 1c m². After 1hour, dry with a soft cloth.
4.13	贴纸测试要求 Label test	贴纸无脱落、翘起，撕下时无残留。No shedding and warping. No residue when torn off.	震动、跌落、高温高湿后查看标签测试结果。Check label results after vibration, drop, high temperature and humidity test.
4.14	PE 袋测试要求 . PE bag test	1. 印刷油墨不能脱落.The printing ink should not fall off. 2. PE 袋不可开裂破损。PE bags shall not be cracked or damaged	1. 环境温度 30±5 度，#EF74 橡皮擦测试：负重：500gf/cm²/ 速度：30 次/分，橡皮擦擦拭区域：30mm，次数 15 次。Ambient temperature: 30±5 ℃，#EF74 eraser test: load: 500gf/cm/speed: 30 times/min, eraser wipe area: 30mm, 15 times 2. 反复拆装袋 5 次，PE 袋不能有裂开破损。Open and pack the bag repeatedly for 5 times, PE bag cannot be cracked or damaged.
4.15	卡键测试 Button test	不卡键 Button bounce well.	用手指按压键的任何点。Press any point on the key with your finger



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

4.16	按键工作寿命 Key working life test.	->All functions SHOULD operate normally. No harmful defects to appearance and structure 所有的功能要正常，表面和结构没有严重的损坏	Press key with a specified max load 200,000times. 用规定的荷重按压按键 20W 次。
4.17	Battery door life test 电池盖寿命测试	After performing the lid opening / closing cycle, make sure that the top case surface is faced up and dropped onto the wooden board from a position of 20cm to make sure that the lid does not come off or the battery does not pop out. 在做完开关循环的动作后请确保遥控器的正面朝上然后把遥控器在距离木板 20cm 的高度跌下，遥控器跌下后电池盖不脱落或者电池不弹出来	Attach and detach the battery cover 200times. ->SHOULD have a designated holding force 连接和拆卸电池盖 200 次 应该有个设定的夹持力
4.18	电池卡扣可靠性 Battery buckle reliability test	不允许电池脱漏，且保持遥控器连接功能正常。 Do not allow the battery to leak, and keep the connection function of the remote control normal.	1.取下电池后盖；2.装电池；3.用遥控器两侧各敲击桌面(5~10cm 高)5 次。1、Remove the battery cover; 2、Install batteries; 3. Tap the desktop (5-10cm high) for 5 times on both sides of the remote control.
4.19	电池装入取出寿命 Battery spring life	1. 测试完成遥控器功能正常； After testing, the remote control functions normally ;2. 电池弹片无损坏及形变. Battery spring without damage and deformation.	以每分钟 4~5 次的速度连续插入，装入取出电池 500 次后检查应无异常. At the rate of 4~5 times per minute, continuous insertion, loading and removing the battery for 500 times after inspection should be no abnormal.
4.20	声音要求 Sound test	遥控器晃动是不能有异响。 Remote control should not have abnormal sound when shaking.	遥控器晃动，近距离听有无异响。 Remote control shaking should not have abnormal sound.
4.21	Drop test (Normal height) 跌落测试（正常高度）	没有可见的损坏或功能失效->SHOULD meet the electrical performance after drop test. 测试后要满足电气性能要求 SHOULD be free from danger such as electrical shock, fire, etc. 不能出现起火、电击等危险情况。 SHOULD be free from opening the joint of caases, pattern peeling off, cracks, etc. 遥控器遥控器不能上下壳分开，不能有其它部件脱落，裂纹等	Drop the RCU onto a wooden board (thickness:3cm) from 100cm height. Drop the RCU with the battery inserted. 将遥控器装上电池，从 100cm 的高度跌落到 3cm 厚的木板上。 3times per unit * 2units (1st: smallest/second small/largest plane, 2nd: oppsite planes) 2 个遥控器，每个遥控器跌 3 次（第一个：最小面、次小面、最大面 第二个：另外一面）



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

4.22	Drop test (Abnormal height) 跌落测试(非正常高度)	Drop the RCU onto concrete- or asphalt- floor from 150cm height, about the weakest planes of RCU in the Normal height Drop test 将遥控器最弱那面从 150cm 高度跌下, 跌在混凝土或者沥青地面上 ->SHOULD be free from abnormality such as scattering of broken cabinet etc., or damage on connected set.	不可以有遥控器结构破损, 遥控器零件散落等连接性的问题发生 And the edges of broken cabinet should not be sharp. *But, the damage on function can be accepted. 断裂的结构件边缘不能是锋利的。 遥控器功能性问题可以接受。
4.23	Drop test in packing 带包装的跌落测试	->SHOULD meet the electrical and mechanical performance mentioned in a specification. 需要满足在规格书中提到的规格	Drop a carton box filled with RCUs from the specified height. 跌落测试规格如下: Height : 80cm (<10kg) 65cm (10kg=< <20kg) *2 corners (2 角), 2 ridges (2 脊), 6 planes (6 面)
4.24	包装运输试验: 振动试验 Package transportation test: vibration test	没有功能失效或材料损坏. No functional failure or material damage.	整箱包装的振动测试: 将产品放置在包装箱内。将此包装箱放置在符合以下条件的振动装置上: 频率: 7Hz 加速度: 1.05g 在三个轴方向上测试, 每个方向持续 30min。Vibration test for FCL package: place the product in the package. Place the box on a vibrating device that meets the following conditions: frequency: 7Hz acceleration: 1.05g test in three axis directions, each direction lasts for 30min.
4.25	裸机振动 Single vibration.	a 功能正常 b 无主要机械不良 c 静动态电流满足规格. No functional failure or material damage.	将成品机固定在振动台上, 然后按以下条件测试: Fix the finished machine on the shaking table and then test according to the following conditions: *频率范围 frequency range: 10~55Hz *振动幅度 vibration amplitude: 1.5mm * 振 动 周 期 vibration cycle: 1 分钟 (10~55~10Hz) *振动方向 vibration direction: X,Y&Z 方向 *振动时间 vibration time: 每个方向 2 小时(总



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

			共 6 小时) *测试后,在室温中放置 30 分钟,然后检查外观和电气性能. after testing, leave it at room temperature for 30 minutes, then check appearance and electrical properties.
4.26	包装运输试验: 跌落试验 Packing and transportation test: drop test	没有功能失效或材料损坏 No functional failure or material damage	将整箱产品从 60cm 高度跌落到地面, 对其中三个轴向, 1 边和 1 个角进行试验. FCL products were dropped from a height of 60cm to the ground, and three axial directions, one side and one Angle were tested.
4.27	Key strength or Key over load test 按键抗压 测试	Please change to "Add a vertical load(50N) to a key top for 5 seconds". 在按键上增加一个 50N 的垂直力, 持续 5S, 遥控器的壳子和内部元器件不可以裂缝和破损	Add a vertical load(50N) to a key top for 5 seconds ->A case and inside parts SHOULD not be cracked and broken 在按键上增加一个 50N 的垂直力, 持续 5S.
4.28	抗扭强度 Torsional strength test.	无机壳爆开, 无"滋滋"声,无机械损伤,功能正常。 No housing burst, no "sizzle", no mechanical damage, function normal.	以 5N 的力矩扭机身 1000 次. Twist the remote control 1000 times with 5N torque.
4.29	Electrostatic destruction test 静电破坏测试	(1)Discharge electricity to the joint between Upper case and Lower case. 对着上壳和下壳之间的缝隙进行放电 (2)Discharge electricity to the terminal in a battery box. 在电池仓的两端进行放电 *Probe Condition: C=200pF/R=100 Ω ->150pF/330 Ω 针头条件: C=200pF/R=100 Ω ->150pF/330 Ω ->The product SHOULD not be damaged. 产品不能损坏	>from 1kV to specified voltage raising 1kV step 从 1KV 做为起点, 1KV 1KV 的往上增加, 直到要求的电压值 >each voltage shall be discharged 10 times 每个电压值下放电 10 次 >Dis-electrify RCU after each discharge 每次放电后等静电干净后 [Air discharge SPEC]空气放电 MALFUNCTION (故障) ±15kV DESTRUCTION (摧毁) ±18kV *Test with the battery inserted 装上电池测试 [Contavt discharge SPEC (Battery Terminals)] 接触放电规格 (电池两端) MALFUNCTION (故障) ±5kV DESTRUCTION (摧毁) ±5kV



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

			*Discharge with the battery removed 不带电池测试 >If the RCU recovers by reinsertion of the battery, it is DESTRUCTION. 如果遥控器从新装上电池后才回复，这就是损毁。 >If the pairing memory is erased, it is DESTRUCTION. 如果配对信息擦除，这就是损毁。 >If RCU reconnects automatically after disconnecting with the TV, it is MALFUNCTION. 如果遥控器于电视机断连后又从新自动回连，这是故障
--	--	--	--

5、环境测试 Environmental Test

序号 No.	项目 Item	测试要求 Test Requirements
5.1	温度变化试验 Temperature change test	遥控器在装电池，不包装的状态下,放入具有室温的试验箱内,试验箱内的温度以 $1\pm0.5^{\circ}\text{C}/\text{min}$ 的降温速率(5min 内的平均速率)降至 $-10\pm3^{\circ}\text{C}$ 试验箱内达到稳定温度后,恒温 3H,然后试验箱内的温度再以 $1\pm0.2^{\circ}\text{C}/\text{min}$ 的升温速率(5min 内的平均速率)升高到 $40\pm2^{\circ}\text{C}$ 等试验箱内达到稳定温度后,持续 3h,然后试验箱内的温度再以 $1\pm0.2^{\circ}\text{C}/\text{min}$ 的降温速率内(5min 的平均速率)降至试验室环境温度值以上,构成一个试验循环依次连续进行 20 个试验循环试验结束后,且试验箱内的温度达到稳定的试验室环境温度后,取出遥控器。20 个试验循环试验结束后,且试验箱内的温度达到稳定的试验室环境温度后,取出遥控器检查遥控器的各项功能是否正常。The remote control is put into a test box at room temperature with battery and without packaging. The temperature in the test box is cooled at a rate of $1\pm0.5^{\circ}\text{C}/\text{min}$ (5min)) at an average rate of the drop to $10 + 3^{\circ}\text{C}$ - test after reaching a stable temperature in the oven, constant temperature for 3 h, and then test the temperature in the cabinet to 1 plus or minus $0.2^{\circ}\text{C} / \text{min}$ heating rate (5 min) at an average rate of increase to 40 plus or minus 2°C after test the reach a stable temperature in the cabinet, for 3 h, and then test the temperature in the cabinet to 1 plus or minus $0.2^{\circ}\text{C} / \text{min}$ in the cooling rate (5 min) at an average rate fell to a lab environment temperature above, form a test cycle in turn for 20 consecutive test cycle after the test, and test the temperature in the cabinet after reaching stable laboratory environment temperature, take out the remote control Device. After the cycle of 20 tests is completed and the temperature in the test box



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

		reaches the stable laboratory environment temperature, take out the remote controller and check whether the functions of the remote controller are normal.
5.2	恒定湿热试验 Constant temperature and humidity test	遥控器在不包装不装电池的状态下,放入具有室温的试验箱内,然后将箱温调节至 $40\pm 2^{\circ}\text{C}$, 当遥控器达到温度稳定后再加湿度在相对湿度为 93%,搁置 96H,先把试验箱内的相对湿度在 0.5h 内降低到 $75\%\pm 3\%$,然后在 0.5H 内把试验箱内的温度调到正常试验大气条件下,取出遥控器。遥控器恢复 4H 后,检查遥控器的各项功能是否正常.Remote control under the conditions of the packing is not install batteries, in a room temperature test box, then put the box temperature adjusting to $40 + 2^{\circ}\text{C}$, after reaching a stable temperature and humidity when the remote control to the relative humidity is 93%, put aside 96 h, the test of the relative humidity in the first cut to 75% within 0.5 h + / - 3%, then within 0.5 h to test the temperature in the cabinet to atmospheric conditions, normal test out the remote control. After the remote control is restored for 4 hours, check whether the functions of the remote control are normal.
5.3	High temperature storage test 高温储存测试	Expose to a constant temperature and humidity of $60\pm 2^{\circ}\text{C}$ for 96h without load. 把遥控器暴露在恒温恒湿 $60\pm 2^{\circ}\text{C}$ 的环境中 96 小时, 不带任何负重。 Perform measurements after leaving at normal temperature and humidity for 1h. 取出遥控器放在常温状态中静置 1 小时。 ->The RCU SHOULD operate normally. 遥控器正常工作
5.4	Low temperature storage test 低温储存测试	Leave RCU under the condition; -20°C for 96 hours, and leave it under standard condition for 1 hour, and test the performance. 把遥控器放在如下的条件中: -20°C 96 小时, 然后取出放到常温状态下 1 小时, 然后测试遥控器功能。 ->The RCU SHOULD operate normally. 遥控器正常工作
5.6	高低温操作和潮态耐受 High and low temperature operation and tide tolerance test	遥控器在装电池的状态下: Remote control with battery: 1.温箱室温下降到 -10°C , 保持 5 小时 (在 3 小时左右拿出遥控器迅速进行功能检查、以及触控部分的灵敏度、反应速度检查) Drop the temperature of the temperature box to -10°C and keep it for 5 hours (about 3 hours, take out the remote control and quickly check the function, as well as the sensitivity and reaction speed of the touch control part) 2.低温状态下马上拿到 25°C , 80%湿度环境, 3 分钟内表面结露状态下进行测试; At low temperature, 25°C was immediately obtained, 80% humidity was obtained, and the surface was dewy within 3 minutes for testing; 3.上升温度到零上 45°C , 60%湿度 (温度保持 3 小时左右同样检查遥控器功能、按键手感以及触控部



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

		分功能、灵敏度) 测试完成后行为模式正常, 无误触, 反应慢。The rising temperature is 45 degrees above zero,60% humidity (keep the temperature for 3 hours or so and check the function of the remote control, feel of the keys and the function and sensitivity of the touch control part), the behavior mode is normal after the test is completed, without accidental trigger or slow reaction.
5.7	Thermal shock test 热冲击测试	Conduct the heat shock(-20℃ $\leftrightarrow$ +60℃) cycle 100+/-5cycle. Measure performance after leaving under standard condition for 1 hour 进行冷热冲击测试(-20℃ $\leftrightarrow$ +60℃) 100+/- 5 个循环。在常温中静置 1 小时后测试功能。 ->The RCU SHOULD operate normally. 遥控器要正常工作
5.9	盐雾测试 Salt Spray test	1.将试件置于盐雾柜内, 并在温度 35℃, 盐雾浓度 5%之测试条件下, 保持 24 小时 2. 以上测试完成后将测试样品于常温静置 2 小时; specimen in the salt spray cabinet and keep it for 24 hours under the test conditions of 35℃ and 5% salt spray concentration 2.After completion of the above tests, the test samples should be left at room temperature for 2 hours. 检查 Check: 1.金属电镀件表面镀层应无明显发暗, 无鼓泡、脱落、龟裂、露底等缺陷; 2. 铝或铝合金镀阳极氧化膜表面无白色腐蚀物; 铜或铜合金镀镍+铬表面无浅绿色腐蚀物; 锌或锌合金镀镍+铬表面无灰黑色腐蚀物及鼓泡; coating on the surface of metal electroplating parts shall be free from obvious darkening, bubbling, peeling, cracking, and other defects; 2. No white corrosion on the surface of anodic oxidation film of aluminum or aluminum alloy plating; Copper or copper alloy nickel + chromium plating surface without light green corrosion; Zinc or zinc alloy nickel + chromium plating surface without black corrosion and bubbling;

6、产品认证要求 Certification

序号 No.	项目 Item	规格 Specs
6.1	ROHS	符合 ROHS 要求。
6.2	FCC/IC	FCC /IC Certification
6.3	BQB	Bluetooth SIG certification




四、产品效果图 Product Cosmetics drawing



NO.	A1	A2	A3	A4	A5
Component 组件	Keypad 按键	Keypad 塑胶按键	Top cover 面壳	Bottom cover 底壳	Battery cover 电池盖
Material 材质	Rubber/硅胶	ABS	ABS	ABS	ABS
Process 处理	Oil pressure 油压	Texture 晒纹(Nihon Etching HN-DS06)	Texture 晒纹(Nihon Etching HN-DS12)	Injection + High Glossy + Texture 注塑+抛光+晒纹 晒纹(Nihon Etching HN-DS12)	Injection + High Glossy + Texture 注塑+抛光+晒纹 晒纹(Nihon Etching HN-DS12)
Surface effect 表面处理	Graphic + soft tuch 丝印 + 手感油	Graphic 丝印	Graphic 丝印	High Glossy + Matte 镜面高光+哑面	High Glossy + Matte 镜面高光+哑面
Color		Injection color: PANTONE BLACK C Graphic color: PANTONE 427 C	Injection color: PANTONE BLACK C Graphic color: PANTONE 427 C	Injection color: PANTONE BLACK C	Injection color: PANTONE BLACK C




深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

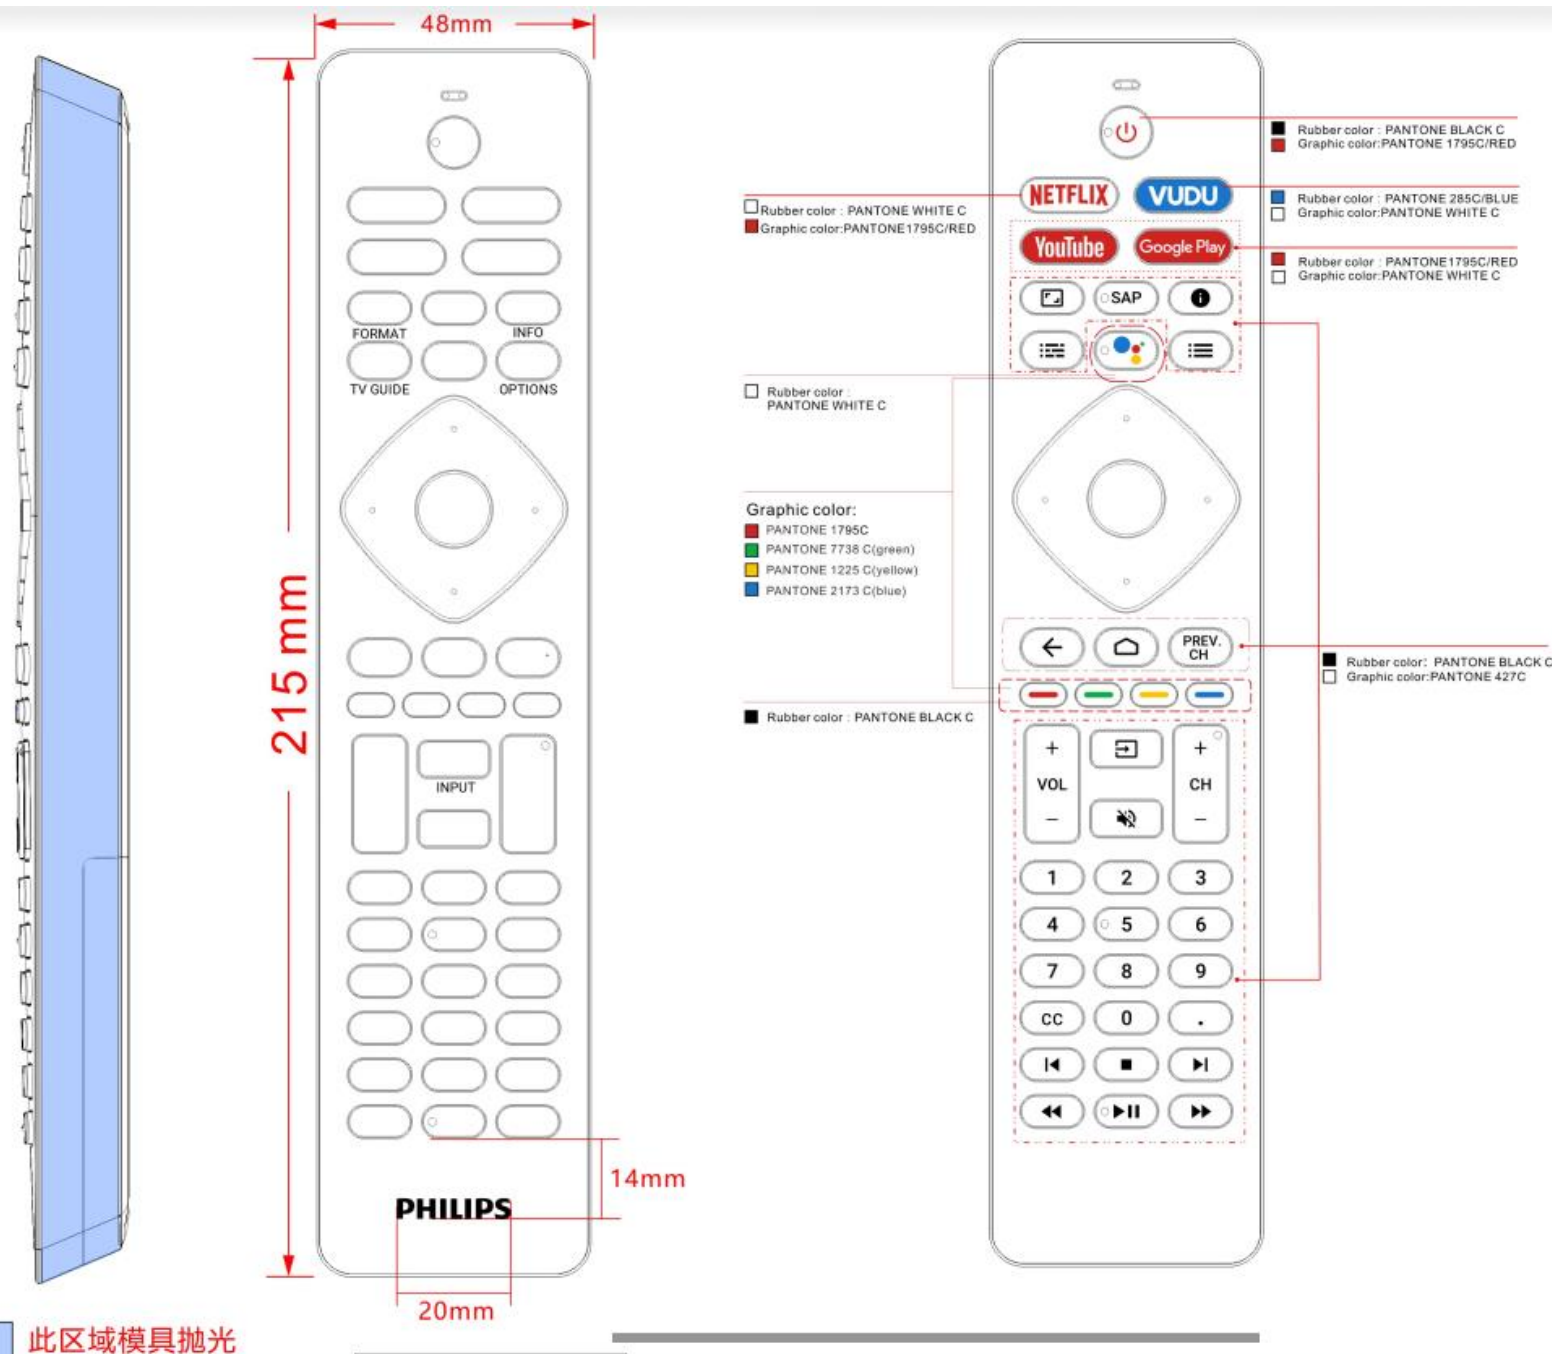

PHILIPS

LOGO尺寸: 20*3.7mm
LOGO左右居中

Injection :PANTONE BLACK C
Graphic color:PANTONE 427C



Injection color:
PANTONE BLACK C
Graphic color:
PANTONE 427 C



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

五、按键码值 Code Table

Peak Wavelength	TYP 940nm
Format	RC6 format: In addition to specification of "RC6 mode 0", the followings should also be satisfied.
Carrier Frequency	36kHz $\pm$ 0.36kHz
Duty	32%

[Mic. Key] send key-code by BLE

[the other Keys] send key-code by IR

Philips RCU Code Table

Position	No.	Key name	IR	BLE	USB HID Usage Name	
			RC6 format Mode = 0, Custom=0x00	Parameters (Usage ID)	Consumer Page (0x0C)	Keyboard Page (0x07)
Front	1	Power	0x0C	-	-	-
	2	NETFLIX	0x76	-	-	-
	3	VUDU	0x77	-	-	-
	4	YouTube	0x79	-	-	-
	5	Google Play	0x7B	-	-	-
	6	FORMAT	0xF5	-	-	-
	7	SAP	0x4E	-	-	-
	8	INFO	0x0F	-	-	-
	9	GUIDE	0xCC	-	-	-
	10	Google Assistant (Voice)	-	0x0221	AC Search	-
	11	OPTIONS	0x40	-	-	-
	12	UP	0x58	-	-	-
	13	LEFT	0x5A	-	-	-
	14	OK	0x5C	-	-	-
	15	RIGHT	0x5B	-	-	-
	16	DOWN	0x59	-	-	-
	17	BACK	0x41	-	-	-
	18	HOME	0x54	-	-	-
	19	PREV.CH	0x9F	-	-	-
	20	RED	0x6D	-	-	-
	21	GREEN	0x6E	-	-	-



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.



22	YELLOW	0x6F	-	-	-
23	BLUE	0x70	-	-	-
24	VOL+	0x10	-	-	-
25	SOURCE	0x38	-	-	-
26	CH+	0x20	-	-	-
27	VOL-	0x11	-	-	-
28	MUTE	0x0D	-	-	-
29	CH-	0x21	-	-	-
30	1	0x01	-	-	-
31	2	0x02	-	-	-
32	3	0x03	-	-	-
33	4	0x04	-	-	-
34	5	0x05	-	-	-
35	6	0x06	-	-	-
36	7	0x07	-	-	-
37	8	0x08	-	-	-
38	9	0x09	-	-	-
39	CC	0x46	-	-	-
40	0	0x00	-	-	-
41	DOT	0xD9	-	-	-
42	SKIP DOWN	0x4D	-	-	-
43	STOP	0x31	-	-	-
44	SKIP UP	0x4C	-	-	-
45	REWIND	0x2B	-	-	-
46	PLAY/PAUSE	0x2C	-	-	-
47	FFWD	0x28	-	-	-
Combination & Long press	A01	[OK + BACK] for trigger Bug Report	0x83	-	-
	A02	[DOWN + BACK] For trigger Talk Back	0xDA	-	-
	A03	[SAP+ CC] Unpairing	0x7A		
-	B01	release Key	-	0x0000	Unassigned Reserved



六、产品功能 Software function

1.LED Pattern definitions(Orange) 指示	[Blink] 250ms ON / 250ms OFF ,提示蓝牙连接状态. [Fast Blink] 150ms ON / 150ms OFF, 提示遥控器在广播状态, BLE 未连接.
1. Pairing 配对	[Start] ① Press any buttons when bonding cache is NULL. ② Or Press and hold [Google Assistant] and [VOL-] key for 3 seconds [Pairing timeout] ① 30sec [LED behavior] - LED blink while pairing process - LED fast blink 5 times when pairing completion
2. UnPairing 取消配对	[Start] - Press and hold [SAP] and [CC] key for 3 seconds [LED behavior] - LED keep to light up fast blink 9 times when UnPairing completion [Code sending] - Send code: 0x7A by IR when UnPairing completion
3. Device Bonding	-Remote only supports one bonded host -Existing bond severed only after the new bonding is successfully completed -Unpairing from the Host clears bonding cache -Operating Unpairing key function clears bonding cache
4. Voice search	[Start] - Push [Google Assistant] key [LED behavior] - LED turns on after ACK from host when voice search is ready - LED turns off after end of speech is detected from the host, or - LED turns off after 30 seconds of time out
5. Bug Report	[Start] - Output the key code during pressing and holding [OK] and [BACK] [Code sending] - Send code: 0x83 by IR
6. Talk Back	[Start] - Output the key code during pressing and holding [DOWN] and [BACK]



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

	[Code sending] Send code: 0xDA by IR
7. BLE/IR Switching	[UnPaired status] * Same state as "1. Pairing ①". - For MIC Button : no operation - For other Buttons : IR send - When any buttons press 1. Undirected Advertising : 30sec [Disconnected status] - For MIC Button : no operation - For other Buttons : IR send - When any buttons press 1. Reconnecting : 30sec [Connected status] - For MIC Button : BT send - For other Buttons : IR send
8. UVLO	If the RCU is in a low power state, it will shut down directly without warning (warning=LED blink). V_shutdown = 1.9V V_recovery = 2.1V

IC WARNING:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



八、产品结构尺寸图纸 Product structure dimension drawing

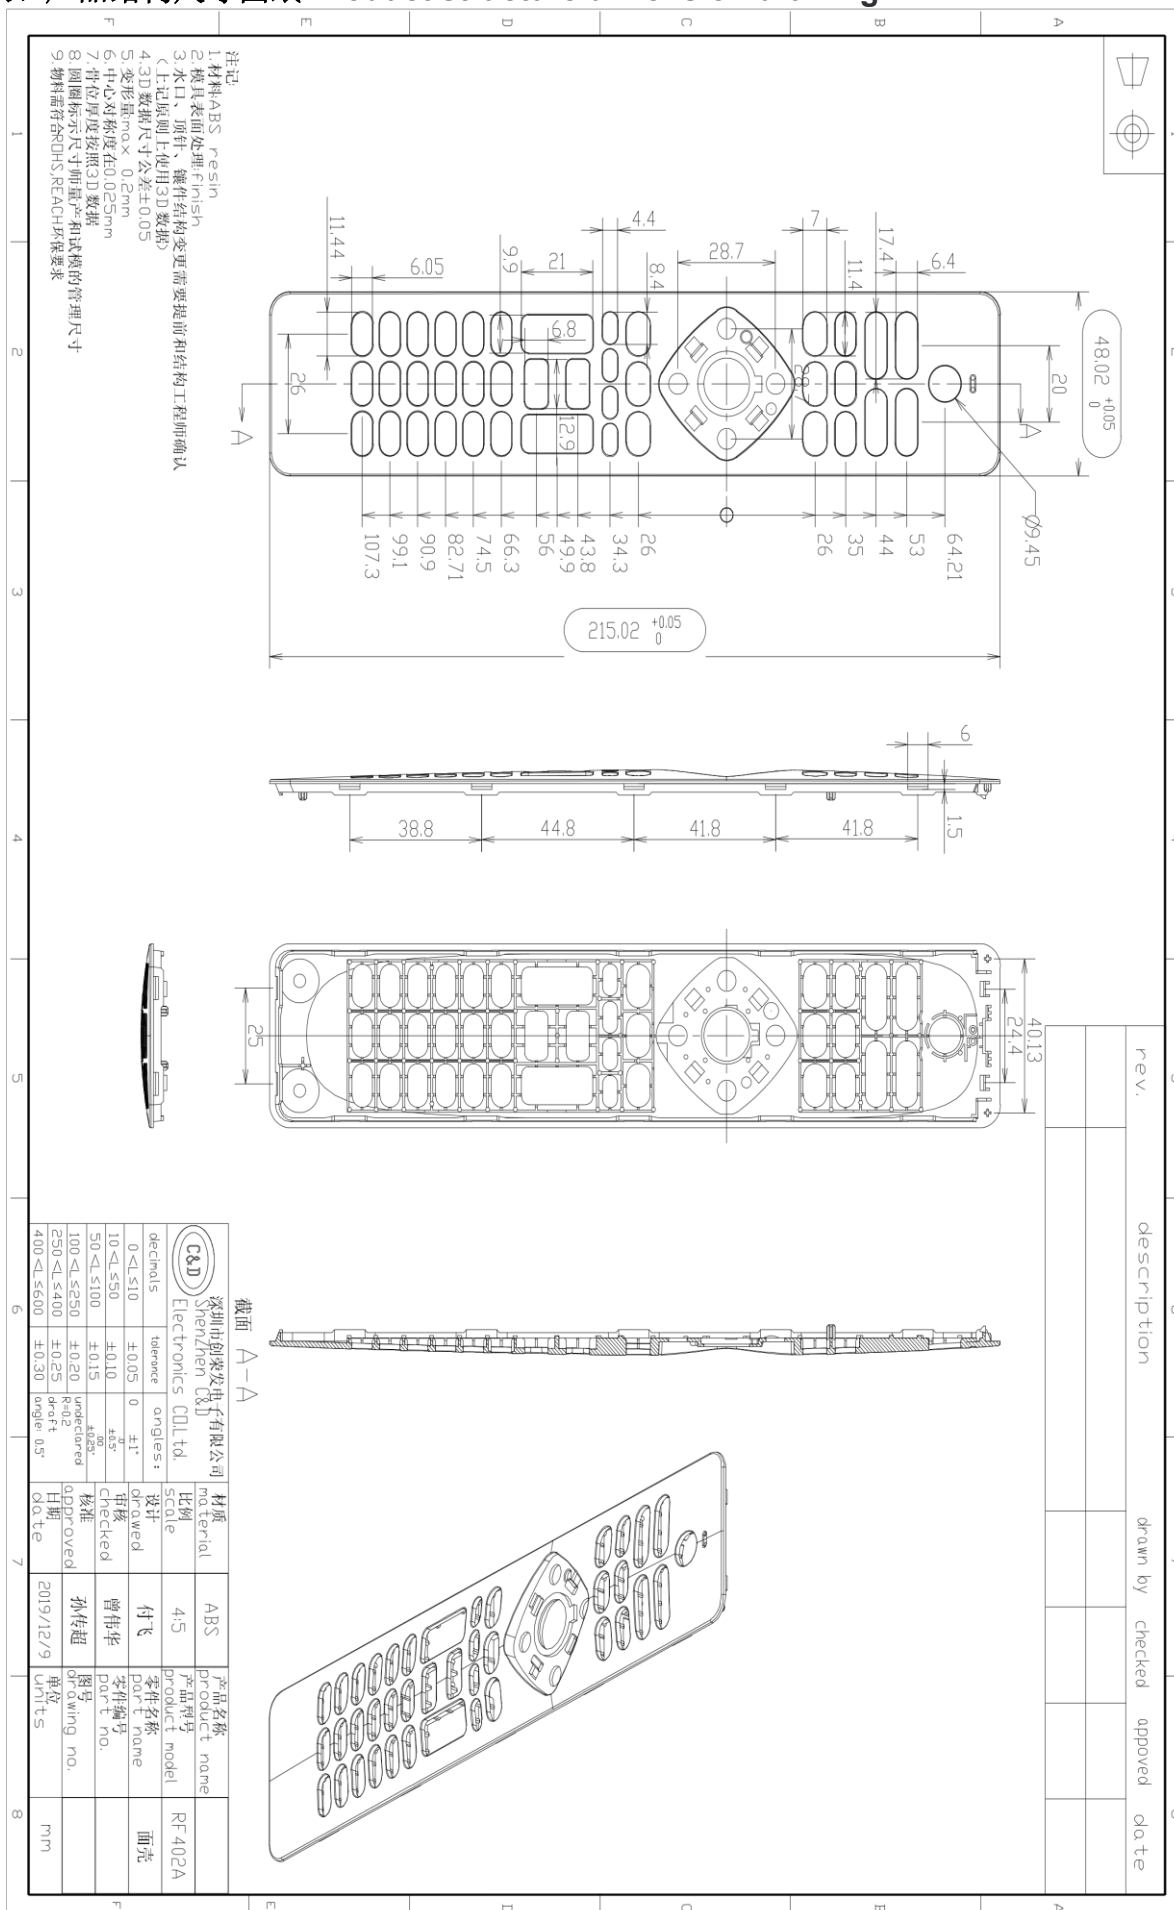






深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

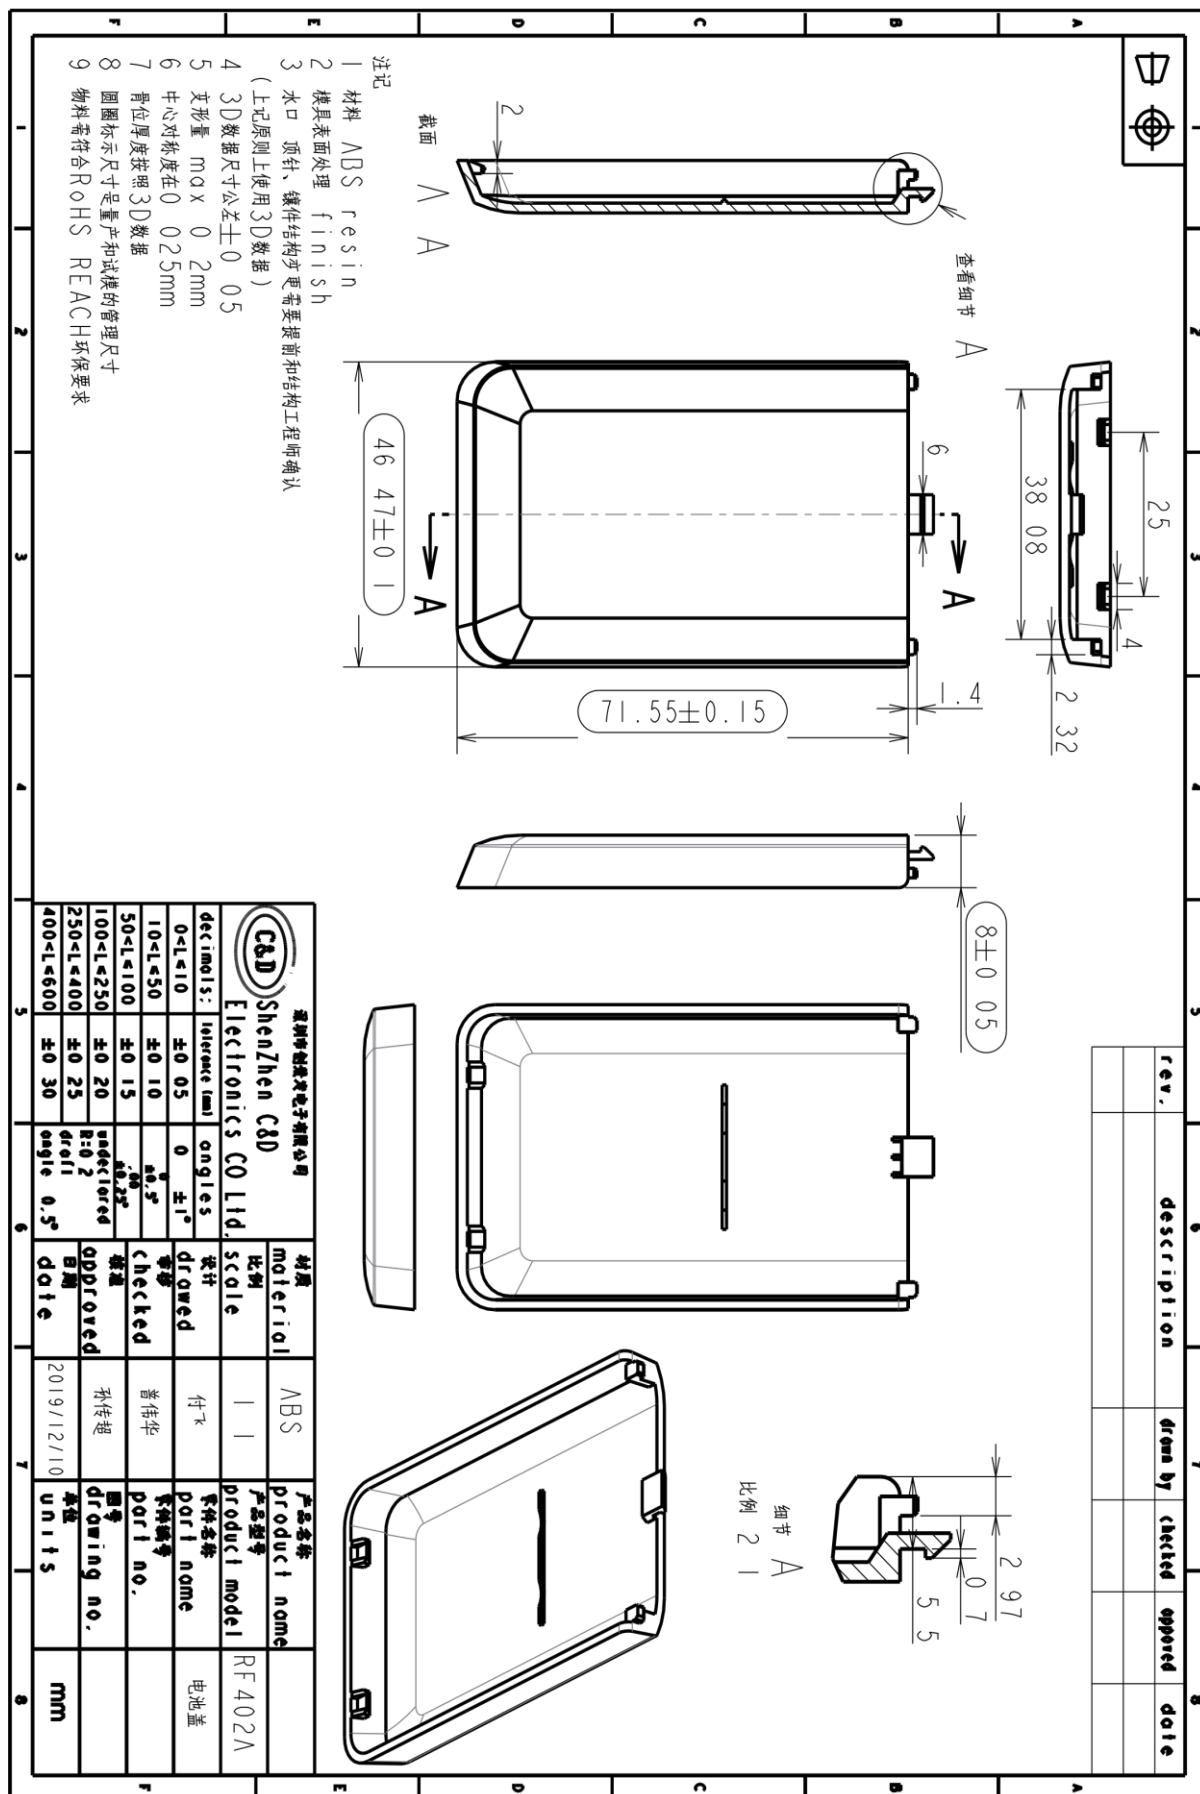



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

rev.	description	drawn by	checked	approved	date

截面

1.6

24 4 6

40 13

3.56

2 Ø 2.2

12°

45 35

12.62±0.1

5.53±0.05

34

6.32

0.75

1.2

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

1001

1002

1003

1004

1005

1006

1007

1008

1009

1010

1011

1012

1013

1014

1015

1016

1017

1018

1019

1020

1021

1022

1023

1024

1025

1026

1027

1028

1029

1030

1031

1032

1033

1034

1035

1036

1037

1038

1039

1040

1041

1042

1043

1044

1045

1046

1047

1048

1049

1050

1051

1052

1053

1054

1055

1056

1057

1058

1059

1060

1061

1062

1063

1064

1065

1066

1067

1068

1069

1070

1071

1072

1073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086

1087

1088

1089

1090

1091

1092

1093

1094

1095

1096

1097

1098

1099

1100

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

1136

1137

1138

1139

1140

1141

1142

1143

1144

1145

1146

1147

1148

1149

1150

1151

1152

1153

1154

1155

1156

1157

1158

1159

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1170

1171

1172

1173

1174

1175

1176

1177

1178

1179

1180

1181

1182

1183

1184

1185

1186

1187

1188

1189

1190

1191

1192

1193

1194

1195

1196

1197

1198

1199

1200

1201

1202

1203

1204

1205

1206

1207

1208

1209

1210

1211

1212

1213

1214

1215

1216

1217

1218

1219

1220

1221

1222

1223

1224

1225

1226

1227

1228

1229

1230

1231

1232

1233

1234

1235

1236

1237

1238

1239

1240

1241

1242

1243

1244

1245

1246

1247

1248

1249

1250

1251

1252

1253

1254

1255

1256

1257

1258

1259

1260

1261

1262

1263

1264

1265

1266

1267

1268

1269

1270

1271

1272

1273

1274

1275

1276

1277

1278

1279

1280

1281

1282

1283

1284

1285

1286

1287

1288

1289

1290

1291

1292

1293

1294

1295

1296

1297

1298

1299

1300

1301

1302

1303

1304

1305

1306

1307

1308

1309

1310

1311

1312

1313

1314

1315

1316

1317

1318

1319

1320

1321

1322

1323

1324

1325

1326

1327

1328

1329

1330

1331

1332

1333

1334

1335

1336

1337

1338

1339

1340

1341

1342

1343

1344

1345

1346

1347

1348

1349

1350

1351

1352

1353

1354

1355

1356

1357

1358

1359

1360

1361

1362

1363

1364

1365

1366

1367

1368

1369

1370

1371

1372

1373

1374

1375

1376

1377

1378

1379

1380

1381

1382

1383

1384

1385

1386

1387

1388

1389

1390

1391

1392

1393

1394

1395

1396

1397

1398

1399

1400

1401

1402

1403

1404

1405

1406

1407

1408

1409

1410

1411

1412

1413

1414

1415

1416

1417

1418

1419

1420

1421

1422

1423

1424

1425

1426

1427

1428

1429

1430

1431

1432

1433

1434

1435

1436

1437

1438

1439

1440

1441

1442

1443

1444

1445


1446



1



深圳市创荣发电子有限公司

SHENZHEN C&D ELECTRONICS CO., LTD.

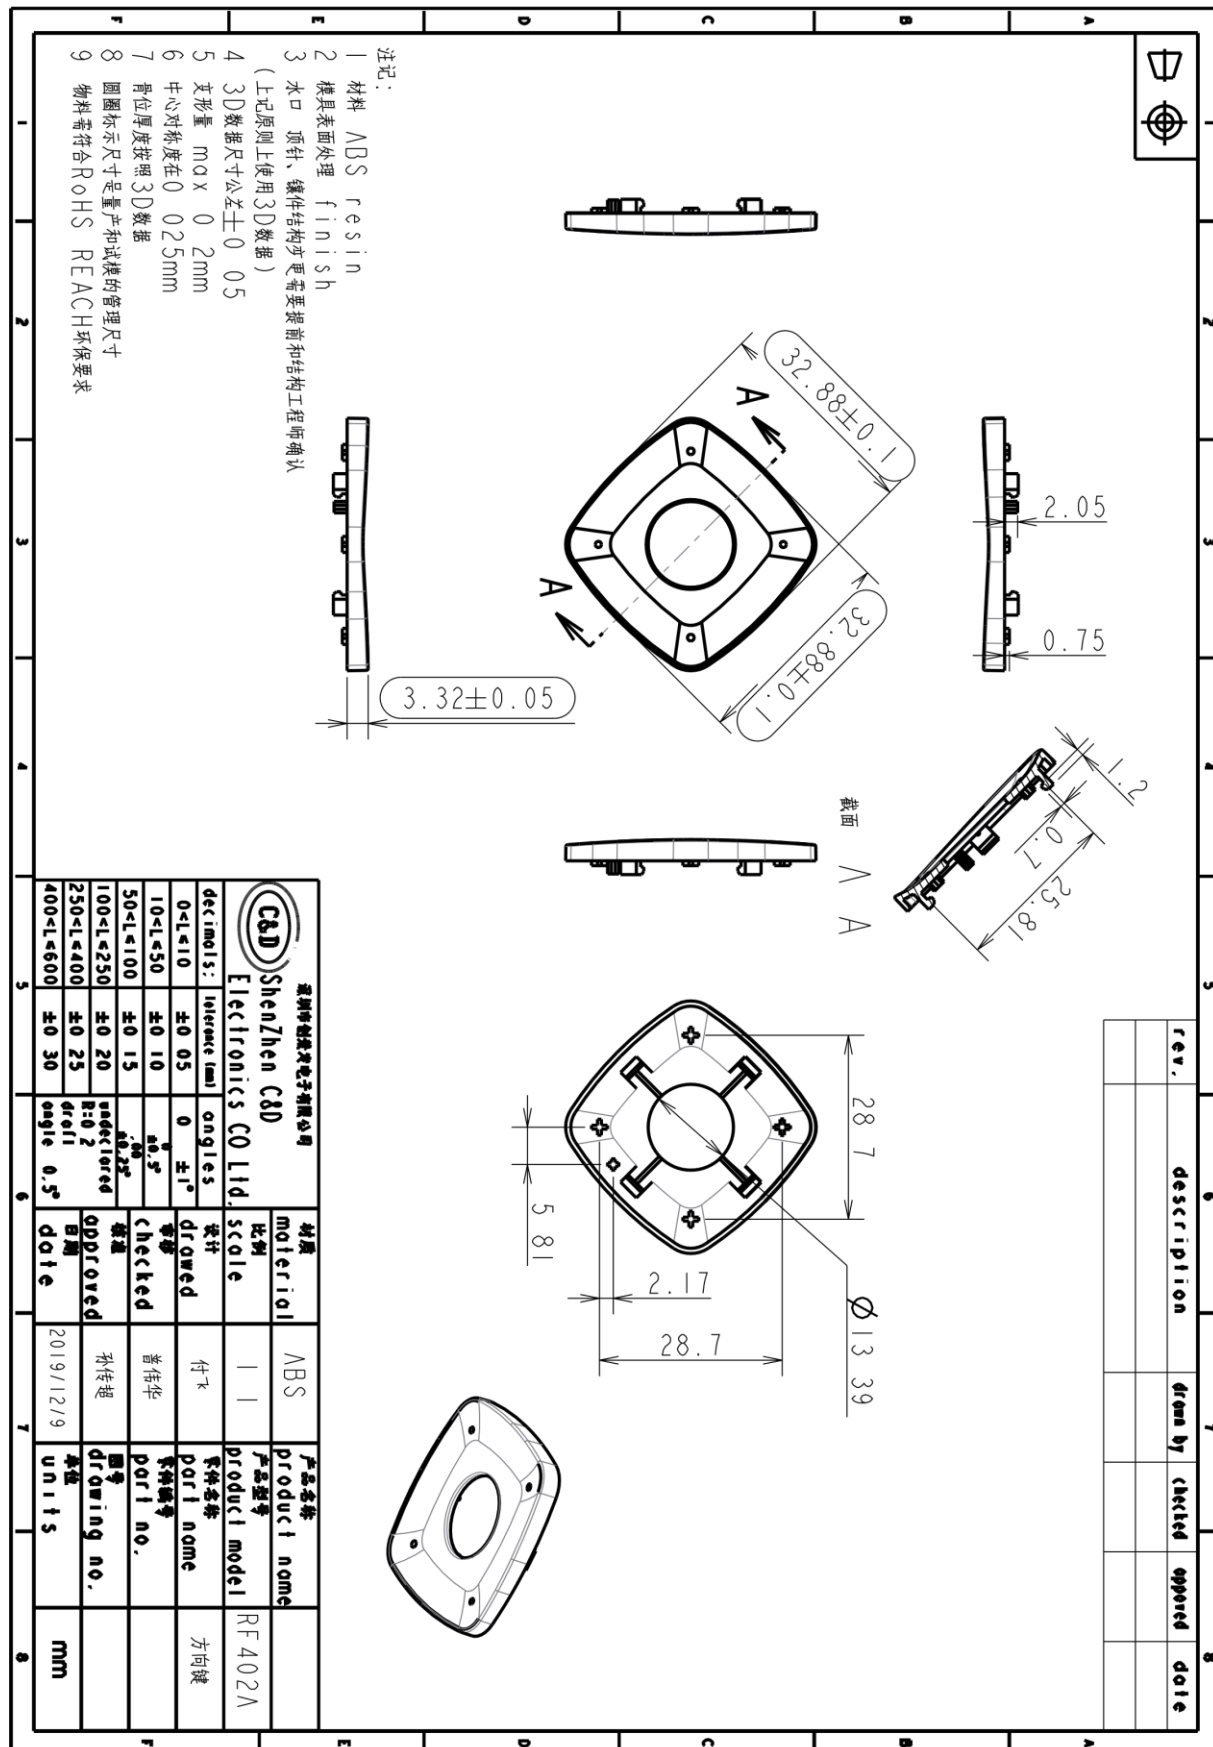

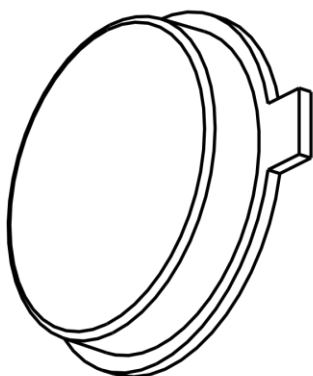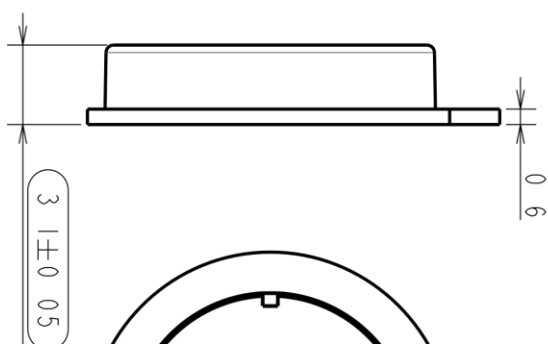

	6	7	8		
rev.	description	items by	checked	approved	date

注记:

- 1 材料 ABS resin
- 2 模具表面处理 finish
- 3 水口 顶针、铸件结构牙 是否需要提前和结构工程师确认

(上記原則上使用3D数据)

- 4 3D数据尺寸公差 ± 0.05
- 5 尺寸量 max 0.2mm
- 6 中心对称度在 0.025mm
- 7 骨位厚度按照 3D 数据
- 8 圆圈标示尺寸是量产和试模的管理尺寸
- 9 物料需符合 RoHS REACH 环保要求

 深圳创达兴电子有限公司 Shenzhen C&D Electronics CO Ltd.		材质	ABS	产品名称	
规格 dimension 0-1<=10 10<=50 50<=100 100<=250 250<=400 400<=600		比例 scale	4:1	产品型号 product model	RT402A
公差 tolerance ±0.05 ±0.10 ±0.15 ±0.20 ±0.25 ±0.30		设计 drawed	付飞	零件名称 part name	OK键
角度 angle 0° 45° 90° 120° 135° 180°		检查 checked	普伟华	零件编号 part no.	
表面粗糙度 surface R=0.2 R=0.1 R=0.05		批准 approved	马传超	图号 drawing no.	
日期 date 2019/11/29		日期 date	2019/11/29	单位 units	mm



深圳市创荣发电子有限公司 SHENZHEN C&D ELECTRONICS CO., LTD.

九、产品包装示意图 Packaging diagram

1、Certification label:

FCC ID:XXX-XXXXXX
IC:XXXXX-XXXXXX Lot-No:00001
FW:RF402A-V09 Prod.Date:02/20

1: 1

FCC ID:XXX-XXXXXX
IC:XXXXX-XXXXXX Lot-No:00001
FW:RF402A-V09 Prod.Date:02/20

1: 2

尺寸 29.5mm x 7.5mm
材质: 128g 不干胶, 光面, 附膜
条形码类型: Code 128



※ 周/年、流水号、按每次生产实际更改

2、QR code label:



2:1



1:1

条形码类型 QRCode

二维码 PE袋封口贴

尺寸: 30x15mm

材质: 铜版纸

本厂打印

二维码扫描显示内容:

Funai P/N;C&D P/N;Assembly date;Serial No
(URMT47CND001;135402A0001;2019XXXX;00000001)

(从00000001开始, 同型号一直顺延)



深圳市创荣发电子有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.






惠州创荣发实业有限公司
SHENZHEN C&D ELECTRONICS CO., LTD.

包材尺寸图:

Package material size photos:

编号: RF402A

时间: 2019/12/26

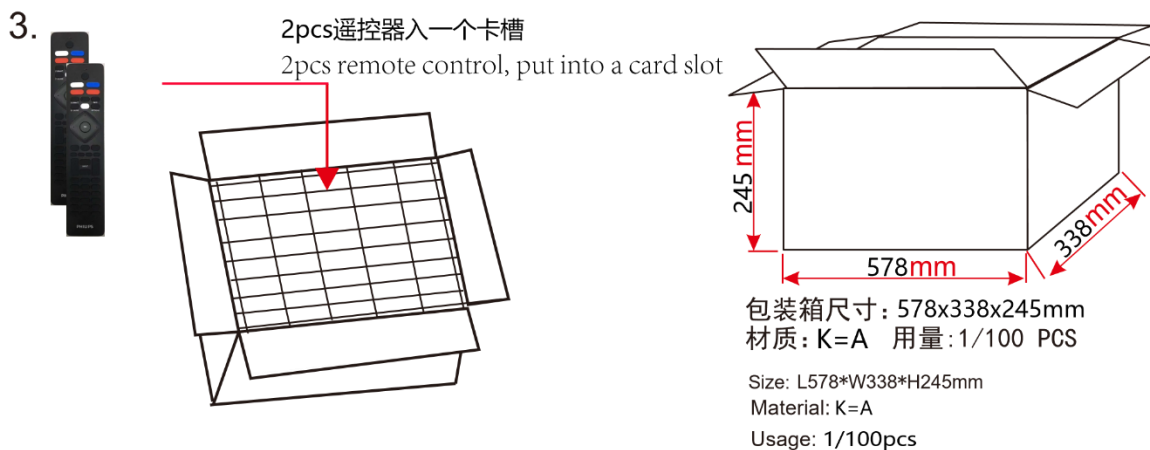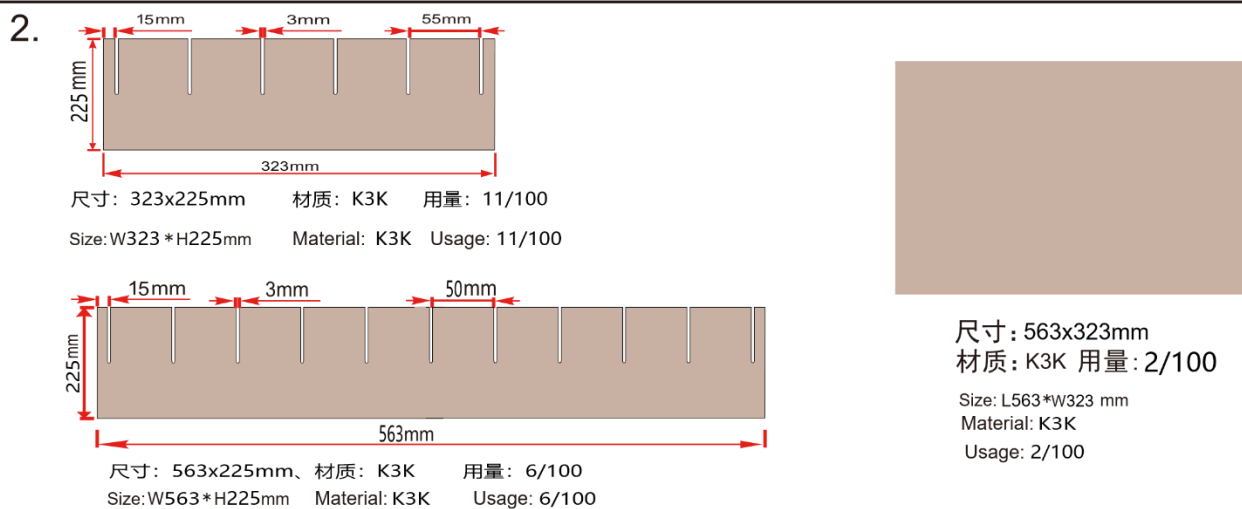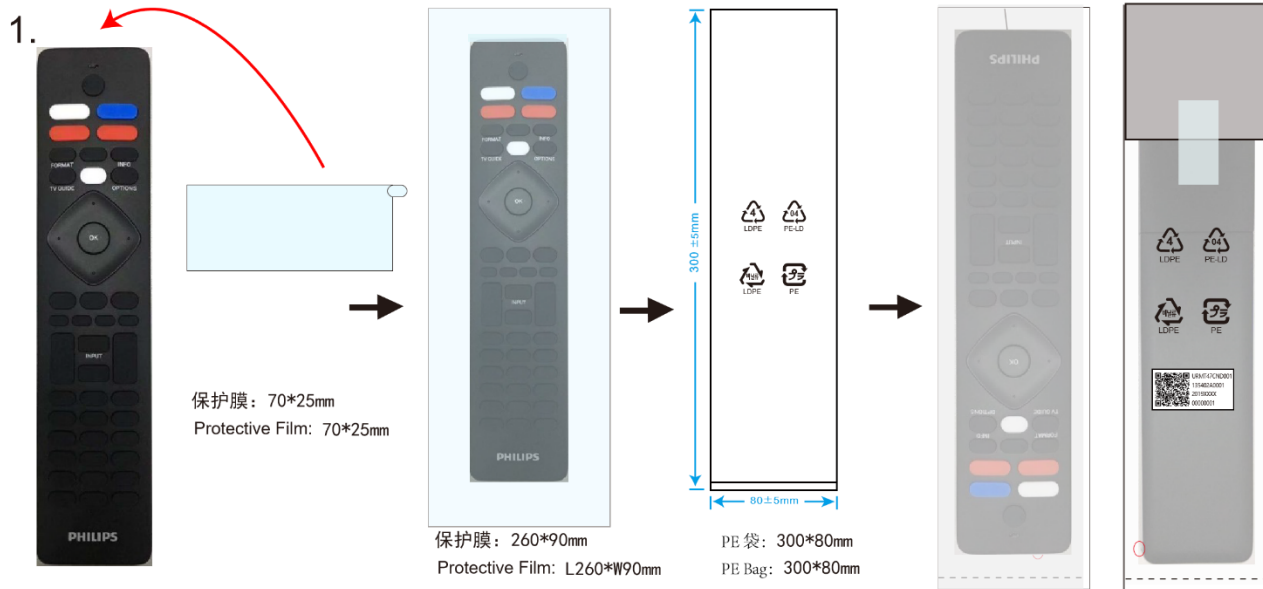

制定:
Drafted

刘阿敏

审核:
Checked

周毅

批准:
Approved

孙传超