



TEST REPORT



Report Reference Number: E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev1.0
Total Number of Pages: 121
Date of Issue: November 16, 2023

EMC Test Laboratory: **QAI Laboratories Ltd.**
Address: 3980 North Fraser Way, Burnaby, BC, V5J 5K5 Canada
Phone: (604) 527-8378
Fax: (604) 527-8368

Laboratory Accreditations (per ISO/IEC 17025:2017)



This report has been completed in accordance with the requirements of ISO/IEC 17025. Test results contained in this report are within QAI Laboratories ISO/IEC 17025 accreditations. QAI Laboratories authorizes the applicant to reproduce this report, provided it is reproduced in its entirety and for the use by the company's employees only.

Manufacturer: **Star Solutions International Inc**
Address: #120, 4600 Jacombs Rd
Richmond, BC V6V 3B1

Equipment Tested: LTE Base Station: Band Class 25
Model Number(s): NL-2511
FCC ID: S52-7-12-25-00-1
ISED ID: 8076A-71225001



REVISION HISTORY

Date	Report Number	Details	Author's Initials
October 18, 2023	E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev0.0	Initial draft	JS
November 1, 2023	E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev0.1	Draft	AH
November 8, 2023	E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev0.2	Draft	AH
November 9, 2023	E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev0.3	Draft	AH
November 16, 2023	E10599-2302_StarSolutions_iCell COMPAC-N LTE BC25_Rev1.0	Final	AH
All previous versions of this report have been superseded by the latest dated revision as listed in the above table. Please dispose of all previous electronic and paper printed revisions accordingly.			

REPORT AUTHORIZATION

The data documented in this report is for the test equipment provided by the manufacturer and the results relate only to the item tested. The tests were conducted on the sample equipment as requested by the manufacturer for the purpose of demonstrating compliance with the standards outlined in Section I of this report as agreed upon by the Manufacturer under the quote 23RH09011.

The Manufacturer is responsible for the tested product configurations, continued product compliance, and for the appropriate auditing of subsequent products as required.

This report may comprise a partial list of tests that are required for FCC and ISED. A Declaration of Conformity can only be produced by the manufacturer. This is to certify that the following report is true and correct to the best of our knowledge.

This report is the confidential property of the client addressed. The report may only be reproduced in full. Publication of extracts from this report is not permitted without written approval from QAI. Any liability attached thereto is limited to the fee charged for the individual project file referenced. The results of this report pertain only to the specific items tested, calibrated, or sampled. Unless specifically stated or identified otherwise, QAI has utilized a simple acceptance rule to make conformity decisions on testing results contained in this report as applicable.



Testing Performed by
Jeffrey Simon
RF/EMC Technologist



Report Prepared by
Alec Hope
Senior RF/EMC Engineer



Report Reviewed by
Alireza Nezam
Head Compliance Engineer



QAI FACILITIES

British Columbia

QAI Laboratories Inc.
Main Laboratory/Headquarters
3980 North Fraser Way,
Burnaby, BC V5J Canada

Ontario

QAI Laboratories Inc.
25 Royal Group Crescent #3,
Vaughan,
ON L4H 1X9 Canada

Virginia

QAI Laboratories Ltd.
1047 Zachary Taylor Hwy,
Suite A Huntly,
VA 22640 USA

China

QAI Laboratories Ltd
Room 408, No. 228, Jiangchang
3rd Road Jing'An District,
Shanghai, China 200436

California

QAI Laboratories Ltd.
8385 White Oak Avenue Rancho
Cucamonga, CA 91730 USA

Oklahoma

QAI Laboratories Ltd.
5110 North Mingo Road
Tulsa, OK 74117, USA

Miami

QAI Laboratories Ltd.
8148 NW 74th Ave,
Medley, FL 33166 USA

South Korea

QAI Laboratories Ltd
#502, 8, Sanbon-ro 324beon-gil
Gunpo-si, Gyeonggi-do, 15829,
South Korea

QAI EMC ACCREDITATION

QAI EMC is your one-stop regulatory compliance partner for electromagnetic compatibility (EMC) and electromagnetic interference (EMI). Products are tested to the latest and applicable EMC/EMI requirements for domestic and international markets. QAI EMC goes above and beyond being a testing facility—we are your regulatory compliance partner. QAI EMC has the capability to perform RF Emissions and Immunity for all types of electronics manufacturing including Industrial, Scientific, Medical, Information Technology, Telecom, Wireless, Automotive, Marine and Avionics.

EMC Laboratory Location	FCC Designation (3m SAC)	IC Registration (3m SAC)	A2LA Certificate
Burnaby, BC, Canada	CA9543	9543A	3657.02

EMC Facility Burnaby BC, Canada





TABLE OF CONTENTS

REVISION HISTORY	2
REPORT AUTHORIZATION	2
QAI FACILITIES	3
QAI EMC ACCREDITATION	3
1 EXECUTIVE SUMMARY	9
1.1 PURPOSE	9
1.2 SCOPE	9
1.3 SUMMARY OF RESULTS	10
2 GENERAL INFORMATION	11
2.1 PRODUCT DESCRIPTION	11
2.2 ENVIRONMENTAL CONDITIONS	13
2.3 MEASUREMENT UNCERTAINTY	13
2.4 WORST TEST CASE	13
2.5 SAMPLE CALCULATIONS OF EMISSIONS DATA	13
3 DATA & TEST RESULTS	15
3.1 RF PEAK OUTPUT POWER & PEAK TO AVERAGE RATIO	15
3.2 99% BANDWIDTH	58
3.3 BAND EDGE	79
3.4 RF CONDUCTED OUT OF BAND EMISSIONS	93
3.5 FREQUENCY STABILITY	101
3.6 CONDUCTED EMISSIONS: AC POWER LINE	109
3.7 CONDUCTED EMISSIONS: TELECOM	112
3.8 UNINTENTIONAL RADIATED EMISSIONS	114
APPENDIX A: TEST SETUP PHOTOS	118
APPENDIX B: ABBREVIATIONS	121

LIST OF FIGURES

Figure 1: EUT	11
Figure 2: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, Low Channel	22
Figure 3: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, Low Channel	22
Figure 4: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, Mid Channel	23
Figure 5: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, Mid Channel	23
Figure 6: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, High Channel	24
Figure 7: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, High Channel	24
Figure 8: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, Low Channel	25
Figure 9: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, Low Channel	25
Figure 10: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, Mid Channel	26
Figure 11: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, Mid Channel	26
Figure 12: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, High Channel	27
Figure 13: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, High Channel	27
Figure 14: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, Low Channel	28
Figure 15: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, Low Channel	28
Figure 16: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, Mid Channel	29
Figure 17: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, Mid Channel	29
Figure 18: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, High Channel	30
Figure 19: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, High Channel	30
Figure 20: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, Low Channel	31
Figure 21: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, Low Channel	31
Figure 22: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, Mid Channel	32
Figure 23: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, Mid Channel	32
Figure 24: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, High Channel	33
Figure 25: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, High Channel	33
Figure 26: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, Low Channel	34
Figure 27: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, Low Channel	34
Figure 28: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, Mid Channel	35
Figure 29: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, Mid Channel	35
Figure 30: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, High Channel	36
Figure 31: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, High Channel	36
Figure 32: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, Low Channel	37
Figure 33: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, Low Channel	37
Figure 34: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, Mid Channel	38
Figure 35: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, Mid Channel	38
Figure 36: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, High Channel	39
Figure 37: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, High Channel	39
Figure 38: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, Low Channel	40
Figure 39: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, Low Channel	40
Figure 40: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, Mid Channel	41
Figure 41: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, Mid Channel	41
Figure 42: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, High Channel	42
Figure 43: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, High Channel	42
Figure 44: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, Low Channel	43
Figure 45: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, Low Channel	43
Figure 46: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, Mid Channel	44
Figure 47: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, Mid Channel	44
Figure 48: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, High Channel	45
Figure 49: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, High Channel	45
Figure 50: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, Low Channel	46
Figure 51: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, Low Channel	46
Figure 52: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, Mid Channel	47
Figure 53: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, Mid Channel	47
Figure 54: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, High Channel	48
Figure 55: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, High Channel	48
Figure 56: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, Low Channel	49
Figure 57: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, Low Channel	49
Figure 58: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, Mid Channel	50
Figure 59: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, Mid Channel	50

Figure 60: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, High Channel	51
Figure 61: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, High Channel	51
Figure 62: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, Low Channel	52
Figure 63: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, Low Channel	52
Figure 64: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, Mid Channel.....	53
Figure 65: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, Mid Channel.....	53
Figure 66: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, High Channel	54
Figure 67: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, High Channel	54
Figure 68: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, Low Channel	55
Figure 69: Ant 2 Output Power, 20 MHz BW, QPSK/256QAM, Low Channel	55
Figure 70: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, Mid Channel.....	56
Figure 71: Ant 2 Output Power, 20 MHz BW, QPSK/256QAM, Mid Channel.....	56
Figure 72: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, High Channel	57
Figure 73: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, High Channel	57
Figure 74: 99% Bandwidth, QPSK/16QAM, 5 MHz BW Low channel	61
Figure 75: 99% Bandwidth, QPSK/16QAM, 5 MHz BW Mid channel	61
Figure 76: 99% Bandwidth, QPSK/16QAM, 5 MHz BW High channel.....	62
Figure 77: 99% Bandwidth, QPSK/16QAM, 5 MHz BW Low channel	62
Figure 78: 99% Bandwidth, QPSK/64QAM, 5 MHz BW Mid channel	63
Figure 79: 99% Bandwidth, QPSK/64QAM, 5 MHz BW High channel.....	63
Figure 80: 99% Bandwidth, QPSK/256QAM, 5 MHz BW Low channel	64
Figure 81: 99% Bandwidth, QPSK/256QAM, 5 MHz BW Mid channel	64
Figure 82: 99% Bandwidth, QPSK/256QAM, 5 MHz BW High channel.....	65
Figure 83: 99% Bandwidth, QPSK/16QAM, 10 MHz BW Low channel	65
Figure 84: 99% Bandwidth, QPSK/16QAM, 10 MHz BW Mid channel	66
Figure 85: 99% Bandwidth, QPSK/16QAM, 10 MHz BW High channel.....	66
Figure 86: 99% Bandwidth, QPSK/64QAM, 10 MHz BW Low channel	67
Figure 87: 99% Bandwidth, QPSK/64QAM, 10 MHz BW Mid channel	67
Figure 88: 99% Bandwidth, QPSK/64QAM, 10 MHz BW High channel.....	68
Figure 89: 99% Bandwidth, QPSK/256QAM, 10 MHz BW Low channel	68
Figure 90: 99% Bandwidth, QPSK/256QAM, 10 MHz BW Mid channel	69
Figure 91: 99% Bandwidth, QPSK/256QAM, 10 MHz BW High channel.....	69
Figure 92: 99% Bandwidth, QPSK/16QAM, 10 MHz BW Low channel	70
Figure 93: 99% Bandwidth, QPSK/16QAM, 15 MHz BW Mid channel	70
Figure 94: 99% Bandwidth, QPSK/16QAM, 15 MHz BW High channel.....	71
Figure 95: 99% Bandwidth, QPSK/64QAM, 15 MHz BW Low channel	71
Figure 96: 99% Bandwidth, QPSK/64QAM, 15 MHz BW Mid channel	72
Figure 97: 99% Bandwidth, QPSK/64QAM, 15 MHz BW High channel.....	72
Figure 98: 99% Bandwidth, QPSK/256QAM, 15 MHz BW Low channel	73
Figure 99: 99% Bandwidth, QPSK/256QAM, 15 MHz BW Mid channel	73
Figure 100: 99% Bandwidth, QPSK/256QAM, 15 MHz BW High channel.....	74
Figure 101: 99% Bandwidth, QPSK/16QAM, 20 MHz BW Low channel	74
Figure 102: 99% Bandwidth, QPSK/16QAM, 20 MHz BW Mid channel	75
Figure 103: 99% Bandwidth, QPSK/16QAM, 20 MHz BW High channel.....	75
Figure 104: 99% Bandwidth, QPSK/64QAM, 20 MHz BW Low channel	76
Figure 105: 99% Bandwidth, QPSK/64QAM, 20 MHz BW Mid channel	76
Figure 106: 99% Bandwidth, QPSK/64QAM, 20 MHz BW High channel.....	77
Figure 107: 99% Bandwidth, QPSK/256QAM, 20 MHz BW Low channel	77
Figure 108: 99% Bandwidth, QPSK/256QAM, 20 MHz BW Mid channel	78
Figure 109: 99% Bandwidth, QPSK/256QAM, 20 MHz BW High channel.....	78
Figure 110: Low Band Edge, 5 MHz BW, QPSK/16QAM	81
Figure 111: High Band Edge, 5 MHz BW, QPSK/16QAM	81
Figure 112: Low Band Edge, 5 MHz BW, QPSK/64QAM.....	82
Figure 113: High Band Edge, 5 MHz BW, QPSK/64QAM	82
Figure 114: Low Band Edge, 5 MHz BW, QPSK/256QAM	83
Figure 115: High Band Edge, 5 MHz BW, QPSK/256QAM	83
Figure 116: Low Band Edge, 10 MHz BW, QPSK/16QAM	84
Figure 117: High Band Edge, 10 MHz BW, QPSK/16QAM	84
Figure 118: Low Band Edge, 10 MHz BW, QPSK/64QAM	85
Figure 119: High Band Edge, 10 MHz BW, QPSK/64QAM	85



Figure 120: Low Band Edge, 10 MHz BW, QPSK/256QAM	86
Figure 121: High Band Edge, 10 MHz BW, QPSK/256QAM	86
Figure 122: Low Band Edge, 15 MHz BW, QPSK/16QAM	87
Figure 123: High Band Edge, 15 MHz BW, QPSK/16QAM	87
Figure 124: Low Band Edge, 15 MHz BW, QPSK/64QAM	88
Figure 125: High Band Edge, 15 MHz BW, QPSK/64QAM	88
Figure 126: Low Band Edge, 15 MHz BW, QPSK/256QAM	89
Figure 127: High Band Edge, 15 MHz BW, QPSK/256QAM	89
Figure 128: Low Band Edge, 20 MHz BW, QPSK/16QAM	90
Figure 129: High Band Edge, 20 MHz BW, QPSK/16QAM	90
Figure 130: Low Band Edge, 20 MHz BW, QPSK/64QAM	91
Figure 131: High Band Edge, 20 MHz BW, QPSK/64QAM	91
Figure 132: Low Band Edge, 20 MHz BW, QPSK/256QAM	92
Figure 133: High Band Edge, 20 MHz BW, QPSK/256QAM	92
Figure 134: RF Conducted Out of Band Emissions, 5 MHz BW, QPSK/16QAM	94
Figure 135: RF Conducted Out of Band Emissions, 5 MHz BW, QPSK/64QAM	95
Figure 136: RF Conducted Out of Band Emissions, 5 MHz BW, QPSK/256QAM	95
Figure 137: RF Conducted Out of Band Emissions, 10 MHz BW, QPSK/16QAM	96
Figure 138: RF Conducted Out of Band Emissions, 10 MHz BW, QPSK/64QAM	96
Figure 139: RF Conducted Out of Band Emissions, 10 MHz BW, QPSK/256QAM	97
Figure 140: RF Conducted Out of Band Emissions, 15 MHz BW, QPSK/16QAM	97
Figure 141: RF Conducted Out of Band Emissions, 15 MHz BW, QPSK/64QAM	98
Figure 142: RF Conducted Out of Band Emissions, 15 MHz BW, QPSK/256QAM	98
Figure 143: RF Conducted Out of Band Emissions, 20 MHz BW, QPSK/16QAM	99
Figure 144: RF Conducted Out of Band Emissions, 20 MHz BW, QPSK/64QAM	99
Figure 145: RF Conducted Out of Band Emissions, 20 MHz BW, QPSK/256QAM	100
Figure 146: Output Frequency: 120V	103
Figure 147: Output Frequency: 102V	103
Figure 148: Output Frequency: 138V	104
Figure 149: Output Frequency: -30 °C	104
Figure 150: Output Frequency: -20 °C	105
Figure 151: Output Frequency: -10 °C	105
Figure 152: Output Frequency: 0 °C	106
Figure 153: Output Frequency: 10 °C	106
Figure 154: Output Frequency: 20 °C	107
Figure 155: Output Frequency: 30 °C	107
Figure 156: Output Frequency: 40 °C	108
Figure 157: Output Frequency: 50 °C	108
Figure 158: AC Conducted Emissions, Line 1	111
Figure 159: AC Conducted Emissions, Line 2	111
Figure 160: Conducted Emissions: Telecom	113
Figure 161: Radiated Emissions: 30 MHz - 1 GHz	116
Figure 162: Radiated Emissions: 1GHz-6GHz	117
Figure 163: Radiated Emissions: 6GHz-18GHz	117
Figure 164: Radiated Emissions: 30 MHz – 1 GHz Measurement Setup	118
Figure 165: Conducted Emissions: AC Power Line Measurement Setup	118
Figure 166: Conducted Emissions: Telecom Measurement Setup	119
Figure 167: Radiated Emissions: 1 GHz – 18 GHz Measurement Setup	119
Figure 168: RF Conducted Measurement Setup	120
Figure 169: Frequency stability with respect to temperature test setup	120

LIST OF TABLES

Table 1: Applicable test standards and descriptions	10
Table 2: Sample Quasi-Peak Correction Data – Radiated	13
Table 3: Sample Quasi-Peak Correction Data - Conducted Emissions	14
Table 4: Sample Average Correction Data- Conducted Emissions	14
Table 5: Ant 1 RF Output Power:5 MHz BW, QPSK/16-QAM.....	17
Table 6: Ant 2 RF Output Power:5 MHz BW, QPSK/16-QAM.....	17
Table 7: Ant 1 RF Output Power:5 MHz BW, QPSK/64-QAM.....	17
Table 8: Ant 2 RF Output Power:5 MHz BW, QPSK/64-QAM.....	17
Table 9: Ant 1 RF Output Power:5 MHz BW, QPSK/256-QAM.....	17
Table 10: Ant 2 RF Output Power:5 MHz BW, QPSK/256-QAM.....	18
Table 11: Ant 1 RF Output Power:10 MHz BW, QPSK/16-QAM.....	18
Table 12: Ant 2 RF Output Power:10 MHz BW, QPSK/16-QAM.....	18
Table 13: Ant 1 RF Output Power:10 MHz BW, QPSK/64-QAM.....	18
Table 14: Ant 2 RF Output Power:10 MHz BW, QPSK/64-QAM.....	18
Table 15: Ant 1 RF Output Power:10 MHz BW, QPSK/256-QAM.....	19
Table 16: Ant 2 RF Output Power:10 MHz BW, QPSK/256-QAM.....	19
Table 17: Ant 1 RF Output Power:15 MHz BW, QPSK/16-QAM.....	19
Table 18: Ant 2 RF Output Power:15 MHz BW, QPSK/16-QAM.....	19
Table 19: Ant 1 RF Output Power:15 MHz BW, QPSK/64-QAM.....	19
Table 20: Ant 2 RF Output Power:15 MHz BW, QPSK/64-QAM.....	20
Table 21: Ant 1 RF Output Power:15 MHz BW, QPSK/256-QAM.....	20
Table 22: Ant 2 RF Output Power:15 MHz BW, QPSK/256-QAM.....	20
Table 23: Ant 1 RF Output Power:20 MHz BW, QPSK/16-QAM.....	20
Table 24: Ant 2 RF Output Power:20 MHz BW, QPSK/16-QAM.....	20
Table 25: Ant 1 RF Output Power:20 MHz BW, QPSK/64-QAM.....	21
Table 26: Ant 2 RF Output Power:20 MHz BW, QPSK/64-QAM.....	21
Table 27: Ant 1 RF Output Power:20 MHz BW, QPSK/256-QAM.....	21
Table 28: Ant 2 RF Output Power:20 MHz BW, QPSK/256-QAM.....	21
Table 29: 99% Bandwidth	60
Table 30: Band Edge, 5 MHz BW	80
Table 31: Band Edge, 10 MHz BW	80
Table 32: Band Edge, 15 MHz BW	80
Table 33: Band Edge, 20 MHz BW	80
Table 34: RF Conducted Out of Band Emissions	94
Table 35: Frequency Stability with Temperature Change	102
Table 36: Frequency Stability with Voltage Change	102
Table 37: AC Conducted Emissions, Line 1	110
Table 38: AC Conducted Emissions, Line 2	110
Table 39: Conducted Emissions: Telecom	113
Table 40: Unintentional Radiated Emissions: 30 MHz - 1 GHz.....	116
Table 41: Unintentional Radiated Emissions: 1 GHz - 6 GHz	116
Table 42: Unintentional Radiated Emissions: 6 GHz - 18 GHz	116



1 EXECUTIVE SUMMARY

1.1 Purpose

The purpose of this report is to demonstrate and document the compliance of Star Solutions COMPAC-N LTE BC25 as per Sections 1.2 and 1.3.

1.2 Scope

The information documented in this report is based on the test methods and levels as per Quote 23RH09011:

CFR Title 47 FCC Part 2 – Frequency allocations and Radio treaty matters; General Rules and Regulations

CFR Title 47 FCC Part 15 – Radio Frequency Devices, Subpart B – Unintentional Radiators

CFR Title 47 FCC Part 27 – Miscellaneous Wireless Communications Services

CFR Title 47 FCC Part 24 – Personal Communications Services

ICES-003 Issue 7 – Digital Apparatus Spectrum – Information Technologies and Telecommunications.

SRSP-510 Issue 5 – Technical Requirements for Personal Communications Services (PCS) in the Bands 1850-1915 MHz, 1930-1995 MHz

RSS-133 Issue 6 – 2GHz Personal Communication Services

RSS-Gen Issue 5 – General Requirements for Compliance of Radio Apparatus

1.3 Summary of Results

The following testing was performed pursuant to FCC Title 47 Part 15 and Industry Canada ICES-003 to demonstrate the testimony to “FCC, IC, & CE” mark Electromagnetic Compatibility testing for the product.

No.	Test	Applicable Standard	Test Method	Result
1	Peak Power and Peak to Average Ratio	FCC CFR 47 Part 24.232 RSS-133 Issue 6 SRSP-510 Issue 5	ANSI C63.26:2015 KDB 971168 D01	Complies
2	99% Bandwidth	FCC CFR 47 Part 24.232 SRSP-510 Issue 5 RSS-Gen Issue 5	ANSI C63.26:2015	Complies
3	Band Edge	FCC CFR 47 Part 24.238 RSS-133 Issue 6	KDB 971168 D01 ANSI C63.26:2015	Complies
4	RF Conducted Out of Band Emissions	FCC CFR 47 Part 24.238 RSS-133 Issue 6	ANSI C63.26:2015	Complies
5	Conducted Emissions: AC Power Line	FCC CFR 47 Part 15.107 ICES-003 Issue 7	ANSI C63.4:2014	Complies
6	Conducted Emissions: Telecom	Client Request	CISPR 32	Complies
7	Unintentional Radiated Emissions	FCC CFR 47 Part 15.109 RSS-Gen Issue 5	ANSI C63.4:2014	Complies
8	Frequency Stability	FCC CFR 47 Part 27.235 FCC CFR 47 Part 2.1055 RSS-Gen Issue 5 RSS-133 Issue 6	ANSI C63.4:2014	Complies

Table 1: Applicable test standards and descriptions

2 GENERAL INFORMATION

2.1 Product Description

The information provided in this section is for the Equipment Under Test (EUT) and the corresponding Auxiliary Equipment needed to perform the tests as a complete system.



Figure 1: EUT

Equipment Under Test (EUT)

Equipment	iCell COMPAC-N LTE BC25
Description	LTE Base Station: Band Class 25
Manufacturer	Star Solutions International Inc
Model No.	NL-2511
Serial No.	1240R23081600001A0
Clock frequencies tuned upon within the EUT:	19.2 MHz, 25 MHz, 38.4 MHz
Highest frequency generated within the EUT:	1930 MHz



Equipment Under Test (EUT) – RF Information

RF device type	LTE Base Station
Model No. (HVIN)	NL-2511
Operating frequency	1930 – 1995 MHz
Channel bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz
Output Power/Transmitter	2x20 W (43dBm)
Modulation type	QPSK 16-QAM 64-QAM 256-QAM
Test Channels (L, M, H)	5 MHz BW: 1932.5, 1962.5, 1992.5 MHz 10 MHz BW: 1935, 1962.5, 1990 MHz 15 MHz BW: 1937.5, 1962.5, 1987.5 MHz 20 MHz BW: 1940, 1962.5, 1985 MHz
Adaptive	No
Geo-location-capable	Yes
Number of antennas	2

Notes: None.

Equipment Under Test (EUT) – General Information

Tested as	Tabletop
Dimensions	47 x 33 x 18.5 cm
Declared operating temperature range:	-40 °C to +55 °C
Input power	250 Watts (max) 215 Watts (average)
Grounded	Yes
Device use	Fixed location

Notes: None.

Test Modes

Mode	Transmitter State	Power
1	On – No data connection (QPSK/16QAM)	48 VDC, 5A, 250W peak
2	On – Phone connected, no data transmission	48 VDC, 5A, 250W peak
3	On – Phone connected, transmitting data	48 VDC, 5A, 250W peak
4	Off – Receive Only	48 VDC, 5A, 250W peak

Auxiliary Manufacturer Supplied Equipment

Equipment	Manufacturer	Product Description	Model No.
Aux 1	Dell	Laptop	D630 PP18L
Aux 2	Apple	Test Phone: iPhone	iPhone SE 2020

2.2 Environmental Conditions

The equipment under test was operated and tested under the following environmental conditions:

Parameter	Conditions
Location	Indoors
Temperature	24°C
Relative Humidity	35 %rh

2.3 Measurement Uncertainty

Parameter	Uncertainty
Radiated Emissions, 30MHz-1GHz	± 2.40 dB
Radiated Emissions, 1GHz-40GHz	± 2.48 dB
Radio Frequency	±1.5 x 10 ⁻⁵ MHz
Total RF Power Conducted	±1.36 dB
Spurious Emissions, Conducted	±1.36 dB
RF Power Density, Conducted	±1.36 dB
Temperature	±1°C
Humidity	±5 %
DC and low frequency voltages	±3 %

2.4 Worst Test Case

Worst-case orientation was determined during the preliminary testing. The final radiated emissions were performed in the worst-case orientation.

2.5 Sample Calculations of Emissions Data

Radiated and conducted emissions were performed using EMC32 software developed by Rohde & Schwarz. Transducer factors such as antenna factors, cable losses and amplifier gains were stored in the test templates which are used to perform the emissions measurements. After the test is finished, data is generated from the EMC32 consisting of product details, emission plots and final data tables as shown below.

Frequency (MHz)	Q-Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. Ht. (cm)	Pol	Turntable Position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
42.663900	33.0	1000.000	120.000	100.0	H	70.0	13.2	7.5	40.5

Table 2: Sample Quasi-Peak Correction Data – Radiated

Quasi-Peak reading shown in the table above is already corrected by the software using the correction factor shown in column “Corr.” The correction factor listed under “Corr.” table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

Or

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable Loss} - \text{Amp gain (if pre-amplifier was used)}$$

The final Quasi peak reading shown in the data is calculated by the software using following equation:

$$\text{Corrected Quasi-Peak (dBµV/m)} = \text{Raw Quasi-Peak Reading} + \text{Antenna factor} + \text{Cable loss}$$



To obtain the final Quasi-Peak or Average reading during power line conducted emissions, transducer factors are included in the final measurement as shown below.

Frequency (MHz)	Q-Peak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150	44.3	1000.000	9.000	GND	0.6	21.7	66.0

Table 3: Sample Quasi-Peak Correction Data - Conducted Emissions

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150	27.2	1000.000	9.000	GND	0.6	28.8	56.0

Table 4: Sample Average Correction Data- Conducted Emissions

Quasi Peak or Average reading shown in the preceding table is already corrected by the software using the correction factor shown in column “Corr.” The correction factor listed under “Corr.” table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

The final Quasi-peak or Average reading shown in the data is calculated by the software using following equation:

$$\text{Corr. Quasi-Peak/Average Reading (dBμV)} = \text{Raw Quasi-Peak/Average Reading} + \text{Antenna factor} + \text{Cable loss}$$

The allowable margin from the limits, as per the standards, were calculated for both radiated and conducted emissions:

$$\text{Margin (dB)} = \text{Limit} - \text{Quasi-Peak or Average reading}$$



3 DATA & TEST RESULTS

3.1 RF Peak Output Power & Peak to Average Ratio

Date Performed:	September 28, 2023
Test Standard:	FCC CFR 47 Part 24.232 (a)(2), (a)(3), (b)(2), (b)(3), (d) RSS-133 Issue 6 (6)(6)(4) SRSP-510 Issue 5
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems v03r01 ANSI C63.26: 2015
Modifications:	None.
Final Result:	Complies Peak Output Measured: 30.48 W (Single output)

Applicable Regulation:

FCC CFR 47 Part 24.232 (a)(2)

Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

FCC CFR 47 Part 24.232 (a)(3)

Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Table below.

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

FCC CFR 47 Part 24.232 (b)(2)

Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

FCC CFR 47 Part 24.232 (b)(3)

Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see table below.

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320



FCC CFR 47 Part 24.232 (d)

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

RSS-133 Issue 6:

6.6.4

The transmitter output power shall be measured in terms of average power. In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

For base and fixed equipment other than fixed subscriber equipment, refer to SRSP-510 for the e.i.r.p. limits.

SRSP-510 Issue 5:

5.1 Radiated power and antenna height limits for fixed and base stations

For base stations with a channel bandwidth greater than 1 MHz, the maximum e.i.r.p. is limited to 3280 watts/MHz. e.i.r.p. (i.e., no more than 3280 watts e.i.r.p. in any 1 MHz band segment) with an antenna height above average terrain (HAAT) up to 300 metres. Fixed or base stations operating in urban areas are limited to a maximum allowable e.i.r.p. of 1640 watts/MHz e.i.r.p. Base station antenna heights above average terrain may exceed 300 metres with a corresponding reduction in e.i.r.p. according to the following table:

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	3280 or 1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

Test Setup:

The EUT was tested outside the SAC via output-conducted measurements per KDB 971168 D01 Power Meas License Digital Systems v03r01 and ANSI C63.26:2015.

Measurement Data and Plots:

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	3.8	-2.87	40.16	37.29	5.36	6.67	13	6.33	Complies
1962.5	3.62	-3.64	40.11	36.47	4.44	7.26	13	5.74	Complies
1992.5	3.38	-3.36	40.26	36.9	4.90	6.74	13	6.26	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 5: Ant 1 RF Output Power:5 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	5.24	-3.03	40.16	37.13	5.16	8.27	13	4.73	Complies
1962.5	4.76	-3.56	40.11	36.55	4.52	8.32	13	4.68	Complies
1992.5	5.37	-2.9	40.26	37.36	5.45	8.27	13	4.73	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 6: Ant 2 RF Output Power:5 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	6.49	1.75	40.16	41.91	15.52	4.74	13	8.26	Complies
1962.5	5.8	1.5	40.11	41.61	14.49	4.3	13	8.7	Complies
1992.5	6.41	1.47	40.26	41.73	14.89	4.94	13	8.06	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 7: Ant 1 RF Output Power:5 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	6.85	1.84	40.16	42	15.85	5.01	13	7.99	Complies
1962.5	6.31	1.35	40.11	41.46	14.00	4.96	13	8.04	Complies
1992.5	6.81	1.68	40.26	41.94	15.63	5.13	13	7.87	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 8: Ant 2 RF Output Power:5 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	6.51	2.1	40.16	42.26	16.83	4.41	13	8.59	Complies
1962.5	5.86	1.15	40.11	41.26	13.37	4.71	13	8.29	Complies
1992.5	6.38	1.35	40.26	41.61	14.49	5.03	13	7.97	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 9: Ant 1 RF Output Power:5 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1932.5	6.86	2.04	40.16	42.2	16.60	4.82	13	8.18	Complies
1962.5	6.4	1.54	40.11	41.65	14.62	4.86	13	8.14	Complies
1992.5	6.93	1.87	40.26	42.13	16.33	5.06	13	7.94	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 10: Ant 2 RF Output Power:5 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	5.19	-1.89	40.16	38.27	6.71	7.08	13	5.92	Complies
1962.50	6.21	-2.81	40.11	37.3	5.37	9.02	13	3.98	Complies
1990	4.53	-3.35	40.26	36.91	4.91	7.88	13	5.12	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 11: Ant 1 RF Output Power:10 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	4.22	-2.52	40.16	37.64	5.81	6.74	13	6.26	Complies
1962.50	3.71	-3.47	40.11	36.64	4.61	7.18	13	5.82	Complies
1990	4.24	-2.93	40.26	37.33	5.41	7.17	13	5.83	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 12: Ant 2 RF Output Power:10 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	9.25	2.8	40.16	42.96	19.77	6.45	13	6.55	Complies
1962.50	8.47	2.11	40.11	42.22	16.67	6.36	13	6.64	Complies
1990	9.05	2.23	40.26	42.49	17.74	6.82	13	6.18	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 13: Ant 1 RF Output Power:10 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	9.51	3.53	40.16	43.69	23.39	5.98	13	7.02	Complies
1962.50	9.11	2.71	40.11	42.82	19.14	6.4	13	6.6	Complies
1990	9.61	2.77	40.26	43.03	20.09	6.84	13	6.16	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 14: Ant 2 RF Output Power:10 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	8.83	3.04	40.16	43.2	20.89	5.79	13	7.21	Complies
1962.50	8.38	2.11	40.11	42.22	16.67	6.27	13	6.73	Complies
1990	8.9	2.65	40.26	42.91	19.54	6.25	13	6.75	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 15: Ant 1 RF Output Power:10 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1935	9.63	2.83	40.16	42.99	19.91	6.8	13	6.2	Complies
1962.50	9.15	2.46	40.11	42.57	18.07	6.69	13	6.31	Complies
1990	9.47	2.91	40.26	43.17	20.75	6.56	13	6.44	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 16: Ant 2 RF Output Power:10 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	5.91	-2.34	40.16	37.82	6.05	8.25	13	4.75	Complies
1962.50	4.82	-2.6	40.11	37.51	5.64	7.42	13	5.58	Complies
1987.50	6.19	-2.52	40.26	37.74	5.94	8.71	13	4.29	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 17: Ant 1 RF Output Power:15 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	4.46	-3.72	40.16	36.44	4.41	8.18	13	4.82	Complies
1962.50	5.87	-2.49	40.11	37.62	5.78	8.36	13	4.64	Complies
1987.50	4.63	-3.21	40.26	37.05	5.07	7.84	13	5.16	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 18: Ant 2 RF Output Power:15 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	10.81	4.13	40.16	44.29	26.85	6.68	13	6.32	Complies
1962.50	10.56	4	40.11	44.11	25.76	6.56	13	6.44	Complies
1987.50	10.6	3.88	40.26	44.14	25.94	6.72	13	6.28	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 19: Ant 1 RF Output Power:15 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	9.88	3.08	40.16	43.24	21.09	6.8	13	6.2	Complies
1962.50	10.36	4.02	40.11	44.13	25.88	6.34	13	6.66	Complies
1987.50	9.98	3.31	40.26	43.57	22.75	6.67	13	6.33	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 20: Ant 2 RF Output Power:15 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	10.85	3.86	40.16	44.02	25.23	6.99	13	6.01	Complies
1962.50	10.53	3.72	40.11	43.83	24.15	6.81	13	6.19	Complies
1987.50	10.64	3.82	40.26	44.08	25.59	6.82	13	6.18	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 21: Ant 1 RF Output Power:15 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1937.50	8.76	2.04	40.16	42.2	16.60	6.72	13	6.28	Complies
1962.50	10.28	3.81	40.11	43.92	24.66	6.47	13	6.53	Complies
1987.50	10.04	3.63	40.26	43.89	24.49	6.41	13	6.59	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 22: Ant 2 RF Output Power:15 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	5.61	-2.14	40.16	38.02	6.34	7.75	13	5.25	Complies
1962.50	5.57	-2.82	40.11	37.29	5.36	8.39	13	4.61	Complies
1985	5.73	-2.67	40.26	37.59	5.74	8.4	13	4.6	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 23: Ant 1 RF Output Power:20 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	3.88	-4.36	40.16	35.8	3.80	8.24	13	4.76	Complies
1962.50	4.62	-3.16	40.11	36.95	4.95	7.78	13	5.22	Complies
1985	5.93	-1.5	40.26	38.76	7.52	7.43	13	5.57	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 24: Ant 2 RF Output Power:20 MHz BW, QPSK/16-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	10.76	3.91	40.16	44.07	25.53	6.85	13	6.15	Complies
1962.50	10.47	3.52	40.11	43.63	23.07	6.95	13	6.05	Complies
1985	10.72	3.85	40.26	44.11	25.76	6.87	13	6.13	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 25: Ant 1 RF Output Power:20 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	9.88	4.32	40.16	44.48	28.05	5.56	13	7.44	Complies
1962.50	10.01	3.13	40.11	43.24	21.09	6.88	13	6.12	Complies
1985	9.88	4.58	40.26	44.84	30.48	5.3	13	7.7	Complies

¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 26: Ant 2 RF Output Power:20 MHz BW, QPSK/64-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	10.58	3.97	40.16	44.13	25.88	6.61	13	6.39	Complies
1962.50	10.56	4.15	40.11	44.26	26.67	6.41	13	6.59	Complies
1985	10.49	3.83	40.26	44.09	25.64	6.66	13	6.34	Complies


¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 27: Ant 1 RF Output Power:20 MHz BW, QPSK/256-QAM

Carrier Frequency (MHz)	Raw Peak (dBm)	Raw Avg (dBm)	Correction Factor ¹ (dB)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	PAPR (dB)	Limit (dB)	Margin (dB)	Results
1940	10.39	3.57	40.16	43.73	23.60	6.82	13	6.18	Complies
1962.50	10.16	3.27	40.11	43.38	21.78	6.89	13	6.11	Complies
1985	9.77	4.3	40.26	44.56	28.58	5.47	13	7.53	Complies


¹ Correction factor consists of cable loss, external attenuator, and adapter(s)

Table 28: Ant 2 RF Output Power:20 MHz BW, QPSK/256-QAM

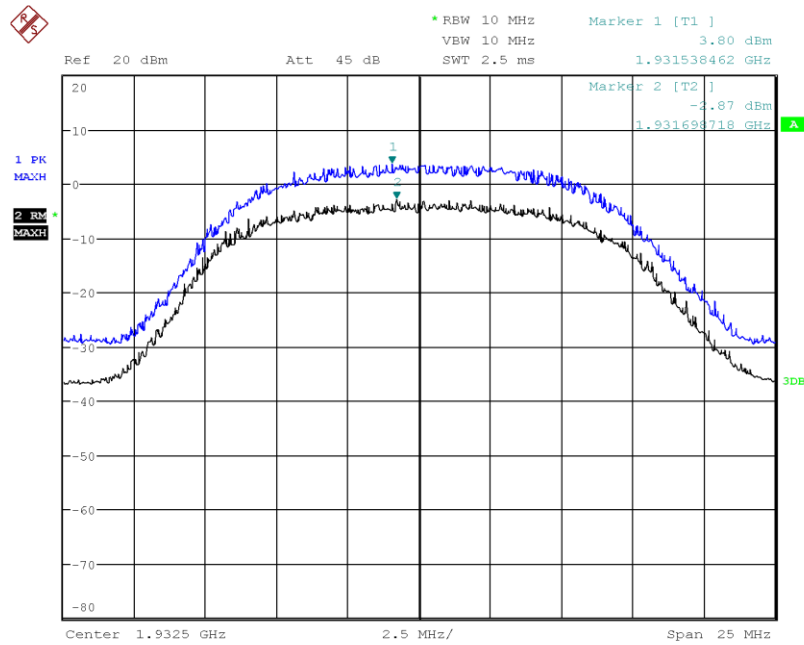


Date: 10.OCT.2023 10:58:38

Figure 2: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, Low Channel

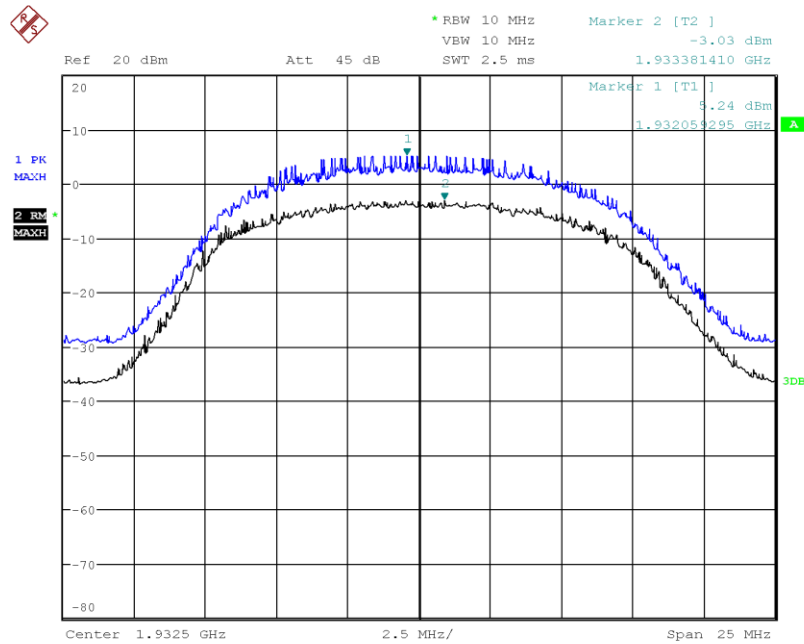


Date: 10.OCT.2023 11:00:19

Figure 3: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, Low Channel

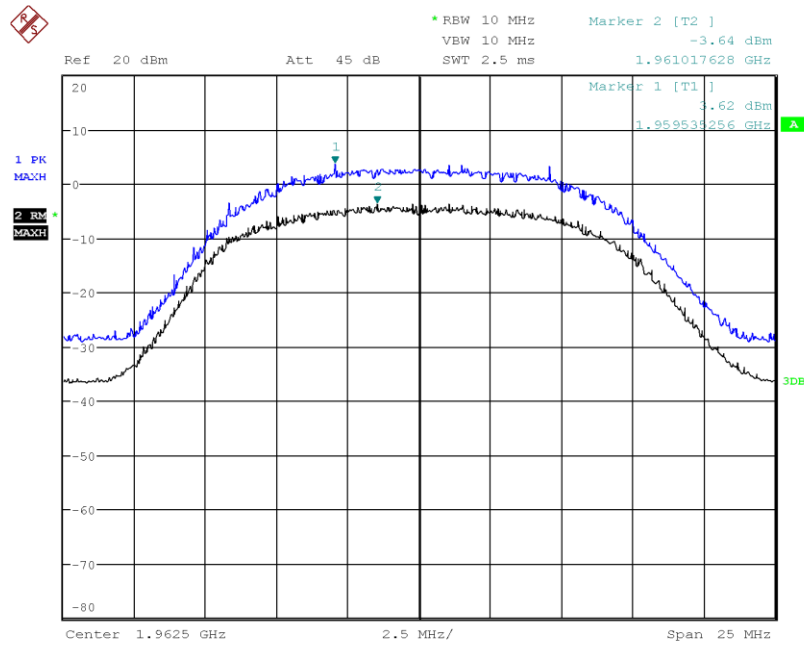


Date: 10.OCT.2023 11:12:55

Figure 4: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, Mid Channel

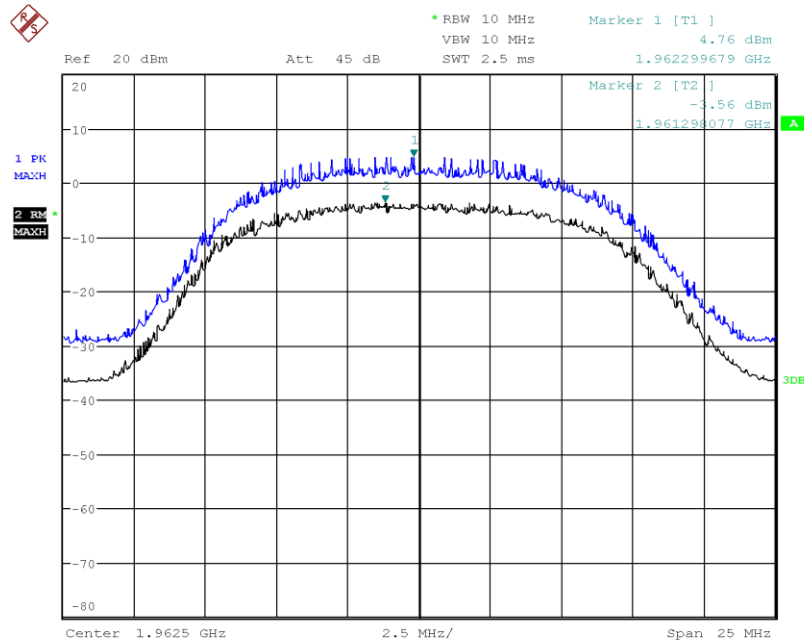


Date: 10.OCT.2023 11:17:33

Figure 5: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, Mid Channel

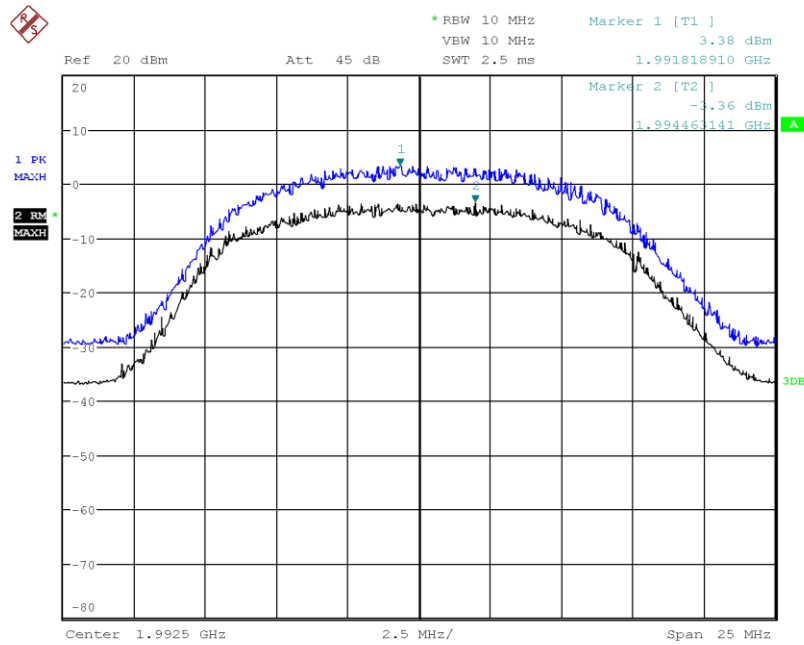


Date: 10.OCT.2023 11:19:18

Figure 6: Ant 1 Output Power, 5 MHz BW, QPSK/16QAM, High Channel

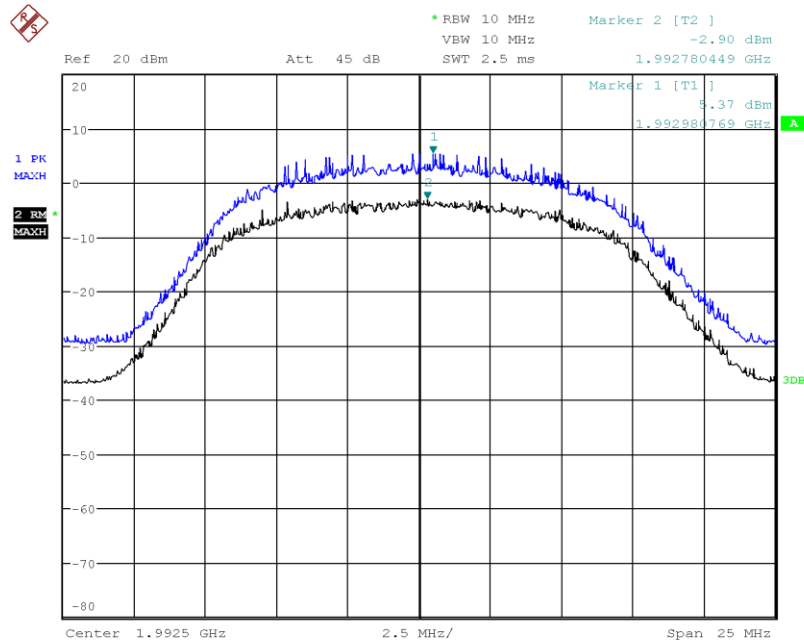


Date: 10.OCT.2023 11:21:04

Figure 7: Ant 2 Output Power, 5 MHz BW, QPSK/16QAM, High Channel

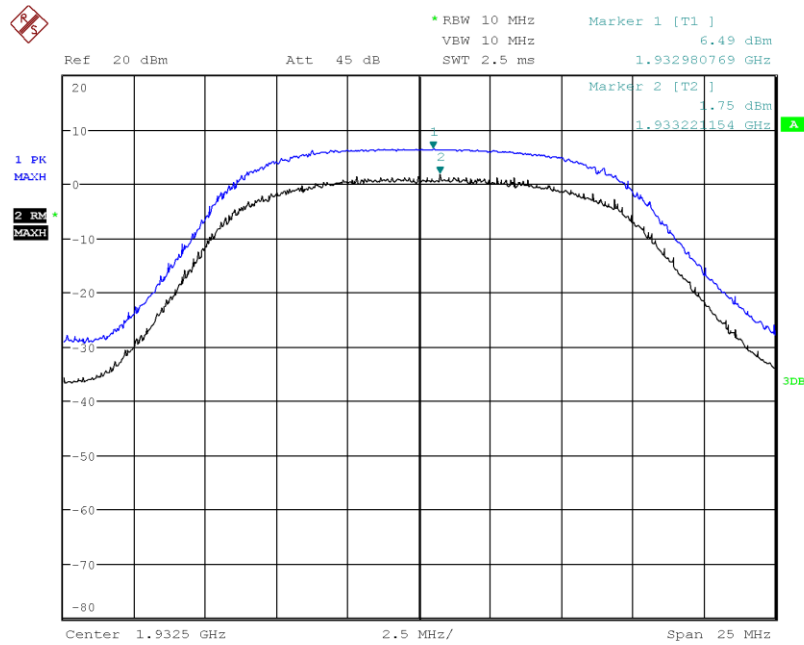


Date: 10.OCT.2023 11:22:58

Figure 8: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, Low Channel

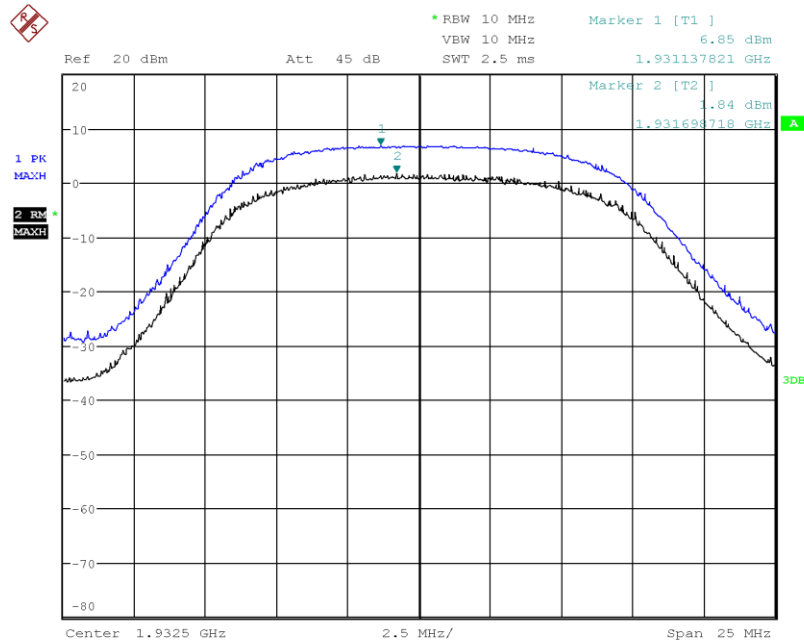


Date: 10.OCT.2023 11:25:02

Figure 9: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, Low Channel

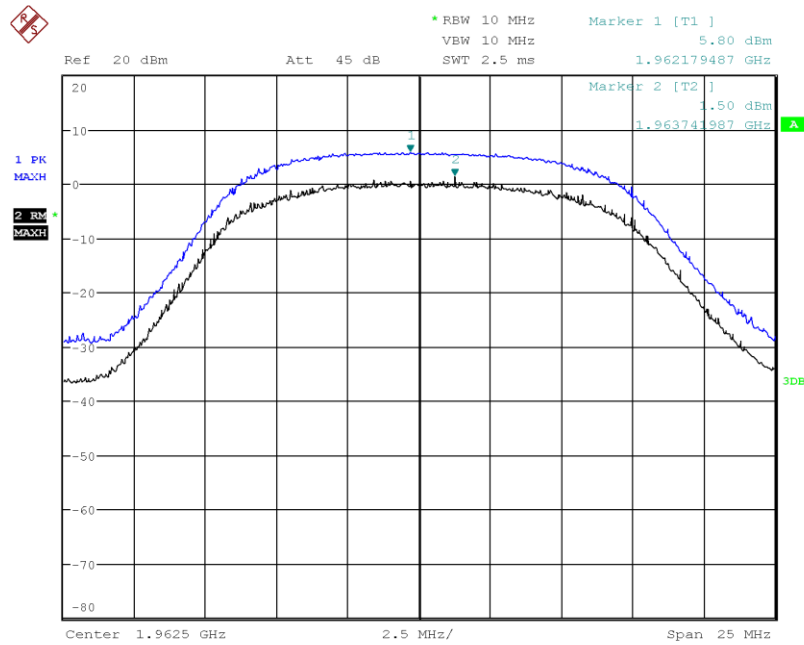


Date: 10.OCT.2023 12:42:24

Figure 10: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, Mid Channel

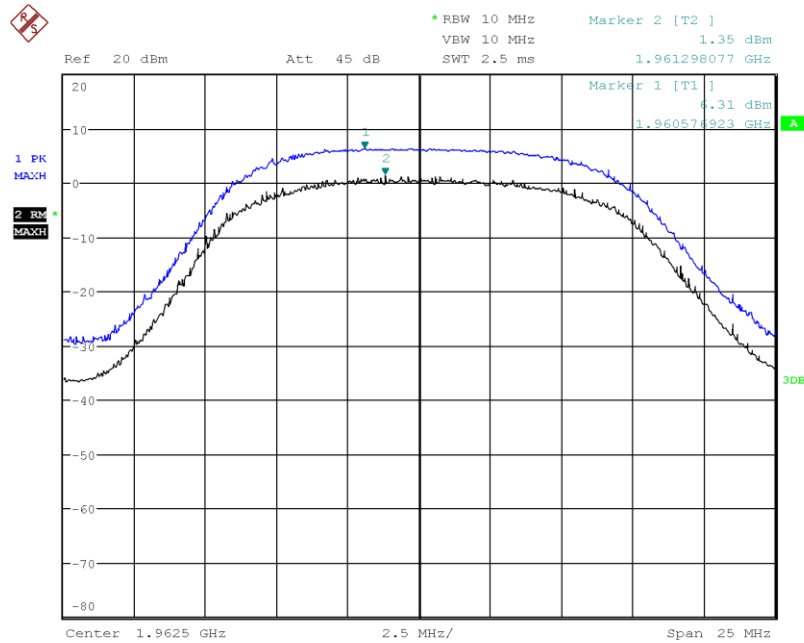


Date: 10.OCT.2023 11:37:39

Figure 11: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, Mid Channel

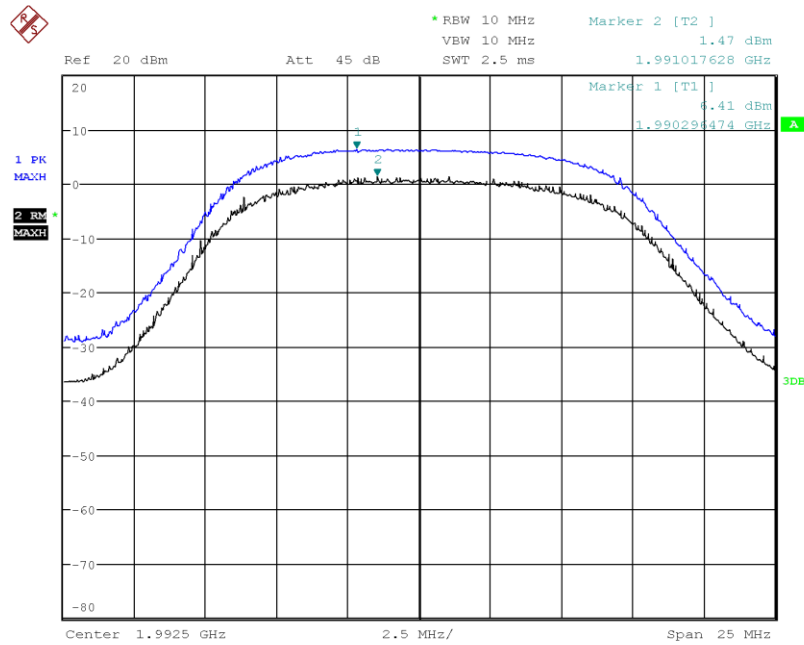


Date: 10.OCT.2023 12:38:38

Figure 12: Ant 1 Output Power, 5 MHz BW, QPSK/64QAM, High Channel

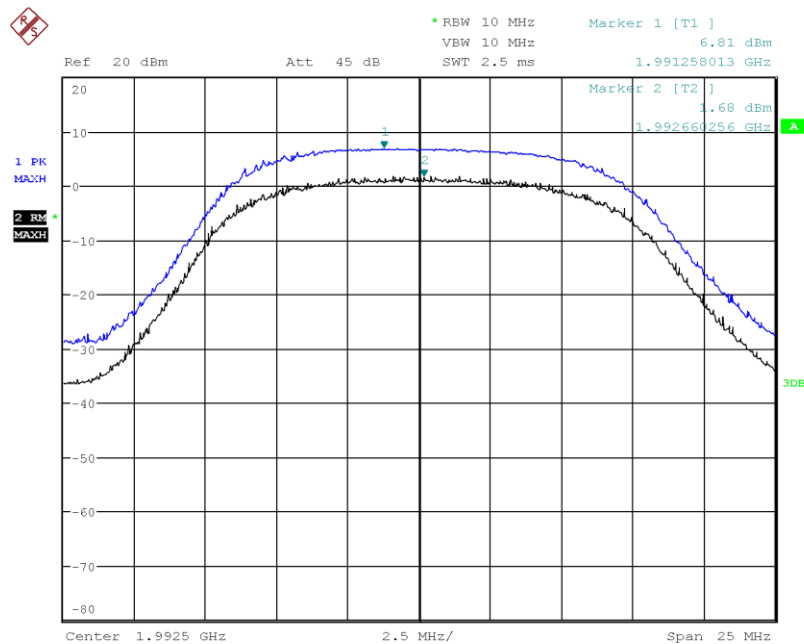


Date: 10.OCT.2023 12:36:22

Figure 13: Ant 2 Output Power, 5 MHz BW, QPSK/64QAM, High Channel

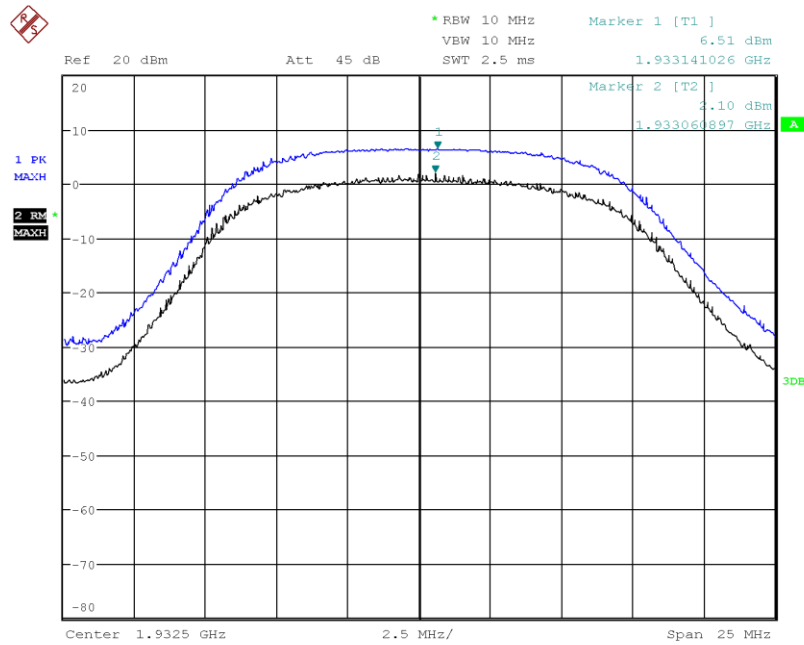


Date: 10.OCT.2023 11:53:12

Figure 14: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, Low Channel

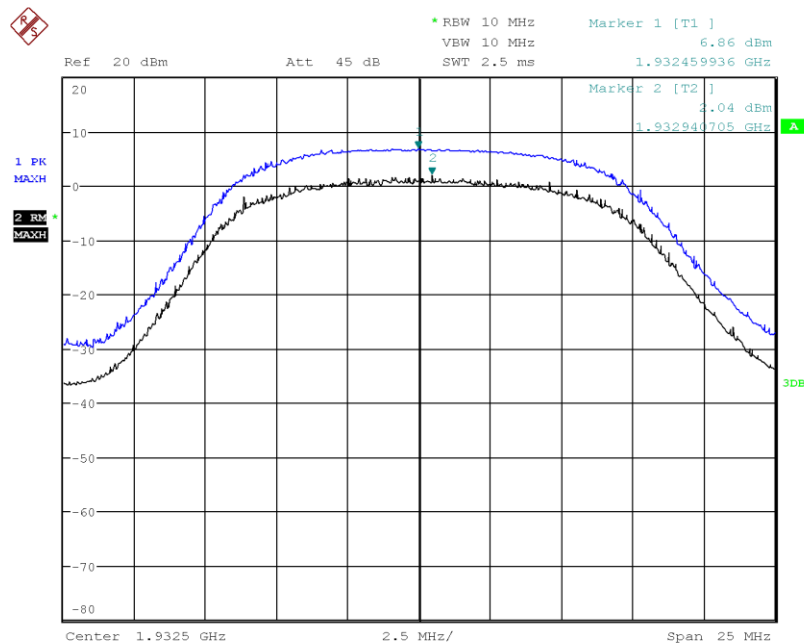


Date: 10.OCT.2023 11:54:09

Figure 15: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, Low Channel

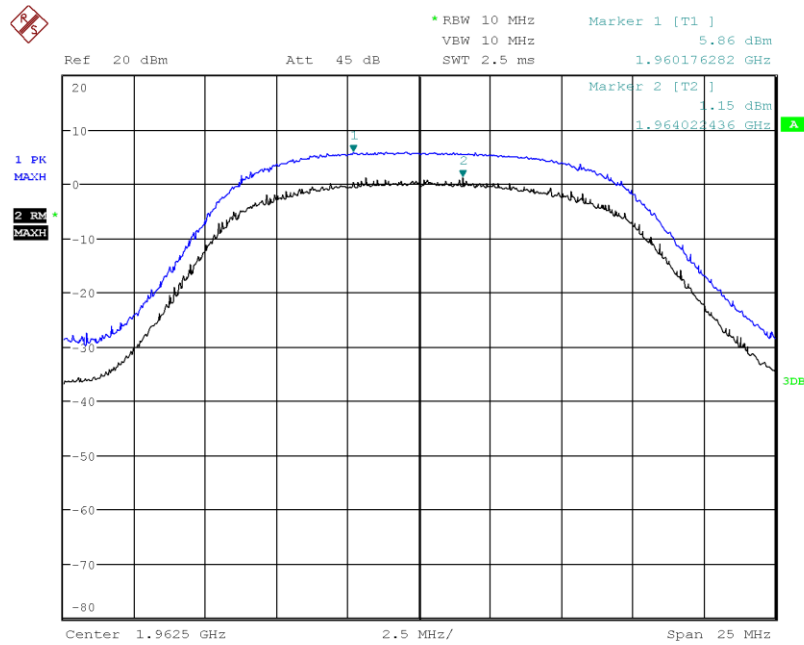


Date: 10.OCT.2023 14:26:48

Figure 16: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, Mid Channel

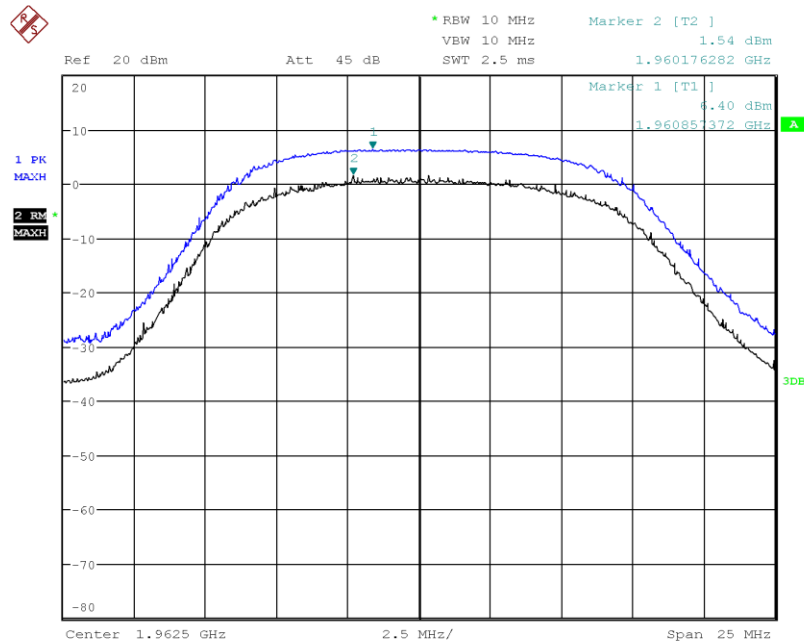


Date: 10.OCT.2023 12:15:54

Figure 17: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, Mid Channel

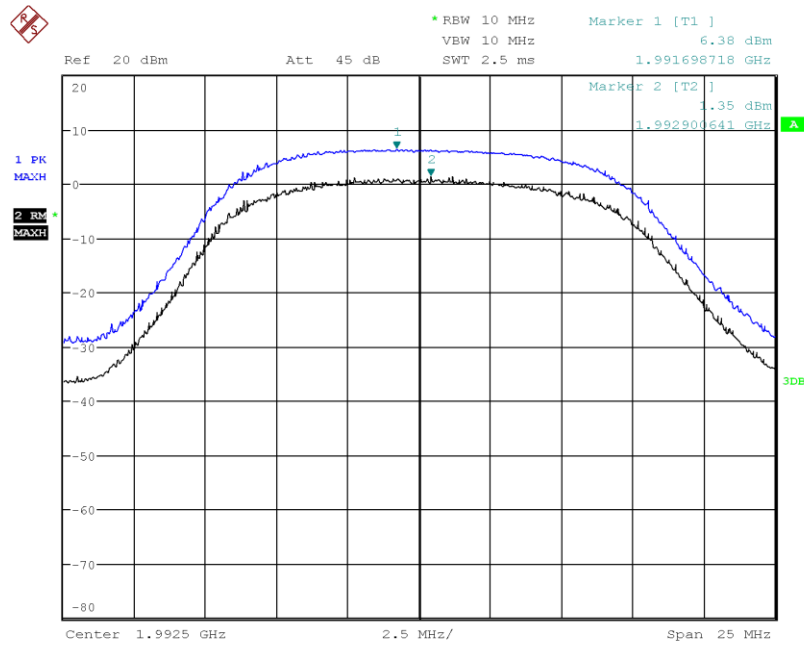


Date: 10.OCT.2023 12:17:52

Figure 18: Ant 1 Output Power, 5 MHz BW, QPSK/256QAM, High Channel

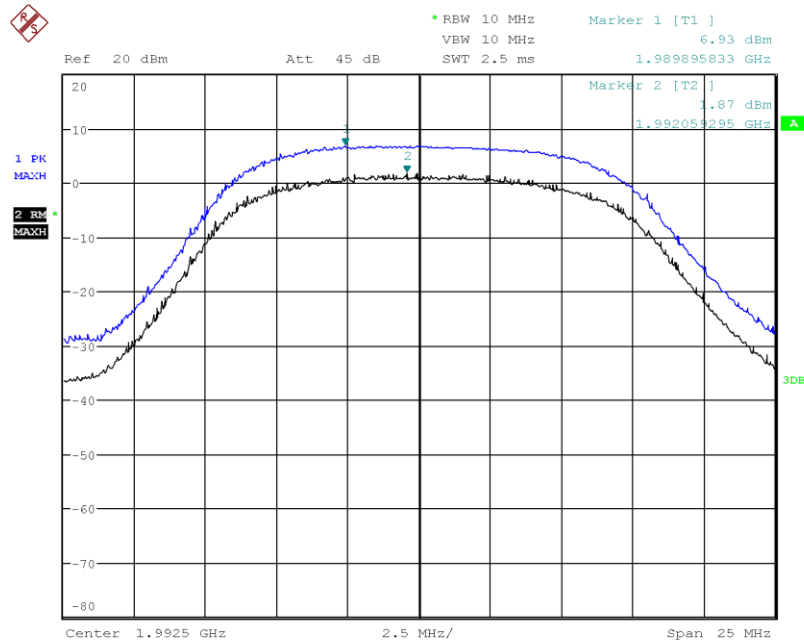


Date: 10.OCT.2023 12:19:18

Figure 19: Ant 2 Output Power, 5 MHz BW, QPSK/256QAM, High Channel

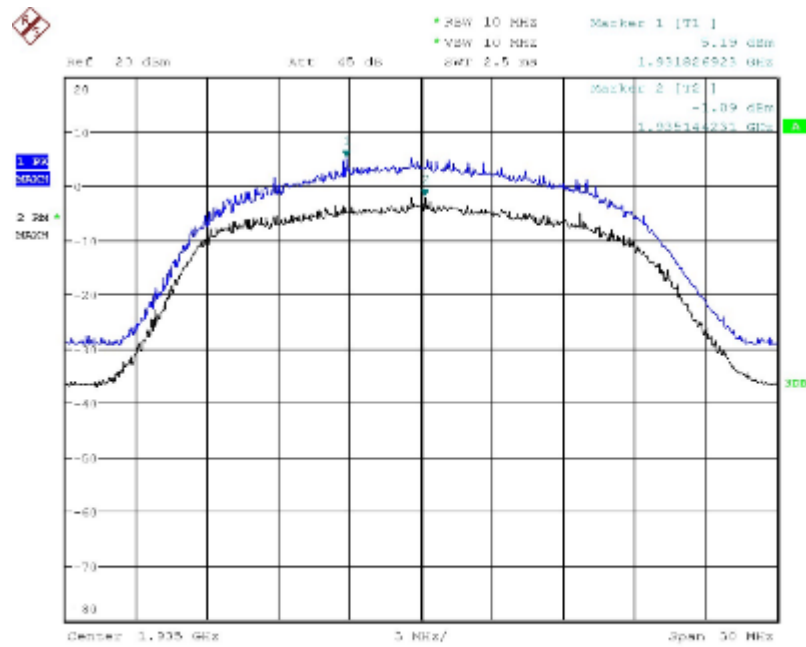

Date: 9.OCT.2023 10:12:43

Figure 20: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, Low Channel

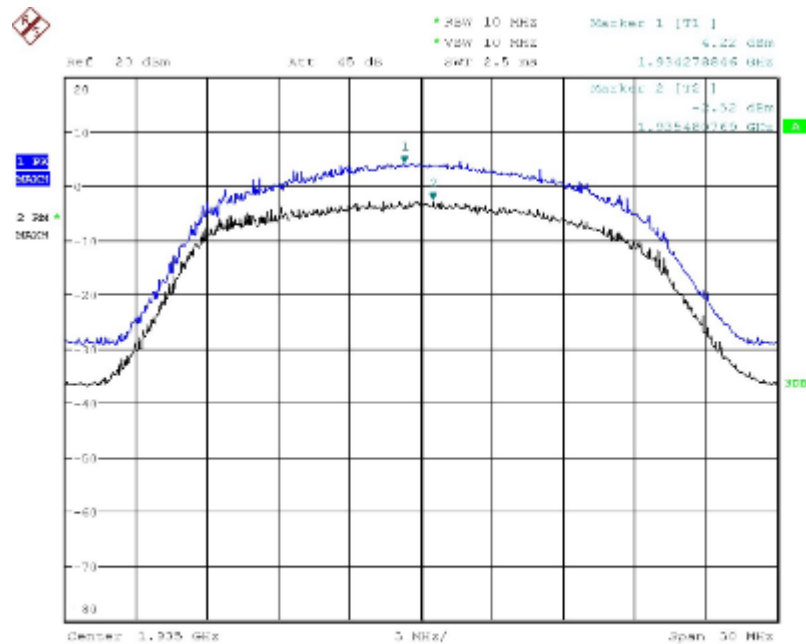

Date: 9.OCT.2023 10:21:19


Figure 21: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, Low Channel



Figure 22: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, Mid Channel




Figure 23: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, Mid Channel

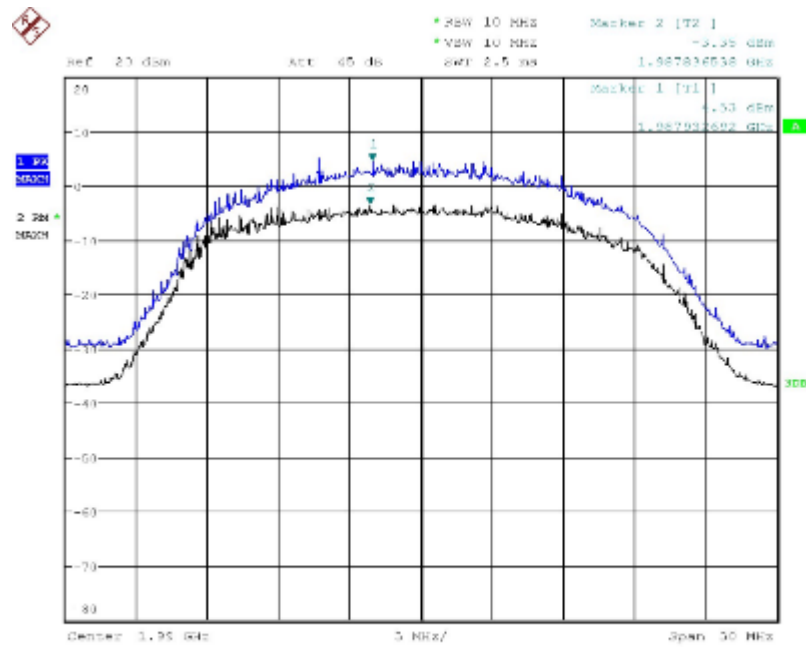


Date: 7.OCT.2023 10:39:21

Figure 24: Ant 1 Output Power, 10 MHz BW, QPSK/16QAM, High Channel

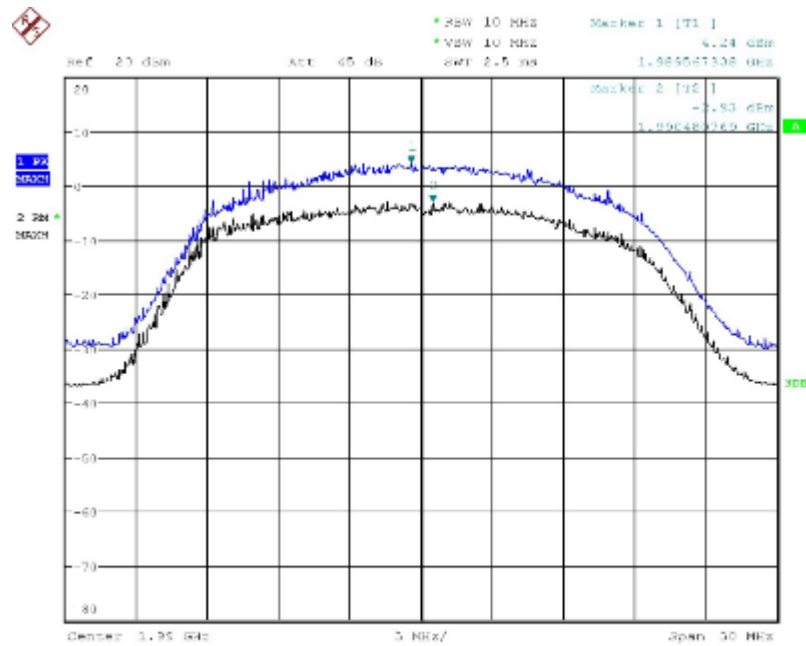


Date: 7.OCT.2023 10:39:42

Figure 25: Ant 2 Output Power, 10 MHz BW, QPSK/16QAM, High Channel

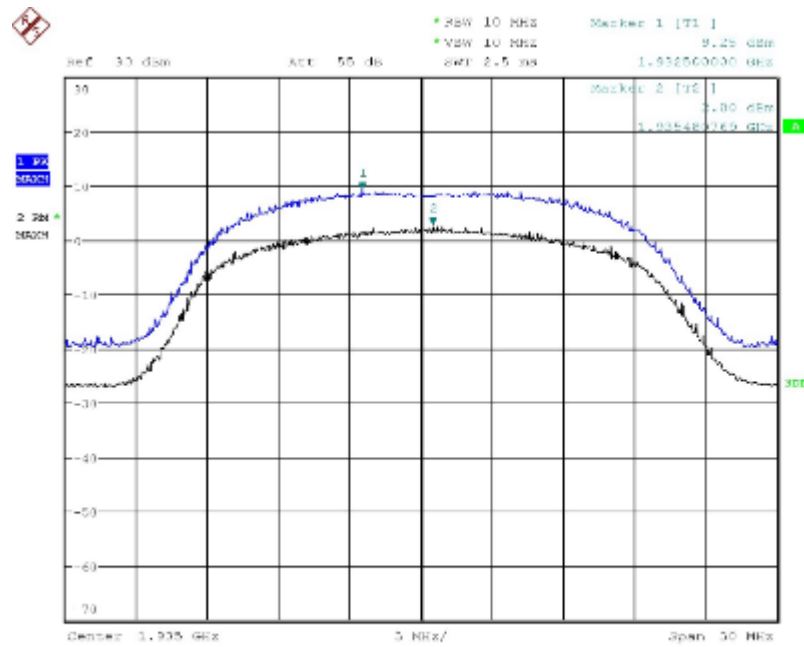


Date: 9.OCT.2023 10:39:40

Figure 26: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, Low Channel

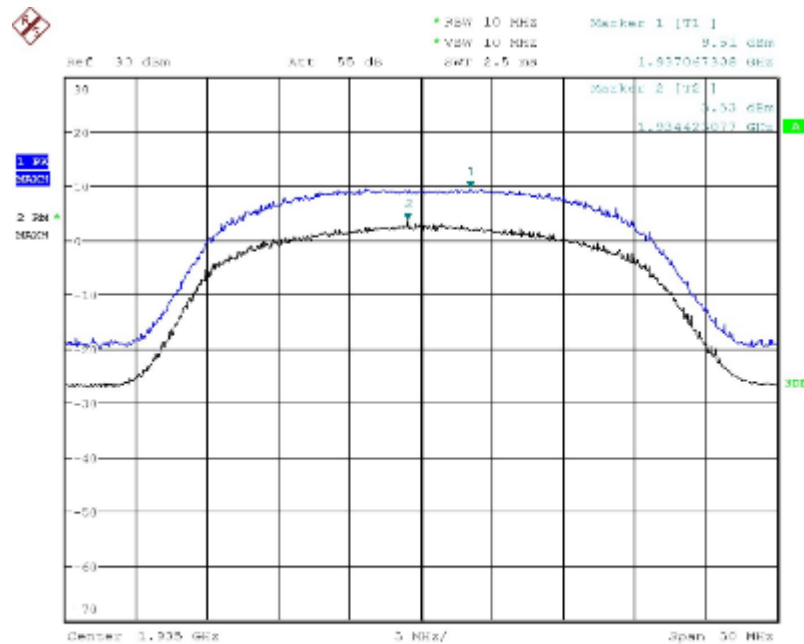


Date: 9.OCT.2023 10:41:01

Figure 27: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, Low Channel

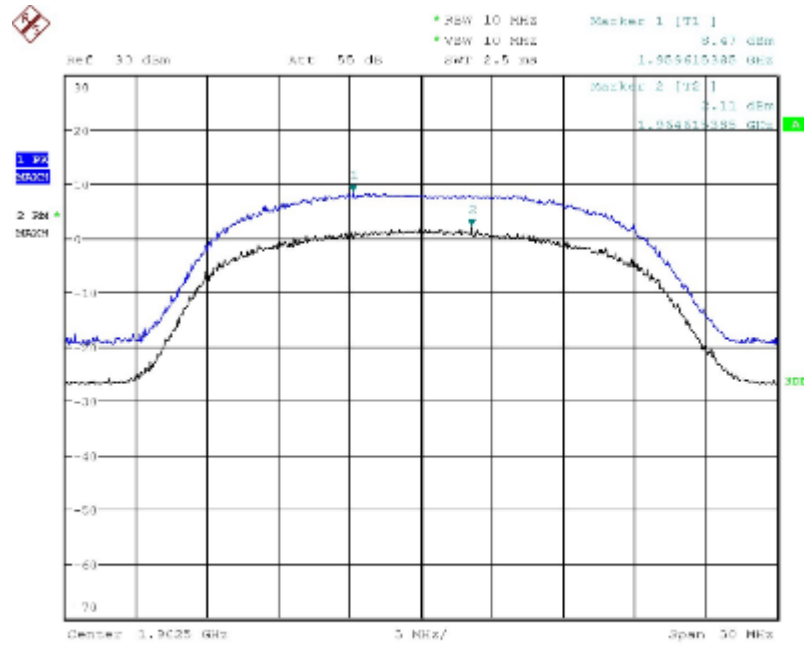


Date: 7.OCT.2023 10:40:30

Figure 28: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, Mid Channel

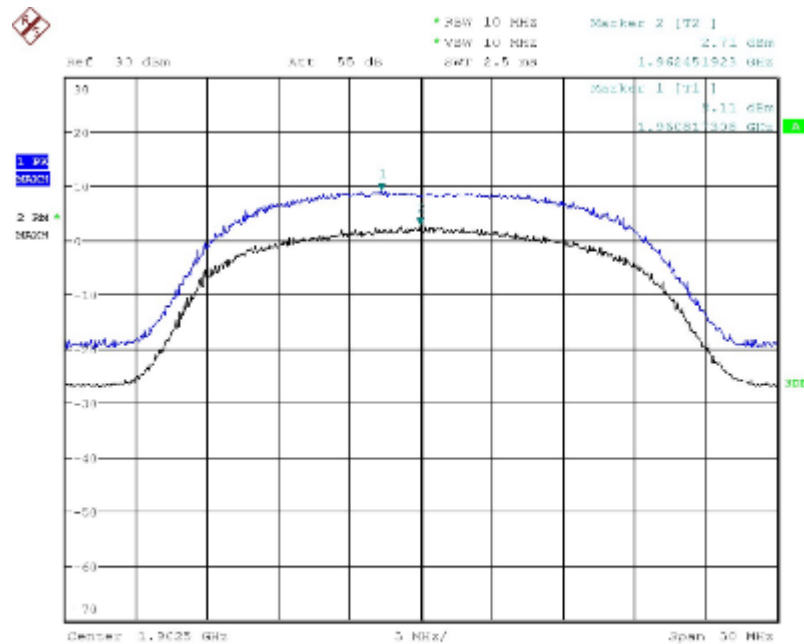


Date: 7.OCT.2023 10:42:40

Figure 29: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, Mid Channel

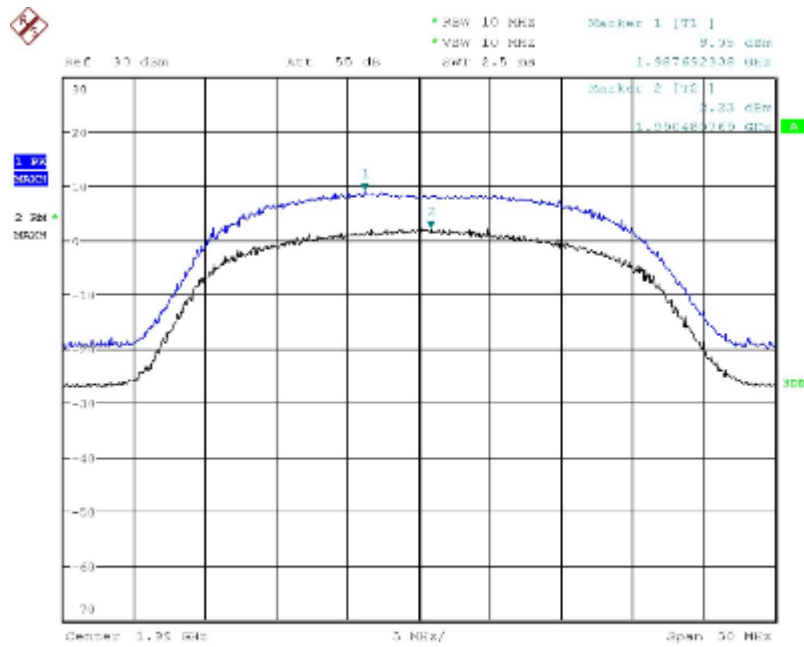

Date: 7.OCT.2023 10:45:59

Figure 30: Ant 1 Output Power, 10 MHz BW, QPSK/64QAM, High Channel

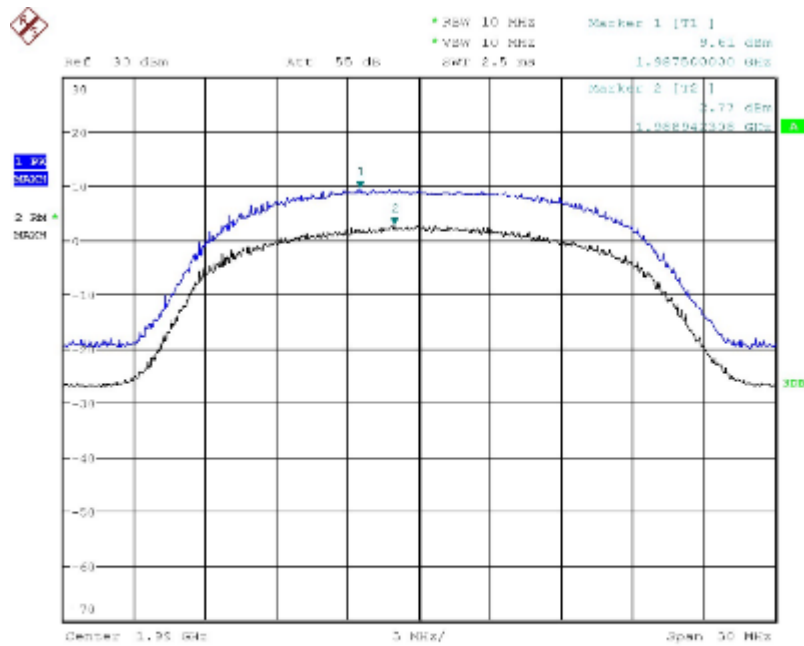

Date: 7.OCT.2023 10:46:17


Figure 31: Ant 2 Output Power, 10 MHz BW, QPSK/64QAM, High Channel



Figure 32: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, Low Channel




Figure 33: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, Low Channel

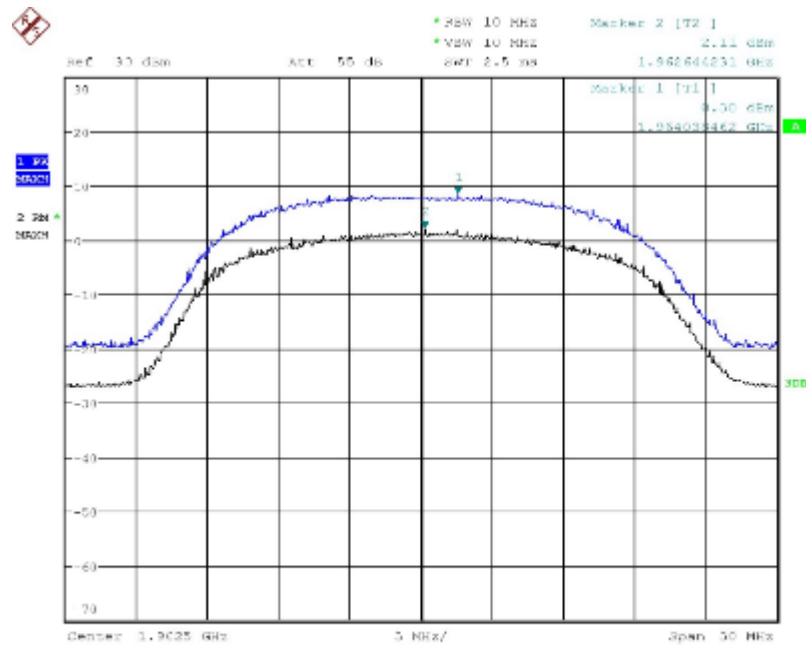


Date: 7.OCT.2023 10:59:10

Figure 34: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, Mid Channel

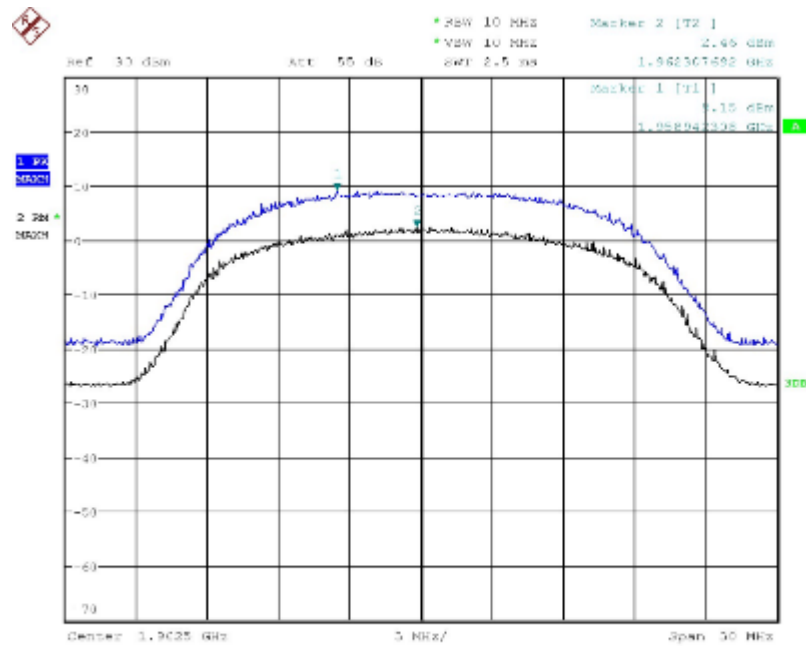


Date: 7.OCT.2023 10:59:11

Figure 35: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, Mid Channel

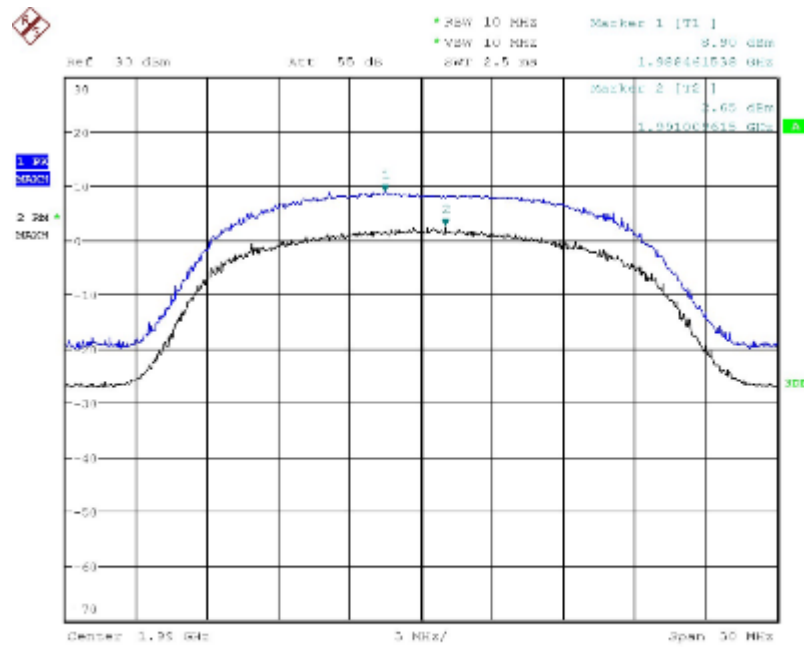


Date: 7.OCT.2023 10:59:09

Figure 36: Ant 1 Output Power, 10 MHz BW, QPSK/256QAM, High Channel

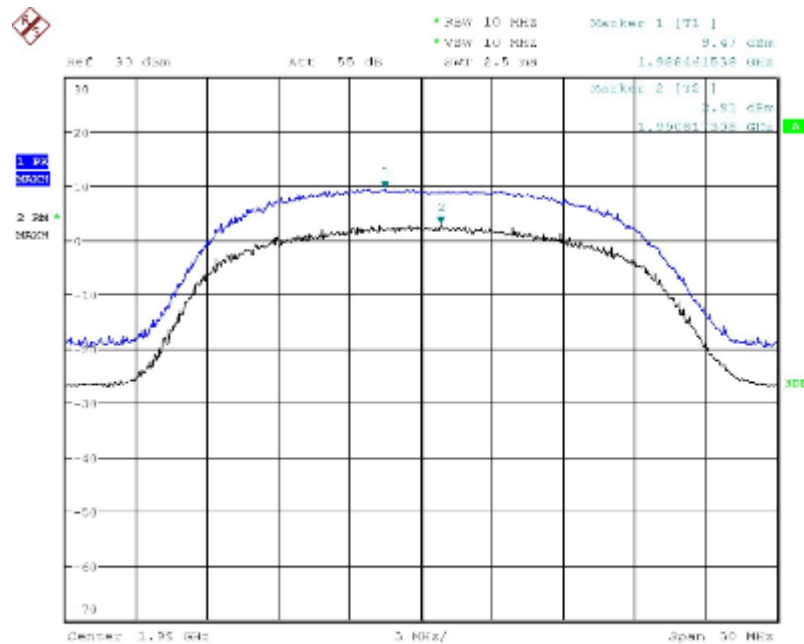


Date: 7.OCT.2023 11:35:19

Figure 37: Ant 2 Output Power, 10 MHz BW, QPSK/256QAM, High Channel

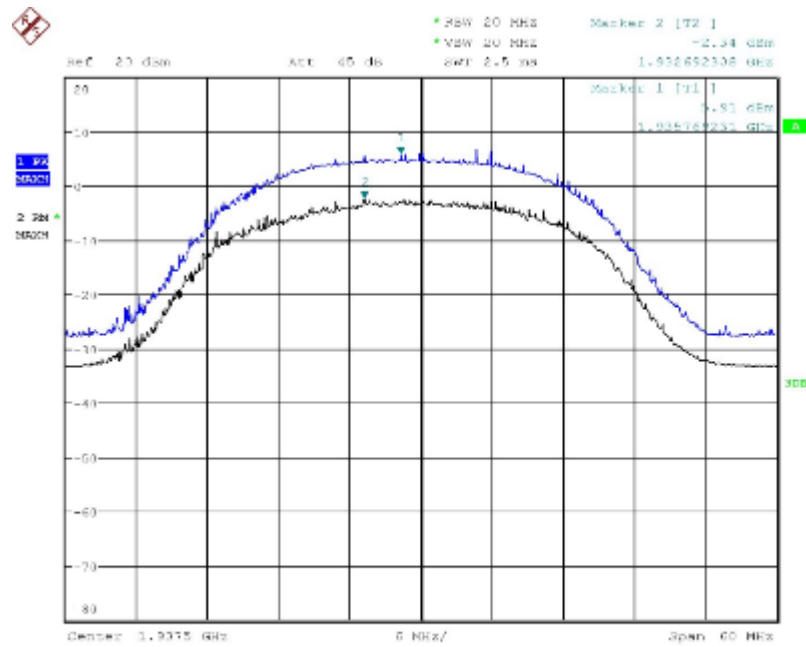


Date: 7.OCT.2023 11:50:29

Figure 38: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, Low Channel

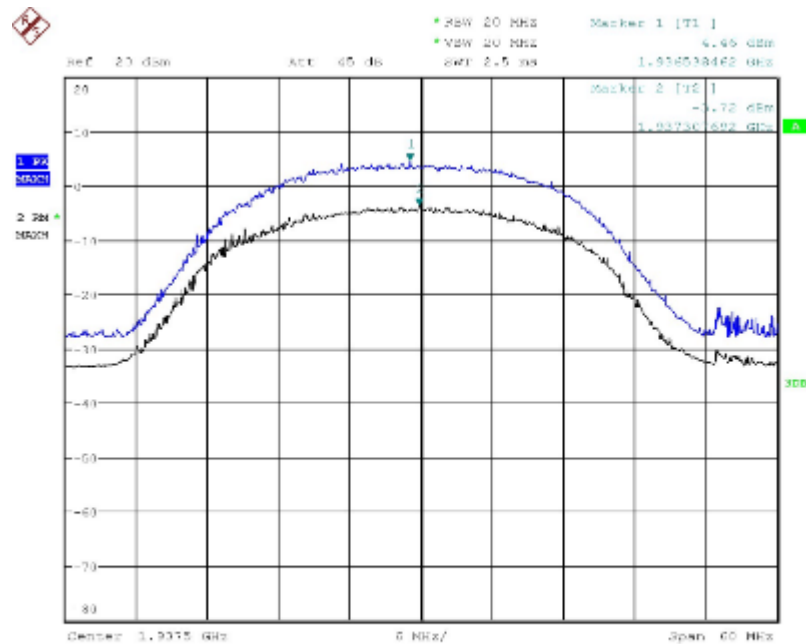


Date: 7.OCT.2023 11:54:09

Figure 39: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, Low Channel

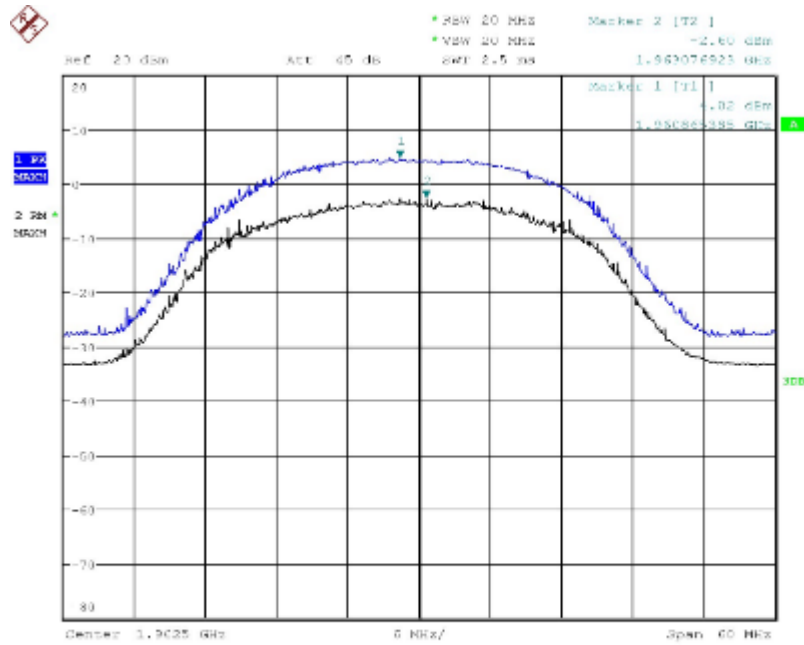


Date: 9.OCT.2023 11:56:23

Figure 40: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, Mid Channel

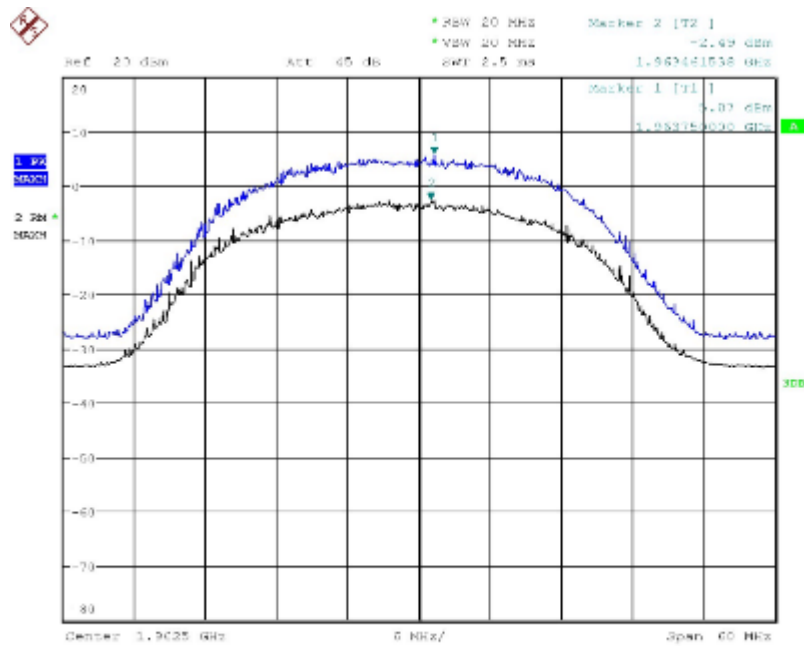


Date: 9.OCT.2023 11:57:34

Figure 41: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, Mid Channel

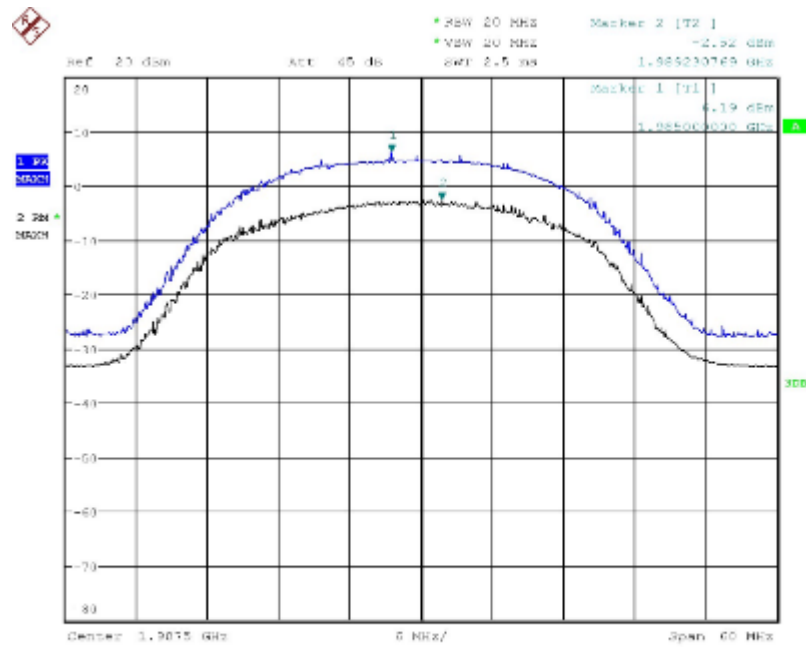


Date: 7.OCT.2023 11:59:42

Figure 42: Ant 1 Output Power, 15 MHz BW, QPSK/16QAM, High Channel

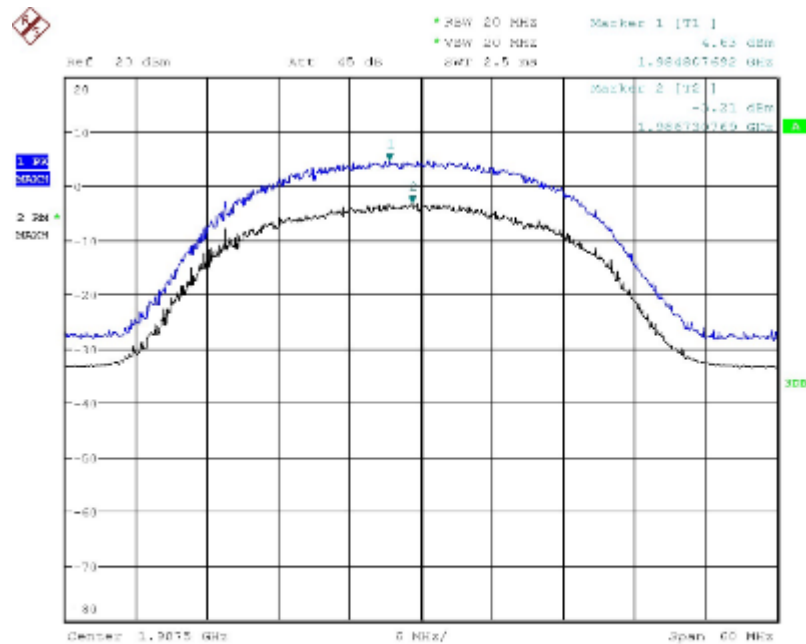


Date: 7.OCT.2023 12:00:51

Figure 43: Ant 2 Output Power, 15 MHz BW, QPSK/16QAM, High Channel

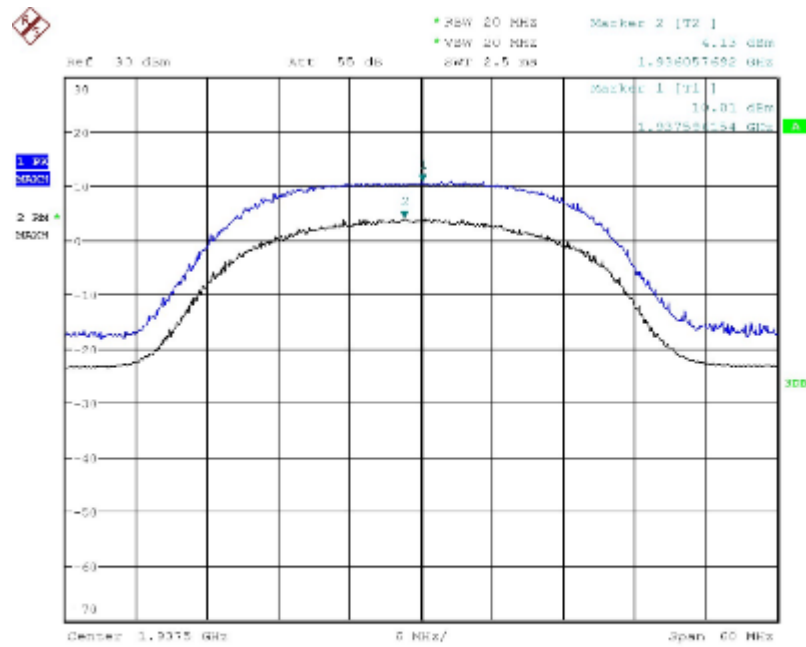


Date: 7.OCT.2023 12:06:10

Figure 44: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, Low Channel

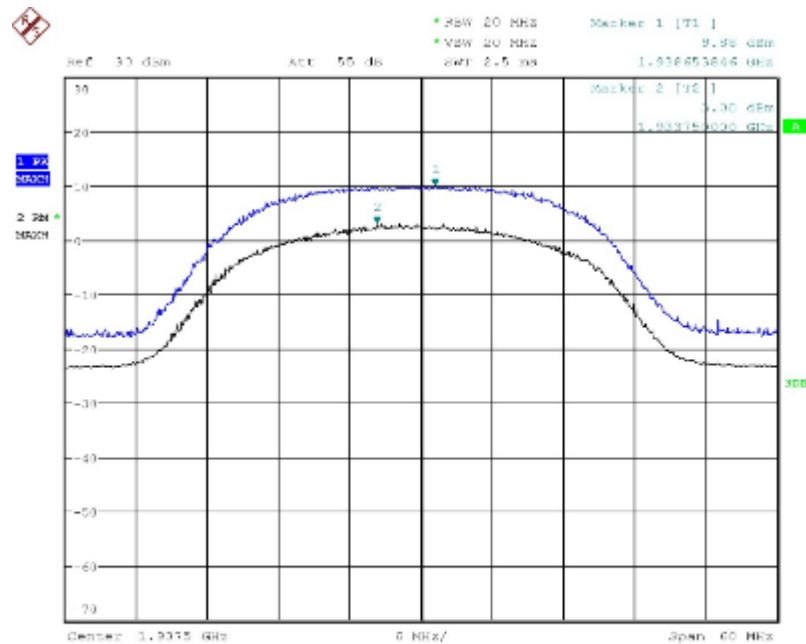


Date: 7.OCT.2023 12:07:47

Figure 45: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, Low Channel

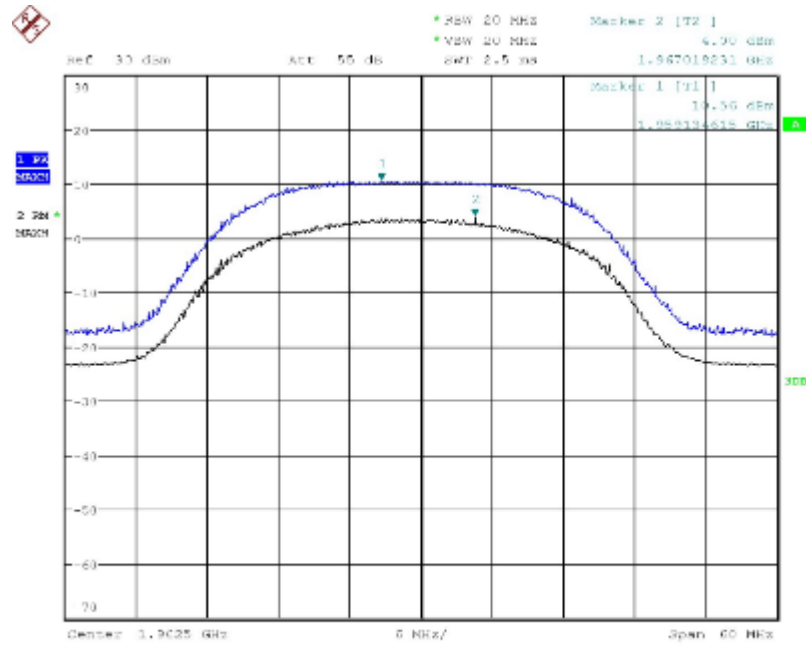


Date: 7.OCT.2023 12:09:54

Figure 46: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, Mid Channel

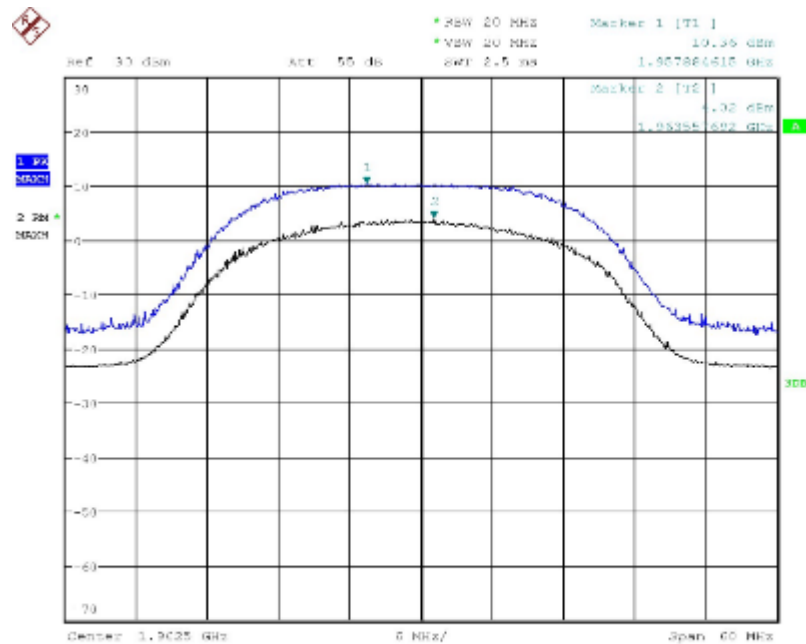


Date: 7.OCT.2023 12:10:57

Figure 47: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, Mid Channel

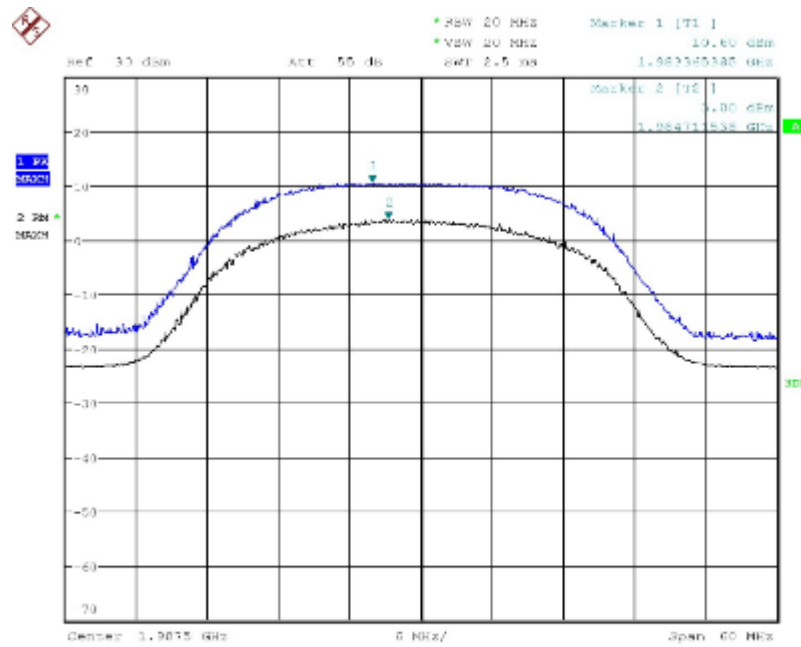


Date: 7.OCT.2023 12:19:41

Figure 48: Ant 1 Output Power, 15 MHz BW, QPSK/64QAM, High Channel

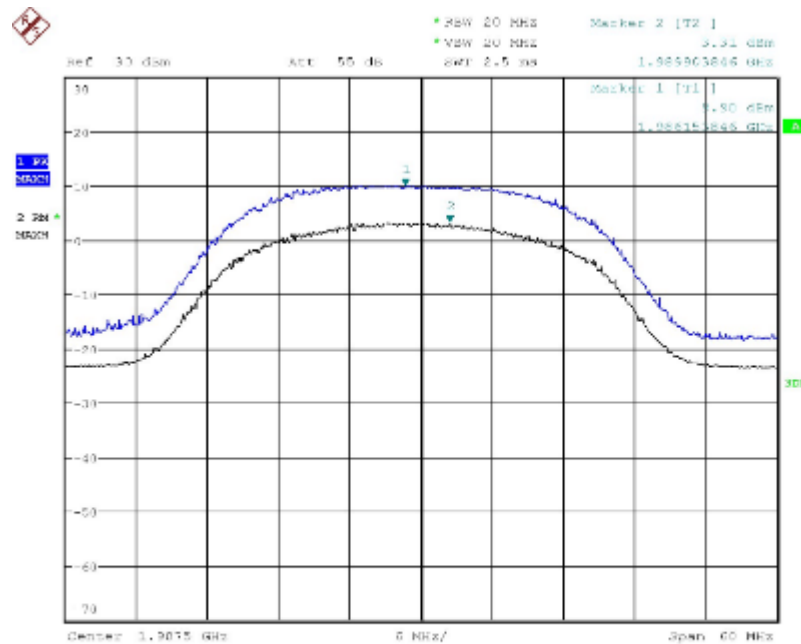


Date: 7.OCT.2023 12:14:49

Figure 49: Ant 2 Output Power, 15 MHz BW, QPSK/64QAM, High Channel

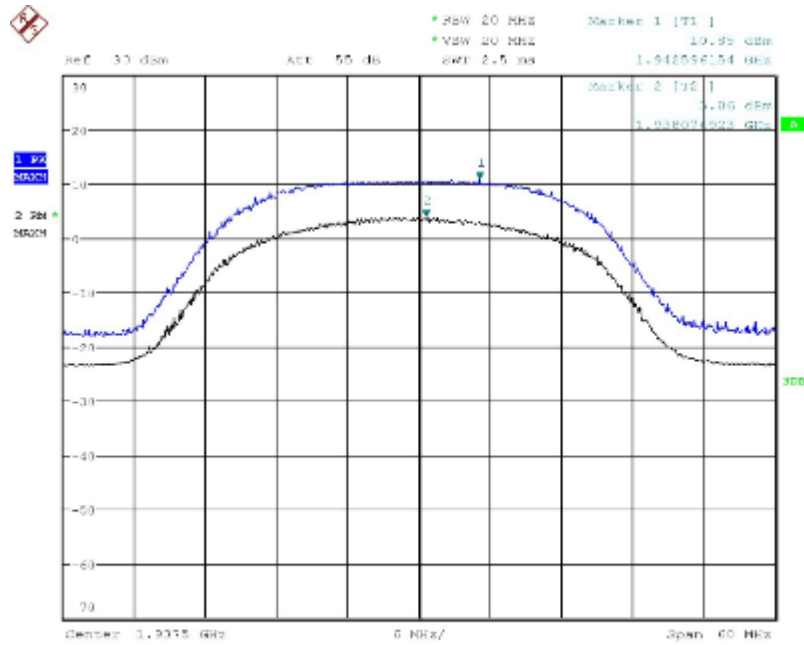


Date: 9.OCT.2023 12:19:41

Figure 50: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, Low Channel

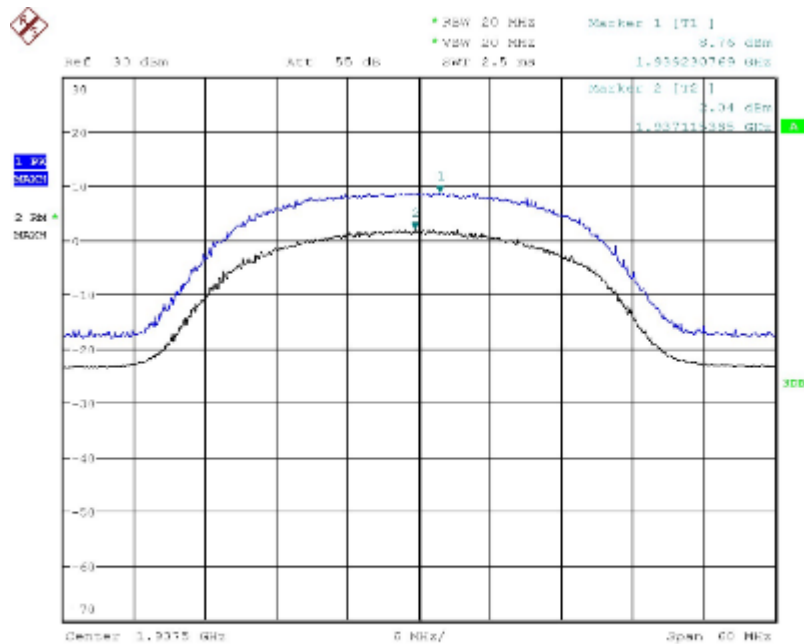


Date: 9.OCT.2023 12:11:22

Figure 51: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, Low Channel

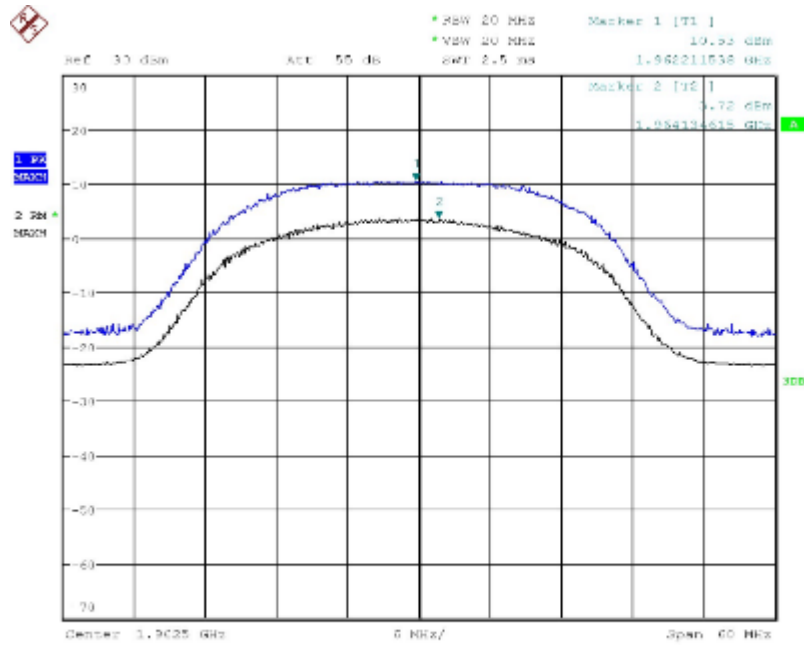


Date: 7.OCT.2023 12:19:40

Figure 52: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, Mid Channel

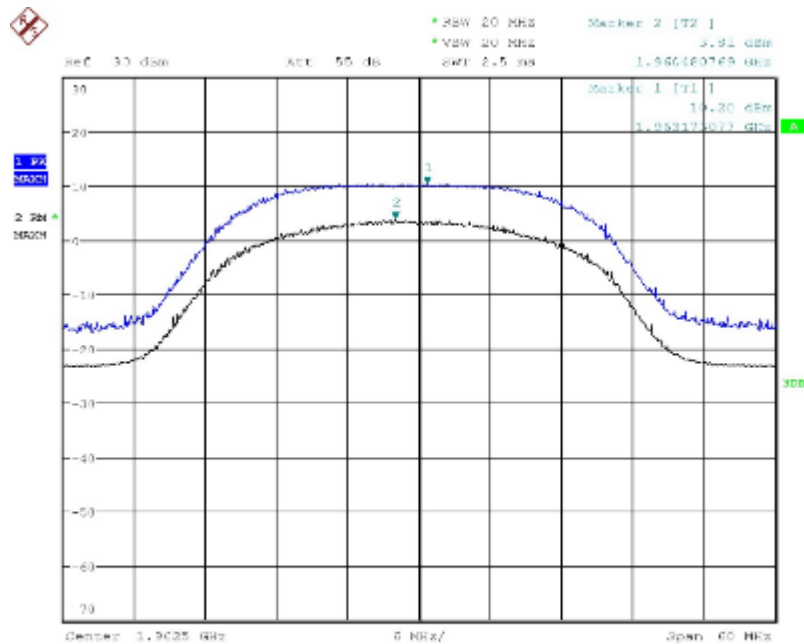


Date: 7.OCT.2023 12:29:24

Figure 53: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, Mid Channel

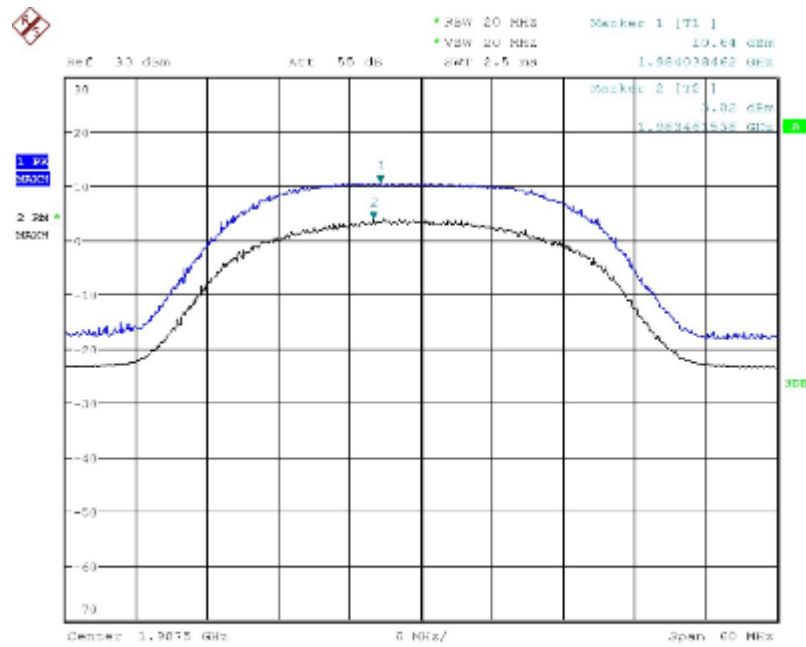


Date: 7.OCT.2023 12:25:03

Figure 54: Ant 1 Output Power, 15 MHz BW, QPSK/256QAM, High Channel

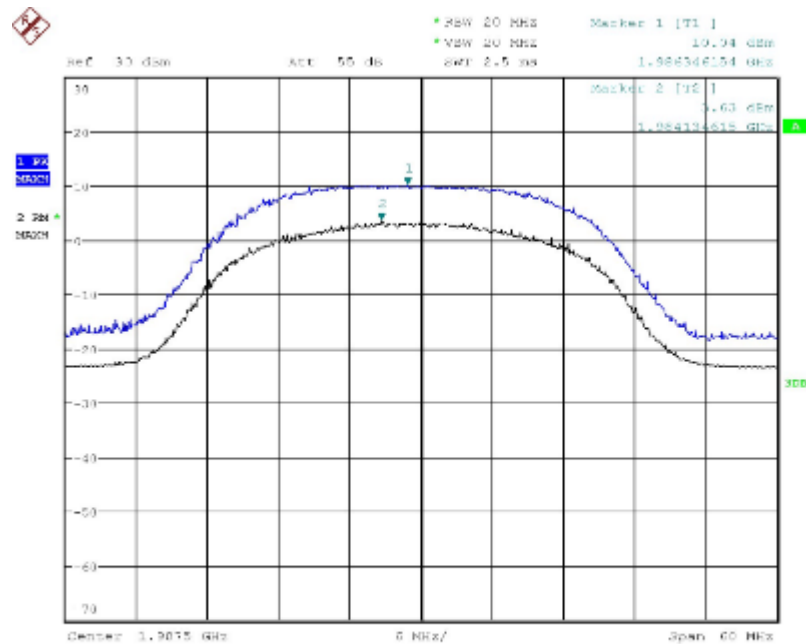


Date: 7.OCT.2023 12:27:10

Figure 55: Ant 2 Output Power, 15 MHz BW, QPSK/256QAM, High Channel

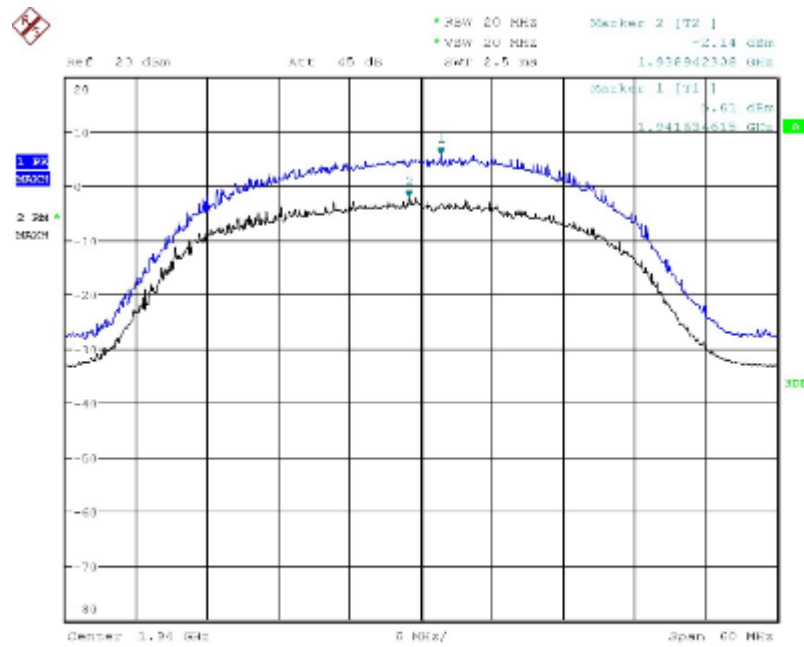


Date: 9.OCT.2023 12:34:53

Figure 56: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, Low Channel

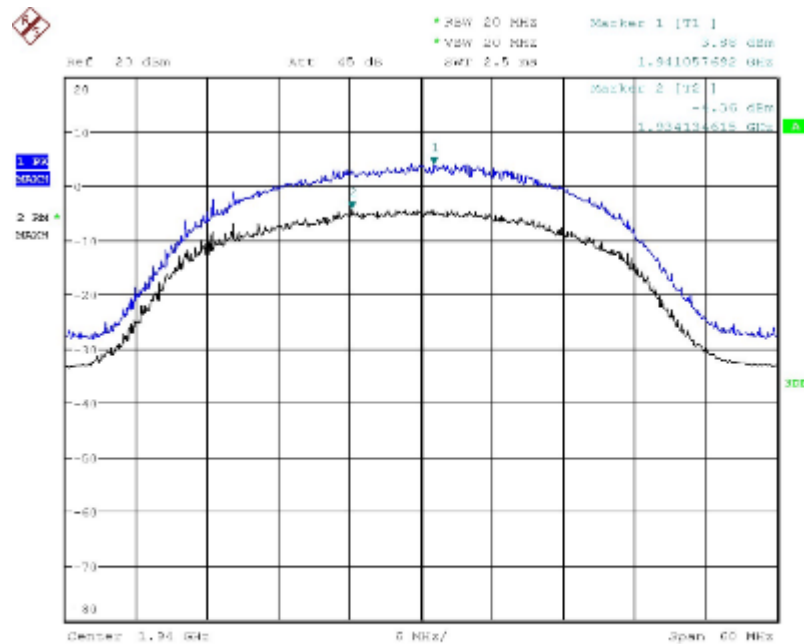


Date: 9.OCT.2023 12:39:21

Figure 57: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, Low Channel

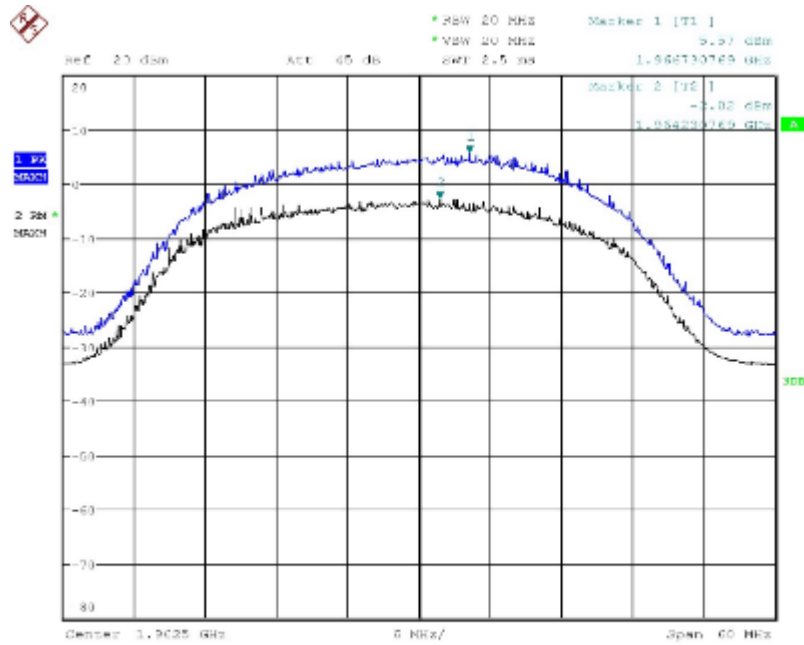


Date: 7.OCT.2023 12:42:34

Figure 58: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, Mid Channel

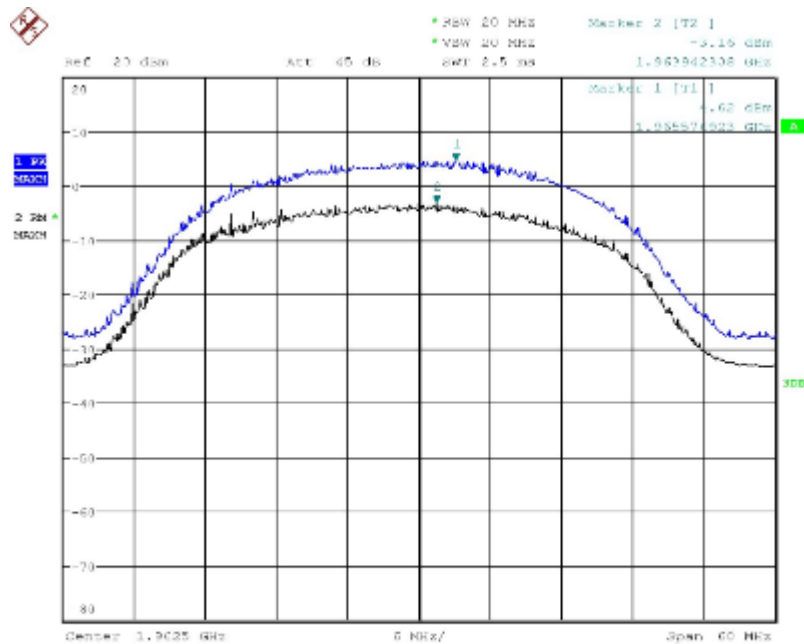


Date: 7.OCT.2023 12:44:03

Figure 59: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, Mid Channel

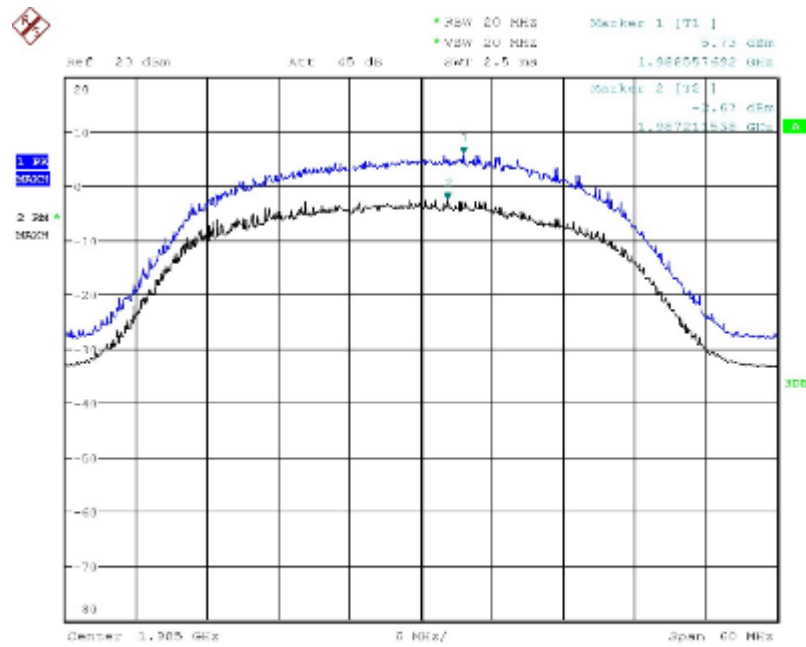


Date: 7.OCT.2023 12:46:46

Figure 60: Ant 1 Output Power, 20 MHz BW, QPSK/16QAM, High Channel

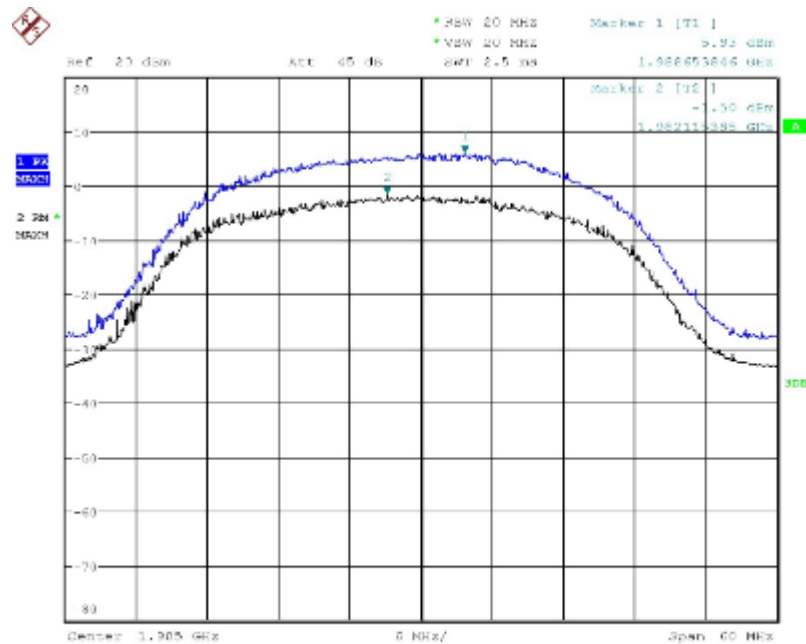


Date: 7.OCT.2023 12:46:46

Figure 61: Ant 2 Output Power, 20 MHz BW, QPSK/16QAM, High Channel

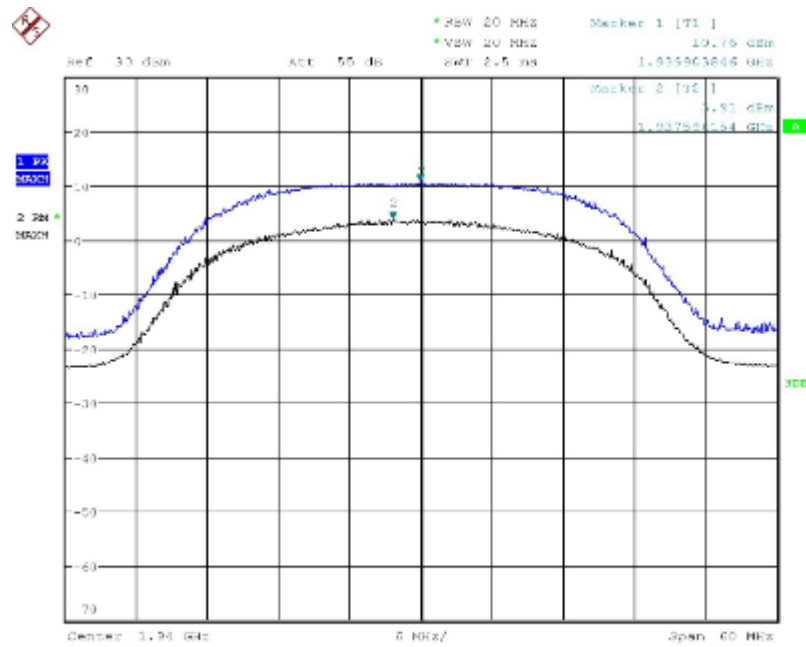


Date: 7.OCT.2023 12:48:37

Figure 62: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, Low Channel

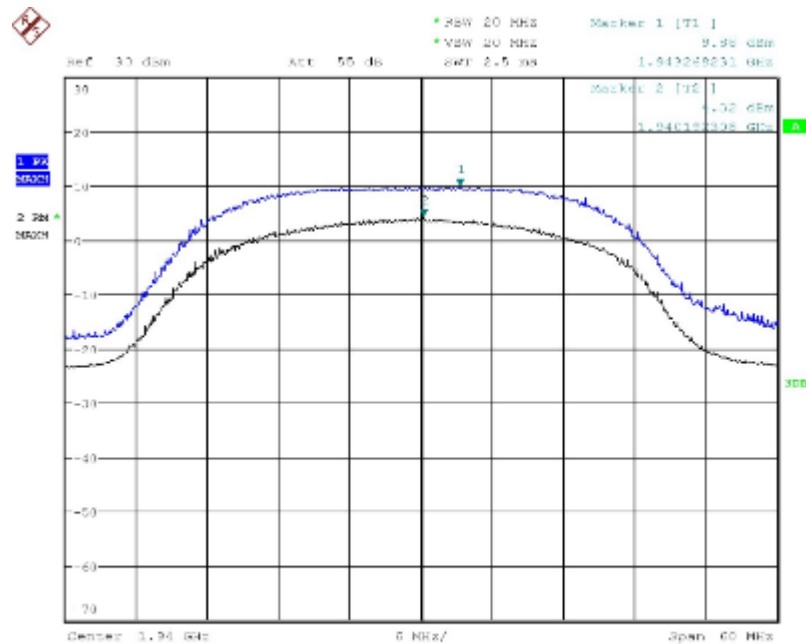


Date: 7.OCT.2023 12:48:37

Figure 63: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, Low Channel

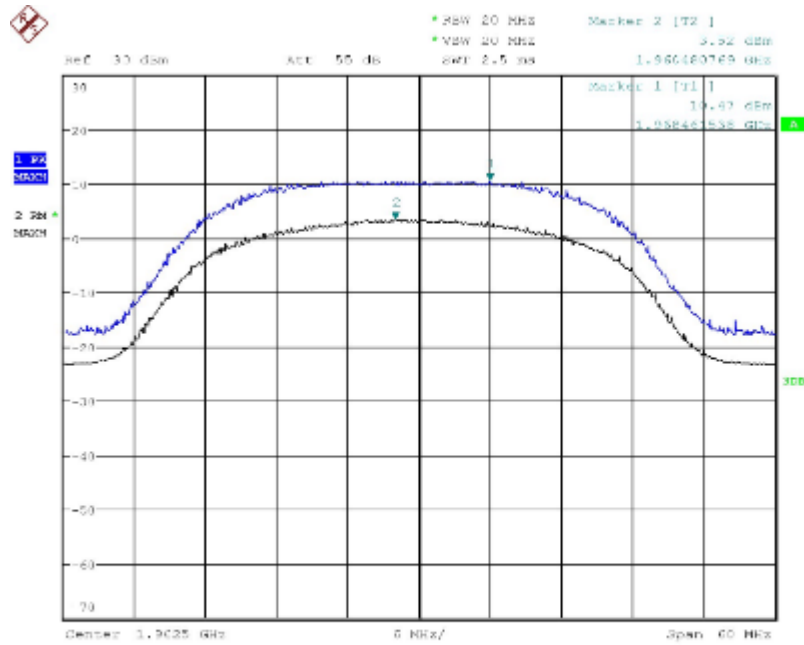


Date: 7.OCT.2023 12:51:40

Figure 64: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, Mid Channel

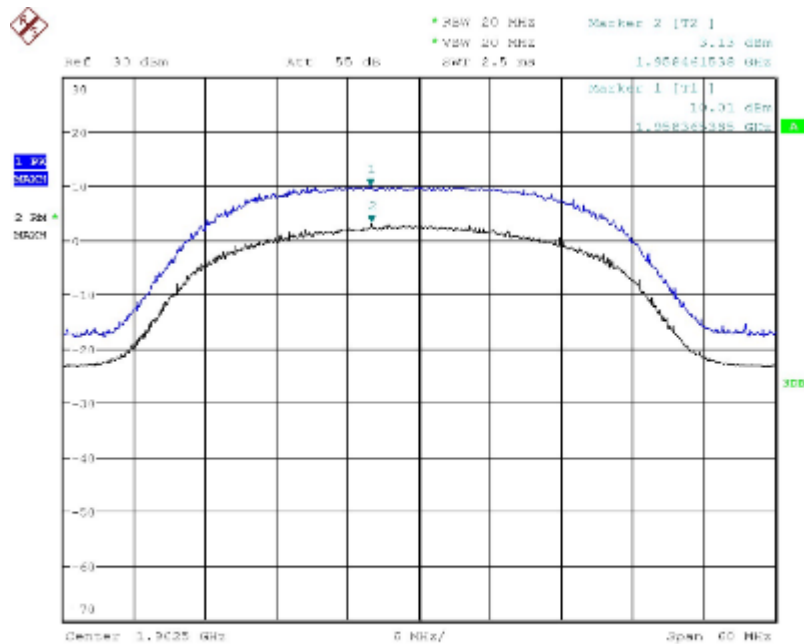


Date: 7.OCT.2023 12:52:50

Figure 65: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, Mid Channel

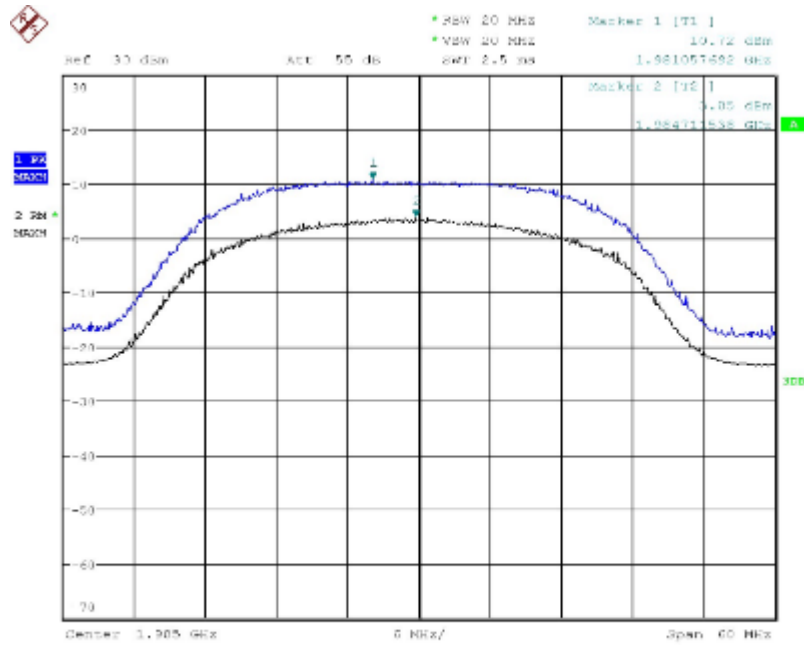


Date: 7.OCT.2023 12:59:19

Figure 66: Ant 1 Output Power, 20 MHz BW, QPSK/64QAM, High Channel

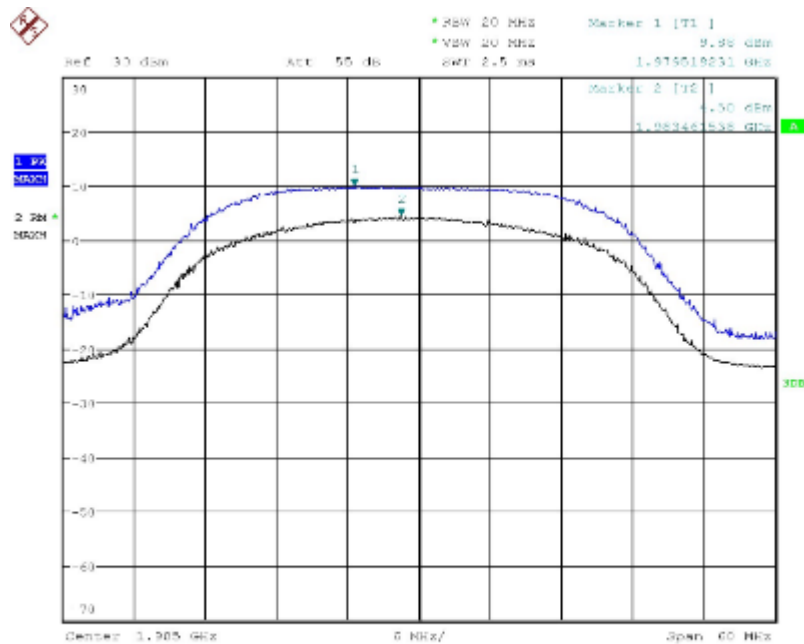


Date: 7.OCT.2023 12:57:03

Figure 67: Ant 2 Output Power, 20 MHz BW, QPSK/64QAM, High Channel

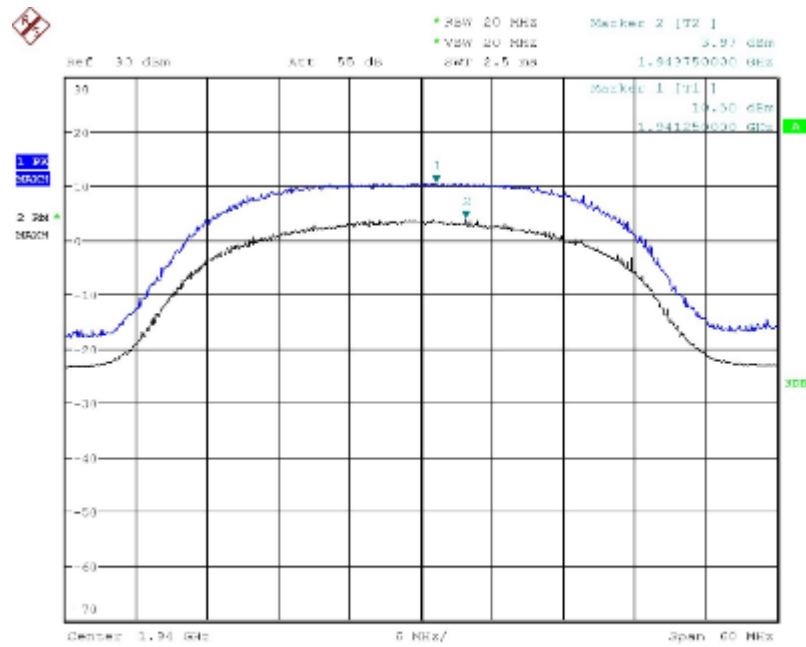


Date: 7.OCT.2023 13:00:09

Figure 68: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, Low Channel

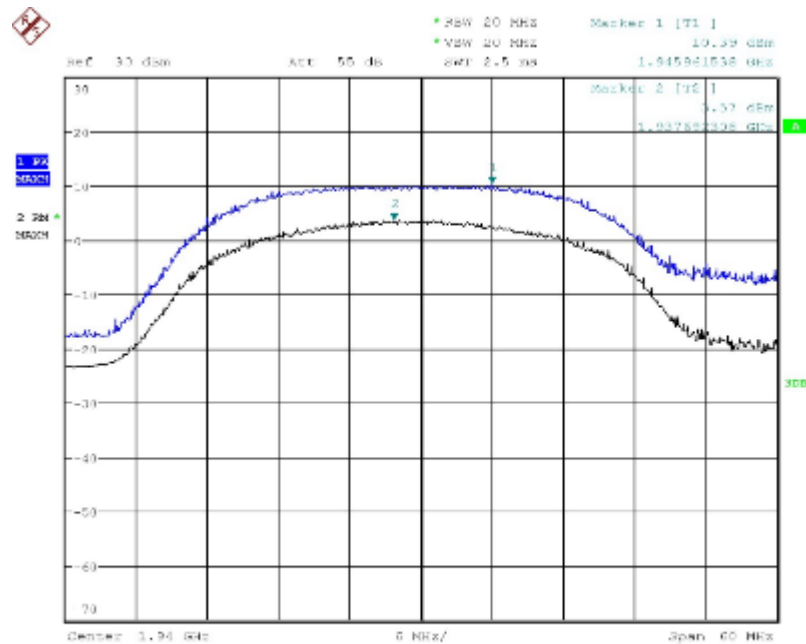


Date: 7.OCT.2023 13:01:20

Figure 69: Ant 2 Output Power, 20 MHz BW, QPSK/256QAM, Low Channel

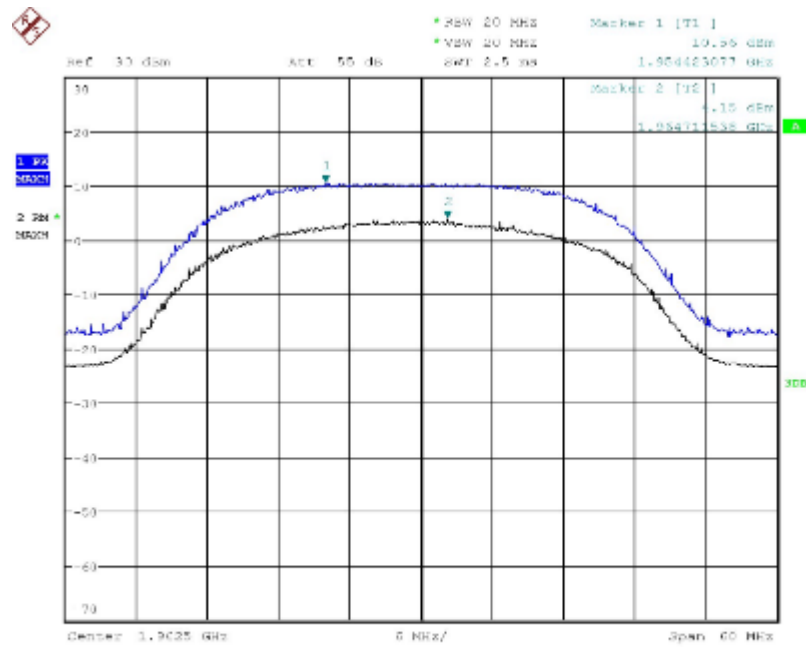


Date: 7.OCT.2023 13:09:01

Figure 70: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, Mid Channel

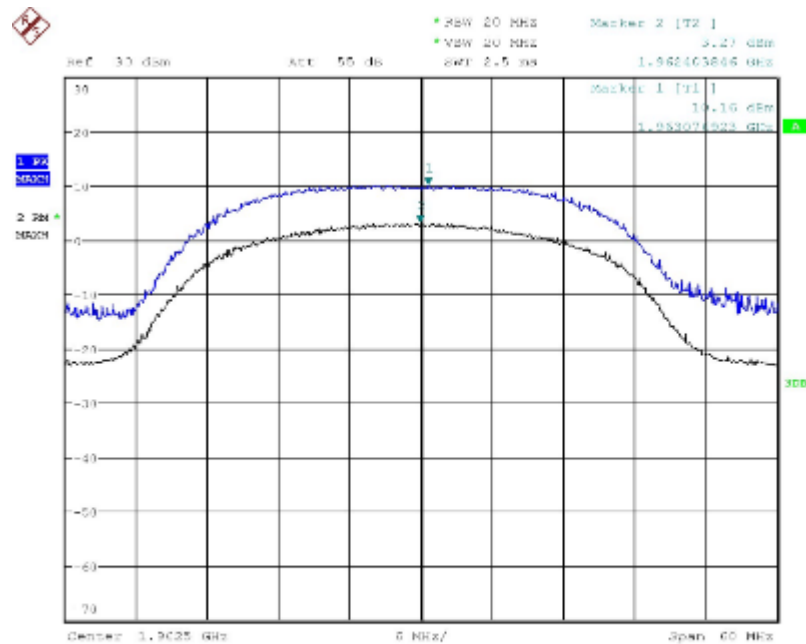


Date: 7.OCT.2023 13:04:29

Figure 71: Ant 2 Output Power, 20 MHz BW, QPSK/256QAM, Mid Channel

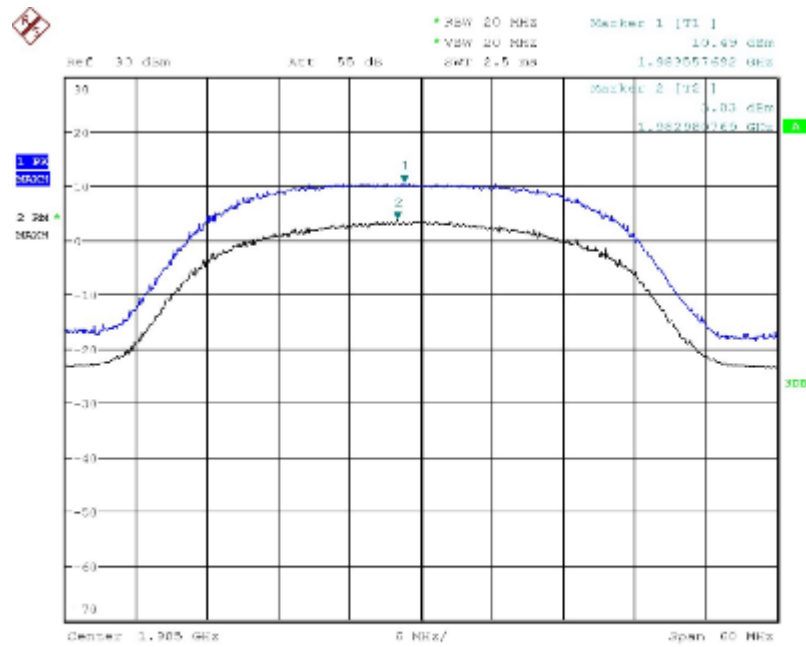

Date: 9.OCT.2023 13:07:09

Figure 72: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, High Channel

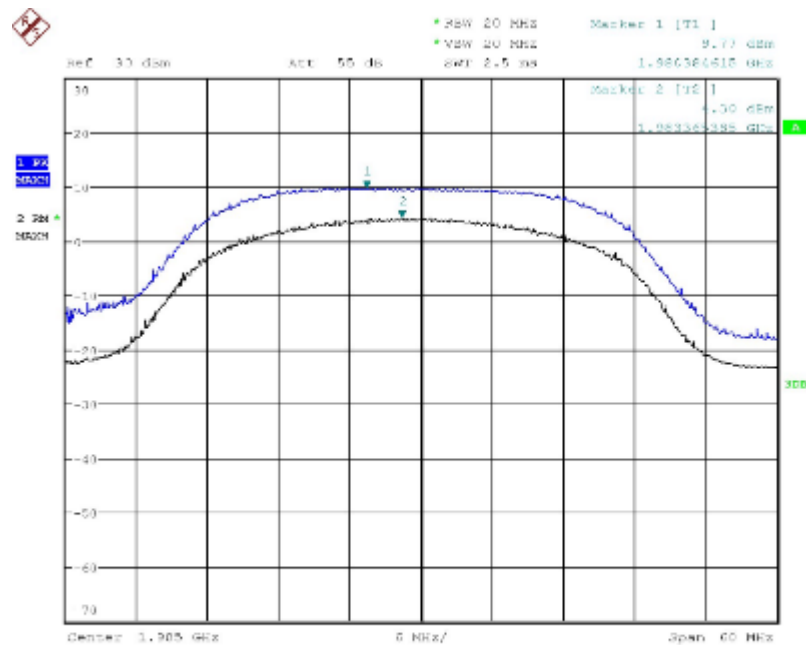

Date: 9.OCT.2023 13:09:47

Figure 73: Ant 1 Output Power, 20 MHz BW, QPSK/256QAM, High Channel



3.2 99% Bandwidth

Date Performed:	October 4, 2023
Test Standard:	FCC CFR 47 Part 24.232 (a)(2), (a)(3), (b)(2), (b)(3) RSS-Gen Issue 5 SRSP-510 Issue 5 (5.1)
Test Method:	RSS-Gen Issue 5 ANSI C63.26: 2015
Modifications:	None.
Final Result:	Complies Maximum Bandwidth Measured: 5 MHz Set: 4.27 MHz 10 MHz Set: 8.75 MHz 15 MHz Set: 12.87 MHz 20 MHz Set: 17.78 MHz

Applicable Regulation:

FCC CFR 47 Part 24.232 (a)(2)

Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

FCC CFR 47 Part 24.232 (a)(3)

Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Table below

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

FCC CFR 47 Part 24.232 (b)(2)

Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

FCC CFR 47 Part 24.232 (b)(3)

Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see table below.

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

SRSP-510 Issue 5:

5.1 Radiated power and antenna height limits for fixed and base stations

For base stations with a channel bandwidth greater than 1 MHz, the maximum e.i.r.p. is limited to 3280 watts/MHz e.i.r.p. (i.e., no more than 3280 watts e.i.r.p. in any 1 MHz band segment) with an antenna height above average terrain (HAAT) up to 300 metres. Fixed or base stations operating in urban areas are limited to a maximum allowable e.i.r.p. of 1640 watts/MHz e.i.r.p. Base station antenna heights above average terrain may exceed 300 metres with a corresponding reduction in e.i.r.p. according to the following table:

Antenna height (AAT) in Meters (feet)	Maximum equivalent isotropic radiated power (EIRP) in Watts / MHz
≤300	3280 or 1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

RSS-Gen Issue 5:

6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth)

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g., on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Setup:

The EUT was tested outside the SAC via output-conducted measurements per RSS-Gen Issue 5 and ANSI C63.26:2015.



Measurement Data and Plots:

Modulation Scheme	Carrier Frequency (MHz)	BW Setting (MHz)	99% Bandwidth (MHz)	Result
QPSK / 16QAM	1932.5	5	4.27	Complies
QPSK / 16QAM	1962.5	5	4.17	Complies
QPSK / 16QAM	1992.5	5	4.24	Complies
QPSK / 64QAM	1932.5	5	4.18	Complies
QPSK / 64QAM	1962.5	5	4.19	Complies
QPSK / 64QAM	1992.5	5	4.18	Complies
QPSK / 256QAM	1932.5	5	4.20	Complies
QPSK / 256QAM	1962.5	5	4.18	Complies
QPSK / 256QAM	1992.5	5	4.18	Complies
QPSK / 16QAM	1935	10	8.75	Complies
QPSK / 16QAM	1962.5	10	8.75	Complies
QPSK / 16QAM	1990	10	8.72	Complies
QPSK / 64QAM	1935	10	8.58	Complies
QPSK / 64QAM	1962.5	10	8.60	Complies
QPSK / 64QAM	1990	10	8.62	Complies
QPSK / 256QAM	1935	10	8.60	Complies
QPSK / 256QAM	1962.5	10	8.60	Complies
QPSK / 256QAM	1990	10	8.62	Complies
QPSK / 16QAM	1937.5	15	12.87	Complies
QPSK / 16QAM	1962.5	15	12.83	Complies
QPSK / 16QAM	1987.5	15	12.76	Complies
QPSK / 64QAM	1937.5	15	12.62	Complies
QPSK / 64QAM	1962.5	15	12.65	Complies
QPSK / 64QAM	1987.5	15	12.65	Complies
QPSK / 256QAM	1937.5	15	12.62	Complies
QPSK / 256QAM	1962.5	15	12.69	Complies
QPSK / 256QAM	1987.5	15	12.65	Complies
QPSK / 16QAM	1940	20	17.50	Complies
QPSK / 16QAM	1962.5	20	17.50	Complies
QPSK / 16QAM	1985	20	17.78	Complies
QPSK / 64QAM	1940	20	17.11	Complies
QPSK / 64QAM	1962.5	20	17.16	Complies
QPSK / 64QAM	1985	20	17.16	Complies
QPSK / 256QAM	1940	20	17.21	Complies
QPSK / 256QAM	1962.5	20	17.11	Complies
QPSK / 256QAM	1985	20	17.16	Complies

Table 29: 99% Bandwidth