

汉峰【极智】安卓智能桌面电话
HF [Intelligence] Android Smart Desk Phone
说明书
Handbook

汉峰世纪科技（北京）有限公司

HF Century Technology (Beijing) Limited Co.

2012 年 6 月版本

Revised in June, 2012

目录

Contents

外观

Appearance

汉峰【极智】智能电话共有 2 种款式，分别为 7 寸和 10 寸，另有 3 种颜色，分别为炫目、至尊黑、激情蓝。

HF [Intelligence] Smart Desk Phone contains 2 styles—7 inches and 10 inches, and 3 colors—shocking color, extreme black and speed blue.

7 寸

7inches



10 寸

10inches




设计图

Design Drawing

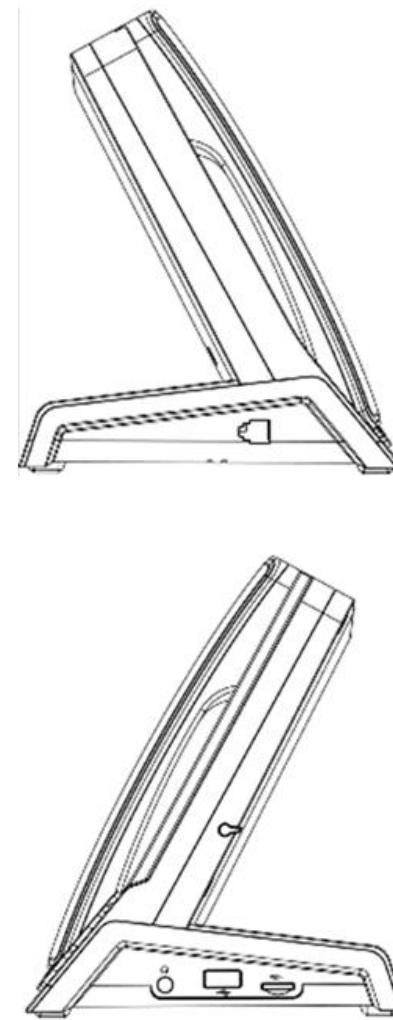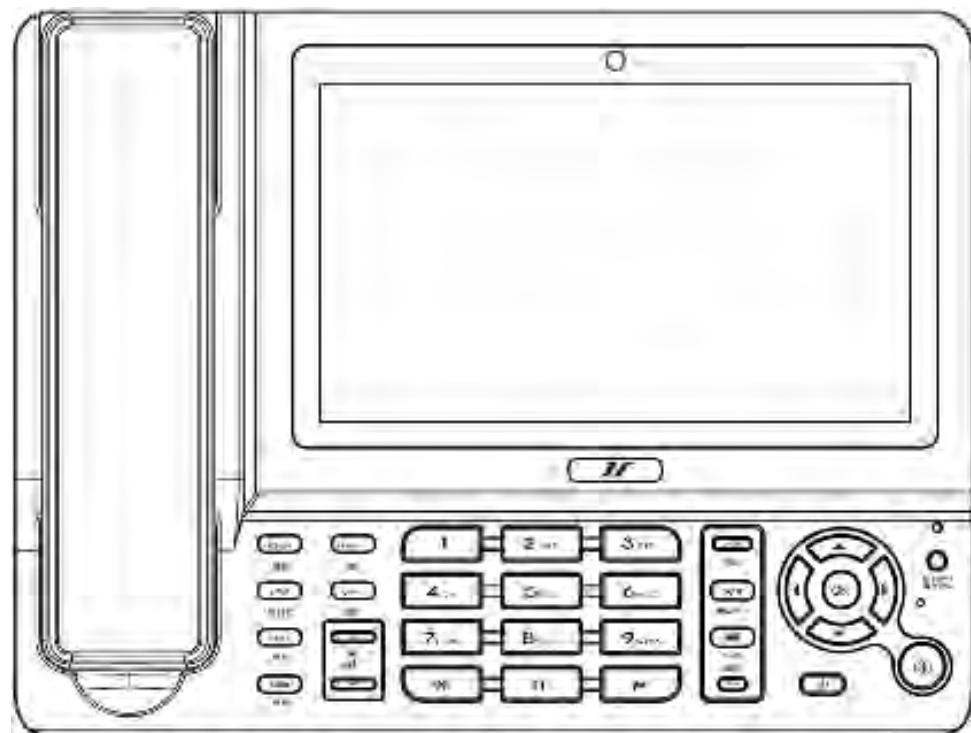


整机外部介绍

About the Exterior of the Phone

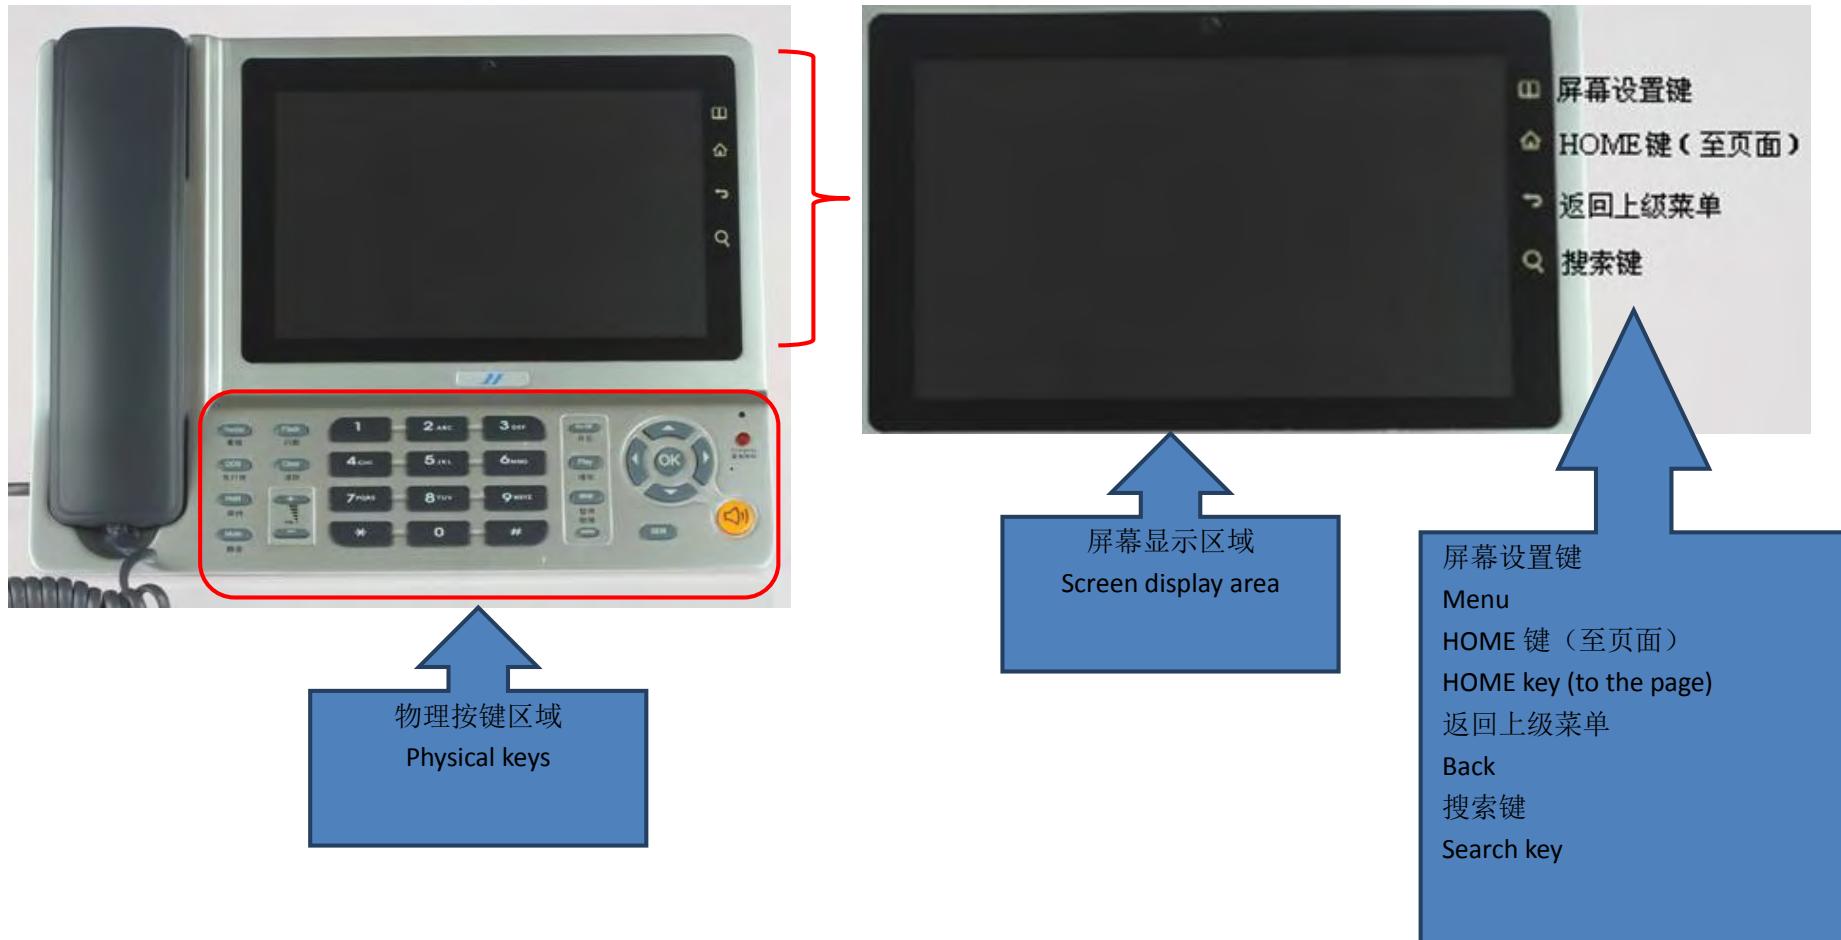

物理按键介绍

About Physical Keystroke



“0~9” 数字键及“*、#” 符号键。

Numeric keys: "0-9" and symbolic keys: "*", "#".



Redial 键/重拨键。拨出对方的电话号码后, 听到忙音, 挂机稍候再按"REDIAL"键一下即可将原拨号码重新拨出去。将“重拨键”点亮, 则为系统自动在预设时间内不间断重拨此电话, 直到拨通为止。拨通后, 追拨功能自动解除, 这不仅可省去重复拨号所需的时间, 还可减少差错。

Redial key (dual functions). If press once, redial last dialed number. If hold the redial key until lit, the system will automatically redial the last dialed number in the next hour every 5 minutes. After phone gets answered, the auto redial function is automatically released.



取消来电声音, 来电界面内容不变。

Don't Disturb. The phone does not ring for an incoming call.



外线保持键。当接到电话需要找人时, 按一下此键, 对方无法听到任何声音, 此时, 将手柄放在座机上去找人, 电话也不会被挂断。该键还可当保密键使用, 当你打电话时要和周围人插话而又不想让对方听到时, 可按此键。

Hold key. The conversation will be put on hold.



通话过程中按下此键，对方将无法听到您的声音，但您可以听到对方声音。

During a call, you can press this to mute the microphone.



同挂机键同样功能类似，但不会把电话真正挂断。也可在同时与两条线路通话时，切换来电方，从而不会丢失任何一通电话。

It has the similar function as that of the Call Termination key (end key), except that it doesn't really hang up. In case that you communicate with two talk lines, you can press the key to switch between the two callers without missing any of them.



拨号时如输错，可以使用清除键一一清除。

If you input the number wrongly when dial, press the Clear key to clear them.



调整声音大小，“”为音量增加，“”为音量减少。

Adjust the (sound) volume, "" increases it and "" decreases it.



开启电话录音功能；开启后，如电话无人接听可以自动开启电话录音功能，避免丢失重要电话。

开启

To turn on the phone recording function. After turned on, the phone can automatically record phone call to avoid losing important phone calls if nobody answers.



播放电话留言及停止播放留言录音。

播放/停止

Play and stop playing the recording of the telephone message.



下一条

选择性播放下一条电话留言。

Play the next telephone message selectively.



删除



删除电话中的电话留言。

Delete the telephone message in the phone.



通过物理键盘选择屏幕上的按钮并确定进入，方向键分为上下左右。在您将智能终端设备与电视用 HDMI 接口连接后，将电视调整到相应输入端口，再在物理键盘中按“OK”键，即可将智能终端与电视完美连接。

Use the physical keyboard to select buttons on the screen and confirm to enter, and direction keys are "Up", "Down", "Left" and "Right". You can perfectly connect the smart terminal and TV by the following steps: (a) connect the smart terminal and TV via HDMI; (b) adjust TV to corresponding input port; (c) press the OK key on the physical keyboard.



开关屏幕或者电话机按键。按此键一下即可关闭电话机的显示屏，再按一下则开启，但再次期间电话机可正常工作。

Press the key to turn on/off the screen or the telephone. Press it once the telephone's display screen will be closed and press it again the screen will be opened, and meanwhile the telephone normally runs.



可以不使用手柄，直接使用免提键进行通话，解放你的双手，此键开启后，除您本人外，在您周围的人也可以听到电话内容。

You can press Handsfree to talk on the phone without using your hands to take the handle. After you press Handsfree, the people around you can also hear your phone conversation.



可预先设置紧急呼叫键，如 110 匪警。在紧急时刻，可以不用拨号，不用拿起手柄，直接拨打紧急求助电话。与此同时，在此功能下，您可预先添置紧急呼叫邮件系统，在您按下此键拨通紧急电话同时，系统将自动发邮件给您的亲人或者朋友，亲人朋友的邮件地址须提前设置，设置步骤同设置紧急电话号码步骤一样。

You can set emergency call keys (for example, the 110 police call key) in advance. In emergencies, you can directly make emergency calls by using emergency call keys without taking the handle and dialing the number. In addition, you can set the emergency call-based email system in advance. When you press an emergency call key to make an emergency call, the system automatically sends emails to your relatives and friends. Email addresses of your relatives and friends must be set in advance. The procedure for setting email addresses is the same as that for setting emergency call keys.

插口功能介绍

About the interfaces' functions

RESET

热起键（重启键）



Warm Boot key (Reset key)



数据线接口（主）: 连接数据线与电脑或其他设备，上传或下载信息。

The main interface of Data Cable: connects data cable with computer or other devices to upload or download information.



以太网接口: 连接以太网连接线。

Ethernet interface: links Ethernet cable.



电话线接口（外线接口）: 共有两个电话线接口，连接 1 条电话线同时，可通过另一个接口接入分机。分机和主机在来电后将同时响起。

Telephone Line interface (Outside Line interface): there are 2 telephone line interfaces—one connects telephone line and meanwhile the other connects a telephone extension. When there is an incoming call, both the main phone and the extension ring together.



电源线接口: 连接电源，电源线本终端机套装内已含。

Power Cord interface: connects to the electricity supply and the power cord is contained in the terminal's suite.



HDMI 接口: 连接电视接口 (高清), 通过电话机连接电视, 观看网剧情的同时还不会漏掉重要电话。

HDMI: connects the phone and TV interface (HD). By connecting them you can watch movies and teleplays on the Internet without missing import phone calls.



手柄接口: 将座机与手柄相连接。

Handle interface: connects the desk phone with the handle.



耳机线插口: 连接耳机, 解放双手, 避免使用免提而把自己的通话内容泄露给周围人。

Earphone Cord jack: connects the phone with the earphone and frees your hands to avoid using the handsfree function, which may result in the leakage of your phone conversation to the people around you.



USB 插口 (副): 可以直接插 U 盘等, 来传递资料, 更新话机内容。

USB jack (auxiliary): plug in USB flash disk directly to transfer data and update the phone contents.



MicroSD 卡插口: 插 SD 卡可增加话机储存容量, 本机最大可接受 32G 的 SD 卡, SD 卡自备, 本机不随机提供。

MicroSD Card jack: plug in SD card to increase storage capacity of the phone. The maximum storage of the SD card accepted by the phone is 32G. You must prepare the card by yourself.

线路连接

Line Connection

手柄连接:

Handle Connection:



电源线连接:

Power Cord Connection:



电话线连接:

Telephone Line Connection:



数据线连接:

Data Cable Connection:



Micro SD 卡连接:

Micro SD Card Connection:



U 盘连接:

USB Flash Disk Connection:



耳机连接:

Earphone Connection:



开机/关机

Turn on/off the phone

轻按电源键即可开启屏幕，再请按即可关闭，屏幕关闭中，不影响来电，如需要彻底切断电源，直接拔掉电源线即可。

Press the Power key lightly to startup the screen and press again to close it. After the screen is closed, the phone can run normally. If you want to cut off the power thoroughly, unplug the power cord directly.



开关机按钮
Turn on/off button

自动挂机功能

Auto Hang up Function



当您的智能终端设备没有挂好时，智能终端系统在检测到忙音后，智能终端系统将自动实施挂断操作，恢复终端待机状态，不会影响之后的来电，也不会一直显示占线的情况。



When the smart terminal isn't hung up correctly and its system detects a busy signal, the system will automatically hang it up to resume the terminal's standby state —it neither impacts the later incoming call nor always displays as if the line is busy.

本智能终端不会因手柄没有及时的复位而影响使用！

The utilization of this smart terminal isn't affected by the untimely reposition of the handle!



如您匆忙离开，忘记把手柄放回到智能终端设备的正确位置上；当您不小心碰倒手柄，使得智能终端手柄离开设备机身；或当小孩玩耍终端手柄时，等等这些情况出现时，我们的智能终端的自动挂机功能都会及时登场，自动挂断终端相应程序，让智能终端设备仍可以正常工作，不会影响之后打进来的任何一通电话。在家庭/办公室这个小天地中随时都会用到这项功能，自动挂机功能是对于日常生活细节的细致观察，此为所做的贴心设计。



In such cases: you leave in a hurry and forget to put the handle back on the correct position of the smart terminal; you knock the handle carelessly and make it leave the phone body; children play with the handle, and so on, the auto hang up function of the smart terminal will play its role timely—it will automatically hang up relevant applications of the terminal so that the device can work normally without missing any incoming call. Since this thoughtful function is based on the detailed observation of everyday life it can be used at home or in the office at all time.

主页面介绍


About Homepage

主页面即为开机页面，显示及时新闻信息和时间外，在显示页面上方显示日期时间和现设备所连接的所有外界设备，如 USB 或者 WIFI，而在显示页面下方还显示 12 个主要功能键。主页面一共有 4 个画面，分别主要显示国内外新闻、天气预报、小区信息、世界时间等。

Homepage is namely starting-up page. Besides timely news and time, it displays date, time and all external devices (USB, WIFI, etc.) connected with the phone on the top and 12 main function keys on the bottom. The homepage includes 4 pictures displaying domestic and foreign news, weather forecast, subdistrict information and universal time respectively.

主页面一：新闻和时间页

Homepage 1: the page of news and time

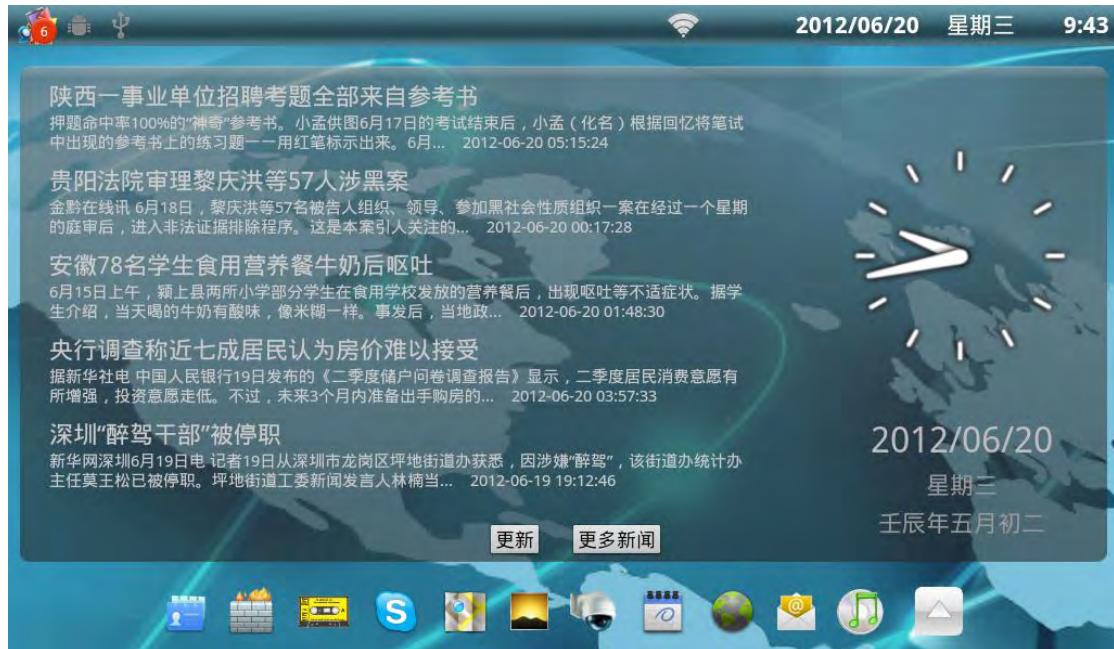

更新 更新键：在本页面中更新最新的新闻内容。

更新 Update key: update this page with the latest news contents.

更多新闻 更多新闻键：按此按键可以显示更多的国内外新闻资讯。

更多新闻 More News key: tap to display more domestic and international news.

陕西一事业单位招聘考题全部来自参考书

押题命中率100%的“神奇”参考书。小孟供图6月17日的考试结束后，小孟（化名）根据回忆将笔试中出现的参考书上的练习题一一用红笔标示出来。6月... 2012-06-20 05:15:24

贵阳法院审理黎庆洪等57人涉黑案

金黔在线讯 6月18日，黎庆洪等57名被告人组织、领导、参加黑社会性质组织一案在经过一个星期的庭审后，进入非法证据排除程序。这是本案引人关注的... 2012-06-20 00:17:28

安徽78名学生食用营养餐牛奶后呕吐

6月15日上午，颍上县两所小学部分学生在食用学校发放的营养餐后，出现呕吐等不适症状。据学生介绍，当天喝的牛奶有酸味，像米糊一样。事发后，当地政... 2012-06-20 01:48:30

央行调查称近七成居民认为房价难以接受

据新华社电 中国人民银行19日发布的《二季度储户问卷调查报告》显示，二季度居民消费意愿有所增强，投资意愿走低。不过，未来3个月内准备出手购房的... 2012-06-20 03:57:33

深圳“醉驾干部”被停职

新华网深圳6月19日电 记者19日从深圳市龙岗区坪地街道办获悉，因涉嫌“醉驾”，该街道办统计办主任莫王松已被停职。坪地街道工委新闻发言人林楠当... 2012-06-19 19:12:46

[更新](#) [更多新闻](#)


主页面新闻每 30 分钟自动更新一次
News on the homepage auto-updates every 30 minutes

页面的时钟在连接 WIFI 时会自动同步
If there is a WIFI connection, the clock on the Page can synchronize with the standard time automatically



新闻查询

News Search

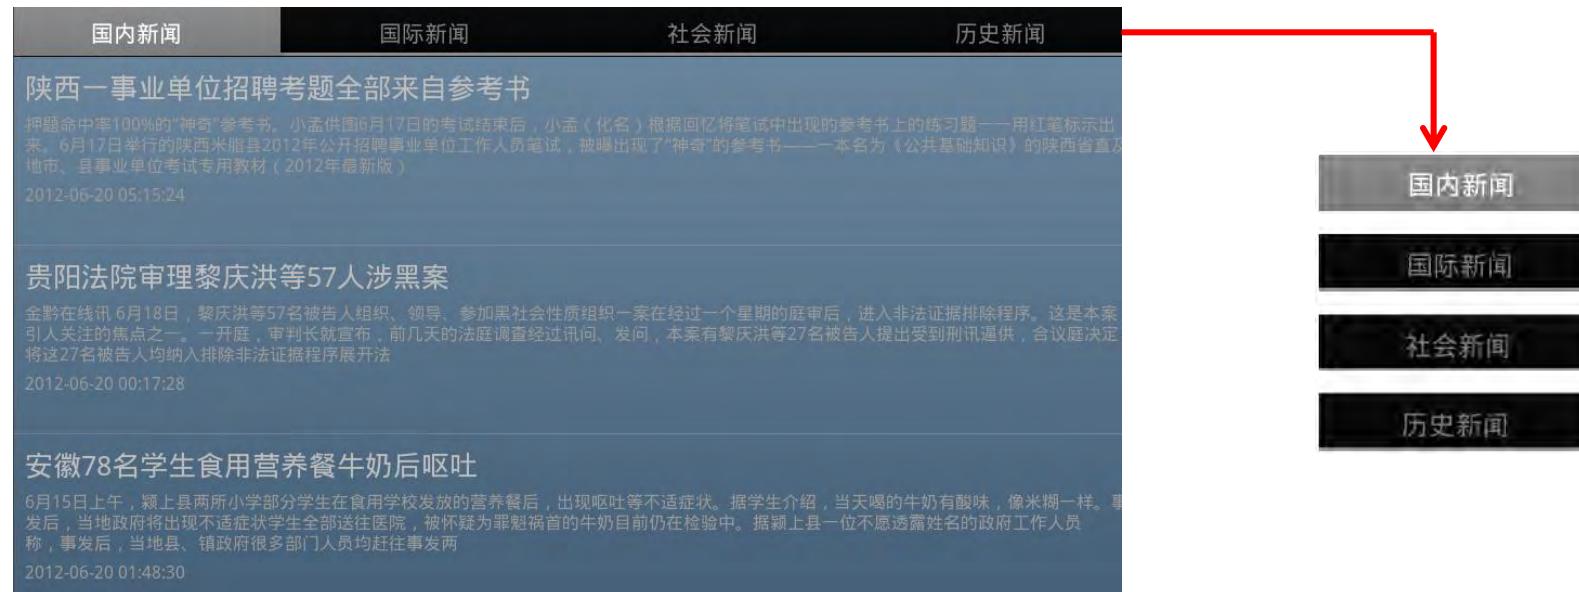

新闻查询

News Search

国内新闻 国际新闻 社会新闻 历史新闻

陕西一事业单位招聘考题全部来自参考书

标题：陕西一事业单位招聘考题全部来自参考书

内容：摘要：据题命中率100%的“神奇”参考书。小孟供图6月17日的考试结束后，小孟（化名）根据回忆将笔试中出现的参考书上的练习题一一用红笔标示出来。6月17日举行的陕西米脂县2012年公开招聘事业单位工作人员笔试，被曝出现了“神奇”的参考书——一本名为《公共基础知识》的陕西省直及地市、县事业单位考试专用教材（2012年最新版）

时间：2012-06-20 05:15:24

贵阳法院审理黎庆洪等57人涉黑案

标题：贵阳法院审理黎庆洪等57人涉黑案

内容：摘要：金黔在线讯 6月18日，黎庆洪等57名被告人组织、领导、参加黑社会性质组织一案在经过一个星期的庭审后，进入非法证据排除程序。这是本案引人关注的焦点之一。一开庭，审判长就宣布，前几天的法庭调查经过讯问、发问，本案有黎庆洪等27名被告人提出受到刑讯逼供，合议庭决定将这27名被告人纳入排除非法证据程序展开法

时间：2012-06-20 00:17:28

安徽78名学生食用营养餐牛奶后呕吐

标题：安徽78名学生食用营养餐牛奶后呕吐


内容：摘要：6月15日上午，颍上县两所小学部分学生在食用学校发放的营养餐后，出现呕吐等不适症状。据学生介绍，当天喝的牛奶有酸味，像米糊一样。事故发生后，当地政府将出现不适症状学生全部送往医院，被怀疑为罪魁祸首的牛奶目前仍在检验中。据颍上县一位不愿透露姓名的政府工作人员称，事故发生后，当地县、镇政府很多部门人员均赶往事发两

时间：2012-06-20 01:48:30

国内新闻 国际新闻 社会新闻 历史新闻

点击页面上方的相应按键，即可以显示“国内新闻”“国际新闻”“社会新闻”“历史新闻”

Tap the corresponding key on the top of the page to display Domestic News, International News, Social News and Historical News.

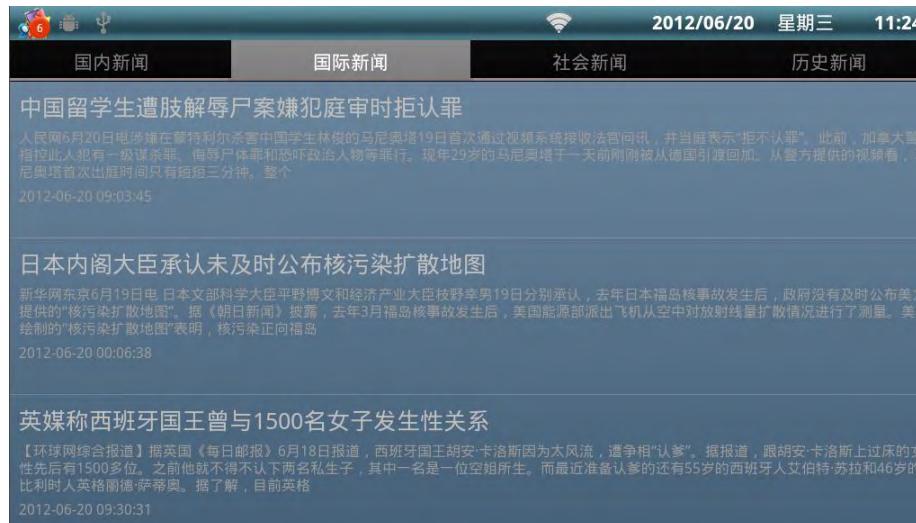

新闻查询

News Search

2012/06/20 星期三 11:24

国内新闻 国际新闻 社会新闻 历史新闻

中国留学生遭肢解辱尸案嫌犯庭审时拒认罪

标题：中国留学生遭肢解辱尸案嫌犯庭审时拒认罪

内容：摘要：人民网6月20日电 据嫌犯在蒙特利尔杀害中国学生林俊的马尼奥塔19日首次通过视频系统接收法官问讯，并当庭表示“拒不认罪”。此前，加拿大警方指控此人犯有一级谋杀罪、侮辱尸体罪和恐吓政治人物等罪行。现年29岁的马尼奥塔于一天前刚刚被从德国引渡回加。从警方提供的视频看，马尼奥塔首次出庭时间只有短短三分钟。整个

时间：2012-06-20 09:03:45

日本内阁大臣承认未及时公布核污染扩散地图

标题：日本内阁大臣承认未及时公布核污染扩散地图

内容：摘要：新华网6月19日电 日本文部科学大臣平野博文和经济产业大臣枝野幸男19日分别承认，去年日本福岛核事故发生后，政府没有及时公布美方提供的“核污染扩散地图”。据《朝日新闻》披露，去年3月福岛核事故发生后，美国能源部派出飞机从空中对放射线量扩散情况进行了测量。美方绘制的“核污染扩散地图”表明，核污染正向福岛

时间：2012-06-20 00:06:38

英媒称西班牙国王曾与1500名女子发生性关系

标题：英媒称西班牙国王曾与1500名女子发生性关系

内容：摘要：【环球网综合报道】据英国《每日邮报》6月18日报道，西班牙国王胡安·卡洛斯因为太风流，遭争相“认爹”。据报道，跟胡安·卡洛斯上过床的女性先后有1500多位。之前他就不得不认下两名私生子，其中一名是一位空姐所生。而最近准备认爹的还有55岁的西班牙人艾伯特·苏拉和46岁的比利时人英格丽德·萨蒂奥。据了解，目前英格丽德·萨蒂奥。

时间：2012-06-20 09:30:31

时间设置

Time Setting

“时间设置”界面共有 5 个功能选择。“自动”选项选择 则为与网络同步时间，如选 则为自行设置时间。“设置日期”“选择时区”“设置时间”“使用 24 小时格式”及“选择日期格式”都有相应选项，只要轻轻一按相应文字框即可。

The Time Setting interface has 6 optional functions. In Auto option, selecting  means to synchronize the time with network and selecting  means you set the time by yourself. Set Date, Select Time Zone, Set Time, Use 24-Hour Time Format and Select Date Format have corresponding options which display when you tap the relevant word box.



主页面二：天气预报页

Homepage 2: the page of weather forecast


天气预报页面显示终端所在地区或者其他城市的近三天的天气预报

Weather Forecast page displays the next 3 days' weather forecast of the terminal's location or other cities



点击地区名称（如：北京）进入城市选择页面，选择不同城市查看天气情况

Tap the region name (e.g. Beijing) to enter optional city page and select different cities to see their weather situation.

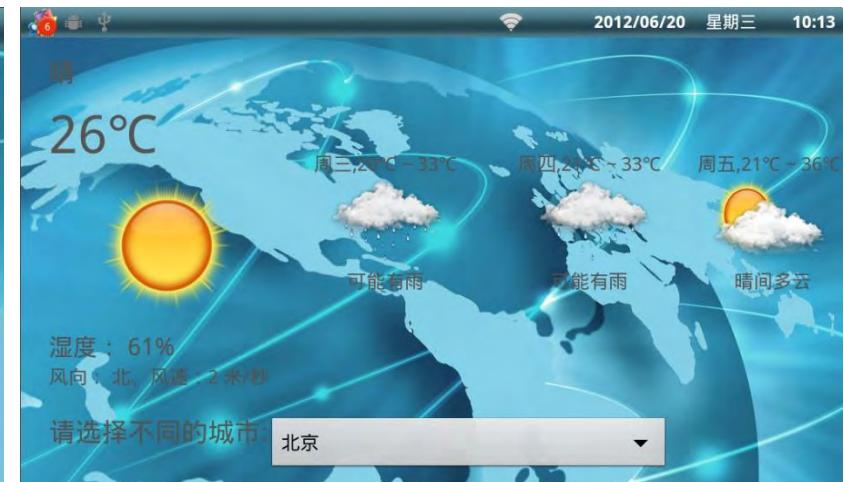

点击选择框的下拉箭头，选择城市，滑动整个页面，可以查看更多城市供您选择

Tap the selectbox's down arrow to select concerned city and slide the whole page to see more optional cities.



主页面三：常用电话界面，根据界面提示可设置并输入日常电话等信息，方便随时查找及点击呼叫。

Homepage 3: the interface of the usual telephone number—according to the interface's prompt you can set and input daily telephone information for convenient search and dial at any time.



按向右箭头可查看更多信息和电话号码，可设置机主所在小区的业主服务内容、物业服务内容、订餐电话、常用服务电话、投诉电话等。

Tap the right arrow to look into more information and phone number, and you can also set service contents of proprietor and property, phone number for usual service, appeal and meal ordering, etc in owner's subdistrict.

=====

主页面四：世界时间和日期页

Homepage 4: the page of universal time and date




停滞在“世界时间和日期页面”时，页面每 5 分钟变换一次，
默认一共 6 页，每页显示 4 个城市的时间和日期。

When the phone stays at the Page of Universal Time and Date, the Page changes
every 5 minutes. There are 6 pages (default) and each of them displays 4 cities' time
and date.


也可手动按键翻页查看其他国家的时间和日期。

You can also manually press the key and turn the page to
see other countries' time and date.

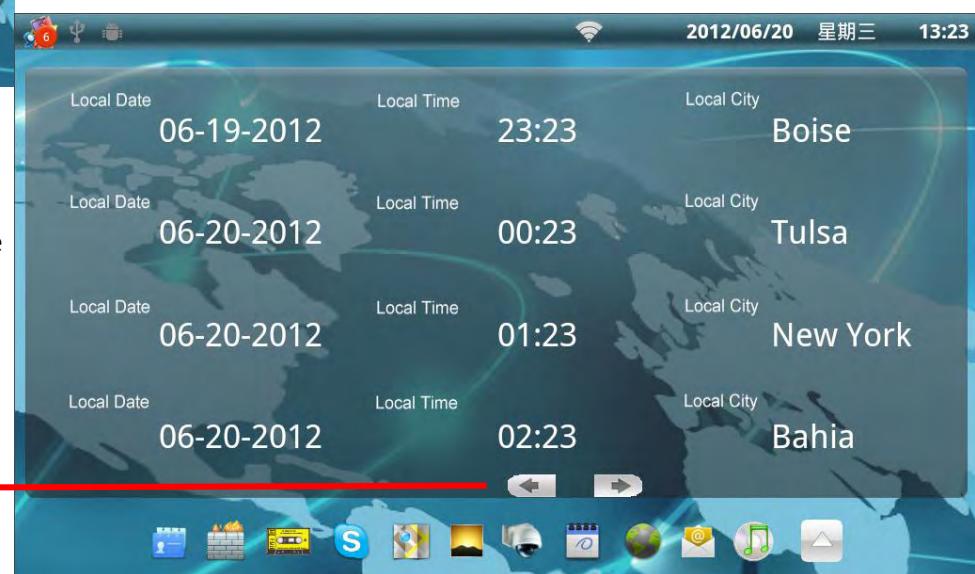

主界面设置

Main Interface Setting



：点击显示屏右侧第一个按钮，显示屏下方出现六个功能选项，一一进入即可进行设置。

Tap the first button on the right of the display screen and the bottom of the screen will display 6 optional functions—enter to set.



壁纸设置

Wallpaper Setting

壁纸分为静态壁纸（图片）或者动态壁纸

Include two kinds of wallpaper: static (picture) wallpaper and dynamic wallpaper.





搜索: 则为 google 浏览器搜索;


Search: namely google browser search

通知: 本机有软件需要更新或者有邮件需要查阅等, 在通知内会加以提示;

Notice: if there is an update for software or new Email, the notice will prompt.

设置: 点击直接进入本机设置, 程序管理有相应解析。

Setting: tap it to enter the interface of setting the phone and there is corresponding interpretation in the application management.

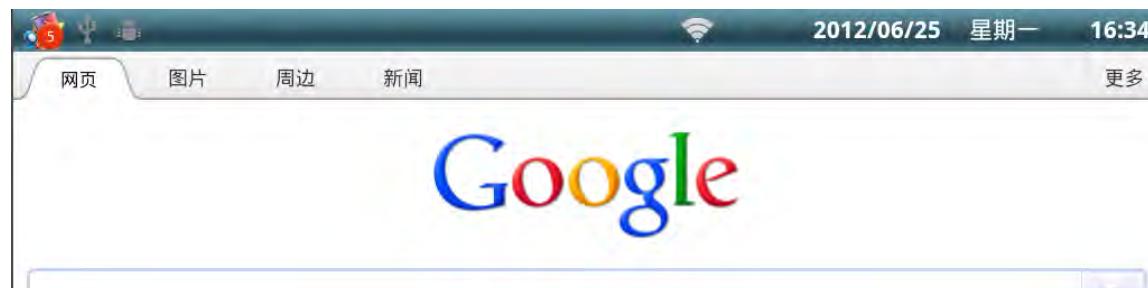

电话呼叫

Telephone Call



1.1、拨号区：摘机后，屏幕自动出现“上图”，您可以通过物理键盘按键拨号，也可通过触摸屏按键拨号。

1.1 Dial area: when off-hook, the screen displays the interface as the above picture. You can dial either via the physical keyboard or the touch screen.

1.2、拨号显示区：显示已拨号码，在此区域也可搜索本机内已存储的号码。

1.2 Area for displaying dialed phone number: displays the dialed phone number. In this area, you can also search phone numbers stored in the terminal.

1.3、数字按键区：屏幕触摸式按键区域，功能同物理按键区内按键。

1.3 Numeric key area: the keystroke area of the touch screen has the same function as that of the physical keyboard.

1.4、删除键：删除已拨数字，修改错误拨号。

1.4 Delete key: delete number(s) input wrongly to revise wrong dial.

1.5、拨号键：输入即将拨打的电话号码后，按“拨号键”拨打电话。

1.5 Dial key: after input the needed phone number, tap the Dial key to call.

1.6、通话中：按拨号键拨打后进入 通话中 页面“右图”进行电话呼叫，页面中显示所呼叫人的信息，及功能九键。

1.6 Ongoing Call: tap the Dial key to enter the page of Ongoing Call (showed in the right picture) for telephone call, and meanwhile the page will display the information of the called person and 9 function keys.



拨号盘——标签七键介绍

Dial Panel—the introduction of 7 label keys

“搜索”标签键：此标签键页面为联系人搜索页面，在搜索框中输入联系人的简要信息或者号码，系统将自动搜索相关联系人后一一列出来，点击已经列出的信息栏，会弹出此联系人的详细信息等资料。

Search label key: the page of this label key is used to search contact—input contact's brief information or phone number and the system will search related contacts and list them item by item; tap the information row and the system will pop up the contact's detailed information.



The screenshot shows a mobile dial panel with a red box highlighting the top navigation bar. The bar includes tabs for 搜索 (Search), 拨号盘 (Dial Pad), 呼叫记录 (Call Log), 联系人 (Contacts), 频繁呼叫 (Frequent Calls), 常用电话 (常用电话), and 紧急呼叫 (Emergency Call). The date and time are displayed as 2012/06/20 星期三 14:47. Below the bar, a search bar contains the text 'vegas'. A list of search results is shown, each with a thumbnail image, name, address, and phone number. A red arrow points from the 'vegas' search term to the first result, Bally's Las Vegas.

| 结果 | 信息 |
|----|---|
| 1 | Bally's Las Vegas 3645 Las Vegas Blvd S, Las Vegas, NV, 89109 电话:(702) 739-4111 |
| 2 | Encore Las Vegas Pool 3131 Las Vegas Blvd S, Las Vegas, NV, 89109 电话:(702) 770-8000 |
| 3 | Hard Rock Cafe Las Vegas 3771 S. Las Vegas Blvd Las Vegas, NV. 89109 电话:702-733-7625 |
| 4 | Las Vegas, NV Restaurant,Coffee Pub 2800 W Sahara Ave Las Vegas, NV 89102 电话:702-367-1913 |



The detailed information page for Bally's Las Vegas is shown. It features a thumbnail image of the hotel's exterior at night. The text provides the hotel's name, address, services offered, and a link to its website. A long descriptive paragraph at the bottom provides a detailed overview of the hotel's history and amenities.

Bally's Las Vegas
3645 Las Vegas Blvd S, Las Vegas, NV, 89109
Resorts & Hotels, Casino Resort, Bingo, Loyalty Club, Poker, Sports Book
(702) 739-4111
<http://www.ballyslasvegas.com/casinos/ballys-las-vegas/hotel-casino/property-home.shtml>

One of the original grand dames to grace the famous 'Four Corners' of the Las Vegas Strip, Bally's Las Vegas has retained its classic Vegas appeal while adding contemporary amenities. Bally's Plaza, a multimillion-dollar grand entry that whisk visitors from the Strip to the hotel's famous porte cochere via four 200-foot people movers, features eight miles of neon looped overhead, with retro light, water and sound. Two 26-story hotel towers house more than 2,800 recently remodeled guest rooms and suites, which range in size from 900 to 2,600 square feet. On the eponymous floor, Bally's 22nd Club offers special guests private concierge services, complimentary breakfasts and evening cocktails. The Bally's Spa is a full-service health club featuring state-of-the-art fitness equipment, whirlpool spas, steam rooms and saunas, Vichy showers, hydrotherapy tubs and aesthetician treatment rooms. The stadium-style race & sports book broadcasts racing and sporting events from around the world on several large screen TVs, and posts odds and accepts wagers on college and pro football, basketball, major league baseball and special events. Gaming enthusiasts can also try their luck at a \$1,000 slot machine or at the craps table. Dining options range from Thai cuisine (SEA the Thai Experience) to the traditional steak house (Bally's). The famously lavish Sterling Brunch has attracted repeat customers over the years. For a true Vegas experience, Donn Arden's 'Jubilee!' is a must. Beautiful showgirls reprise world-famous production numbers with lavish sets and spectacular choreography. Oh, and during the show, the

“呼叫记录”标签键:

Calling Record label key:



点击相应联系人进入此联系人的所有呼叫详情页面，长时间按住联系人，弹出对话框，可选择拨打此联系人或者删除此联系人的呼叫记录。

Tap corresponding contact to display all of his/her detailed calling information. Tap and hold (the contact) to open a dialog box. In the box, you can call the contact or delete his/her calling record(s).



“联系人”标签键:

Contact label key:



“频繁呼叫”标签键：

Frequent Calling label key:

频繁呼入呼出的联系人，在“频繁呼叫”中可查看到，页面显示联系人姓名和电话号码外，还显示最后一次呼叫的时间和日期。在此页面长按联系人可直接呼叫联系人。

Contacts of incoming and outgoing frequently can be seen in Frequent Calling. Besides contacts' name and phone number, the page displays time and date of the last calling. In this page, tap and hold (the contact) to call directly.



“常用电话”标签键: Usual Telephone label key:



Two methods to add Usual Telephone contacts:

方法一: 在联系人详情中, 按“添加到常用联系人”选项
(a) In contact' detailed information, tap the Add to Usual Contacts option.

方法二: 直接按“常用电话”中“添加”按钮增加联系人信息。
(b) In Usual Telephone, tap the Add button to add new contact.



“紧急呼叫”标签键:

Emergency Call label key:

在此区域设置紧急呼叫信息, 添加紧急呼叫号码, 如 110、112、999 等, 当有突发事件时, 按物理键盘中的红色的“紧急呼叫”按钮即可直接拨打

In this area, set emergency call information including emergency call number, such as 110, 112, 999, etc. When there is an emergency, press the red emergency call button on the physical keyboard to dial directly.



紧急呼叫号码：只能输入一个紧急呼叫号码，如 110 匪警、119 火警、999 急救中心等

Emergency Call number: you can input only one emergency call number, e.g. 100 (police call), 119 (fire alarm), 999 (ambulance), etc.

邮箱地址设置：当有紧急事件时，按下紧急呼叫按钮时，智能终端除自动呼叫紧急呼叫号码外，还将发送邮件给您预先设置的邮箱地址，邮箱数量不限，多个邮箱地址须用“;”分号分开。

Email Address Setting: when there is an emergency, press the red Emergency Call button. Besides dialing emergency call number automatically, the smart terminal also sent Email to preset Email addresses and the system doesn't limit the amount of Email addresses (must split different addresses with ";").

邮件内容设置：预先设置需要紧急发送的邮件内容，字数不限，但尽量言简意赅。

Email Content setting: preset Email content for emergency sending and the number of words isn't limited but the briefer the better.

电话接听

Answering the Call

来电时，界面显示为“下图”，背景地图为来电电话所属城市的地图。

When there is an incoming call, the interface displays as the picture below--with a city (where the incoming call located) map as background.



来电信息显示区域，背景为来电联系人号码所属区域的地图
Area for displaying the information of incoming call; the background is the map of the region where the incoming call is located.

功能键区，可将来电“接听”“挂断”或“转为留言”
Area of function keys: handle the incoming call as Answer, Hang up or Leave a Message.

来电时，按“接听”按键或“转为留言”按键，此通电话均转到“通话中”页面，开始进行通话计时或者留言计时。

When there is an incoming call, tap Answer or Leave a Message key and the call will turn to the Ongoing Call page and meanwhile begin timing for conversation or leaving message.



通话中——功能九键介绍

Ongoing Call—the introduction of 9 function keys



静音键：变为蓝色，执行对应功能（即：您说话对方听不到，对方说话您能听到），再点一下便结束执行该功能；
Mute key: becomes blue, it functions (namely, the person on the other side of the phone won't hear you, yet you can still hear him/her.), tap again to end its function;



拨号盘键：点一下该按钮，变为蓝色，进入到“拨号盘”页签；
Dial Panel key: tap it and it will become blue and then enter Dial Panel page;



免提键：免提功能；可以不使用手柄，直接使用免提键进行通话，解放你的双手，此键开启后，除您本人外，在您周围的人也可以听到电话内容；
Handsfree key: handsfree function; With the Handsfree key you can telephone without using the handle (free your hands). Startup the key and besides you people around can hear the telephone contents too;



录音键：点一下该按钮，变为蓝色，开始通话录音，左侧显示 Recording 并录音计时，再点一下该按钮结束录音；
Record key: tap the key once and it will become blue and begin to record the call. The left side displays "Recording" and meanwhile the system begins timing, tap again to end recording;



保持键: 点一下该按钮, 变为蓝色, 执行对应功能 (即: 您说话对方听不到, 对方说话您也听不到), 再点一下便结束执行该功能;

Holding key: tap the key once and it will become blue and function (namely, the person on the other side of the phone won't hear you and vice versa.), tap again to end its function;



联系人键: 点击进入联系人菜单;

Contact key: tap to enter Contact menu;



扩展功能键: 该按钮现在没任何功能

Extended Function key: now this key has no function.



挂断键: 点击该按钮, 挂断来电, 返回到来电前的界面

Hang up key: tap to hang up the incoming call and return to the previous interface;



查看来电详细信息键: 点一下该按钮, 变为蓝色, 进入到“来电详细信息”页签;

Key for seeing Detailed Information of the Incoming Call: tap the key once and it will become blue and the interface turns to the page of Detailed Information of the Incoming Call;

通话中——标签八键介绍

Ongoing Call—the introduction of 8 label keys

“拨号盘”标签键：“通话中”的“拨号盘”标签键，与“呼出”的“拨号盘”功能不一样，在通话过程中，如需要拨打分机或者在电话上进行按键操作，即需要“拨号盘”键，在此页面中，还有录音键和挂断键。

Dial Panel label key: the function of the Dial Panel label key in Ongoing Call is different from that of the Dial Panel in Outgoing—in Ongoing Call, if you want to operate the call (e.g. dial extension number, etc) you will need a Dial Panel key. In this page, there are Record key and Hang up key too.



即为数字 1 键，也为录音键
Both numeric key "1" and Record key



挂断键
Hang up key



删除键：删除已拨数字，修改错误拨号。
Delete key: delete number(s) input wrongly to revise wrong dial.

“呼叫记录”标签键:

Calling Record label key:

在此页面中显示正在通话的联系人的所有呼入呼出记录, 长按此页面呼叫呼出记录, 可再次拨打电话或者删除呼叫记录。

This page displays all the incoming and outgoing records of the contact in ongoing call. Tap and hold the record on the page to call again or delete the calling record.



“来电详细信息”标签键:

Detailed Information of the Incoming Call label key:

此页面会显示正在通话的对方的联系人信息详情，这些信息需要储存联系人时填写。

This page displays detailed information of the contact in ongoing call and the information must be filled when you save the contact.



“地图”标签键:

Map label key:

在此页面中显示通话中的对方电话号码所属区域的地图，通过地图可以知道对方号码所属城市，在有需要的时候，也可以随时查看当地各场所的地理位置。地图上方显示地区的经纬度。

This page displays location map of the number in ongoing call. According to the map, you can know what city that the number belongs to and check geographical position of places (e.g. restaurants, parks, schools, etc) in that city as required. On the top of the map there are longitude and latitude of the region.



“天气”标签键:

Weather label key:

此页面显示通话中对方电话所属地区的天气预报

This page shows regional weather forecast of the number in ongoing call.



“便签”标签键:

Memo label key:

通话中, 可随时使用“便签”记录通话中须提醒机主的信息, 通话结束后, 便签上记载的信息自动保存在此通的通话记录中, 标识为  , 在“呼叫记录”功能中点击图标方便随时查看。

In ongoing call, you can at all time use Memo to record relevant information about the call so as to remind the owner in future. At the end of the call, the system

will automatically save the recorded information in the call record with a  mark. In Calling Record function, tap the mark to see.



“日历”标签键:

Calendar label key:

在此页面可以查看当月和当天的“事件提醒”， 表示此天有事件，点击进入当天即可查看。 表示为此天有“录音”或者“留言”。

In this page, you can see Event Notice of the current day and month--  indicates "event" and  indicates "(telephone) recording" or "(telephone) message", tap to see.




2012/06/20 星期三 18:04

| | | | | | | | |
|--------|------------|-------|--------|----|----|----|----|
| 通话中 | 拨号盘 | 呼叫记录 | 来电详细信息 | 地图 | 天气 | 便签 | 日历 |
| 事件名称开会 | | | | | | | |
| 开始日期 | 06-20-2012 | 18:03 | | | | | |
| 结束日期 | 06-20-2012 | 18:03 | | | | | |
| 检查冲突 | 查看日历 | | | | | | |
| 地点公司 | | | | | | | |
| 描述带材料 | | | | | | | |



主页面——12个功能键

Homepage—12 function keys

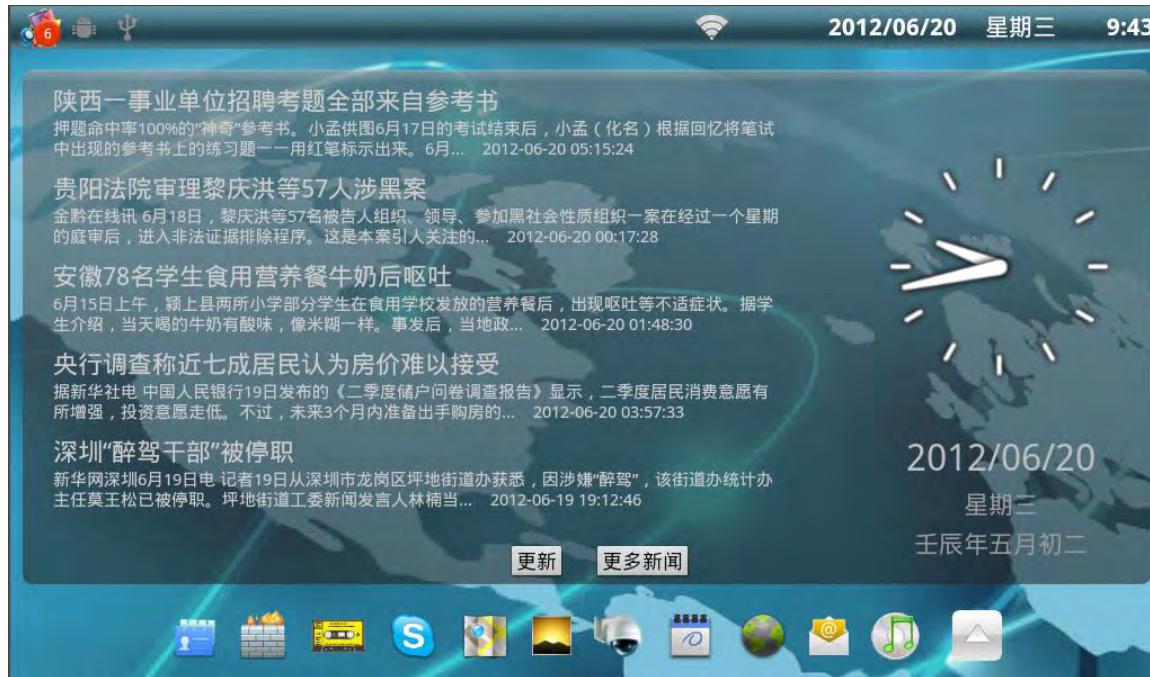



联系人 Contact



防火墙 Firewall



录音留言管理 Recording and Message Management



视频聊天 Video Chat



谷

歌地图 Google Map



电子相框 Digital Photo Frame



视频监控 Video Surveillance



日历事件 Calendar Event



网页浏览器 Webpage Browser



邮件管理 Email Management



音乐播放器 Music Player



程序管理 Program Management



[联系人]中共有 4 个标签键，分别为“联系人”“黑名单”“呼叫记录”“群组”，其中“联系人”中所有联系人会按 26 字母的先后顺序排列，点击相应联系人即可进入相应联系人的详细信息界面。


[Contact] contains 4 label keys: Contact, Blacklist, Calling Record and Group. All contacts are arranged in alphabetical order, tap relevant contact to enter the page of detailed information.

联系人定时呼叫设置

Set contact's timing calling

点击联系人详细信息中的电话号码，弹出对话框选项，可选择当前拨打此电话或者定时拨打此电话，点击拨打直接呼出，点击定时弹出设置窗口设置时间和日期。

Tap phone number in contact's detailed information and pop up dialog box option—tap the Call button to call directly or tap the Timing button to pop up the setting window in which you can set time and date.

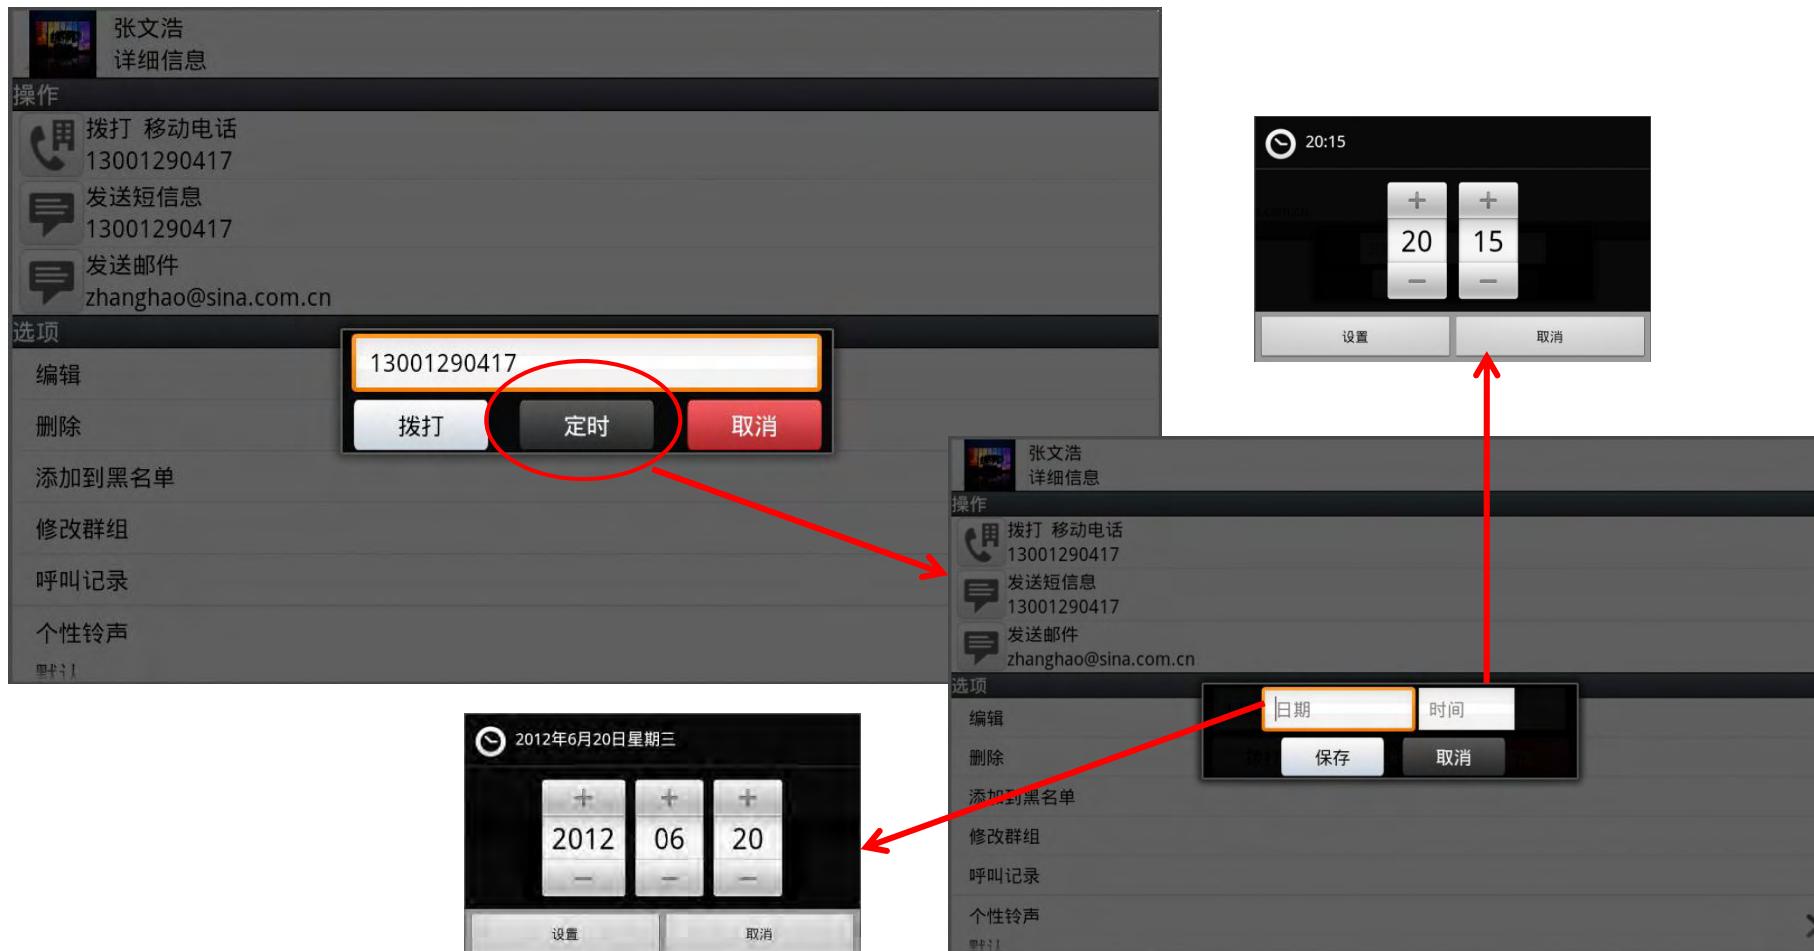


“黑名单”标签键

Blacklist label key

可将不愿联系的联系人“添加到黑名单”中，黑名单中的联系无法呼入电话，在联系人名单中也不会出现此人，如想恢复此人到联系人中，必须进入“黑名单”中点击联系人后进行设置。

Add undesirable contacts into blacklist via Add into Blacklist label, contacts in the blacklist can't call you and also don't exist in Contact. If you want to resume them into Contact, you must enter Blacklist and tap the contact to set.

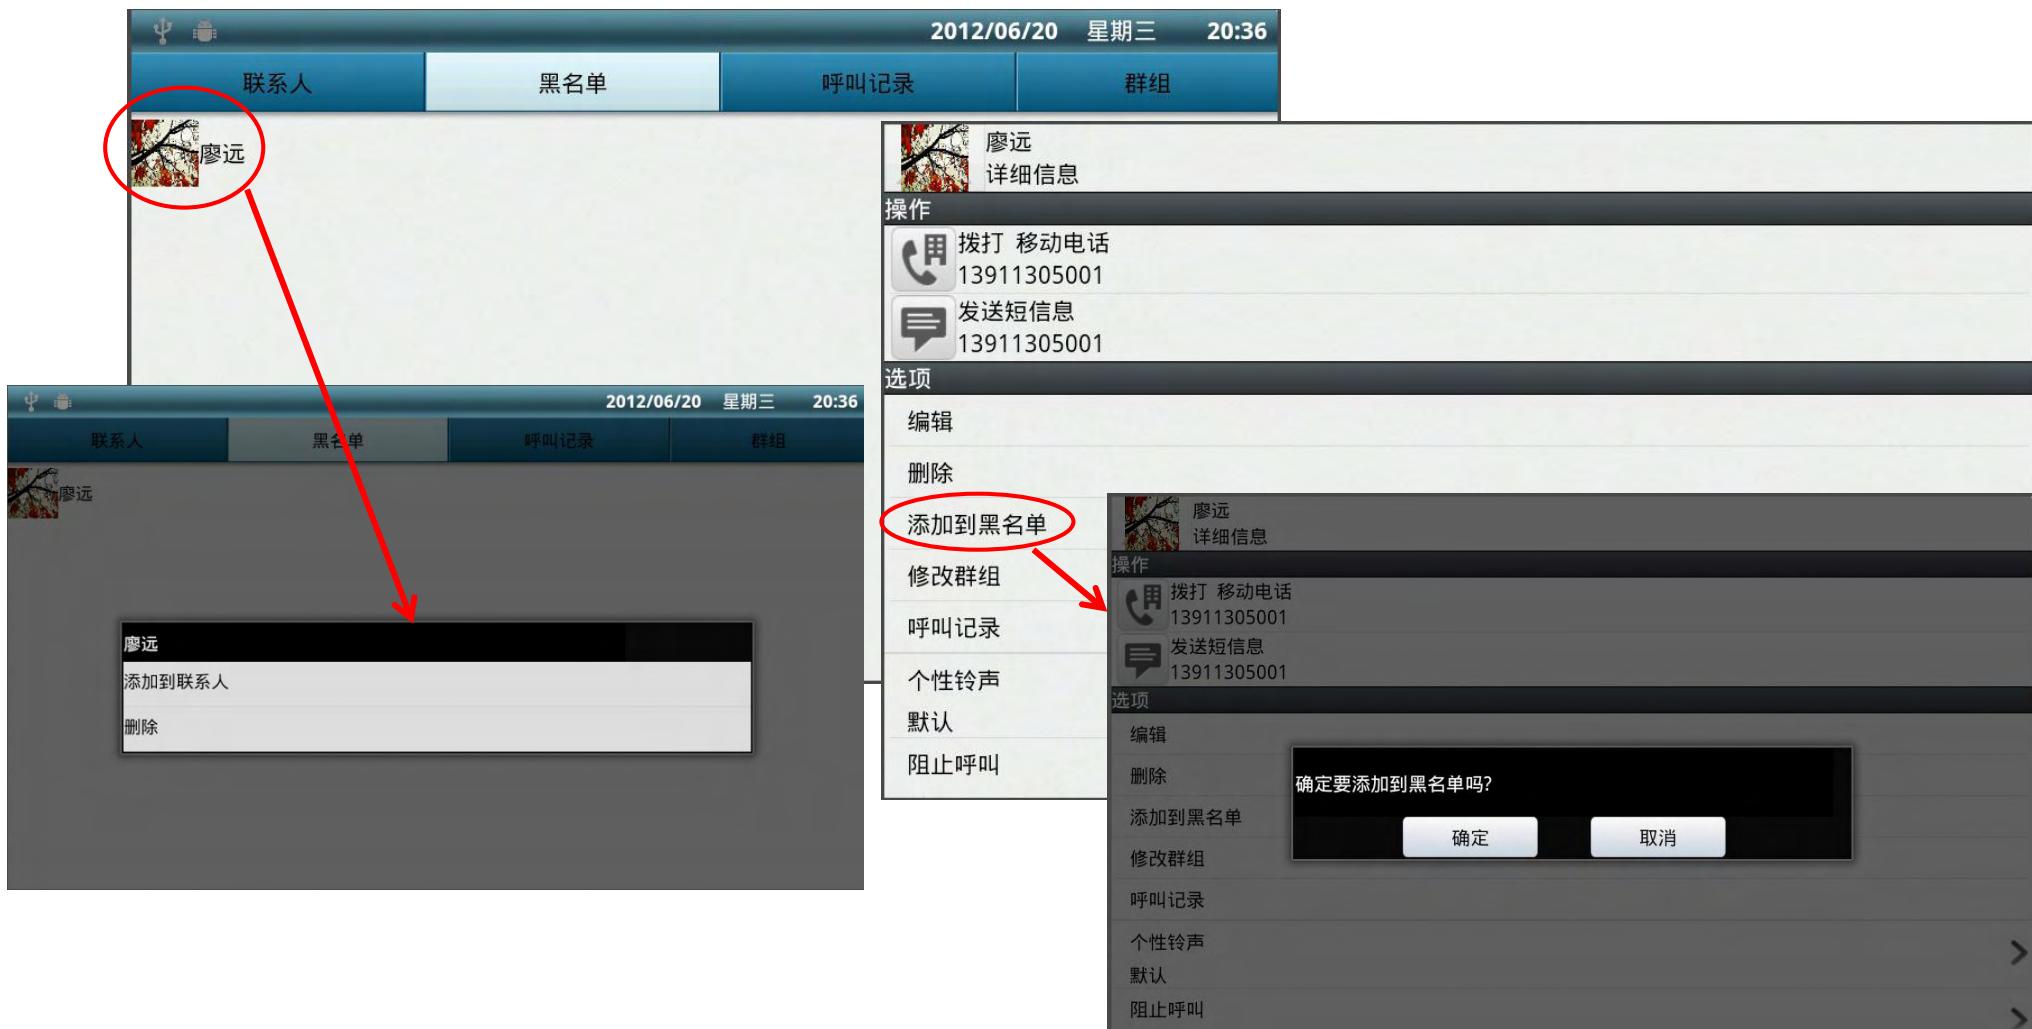


“呼叫记录”标签键

Calling Record label key

呼叫记录中可以查看呼入呼出记录，点击联系人所在行还可进入此联系详细的呼入呼出记录页，在此页还可查看当时呼叫的便签记录。在呼叫记录中还有另一个重要功能，即定时拨打功能，长按联系人所在行即可弹出拨打对话框，在此可选择当前拨打或者定时拨打。

In Calling Record, you can check all incoming and outgoing record--tap the contact row to enter the page of detailed calling and memo record at that time. Calling Record contains another important function, namely Timing Calling—tap and hold the contact row to pop up a dialog box in which you can call currently and set timing calling.

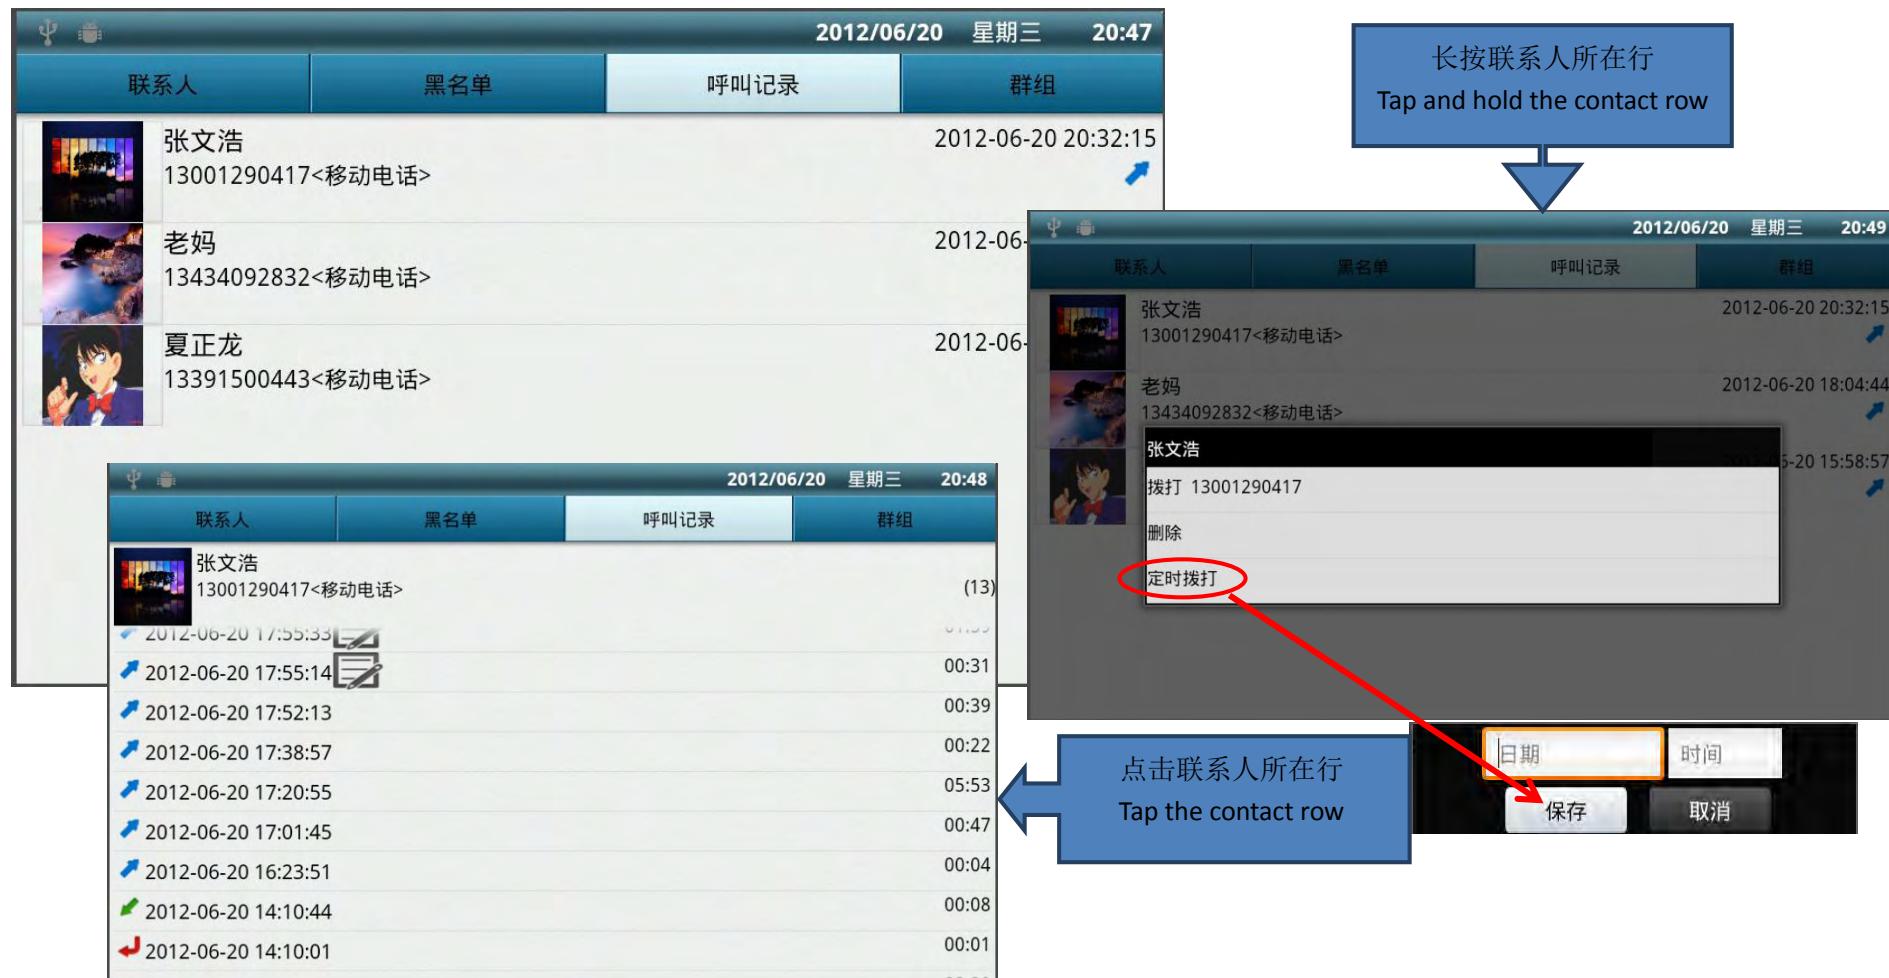

“群组”标签键

Group label key

在“群组”页面可以查看按组别分类的联系人，在此可随时添加或者修改群组名称。点击相应的群组名称可查看详情即在此中的所有联系人，或者删除此群组和设置群组铃音。

In the page of Group, contacts are classified by group and you can add new group or rename the existing group(s). Tap the group's name, and then you can see its detailed information, delete it or set its ring tone.



例：点击同学群组，选择“详细信息”即打开左图对话框
E.g. tap the student group and select Detailed Information to open the left dialog box



中，有4种阻止方式，分别为“阻止黑名单呼叫”“只接听名片来电”“拒绝所有来电”“不阻止”，“阻止黑名单呼叫”即所有被添加到黑名单中的联系人呼入均被系统自动阻拦挂机；“只接听名片来电”即系统只识别已储存的联系人名单中的联系人来电，其余陌生号码均被阻拦挂机；“拒绝所有来电”即为任何来电都将被阻拦，无法呼入；“不阻止”即为不阻止任何来电，包括黑名单联系人的来电。

[Firewall] contains 4 ways of prevention: Prevent Blacklist from Calling, Only Answer Contact's Calling, Reject All Calling and No Prevention--Prevent Blacklist from Calling means that the system prevents and hangs up the calling from contacts in Blacklist automatically; Only Answer Contact's Calling means that the system only identifies the calling from saved contacts and prevents and hangs up strange numbers; Reject All Calling means that the system prevents all incoming call; No Prevention means the system doesn't prevent any incoming call including that from Blacklist's contacts.





[Recording and Message Management] contains 5 label keys—Local Recording, Owner Message, Message Management, Record Management and Turn on/off Message

“本地录音”即为本地录音，实为录音机功能，机主可随时打开对话框进行录音活动，系统将自动将录音储存为音频文件在指定的文件目录下；
Local Recording is that you can record local sound like a recorder, the owner can open the dialog box to record at any time and the system will save the recording as audio file to appointed document directory.




“机主留言”即为机主为在不能及时接听电话时，给来电方礼貌式的问候并且提示将其电话内容留言录音，方便记住随时听取。


Owner Message is used, when the owner of the phone cannot answer timely, to greet the caller and suggest recording message so that the owner can listen to it conveniently.



输入留言内容，选择语言储存好后，来电未接时对方
Input message content, select the language and save it. When there is a missed
call, the caller can hear the owner's message.
即可听到机主的此次留言。

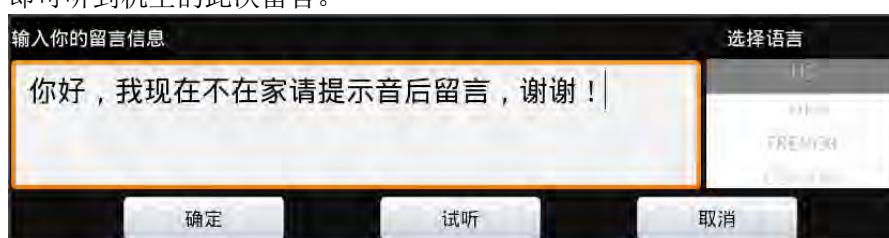

轻点留言录音文件为听取留言，长按即弹出功能框选择留言需求范围
Tap the recording file of the message to hear it, tap and hold to open the dialog
box to select different message requirements.

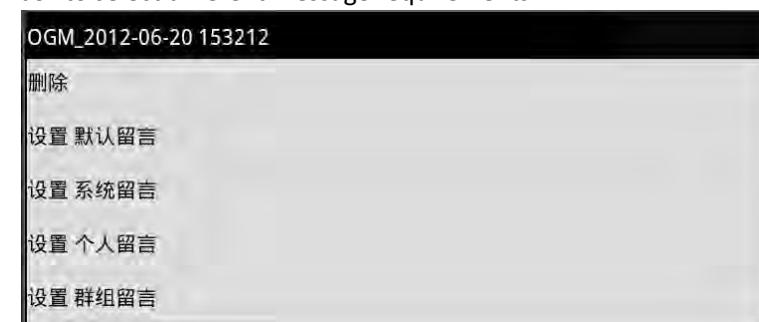

机主留言使用范围设置：智能终端除机主自行录制留言外，系统自带一个固定的留言，如设置某条留言文件为“默认留言”，来电提取留言时将播放“默认留言”文件，如未设置“默认留言”的则播放“系统留言”（未设置“个人留言”和“群组留言”）。

Set serviceable range of Owner Message: in the smart terminal, besides message(s) recorded by the owner, the system provides a fixed message. If you set a message file as Default Message, in case of need the system will play Default Message file; otherwise the system will play System Message (also applying to cases that you haven't set Personal Message and Group Message).



将所选留言设置为某个群组的个性留言

Set selected message as some group's individual message

将所选留言设置为某人的个性留言

Set selected message as someone's individual message



“留言管理”为来电未接时，来电方的留言信息，点击留言条即可听取。

Message Management: when there is a missed call, the caller may leave a message. Tap the message to listen.



轻按即可听取留言，常按则弹出对话框，是否删除此条留言信息。

Tap lightly to listen to the message; tap and hold to open a dialog box where you can delete the message.



“录音管理”为在通话过程中，按下录音键将通话内容录制而成的语音文件。

Recording Management: in an ongoing call, press the Record key to save the conversation contents as audio file.



“留言开关”为设置留言信息是否开启的设置，不选择此项 ，来电无人接听时将不会转为留言信箱。

Turn on/off Message: set whether to turn on or turn off Message, if you don't select , when nobody answers the phone the system won't turn to the message box.





本终端自带 skype 系统，点击主页 skype 图标即可进入程序，登陆或者注册用户，通过网络 skype 进行视频通话为免费操作，不会消费您的电话费，本终端和 skype 之间可以进行联系人的同步操作，轻轻一点，直接可以把联系人互转同步，省时省力，进入 2.4.4 图即可选择联系人进行网络视频通话等操作。The terminal brings the skype system by itself; tap the skype icon on the homepage to enter the application and then login or register. Video Chat via network skype is free operation and doesn't consume your phone bill. You can synchronize contacts of the terminal with that of skype—tap to realize the synchronization, both timesaving and effort-saving. Enter the interface showed by Picture 2.4.4 to select contact for network video chat, etc.





谷歌地图 (Google Map)

不仅可可以查询各个城市的地理位置，还可查询本智能终端所在区域周围商铺或者实时路况等。
You can search not only cities' geographical position, but also shops, real time traffic status or other information around the terminal's location.

本地搜索：先对您所在区域定位，然后查找定位区域周边的商家；如：餐馆、酒吧、ATM机、加油站等，还可以自行添加；

Local search: position you first and then search places for business around you, such as restaurant, bar, ATM, gas station, etc, in addition you can also add new places onto the map.

图层显示：显示所在区的实时路况、本区的卫星视图、地形等；

Layer display: display real time traffic status, satellite image, terrain, etc of the terminal's location;

我的位置：在系统设置中启动“我的位置”源。

My Position: in system setting, startup My Position source.





将照片图片存入智能终端，在待机状态中，可以启动电子相框以作展示。

Save photos to the terminal and in standby mode startup digital photo frame to show them.





本智能终端系统通过录入设置 IP 地址可通过多个摄像头进行监控，以便监控办公室内外或居所内外。此系统界面同时可显示 4 个摄像头所监控的画面。

By input IP address the smart terminal system can monitor inside and outside office or residence via cameras. The system interface can display pictures monitored by 4 cameras at the same time.





在日历中可查看当月/当周/当日的所有记录的事件和定时拨打电话,不仅可以作为提醒功能使用,还可以查看某一事件内所有被记录下的录音、留言等等。
In Calendar, view all recorded events of the current day/week/month and timing dial—you can use it not only to remind you but also to check all recorded recording, message, etc of certain event.




增加事件内容、 增加定时拨打电话
With add event contents and add timing dial

点击日期,进入所点击日期的“每日事件”
如当天有便签/留言/录音/事件的话,会显示相应标识。
Tap the date to view its Daily Event—if any
memo/message/recording/event of the current day, the
system will show corresponding marks.

每日事件：显示当日所有事件及通话记录/留言等，可随时增加当日事件，显示的每条事件可点击进入修改；所选择的日期全天所有内容，包括事件、录音/留言、便签、定时拨打电话，并且按从早到晚的顺序排列。

Daily Event: displays all contents of the current day (including events, call recording/message, memo, timing dial) in chronological order, and you can add the current day's event at any time and tap the displayed event to revise it.

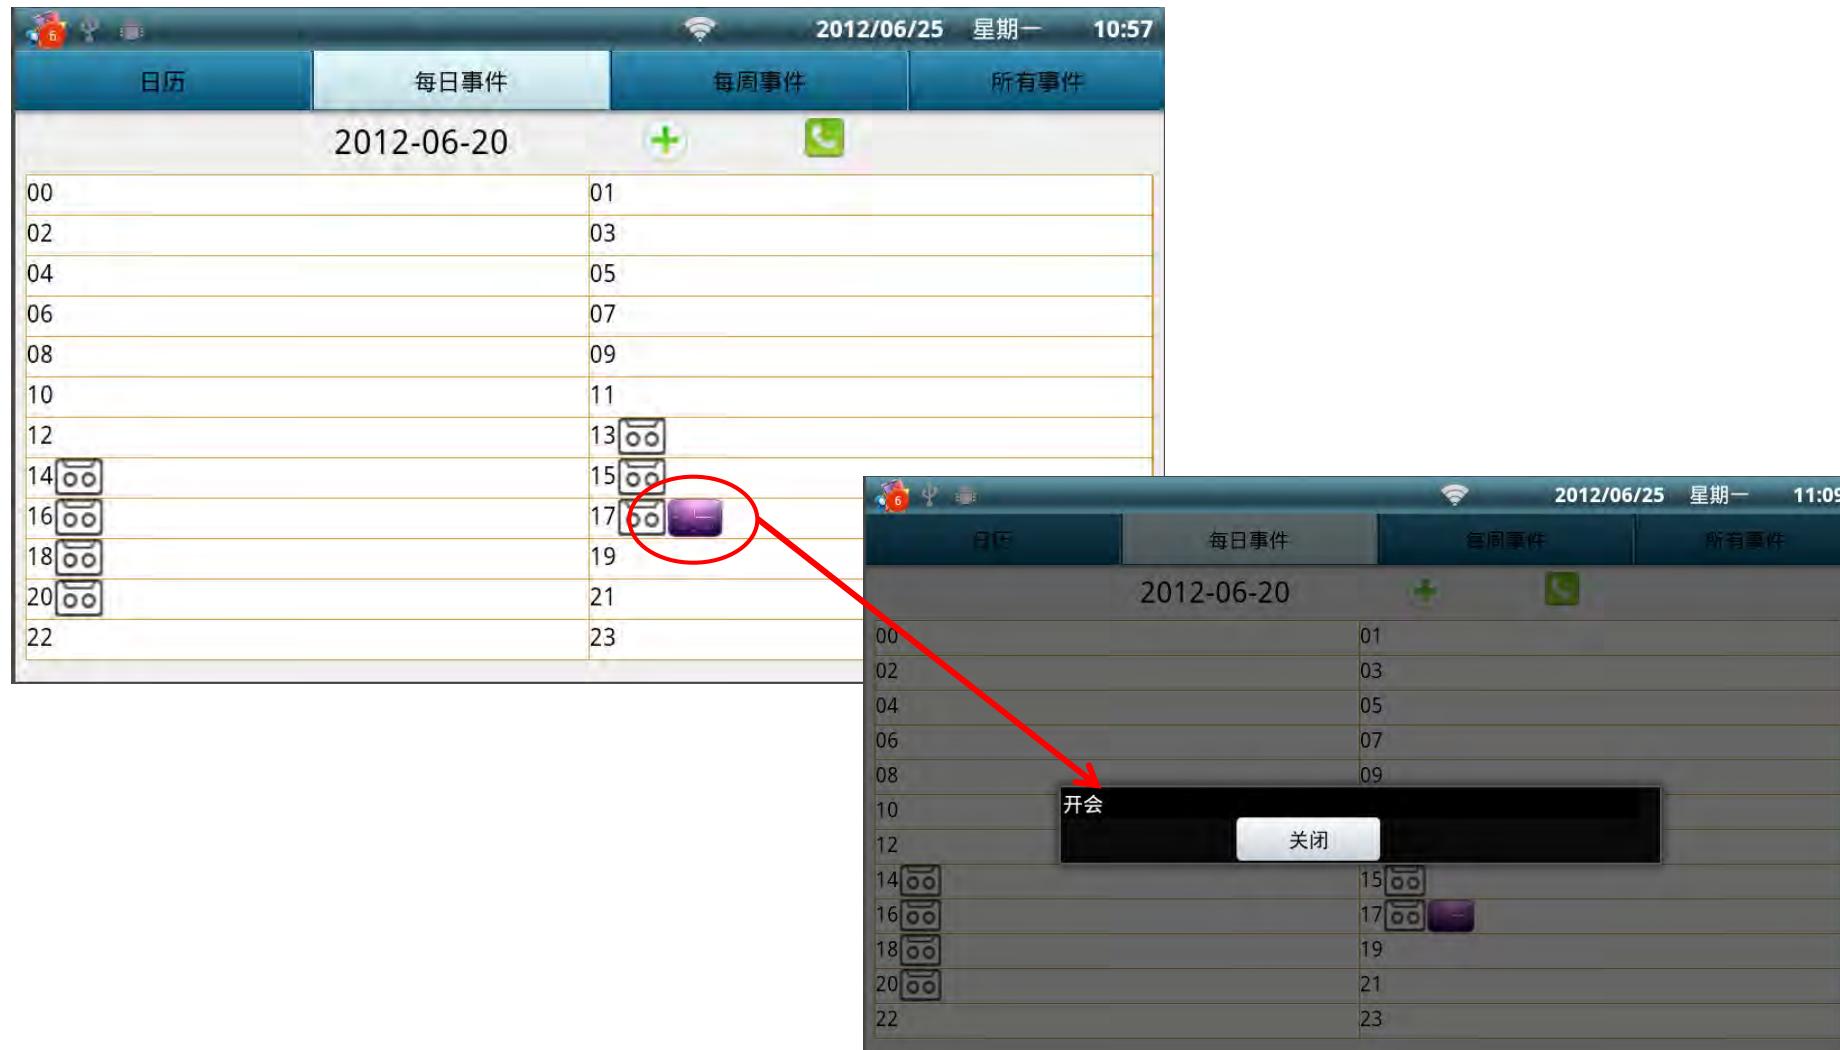

每周事件：显示本周内的所有事件及通话记录/留言等，显示的每条事件可点击进入修改；显示当日所在周的整周事件内容，并在日期后显示当日的事件、录音/留言、便签、定时拨叫电话，并且按每周七天的时间排序。

Weekly Event: displays all events, call recording/message, etc of the current week, tap the event to revise it; displays all contents of the week that the current day belongs to, and meanwhile displays the current day's events, recording/message, memo and timing dial behind the date in chronological order (7 days per week).



所有事件：点击日期部分，选择日期区域，来进行搜索区域范围内所有事件，显示的每条事件可点击进入修改；

All Events: tap the date section to select needed date range to search all of its corresponding events; you can also tap each event to revise it.





随时可以通过 WIFI 上网进行网上冲浪，另设“书签键”点击进入后，可制作便捷标签，免去每次登陆输入网址的步骤。

Whenever you like you can surf the Internet via WIFI and by using the Bookmark key you can make convenient bookmark and needn't input the website every time.





设置邮箱，智能终端自动接收邮箱邮件，进入邮箱，点击需要操作的邮件所在行区域，弹出操作窗口，方可进行打开、回复或者删除邮件的操作。

Set Email address and the terminal can receive Email automatically. Enter the Email box and tap the Email row to pop up the operating window where you can open, reply or delete Email.






音乐播放器
Music Player

网络下载或 U 盘存入歌曲，可根据“艺术家”“专辑”“歌曲”三个方式查看所有曲目，长按艺术家名字、专辑名称或者歌曲名称，可以弹出相对对话框，可将曲目添加至播放列表中，或者作为电话铃声。根据喜好制定个性播放列表！

Download music from the Internet or transmit it from USB flash disk; by means of Artist, Album or Song look into all songs; tap and hold name of Artist, Album or Song to pop up corresponding dialog box—you can add song(s) into the playlist or set as ring tone. You can customize individual playlist as you like!

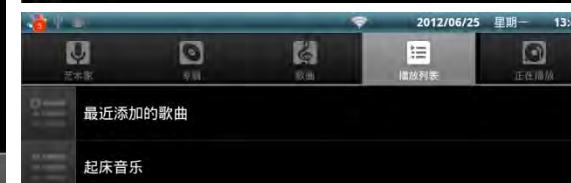



开启程序管理按钮，打开页面呈现的是智能终端左右自带或者后增加的程序。（用手指按住屏幕轻轻上下滑动页面来翻页）

Tap Program Management button and the page displays applications brought by the terminal itself or added by the owner. (Tap and hold the screen, and then slip it up and down to turn page.)






ES 文件浏览器

ES File Browser

按此键选择显示内容：
Tap the key to select
contents for displaying
本机或 SD 卡
Local or SD Card

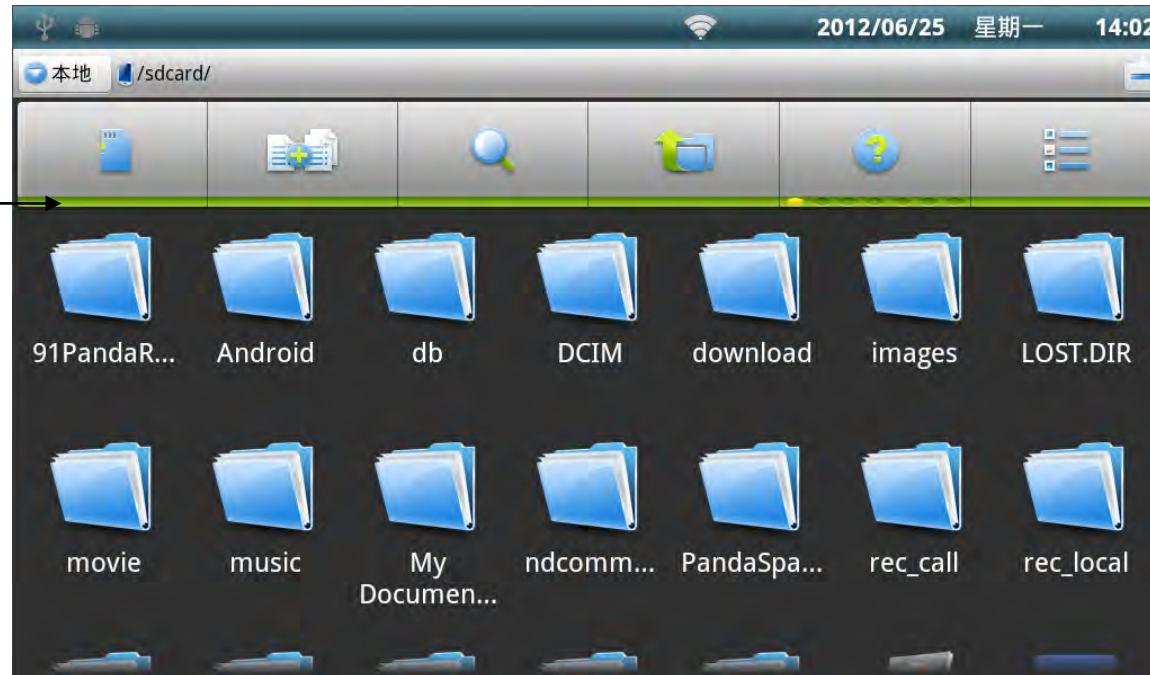

向上: 退出本程序, 返回上一步
Upward: exit this application and
return to the previous step



排序: 更改文件排序方向,
横向或纵向
Sorting: alter the sorting direction
of the file, horizontal or vertical



多选文件: 点击后屏幕显示“进入
多选状态”, 待提示消失后可对文
件进行多选;

File's Multiple Choice: tap and the
screen displays "Enter status of
multiple choice"; after the prompt
has disappeared you can multiply
select files;



Local (本机) : 显示本机中文件 Local: displays local files



SD Card (SD 卡) : 显示 SD 卡中文件 SD Card: displays SD Card's files



说明
Description

初始化主目录

根目录, 长按书签

多选, 长按多选模式

搜索, 长按排序

向上, 长按退出程序

帮助, 长按切换管理





电话铃音

Ring Tone of the Phone



设置铃音，系统自带，也可根据自身所需添加或者修改铃音

Set ringtone—brought by the system itself, in addition you can add or revise it by yourself

提前设置邮箱，本机将把未接来电中的语音文件（留言文件）发送到所设置的邮箱中

Preset Email address and then the phone will send audio file (message file) of missed calls to the set address



Remote notice of missed calls

未接来电邮件通知提醒：当有未接来电并且对方留言的情况下，智能终端系统自动将未接来电的留言信息邮件发送到您预设的邮箱（如上图），与此同时会收到相关短信提醒，及时通知您查看邮箱收听留言。

Email notice of missed calls: if there is a missed call with the caller's message, the smart terminal system will automatically send message Email of missed calls to Email address preset by yourself (showed in the above picture), and meanwhile you will receive related SMS prompt reminding you to check your Email address and listen to the message.




计算器

Calculator

智能终端自带的应用小工具，方便客户日常使用设置。


The smart terminal brings this small application tool for users' daily utilization and setting.

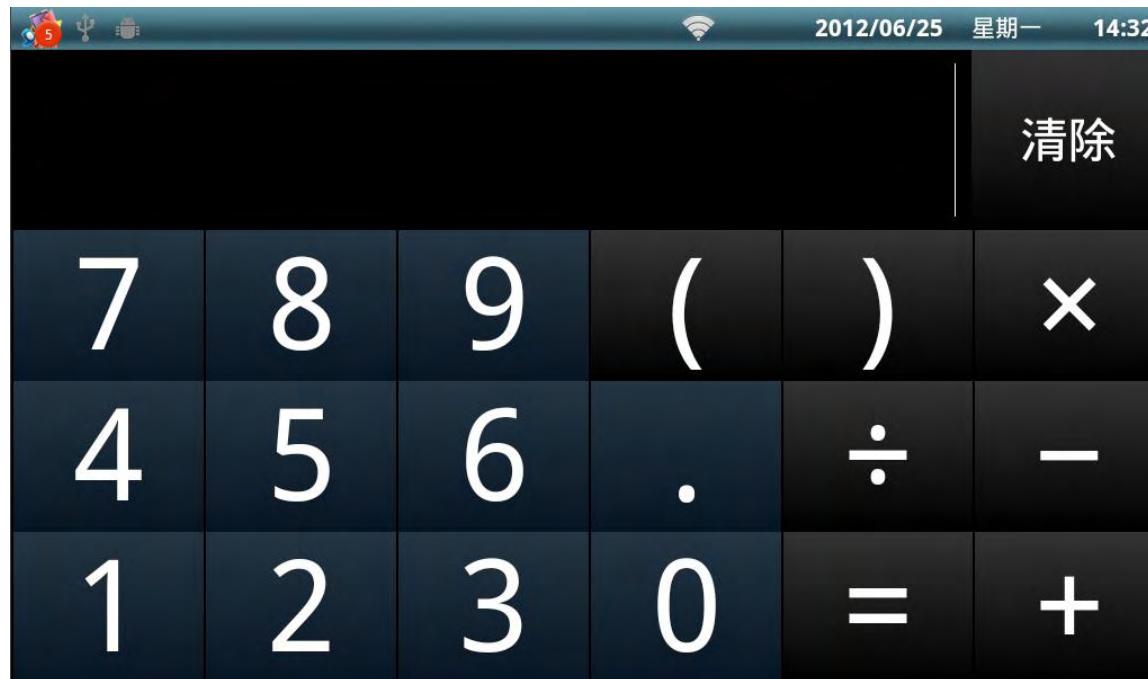



闹钟

Alarm Clock

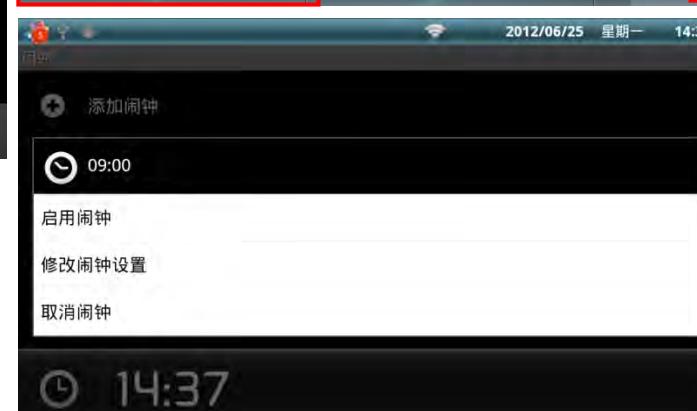

节电模式，调整屏幕亮度来节约电量

Power saving mode—adjust screen brightness to save power

0%

2012/06/25 星期一 14:36

6月 25 日周一

设置闹钟音乐
Set music for alarm clock



相机/摄像机

Camera



照相模式

Photo mode

摄像模式

Video mode



点击右上角的照片，弹出对话框选择照片预览方式，智能终端自带 aVia 和 ES 两种

Tap the picture on the top right and the system will pop up a dialog box containing two ways for you to preview photos—aVia and ES brought by the smart terminal itself.



媒体软件

Media Software

管理音乐、视频、相片的多媒体管理软件

Multimedia software to manage music, video and photo





搜狐视频

Sohu Video

网络视频全免费，本机具有 HDMI 接口，将智能终端机与电视相连，网络视频内容将一一呈现在电视中，在您观赏影片时，如遇有来电，电视屏幕将自动暂停进行提示，在您在网上冲浪的同时也不会错过任何一通重要电话。

Network videos are all free—the phone has HDMI, and you can connect the smart terminal with TV and the contents of network videos will display in TV. When you are watching movies, if there is any incoming call the TV screen will pause automatically and prompt, so that you can surf the Internet without missing any important call.





本机系统设置

System Setting of the Terminal

在“设置”中共有 15 个功能可以在此进行修改设置，在下一页中将一一介绍。


In Setting, there are 15 functions for you to configure—they are introduced in following pages one by one.



无线和网络设置

Wireless and Network Setting

WIFI 连接
WIFI connection

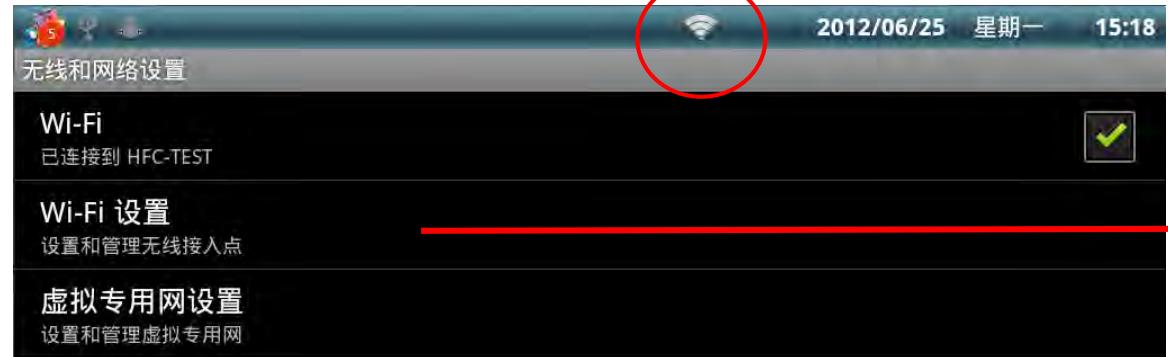

本终端机具有 wifi 无线网络功能，可选择连接网线，也可直接连接无线网

The terminal owns the function of wifi wireless network so that you can either connect network cable or wireless network directly



电话区域设置

Telephone Zone Setting

在此可选择本机的“语言”“所在国家”“所在城市”

Here you can select the terminal's Language, Country and City




更新系统应用程序

Update the System's Applications

点击“更新系统应用程序”所在行，弹出对话框，选择新的程序路径进行程序更新。注意，非专业人员请勿轻易更新系统应用程序，以免导致系统不能正常运作。

Tap the Update the System's Applications row to pop up dialog box and select new program path to update applications. Note: laypeople please don't update them arbitrarily; otherwise the system may not run normally.

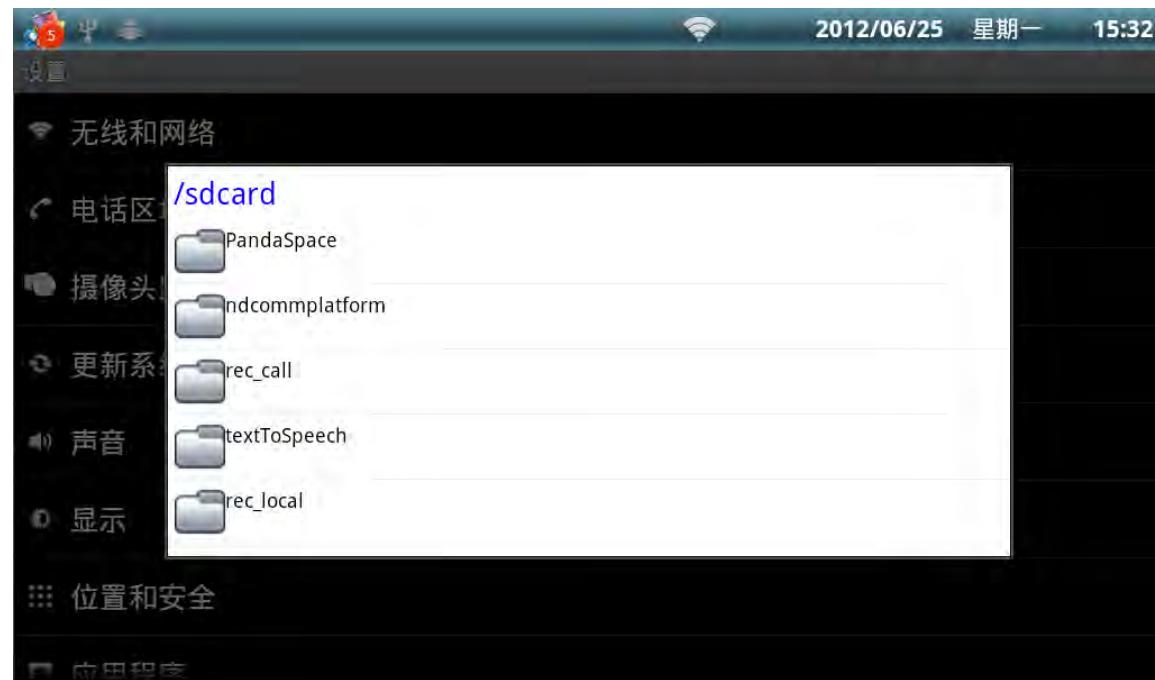

声音设置

Sound Setting

在此可设置本智能终端的来电铃声、响铃模式等，点击相应的下拉菜单弹出相应的对话框即可进行设置。

Here you can set the smart terminal's incoming ring tone, ring mode, etc--tap corresponding drop down menu to pop up related dialog box where you can set sound.



显示设置

Display Setting

显示设置共有 3 个设置功能，分别是为“亮度”“动画”“屏幕超时”

Display Setting includes 3 setting functions: Brightness, Animation and Screen Overtime.



位置和安全设置

Position and Security Setting

在此可设置是用有限/无线连接网络、设置屏幕密码保护等等设置

Here you can set network type (choosing wired or wireless network), the screen saver's password, etc.



应用程序

Applications

管理本智能终端中的应用程序

Manage the smart terminal's applications




账户与同步

Account and Synchronization

可随时添加新的程序，建立新的账户，让本机的账户信息与之同步，如：联系人。

You can add new application to create new account at any time and synchronize the phone's account information with it, such as Contact.

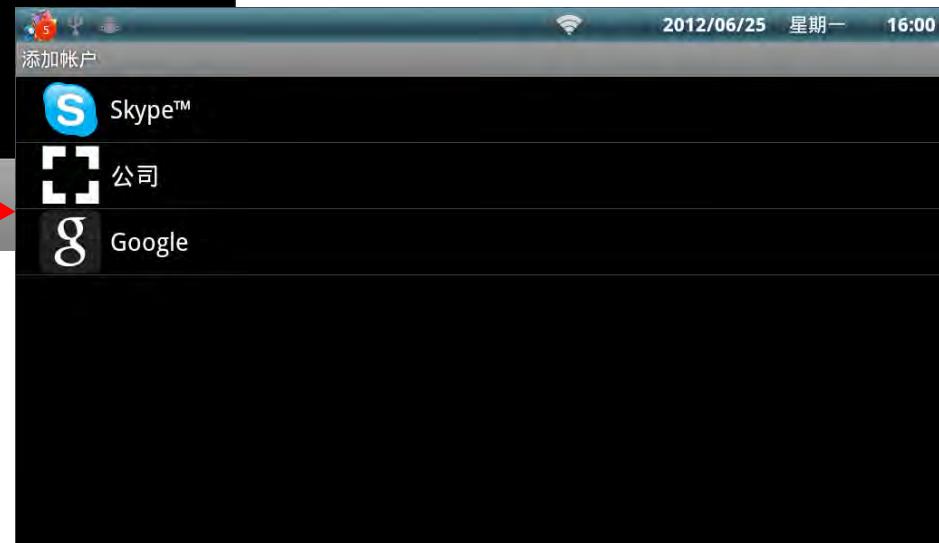

语言和键盘设置

Language and Keyboard Setting



在此可进行语言的选择，还可添加词典，另外还有三大键盘设置，轻点进入即可进行相应设置。
Here you can select different languages and add dictionary, in addition here are setting for 3 types of keyboards—tap to set them.



语音输入与输出

Voice Input and Output

在终端机中有些功能设置牵涉到将文字转化为语音格式，而相应的设置则在此进行，点击进入“文字转语音设置”，可以选择“总是使用我的设置”也可不选系统自动默认设置，在这里关于语音的语速和语言都可以进行设置修改来满足机主需求。

Some of the terminal's functions involve transforming word into voice and corresponding setting can be implemented here. Tap to enter Transforming Word to Voice Setting and you can select Always Use My Setting and not select the system's default setting—here the owner can set and revise the voice's speed and language as required.




隐私权

Privacy

通过“隐私权”进入后可选择“恢复出厂设置”进行出厂设置，根据屏幕提示按步骤操作，仔细查看屏幕提示，如‘是否备份联系人信息’‘格式 SD 卡’等，在进行恢复出厂设置时请机主格外注意，一旦选择，所删除的信息将无法恢复。

In Privacy Setting, select Restore Factory Setting to restore the terminal to factory setting—according to the screen's prompts operate the setting step by step and carefully read the prompts (e.g. 'Do you want to backup contacts?', 'Format SD card', etc). The owner must notice that in Restore Factory Setting once you have selected to delete, the deleted information cannot be restored.



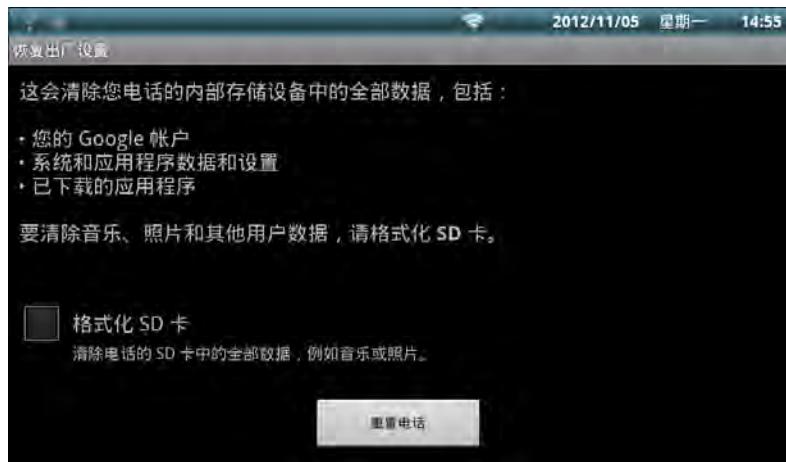


首次开机/恢复出厂设置后开机

First start-up/start-up after restore factory setting

本机首次开机和恢复出厂设置后首次开机的页面相同，需要机主按照提示选择“语言”、“国家”、“城市”和设置“电话模式”，选择确定后进入机主可以直接打开系统进入主页面，也可继续设置 WIFI。

The page of the phone's first start-up is the same as that after restore factory setting, the owner need to, in the light of prompts, select Language, Country, City and set Phone Mode. At the end, the owner can open the system directly to enter homepage or continue to set WIFI.




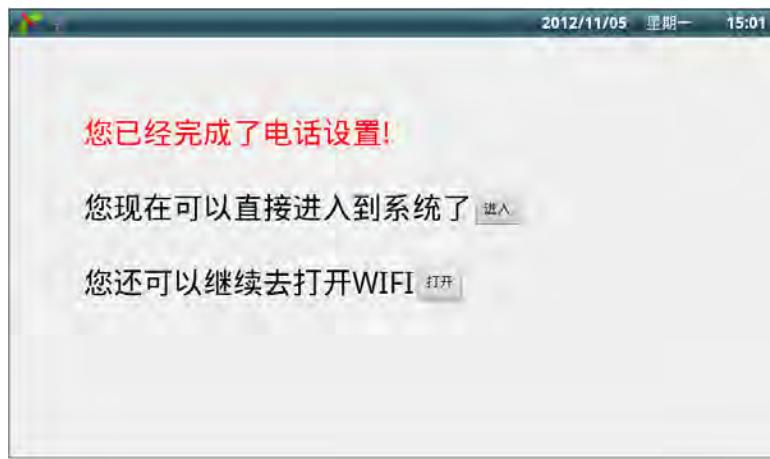


关于电话

About the Phone

在此查看本机的配置及产品相关信息

Here you can see the phone's configuration and product's related information

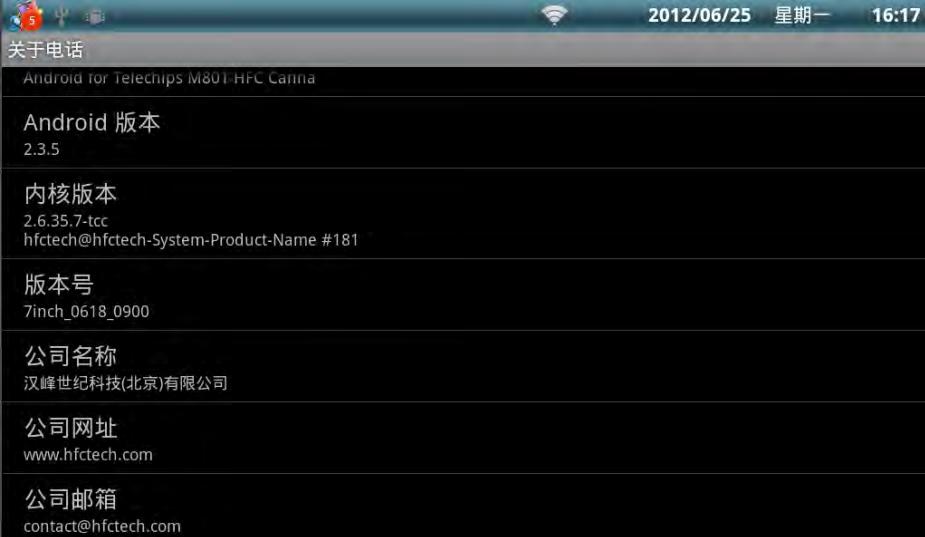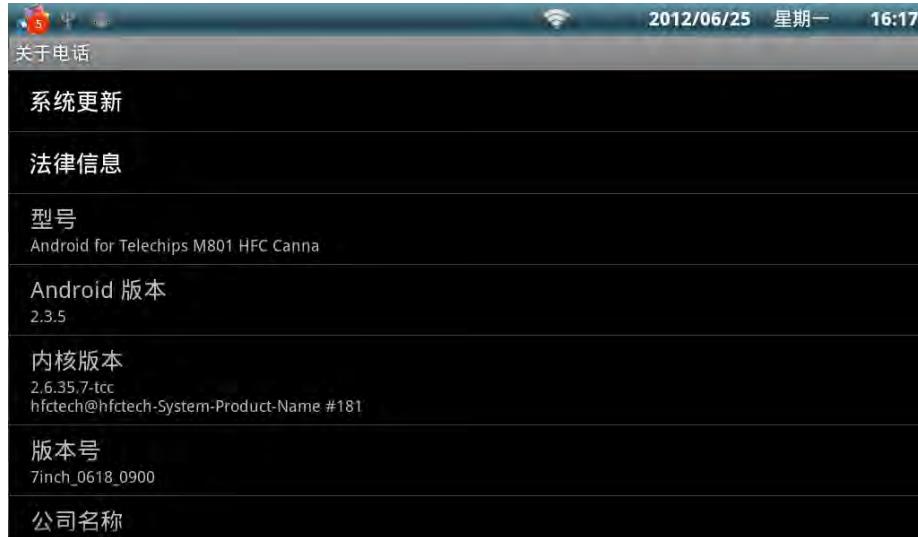

FCC Caution.

§ 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Changes or modification warning

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

***RF warning for Mobile device:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.