


SPECIFICATION FOR APPROVAL

CUSTOMER:	SHENZHEN LK TECHNOLOGY CO.,LTD
CUST P/N:	
FINE P/N:	N3
DESC:	Φ43.5MMX5.0MMX0.8MM

SPECIFICATION

DESC	Φ 20.5x43.5-6.5uH-0.08x105-40mm-50C	Rev: A.0	CUST:	XXX
			CUST P/N:	

1.DIMENSION:(mm)

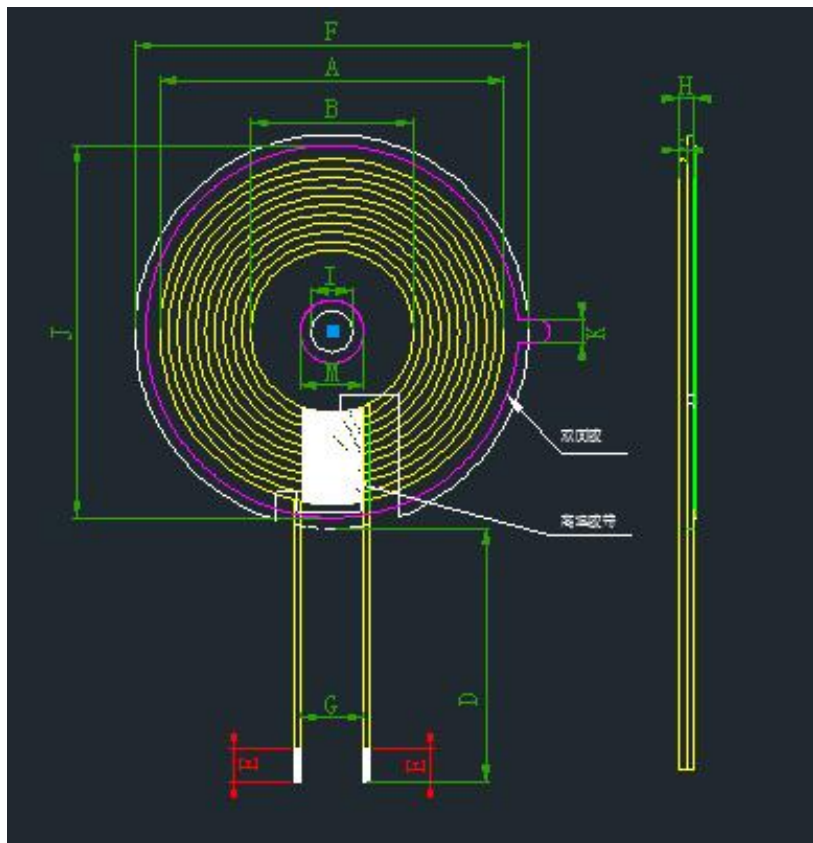

A	$42.5.0 \pm 1$
B	20.5 ± 0.5
D	40 ± 2
E	3 ± 2
F	43 ± 1
G	10
H	2.2 ± 0.5
I	5.3 ± 0.5
J	43 ± 0.5
K	3max
M	8max

annotation:

1.Wrap 8mm (Ref)

high-temperature adhesive tape

1-2ts around the outgoing line;

2.The coil is pasted with round

hard magnetic piece with slot,

the size of magnetic piece is 50

± 1 mm, the inner hole is

5.0mm, the thickness is $0.8 \pm$

0.2mm, and the back glue is

pasted;

2.SCHEMATIC DIAGRAM:

