

Field strength of spurious emissions of the transmitter

§ 2.1053

LIMIT

90.210 (d) and 6.4 (d):

For transmitters designed to operate with a 12,5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12,5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

With the given transmitter output Power of 10 mW this results in an absolute Limit of -20 dBm.

Results:

There were no other relevant emissions found except the harmonics in the spectrum from 30 MHz to the 10th harmonic.

CHANNEL					
450 MHz		460 MHz		470 MHz	
Frequency (MHz)	Level (dBm)	Frequency (MHz)	Level (dBm)	Frequency (MHz)	Level (dBm)
All	< -40	All	< -40	All	< -40

Although all three channels were measured, the graphs were only taken at 460 MHz.

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Field strength of spurious emissions of the transmitter

§ 2.1053

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

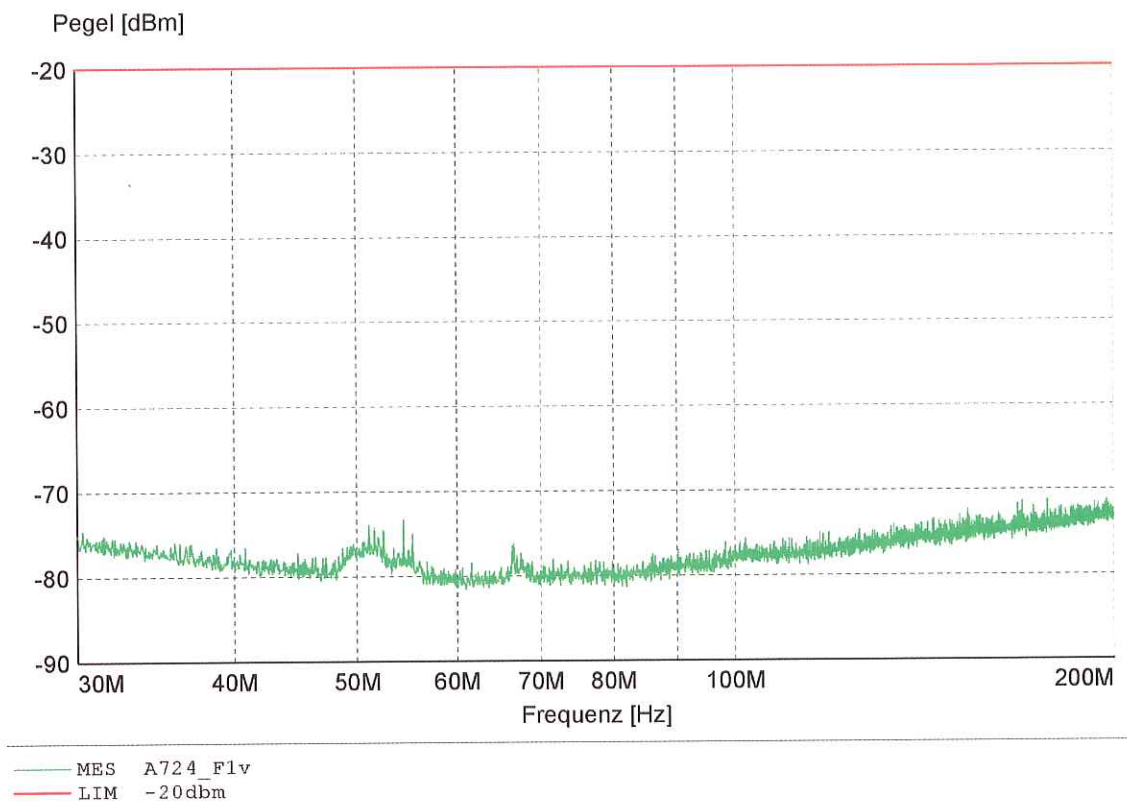

Seite 1 10.05.2006 12:06

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Field strength of spurious emissions of the transmitter

§ 2.1053

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

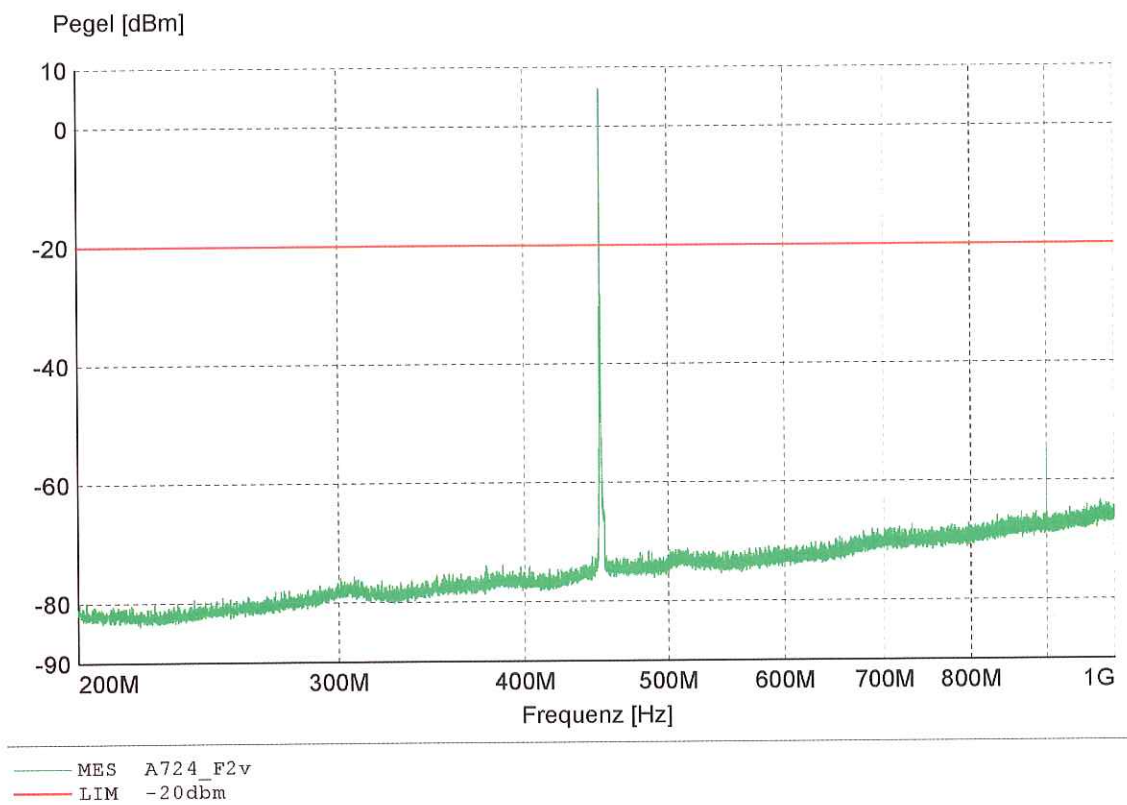

Seite 1 10.05.2006 12:51

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Field strength of spurious emissions of the transmitter

§ 2.1053

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

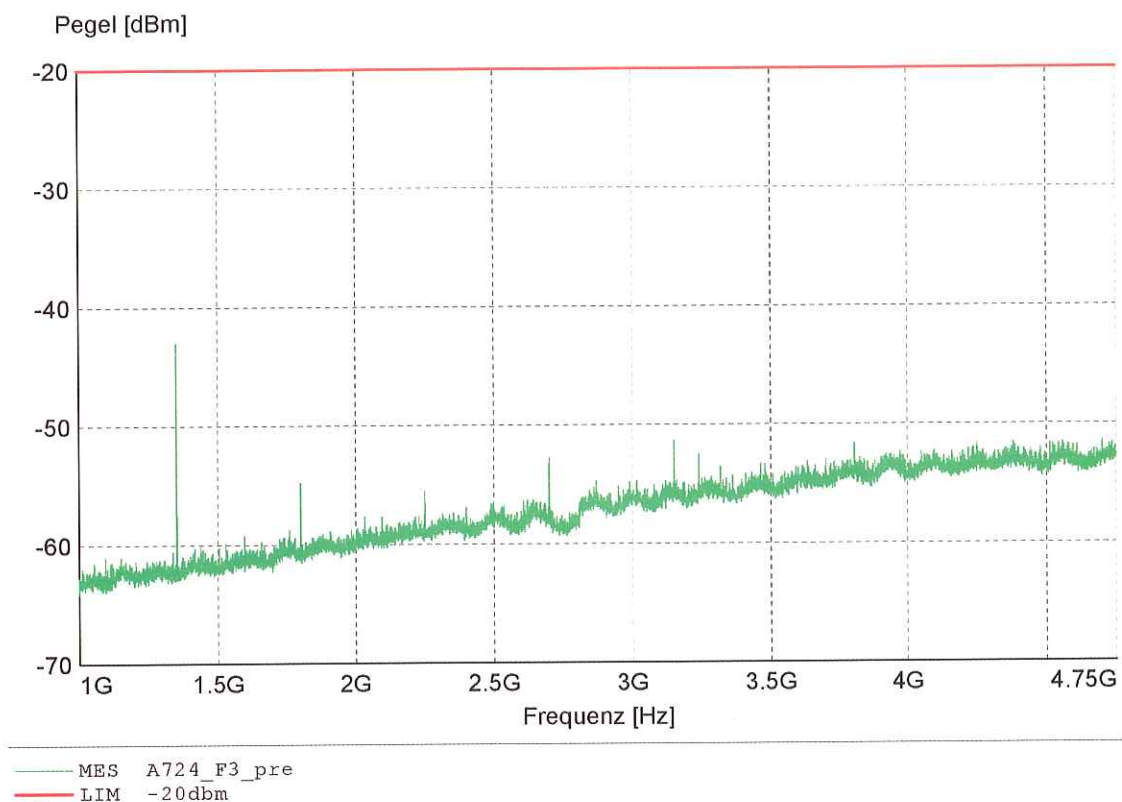

Seite 1 10.05.2006 14:09

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Frequency stability

§ 90.213
§ 7

Frequency error vs. Supply voltage

DC-Voltage	Frequency Error Hz			Frequency Error ppm		
	450 MHz	460 MHz	470 MHz	450 MHz	460 MHz	470 MHz
6,2 V	+110	+110	+110	+0,24	+0,24	+0,24
5,6 V	+110	+110	+110	+0,24	+0,24	+0,24
7,13 V	+110	+110	+110	+0,24	+0,24	+0,24
10 V	+70	+70	+70	+0,15	+0,15	+0,15

Frequency error vs. Temperature

Temperature °C	Frequency Error Hz			Frequency Error ppm		
	450 MHz	460 MHz	470 MHz	450 MHz	460 MHz	470 MHz
-30	-290	-300	-310	-0,65	-0,65	-0,65
-20	-170	-170	-170	-0,37	-0,37	-0,37
-10	-10	-10	-10	-0,02	-0,02	-0,02
±0	-30	-30	-30	-0,07	-0,07	-0,07
+10	+90	+90	+90	+0,20	+0,20	+0,20
+20	+170	+170	+170	+0,37	+0,37	+0,37
+30	+140	+140	+140	+0,30	+0,30	+0,30
+40	+40	+40	+40	+0,09	+0,09	+0,09
+50	-30	-30	-30	-0,07	-0,07	-0,07

LIMIT 90.213(a) (7 Table 5)

In the 421-512 (450-470) MHz band, fixed and base stations with a 12,5 kHz channel bandwidth must have a frequency stability of 1,5 ppm. In the 421-512 (450-470) MHz band, mobile stations with a 12,5 kHz channel bandwidth must have a frequency stability of 2,5 ppm.

Receiver spurious emissions

§ 8

LIMIT

8 (i):

The field strength of any spurious frequency generated by the receiver in each polarization (vertical and horizontal), measured at a distance of 3 metres, shall not exceed the limits of Table 6. The resolution bandwidth of the spectrum analyser shall be 100 kHz for measuring spurious emissions below 1,0 GHz and 1,0 MHz for above 1,0 GHz.

Table 6: Spurious Emission Limits for Receivers

Spurious frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$) at 3 metres
30-88	100
88-216	150
216-960	200
960-1610	500
above 1610	1000

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Ambient temperature: 23°C

Relative humidity: 51%


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 450 MHz

Receiving

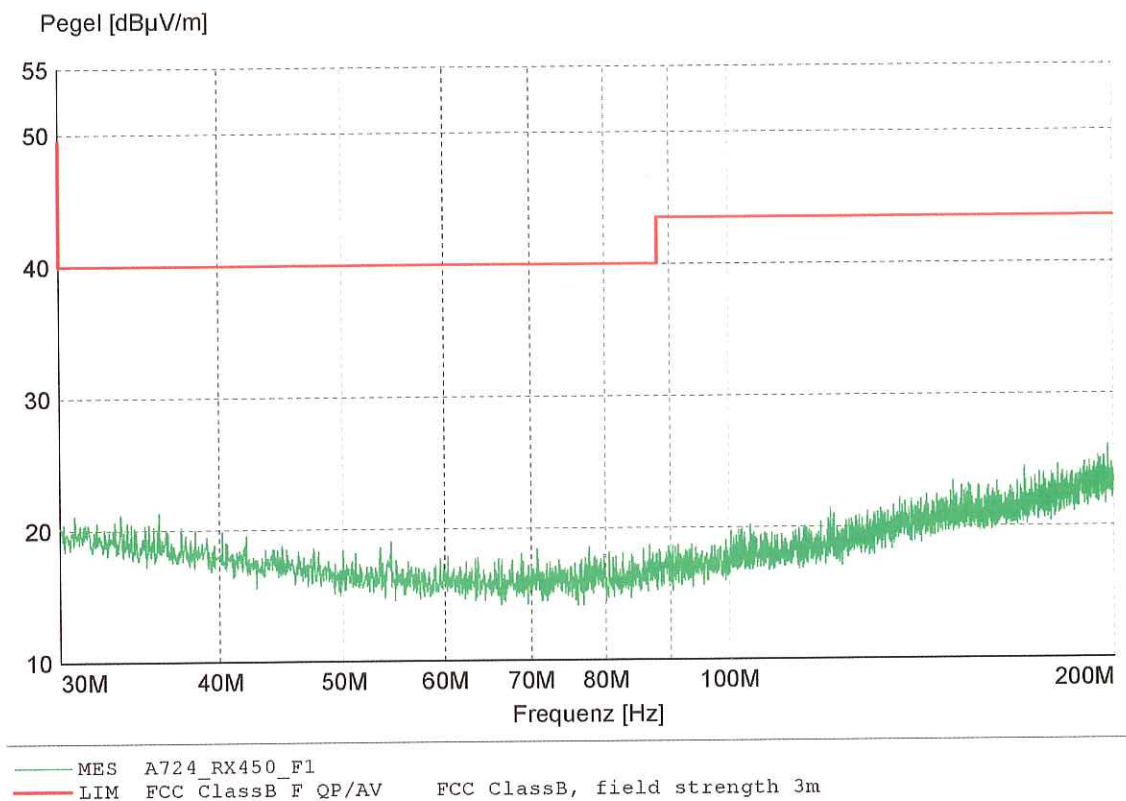

Seite 1 10.05.2006 15:14

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 450 MHz

Receiving

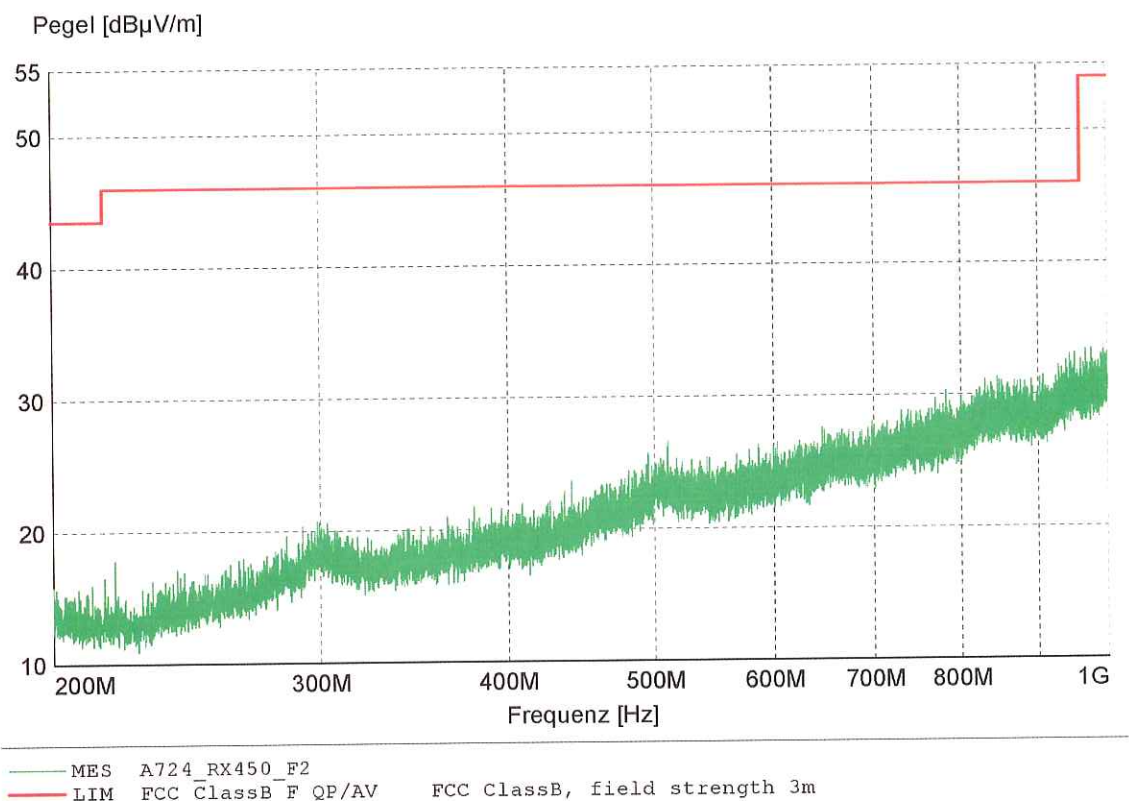

Seite 1 10.05.2006 17:29

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Ambient temperature: 23°C

Relative humidity: 51%


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 450 MHz

Receiving

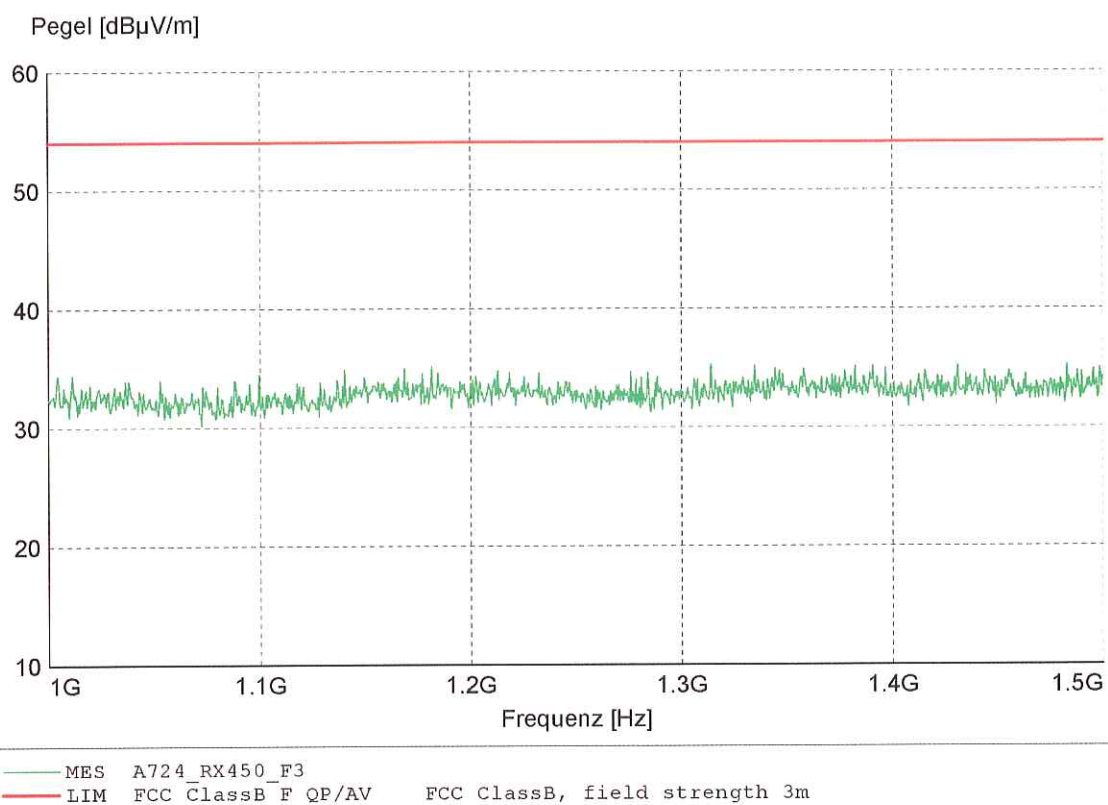

Seite 1 10.05.2006 17:34

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 460 MHz

Receiving

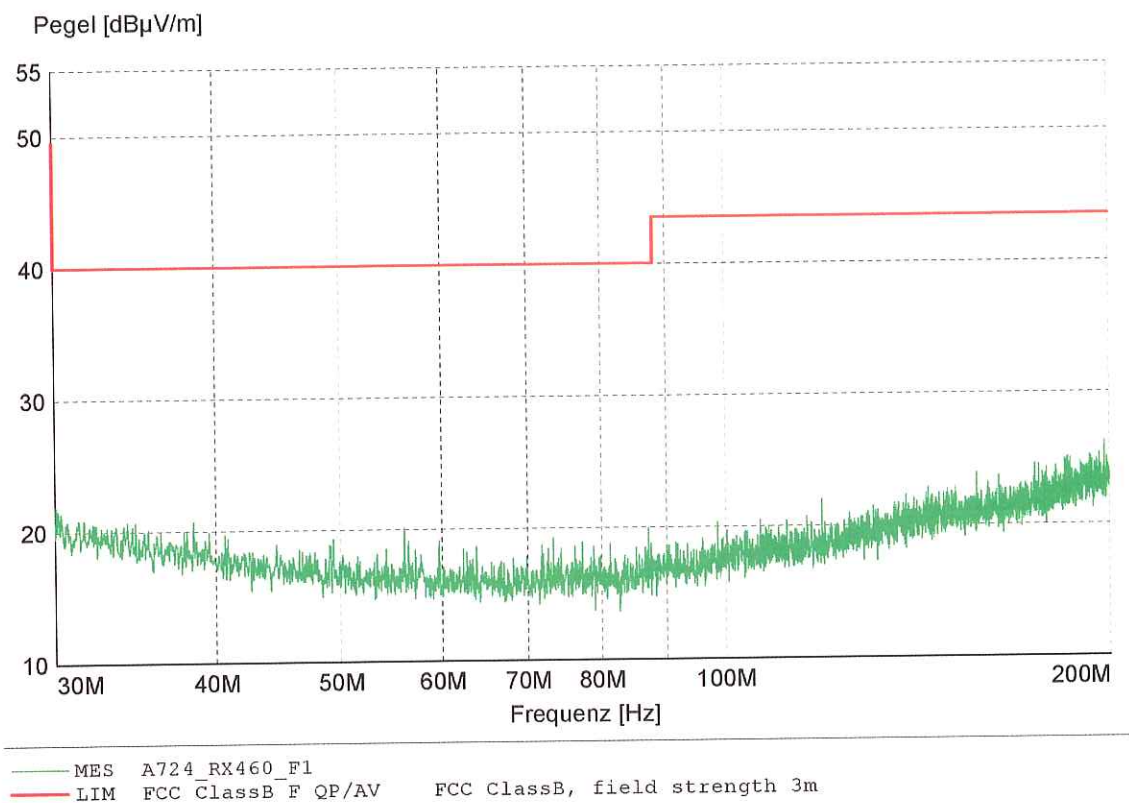

Seite 1 10.05.2006 15:16

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Ambient temperature: 23°C

Relative humidity: 51%


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 460 MHz

Receiving

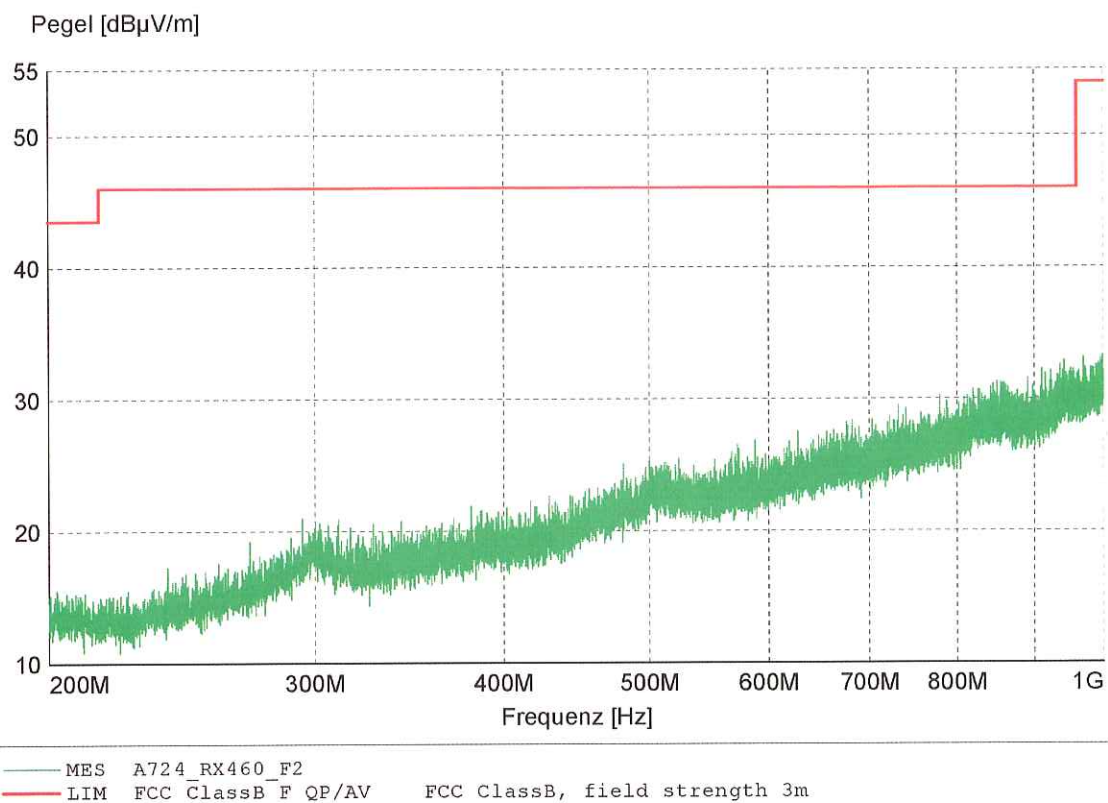

Seite 1 10.05.2006 17:27

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Ambient temperature: 23°C

Relative humidity: 51%


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 460 MHz

Receiving

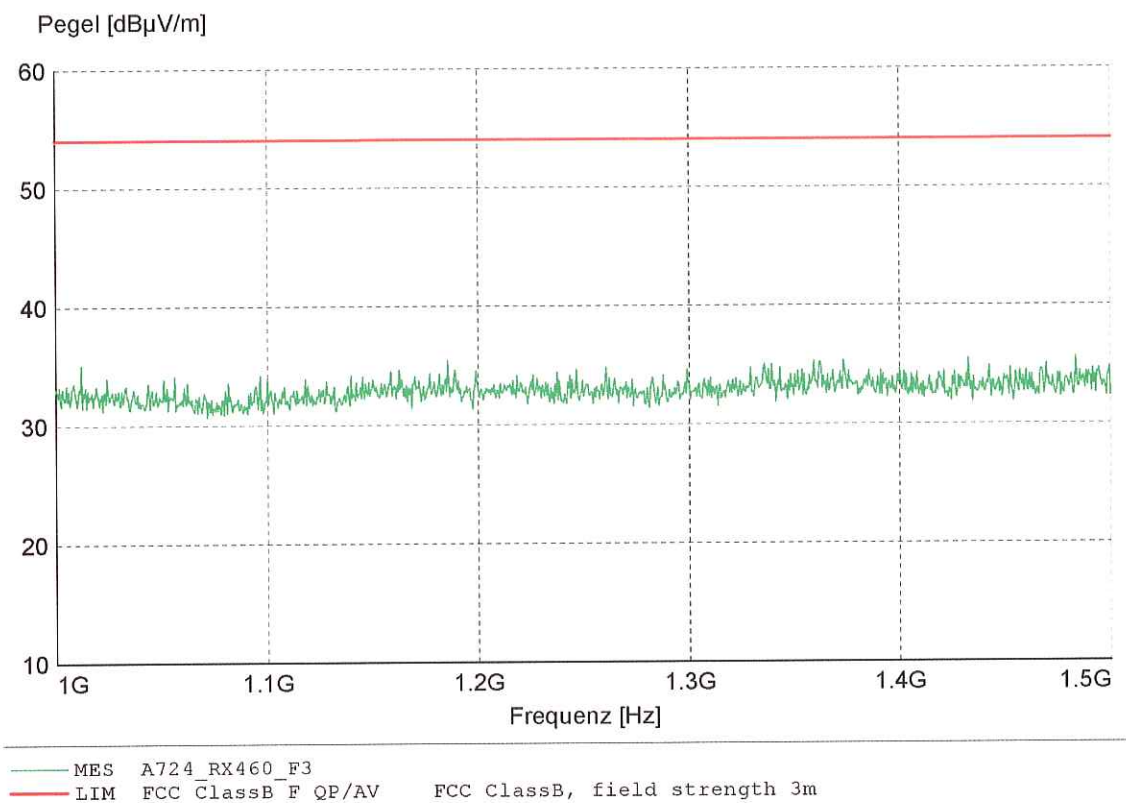

Seite 1 10.05.2006 17:35

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 470 MHz

Receiving

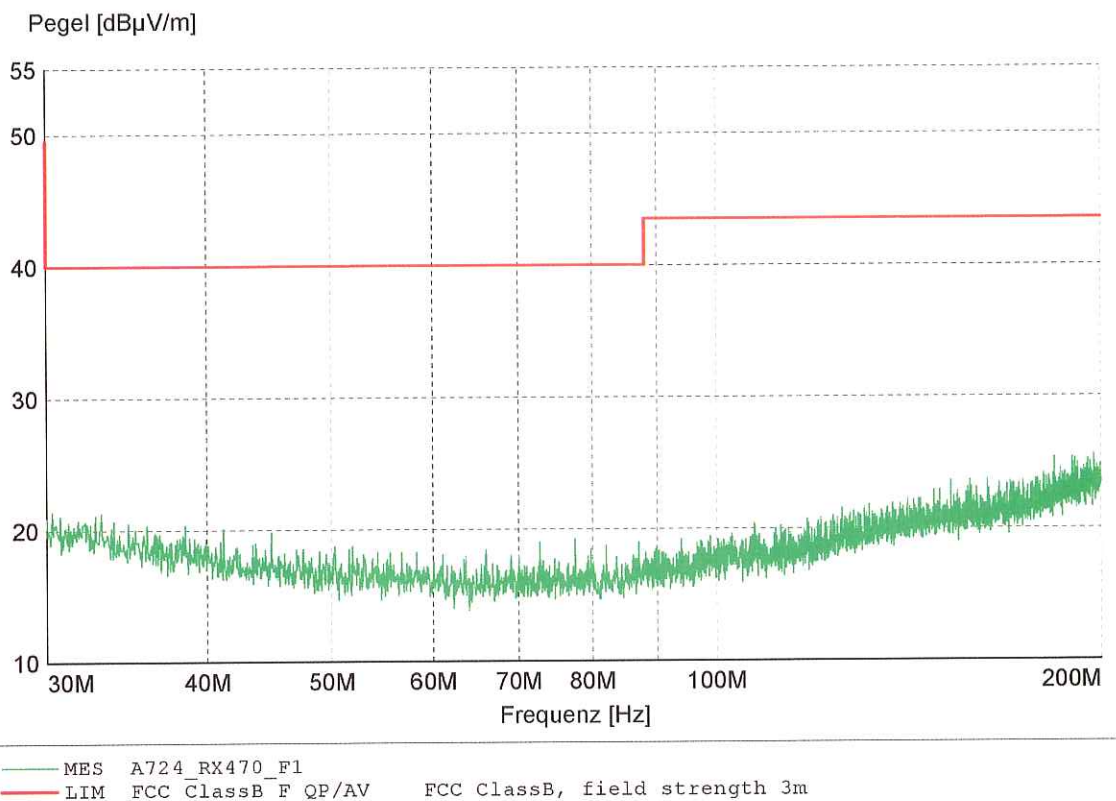

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Ambient temperature: 23°C

Relative humidity: 51%


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 470 MHz

Receiving

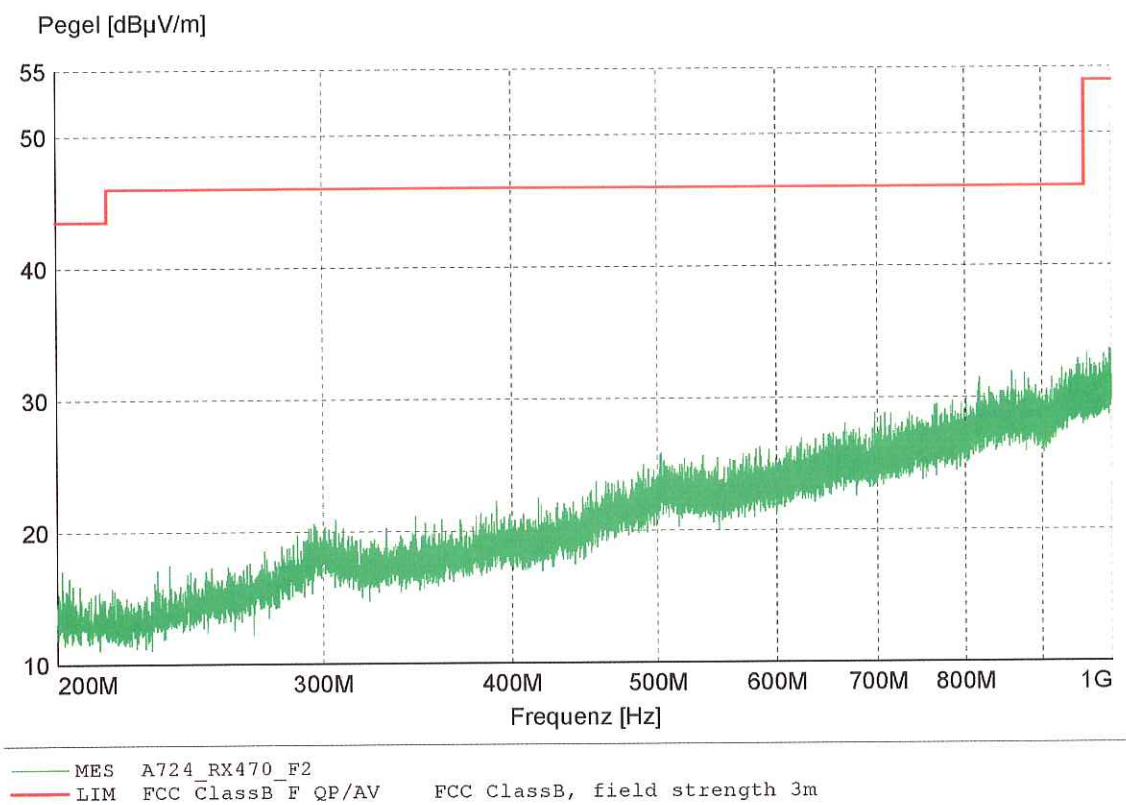

Seite 1 10.05.2006 17:26

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207


Receiver spurious emissions

§ 8

Operating mode:

Frequency: 470 MHz

Receiving

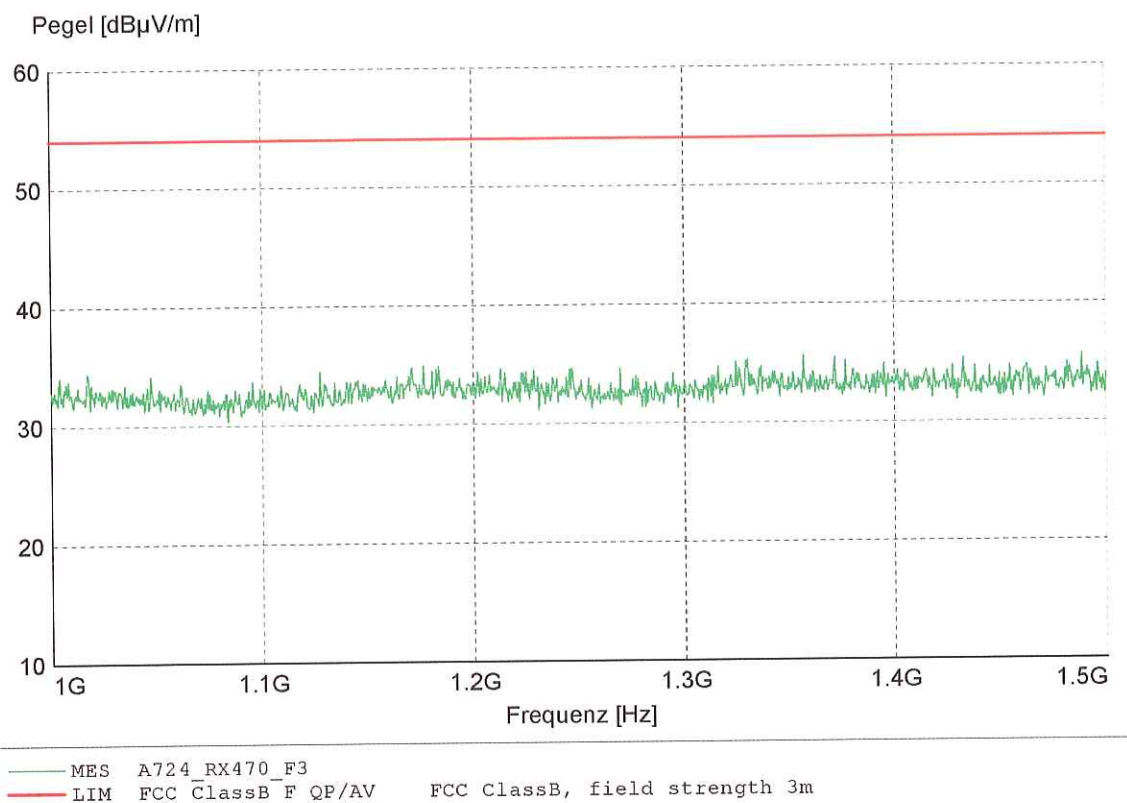

Seite 1 10.05.2006 17:36

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-125; NT-207

Appendix 1

Test equipment used

<input type="checkbox"/>	Anechoic Chamber with 3m measurement distance	NT-100	<input type="checkbox"/>	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207
<input type="checkbox"/>	Stripline according to ISO 11452-5	NT-108	<input type="checkbox"/>	Digital Radio Tester CTS55	NT-208
<input type="checkbox"/>	MA 240 - Antenna mast 1 - 4 m height	NT-110	<input type="checkbox"/>	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
<input type="checkbox"/>	DS 412 - Turntable 0 - 400 ° Azimuth	NT-111	<input type="checkbox"/>	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
<input type="checkbox"/>	HD 100 Controller Mast+Turntable	NT-112	<input type="checkbox"/>	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
<input type="checkbox"/>	HUF-Z2 - Bicon. Antennna 20 - 300 MHz	NT-120	<input type="checkbox"/>	Radiocommunicationanalyzer Marconi 2945A	NT-212
<input type="checkbox"/>	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	<input type="checkbox"/>	2855S - Communication analyzer	NT-213
<input type="checkbox"/>	HFH-Z2 - Loop Antenna. 9 kHz - 30 MHz	NT-122	<input type="checkbox"/>	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
<input type="checkbox"/>	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	<input type="checkbox"/>	Diode Detector 0,01 GHz - 26,5 GHz	NT-215
<input type="checkbox"/>	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	<input type="checkbox"/>	RubiSource T&M Timing reference	NT-216
<input type="checkbox"/>	3115 - Horn Antenna 1 - 18 GHz	NT-125	<input type="checkbox"/>	Radiocommunicationanalyzer SWR 1180 MD	NT-217
<input type="checkbox"/>	3116 - Horn Antenna 18 - 40 GHz	NT-126	<input type="checkbox"/>	Mixer M19HWD 40 GHz – 60 GHz	NT-218
<input type="checkbox"/>	SAS-200/543 - Bicon. Ant. 20 MHz - 300 MHz	NT-127	<input type="checkbox"/>	Mixer M12HWD 60 GHz – 90 GHz	NT-219
<input type="checkbox"/>	AT-1080 - Log. Per. Ant. 80 - 1000 MHz	NT-128	<input type="checkbox"/>	TDS - 540 DSO Digital scope	NT-220
<input type="checkbox"/>	HK-116 - bicon. Ant. 20 MHz - 300 MHz	NT-129	<input type="checkbox"/>	PM97 Scopemeter	NT-221
<input type="checkbox"/>	HK-116 - bicon. Ant. 20 MHz - 300 MHz	NT-130	<input type="checkbox"/>	TPS 2014 Digital scope	NT-222
<input type="checkbox"/>	3146 - Log. Per. Ant. 200 - 1000MHz	NT-131	<input type="checkbox"/>	Artificial Ear according to IEC 60318	NT-224
<input type="checkbox"/>	Loop Antenna H-Field	NT-132	<input type="checkbox"/>	1 kHz Sound calibrator	NT-225
<input type="checkbox"/>	Horn Antenna 500 MHz - 2900 MHz	NT-133	<input type="checkbox"/>	B10 - Harmonics and flicker analyzer	NT-232
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	<input type="checkbox"/>	SRM-3000 Spectrumanalyzer	NT-233
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	<input type="checkbox"/>	E-field probe SRM 75 MHz – 3 GHz	NT-234
<input type="checkbox"/>	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	<input type="checkbox"/>	Hall-Teslameter ETM-1	NT-241
<input type="checkbox"/>	Conical Dipol Antenna PCD8250	NT-138	<input type="checkbox"/>	EFA-3 H-field- / E-field probe	NT-243
<input type="checkbox"/>	HZ-1 Antenna tripod	NT-150	<input type="checkbox"/>	E-field measuring instrument EMR-200; 100 kHz – 3 GHz	NT-244
<input type="checkbox"/>	BN 1500 Antenna tripod	NT-151	<input type="checkbox"/>	E-field probe 100 kHz – 3 GHz	NT-245
<input type="checkbox"/>	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	<input type="checkbox"/>	Magneticfield-Sensor 300 kHz – 30 MHz	NT-246
<input type="checkbox"/>	Spectrumanalyzer – FSP7 9 kHz – 7 GHz	NT-200	<input type="checkbox"/>	E-field probe 3 MHz – 18 GHz	NT-247
<input type="checkbox"/>	ESVP - Test receiver 20 - 1000 MHz	NT-201	<input type="checkbox"/>	H-field probe 27 MHz – 1 GHz	NT-248
<input type="checkbox"/>	ESPC - Test receiver 9 kHz - 2,5 GHz	NT-203	<input type="checkbox"/>	ELT-400 1 Hz – 400 kHz	NT-249


Division Medical Technology/
Communication Technology/
EMC

Department: FG

Test report number:
M/FG-06/135

Page: 1 of 3

Date: 18.12.2006

Checked by: 

Appendix 1 (continued)

Test equipment used

<input type="checkbox"/>	MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	<input type="checkbox"/>	AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
<input type="checkbox"/>	FCC-203I EM Injection clamp	NT-251	<input type="checkbox"/>	APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
<input type="checkbox"/>	FCC-203I-DCN Ferrite decoupling network	NT-252	<input type="checkbox"/>	Preamplifier 1 GHz - 4 GHz	NT-335
<input type="checkbox"/>	PR50 Current Probe	NT-253	<input type="checkbox"/>	Preamplifier for GPS MKU 152 A	NT-336
<input type="checkbox"/>	PR630 Current Probe	NT-254	<input type="checkbox"/>	Preamplifier 100 MHz – 23 GHz	NT-337
<input type="checkbox"/>	Fluke 87 V True RMS Multimeter	NT-260	<input type="checkbox"/>	DC Block 10 MHz – 18 GHz Model 8048	NT-338
<input type="checkbox"/>	Model 2000 Digital Multimeter	NT-261	<input type="checkbox"/>	2-97201 Electronic load	NT-341
<input type="checkbox"/>	Fluke 79 Digital Multimeter	NT-262	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
<input type="checkbox"/>	ESH2-Z5 Artificial mains network 4x25A	NT-300	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
<input type="checkbox"/>	ESH3-Z5 Artificial mains network 2x10A	NT-301	<input type="checkbox"/>	VDS 200 Mobil-impuls-generator	NT-350
<input type="checkbox"/>	ESH3-Z6 Artificial mains network 1x100A	NT-302	<input type="checkbox"/>	LD 200 Mobil-impuls-generator	NT-351
<input type="checkbox"/>	ESH3-Z4 T-Artificial network	NT-303	<input type="checkbox"/>	MPG 200 Mobil-Impuls-Generators	NT-352
<input type="checkbox"/>	PHE 4500/B Power amplifier	NT-304	<input type="checkbox"/>	EFT 200 Mobil-impuls-generator	NT-353
<input type="checkbox"/>	EZ10 T-Artificial Network	NT-305	<input type="checkbox"/>	AN 200 S1 Artificial Network	NT-354
<input type="checkbox"/>	ENY22 Artificial Network	NT-308	<input type="checkbox"/>	FP 16/3-1 3 ph. Coupling filter (Burst)	NT-400
<input type="checkbox"/>	ENY41 Artificial Network	NT-309	<input type="checkbox"/>	PHE 4500 - Mains impedance network	NT-401
<input type="checkbox"/>	SMG - Signal generator 0,1 - 1000 MHz	NT-310	<input type="checkbox"/>	IP 6.2 Coupling filter for data lines (Surge)	NT-403
<input type="checkbox"/>	PM 5518 TXVPS Video generator	NT-311	<input type="checkbox"/>	ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
<input type="checkbox"/>	RefRad Reference generator	NT-312	<input type="checkbox"/>	IP 4 - Capacitive clamp (Burst)	NT-411
<input type="checkbox"/>	SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	<input type="checkbox"/>	Highpass-Filter 100 MHz – 3 GHz	NT-412
<input type="checkbox"/>	40 MHz Arbitrary Generator T1241	NT-315	<input type="checkbox"/>	Highpass-Filter 600 MHz – 4 GHz	NT-413
<input type="checkbox"/>	PEFT - Burst generator up to 4 kV	NT-320	<input type="checkbox"/>	Highpass-Filter 1250 MHz – 4 GHz	NT-414
<input type="checkbox"/>	ESD 30 System up to 25 kV	NT-321	<input type="checkbox"/>	Highpass-Filter 1800 MHz – 16 GHz	NT-415
<input type="checkbox"/>	PSURGE 4.1 Surge generator	NT-324	<input type="checkbox"/>	Highpass-Filter 3500 MHz – 18 GHz	NT-416
<input type="checkbox"/>	TRANSIENT 1000 Immunity test system	NT-325	<input type="checkbox"/>	RF-Attenuator 20 dB 0,1 - 1000 MHz / 25 W	NT-421
<input type="checkbox"/>	VCS 500-M6 Surge-Generator	NT-326	<input type="checkbox"/>	RF-Attenuator 10 dB 0,1 - 1000 MHz / 20 W	NT-422
<input type="checkbox"/>	BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330	<input type="checkbox"/>	RF-Attenuator 30 dB 0,1 - 1000 MHz / 1 W	NT-423
<input type="checkbox"/>	T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331	<input type="checkbox"/>	RF-Attenuator 30 dB	NT-424
<input type="checkbox"/>	500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332	<input type="checkbox"/>	RF-Attenuator 6 dB 0,1 - 1000 MHz / 1 W	NT-425

Division Medical Technology/
Communication Technology/
EMC

Department: FG

Test report number:
M/FG-06/135

Page: 2 of 3

Date: 18.12.2006

Checked by: M

Appendix 1 (continued)

Test equipment used

<input type="checkbox"/>	RF-Attenuator 6 dB 0,1 - 1000 MHz / 1 W	NT-426	<input type="checkbox"/>	ES-K1 Version 1.71 Test software	NT-520
<input type="checkbox"/>	RF-Attenuator 6 dB	NT-428	<input type="checkbox"/>	SRM-TS Version 1.3 software for SRM-3000	NT-522
<input type="checkbox"/>	RF-Attenuator 0 dB - 81 dB	NT-429	<input type="checkbox"/>	SPS-PHE Test software V2.32 voltage fluctuations/harmonics	NT-525
<input type="checkbox"/>	WRU 27 - Band blocking 27 MHz	NT-430	<input type="checkbox"/>	SPS-EM Test software V2.32 for PHE 4500/B	NT-527
<input type="checkbox"/>	WHJ450C9 AA - High pass 450 MHz	NT-431	<input type="checkbox"/>	Noise power test apparatus according to EN 55014	NT-530
<input type="checkbox"/>	WHJ250C9 AA - High pass 250 MHz	NT-432	<input type="checkbox"/>	Vertical coupling plane (ESD)	NT-531
<input type="checkbox"/>	RF-Load 150 W	NT-433	<input type="checkbox"/>	Test cable #4 for EN 61000-4-6	NT-553
<input type="checkbox"/>	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	<input type="checkbox"/>	Test cable #3 for conducted emission	NT-554
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-436	<input type="checkbox"/>	Test cable #5 ESD-cable (2x470k)	NT-555
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-437	<input type="checkbox"/>	Test cable #6 ESD-cable (2x470k)	NT-556
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 10 dB	NT-438	<input type="checkbox"/>	Test cable #8 Sucoflex 104EA	NT-559
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 20 dB	NT-439	<input type="checkbox"/>	Test cable #9 (for outdoor measurements)	NT-580
<input type="checkbox"/>	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	<input type="checkbox"/>	Test cable #10 (for outdoor measurements)	NT-581
<input type="checkbox"/>	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	<input type="checkbox"/>	Test cable #13 Sucoflex 104PE	NT-584
<input type="checkbox"/>	Power Divider 6 dB/1 W/50 Ohm	NT-443	<input type="checkbox"/>	Test cable #21 for SRM-3000	NT-592
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-444	<input type="checkbox"/>	Shield chamber	NT-600
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-445	<input type="checkbox"/>	Climatic chamber -55°C to +180°C	M-512
<input type="checkbox"/>	Tube imitations according to EN 55015	NT-450	<input type="checkbox"/>	Control and simulation equipment for EUT	---
<input type="checkbox"/>	FCC-801-M2-50A Coupling decoupling network	NT-459			
<input type="checkbox"/>	FCC-801-M5-25 Coupling decoupling network	NT-460			
<input type="checkbox"/>	FCC-801-AF10 Coupling decoupling network	NT-461			
<input type="checkbox"/>	FCC-801-S25 Coupling decoupling network	NT-462			
<input type="checkbox"/>	FCC-801-T4 Coupling decoupling network	NT-463			
<input type="checkbox"/>	FCC-801-C1 Coupling decoupling network	NT-464			
<input type="checkbox"/>	F-16A - Current probe 1kHz - 70MHz	NT-465			
<input type="checkbox"/>	95242-1 – Current probe 10 MHz – 400 MHz	NT-468			
<input type="checkbox"/>	PC P4 3 GHz Test computer	NT-500			
<input type="checkbox"/>	PC P4 1700 MHz Notebook	NT-505			
<input type="checkbox"/>	PC Intel Centrino 1600 MHz Notebook	NT-506			
<input type="checkbox"/>	Monitoring camera with Monitor	NT-511			

Division Medical Technology/
Communication Technology/
EMC

Department: FG

Test report number:
M/FG-06/135

Page: 3 of 3

Date: 18.12.2006

Checked by: *M*