

Test Report

Report No.: MTi220408009-01E2

Date of issue: 2022-05-17

Applicant: Shenzhen Baojia Battery Technology Co., Ltd.

Product: Power Capsule

Model(s): SPQ08

FCC ID: SL7SPQ08

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1 General Description	5
1.1 Description of the EUT	5
1.2 Description of test modes.....	5
1.3 Description of support units	6
2 Test facilities and accreditations.....	7
2.1 Test laboratory	7
3 List of test equipment	7
4 Test result	8
4.2 Test setup	9
4.3 Test Procedures.....	10
4.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01	11
4.4.1 Test results	12
Photographs of the Test Setup.....	16
Photographs of the EUT.....	16

Test Result Certification

Applicant:	Shenzhen Baojia Battery Technology Co., Ltd.
Address:	Block A, Yonghe Road, Tongfuyu Industrial Zone, Heping, Fuyong, Baoan, Shenzhen, China.
Manufacturer:	Shenzhen Baojia Battery Technology Co., Ltd.
Address:	Block A, Yonghe Road, Tongfuyu Industrial Zone, Heping, Fuyong, Baoan, Shenzhen, China.
Factory:	Shenzhen Baojia Battery Technology Co., Ltd.
Address:	Block A, Yonghe Road, Tongfuyu Industrial Zone, Heping, Fuyong, Baoan, Shenzhen, China.

Product description

Product name:	Power Capsule
Trademark:	MIPOW
Model name:	SPQ08
Serial Model:	N/A
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 v03r01

Date of Test

Date of test:	2022-04-19 ~ 2022-05-16
Test result:	Pass

Test Engineer :


(Yanice Xie)

Reviewed By:


(Leon Chen)

Approved By:


(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Power Capsule
Model name:	SPQ08
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V/9V/12V Wireless Output: 5W/7.5W/10W/15W Battery: DC 3.7V 8000mAh
Accessories:	Cable: USB-A to USB-C(0.3m)
Hardware version:	V1.0
Software version:	V1.2.4
RF specification:	
Operation frequency:	115 kHz – 205 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
For mobile exposure conditions	
Mode 1	Charging + Wireless Output(5W)
The test data only show worst test mode: Mode 1	
For portable exposure conditions	
Mode 1	Wireless Output(5W)
Mode 2	Wireless Output(7.5W)
Mode 3	Wireless Output(10W)
Mode 4	Wireless Output(15W)
Mode 5	Stand-by
The test data only show worst test mode: Mode 4	

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	S9+	/	YBZ
Mobile phone	IPHONE 12	/	Apple
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.

Support cable list

Description	Length (m)	From	To
/	/	/	/

2 Test facilities and accreditations

2.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

3 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2021/06/02	2022/06/01

4 Test result

4.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.




4.2 Test setup

For mobile exposure conditions:

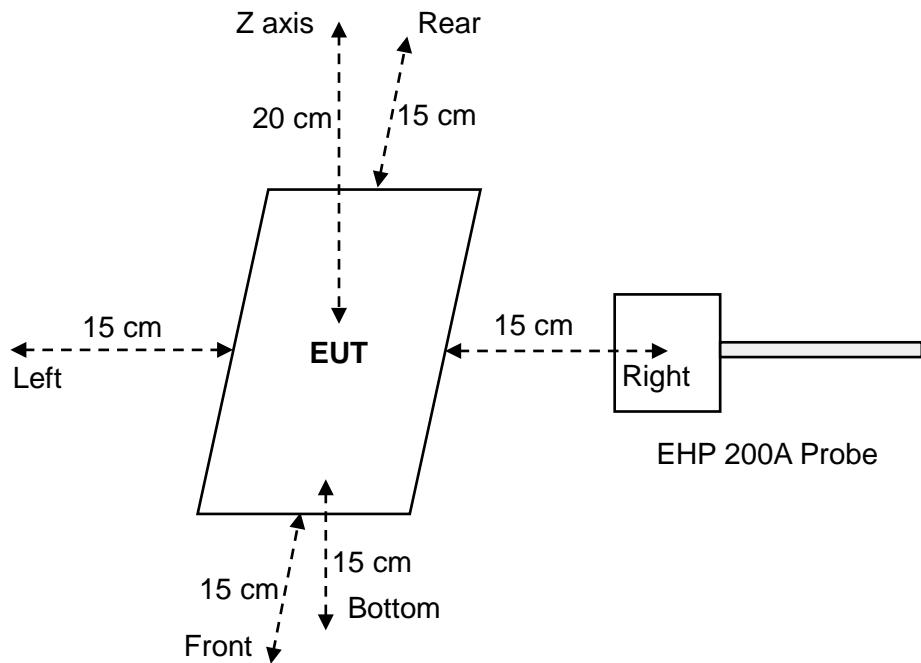

For portable exposure conditions:

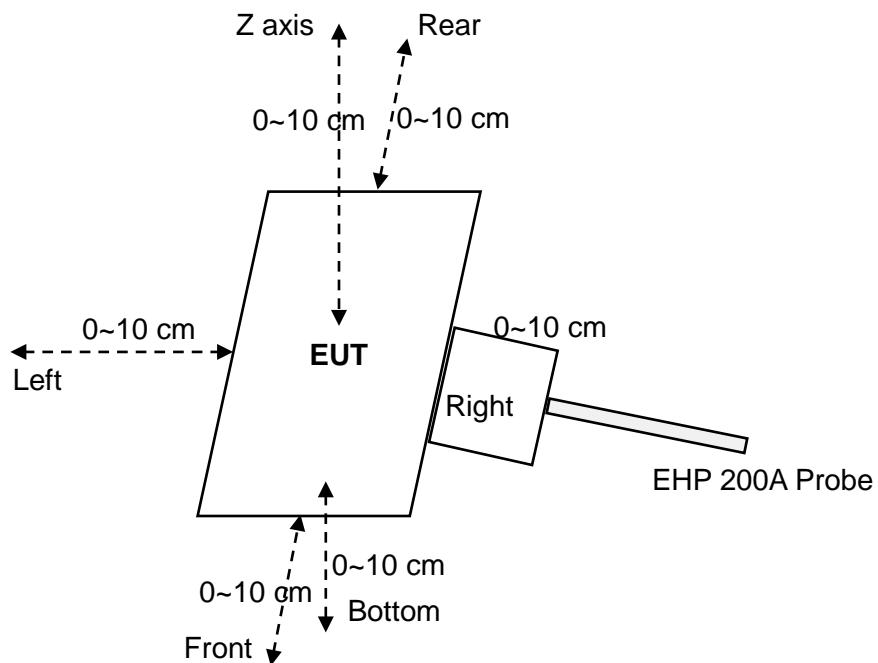

4.3 Test Procedures

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 v03r01.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 10 cm
- c. The highest emission level was recorded and compared with limit.

4.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies are: 115 kHz – 205 kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power is: 15W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT has one source primary coils.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No. The EUT has portable exposure condition.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes, and H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 10 cm were also evaluated for portable use condition.



4.4.1 Test results

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	0.7636	614	0.13%	0.0865	1.63	10.61%
	Left	0.7313			0.1729		
	Right	0.6360			0.1370		
	Front	0.6817			0.0506		
	Rear	0.5986			0.0483		
	Bottom	0.8049			0.0585		

Test condition 2: Mode 1 operating mode with client device (50 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	0.7805	614	0.13%	0.093	1.63	10.96%
	Left	0.7253			0.1787		
	Right	0.645			0.1289		
	Front	0.6752			0.051		
	Rear	0.6138			0.0387		
	bottom	0.8214			0.0615		

Test condition 3: Mode 1 operating mode with client device (99 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	0.7564	614	0.13%	0.0783	1.63	10.21%
	Left	0.7293			0.1664		
	Right	0.6276			0.1352		
	Front	0.6656			0.0492		
	Rear	0.592			0.0396		
	bottom	0.7929			0.0535		

For portable exposure condition:

Note: operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)
-test distance: 0cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.9280	1.63	97.83%
	Left	1.5946		
	Right	1.5451		
	Front	0.1575		
	Rear	0.1666		
	Bottom	1.4013		

Test condition 2: Mode 4 operating mode with client device (1 % battery status of client device)
-test distance: 2cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.5974	1.63	94.40%
	Left	1.5388		
	Right	1.3515		
	Front	0.0846		
	Rear	0.0928		
	Bottom	1.0569		

Test condition 3: Mode 4 operating mode with client device (1 % battery status of client device)
- Test distance 4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.2903	1.63	54.67%
	Left	0.8911		
	Right	0.6815		
	Front	0.0804		
	Rear	0.0641		
	Bottom	0.2740		

Test condition 4: Mode 4 operating mode with client device (1 % battery status of client device)
- Test distance 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1198	1.63	28.43%
	Left	0.4634		
	Right	0.3574		
	Front	0.0703		
	Rear	0.0513		
	Bottom	0.1321		

Test condition 5: Mode 4 operating mode with client device (1 % battery status of client device)
- Test distance 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0860	1.63	16.87%
	Left	0.2750		
	Right	0.2025		
	Front	0.0671		
	Rear	0.0501		
	Bottom	0.0865		

Test condition 6: Mode 4 operating mode with client device (1 % battery status of client device)
- Test distance 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0858	1.63	10.57%
	Left	0.1723		
	Right	0.1377		
	Front	0.0501		
	Rear	0.0495		
	Bottom	0.0587		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----