



Appendix A. Test Result of AC Power Line Conducted Emission

Model No.: TAP-M310R-NPS-1P1R-US-CT-T

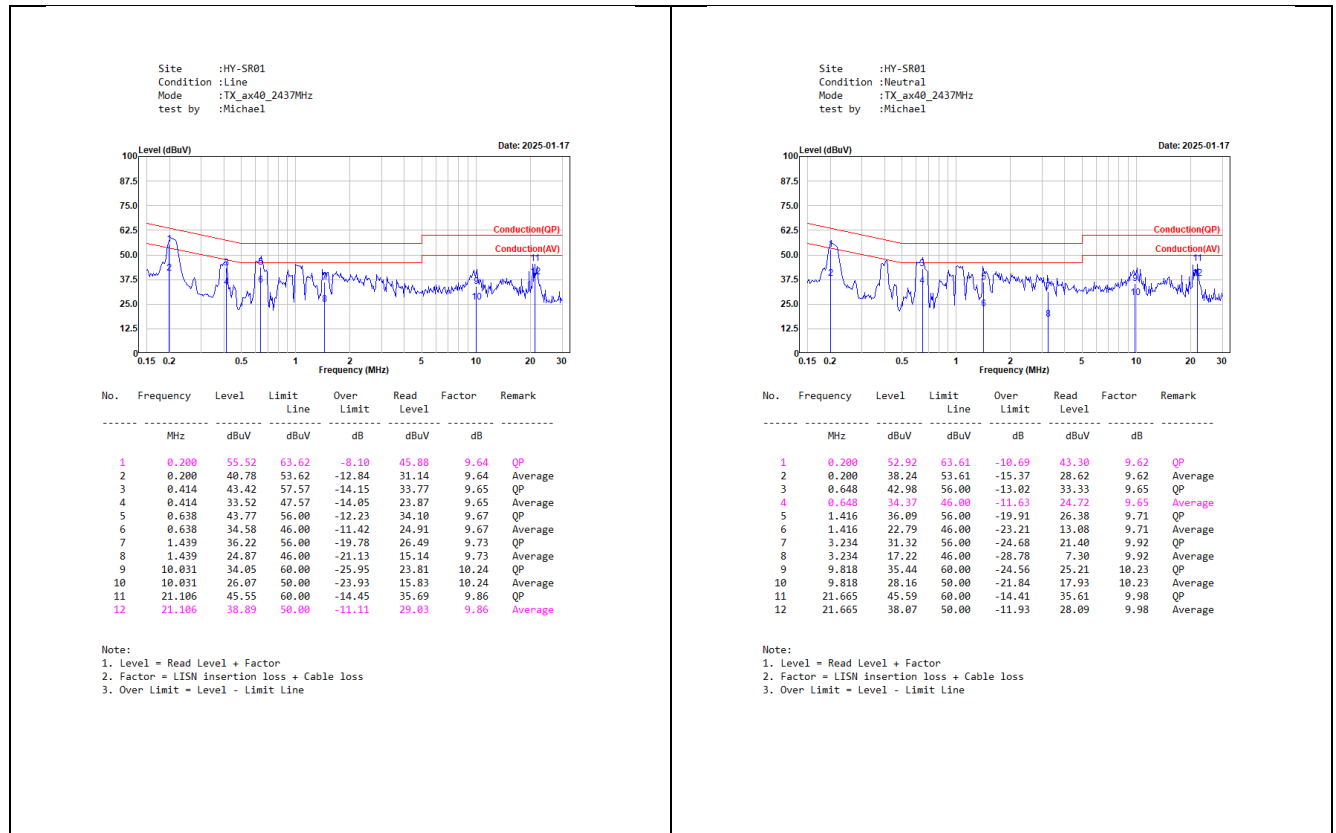


Model No.: TAP-M310R-NPS-1R-US-CT-T

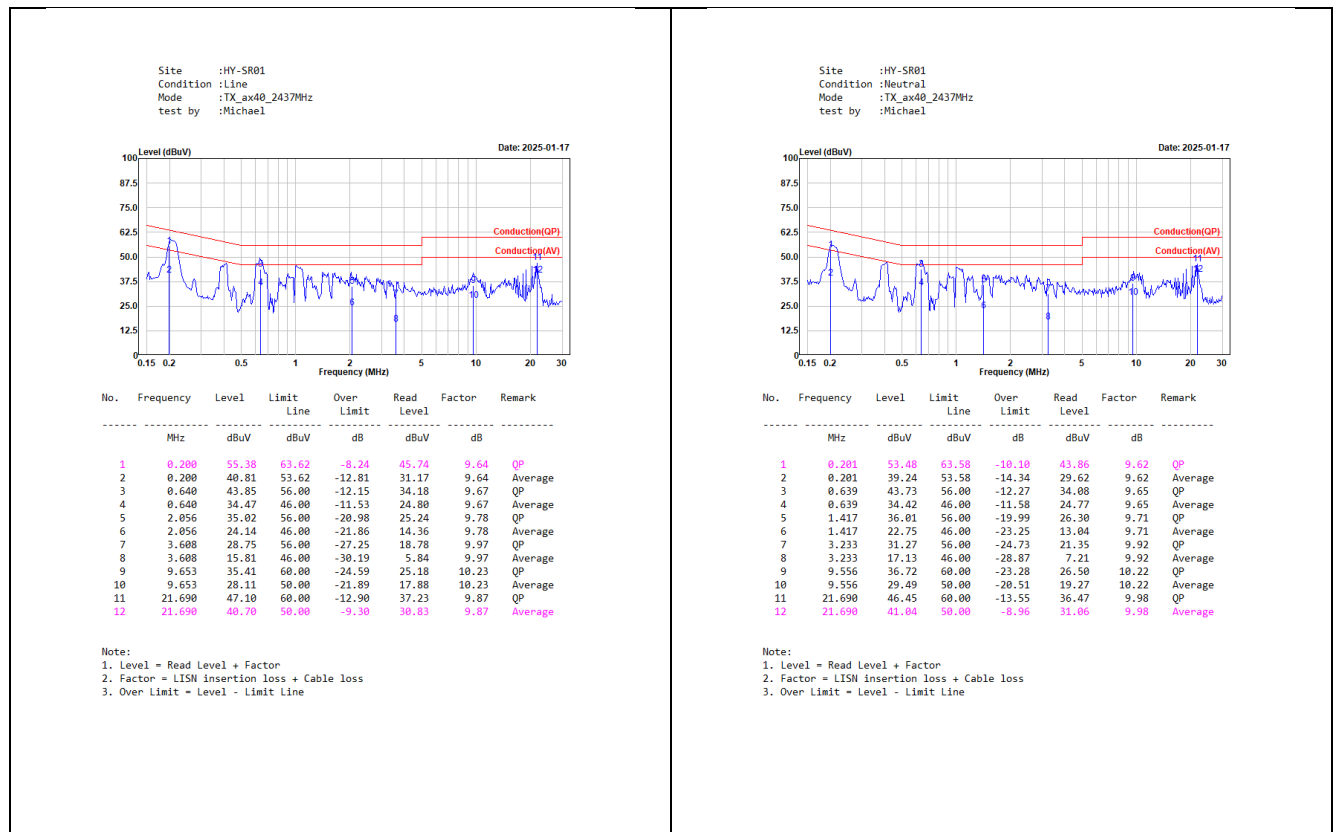


Appendix B. 6 dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)	Result
		Ant. 1	Ant. 2		
802.11b (20MHz)	2412	8.08	8.08	0.50	Pass
	2437	8.04	8.04	0.50	Pass
	2462	8.08	7.76	0.50	Pass
802.11g (20MHz)	2412	15.68	16.36	0.50	Pass
	2437	15.72	15.64	0.50	Pass
	2462	15.44	16.28	0.50	Pass
802.11ax (20MHz)	2412	18.52	18.72	0.50	Pass
	2437	18.96	17.92	0.50	Pass
	2462	18.08	16.28	0.50	Pass
802.11ax (40MHz)	2422	37.92	38.00	0.50	Pass
	2437	37.36	37.28	0.50	Pass
	2452	37.84	37.76	0.50	Pass


802.11b/20MHz/1M/2412MHz/Ch1

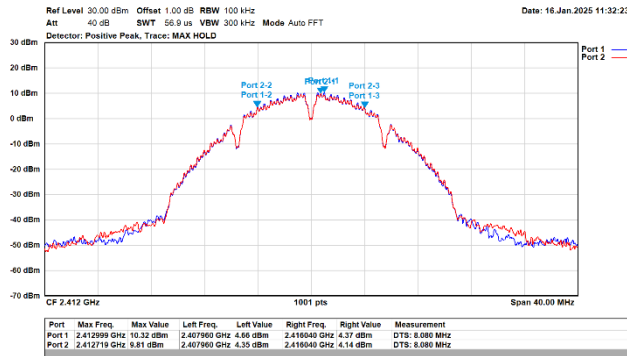


802.11b/20MHz/1M/2437MHz/Ch6

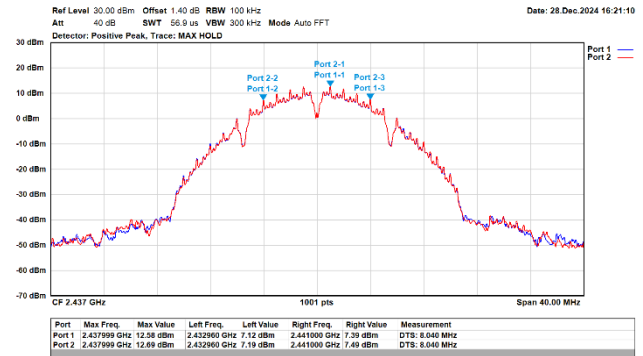


802.11b/20MHz/1M/2462MHz/Ch11

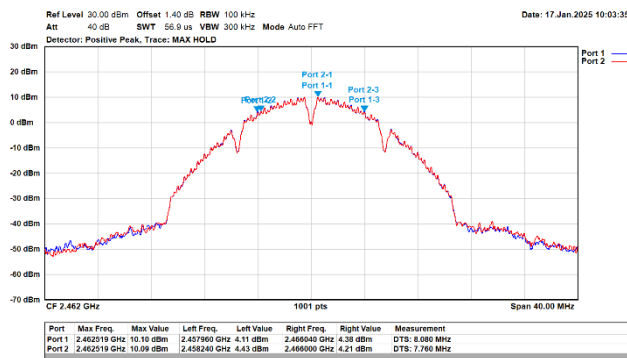


802.11g/20MHz/6M/2412MHz/Ch1

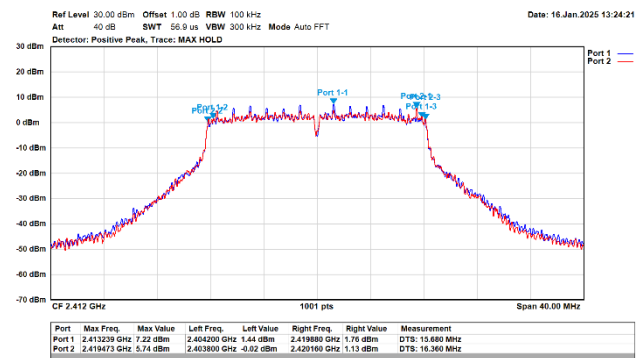


802.11g/20MHz/6M/2437MHz/Ch6

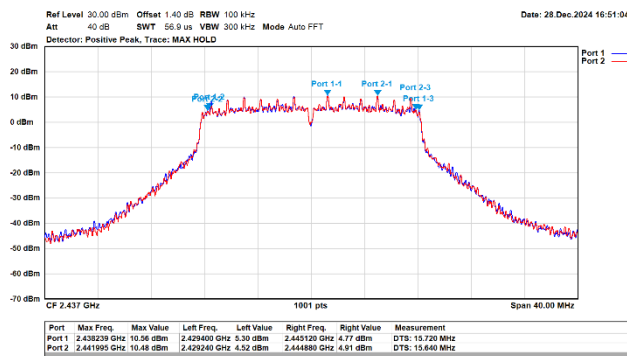


802.11g/20MHz/6M/2462MHz/Ch11

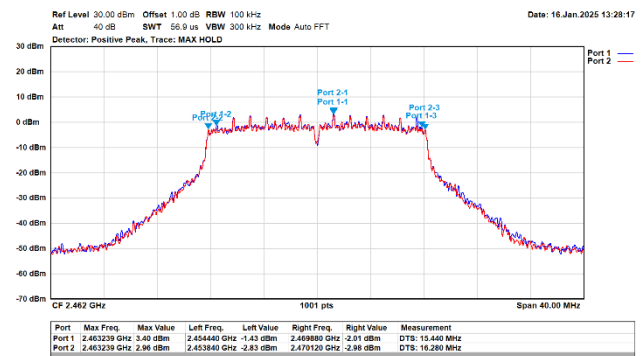


802.11ax/20MHz/MCS0/2412MHz/Ch1

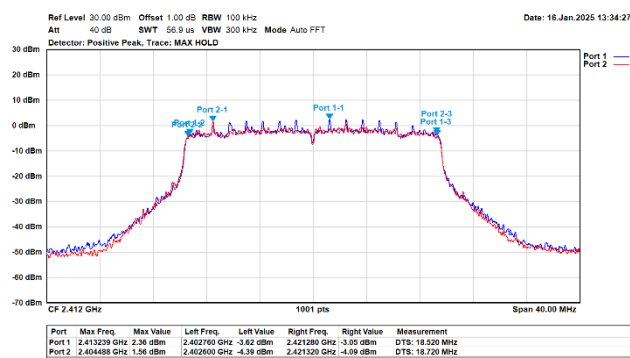


802.11ax/20MHz/MCS0/2437MHz/Ch6

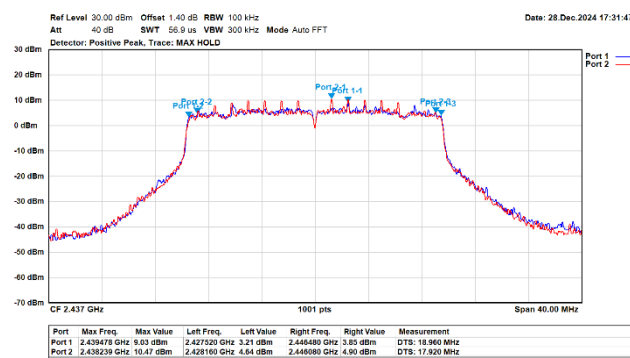


802.11ax/20MHz/MCS0/2462MHz/Ch11

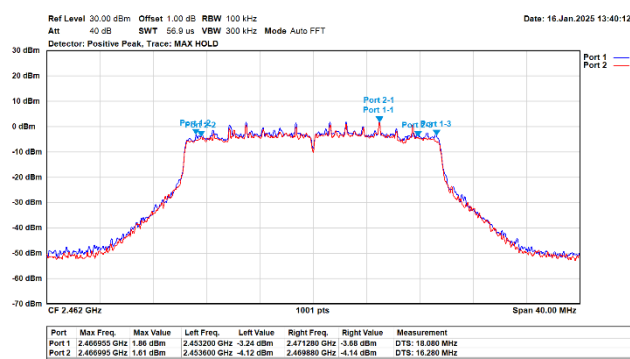


802.11ax/40MHz/MCS0/2422MHz/Ch3

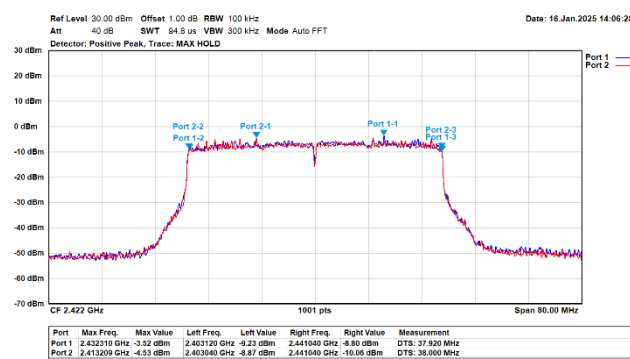

802.11ax/40MHz/MCS0/2437MHz/Ch6

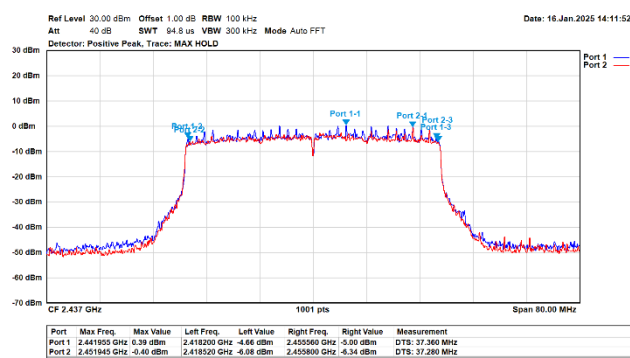

802.11ax/40MHz/MCS0/2452MHz/Ch9

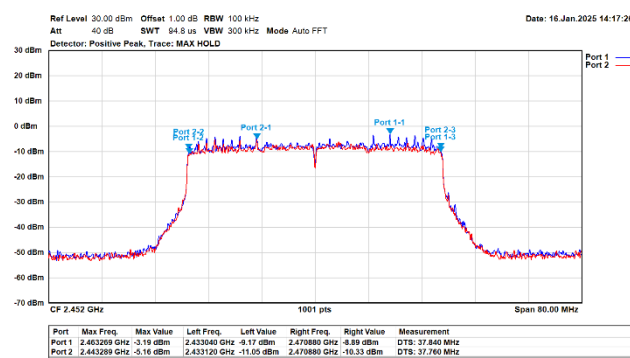

Appendix C. Test Result of Maximum Conducted Output Power

Average

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)			Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11b (20MHz)	2412	21.22	21.41	24.33	25.00	Pass
	2437	21.81	21.51	24.67	25.00	Pass
	2462	21.44	21.37	24.42	25.00	Pass
802.11g (20MHz)	2412	19.55	19.25	22.41	25.00	Pass
	2437	21.73	21.71	24.73	25.00	Pass
	2462	15.50	15.18	18.35	25.00	Pass
802.11ax (20MHz)	2412	15.14	14.92	18.04	25.00	Pass
	2437	21.89	21.60	24.76	25.00	Pass
	2462	14.04	13.73	16.90	25.00	Pass
802.11ax (40MHz)	2422	13.46	13.32	16.40	25.00	Pass
	2437	16.00	15.52	18.78	25.00	Pass
	2452	12.43	11.68	15.08	25.00	Pass


Note: Total Output Power (dBm) = $10 \cdot \log (\text{Ant. 1 (mW)} + \text{Ant. 2 (mW)})$.

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm/10kHz)			Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11b (20MHz)	2412	-4.98	-4.96	-0.39	-0.01	Pass
	2437	-5.01	-4.80	-0.64	-0.01	Pass
	2462	-5.16	-5.46	-1.31	-0.01	Pass
802.11g (20MHz)	2412	-10.94	-11.80	-8.66	-0.01	Pass
	2437	-8.28	-8.24	-5.30	-0.01	Pass
	2462	-15.03	-15.47	-12.49	-0.01	Pass
802.11ax (20MHz)	2412	-17.32	-17.68	-14.87	-0.01	Pass
	2437	-9.96	-9.21	-6.75	-0.01	Pass
	2462	-18.07	-18.83	-15.58	-0.01	Pass
802.11ax (40MHz)	2422	-21.74	-21.95	-19.24	-0.01	Pass
	2437	-19.46	-19.71	-16.52	-0.01	Pass
	2452	-22.61	-23.47	-20.38	-0.01	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.


802.11b/20MHz/1M/2412MHz/Ch1

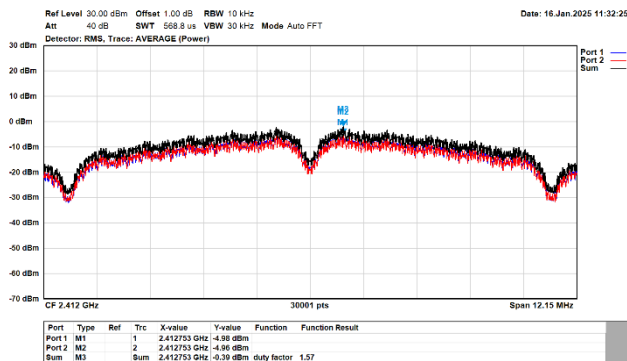


802.11b/20MHz/1M/2437MHz/Ch6

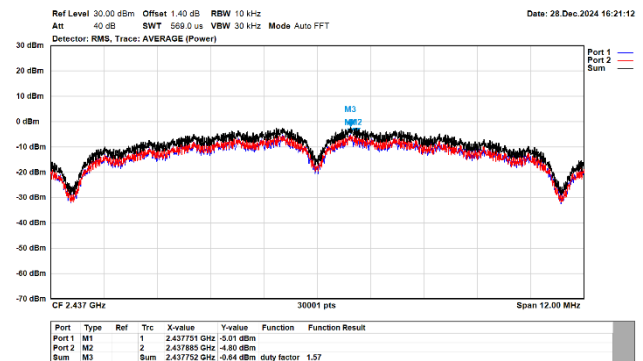


802.11b/20MHz/1M/2462MHz/Ch11

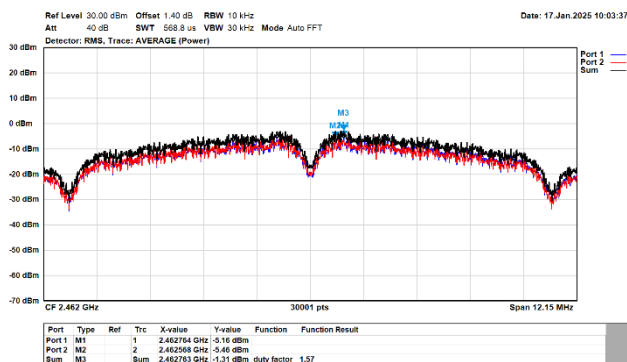


802.11g/20MHz/6M/2412MHz/Ch1

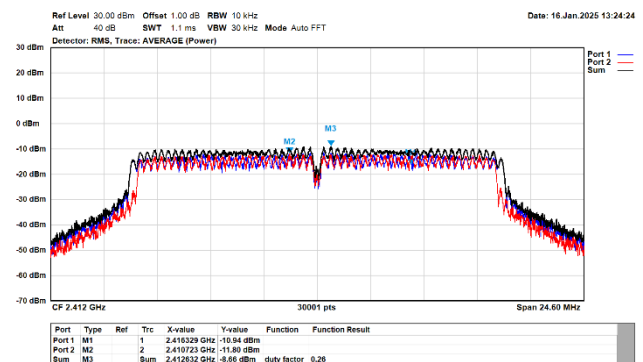


802.11g/20MHz/6M/2437MHz/Ch6

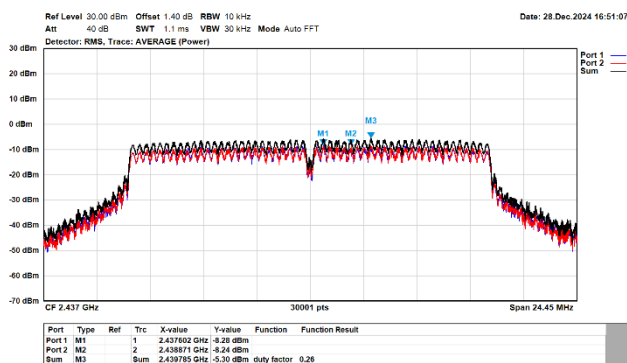


802.11g/20MHz/6M/2462MHz/Ch11

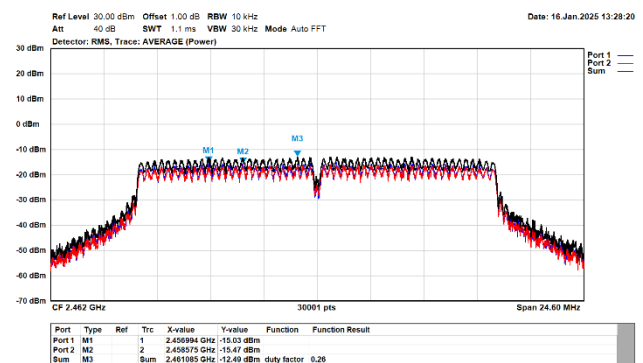


802.11ax/20MHz/MCS0/2412MHz/Ch1

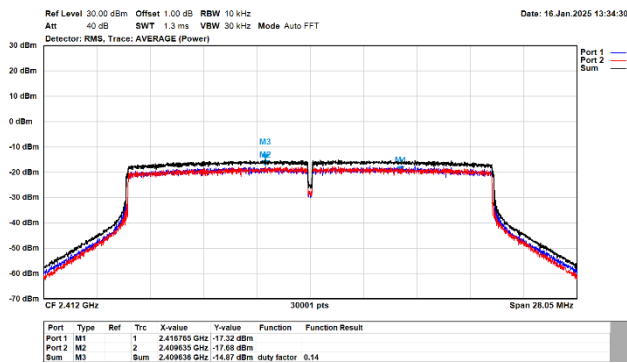


802.11ax/20MHz/MCS0/2437MHz/Ch6

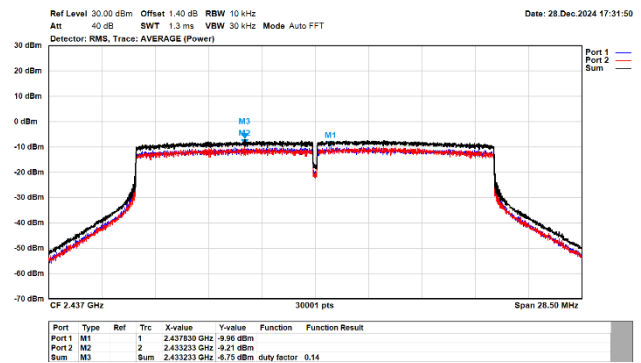


802.11ax/20MHz/MCS0/2462MHz/Ch11

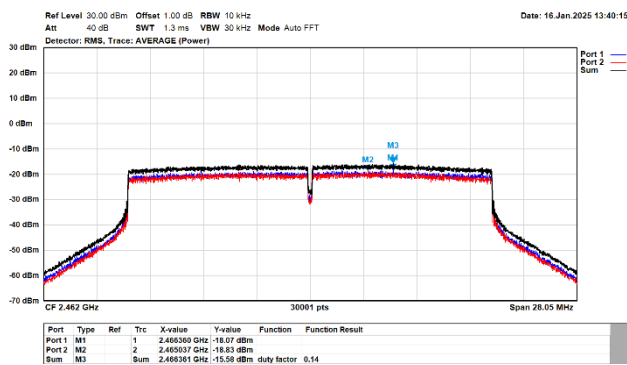


802.11ax/40MHz/MCS0/2422MHz/Ch3

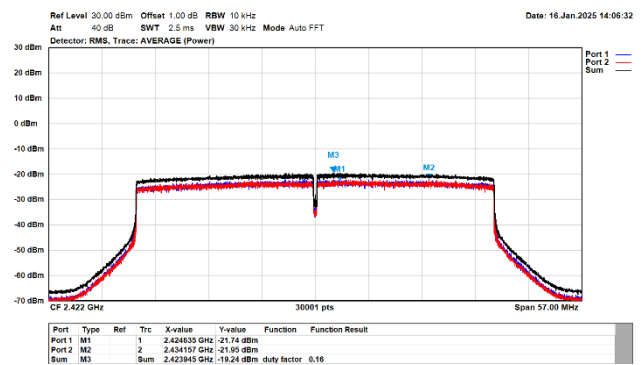

802.11ax/40MHz/MCS0/2437MHz/Ch6

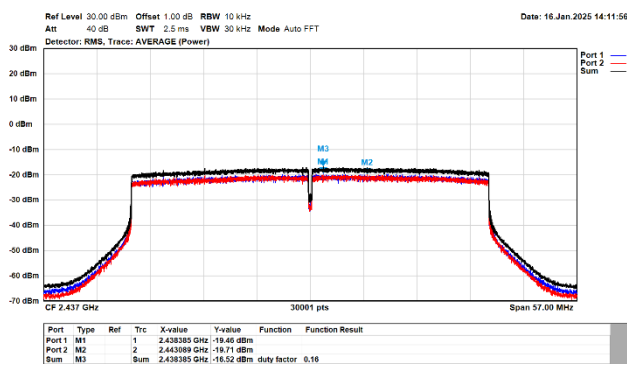


802.11ax/40MHz/MCS0/2452MHz/Ch9

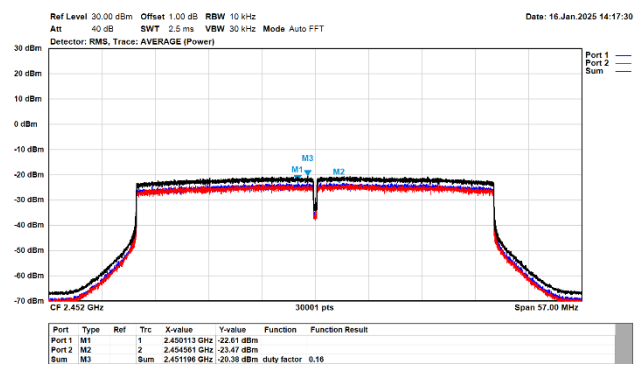


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
802.11b (20MHz)	> 30	PASS
802.11g (20MHz)	> 30	PASS
802.11ax (20MHz)	> 30	PASS
802.11ax (40MHz)	> 30	PASS


802.11b/20MHz/1M/2412MHz/Ch1 (Ref.)

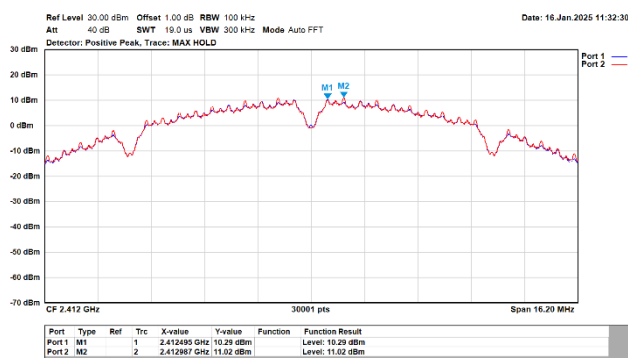


802.11b/20MHz/1M/2412MHz/Ch1

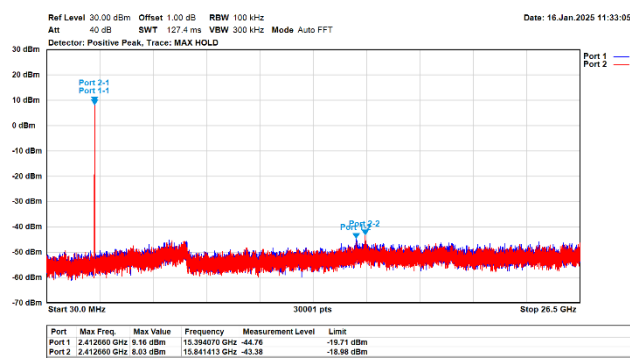


802.11b/20MHz/1M/2437MHz/Ch6 (Ref.)

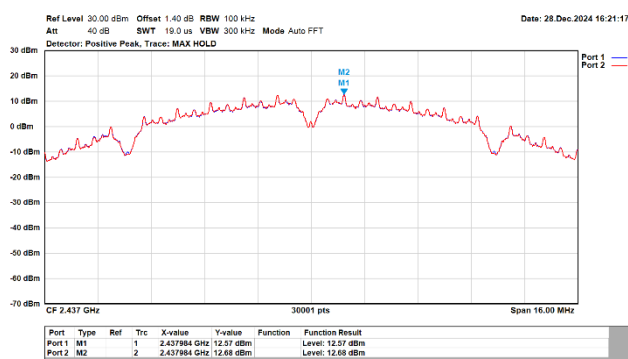


802.11b/20MHz/1M/2437MHz/Ch6

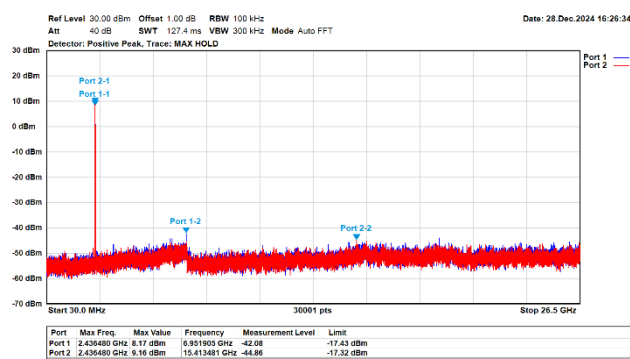


802.11b/20MHz/1M/2462MHz/Ch11 (Ref.)

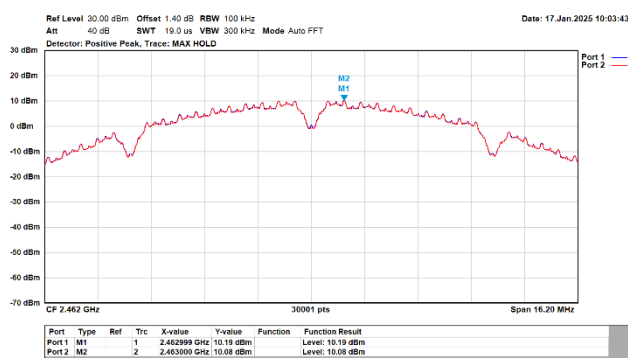


802.11b/20MHz/1M/2462MHz/Ch11

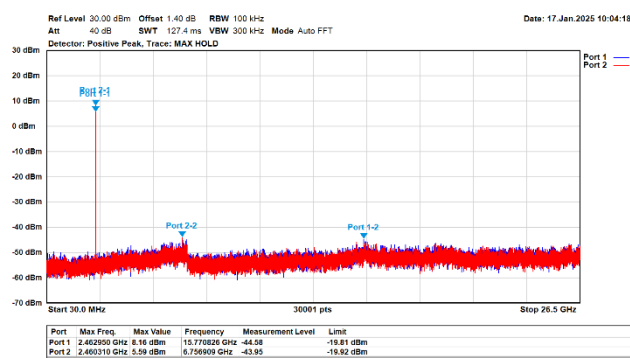


802.11g/20MHz/6M/2412MHz/Ch1 (Ref.)

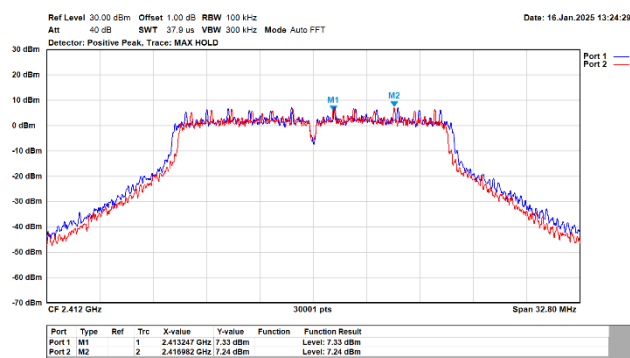


802.11g/20MHz/6M/2412MHz/Ch1

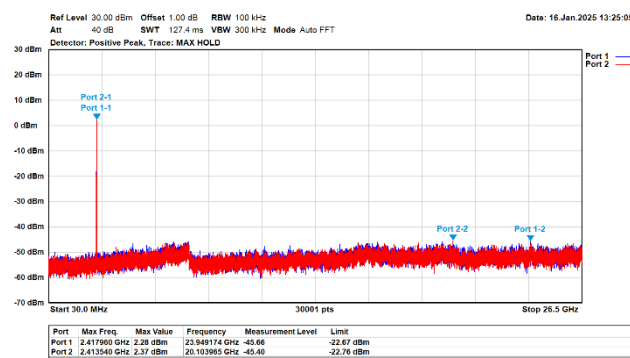


802.11g/20MHz/6M/2437MHz/Ch6 (Ref.)

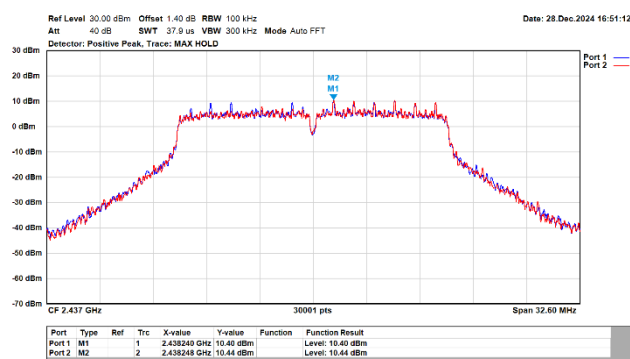


802.11g/20MHz/6M/2437MHz/Ch6

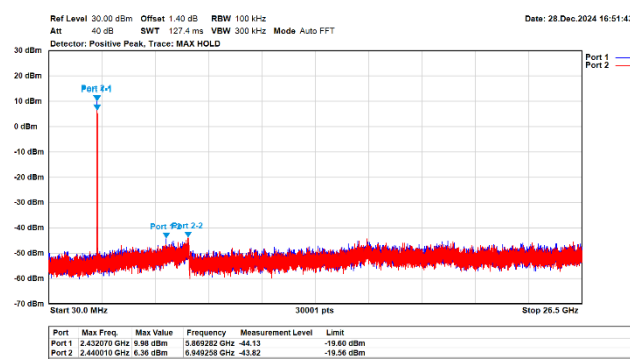


802.11g/20MHz/6M/2462MHz/Ch11 (Ref.)

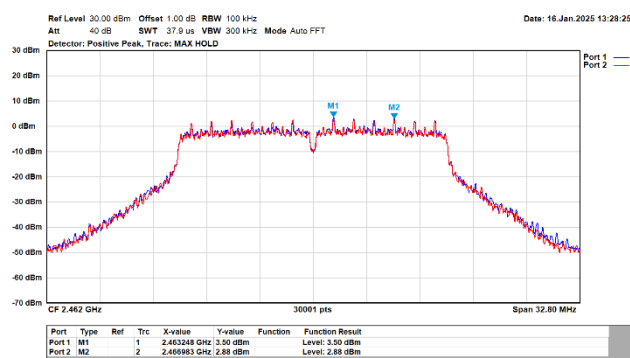


802.11g/20MHz/6M/2462MHz/Ch11

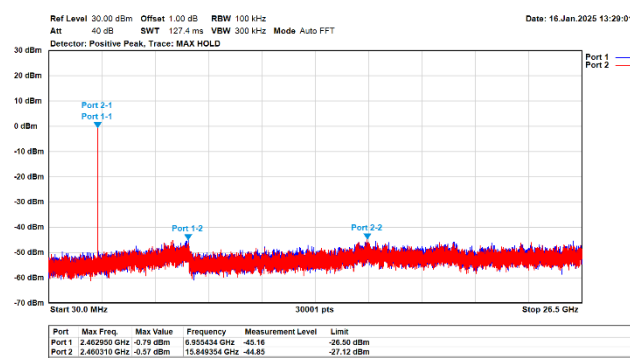


802.11ax/20MHz/MCS0/2412MHz/Ch1 (Ref.)

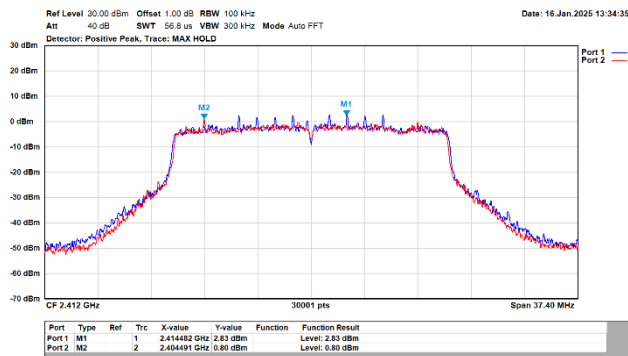


802.11ax/20MHz/MCS0/2412MHz/Ch1

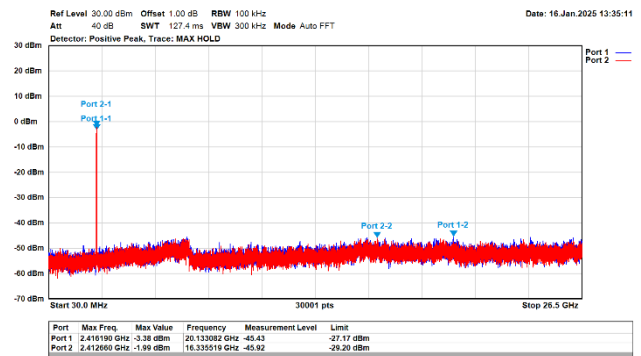


802.11ax/20MHz/MCS0/2437MHz/Ch6 (Ref.)

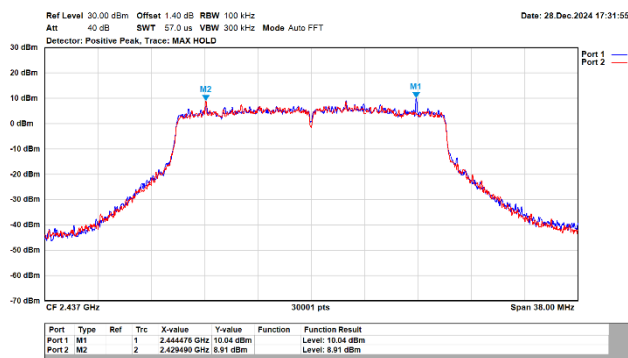


802.11ax/20MHz/MCS0/2437MHz/Ch6

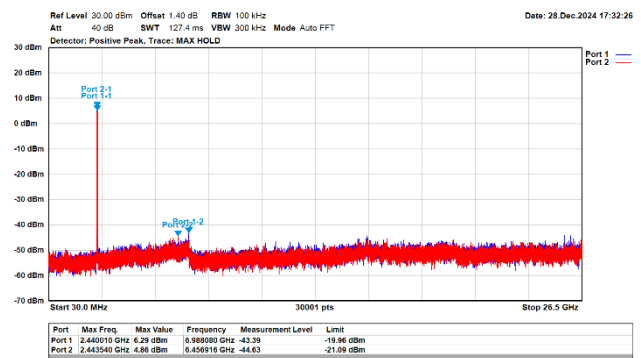


802.11ax/20MHz/MCS0/2462MHz/Ch11 (Ref.)

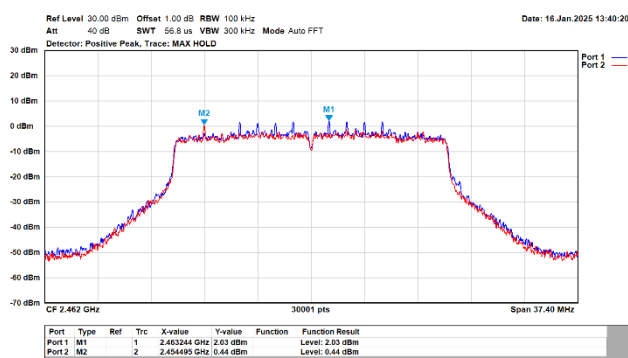


802.11ax/20MHz/MCS0/2462MHz/Ch11

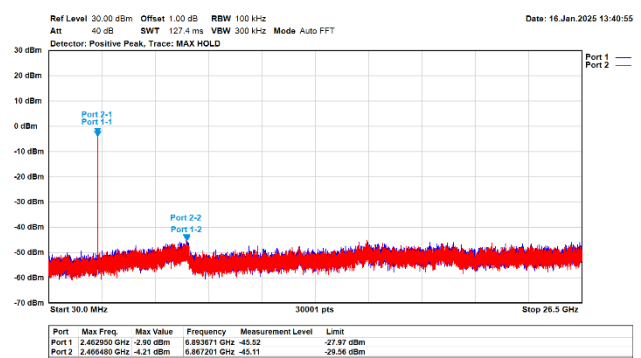


802.11ax/40MHz/MCS0/2422MHz/Ch3 (Ref.)

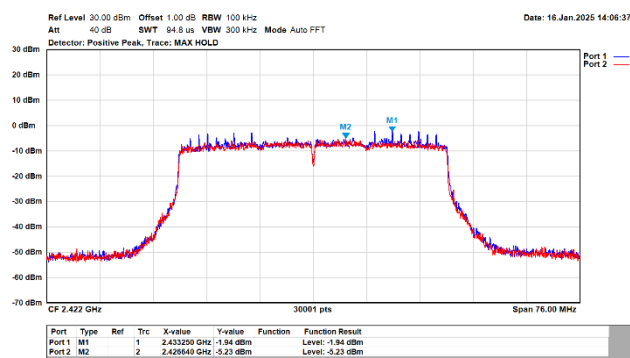


802.11ax/40MHz/MCS0/2422MHz/Ch3

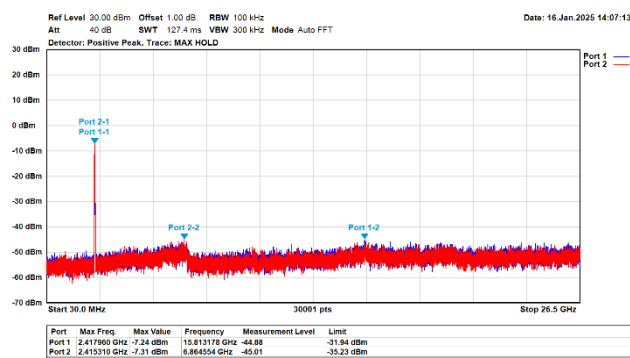


802.11ax/40MHz/MCS0/2437MHz/Ch6 (Ref.)

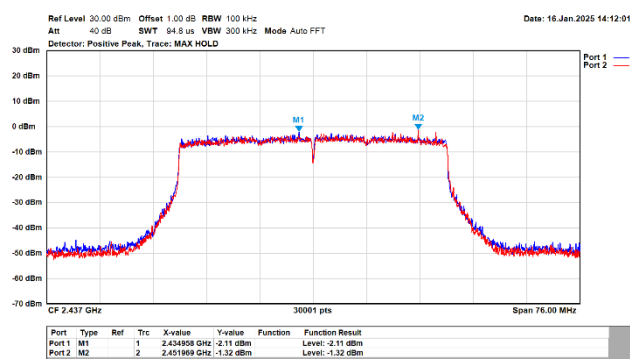


802.11ax/40MHz/MCS0/2437MHz/Ch6

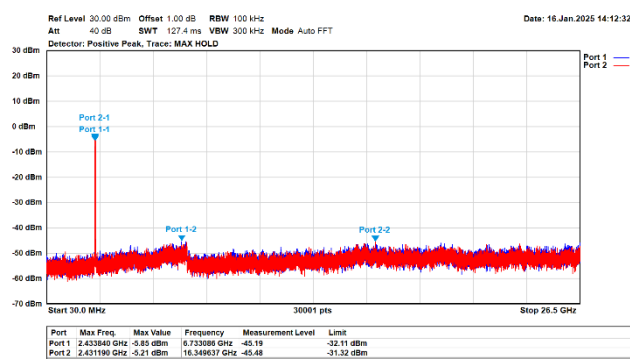


802.11ax/40MHz/MCS0/2452MHz/Ch9 (Ref.)

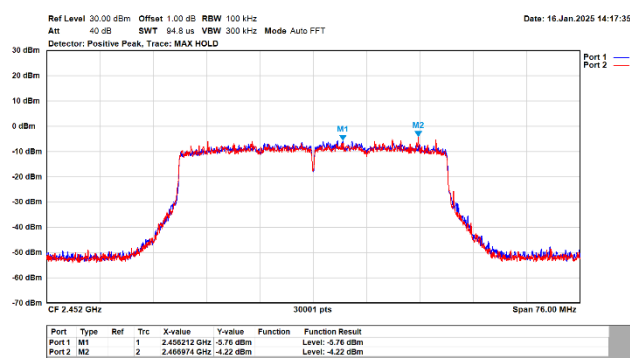


802.11ax/40MHz/MCS0/2452MHz/Ch9

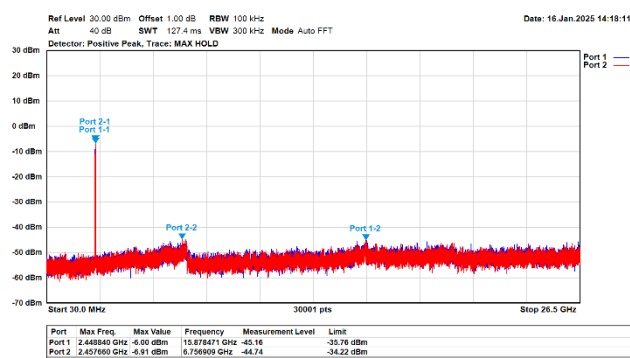


802.11b/20MHz/1M/2412MHz/Ch1(Band Edge)

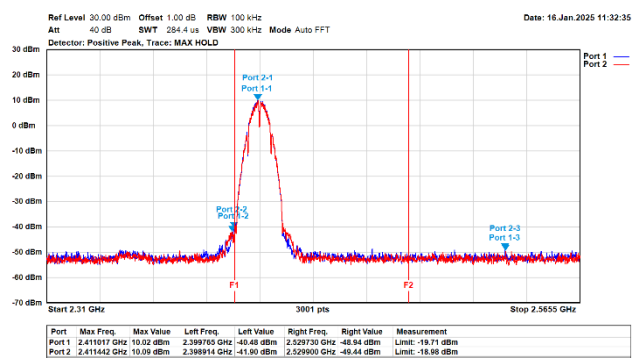


802.11b/20MHz/1M/2462MHz/Ch11(Band Edge)

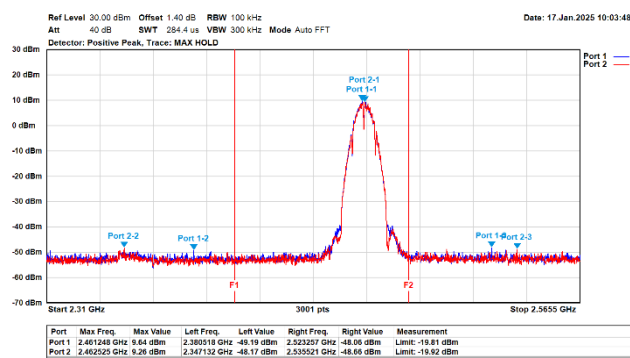


802.11g/20MHz/6M/2412MHz/Ch1(Band Edge)

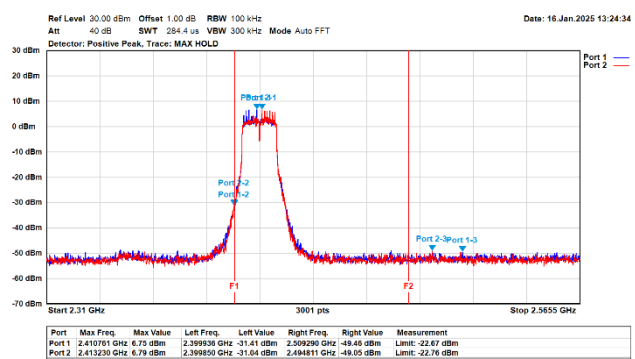


802.11g/20MHz/6M/2462MHz/Ch11(Band Edge)

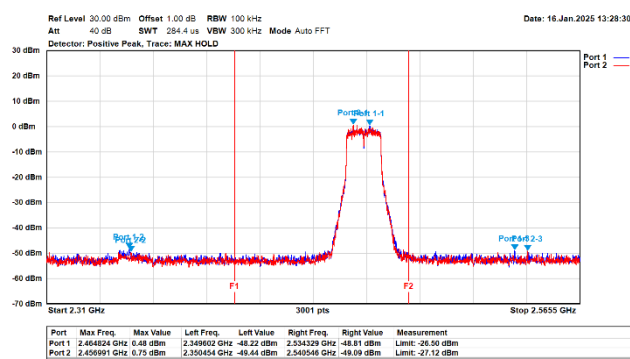


802.11ax/20MHz/MCS0/2412MHz/Ch1(Band Edge)

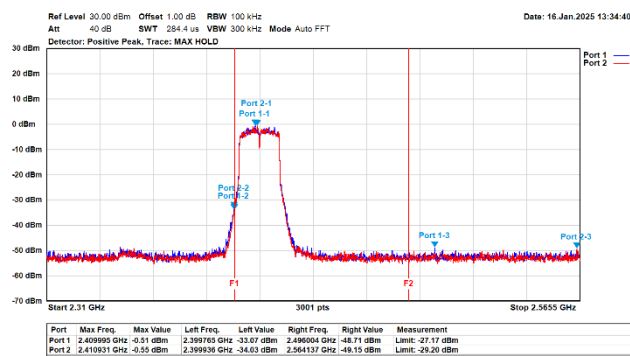


802.11ax/20MHz/MCS0/2462MHz/Ch11(Band Edge)

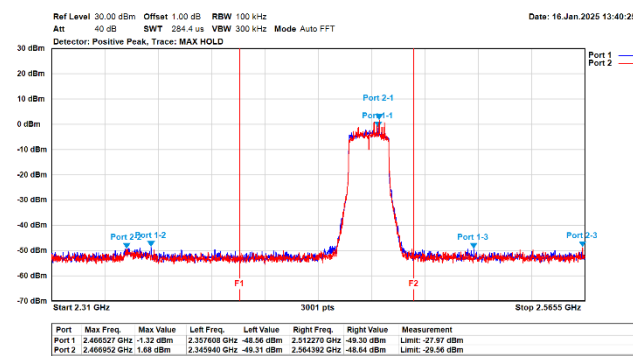

802.11ax/40MHz/MCS0/2422MHz/Ch3(Band Edge)

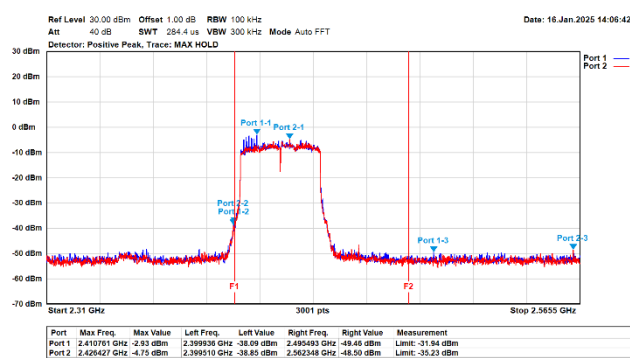


802.11ax/40MHz/MCS0/2452MHz/Ch9(Band Edge)

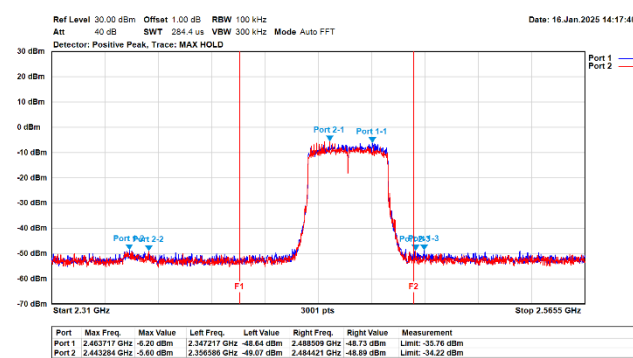

Appendix F. Test Result of Radiated Emission

Model No.: TAP-M310R-NPS-1P1R-US-CT-T

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Caster

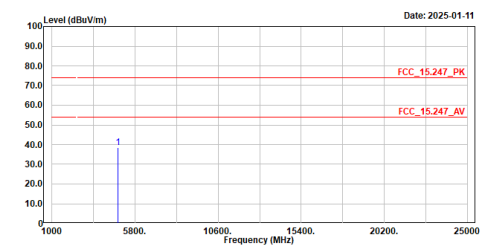


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.35	74.00	-35.65	45.58	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster

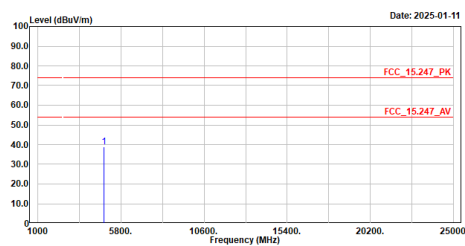


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.79	74.00	-35.21	46.02	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2437MHz
Test by :Caster

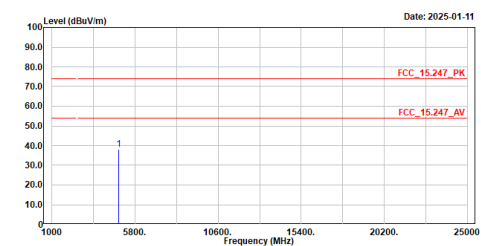


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.97	74.00	-36.03	44.92	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2437MHz
Test by :Caster

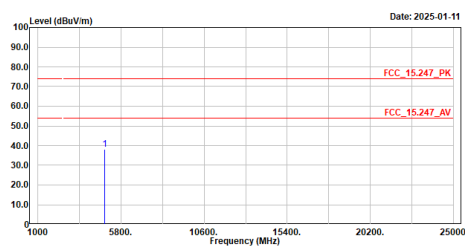


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.02	74.00	-35.98	44.97	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Caster

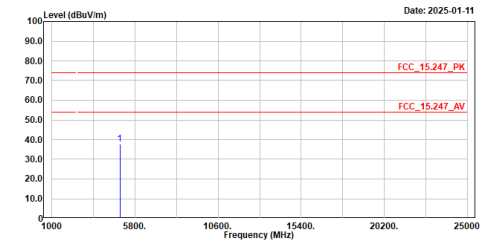

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.80	74.00	-36.20	44.48	-6.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Caster

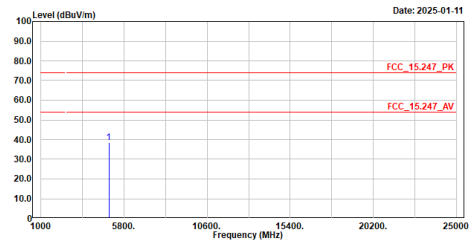

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.54	74.00	-35.46	45.22	-6.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

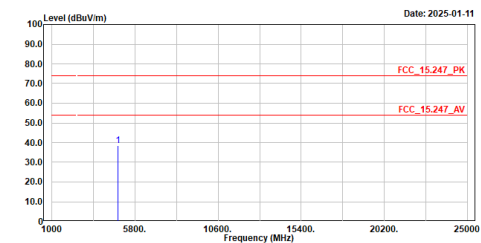

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.40	74.00	-35.60	45.63	-7.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

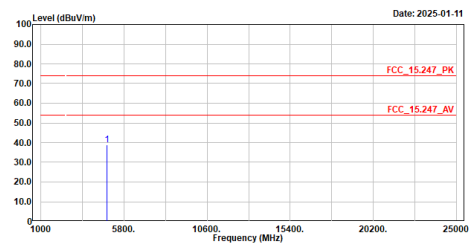

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.80	74.00	-35.20	46.03	-7.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Caster

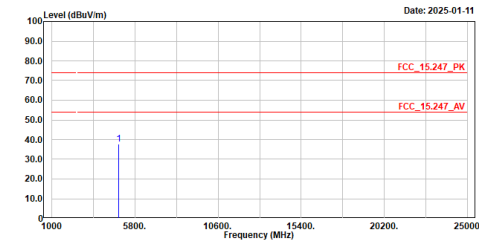

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.78	74.00	-36.22	44.73	-6.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Caster

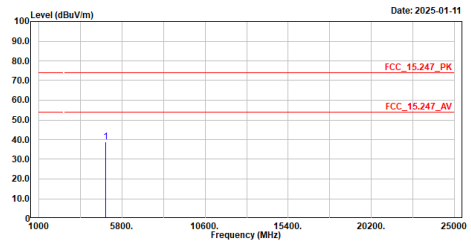

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.86	74.00	-35.14	45.81	-6.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

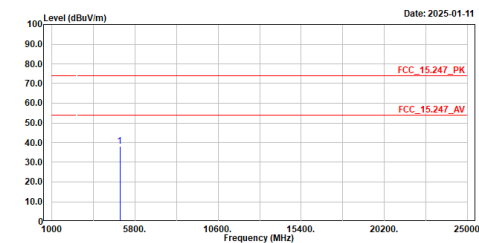

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.10	74.00	-35.90	44.78	-6.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

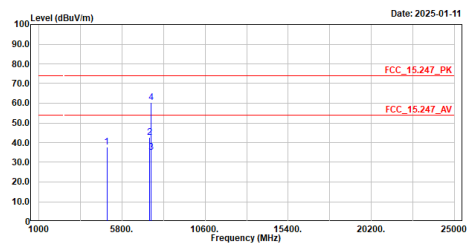

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.86	74.00	-36.14	44.54	-6.68	Peak
2	7386.000	42.81	74.00	-31.19	42.90	-0.09	Peak
3	7495.700	34.97	54.00	-19.03	35.15	-0.18	Average
4	7495.700	60.21	74.00	-13.79	60.39	-0.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Caster

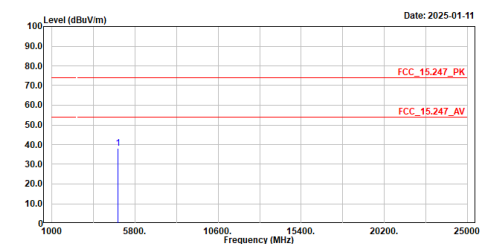


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.23	74.00	-35.77	45.46	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2412MHz
Test by :Caster

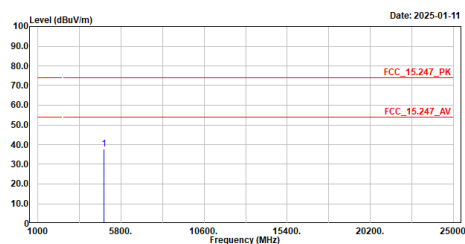


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.81	74.00	-36.19	45.04	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz
Test by :Caster

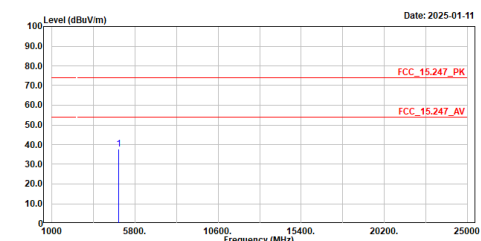


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.82	74.00	-36.18	44.77	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz
Test by :Caster

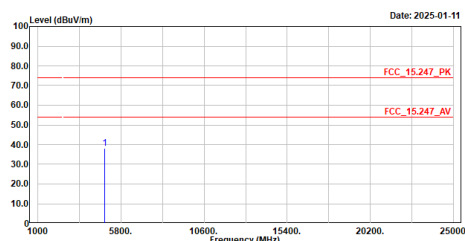


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.16	74.00	-35.84	45.11	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Caster

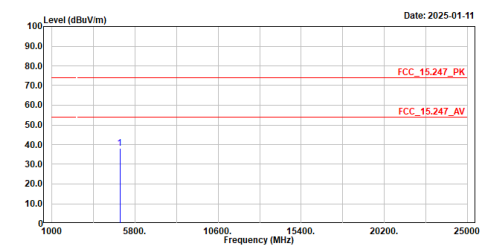


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.10	74.00	-35.90	44.78	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz
Test by :Caster

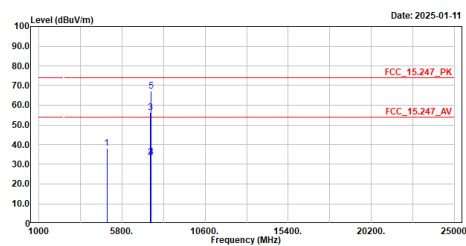


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.96	74.00	-36.04	44.64	-6.68	Peak
2	7454.900	33.75	54.00	-20.25	33.80	-0.05	Average
3	7454.900	56.40	74.00	-17.60	56.45	-0.05	Peak
4	7483.800	33.55	54.00	-20.45	33.70	-0.15	Average
5	7483.800	67.26	74.00	-6.74	67.41	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Caster

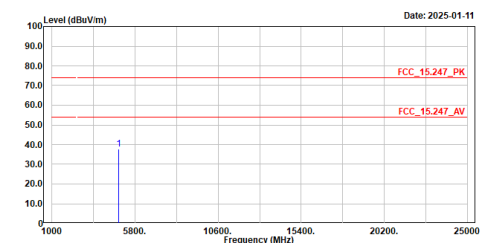


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	37.58	74.00	-36.42	44.73	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz
Test by :Caster

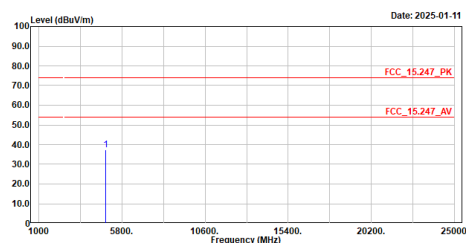


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	37.31	74.00	-36.69	44.46	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Caster

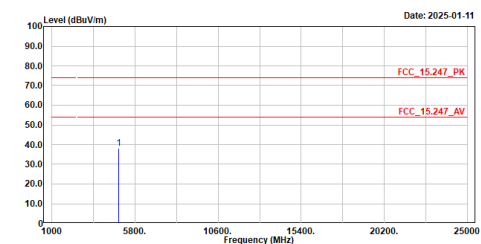


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.30	74.00	-35.70	45.25	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Caster

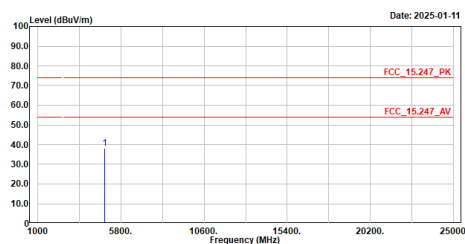


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.11	74.00	-35.89	45.06	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Caster

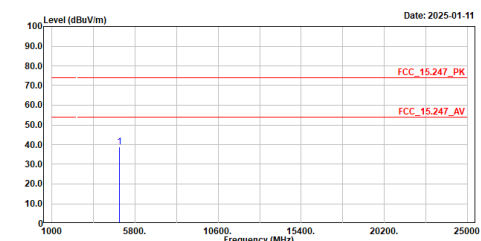


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	38.85	74.00	-35.15	45.58	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz
Test by :Caster

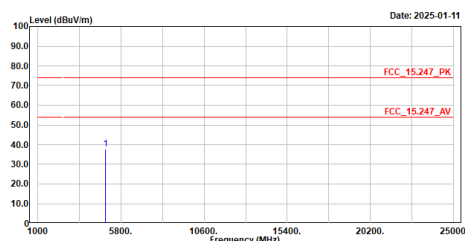


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	37.62	74.00	-36.38	44.35	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Peter

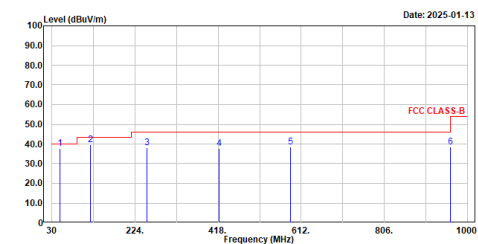


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.400	37.81	40.00	-2.19	61.20	-23.39	QP
2	120.210	39.54	43.50	-3.96	65.76	-26.22	QP
3	252.130	38.23	46.00	-7.77	63.13	-24.90	QP
4	419.940	37.57	46.00	-8.43	57.56	-19.99	QP
5	587.750	38.44	46.00	-7.56	54.33	-15.89	QP
6	960.230	38.46	54.00	-15.54	49.21	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Peter

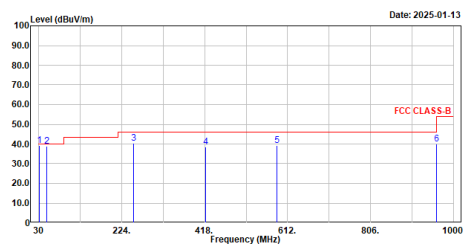


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	39.42	40.00	-0.58	64.48	-25.06	QP
2	49.400	38.84	40.00	-1.16	62.23	-23.39	QP
3	252.130	40.35	46.00	-5.65	65.25	-24.90	QP
4	419.940	38.47	46.00	-7.53	58.46	-19.99	QP
5	587.750	39.30	46.00	-6.70	55.19	-15.89	QP
6	960.230	40.06	54.00	-13.94	50.81	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Caster

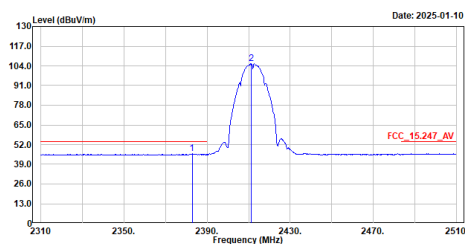


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2382.000	46.01	54.00	-7.99	15.65	30.36	Average
2	2411.200	105.64	-----	-----	75.35	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Caster

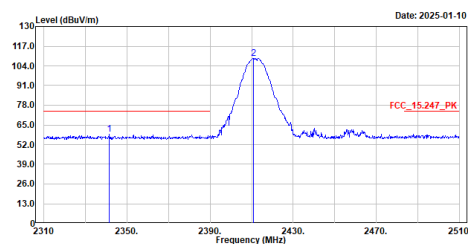


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2341.600	58.80	74.00	-15.20	28.47	30.33	Peak
2	2410.800	108.96	-----	-----	78.67	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster

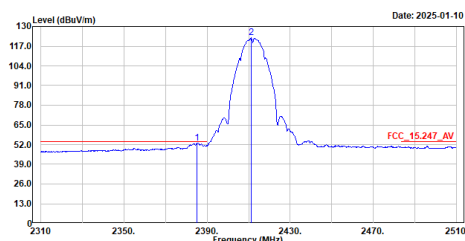


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.200	53.22	54.00	-0.78	22.85	30.37	Average
2	2411.200	122.43	-----	-----	92.14	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster

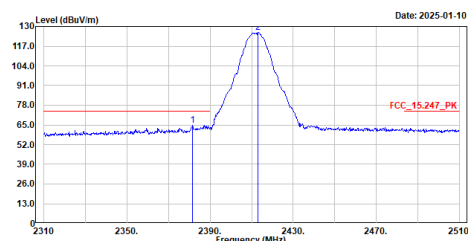


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2381.600	64.83	74.00	-9.17	34.47	30.36	Peak
2	2413.200	125.92	-----	-----	95.62	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2437MHz
Test by :Caster

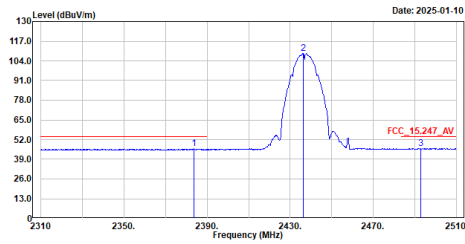

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2383.000	45.88	54.00	-8.12	15.51	30.37	Average
2	2436.200	108.94	54.00	54.94	78.74	30.20	Average
3	2492.000	46.10	54.00	-7.90	15.73	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2437MHz
Test by :Caster

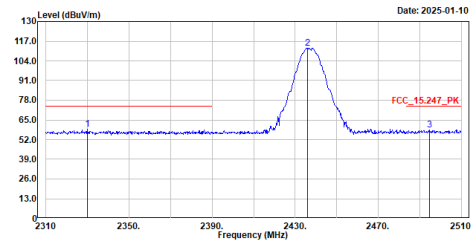

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2330.000	58.65	74.00	-15.35	28.23	30.42	Peak
2	2435.800	112.32	54.00	58.32	82.12	30.20	Peak
3	2494.800	58.18	74.00	-15.82	27.81	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2437MHz
Test by :Caster

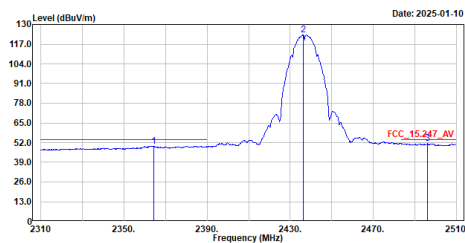

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2364.200	49.77	54.00	-4.23	19.47	30.30	Average
2	2436.200	123.21	54.00	69.21	93.01	30.20	Average
3	2496.000	51.49	54.00	-2.51	21.12	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2437MHz
Test by :Caster

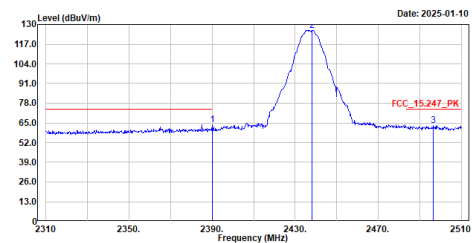

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	63.66	74.00	-10.34	33.29	30.37	Peak
2	2438.200	126.32	54.00	72.32	96.16	30.16	Peak
3	2496.600	63.48	74.00	-10.52	33.11	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Caster

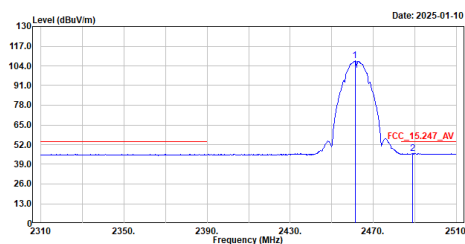


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	107.34	-----	-----	77.10	30.24	Average
2	2488.800	46.31	54.00	-7.69	15.95	30.36	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Caster

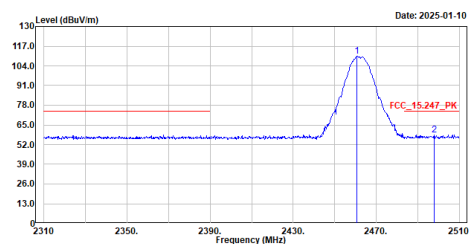


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.800	110.18	-----	-----	79.94	30.24	Peak
2	2498.000	58.60	74.00	-15.40	28.23	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Caster

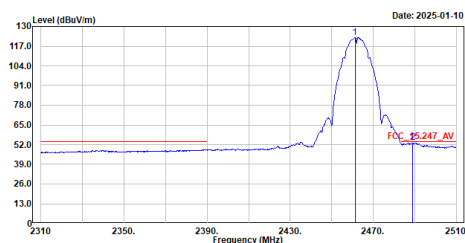


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	122.82	-----	-----	92.58	30.24	Average
2	2488.800	53.26	54.00	-0.74	22.90	30.36	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Caster

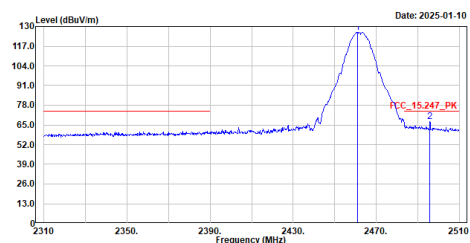


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.000	126.10	-----	-----	95.86	30.24	Peak
2	2495.800	67.32	74.00	-6.68	36.95	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

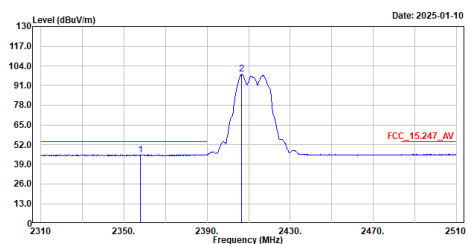


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2358.000	45.37	54.00	-8.63	15.03	30.34	Average
2	2406.600	98.36	-----	-----	68.07	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

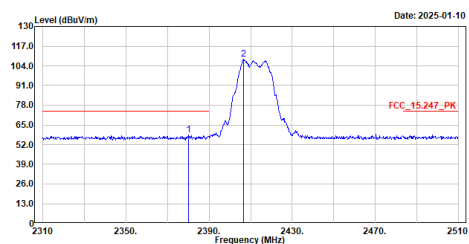


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2380.200	58.59	74.00	-15.41	28.23	30.36	Peak
2	2406.600	108.25	-----	-----	77.96	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2412MHz
Test by :Caster

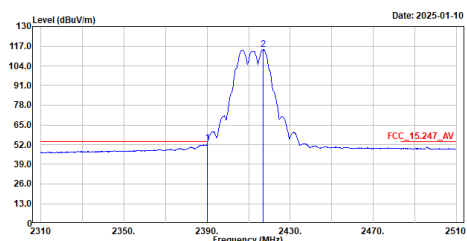


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	53.04	54.00	-0.96	22.67	30.37	Average
2	2417.000	114.66	-----	-----	84.36	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2412MHz
Test by :Caster

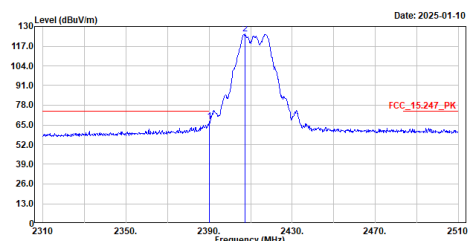


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	67.18	74.00	-6.82	36.81	30.37	Peak
2	2407.400	125.18	-----	-----	94.89	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Caster

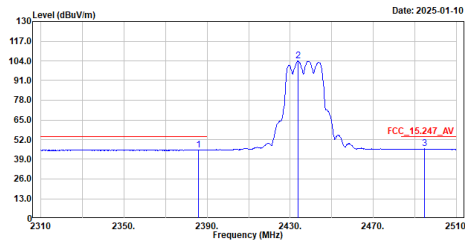


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.000	45.36	54.00	-8.64	14.99	30.37	Average
2	2433.000	103.78	54.00	49.78	73.54	30.24	Average
3	2494.000	45.88	54.00	-8.12	15.51	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Caster

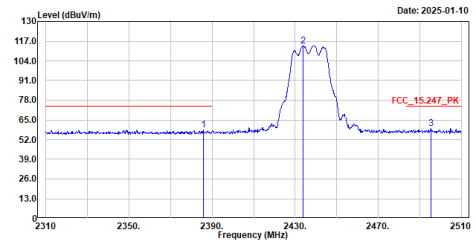


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.000	58.52	74.00	-15.48	28.15	30.37	Peak
2	2433.000	113.95	54.00	59.95	83.71	30.24	Peak
3	2495.000	59.45	74.00	-14.55	29.08	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Caster

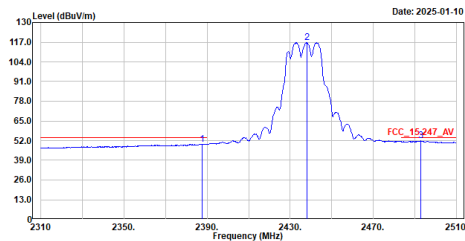


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.000	49.69	54.00	-4.31	19.32	30.37	Average
2	2438.000	116.82	54.00	62.82	86.66	30.16	Average
3	2492.000	51.79	54.00	-2.21	21.42	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Caster

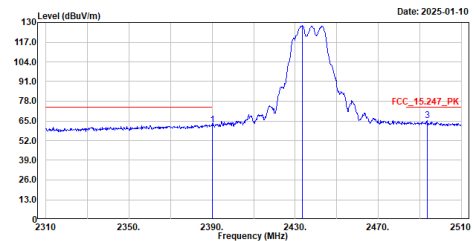


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	62.39	74.00	-11.61	32.02	30.37	Peak
2	2433.600	127.86	54.00	73.86	97.61	30.25	Peak
3	2493.600	65.22	74.00	-8.78	34.85	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

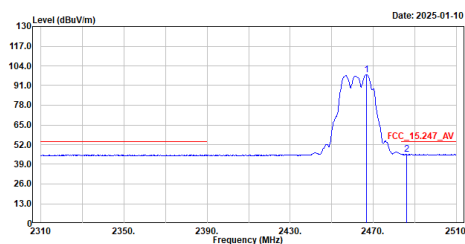


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2466.600	98.10	-----	-----	67.85	30.25	Average
2	2486.200	45.63	54.00	-8.37	15.31	30.32	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

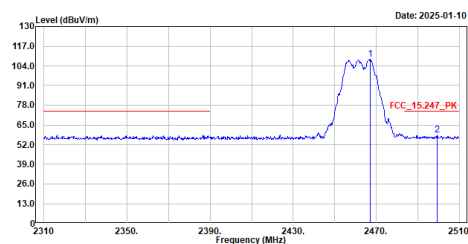


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2467.200	108.23	-----	-----	77.98	30.25	Peak
2	2499.400	58.53	74.00	-15.47	28.16	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

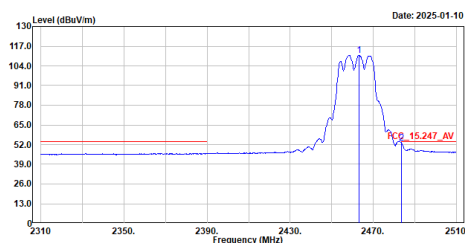


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.200	110.92	-----	-----	80.68	30.24	Average
2	2483.600	53.10	54.00	-0.90	22.80	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

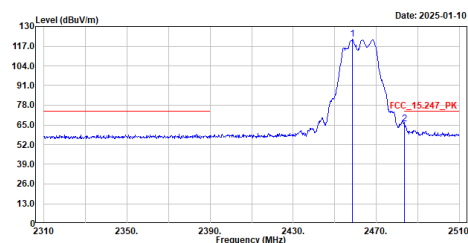


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2458.600	121.56	-----	-----	91.32	30.24	Peak
2	2483.600	65.50	74.00	-8.50	35.20	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Caster

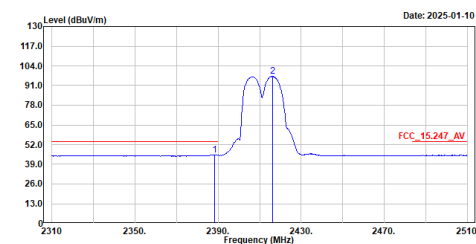


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.400	45.21	54.00	-8.79	14.84	30.37	Average
2	2416.400	97.15	-----	-----	66.85	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Caster

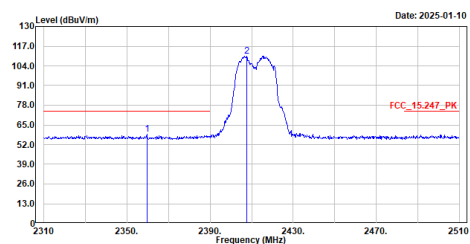


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2359.600	58.68	74.00	-15.32	28.34	30.34	Peak
2	2416.400	110.47	-----	-----	80.18	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Caster

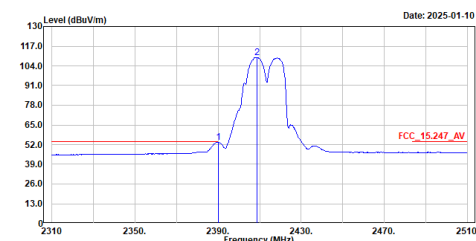


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.31	54.00	-0.69	22.94	30.37	Average
2	2416.400	109.55	-----	-----	79.26	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Caster

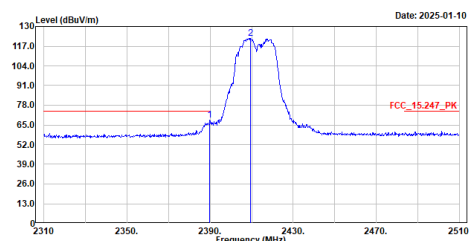


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.000	67.98	74.00	-6.02	37.61	30.37	Peak
2	2416.400	122.24	-----	-----	91.95	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz
Test by :Caster

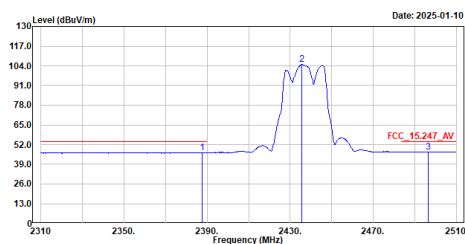


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.800	46.78	54.00	-7.22	16.41	30.37	Average
2	2435.600	104.94	54.00	-7.22	74.73	30.21	Average
3	2496.600	47.27	54.00	-6.73	16.90	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz
Test by :Caster

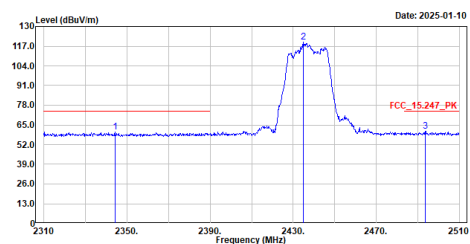


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2344.200	60.50	74.00	-13.50	30.17	30.33	Peak
2	2435.600	119.47	54.00	-13.50	89.25	30.22	Peak
3	2493.600	60.89	74.00	-13.11	30.52	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz
Test by :Caster

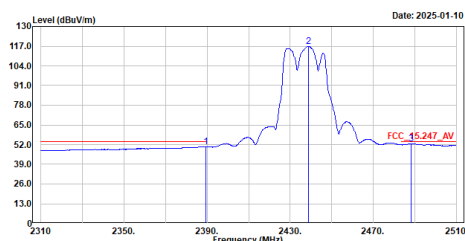


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	50.71	54.00	-3.29	20.34	30.37	Average
2	2438.800	116.96	54.00	-1.42	86.82	30.14	Average
3	2488.400	52.58	54.00	-1.42	22.23	30.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz
Test by :Caster

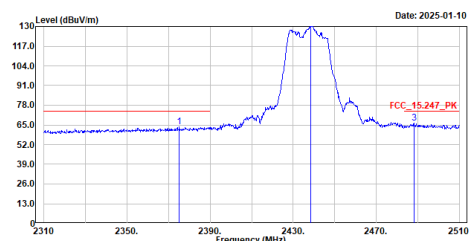


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2375.200	63.90	74.00	-10.10	33.59	30.31	Peak
2	2438.600	131.29	54.00	-7.86	101.14	30.15	Peak
3	2488.200	66.14	74.00	-7.86	35.79	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Caster

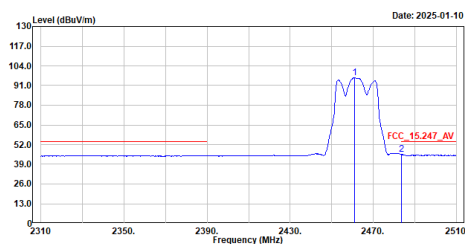


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	96.26	-----	-----	66.02	30.24	Average
2	2483.600	45.52	54.00	-8.48	15.22	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Caster

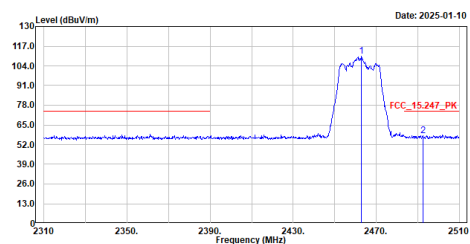


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	110.38	-----	-----	80.14	30.24	Peak
2	2492.400	57.88	74.00	-16.12	27.51	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz
Test by :Caster

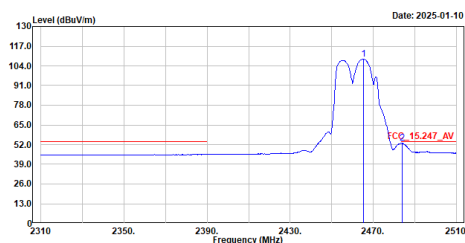


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2465.200	108.49	-----	-----	78.24	30.25	Average
2	2483.800	53.19	54.00	-0.81	22.89	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz
Test by :Caster

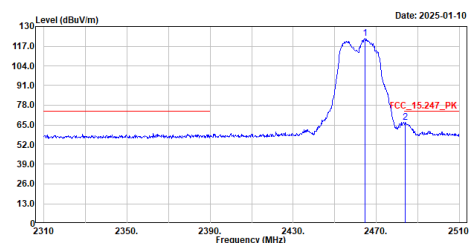


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.600	122.13	-----	-----	91.88	30.25	Peak
2	2483.800	66.75	74.00	-7.25	36.45	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Caster

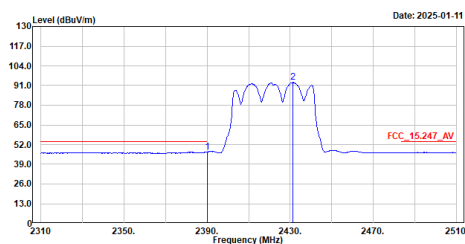


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.09	54.00	-6.91	16.72	30.37	Average
2	2431.400	93.06	-----	-----	62.77	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Caster

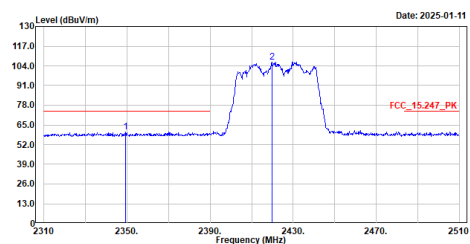


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2349.200	60.17	74.00	-13.83	29.04	30.33	Peak
2	2419.800	106.58	-----	-----	76.28	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz
Test by :Caster

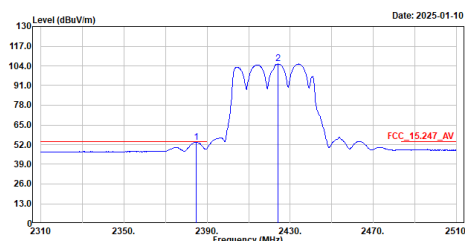


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2384.800	53.42	54.00	-0.58	23.05	30.37	Average
2	2424.200	105.30	-----	-----	74.99	30.31	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz
Test by :Caster

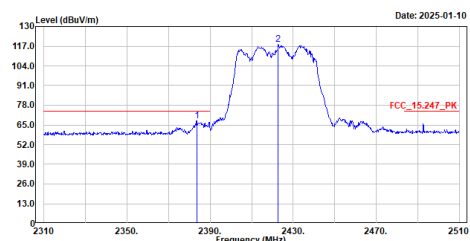


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2383.600	67.79	74.00	-6.21	37.43	30.36	Peak
2	2422.800	118.25	-----	-----	87.94	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Caster

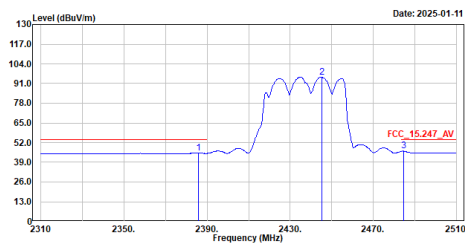


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.000	45.19	54.00	-8.81	14.82	30.37	Average
2	2445.400	95.15	54.00	41.15	64.97	30.18	Average
3	2484.600	46.46	54.00	-7.54	16.15	30.31	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Caster

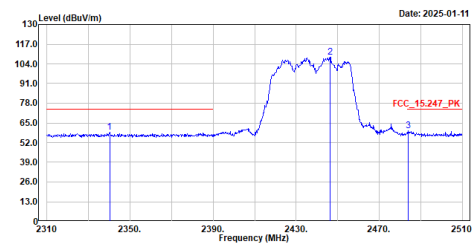


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2340.200	50.70	74.00	-23.30	28.37	30.33	Peak
2	2446.200	108.59	74.00	34.59	78.40	30.19	Peak
3	2484.000	59.68	74.00	-14.32	29.38	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Caster

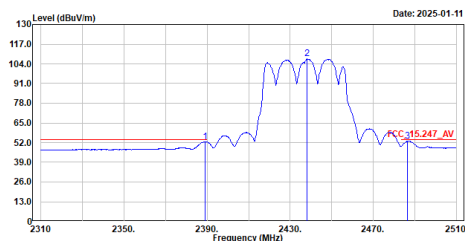


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	52.65	54.00	-1.35	22.28	30.37	Average
2	2438.000	107.22	54.00	53.22	77.06	30.16	Average
3	2486.600	53.08	54.00	-0.92	22.75	30.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Caster

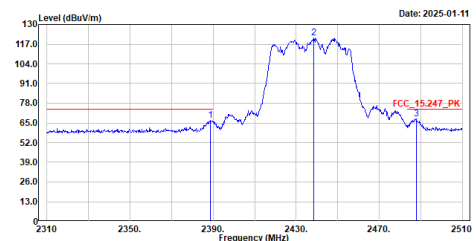


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	66.49	74.00	-7.51	36.12	30.37	Peak
2	2438.600	121.36	74.00	47.36	91.21	30.15	Peak
3	2487.800	67.85	74.00	-6.15	37.50	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Caster

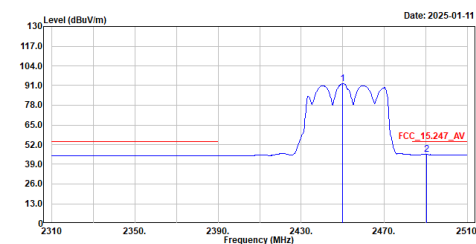


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.000	92.35	-----	-----	62.12	30.23	Average
2	2490.400	45.68	54.00	-8.32	15.31	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Caster

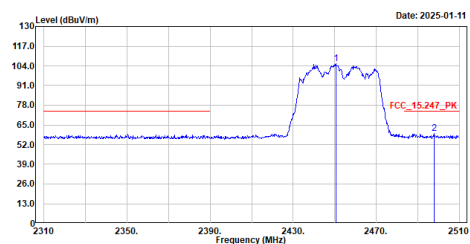


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.600	105.63	-----	-----	75.40	30.23	Peak
2	2497.800	59.53	74.00	-14.47	29.16	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz
Test by :Caster

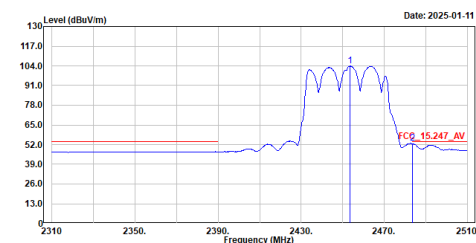


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.600	103.82	-----	-----	73.58	30.24	Average
2	2483.600	53.07	54.00	-0.93	22.77	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz
Test by :Caster

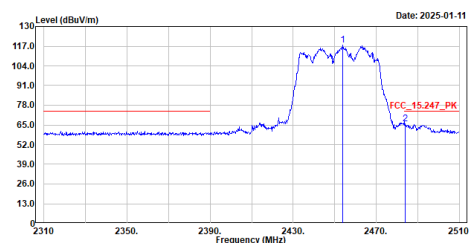


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.000	117.59	-----	-----	87.35	30.24	Peak
2	2483.800	65.84	74.00	-8.16	35.54	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Model No.: TAP-M310R-NPS-1R-US-CT-T

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Peter

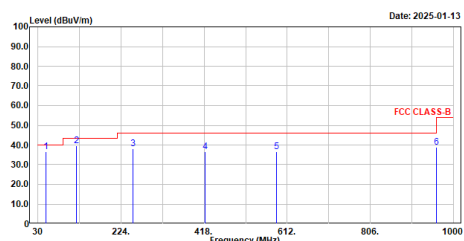


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.430	36.64	40.00	-3.36	59.98	-23.34	QP
2	120.210	39.45	43.50	-4.05	65.67	-26.22	QP
3	252.130	37.94	46.00	-8.06	62.84	-24.90	QP
4	419.940	36.52	46.00	-9.48	56.51	-19.99	QP
5	587.750	36.64	46.00	-9.36	52.53	-15.89	QP
6	960.230	38.87	54.00	-15.13	49.62	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Peter

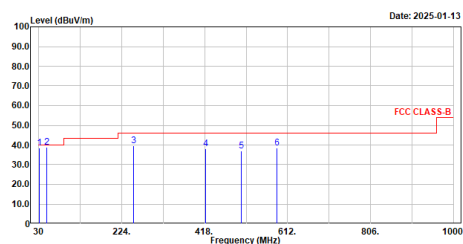

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	38.51	40.00	-1.49	63.57	-25.06	QP
2	49.400	38.70	40.00	-1.30	62.09	-23.39	QP
3	252.130	39.77	46.00	-6.23	64.67	-24.90	QP
4	419.940	38.03	46.00	-7.97	58.02	-19.99	QP
5	584.330	37.14	46.00	-8.86	55.08	-17.94	QP
6	587.750	38.64	46.00	-7.36	54.53	-15.89	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix G. Test Result of Radiated Emission Co-location

Model No.: TAP-M310R-NPS-1P1R-US-CT-T
Antenna: ANT-WDB-PNF-1011


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Rock

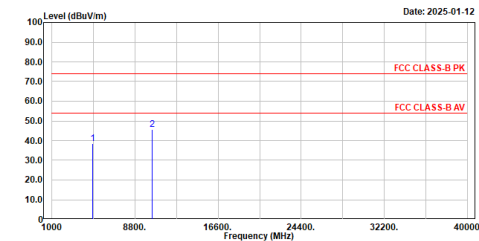

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	38.57	74.00	-35.43	45.72	-7.15	Peak
2	10420.000	45.49	74.00	-28.51	42.63	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Rock

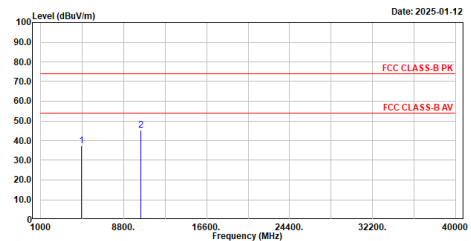

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	37.45	74.00	-36.55	44.60	-7.15	Peak
2	10420.000	45.30	74.00	-28.70	42.44	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

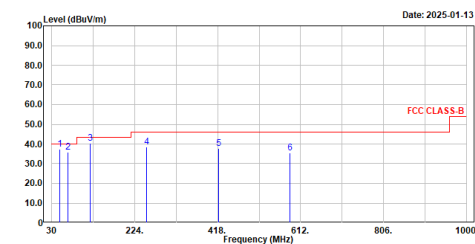

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.400	37.21	40.00	-2.79	60.60	-23.39	QP
2	67.830	35.77	40.00	-4.23	61.61	-25.84	QP
3	120.210	40.24	43.50	-3.26	66.46	-26.22	QP
4	252.130	38.59	46.00	-7.41	63.49	-24.90	QP
5	419.940	37.63	46.00	-8.37	57.62	-19.99	QP
6	587.750	35.35	46.00	-10.65	51.24	-15.89	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

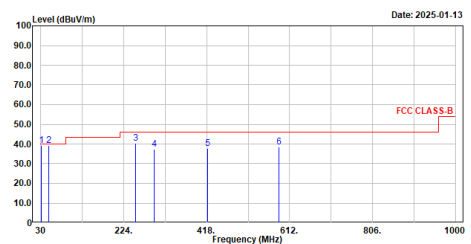


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	39.43	40.00	-0.57	64.49	-25.06	QP
2	49.400	39.23	40.00	-0.77	62.62	-23.39	QP
3	252.130	40.25	46.00	-5.75	65.15	-24.90	QP
4	294.810	37.39	46.00	-8.61	60.67	-23.28	QP
5	419.940	37.68	46.00	-8.32	57.67	-19.99	QP
6	587.750	38.49	46.00	-7.51	54.38	-15.89	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Model No.: TAP-M310R-NPS-1R-US-CT-T
Antenna: ANT-WDB-PNF-1011

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

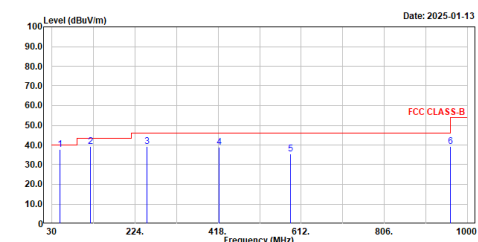


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.430	37.56	40.00	-2.44	60.90	-23.34	QP
2	120.210	39.30	43.50	-4.20	65.52	-26.22	QP
3	252.130	39.12	46.00	-6.88	64.02	-24.90	QP
4	419.940	38.82	46.00	-7.18	58.81	-19.99	QP
5	587.750	35.58	46.00	-10.42	51.47	-15.89	QP
6	960.230	39.20	54.00	-14.80	49.95	-18.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

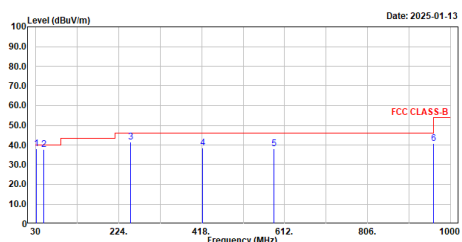

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.970	38.19	40.00	-1.81	63.25	-25.06	QP
2	48.430	37.91	40.00	-2.09	61.25	-23.34	QP
3	252.130	41.62	46.00	-4.38	66.52	-24.90	QP
4	419.940	38.47	46.00	-7.53	58.46	-19.99	QP
5	587.750	37.95	46.00	-8.05	53.84	-15.89	QP
6	960.230	40.66	54.00	-13.34	51.41	-18.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.