



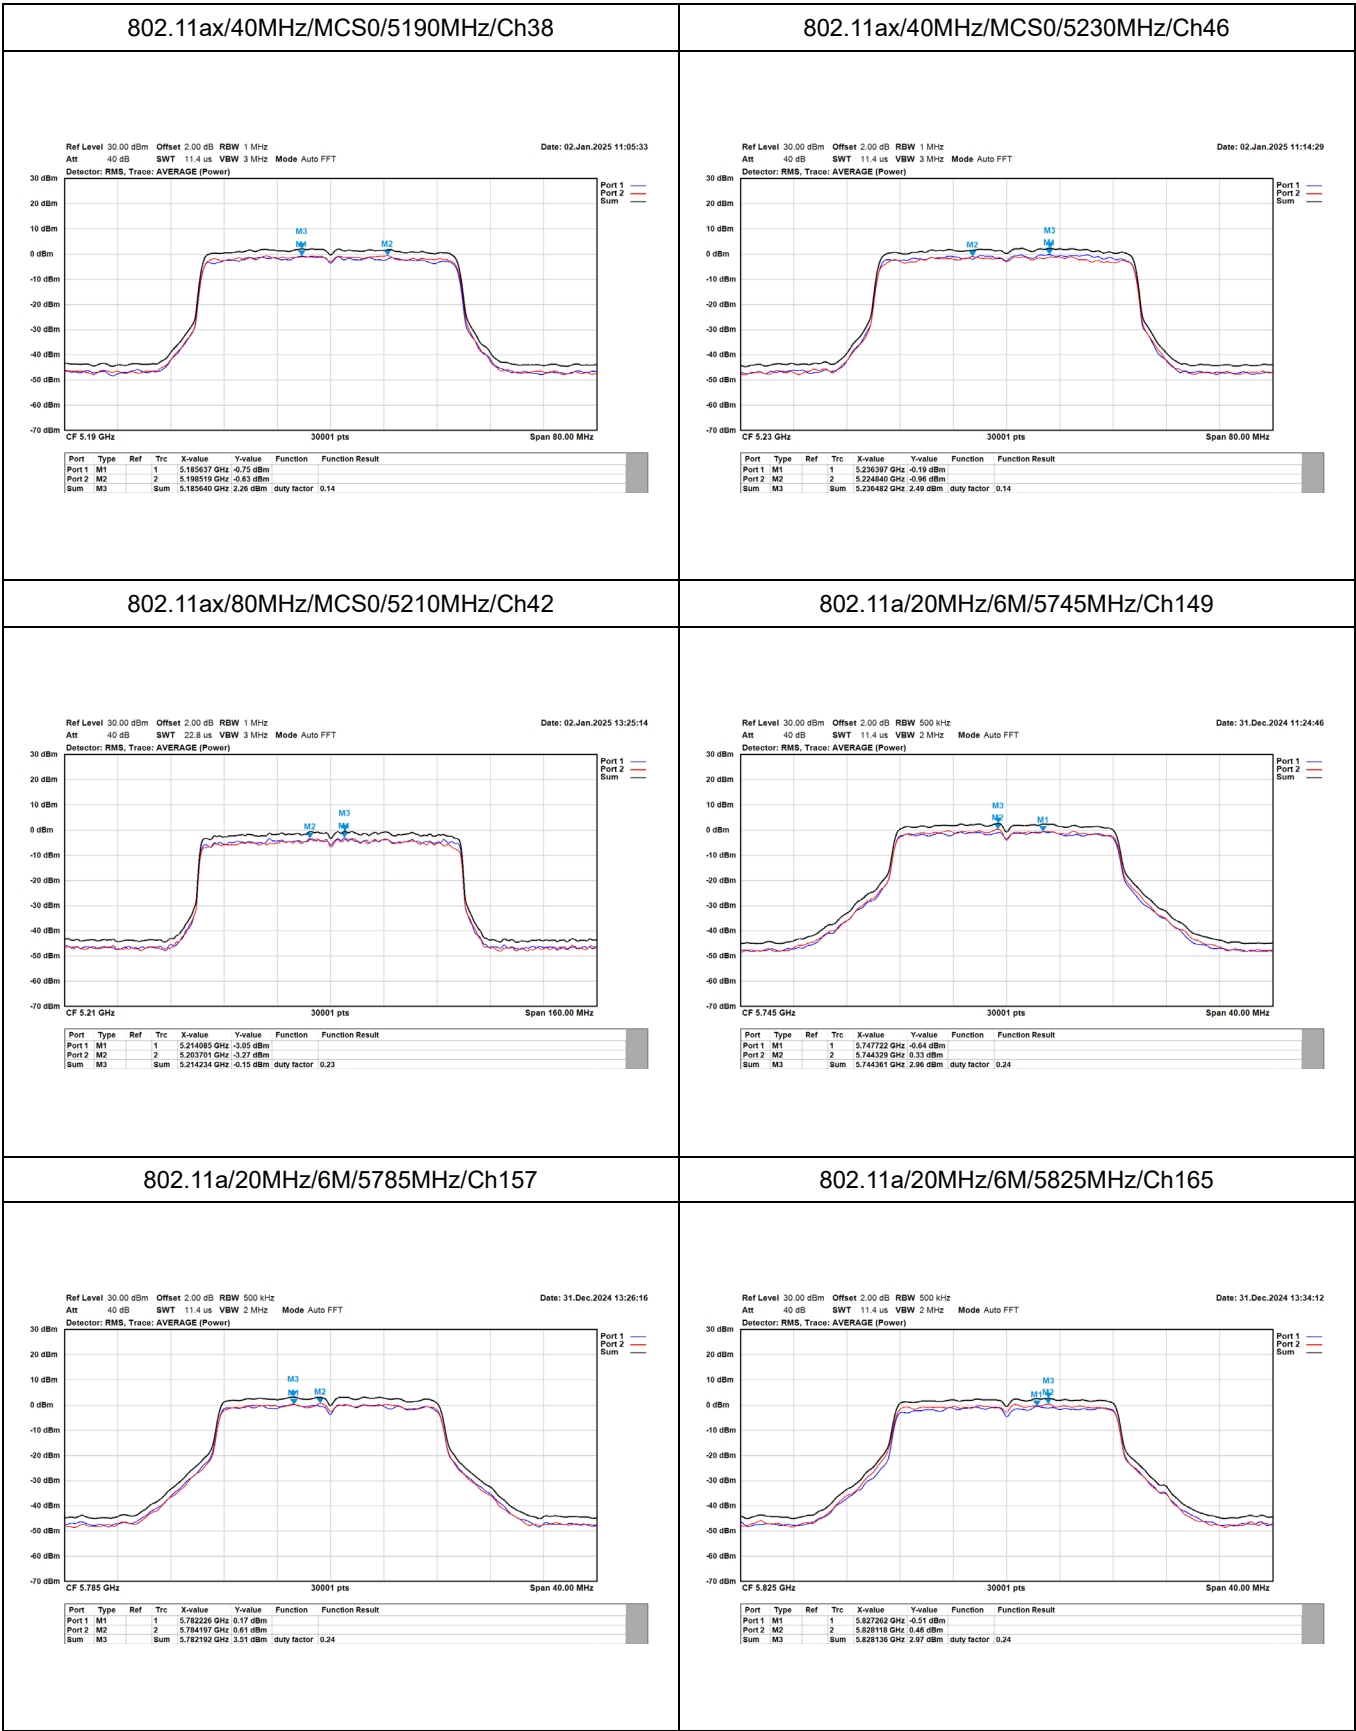

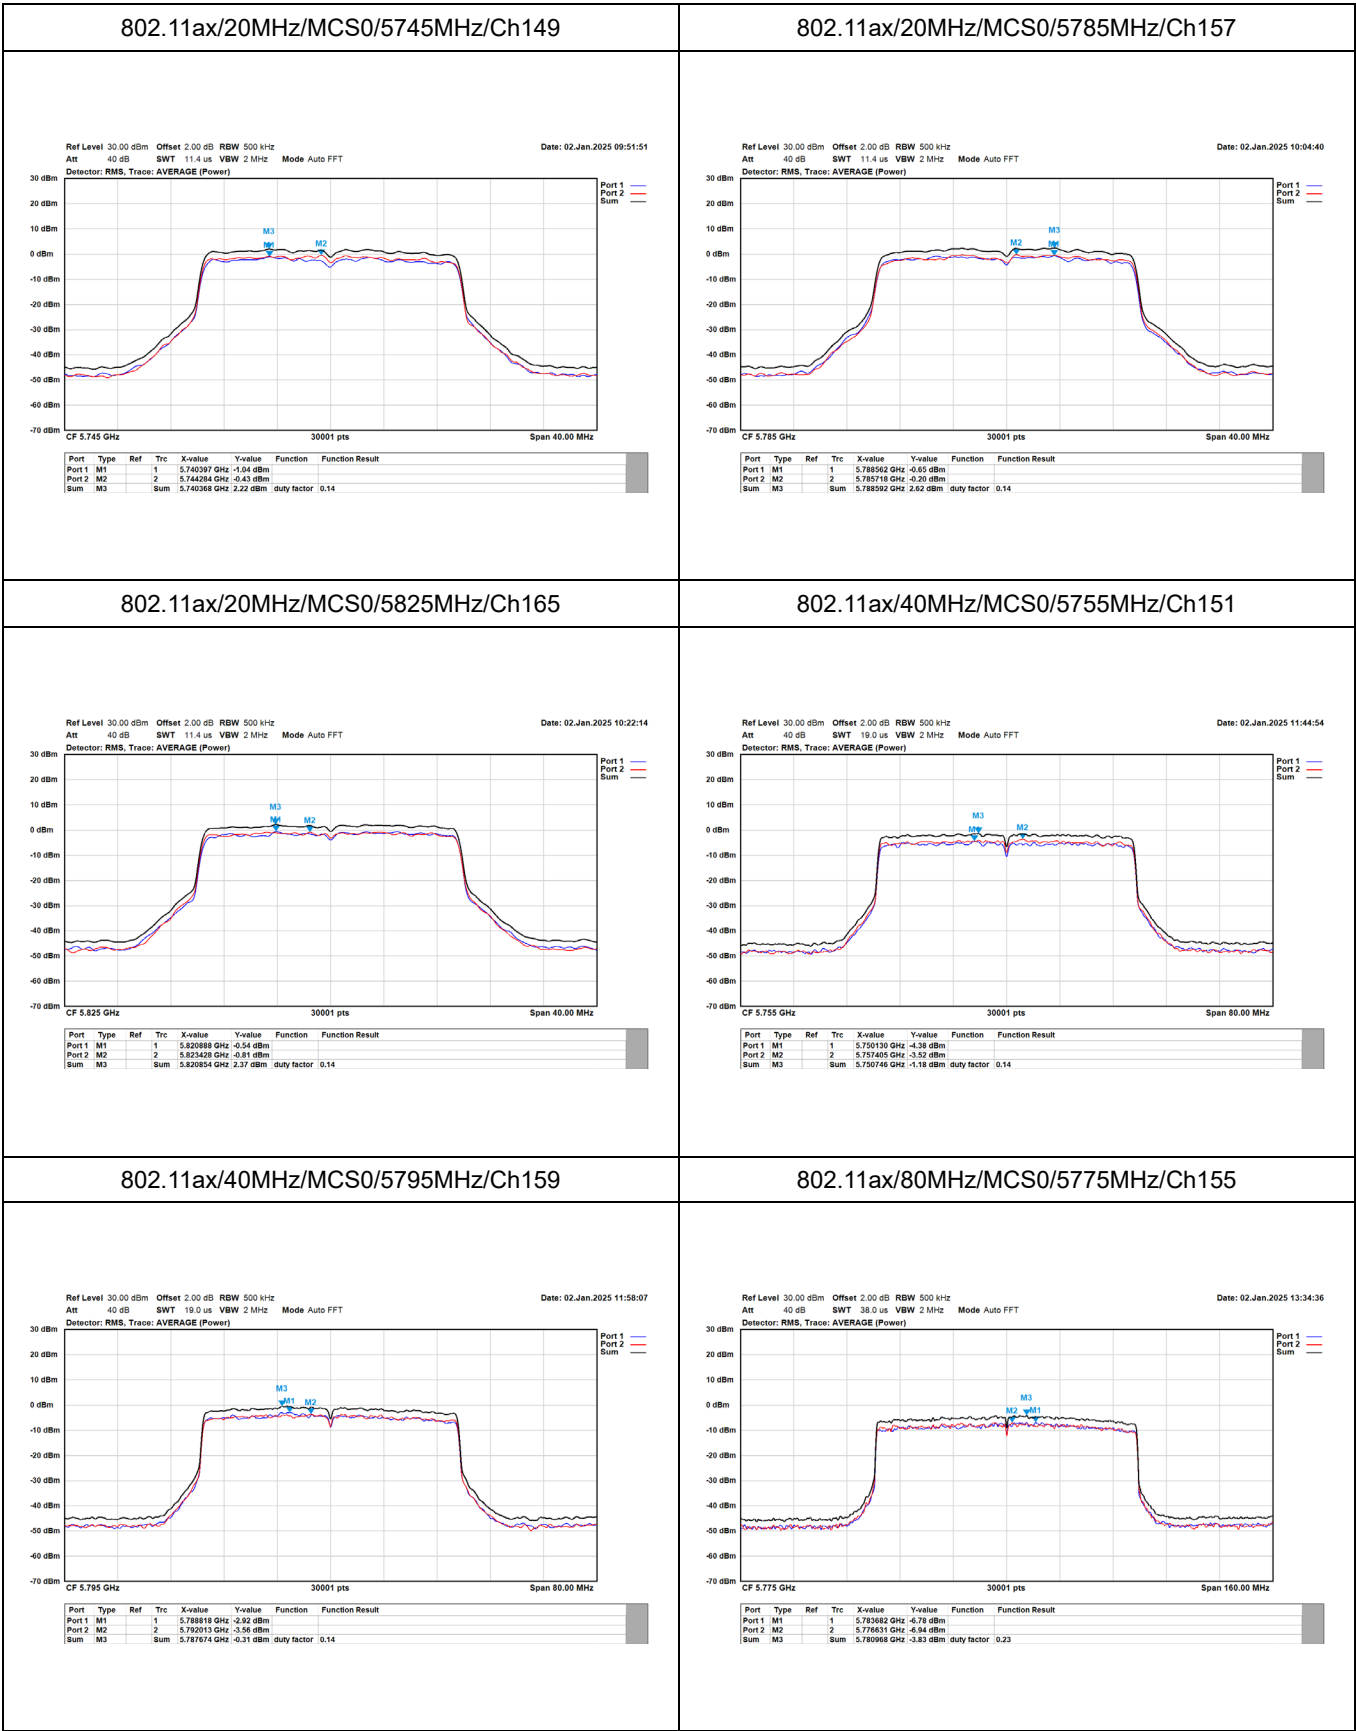


Slave mode


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11a (20MHz)	5180	-5.68	-6.21	-2.59	-2.39	Pass
	5220	-5.96	-5.74	-2.87	-2.39	Pass
	5240	-6.03	-5.87	-2.72	-2.39	Pass
802.11ax (20MHz)	5180	-5.81	-5.85	-2.75	-2.39	Pass
	5220	-6.10	-5.67	-2.78	-2.39	Pass
	5240	-5.57	-5.38	-2.52	-2.39	Pass
802.11ax (40MHz)	5190	-4.86	-5.51	-2.43	-2.39	Pass
	5230	-6.49	-6.40	-3.61	-2.39	Pass
802.11ax (80MHz)	5210	-9.65	-8.34	-6.23	-2.39	Pass


Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11a (20MHz)	5745	-0.64	0.33	2.96	16.05	Pass
	5785	0.17	0.61	3.51	16.05	Pass
	5825	-0.51	0.46	2.97	16.05	Pass
802.11ax (20MHz)	5745	-1.04	-0.43	2.22	16.05	Pass
	5785	-0.65	-0.20	2.62	16.05	Pass
	5825	-0.54	-0.81	2.37	16.05	Pass
802.11ax (40MHz)	5755	-4.38	-3.52	-1.18	16.05	Pass
	5795	-2.92	-3.56	-0.31	16.05	Pass
802.11ax (80MHz)	5775	-6.78	-6.94	-3.83	16.05	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

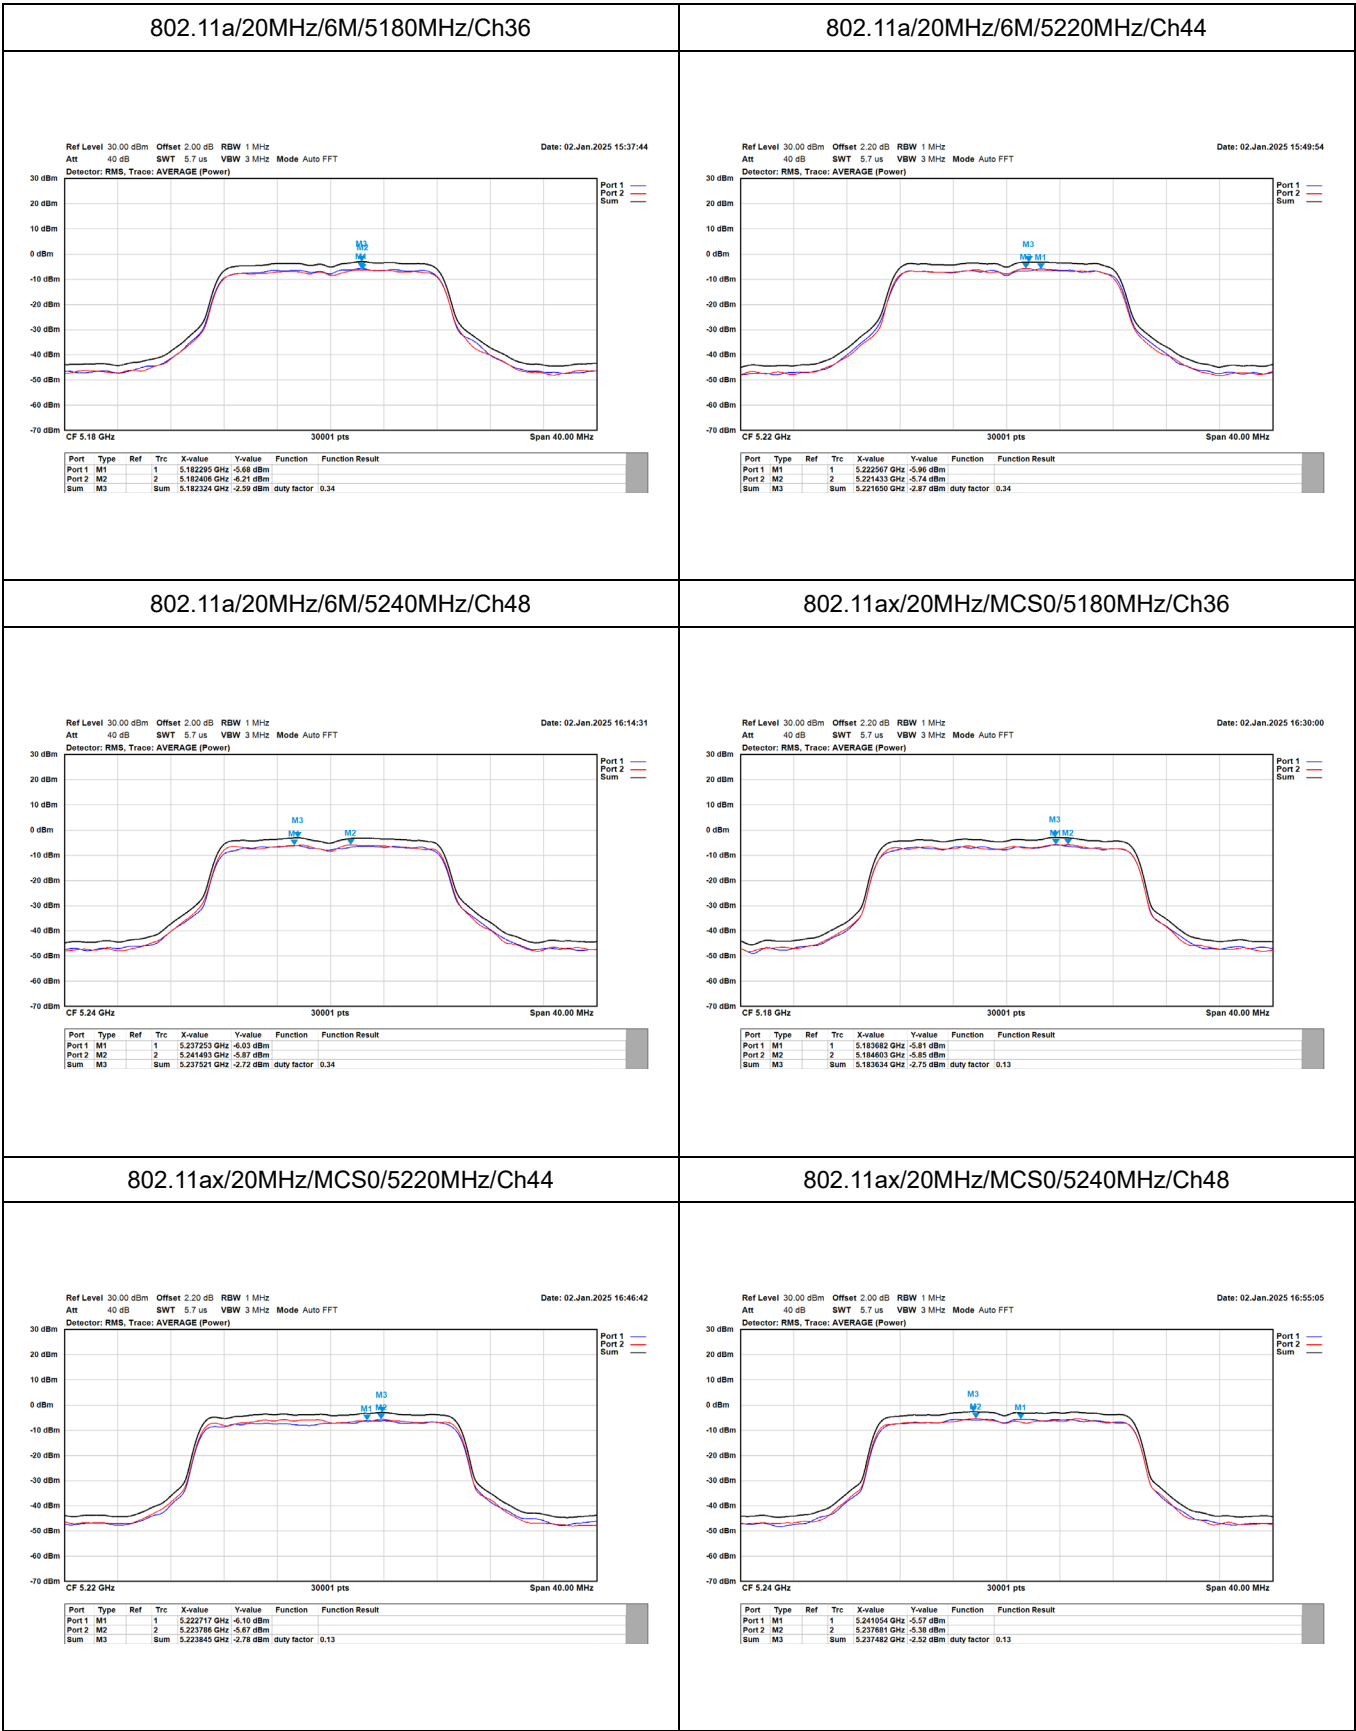

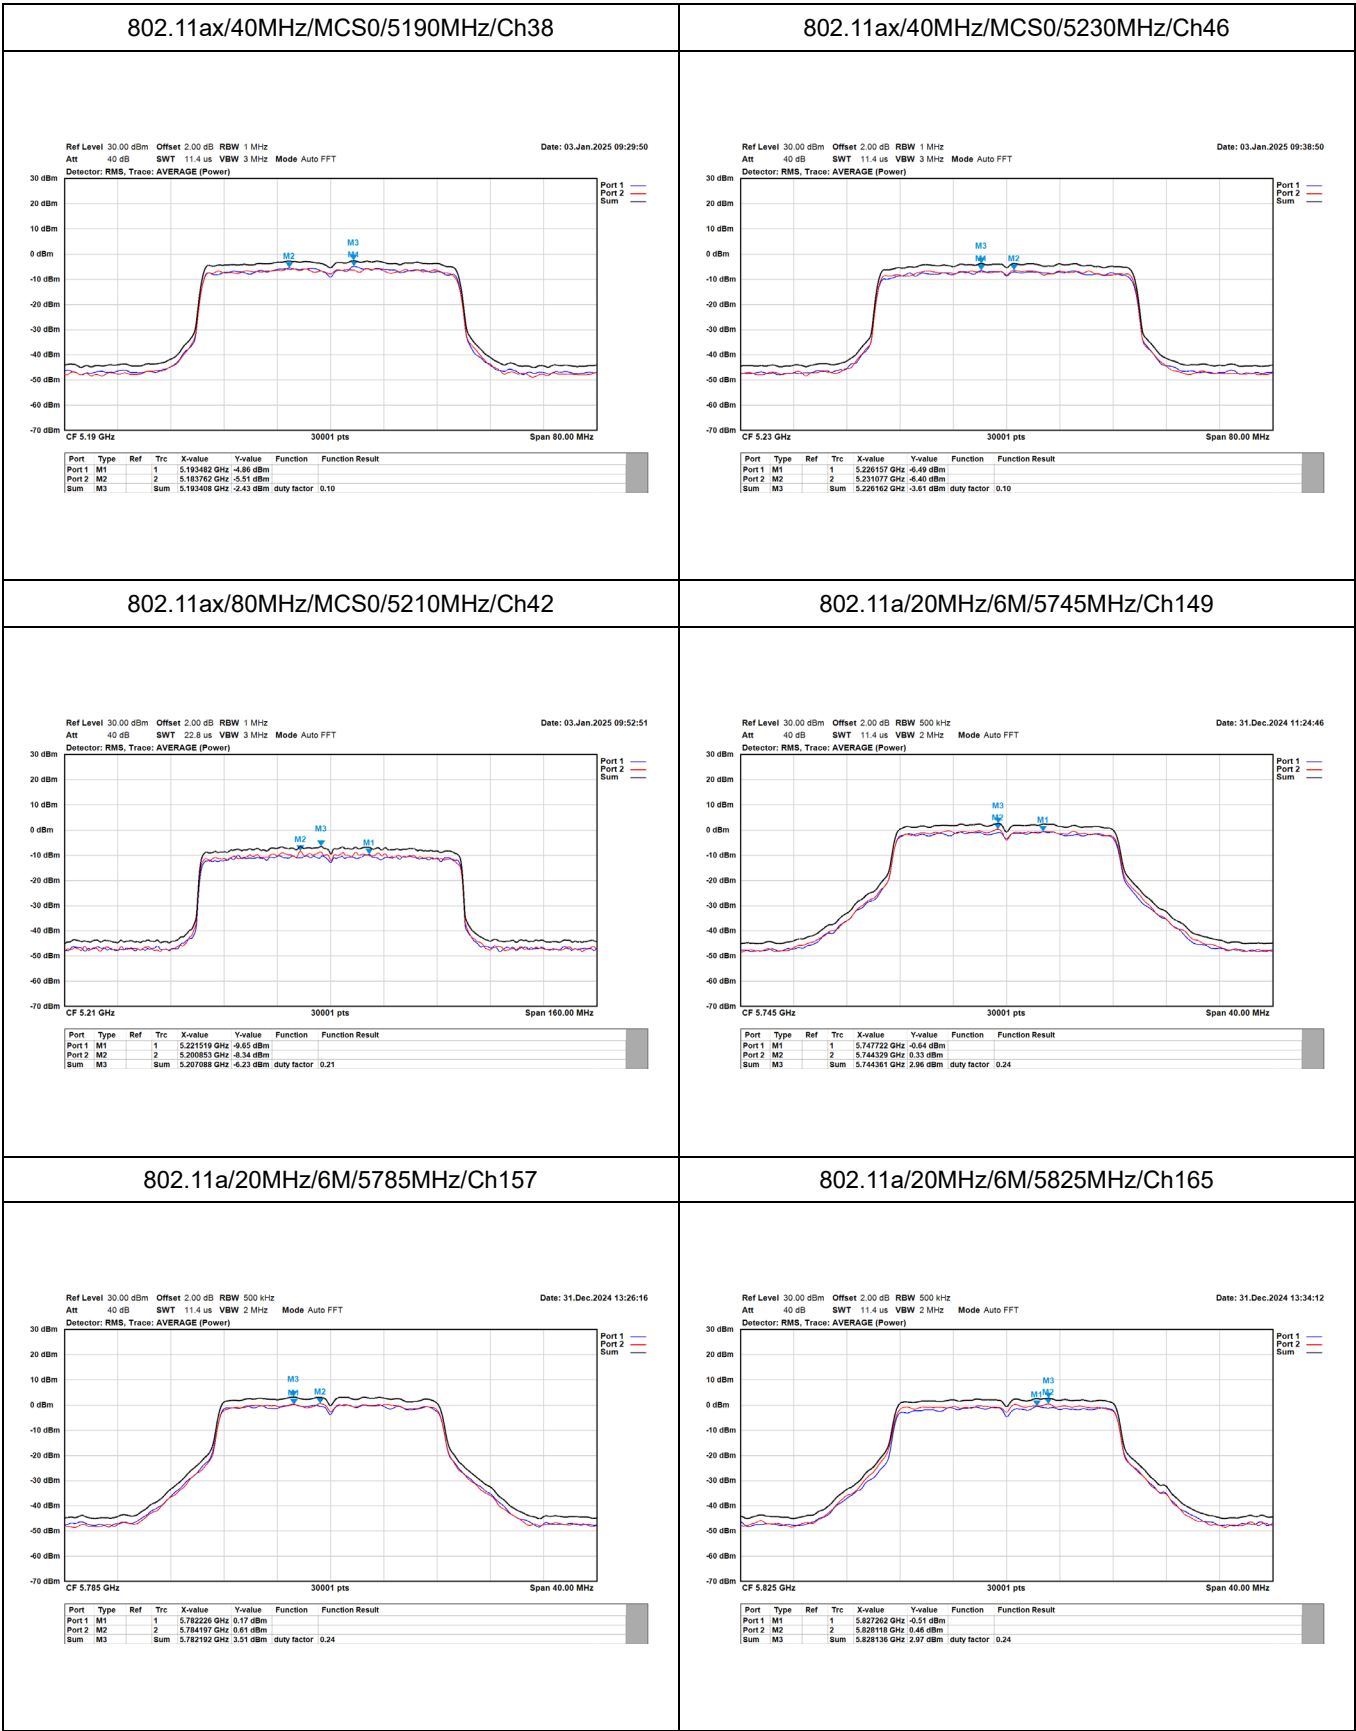


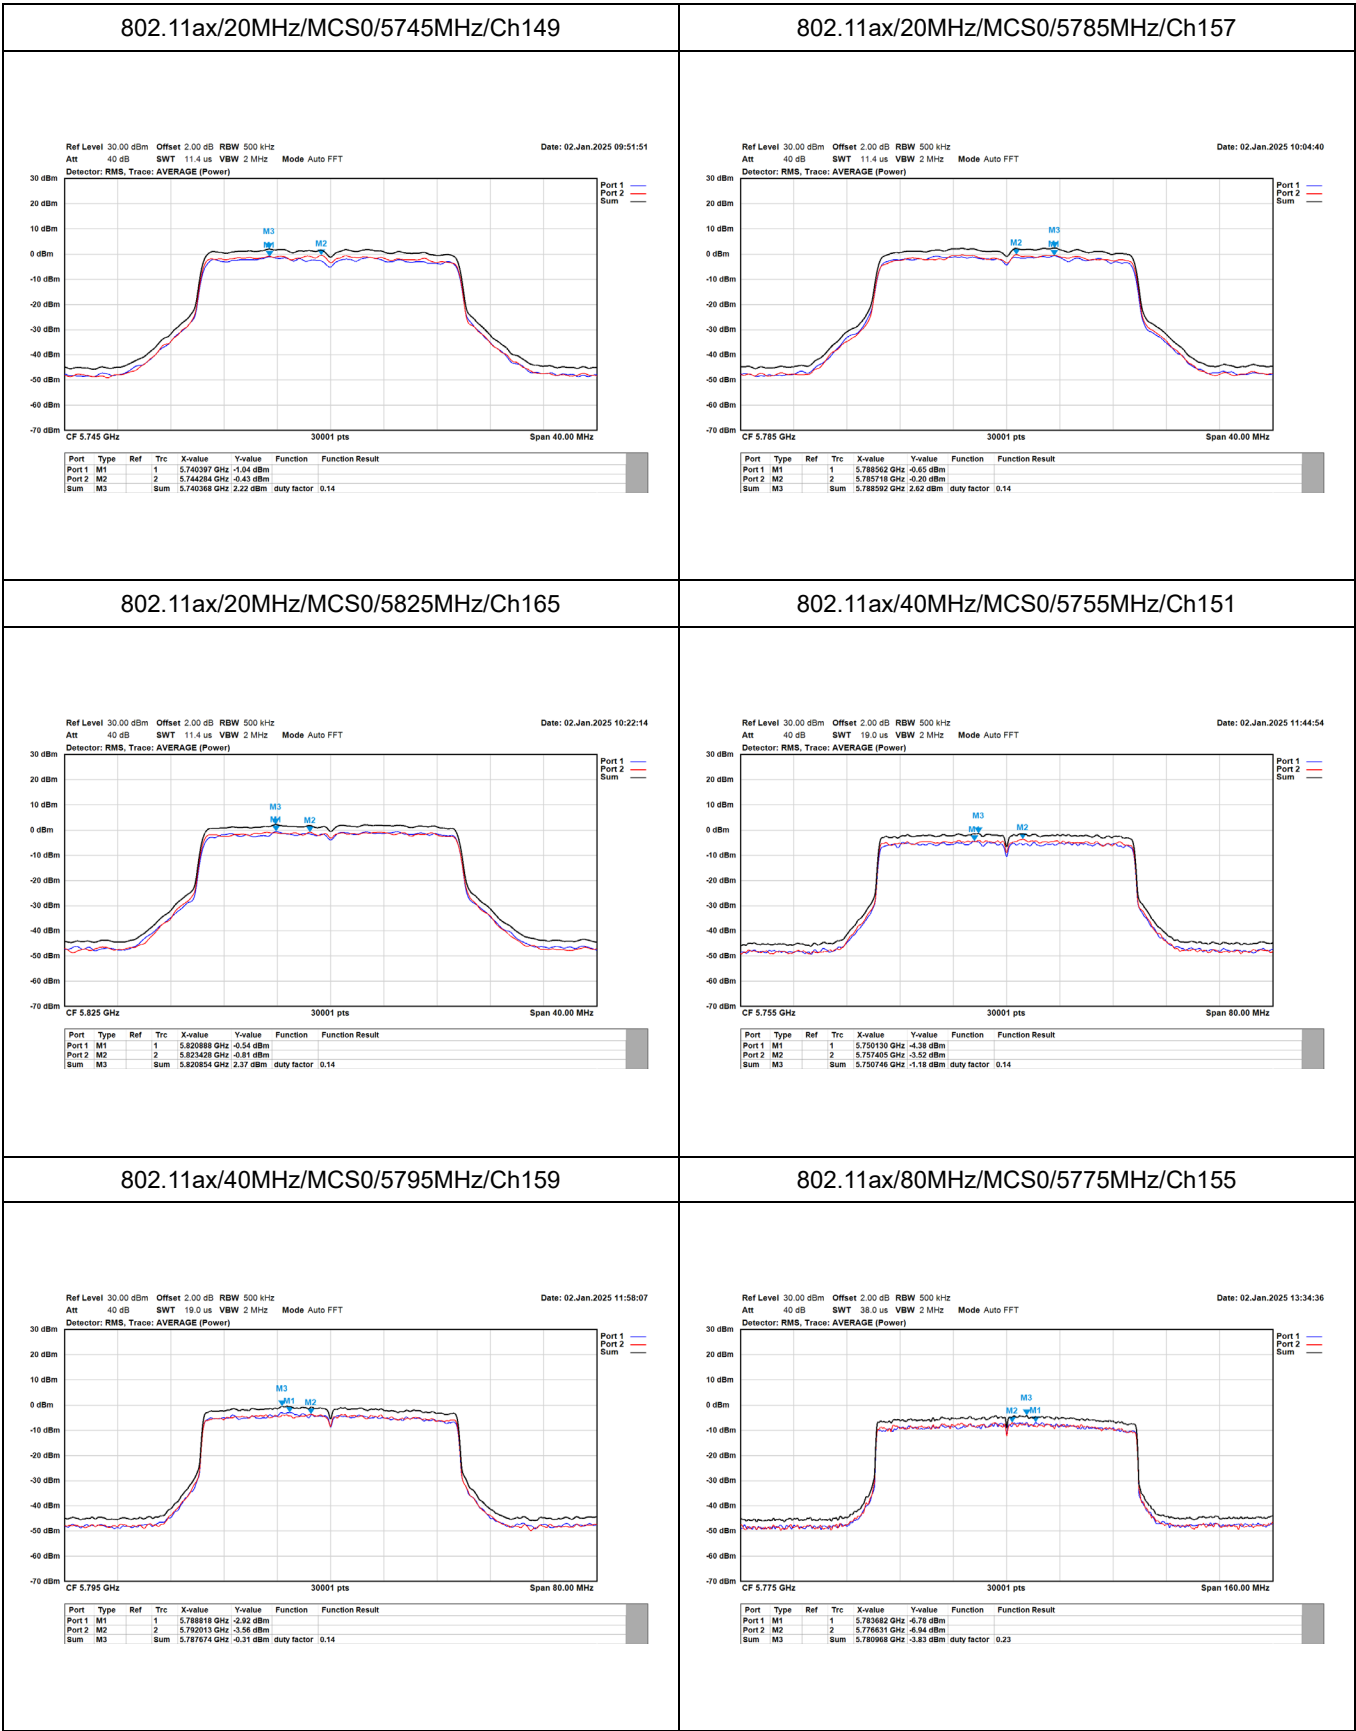

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Model No.: TAP-M310R-NPS-1P1R-US-CT-T

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5180MHz
Test by :Caster

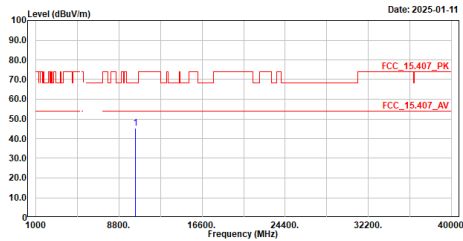


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	10360.000	45.33	68.22	-22.89	42.47	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Caster

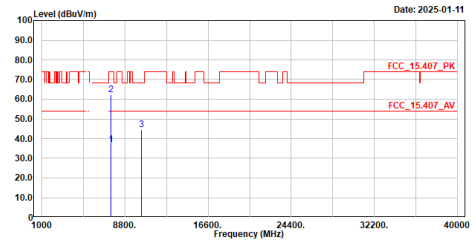


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7507.600	37.14	54.00	-16.86	37.37	-0.23	Average
2	7507.600	62.26	74.00	-11.74	62.49	-0.23	Peak
3	10360.000	44.63	68.22	-23.59	41.77	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5220MHz
Test by :Caster

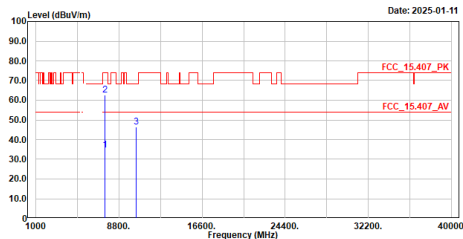


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7465.100	34.57	54.00	-19.43	34.65	-0.08	Average
2	7465.100	62.66	74.00	-11.34	62.74	-0.08	Peak
3	10440.000	46.29	68.22	-21.93	43.45	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5220MHz
Test by :Caster

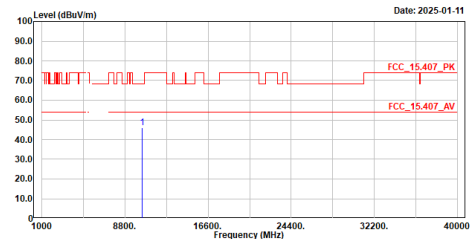


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	10440.000	46.06	68.22	-22.16	43.22	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Rock

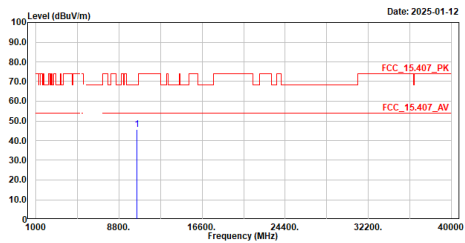


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	10480.000	45.80	68.22	-22.42	42.95	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Rock

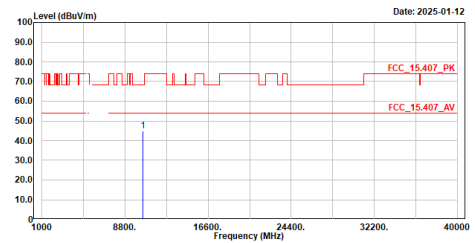


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	10480.000	44.85	68.22	-23.37	42.00	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5745MHz
Test by :Rock

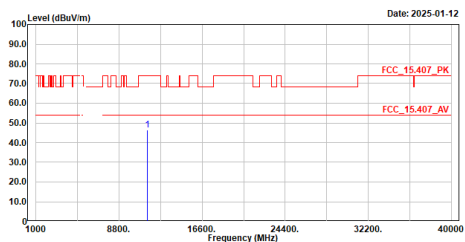


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	11490.000	46.26	74.00	-27.74	41.89	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5745MHz
Test by :Rock

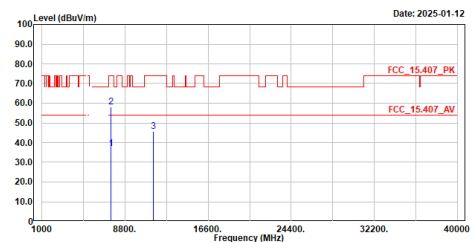


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7490.600	36.95	54.00	-17.05	37.12	-0.17	Average
2	7490.600	58.03	74.00	-15.97	58.20	-0.17	Peak
3	11490.000	45.56	74.00	-28.44	41.19	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5785MHz
Test by :Rock

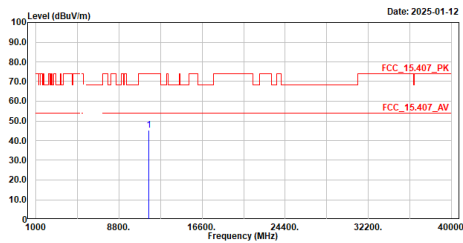


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	45.35	74.00	-28.65	40.86	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5785MHz
Test by :Rock

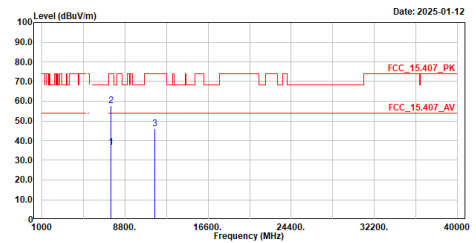


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7490.600	36.68	54.00	-17.32	36.85	-0.17	Average
2	7490.600	57.78	74.00	-16.22	57.95	-0.17	Peak
3	11570.000	46.09	74.00	-27.91	41.60	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5825MHz
Test by :Rock

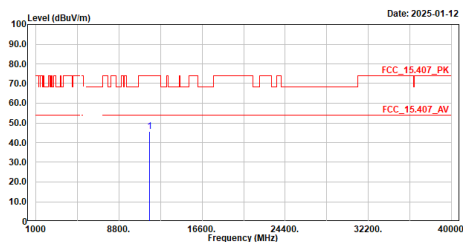


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	45.69	74.00	-28.31	41.20	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5825MHz
Test by :Rock

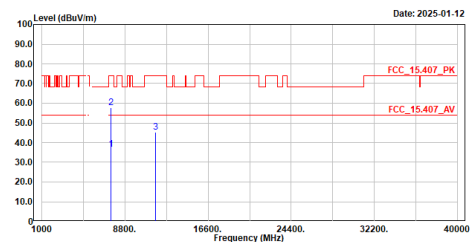


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7490.600	36.63	54.00	-17.37	36.80	-0.17	Average
2	7490.600	57.76	74.00	-16.24	57.93	-0.17	Peak
3	11650.000	45.16	74.00	-28.84	40.67	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5180MHz
Test by :Rock

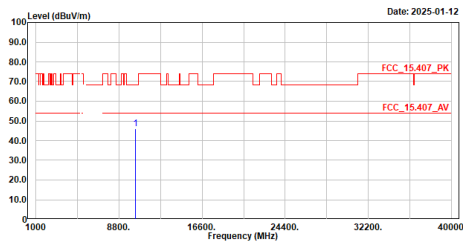


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	45.86	68.22	-22.36	43.00	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5180MHz
Test by :Rock

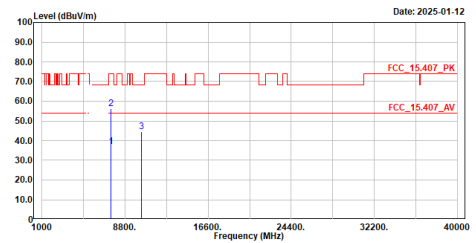


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7453.200	36.79	54.00	-17.21	36.83	-0.04	Average
2	7453.200	56.26	74.00	-17.74	56.30	-0.04	Peak
3	10360.000	44.37	68.22	-23.85	41.51	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5220MHz
Test by :Rock

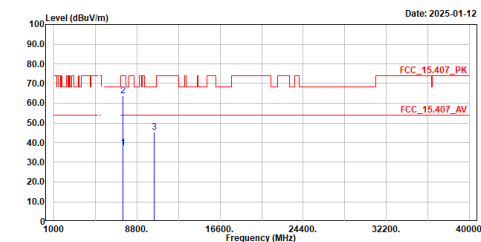


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7494.000	37.41	54.00	-16.59	37.60	-0.19	Average
2	7494.000	63.59	74.00	-10.41	63.78	-0.19	Peak
3	10440.000	45.11	68.22	-23.11	42.27	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5220MHz
Test by :Rock

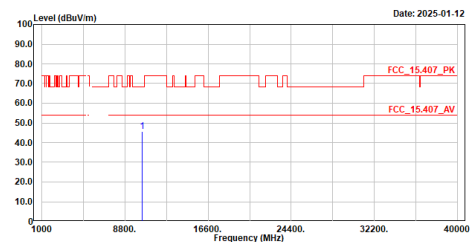


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	45.70	68.22	-22.52	42.86	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5240MHz
Test by :Rock

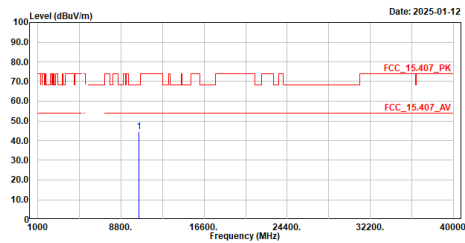


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	44.46	68.22	-23.76	41.61	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5240MHz
Test by :Rock

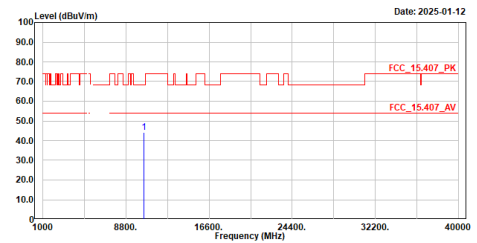


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	44.13	68.22	-24.09	41.28	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5745MHz
Test by :Rock

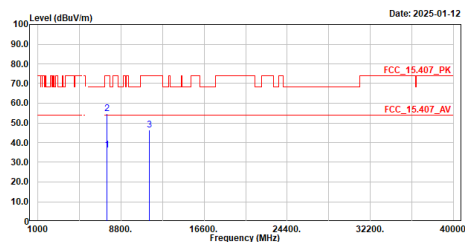


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	7473.600	36.08	54.00	-17.92	36.18	-0.10	Average
2	7473.600	54.64	74.00	-19.36	54.74	-0.10	Peak
3	11490.000	46.48	74.00	-27.52	42.11	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5745MHz
Test by :Rock

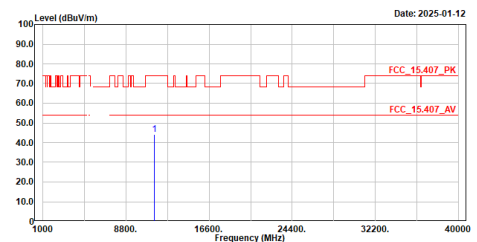


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	44.21	74.00	-29.79	39.84	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5785MHz
Test by :Rock

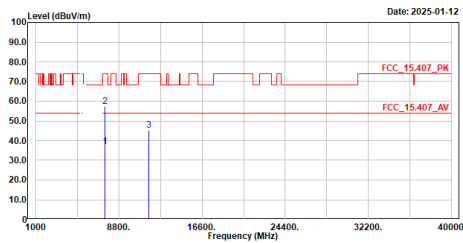


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7473.600	36.92	54.00	-17.08	37.02	-0.10	Average
2	7473.600	57.37	74.00	-16.63	57.47	-0.10	Peak
3	11570.000	45.44	74.00	-28.56	40.95	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5785MHz
Test by :Rock

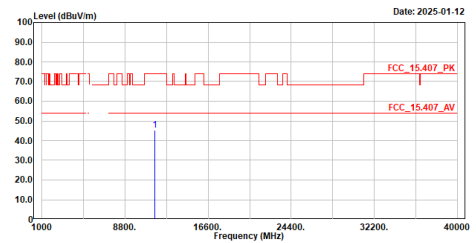


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	45.23	74.00	-28.77	40.74	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5825MHz
Test by :Rock

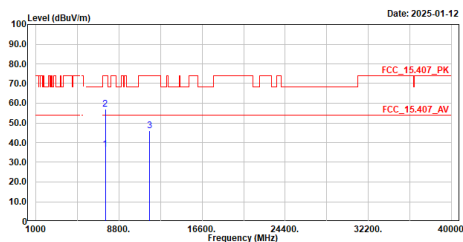


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7517.800	36.59	54.00	-17.41	36.83	-0.24	Average
2	7517.800	57.06	74.00	-16.94	57.30	-0.24	Peak
3	11650.000	46.07	74.00	-27.93	41.58	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5825MHz
Test by :Rock

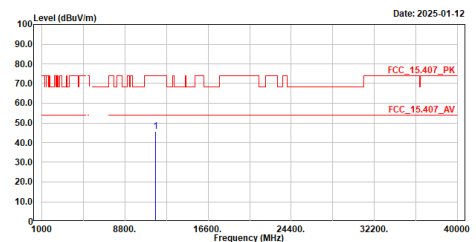


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	45.71	74.00	-28.29	41.22	4.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5190MHz
Test by :Rock

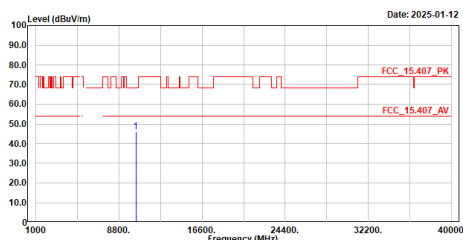


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	46.13	68.22	-22.09	43.27	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5190MHz
Test by :Rock

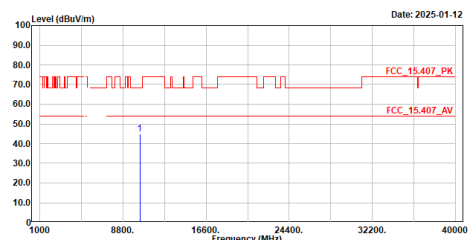


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	44.89	68.22	-23.33	42.03	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5230MHz
Test by :Rock

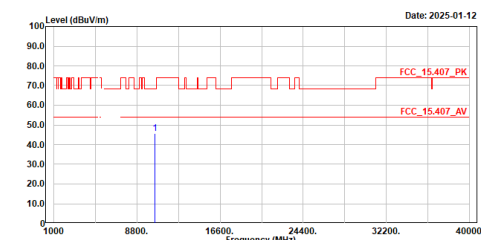


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	45.83	68.22	-22.39	43.01	2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5230MHz
Test by :Rock

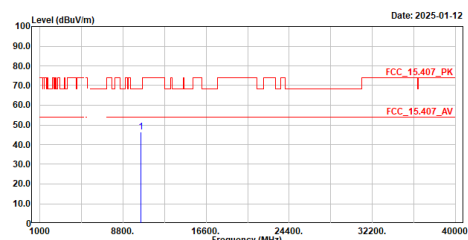


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	46.43	68.22	-21.79	43.61	2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5755MHz
Test by :Rock

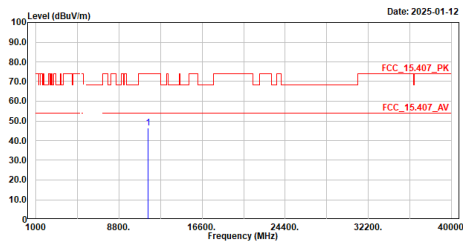


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	46.27	74.00	-27.73	41.89	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5755MHz
Test by :Rock

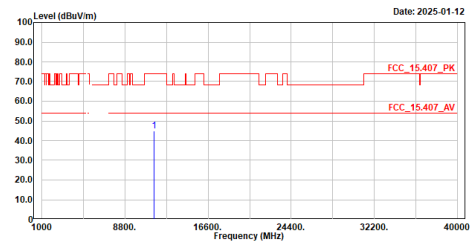


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	44.95	74.00	-29.05	40.57	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5795MHz
Test by :Rock

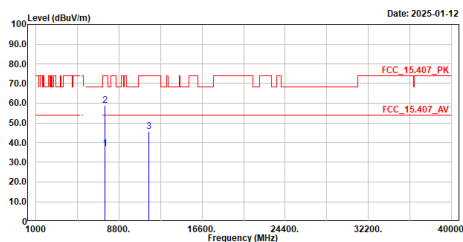


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7456.600	36.92	54.00	-17.08	36.98	-0.06	Average
2	7456.600	58.77	74.00	-15.23	58.83	-0.06	Peak
3	11590.000	45.50	74.00	-28.50	41.00	4.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5795MHz
Test by :Rock

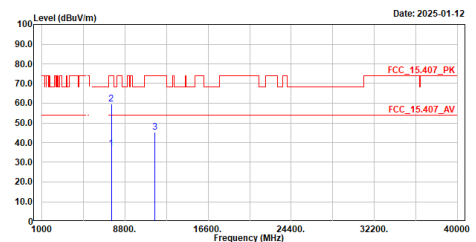


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7517.800	36.88	54.00	-17.12	37.12	-0.24	Average
2	7517.800	59.68	74.00	-14.32	59.92	-0.24	Peak
3	11590.000	45.40	74.00	-28.60	40.90	4.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5210MHz
Test by :Rock

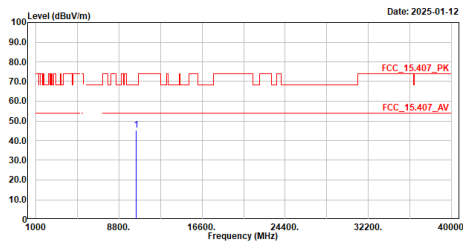


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	45.13	68.22	-23.09	42.27	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5210MHz
Test by :Rock

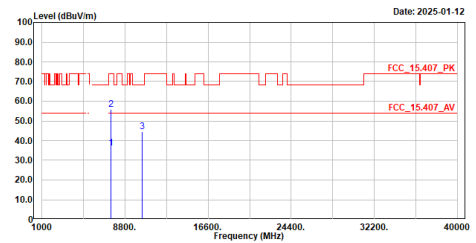


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7505.900	36.38	54.00	-17.62	36.60	-0.22	Average
2	7505.900	55.78	74.00	-18.22	56.00	-0.22	Peak
3	10420.000	44.41	68.22	-23.81	41.55	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5775MHz
Test by :Rock

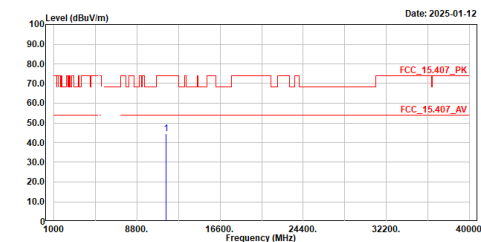


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	44.37	74.00	-29.63	39.90	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5775MHz
Test by :Rock

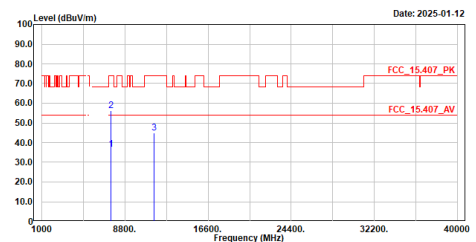


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7505.900	36.75	54.00	-17.25	36.97	-0.22	Average
2	7505.900	56.22	74.00	-17.78	56.44	-0.22	Peak
3	11550.000	45.05	74.00	-28.95	40.58	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5775MHz
Test by :Peter

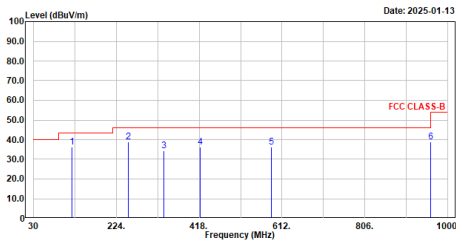


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	119.240	36.37	43.50	-7.13	62.73	-26.36	QP
2	252.130	38.88	46.00	-7.12	63.78	-24.90	QP
3	335.550	34.20	46.00	-11.80	56.22	-22.02	QP
4	419.940	36.32	46.00	-9.68	56.31	-19.99	QP
5	587.750	36.33	46.00	-9.67	52.22	-15.89	QP
6	960.230	38.89	54.00	-15.11	49.64	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5775MHz
Test by :Peter

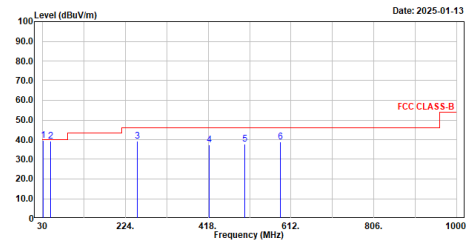


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.970	39.50	40.00	-0.50	64.56	-25.06	QP
2	49.400	39.28	40.00	-0.72	62.67	-23.39	QP
3	252.130	39.41	46.00	-6.59	64.31	-24.90	QP
4	419.940	37.53	46.00	-8.47	57.52	-19.99	QP
5	504.330	37.70	46.00	-8.30	55.64	-17.94	QP
6	587.750	38.77	46.00	-7.23	54.66	-15.89	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Caster

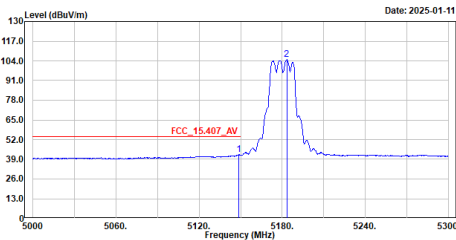


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	42.24	54.00	-11.76	27.72	14.52	Average
2	5183.300	104.76	-----	-----	90.27	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Caster

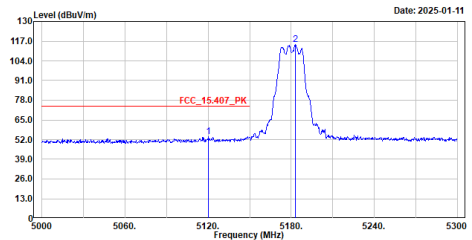


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5120.300	53.98	74.00	-20.02	39.48	14.50	Peak
2	5183.000	114.90	-----	-----	100.41	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Caster

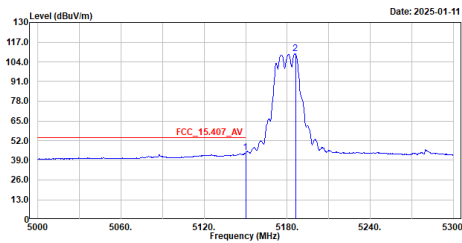

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	43.98	54.00	-10.02	29.46	14.52	Average
2	5186.000	109.21	-----	-----	94.72	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Caster

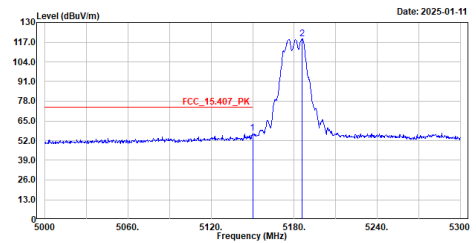

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	57.13	74.00	-16.87	42.61	14.52	Peak
2	5185.700	119.10	-----	-----	104.61	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5220MHz
Test by :Caster

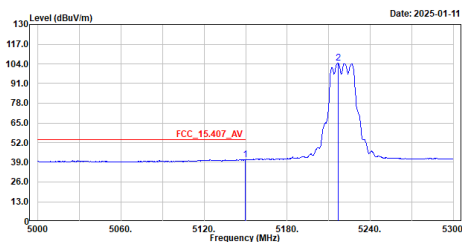

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.700	40.89	54.00	-13.11	26.37	14.52	Average
2	5216.900	104.55	-----	-----	90.06	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5220MHz
Test by :Caster

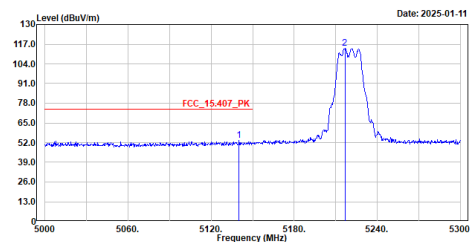

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5140.100	53.33	74.00	-20.67	38.82	14.51	Peak
2	5216.600	114.41	-----	-----	99.92	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5220MHz
Test by :Caster

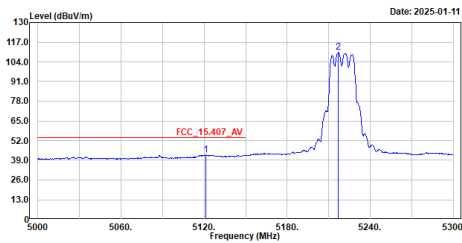

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5121.500	42.57	54.00	-11.43	28.07	14.50	Average
2	5216.900	110.22	-----	-----	95.73	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5220MHz
Test by :Caster

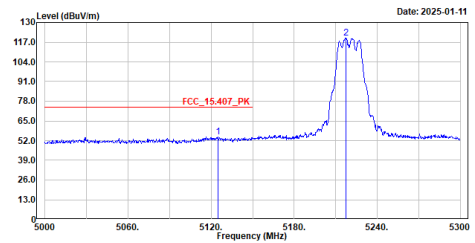

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5124.800	54.44	74.00	-19.56	39.94	14.50	Peak
2	5217.200	119.81	-----	-----	105.31	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Caster

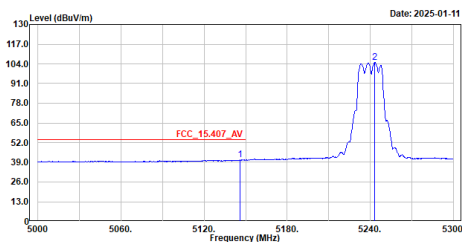

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5146.100	40.56	54.00	-13.44	26.05	14.51	Average
2	5243.000	104.98	-----	-----	90.50	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Caster

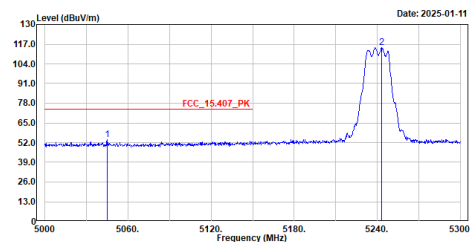

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5045.000	53.79	74.00	-20.21	39.35	14.44	Peak
2	5243.000	114.71	-----	-----	100.23	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Caster

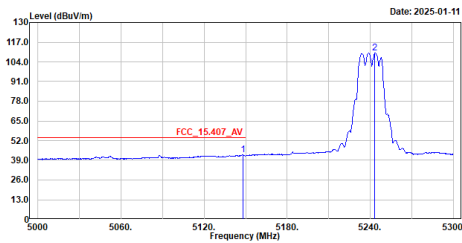

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	42.68	54.00	-11.32	28.16	14.52	Average
2	5243.300	109.85	-----	-----	95.37	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Caster

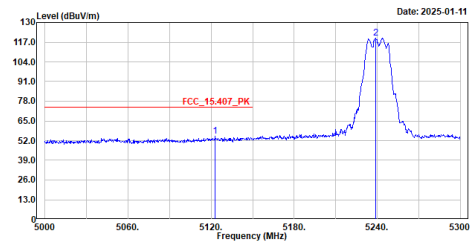

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5123.000	54.89	74.00	-19.11	40.39	14.50	Peak
2	5239.100	119.89	-----	-----	105.40	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5745MHz
Test by :Caster

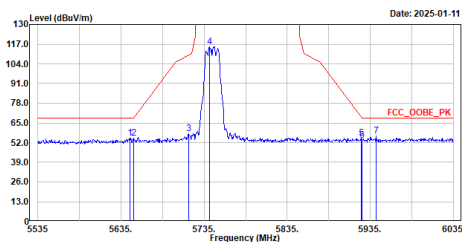

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5646.000	55.18	68.20	-13.02	39.43	15.75	Peak
2	5650.000	55.12	68.21	-13.09	39.35	15.77	Peak
3	5716.500	57.78	109.82	-52.04	41.43	16.35	Peak
4	5741.500	115.47	-----	-----	98.99	16.48	Peak
5	5924.000	55.15	68.95	-13.80	38.42	16.73	Peak
6	5925.000	53.37	68.21	-14.84	36.64	16.73	Peak
7	5942.500	56.50	68.20	-11.70	39.75	16.75	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5745MHz
Test by :Caster

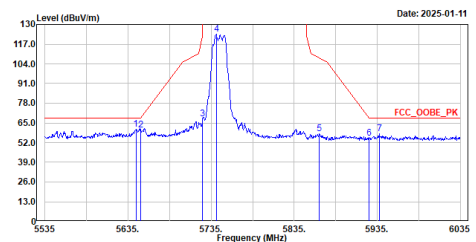


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5644.500	60.64	68.20	-7.56	44.90	15.74	Peak
2	5650.000	60.42	68.21	-7.79	44.65	15.77	Peak
3	5725.000	67.86	122.20	-54.34	51.47	16.39	Peak
4	5741.500	123.60	-----	-----	107.12	16.48	Peak
5	5865.500	57.98	107.96	-49.88	41.50	16.48	Peak
6	5925.000	54.89	68.21	-13.32	38.16	16.73	Peak
7	5937.500	57.80	68.20	-10.40	41.06	16.74	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

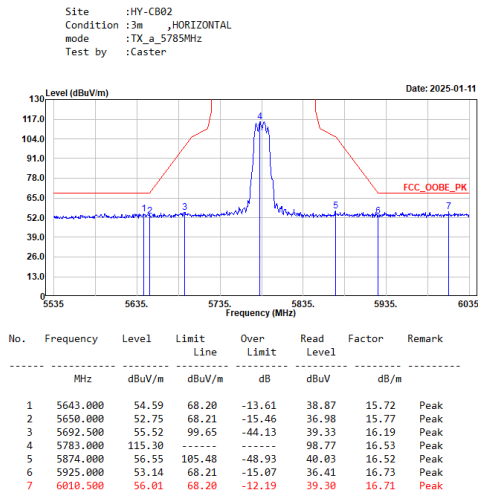


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

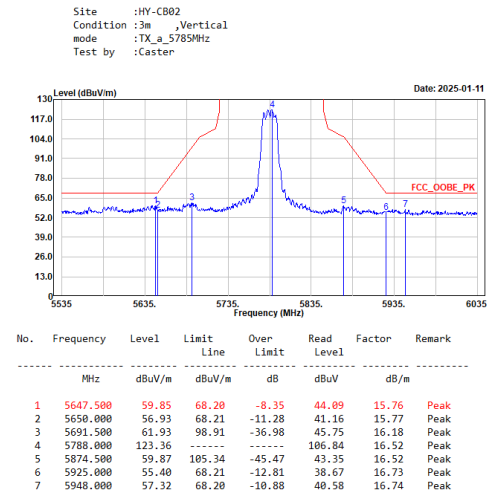

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

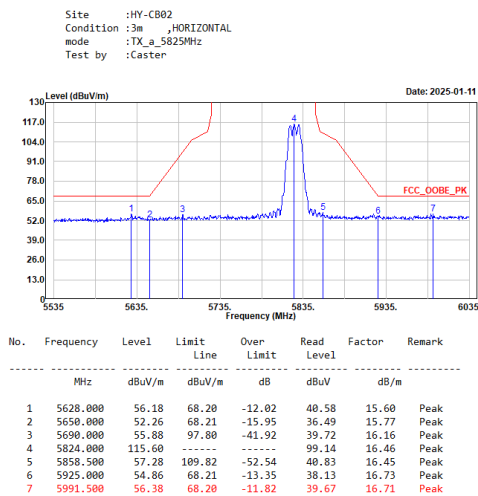


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

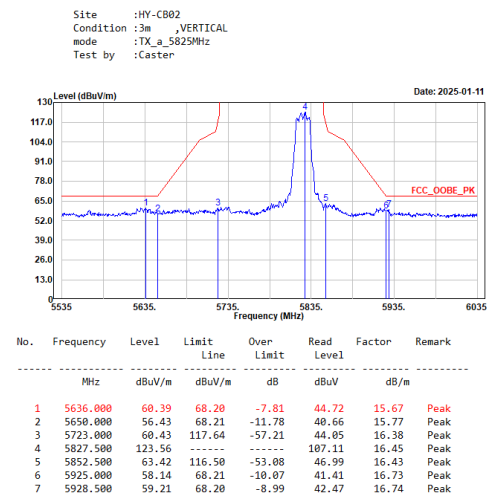

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5180MHz
Test by :Rock

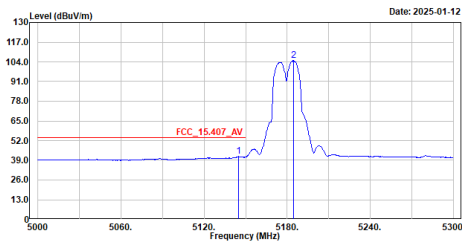

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5144.900	41.48	54.00	-12.52	26.97	14.51	Average
2	5184.500	104.92	-----	-----	90.43	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5180MHz
Test by :Rock

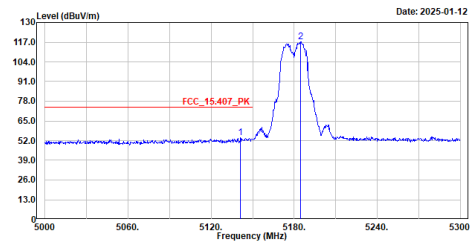

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5141.300	54.10	74.00	-19.90	39.59	14.51	Peak
2	5184.800	117.30	-----	-----	102.81	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5180MHz
Test by :Rock

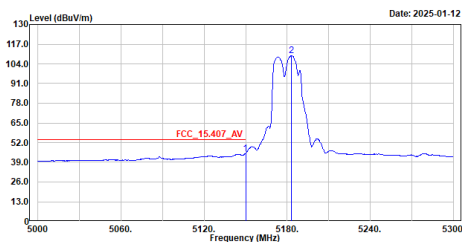

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	44.81	54.00	-9.19	30.29	14.52	Average
2	5183.000	109.42	-----	-----	94.93	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5180MHz
Test by :Rock

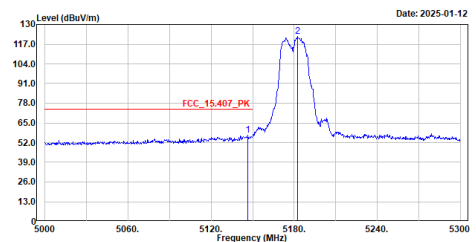

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5146.700	56.78	74.00	-17.22	42.27	14.51	Peak
2	5182.700	121.95	-----	-----	107.46	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5220MHz
Test by :Rock

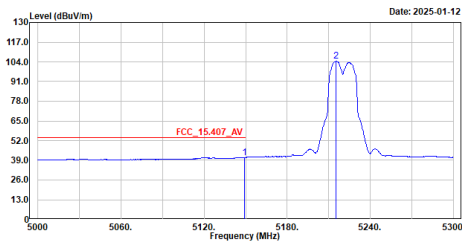

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	40.92	54.00	-13.08	26.48	14.52	Average
2	5215.400	104.54	-----	-----	90.05	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5220MHz
Test by :Rock

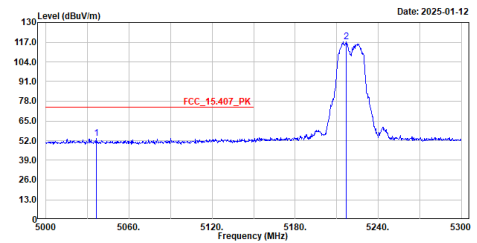

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5036.300	53.57	74.00	-20.43	39.13	14.44	Peak
2	5216.900	117.13	-----	-----	102.64	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5220MHz
Test by :Rock

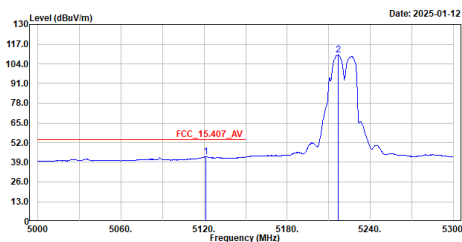

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5121.500	42.62	54.00	-11.38	28.12	14.50	Average
2	5216.900	109.88	-----	-----	95.39	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5220MHz
Test by :Rock

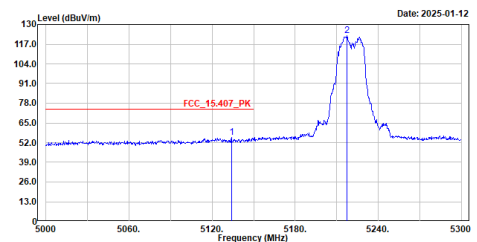

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5134.100	55.27	74.00	-18.73	40.77	14.50	Peak
2	5217.200	122.45	-----	-----	107.95	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5240MHz
Test by :Rock

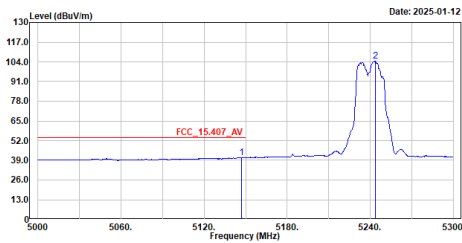

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.000	40.89	54.00	-13.11	26.37	14.52	Average
2	5243.600	104.36	-----	-----	89.88	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5240MHz
Test by :Rock

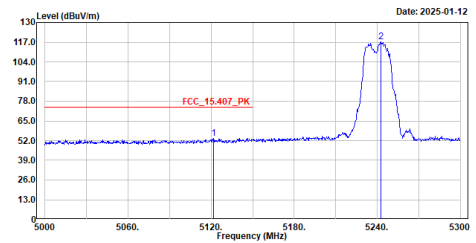

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5121.800	53.39	74.00	-20.61	38.89	14.50	Peak
2	5242.400	117.43	-----	-----	102.94	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5240MHz
Test by :Rock

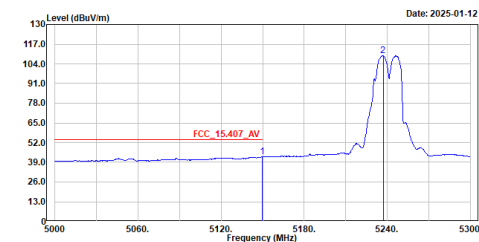

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	42.54	54.00	-11.46	28.02	14.52	Average
2	5237.000	109.45	-----	-----	94.95	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5240MHz
Test by :Rock

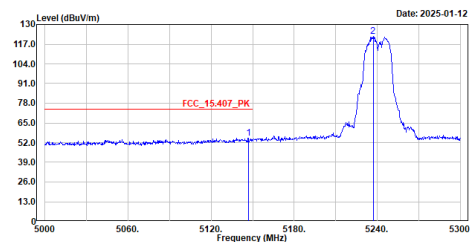

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.000	55.16	74.00	-18.84	40.64	14.52	Peak
2	5237.000	122.10	-----	-----	107.60	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5745MHz
Test by :Rock

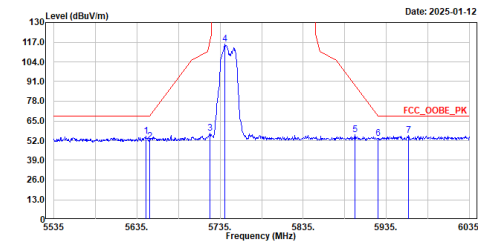


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5645.500	54.74	68.20	-13.46	39.00	15.74	Peak
2	5650.000	51.37	68.21	-16.84	35.60	15.77	Peak
3	5722.500	57.00	116.50	-59.50	40.63	16.37	Peak
4	5741.000	115.57	-----	-----	99.10	16.47	Peak
5	5897.500	55.82	88.55	-32.73	39.20	16.62	Peak
6	5925.000	53.27	68.21	-14.94	36.54	16.73	Peak
7	5961.500	55.53	68.20	-12.67	38.81	16.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5745MHz
Test by :Rock

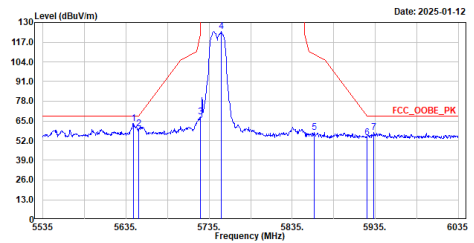


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5644.000	63.52	68.20	-4.68	47.79	15.73	Peak
2	5650.000	59.94	68.21	-8.27	44.17	15.77	Peak
3	5724.500	67.92	121.06	-53.14	51.53	16.39	Peak
4	5750.000	124.32	-----	-----	107.80	16.52	Peak
5	5861.500	57.60	108.98	-51.38	41.14	16.46	Peak
6	5925.000	53.81	68.21	-14.40	37.08	16.73	Peak
7	5933.500	57.19	68.20	-11.01	40.44	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5785MHz
Test by :Rock

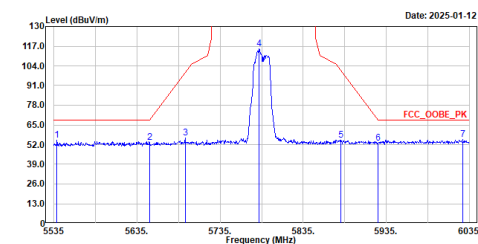


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5538.500	54.92	68.20	-13.28	39.64	15.28	Peak
2	5650.000	53.48	68.21	-14.73	37.71	15.77	Peak
3	5693.000	56.56	100.02	-43.46	40.37	16.19	Peak
4	5781.500	115.45	-----	-----	98.92	16.53	Peak
5	5800.500	55.13	101.13	-46.00	38.59	16.54	Peak
6	5925.000	53.12	68.21	-15.09	36.39	16.73	Peak
7	6027.500	55.32	68.20	-12.88	38.56	16.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5785MHz
Test by :Rock

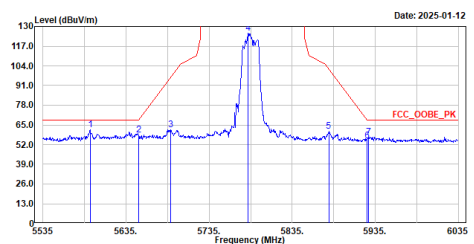


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5592.000	61.63	68.20	-6.57	46.28	15.35	Peak
2	5650.000	58.58	68.21	-9.63	42.81	15.77	Peak
3	5688.500	61.92	96.69	-34.77	45.77	16.15	Peak
4	5781.500	125.36	-----	-----	100.83	16.53	Peak
5	5879.000	60.78	102.24	-41.46	44.24	16.54	Peak
6	5925.000	54.58	68.21	-13.63	37.85	16.73	Peak
7	5926.500	56.84	68.20	-11.36	40.10	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_5825MHz
Test by :Rock

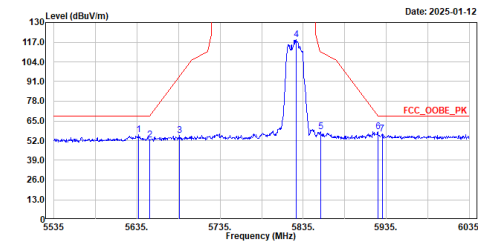


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5637.000	55.95	68.20	-12.25	40.27	15.68	Peak
2	5650.000	52.34	68.21	-15.87	36.57	15.77	Peak
3	5686.500	55.34	95.21	-39.87	39.21	16.13	Peak
4	5826.500	118.65	-----	-----	102.19	16.46	Peak
5	5856.000	57.84	110.52	-52.68	41.40	16.44	Peak
6	5925.000	57.68	68.21	-10.53	40.95	16.73	Peak
7	5930.000	56.54	68.20	-11.66	39.79	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_5825MHz
Test by :Rock

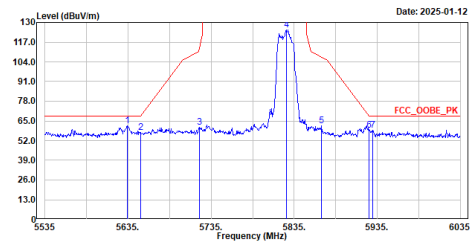


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5634.000	61.87	68.20	-6.33	46.22	15.65	Peak
2	5650.000	57.34	68.21	-10.87	41.57	15.77	Peak
3	5721.000	60.77	113.00	-52.31	44.41	16.36	Peak
4	5826.000	125.15	-----	-----	108.69	16.46	Peak
5	5867.500	61.62	107.30	-45.68	45.14	16.48	Peak
6	5925.000	59.11	68.21	-9.10	42.38	16.73	Peak
7	5929.500	58.86	68.20	-9.34	42.11	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Rock

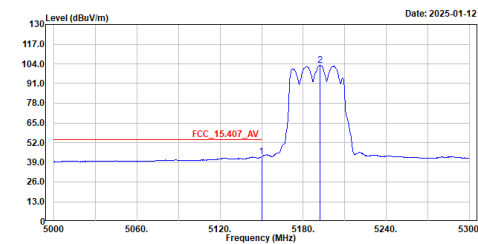


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	42.71	54.00	-11.29	28.19	14.52	Average
2	5192.000	103.13	-----	-----	88.63	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Rock

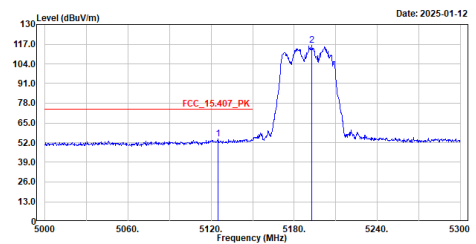


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5124.800	54.63	74.00	-19.37	40.13	14.50	Peak
2	5192.900	116.27	-----	-----	101.78	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5190MHz
Test by :Rock

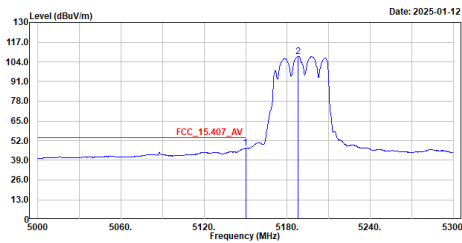

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5158.800	46.99	54.00	-7.01	32.47	14.52	Average
2	5188.180	107.47	-----	-----	92.99	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5190MHz
Test by :Rock

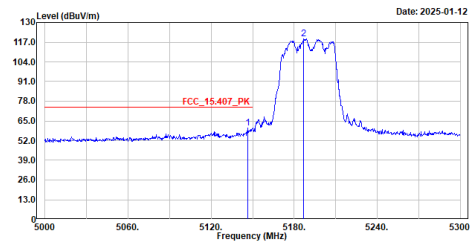

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5146.700	60.54	74.00	-13.46	46.03	14.51	Peak
2	5186.600	119.29	-----	-----	104.80	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5230MHz
Test by :Rock

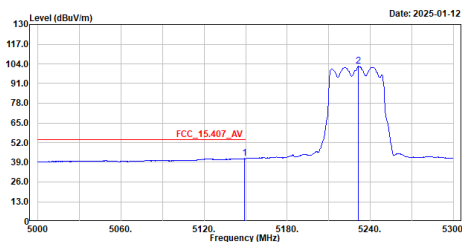

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.180	41.56	54.00	-12.44	27.04	14.52	Average
2	5231.600	102.38	-----	-----	87.89	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5230MHz
Test by :Rock

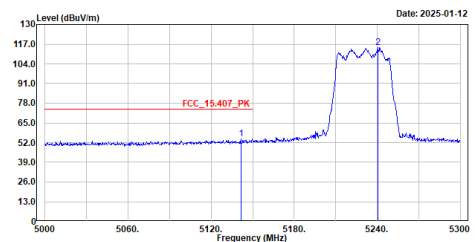

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5141.600	54.34	74.00	-19.66	39.83	14.51	Peak
2	5240.300	114.71	-----	-----	100.22	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5230MHz
Test by :Rock

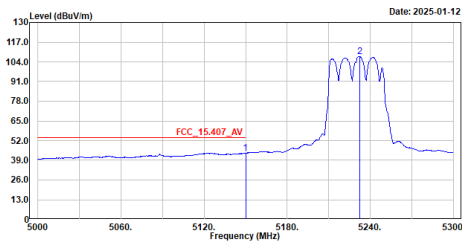

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	43.69	54.00	-10.31	29.17	14.52	Average
2	5232.280	107.60	-----	-----	93.11	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5230MHz
Test by :Rock

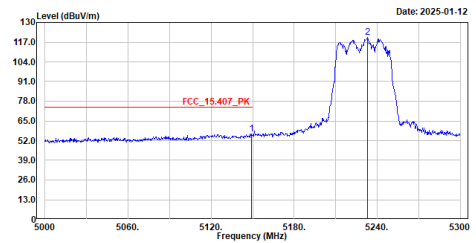

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.400	56.57	74.00	-17.43	42.05	14.52	Peak
2	5233.100	120.42	-----	-----	105.94	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5755MHz
Test by :Rock

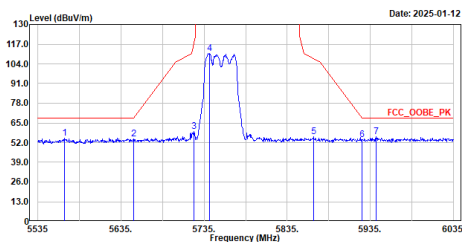

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5567.500	55.08	68.20	-13.12	39.75	15.33	Peak
2	5650.000	54.34	68.21	-13.87	38.57	15.77	Peak
3	5723.000	59.41	117.64	-58.23	43.03	16.38	Peak
4	5742.000	111.00	-----	-----	94.52	16.48	Peak
5	5866.500	56.03	107.50	-51.55	39.55	16.48	Peak
6	5925.000	53.07	68.21	-14.34	37.14	16.73	Peak
7	5942.000	56.09	68.20	-12.11	39.34	16.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5755MHz
Test by :Rock

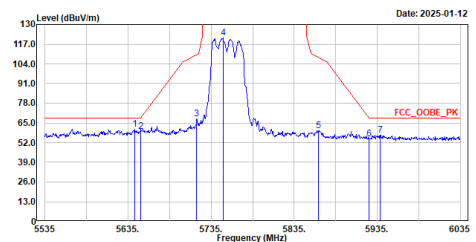

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5643.500	61.04	68.20	-7.16	45.31	15.73	Peak
2	5650.000	59.12	68.21	-9.09	43.35	15.77	Peak
3	5717.500	67.58	110.10	-42.52	51.23	16.35	Peak
4	5749.500	120.97	-----	-----	104.45	16.52	Peak
5	5864.500	60.09	108.14	-48.05	43.62	16.47	Peak
6	5925.000	54.32	68.21	-13.89	37.59	16.73	Peak
7	5938.500	56.91	68.20	-11.29	40.17	16.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5795MHz
Test by :Rock

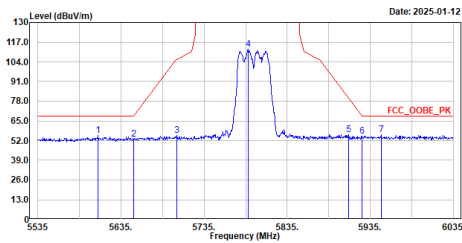


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5607.500	55.25	68.20	-12.95	39.81	15.44	Peak
2	5650.000	52.88	68.21	-15.33	37.11	15.77	Peak
3	5702.000	55.34	105.76	-50.42	39.07	16.27	Peak
4	5788.500	112.26	-----	-----	95.74	16.52	Peak
5	5909.000	55.96	80.05	-24.09	39.30	16.66	Peak
6	5925.000	55.02	68.21	-13.19	38.29	16.73	Peak
7	5948.000	55.85	68.20	-12.35	39.11	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5795MHz
Test by :Rock

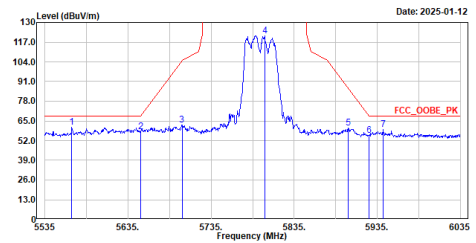


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5567.500	60.66	68.20	-7.54	45.33	15.33	Peak
2	5650.000	58.11	68.21	-10.10	42.34	15.77	Peak
3	5700.000	62.27	105.20	-42.93	46.02	16.25	Peak
4	5799.500	121.40	-----	-----	104.88	16.52	Peak
5	5900.000	60.49	86.70	-26.21	43.86	16.63	Peak
6	5925.000	55.20	68.21	-13.01	38.47	16.73	Peak
7	5942.000	59.35	68.20	-8.85	42.60	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5210MHz
Test by :Rock

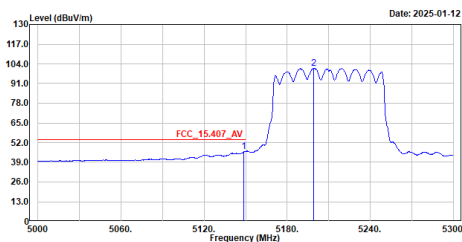


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.800	46.15	54.00	-7.85	31.63	14.52	Average
2	5198.900	101.22	-----	-----	86.73	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5210MHz
Test by :Rock

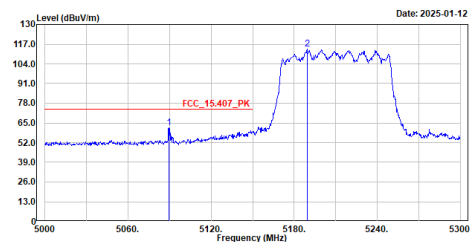


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5089.700	61.79	74.00	-12.21	47.30	14.49	Peak
2	5189.300	113.71	-----	-----	99.22	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax80_5210MHz
Test by :Rock

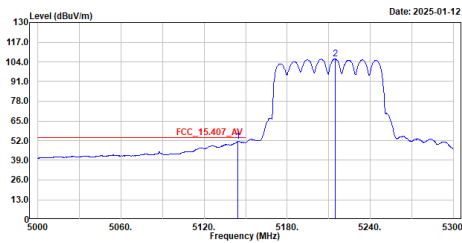

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.600	51.47	54.00	-2.53	36.96	14.51	Average
2	5214.800	105.94	-----	-----	91.45	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax80_5210MHz
Test by :Rock

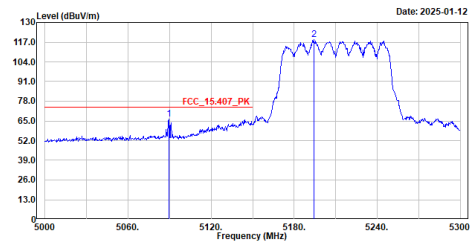

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5089.400	66.14	74.00	-7.86	51.65	14.49	Peak
2	5194.100	118.65	-----	-----	104.16	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5775MHz
Test by :Rock

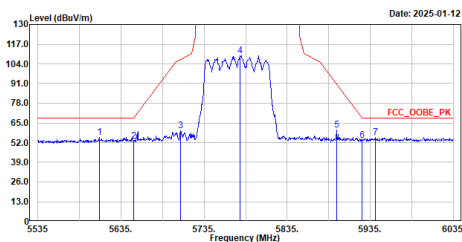

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5609.000	55.42	68.20	-12.78	39.96	15.46	Peak
2	5650.000	53.04	68.21	-15.17	37.27	15.77	Peak
3	5706.500	59.61	107.02	-47.41	43.31	16.30	Peak
4	5778.500	109.36	-----	-----	92.83	16.53	Peak
5	5894.500	60.28	90.77	-30.49	43.67	16.61	Peak
6	5925.000	53.44	68.21	-14.77	36.71	16.73	Peak
7	5941.500	55.52	68.20	-12.68	38.77	16.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax80_5775MHz
Test by :Rock

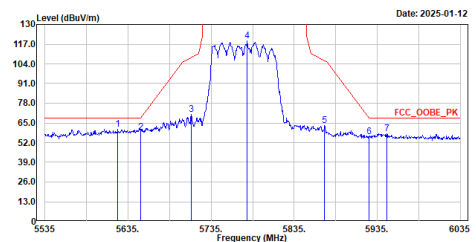


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5623.000	68.88	68.20	-7.32	45.31	15.57	Peak
2	5650.000	59.09	68.21	-9.12	43.32	15.77	Peak
3	5711.500	70.40	108.42	-38.02	54.08	16.32	Peak
4	5778.500	119.16	-----	-----	102.63	16.53	Peak
5	5871.500	63.44	106.18	-42.74	46.93	16.51	Peak
6	5925.000	56.02	68.21	-12.19	39.29	16.73	Peak
7	5946.500	57.67	68.20	-10.53	40.93	16.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Model No.: TAP-M310R-NPS-1R-US-CT-T

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5775MHz
Test by :Peter

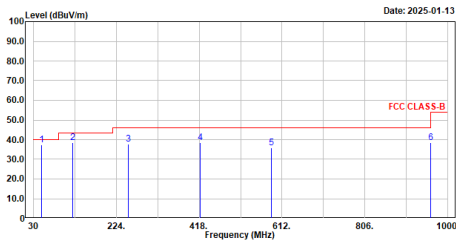


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.430	37.46	40.00	-2.54	60.80	-23.34	QP
2	121.180	38.65	43.50	-4.85	64.91	-26.26	QP
3	252.130	37.87	46.00	-8.13	62.77	-24.90	QP
4	419.940	38.61	46.00	-7.39	58.60	-19.99	QP
5	587.750	35.99	46.00	-10.01	51.88	-15.89	QP
6	960.230	38.37	54.00	-15.63	49.12	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5775MHz
Test by :Peter

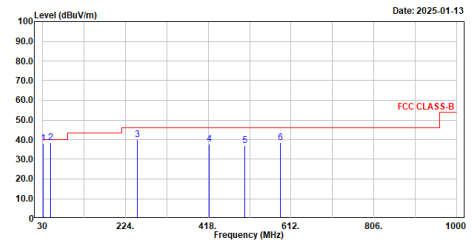

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.970	37.99	40.00	-2.01	63.05	-25.06	QP
2	48.430	38.44	40.00	-1.56	61.78	-23.34	QP
3	252.130	40.04	46.00	-5.96	64.94	-24.90	QP
4	419.940	37.91	46.00	-8.09	57.90	-19.99	QP
5	587.750	37.16	46.00	-8.84	55.10	-17.94	QP
6	960.230	38.38	46.00	-7.62	54.27	-15.89	QP

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix F. Test Result of Radiated Emission Co-location

Model No.: TAP-M310R-NPS-1P1R-US-CT-T

Antenna: ANT-WDB-PNF-1011


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Rock

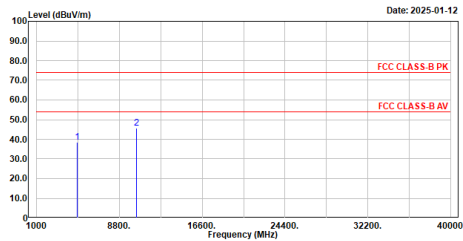

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	38.57	74.00	-35.43	45.72	-7.15	Peak
2	10420.000	45.49	74.00	-28.51	42.63	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Rock

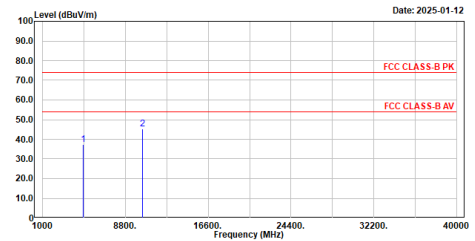

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	37.45	74.00	-36.55	44.60	-7.15	Peak
2	10420.000	45.30	74.00	-28.70	42.44	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

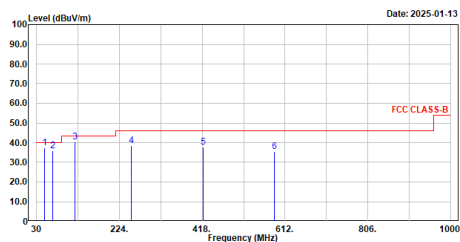

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	49.400	37.21	40.00	-2.79	60.60	-23.39	QP
2	67.830	35.77	40.00	-4.23	61.61	-25.84	QP
3	120.210	40.24	43.50	-3.26	66.46	-26.22	QP
4	252.130	38.59	46.00	-7.41	63.49	-24.90	QP
5	419.940	37.63	46.00	-8.37	57.62	-19.99	QP
6	587.750	35.35	46.00	-10.65	51.24	-15.89	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

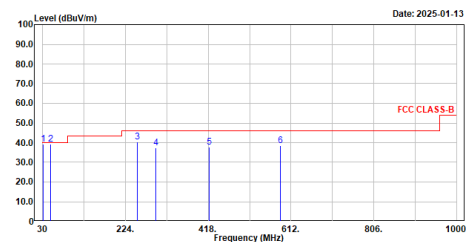


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	30.970	39.43	40.00	-0.57	64.49	-25.06	QP
2	49.400	39.23	40.00	-0.77	62.62	-23.39	QP
3	252.130	40.25	46.00	-5.75	65.15	-24.90	QP
4	294.810	37.39	46.00	-8.61	60.67	-23.28	QP
5	419.940	37.68	46.00	-8.32	57.67	-19.99	QP
6	587.750	38.49	46.00	-7.51	54.38	-15.89	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Model No.: TAP-M310R-NPS-1R-US-CT-T
Antenna: ANT-WDB-PNF-1011

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

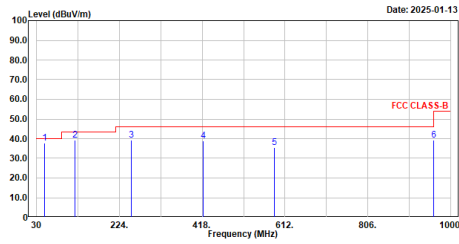


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.430	37.56	40.00	-2.44	60.90	-23.34	QP
2	120.210	39.30	43.50	-4.20	65.52	-26.22	QP
3	252.130	39.12	46.00	-6.88	64.82	-24.90	QP
4	419.940	38.82	46.00	-7.18	58.81	-19.99	QP
5	587.750	35.58	46.00	-10.42	51.47	-15.89	QP
6	960.230	39.20	54.00	-14.80	49.95	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz+TX_ax80_5210MHz
Test by :Peter

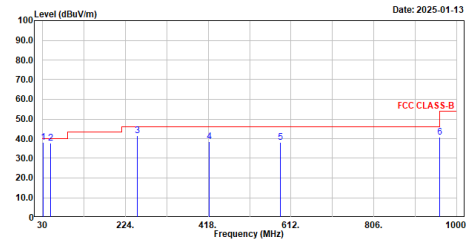

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.970	38.19	40.00	-1.81	63.25	-25.06	QP
2	48.430	37.91	40.00	-2.09	61.25	-23.34	QP
3	252.130	41.62	46.00	-4.38	66.52	-24.90	QP
4	419.940	38.47	46.00	-7.53	58.46	-19.99	QP
5	587.750	37.95	46.00	-8.05	53.84	-15.89	QP
6	960.230	40.66	54.00	-13.34	51.41	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.