


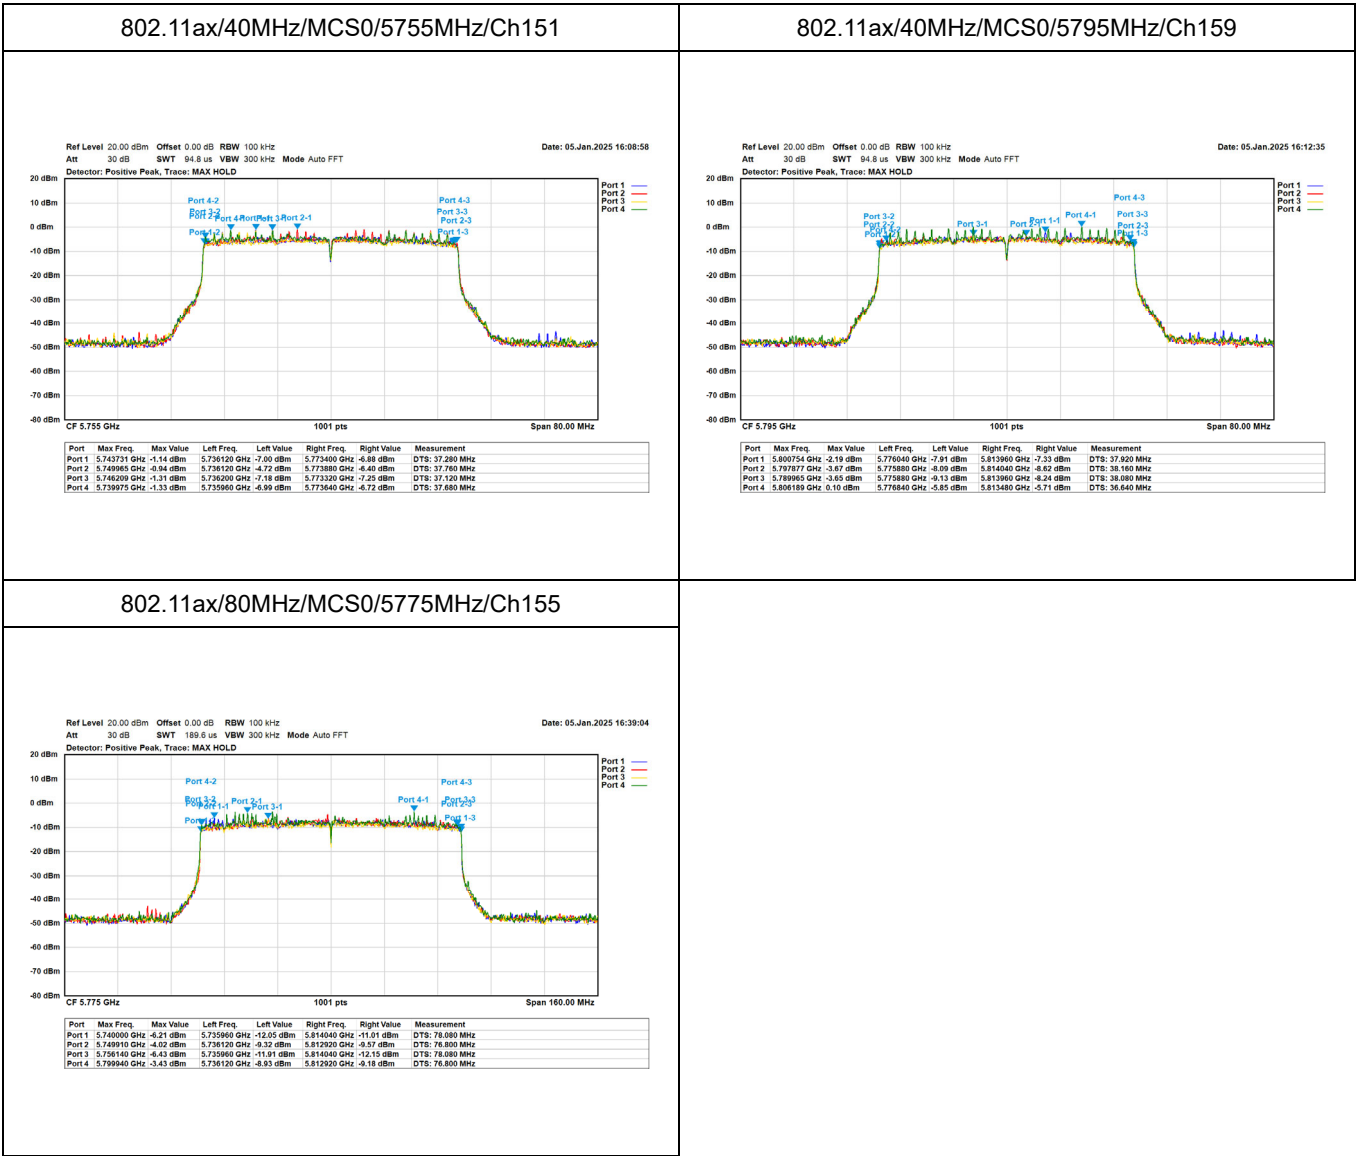

Appendix C. Test Result of Maximum Conducted Output Power

Master mode

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5180	6.10	5.94	6.06	5.78	11.99	19.62	Pass
	5220	6.33	6.13	6.00	5.96	12.13	19.62	Pass
	5240	6.13	6.43	6.46	6.24	12.34	19.62	Pass
	5745	12.84	12.85	12.25	13.20	18.82	19.06	Pass
	5785	12.80	13.04	12.16	12.98	18.78	19.06	Pass
	5825	12.54	12.64	12.04	12.93	18.57	19.06	Pass
802.11ax (20MHz)	5180	7.68	7.58	7.63	7.41	13.60	19.62	Pass
	5220	6.69	6.38	6.44	6.32	12.48	19.62	Pass
	5240	6.83	6.54	6.73	6.61	12.70	19.62	Pass
	5745	12.87	12.90	12.19	13.05	18.79	19.06	Pass
	5785	12.67	12.89	11.91	12.68	18.57	19.06	Pass
	5825	12.75	13.00	12.22	13.34	18.87	19.06	Pass
802.11ax (40MHz)	5190	7.69	7.28	7.61	7.55	13.56	19.62	Pass
	5230	9.40	9.18	9.13	8.99	15.20	19.62	Pass
	5755	12.75	12.92	12.19	12.99	18.74	19.06	Pass
	5795	13.01	13.25	12.38	13.20	18.99	19.06	Pass
802.11ax (80MHz)	5210	7.71	7.55	7.50	7.35	13.55	19.62	Pass
	5775	13.03	13.16	12.32	13.14	18.95	19.06	Pass

Note: Total Output Power (dBm) = $10 \cdot \log (\text{Ant. 1 (mW)} + \text{Ant. 2 (mW)} + \text{Ant. 3 (mW)} + \text{Ant. 4 (mW)})$.

Slave mode

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5180	1.59	1.51	1.46	1.35	7.50	13.62	Pass
	5220	0.88	0.62	0.57	0.55	6.68	13.62	Pass
	5240	1.22	1.09	1.31	1.25	7.24	13.62	Pass
	5745	12.84	12.85	12.25	13.20	18.82	19.06	Pass
	5785	12.80	13.04	12.16	12.98	18.78	19.06	Pass
	5825	12.54	12.64	12.04	12.93	18.57	19.06	Pass
802.11ax (20MHz)	5180	1.62	1.47	1.48	1.24	7.48	13.62	Pass
	5220	1.23	0.93	0.88	0.84	6.99	13.62	Pass
	5240	1.10	0.97	1.19	1.05	7.10	13.62	Pass
	5745	12.87	12.90	12.19	13.05	18.79	19.06	Pass
	5785	12.67	12.89	11.91	12.68	18.57	19.06	Pass
	5825	12.75	13.00	12.22	13.34	18.87	19.06	Pass
802.11ax (40MHz)	5190	4.19	4.06	4.55	4.17	10.27	13.62	Pass
	5230	3.80	3.58	3.62	3.67	9.69	13.62	Pass
	5755	12.75	12.92	12.19	12.99	18.74	19.06	Pass
	5795	13.01	13.25	12.38	13.20	18.99	19.06	Pass
802.11ax (80MHz)	5210	5.98	5.80	5.93	5.76	11.89	13.62	Pass
	5775	13.03	13.16	12.32	13.14	18.95	19.06	Pass

Note: Total Output Power (dBm) = $10 \cdot \log (\text{Ant. 1 (mW)} + \text{Ant. 2 (mW)} + \text{Ant. 3 (mW)} + \text{Ant. 4 (mW)})$.

Appendix D. Test Result of Maximum Power Spectral Density

Master mode


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)					Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5180	-6.26	-6.11	-5.41	-5.43	0.41	0.60	Pass
	5220	-5.77	-6.36	-5.85	-5.32	0.18	0.60	Pass
	5240	-6.01	-6.06	-5.22	-5.82	0.40	0.60	Pass
802.11ax (20MHz)	5180	-5.95	-6.29	-5.22	-4.78	0.35	0.60	Pass
	5220	-5.82	-5.47	-6.20	-5.11	0.10	0.60	Pass
	5240	-5.16	-6.16	-4.82	-5.27	0.41	0.60	Pass
802.11ax (40MHz)	5190	-8.28	-8.61	-8.20	-7.92	-2.56	0.60	Pass
	5230	-5.88	-6.15	-5.53	-5.20	0.11	0.60	Pass
802.11ax (80MHz)	5210	-10.35	-10.34	-10.30	-10.34	-4.53	0.60	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.


Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)					Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5745	-0.60	-1.25	-1.34	-0.27	5.18	13.04	Pass
	5785	-1.78	-1.20	-1.76	-0.86	4.78	13.04	Pass
	5825	-1.35	-1.14	-1.61	0.26	5.22	13.04	Pass
802.11ax (20MHz)	5745	-1.30	-0.96	-1.50	-0.55	4.73	13.04	Pass
	5785	-2.07	-1.51	-2.14	-1.69	4.00	13.04	Pass
	5825	-1.29	-0.94	-0.65	0.26	5.11	13.04	Pass
802.11ax (40MHz)	5755	-4.48	-4.26	-4.52	-3.50	1.52	13.04	Pass
	5795	-4.17	-4.00	-4.70	-3.25	1.65	13.04	Pass
802.11ax (80MHz)	5775	-7.31	-6.96	-7.53	-6.55	-1.27	13.04	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.


802.11a/20MHz/6M/5180MHz/Ch36

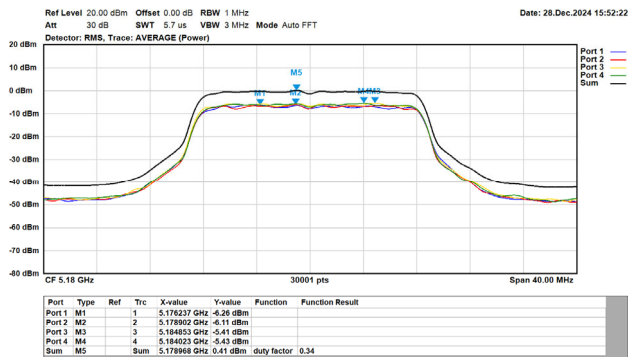


802.11a/20MHz/6M/5220MHz/Ch44

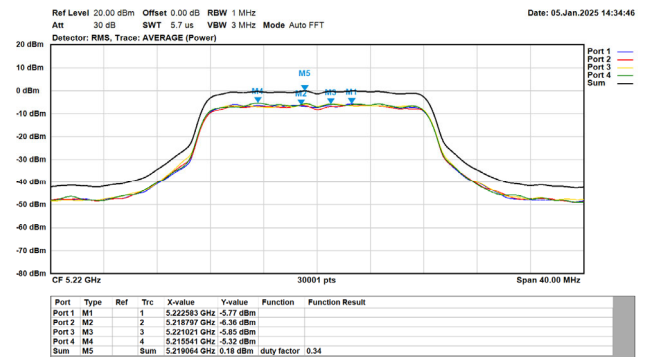


802.11a/20MHz/6M/5240MHz/Ch48

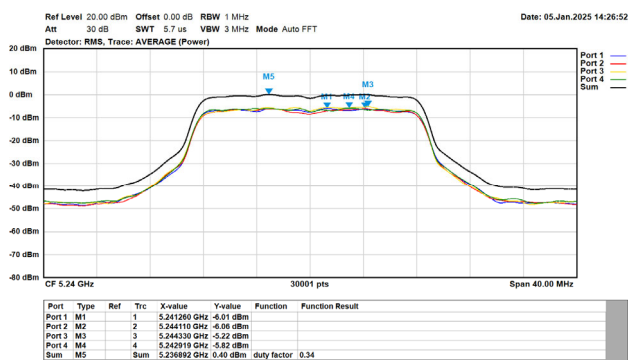


802.11ax/20MHz/MCS0/5180MHz/Ch36

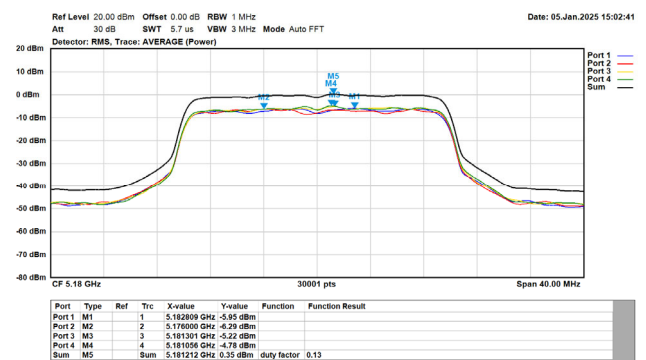



802.11ax/20MHz/MCS0/5220MHz/Ch44

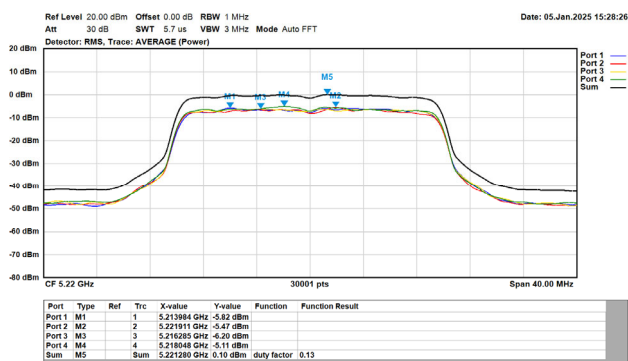

802.11ax/20MHz/MCS0/5240MHz/Ch48

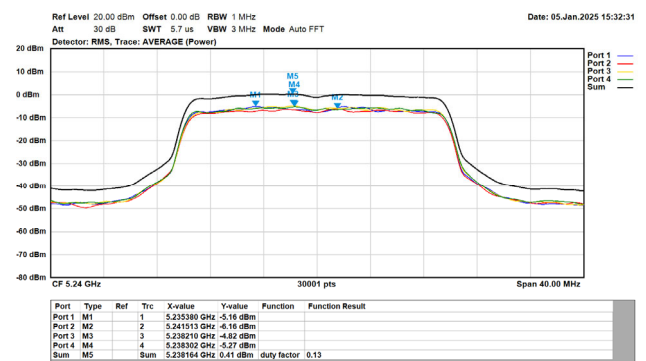

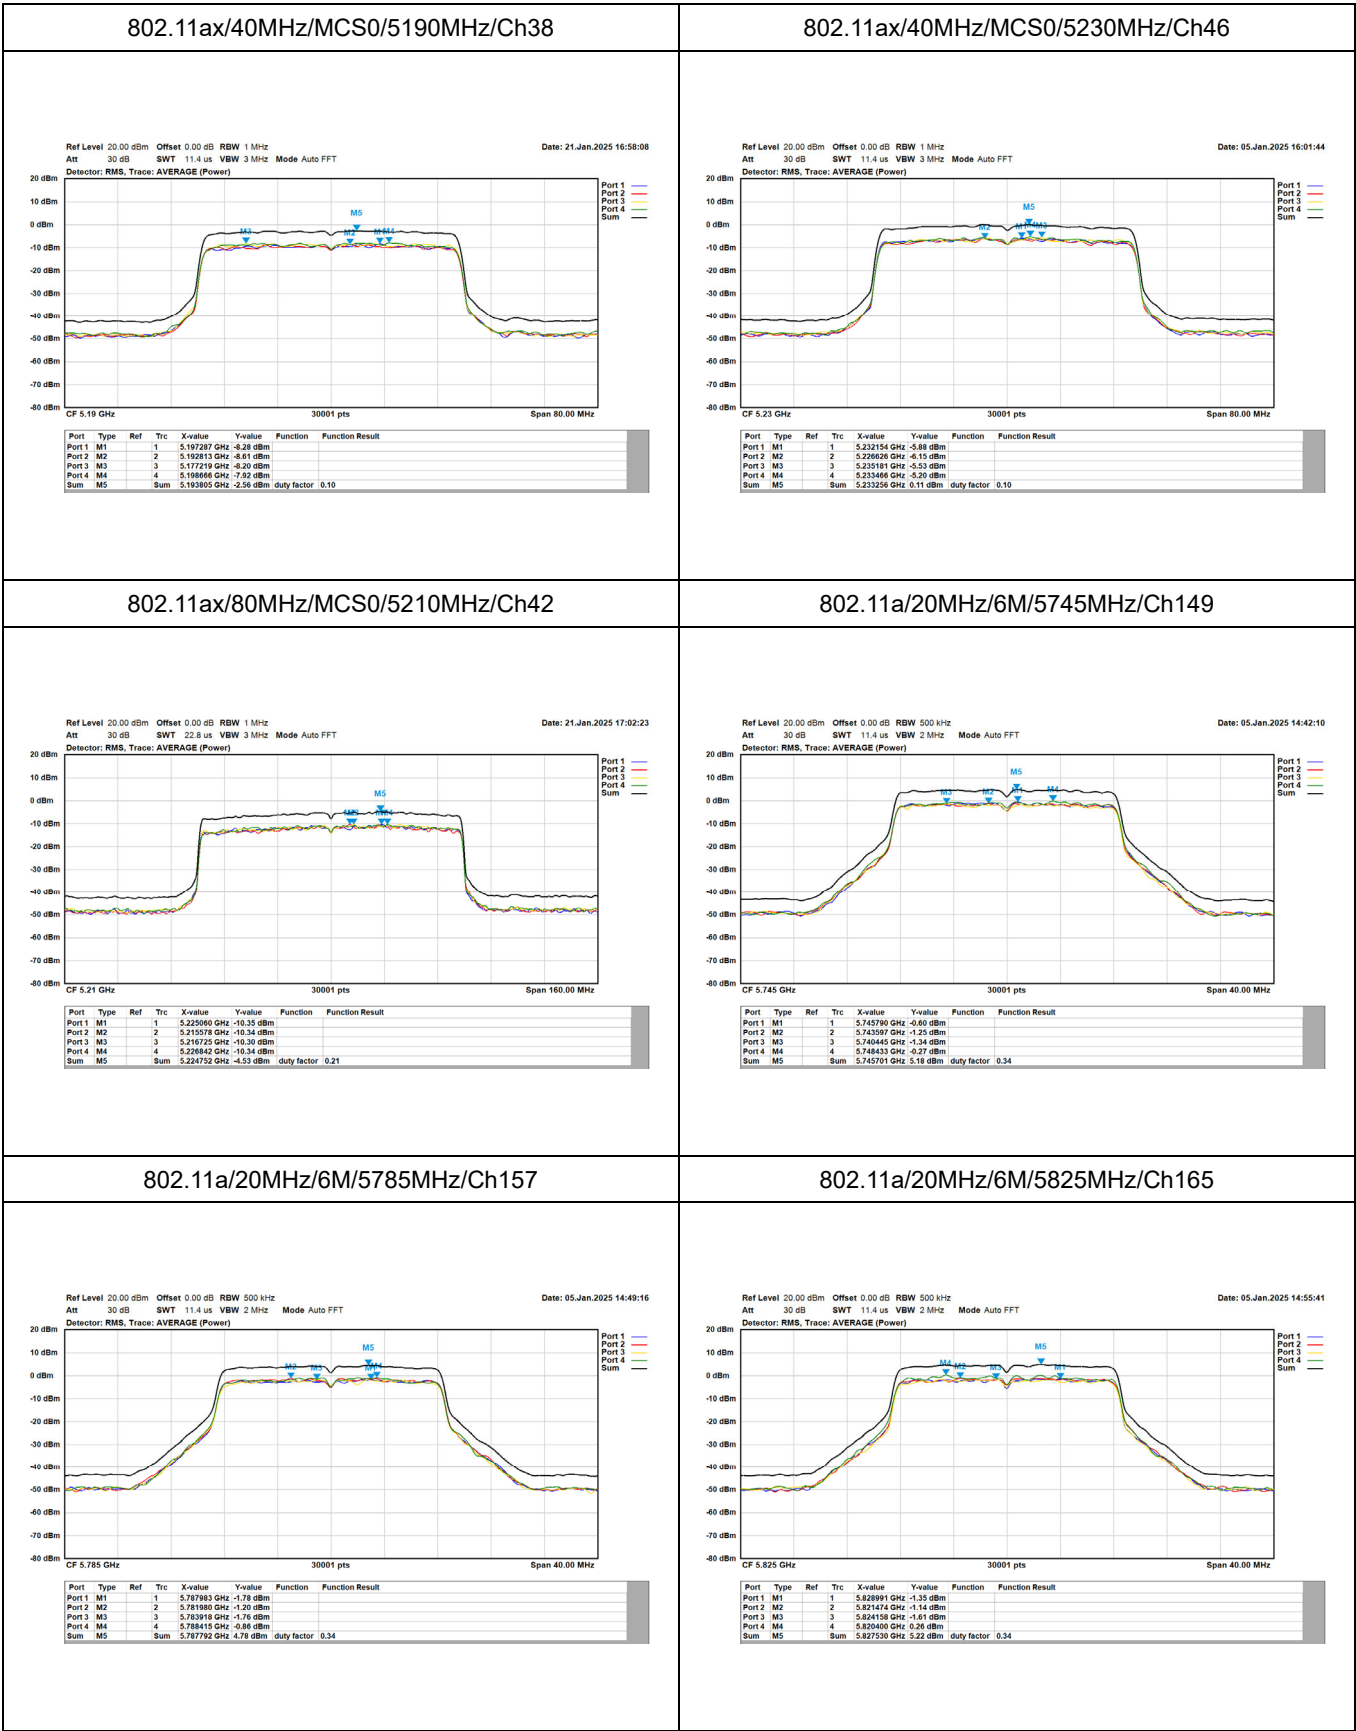

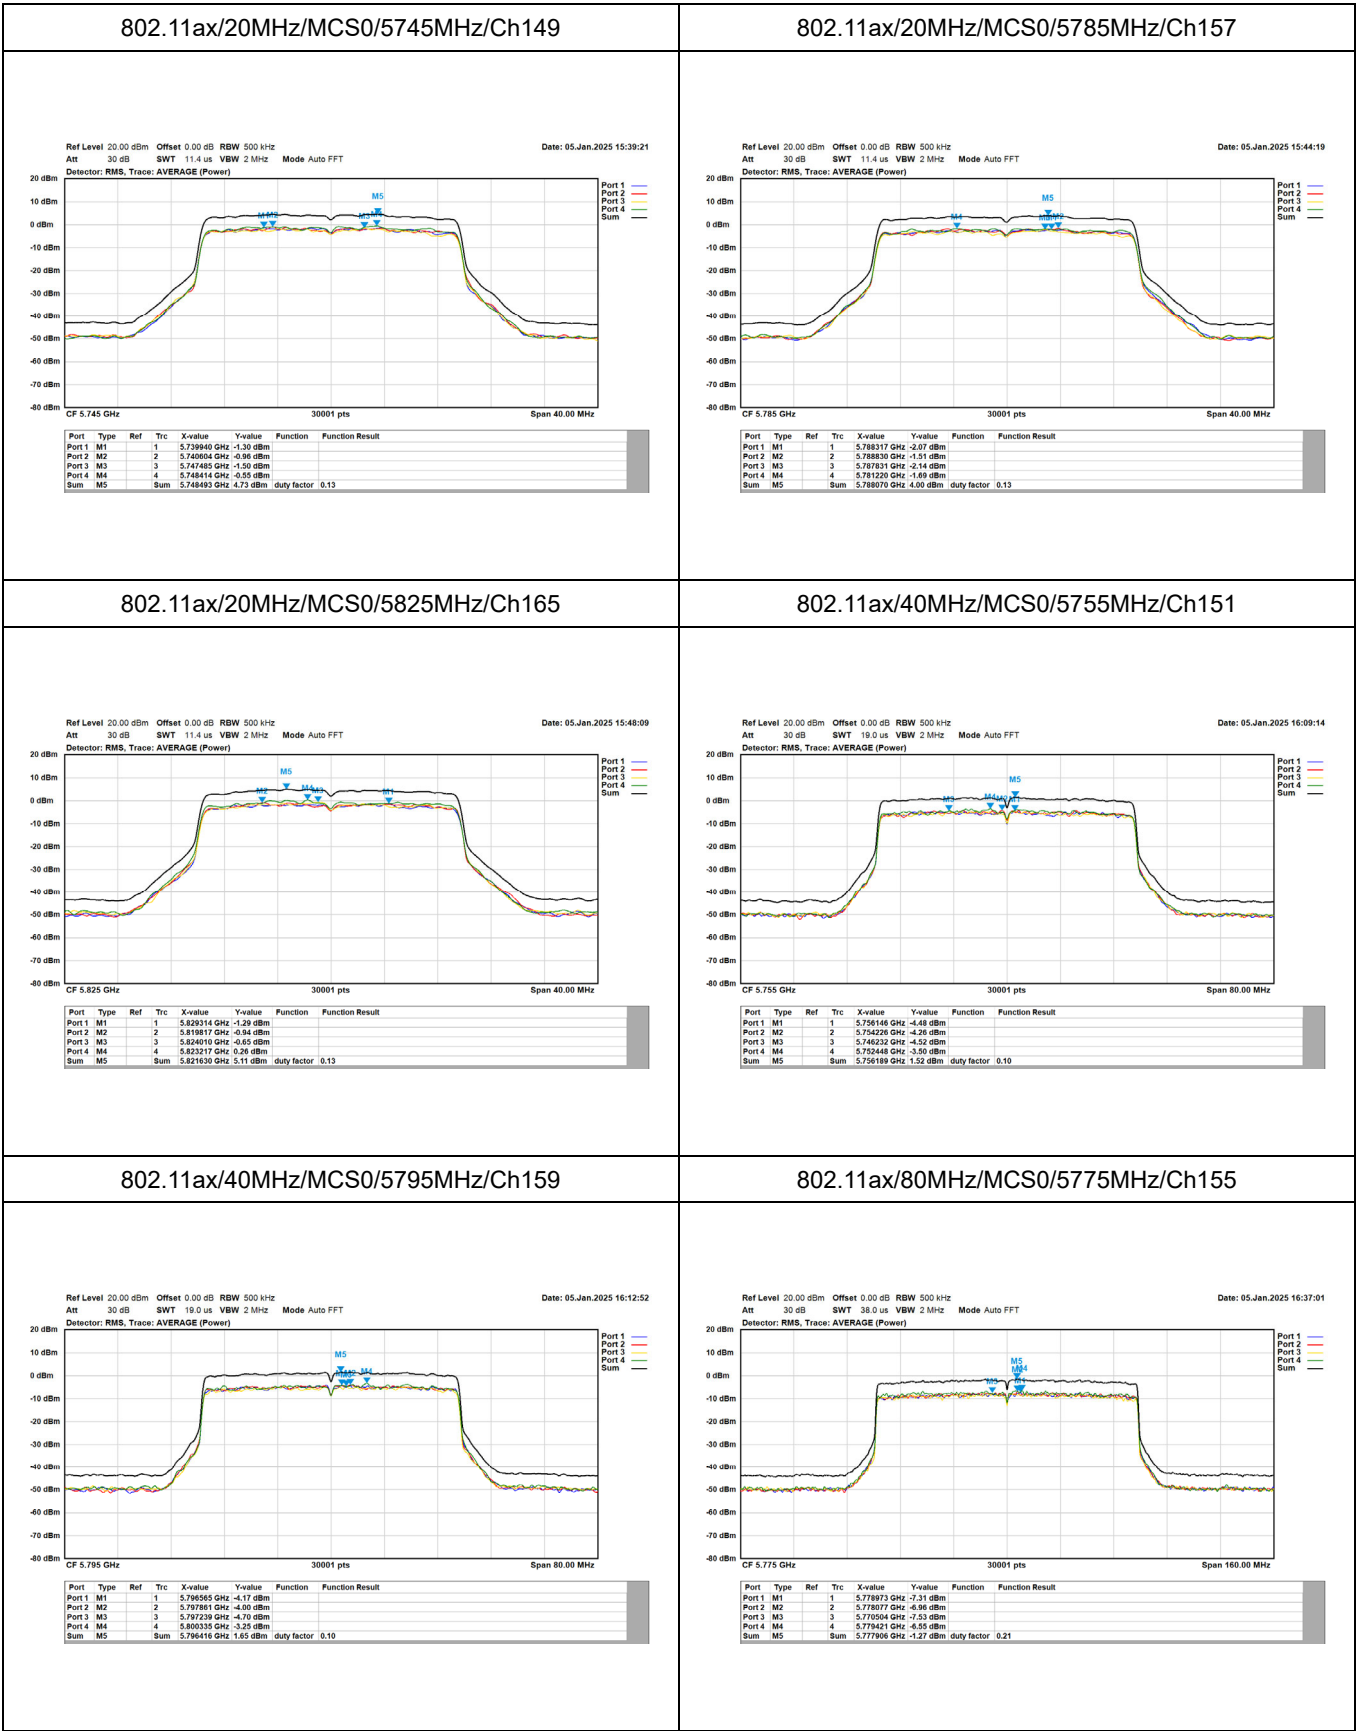


Slave mode


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)					Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5180	-12.35	-11.83	-11.35	-11.46	-5.91	-5.40	Pass
	5220	-12.10	-12.46	-11.56	-11.42	-5.85	-5.40	Pass
	5240	-12.35	-12.49	-11.08	-11.30	-5.80	-5.40	Pass
802.11ax (20MHz)	5180	-12.08	-12.06	-11.42	-11.36	-5.90	-5.40	Pass
	5220	-11.77	-11.99	-11.17	-11.50	-5.93	-5.40	Pass
	5240	-11.83	-12.68	-11.56	-10.80	-5.81	-5.40	Pass
802.11ax (40MHz)	5190	-12.11	-11.56	-10.66	-11.08	-5.56	-5.40	Pass
	5230	-11.64	-11.98	-11.20	-11.35	-5.63	-5.40	Pass
802.11ax (80MHz)	5210	-12.23	-12.13	-12.07	-11.72	-6.03	-5.40	Pass


Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density

Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)					Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total		
802.11a (20MHz)	5745	-0.60	-1.25	-1.34	-0.27	5.18	13.04	Pass
	5785	-1.78	-1.20	-1.76	-0.86	4.78	13.04	Pass
	5825	-1.35	-1.14	-1.61	0.26	5.22	13.04	Pass
802.11ax (20MHz)	5745	-1.30	-0.96	-1.50	-0.55	4.73	13.04	Pass
	5785	-2.07	-1.51	-2.14	-1.69	4.00	13.04	Pass
	5825	-1.29	-0.94	-0.65	0.26	5.11	13.04	Pass
802.11ax (40MHz)	5755	-4.48	-4.26	-4.52	-3.50	1.52	13.04	Pass
	5795	-4.17	-4.00	-4.70	-3.25	1.65	13.04	Pass
802.11ax (80MHz)	5775	-7.31	-6.96	-7.53	-6.55	-1.27	13.04	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density

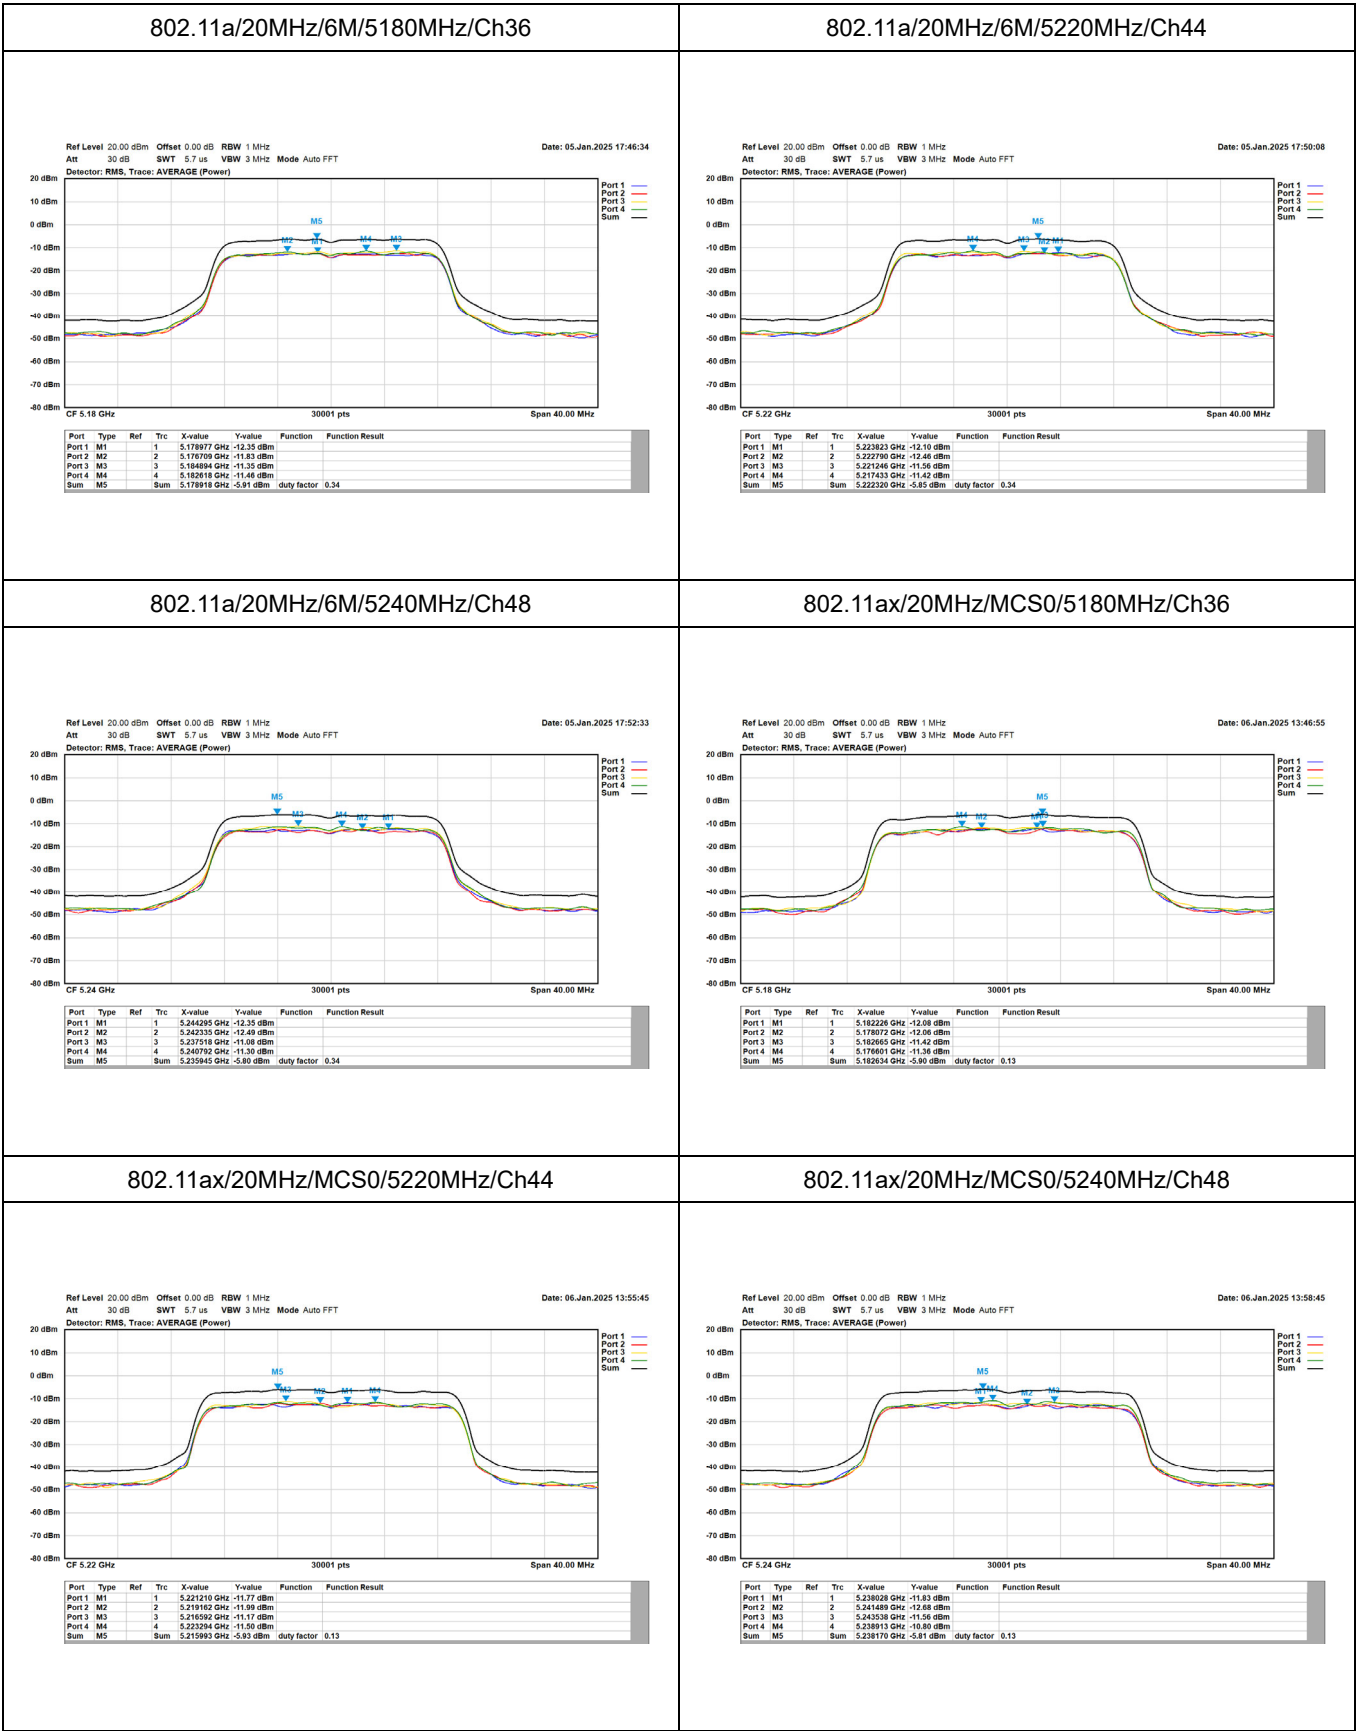

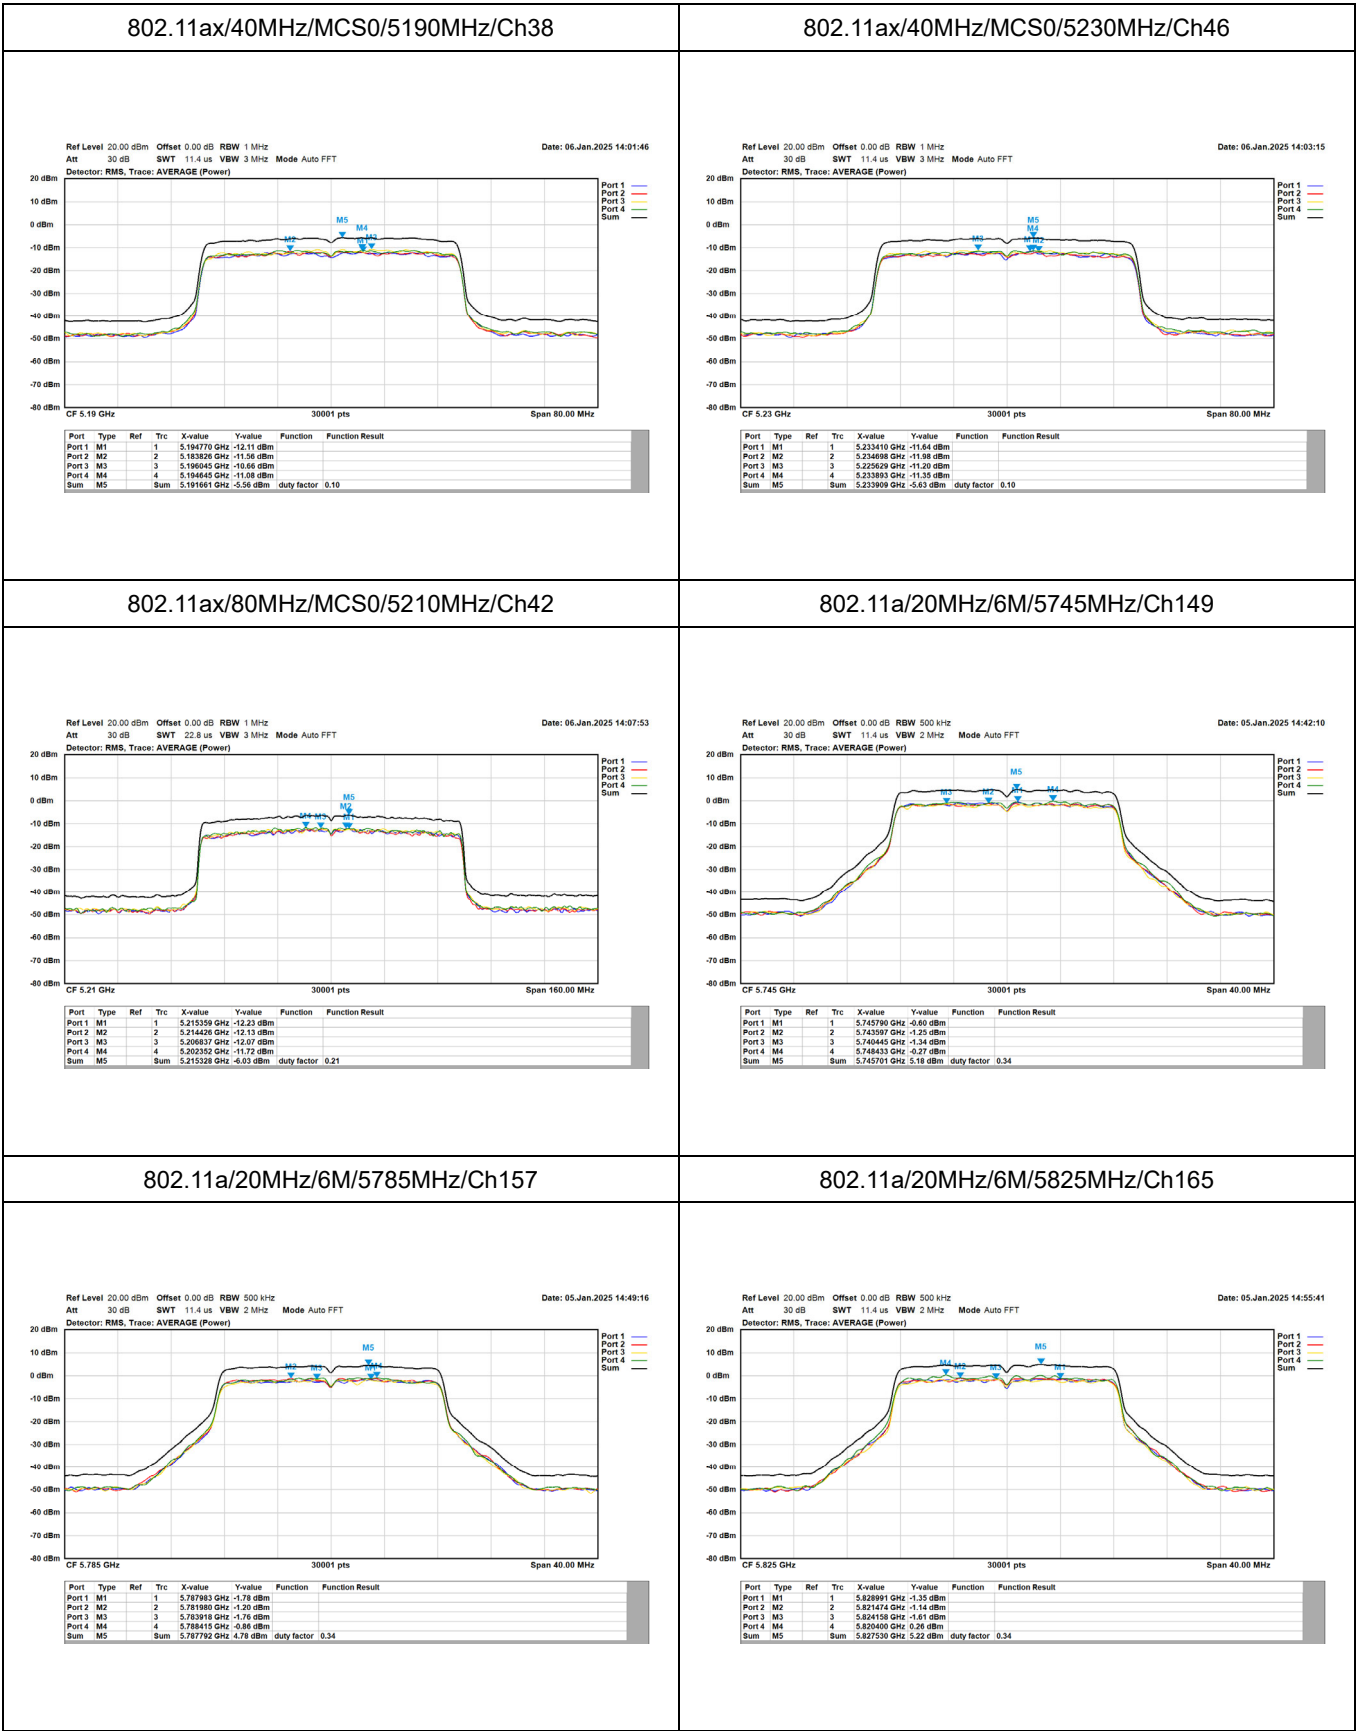


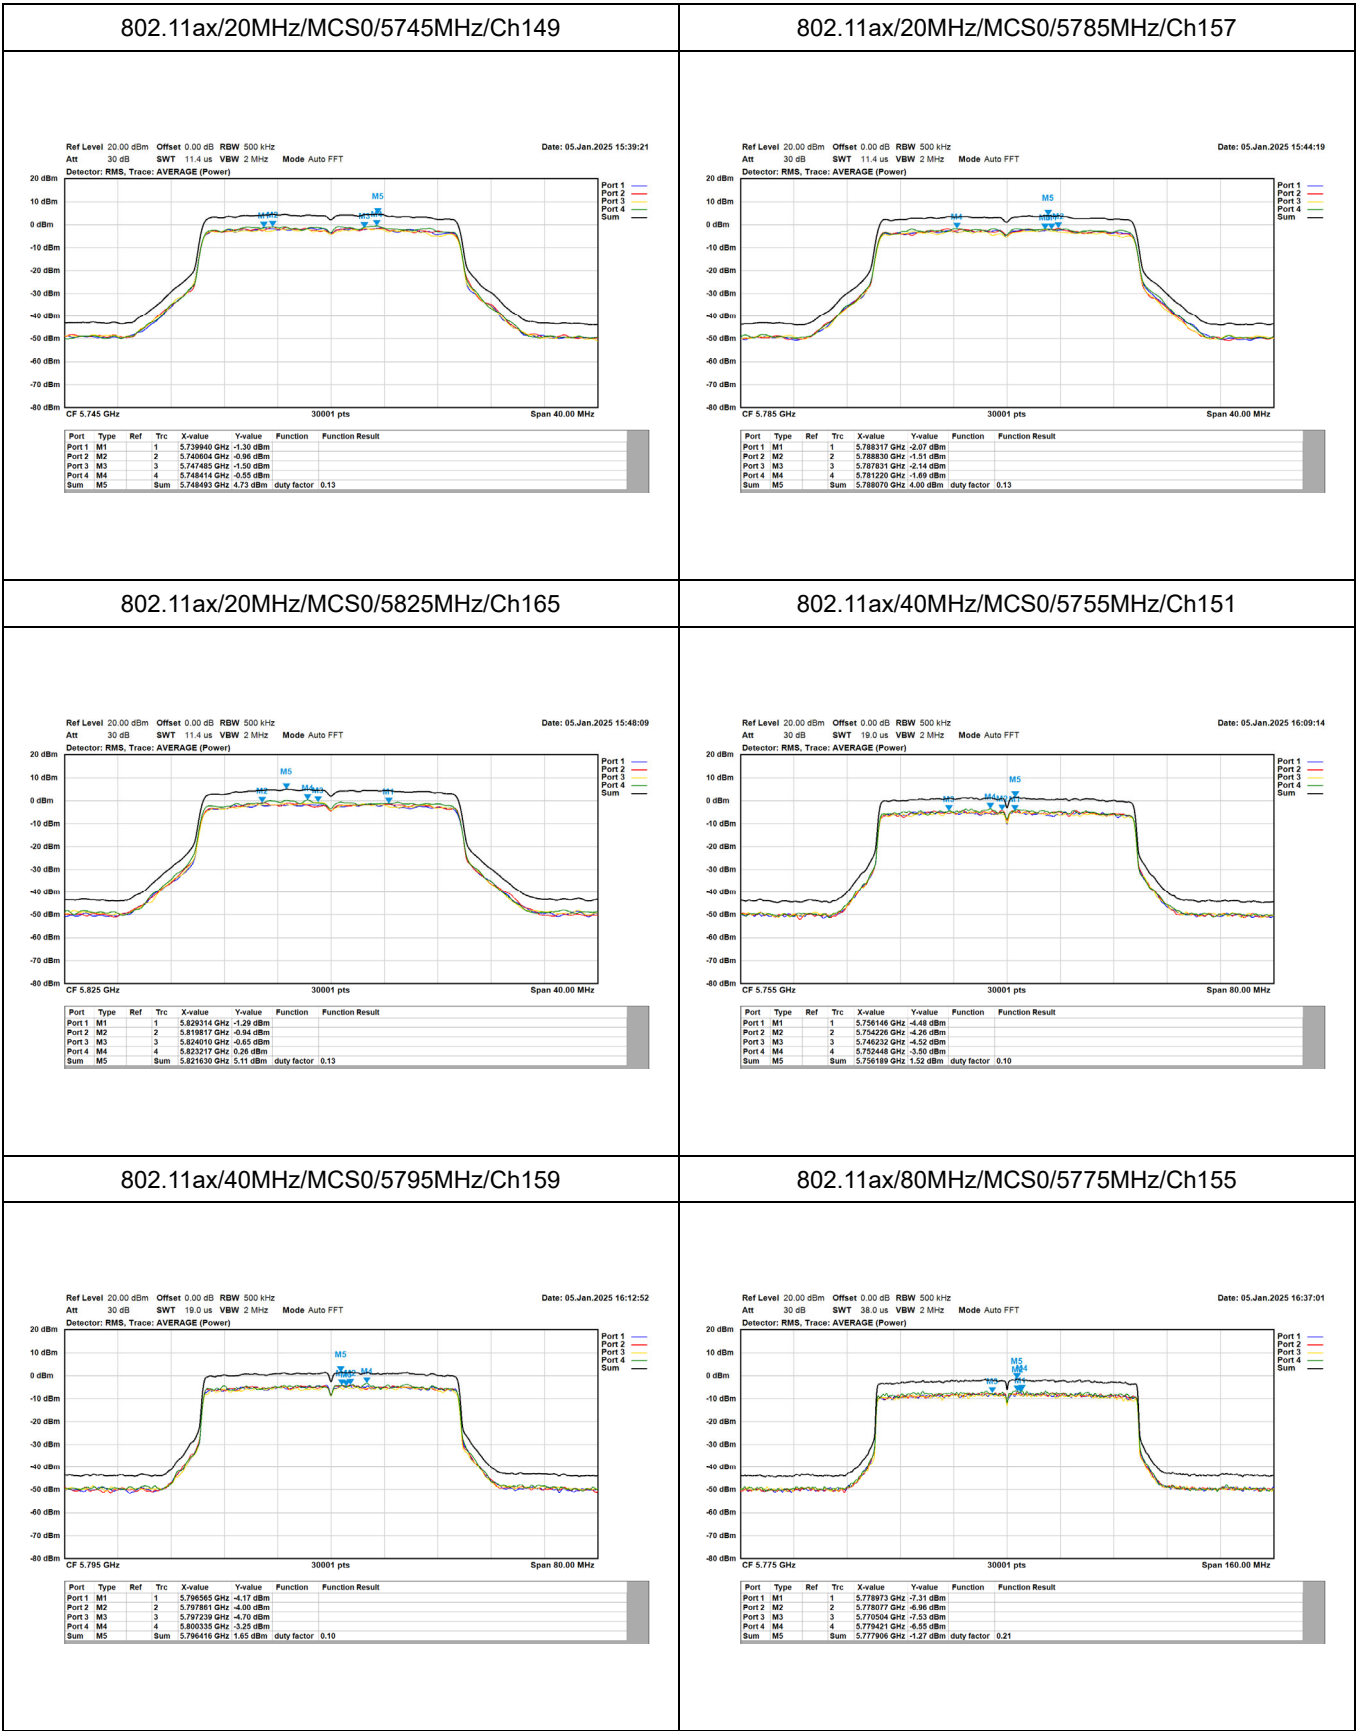

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Model No.: TAP-M310R-1P2R1S-US-CT-T


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5180MHz
Test by :Caster

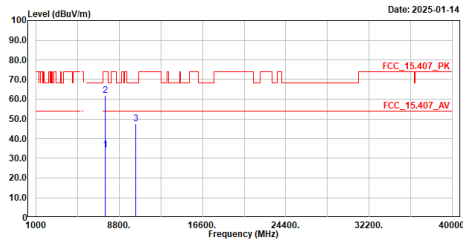

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7478.700	34.26	54.00	-19.74	34.39	-0.13	Average
2	7478.700	61.85	74.00	-12.15	61.98	-0.13	Peak
3	10360.000	47.59	68.22	-20.63	44.73	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Caster

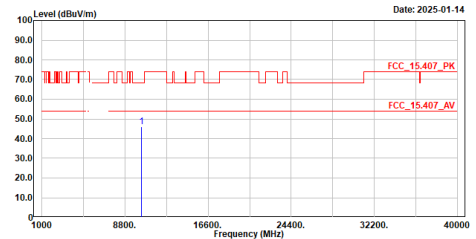

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	45.93	68.22	-22.29	43.07	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5220MHz
Test by :Caster

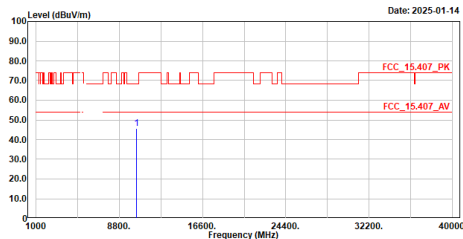

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	45.53	68.22	-22.69	42.69	2.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5220MHz
Test by :Caster

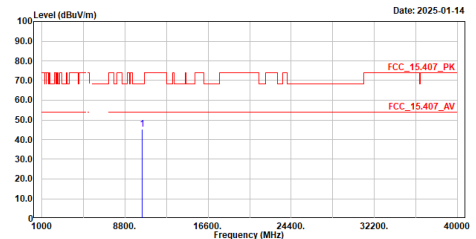

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	45.42	68.22	-22.80	42.58	2.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Caster

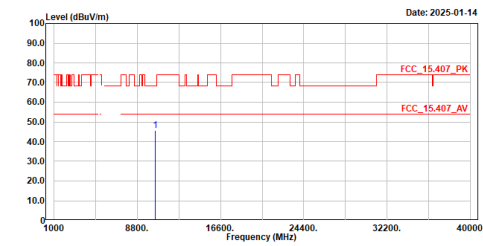


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	45.58	68.22	-22.64	42.73	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Caster

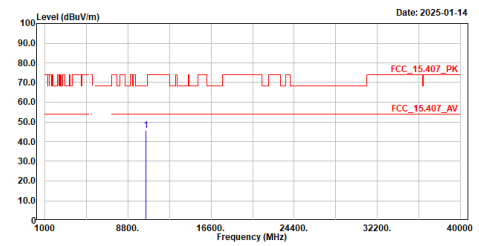


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	45.70	68.22	-22.52	42.85	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5745MHz
Test by :Caster

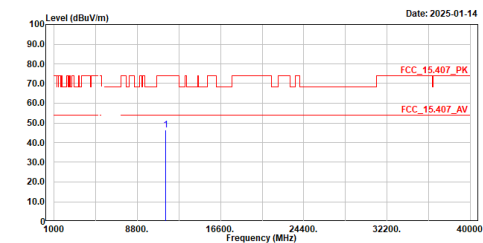


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	46.30	74.00	-27.70	41.93	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5745MHz
Test by :Caster

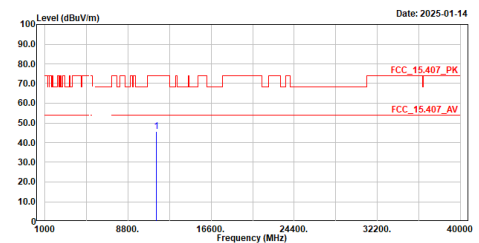


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	45.77	74.00	-28.23	41.40	4.37	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5180MHz
Test by :Caster

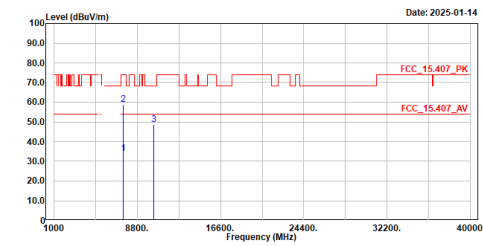


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	7482.100	33.89	54.00	-20.11	34.04	-0.15	Average
2	7482.100	59.01	74.00	-14.99	59.16	-0.15	Peak
3	10360.000	48.80	68.22	-19.42	45.94	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5180MHz
Test by :Caster

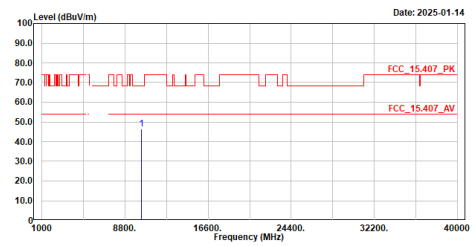


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	46.39	68.22	-21.83	43.53	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5220MHz
Test by :Caster

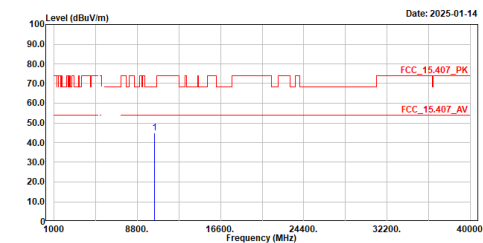


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	45.08	68.22	-23.14	42.24	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5220MHz
Test by :Caster

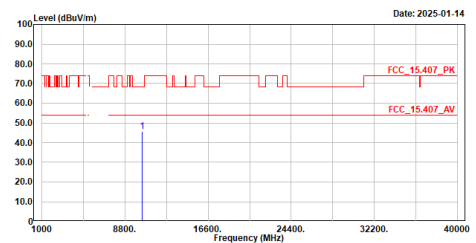


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	45.56	68.22	-22.66	42.72	2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5240MHz
Test by :Caster

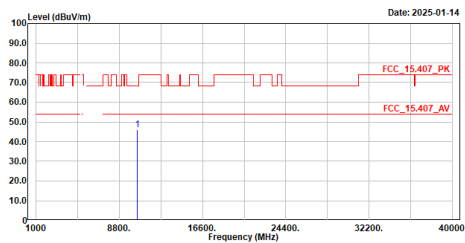


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	45.96	68.22	-22.26	43.11	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5240MHz
Test by :Caster

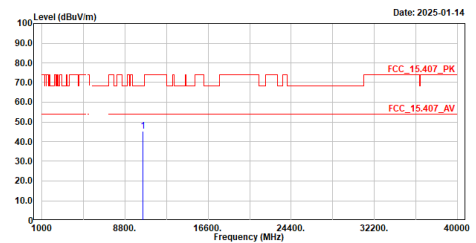


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	45.18	68.22	-23.04	42.33	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5745MHz
Test by :Caster

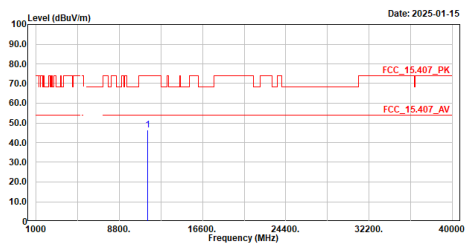


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	46.32	74.00	-27.68	41.95	4.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5745MHz
Test by :Caster

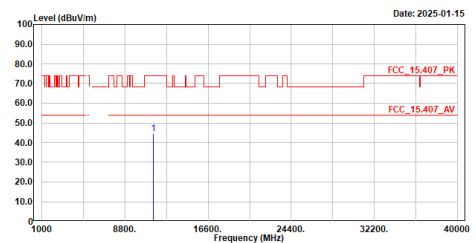


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	44.63	74.00	-29.37	40.26	4.37	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5755MHz
Test by :Caster

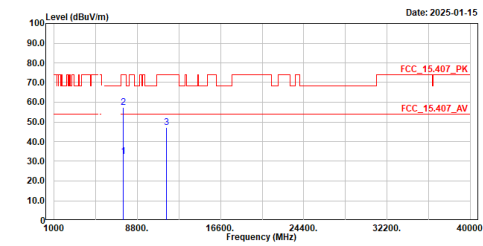


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7509.300	32.55	54.00	-21.45	32.78	-0.23	Average
2	7509.300	57.41	74.00	-16.59	57.64	-0.23	Peak
3	11510.000	46.99	74.00	-27.01	42.61	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5755MHz
Test by :Caster

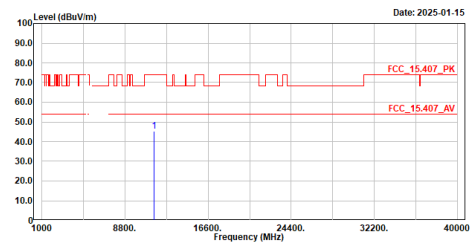


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	45.37	74.00	-28.63	40.99	4.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5795MHz
Test by :Caster

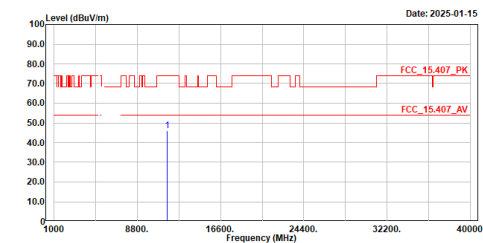


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	45.89	74.00	-28.11	41.39	4.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5795MHz
Test by :Caster

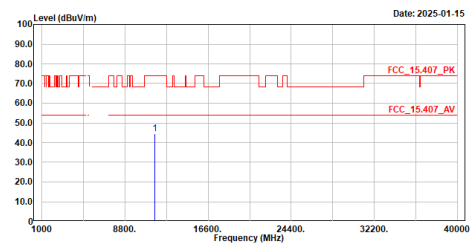


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	44.45	74.00	-29.55	39.95	4.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5210MHz
Test by :Caster

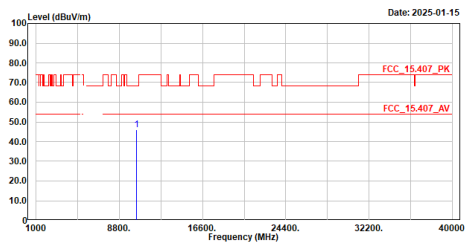


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	46.05	68.22	-22.17	43.19	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5210MHz
Test by :Caster

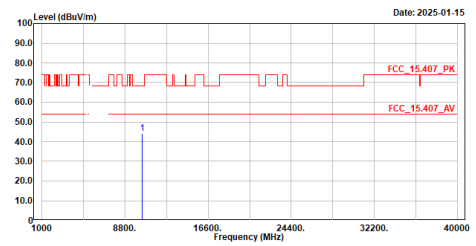


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	44.30	68.22	-23.92	41.44	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5775MHz
Test by :Caster

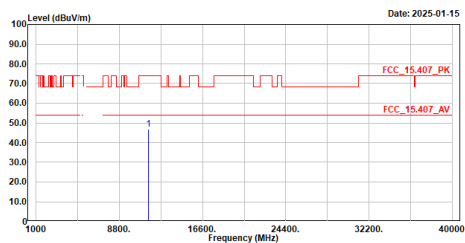


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	46.74	74.00	-27.26	42.27	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5775MHz
Test by :Caster

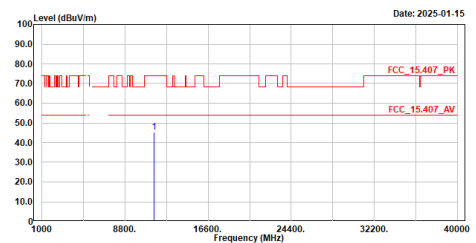


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	45.35	74.00	-28.65	40.88	4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax80_5775MHz
Test by :Peter

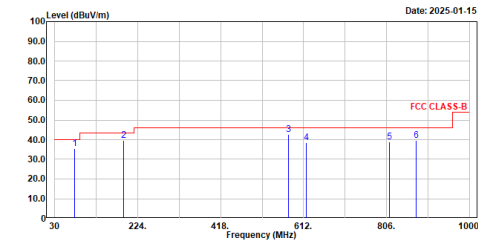


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	76.560	35.44	40.00	-4.56	63.52	-28.08	QP
2	191.990	39.44	43.50	-4.06	66.04	-26.60	QP
3	576.110	42.70	46.00	-3.30	59.02	-16.32	QP
4	617.820	38.62	46.00	-7.38	54.07	-15.45	QP
5	812.790	38.81	46.00	-7.19	51.27	-12.46	QP
6	875.840	39.78	46.00	-6.22	51.81	-12.03	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5775MHz
Test by :Peter

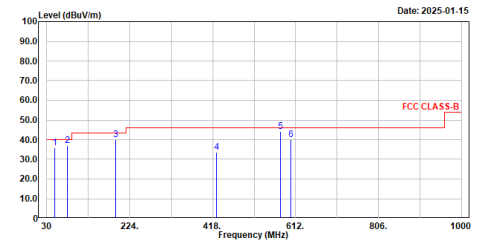


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	48.430	35.87	40.00	-4.13	59.21	-23.34	QP
2	77.530	37.09	40.00	-2.91	65.50	-28.41	QP
3	191.990	39.90	43.50	-3.60	66.50	-26.60	QP
4	427.700	33.46	46.00	-12.54	53.21	-19.75	QP
5	576.110	43.98	46.00	-2.02	60.30	-16.32	QP
6	601.330	40.15	46.00	-5.85	55.59	-15.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Peter

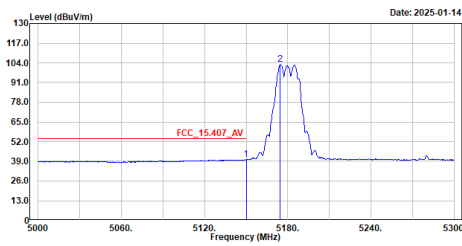


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	40.25	54.00	-13.75	25.73	14.52	Average
2	5174.600	102.84	-----	-----	88.35	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Peter

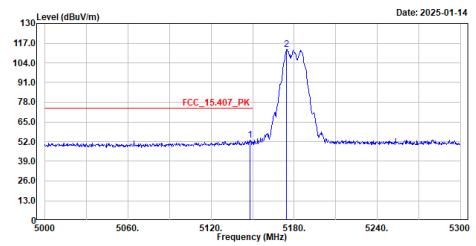


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	52.96	74.00	-21.04	38.44	14.52	Peak
2	5174.600	112.70	-----	-----	98.21	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Peter

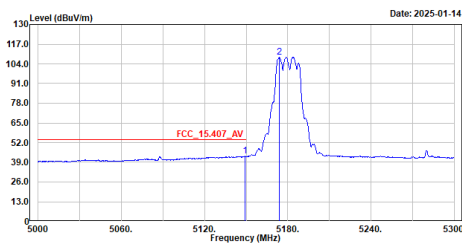


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	42.99	54.00	-11.01	28.47	14.52	Average
2	5173.700	108.42	-----	-----	93.93	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Peter

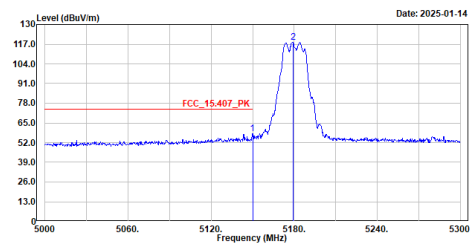


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	58.02	74.00	-15.98	43.50	14.52	Peak
2	5179.100	118.29	-----	-----	103.81	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5220MHz
Test by :Peter

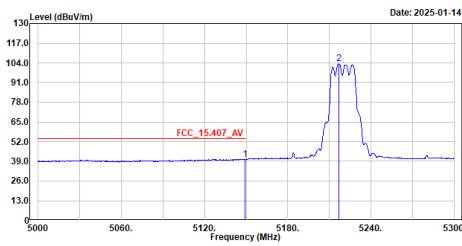

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	40.42	54.00	-13.58	25.90	14.52	Average
2	5216.900	103.47	-----	-----	88.98	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5220MHz
Test by :Peter

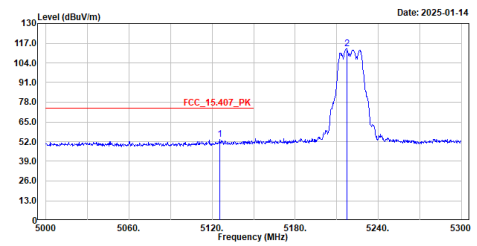

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5125.400	53.41	74.00	-20.59	38.90	14.51	Peak
2	5217.200	113.21	-----	-----	98.71	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5220MHz
Test by :Peter

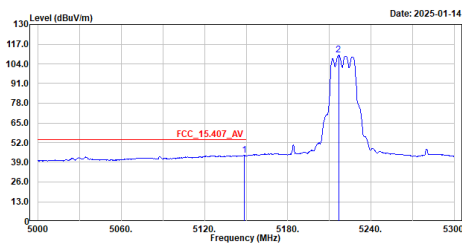

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.500	43.63	54.00	-10.37	29.11	14.52	Average
2	5216.600	109.79	-----	-----	95.30	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5220MHz
Test by :Peter

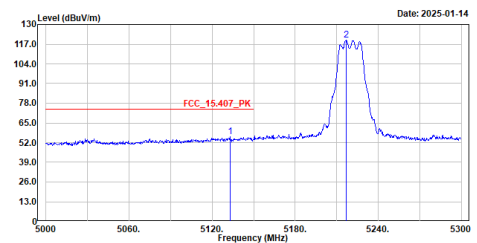

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5132.900	55.81	74.00	-18.19	41.30	14.51	Peak
2	5216.900	119.48	-----	-----	104.99	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5240MHz
Test by :Peter

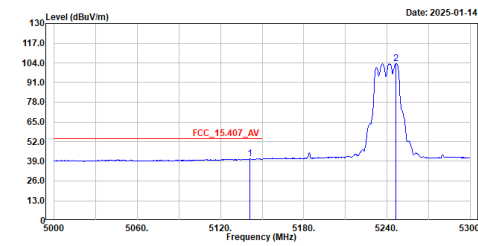


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5141.000	40.70	54.00	-13.30	26.19	14.51	Average
2	5246.300	103.70	-----	-----	89.20	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5240MHz
Test by :Peter

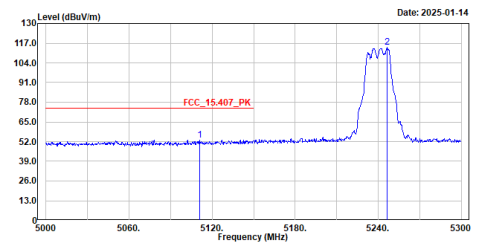


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5111.300	53.05	74.00	-20.95	38.55	14.50	Peak
2	5246.600	114.28	-----	-----	99.78	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5240MHz
Test by :Peter

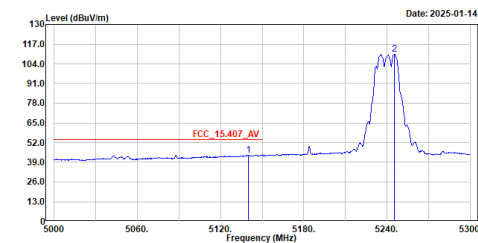


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5140.100	43.71	54.00	-10.29	29.20	14.51	Average
2	5245.100	110.46	-----	-----	95.97	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5240MHz
Test by :Peter

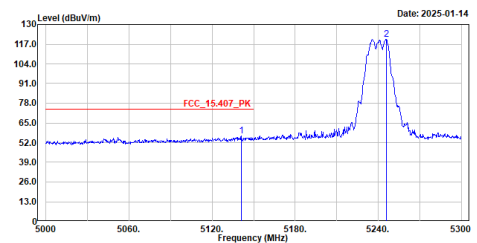


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5141.000	56.38	74.00	-17.62	41.87	14.51	Peak
2	5245.700	120.18	-----	-----	105.68	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5745MHz
Test by :Peter

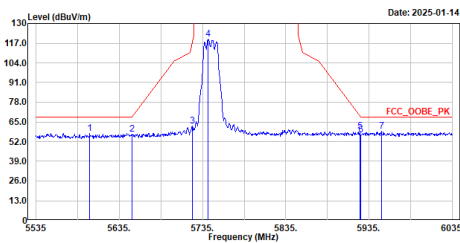


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5599.500	57.40	68.20	-10.80	42.02	15.38	Peak
2	5650.000	56.73	68.21	-11.48	40.96	15.77	Peak
3	5723.000	62.28	117.64	-55.36	45.90	16.38	Peak
4	5742.000	119.59	-----	-----	103.11	16.48	Peak
5	5924.000	58.77	68.95	-10.18	42.04	16.73	Peak
6	5925.000	56.48	68.21	-11.73	39.75	16.73	Peak
7	5950.000	58.94	68.20	-9.26	42.20	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5745MHz
Test by :Peter

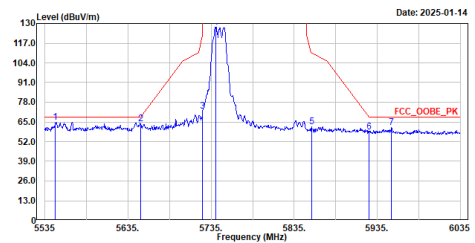


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5547.500	64.76	68.20	-3.44	49.45	15.31	Peak
2	5650.000	63.88	68.21	-4.33	48.11	15.77	Peak
3	5725.000	72.13	122.20	-50.07	55.74	16.39	Peak
4	5741.000	127.79	-----	-----	111.32	16.47	Peak
5	5856.000	61.80	110.52	-48.72	45.36	16.44	Peak
6	5925.000	58.21	68.21	-10.00	41.48	16.73	Peak
7	5952.000	61.15	68.20	-7.05	44.42	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5785MHz
Test by :Caster

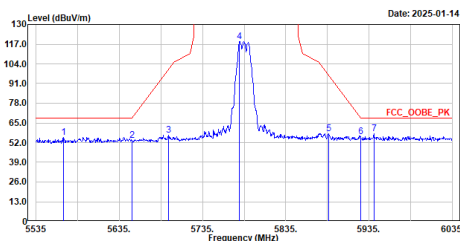


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5568.000	55.56	68.20	-12.64	40.22	15.34	Peak
2	5650.000	53.39	68.21	-14.82	37.62	15.77	Peak
3	5694.500	56.94	101.13	-44.19	40.73	16.21	Peak
4	5779.500	118.80	-----	-----	102.27	16.53	Peak
5	5887.000	58.13	96.32	-38.19	41.56	16.57	Peak
6	5925.000	55.79	68.21	-12.42	39.06	16.73	Peak
7	5941.000	57.65	68.20	-10.55	40.90	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5785MHz
Test by :Caster

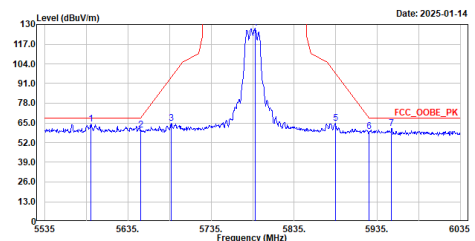


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5590.500	64.21	68.20	-3.99	48.86	15.35	Peak
2	5650.000	60.24	68.21	-7.97	44.47	15.77	Peak
3	5687.000	64.89	95.58	-30.69	48.75	16.14	Peak
4	5780.000	127.55	-----	-----	111.03	16.52	Peak
5	5884.500	64.61	98.17	-33.56	48.05	16.56	Peak
6	5925.000	59.40	68.21	-8.81	42.67	16.73	Peak
7	5952.000	61.34	68.20	-6.86	44.61	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5825MHz
Test by :Caster

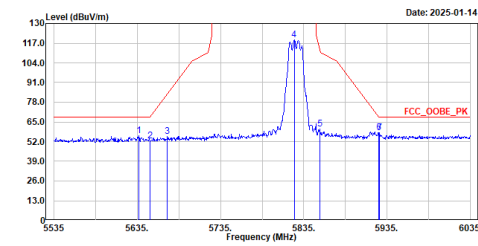


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5636.500	55.94	68.20	-12.26	40.26	15.68	Peak
2	5650.000	52.40	68.21	-15.81	36.63	15.77	Peak
3	5671.000	55.64	83.74	-28.10	39.66	15.98	Peak
4	5823.500	119.16	-----	-----	102.70	16.46	Peak
5	5854.000	60.10	113.08	-52.98	43.67	16.43	Peak
6	5925.000	57.71	68.21	-10.50	40.98	16.73	Peak
7	5926.000	58.88	68.20	-10.12	41.35	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5825MHz
Test by :Caster

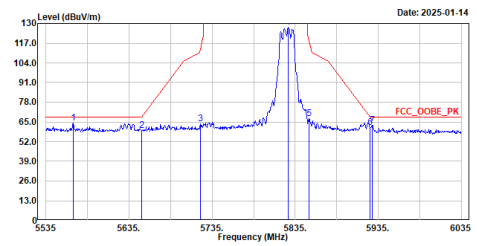


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5568.000	64.24	68.20	-3.96	48.90	15.34	Peak
2	5650.000	59.41	68.21	-8.80	43.64	15.77	Peak
3	5721.000	63.73	113.08	-49.35	47.37	16.36	Peak
4	5826.500	127.31	-----	-----	110.85	16.46	Peak
5	5852.000	67.43	117.64	-50.21	51.00	16.43	Peak
6	5925.000	61.21	68.21	-7.00	44.48	16.73	Peak
7	5928.000	62.72	68.20	-5.48	45.98	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5180MHz
Test by :Caster

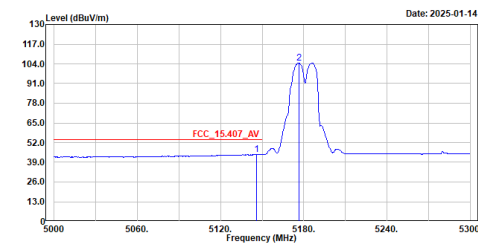


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.800	44.31	54.00	-9.69	29.80	14.51	Average
2	5176.400	104.59	-----	-----	90.10	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5180MHz
Test by :Caster

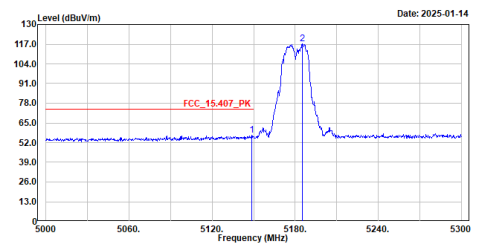


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	56.76	74.00	-17.24	42.24	14.52	Peak
2	5185.100	117.44	-----	-----	102.95	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5180MHz
Test by :Caster

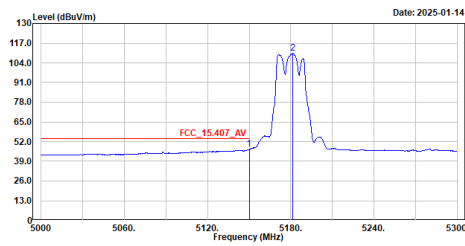

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	46.98	54.00	-7.02	32.46	14.52	Average
2	5181.500	110.57	-----	-----	96.07	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5180MHz
Test by :Caster

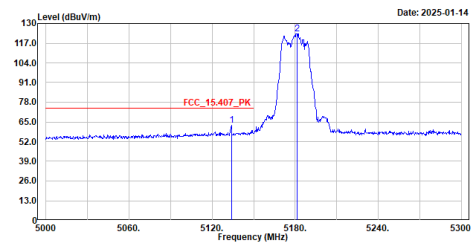

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5134.100	62.90	74.00	-11.10	48.40	14.50	Peak
2	5181.200	123.18	-----	-----	108.68	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5220MHz
Test by :Caster

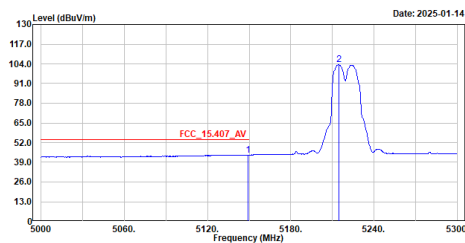

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	43.87	54.00	-10.13	29.35	14.52	Average
2	5214.500	103.37	-----	-----	88.88	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5220MHz
Test by :Caster

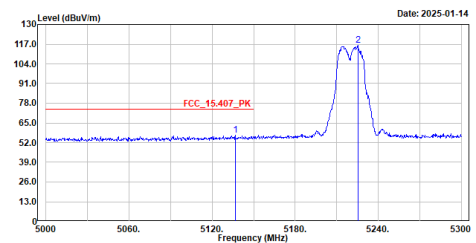

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5136.800	56.84	74.00	-17.16	42.33	14.51	Peak
2	5225.300	116.07	-----	-----	101.58	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5220MHz
Test by :Caster

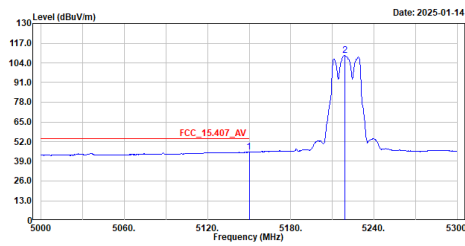

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	45.02	54.00	-8.98	30.50	14.52	Average
2	5219.000	108.87	-----	-----	94.38	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5220MHz
Test by :Caster

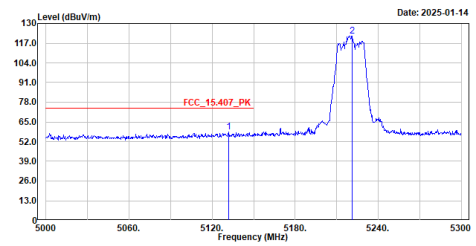

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5132.000	58.31	74.00	-15.69	43.80	14.51	Peak
2	5221.400	121.70	-----	-----	107.21	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5240MHz
Test by :Caster

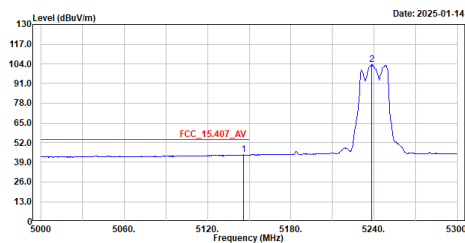

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.800	43.91	54.00	-10.09	29.40	14.51	Average
2	5238.500	103.63	-----	-----	89.14	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5240MHz
Test by :Caster

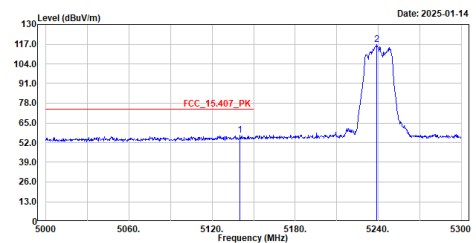

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5140.100	56.85	74.00	-17.15	42.34	14.51	Peak
2	5239.100	116.63	-----	-----	102.14	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5240MHz
Test by :Caster

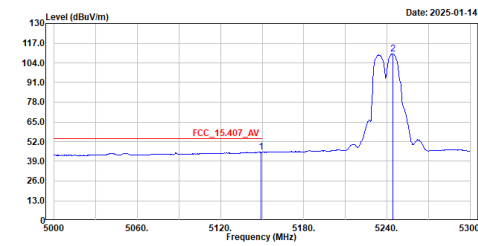

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.100	45.03	54.00	-8.97	30.51	14.52	Average
2	5244.500	110.01	-----	-----	95.53	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5240MHz
Test by :Caster

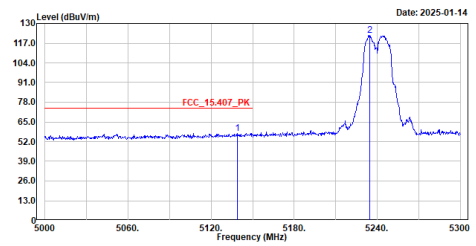

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5139.200	57.58	74.00	-16.42	43.07	14.51	Peak
2	5234.600	122.16	-----	-----	107.67	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_5745MHz
Test by :Caster

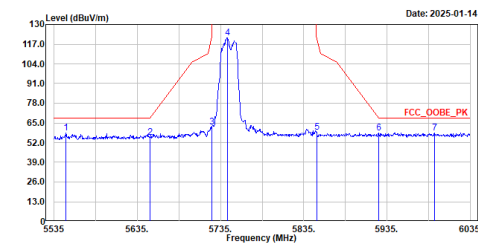

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5549.500	58.60	68.20	-9.60	43.28	15.32	Peak
2	5650.000	55.38	68.21	-12.83	39.61	15.77	Peak
3	5725.000	62.51	122.20	-59.69	46.12	16.39	Peak
4	5743.000	121.26	-----	-----	104.78	16.48	Peak
5	5850.500	59.01	121.06	-62.05	42.59	16.42	Peak
6	5925.000	58.37	68.21	-9.84	41.64	16.73	Peak
7	5992.500	58.54	68.20	-9.66	41.83	16.71	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_5745MHz
Test by :Caster

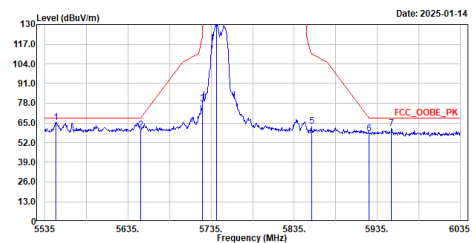

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5548.000	65.45	68.20	-2.75	50.14	15.31	Peak
2	5650.000	60.52	68.21	-7.69	44.75	15.77	Peak
3	5725.000	77.31	122.20	-44.89	60.92	16.39	Peak
4	5742.000	130.67	-----	-----	114.19	16.48	Peak
5	5856.000	62.58	110.52	-47.94	46.14	16.44	Peak
6	5925.000	58.10	68.21	-10.11	41.37	16.73	Peak
7	5952.000	61.30	68.20	-6.90	44.57	16.73	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

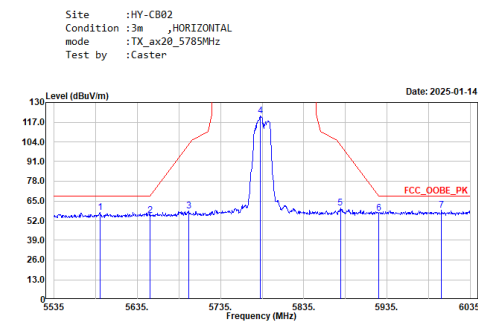

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5590.000	57.25	68.20	-10.95	41.90	15.35	Peak
2	5650.000	55.39	68.21	-12.82	39.62	15.77	Peak
3	5697.000	58.19	102.98	-44.79	41.96	16.23	Peak
4	5783.000	121.40	-----	-----	104.87	16.53	Peak
5	5879.000	60.32	102.24	-41.92	43.78	16.54	Peak
6	5925.000	56.68	68.21	-11.53	39.95	16.73	Peak
7	6000.500	59.06	68.20	-9.14	42.36	16.70	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

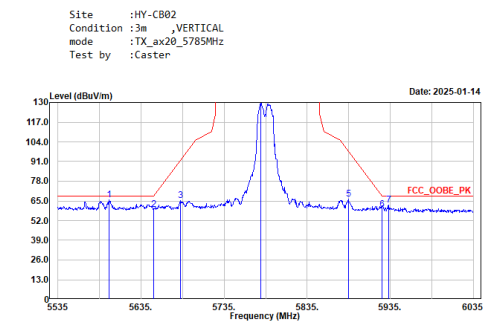

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5597.000	65.67	68.20	-2.53	50.30	15.37	Peak
2	5650.000	59.29	68.21	-8.92	43.52	15.77	Peak
3	5682.500	65.09	92.25	-27.16	48.99	16.10	Peak
4	5779.500	129.46	-----	-----	112.93	16.53	Peak
5	5884.500	66.26	98.17	-31.91	49.70	16.56	Peak
6	5925.000	59.27	68.21	-8.94	42.54	16.73	Peak
7	5933.000	62.32	68.20	-5.88	45.57	16.75	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

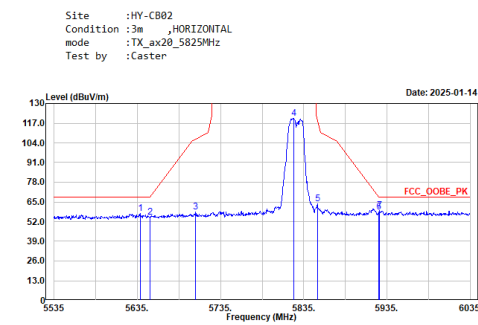

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5638.500	57.17	68.20	-11.03	41.48	15.69	Peak
2	5650.000	55.09	68.21	-13.12	39.32	15.77	Peak
3	5705.000	58.36	106.60	-48.24	42.07	16.29	Peak
4	5823.000	120.38	-----	-----	103.92	16.46	Peak
5	5851.500	63.80	118.78	-54.98	47.38	16.42	Peak
6	5925.000	58.25	68.21	-9.96	41.52	16.73	Peak
7	5926.000	59.31	68.20	-8.89	42.58	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

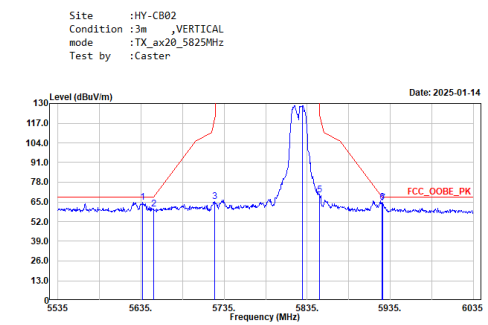


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5637.000	64.60	68.20	-3.60	48.92	15.68	Peak
2	5650.000	60.13	68.21	-8.08	44.36	15.77	Peak
3	5724.000	65.20	119.92	-54.72	48.81	16.39	Peak
4	5829.000	128.62	-----	-----	112.17	16.45	Peak
5	5850.000	69.82	122.20	-52.38	53.40	16.42	Peak
6	5925.000	64.77	68.21	-3.44	48.04	16.73	Peak
7	5926.000	64.41	68.20	-3.79	47.68	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Caster

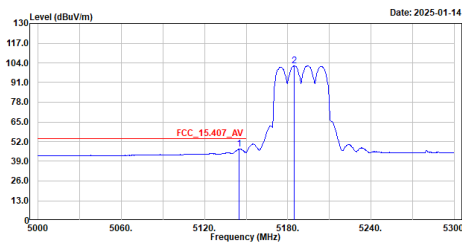


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5144.900	47.22	54.00	-6.78	32.71	14.51	Average
2	5184.800	102.09	-----	-----	87.60	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Caster

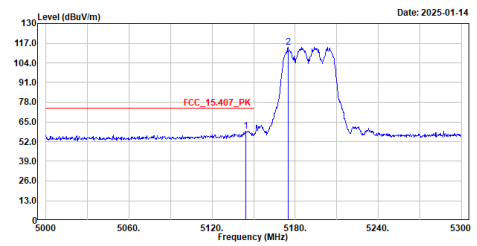


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5144.300	59.03	74.00	-14.97	44.52	14.51	Peak
2	5174.900	114.23	-----	-----	99.74	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5190MHz
Test by :Caster

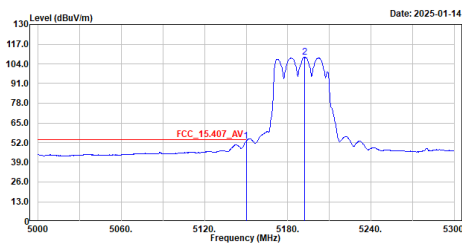


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	53.08	54.00	-0.92	38.56	14.52	Average
2	5192.000	108.31	-----	-----	93.81	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5190MHz
Test by :Caster

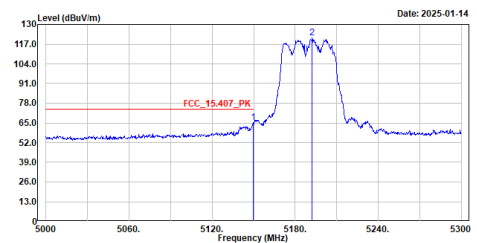


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	65.45	74.00	-8.55	50.93	14.52	Peak
2	5192.300	120.96	-----	-----	106.46	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m HORIZONTAL
mode :TX_ax40_5230MHz
Test by :Caster

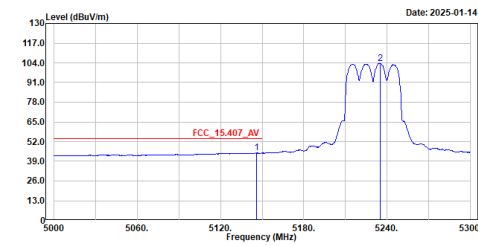

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.100	44.50	54.00	-9.50	29.99	14.51	Average
2	5234.900	103.62	-----	-----	89.13	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m HORIZONTAL
mode :TX_ax40_5230MHz
Test by :Caster

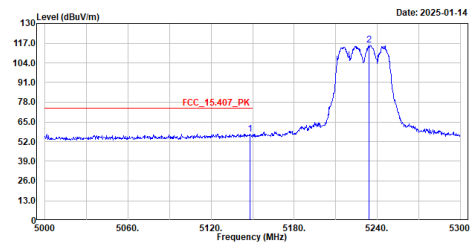

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	57.02	74.00	-16.98	42.50	14.52	Peak
2	5234.300	115.64	-----	-----	101.15	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m VERTICAL
mode :TX_ax40_5230MHz
Test by :Caster

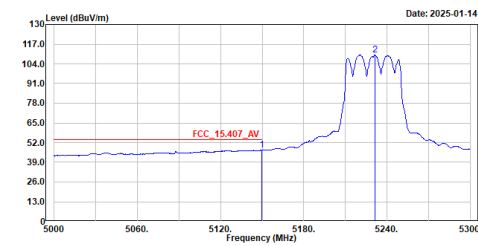

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	47.04	54.00	-6.96	32.52	14.52	Average
2	5231.300	109.82	-----	-----	95.33	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m VERTICAL
mode :TX_ax40_5230MHz
Test by :Caster

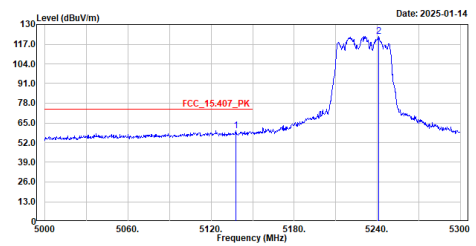

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5137.700	59.88	74.00	-14.12	45.37	14.51	Peak
2	5241.200	122.30	-----	-----	107.81	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5755MHz
Test by :Caster

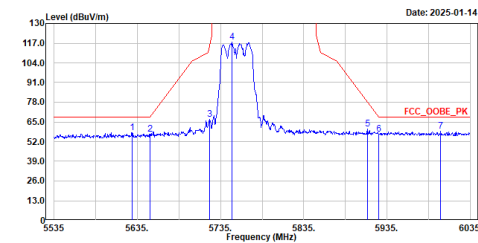


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5628.500	57.74	68.20	-10.46	42.14	15.60	Peak
2	5650.000	57.06	68.21	-11.15	41.29	15.77	Peak
3	5721.500	66.53	114.22	-47.69	50.16	16.37	Peak
4	5748.500	117.63	-----	-----	101.12	16.51	Peak
5	5911.500	60.21	78.20	-17.99	43.54	16.67	Peak
6	5925.000	56.69	68.21	-11.52	39.96	16.73	Peak
7	5999.500	58.81	68.20	-9.39	42.11	16.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5755MHz
Test by :Caster

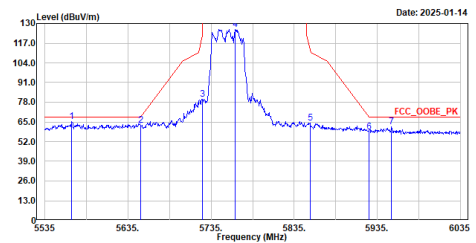


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5567.500	65.04	68.20	-3.16	49.71	15.33	Peak
2	5650.000	62.60	68.21	-5.61	46.83	15.77	Peak
3	5725.000	80.02	122.20	-42.18	63.63	16.39	Peak
4	5764.000	126.25	-----	-----	109.71	16.54	Peak
5	5854.000	64.08	113.08	-49.00	47.65	16.43	Peak
6	5925.000	58.16	68.21	-10.05	41.43	16.73	Peak
7	5952.000	61.82	68.20	-6.38	45.89	16.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5795MHz
Test by :Caster

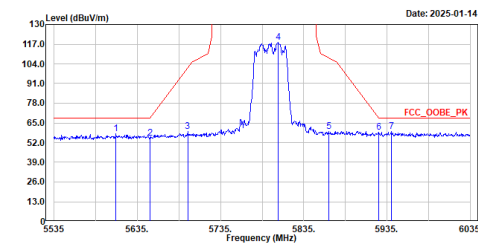


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5609.500	57.68	68.20	-10.52	42.21	15.47	Peak
2	5650.000	54.95	68.21	-13.26	39.18	15.77	Peak
3	5695.500	59.27	101.87	-42.60	43.06	16.21	Peak
4	5804.500	118.04	-----	-----	101.53	16.51	Peak
5	5865.000	59.56	100.00	-40.44	43.08	16.48	Peak
6	5925.000	58.94	68.21	-9.27	42.21	16.73	Peak
7	5940.000	59.17	68.20	-9.03	42.43	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5795MHz
Test by :Caster

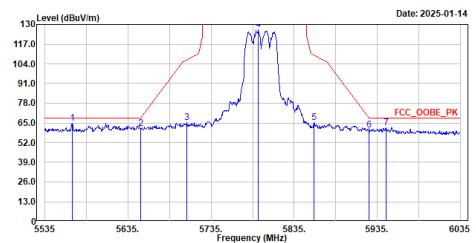


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5568.000	64.71	68.20	-3.49	49.37	15.34	Peak
2	5650.000	61.19	68.21	-7.02	45.42	15.77	Peak
3	5706.000	65.44	106.88	-41.44	49.15	16.29	Peak
4	5792.000	126.48	-----	-----	109.96	16.52	Peak
5	5858.500	65.23	109.82	-44.59	48.78	16.45	Peak
6	5925.000	60.15	68.21	-8.06	43.42	16.73	Peak
7	5946.000	62.01	68.20	-6.19	45.27	16.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5210MHz
Test by :Caster

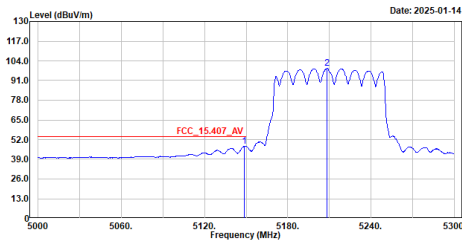


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.800	47.52	54.00	-6.48	33.00	14.52	Average
2	5208.500	99.05	-----	-----	84.56	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax80_5210MHz
Test by :Caster

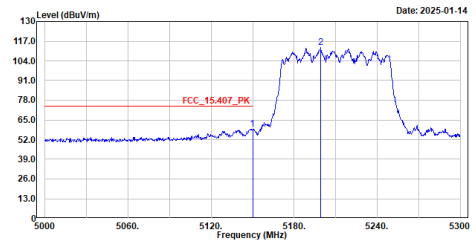


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	59.11	74.00	-14.89	44.59	14.52	Peak
2	5199.200	112.72	-----	-----	98.23	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5210MHz
Test by :Caster

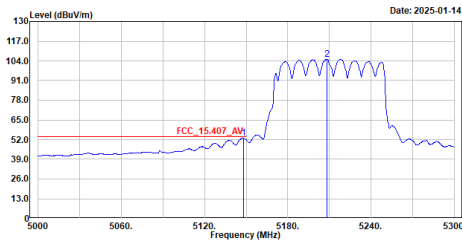


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.200	53.06	54.00	-0.94	38.54	14.52	Average
2	5208.200	105.04	-----	-----	90.55	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax80_5210MHz
Test by :Caster

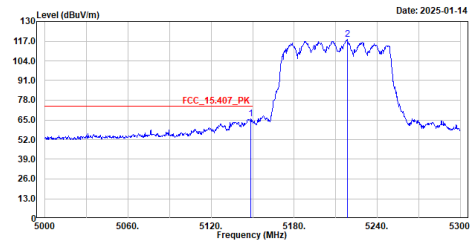


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.500	65.94	74.00	-8.06	51.42	14.52	Peak
2	5218.400	118.06	-----	-----	103.57	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2x80_5775MHz
Test by :Caster

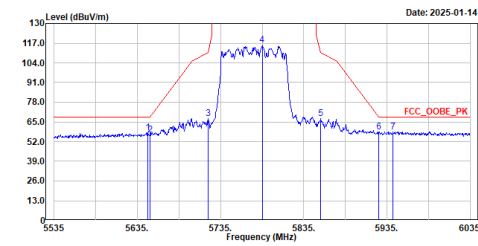


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5648.000	57.76	68.20	-10.44	42.00	15.76	Peak
2	5650.000	56.28	68.21	-11.93	40.51	15.77	Peak
3	5720.000	67.16	110.80	-43.64	50.80	16.36	Peak
4	5785.000	115.70	-----	-----	99.17	16.53	Peak
5	5855.500	67.13	110.66	-43.53	50.69	16.44	Peak
6	5925.000	58.43	68.21	-9.78	41.70	16.73	Peak
7	5942.500	58.60	68.20	-9.60	41.85	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2x80_5775MHz
Test by :Caster

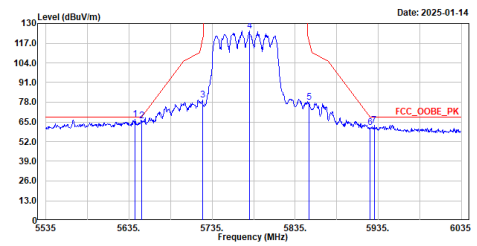


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5642.500	66.89	68.20	-1.31	51.17	15.72	Peak
2	5650.000	65.88	68.21	-2.33	50.11	15.77	Peak
3	5723.000	79.64	118.78	-39.14	63.26	16.38	Peak
4	5780.000	125.03	-----	-----	108.50	16.53	Peak
5	5851.500	77.93	118.78	-40.85	61.51	16.42	Peak
6	5925.000	61.51	68.21	-6.70	44.78	16.73	Peak
7	5930.000	62.58	68.20	-5.62	45.83	16.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Model No.: TAP-M310R-1P1R1S-US-CT-T

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5190MHz
Test by :Peter

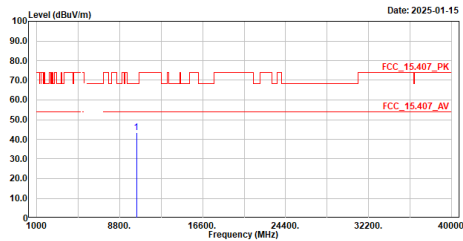


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	43.51	68.22	-24.71	40.65	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5190MHz
Test by :Peter

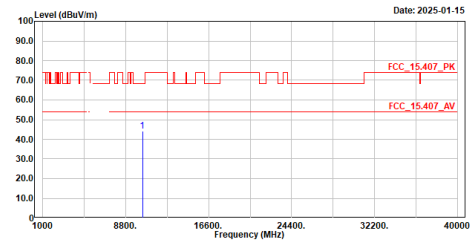


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	44.21	68.22	-24.01	41.35	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_5190MHz
Test by :Peter

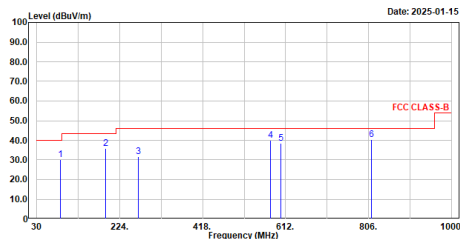


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	85.290	30.10	40.00	-9.90	60.02	-29.92	QP
2	191.990	36.01	43.50	-7.49	62.61	-26.60	QP
3	267.650	31.60	46.00	-14.40	55.77	-24.17	QP
4	576.110	40.14	46.00	-5.86	56.46	-16.32	QP
5	601.330	38.38	46.00	-7.62	53.82	-15.44	QP
6	812.790	40.24	46.00	-5.76	52.70	-12.46	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_5190MHz
Test by :Peter

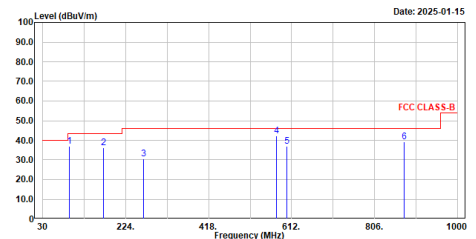


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	92.080	37.00	43.50	-6.50	66.49	-29.49	QP
2	171.620	36.34	43.50	-7.16	60.90	-24.56	QP
3	265.710	30.67	46.00	-15.33	54.93	-24.26	QP
4	576.110	42.40	46.00	-3.60	58.72	-16.32	QP
5	601.330	36.80	46.00	-9.20	52.24	-15.44	QP
6	875.840	39.36	46.00	-6.64	51.39	-12.03	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Peter

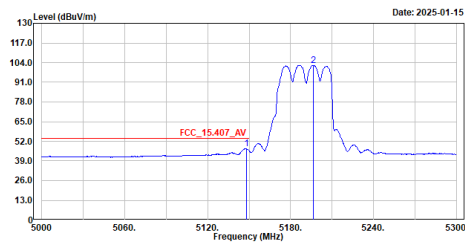


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.900	47.08	54.00	-6.92	32.56	14.52	Average
2	5196.500	102.24	-----	-----	87.75	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_5190MHz
Test by :Peter

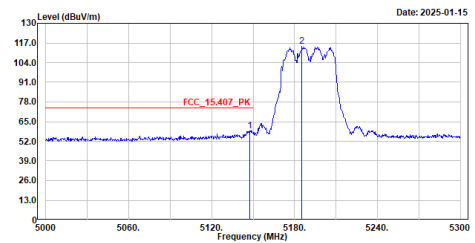


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.600	58.94	74.00	-15.06	44.42	14.52	Peak
2	5185.400	114.61	-----	-----	100.12	14.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5190MHz
Test by :Peter

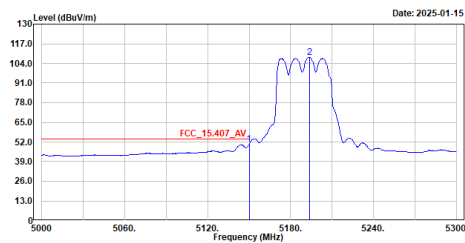


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	50.58	54.00	-3.42	36.06	14.52	Average
2	5193.800	108.08	-----	-----	93.59	14.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_5190MHz
Test by :Peter

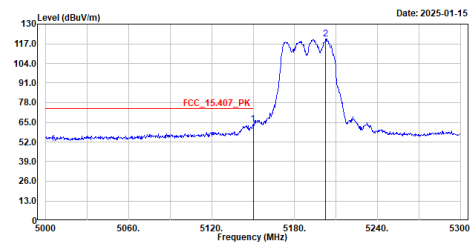

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	63.70	74.00	-10.30	49.18	14.52	Peak
2	5202.500	120.17	-----	-----	105.68	14.49	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix F. Test Result of Radiated Emission Co-location

Model No.: TAP-M310R-1P2R1S-US-CT-T

Antenna: ANT-WDB-PNF-1011


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz+TX_ax40_5190MHz
Test by :Peter

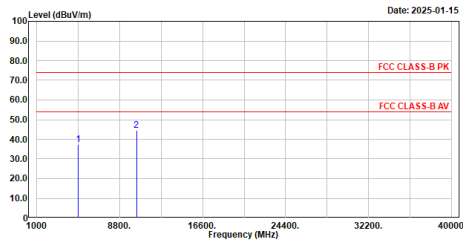

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	37.35	74.00	-36.65	44.03	-6.68	Peak
2	10380.000	44.51	74.00	-29.49	41.65	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz+TX_ax40_5190MHz
Test by :Peter

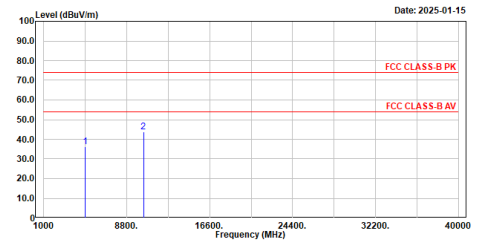

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	36.25	74.00	-37.75	42.93	-6.68	Peak
2	10380.000	43.85	74.00	-30.15	40.99	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz+TX_ax40_5190MHz
Test by :Peter

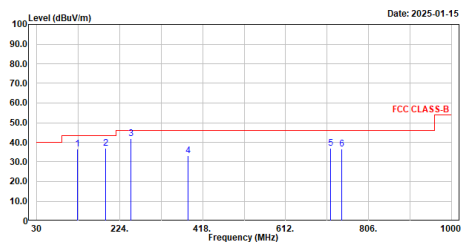

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	125.060	36.61	43.50	-6.89	62.40	-25.79	QP
2	191.990	37.00	43.50	-6.50	63.60	-26.60	QP
3	250.190	41.86	46.00	-4.14	66.81	-24.95	QP
4	384.050	33.12	46.00	-12.88	53.79	-20.67	QP
5	717.730	37.06	46.00	-8.94	50.86	-13.80	QP
6	742.950	36.79	46.00	-9.21	50.02	-13.23	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz+TX_ax40_5190MHz
Test by :Peter

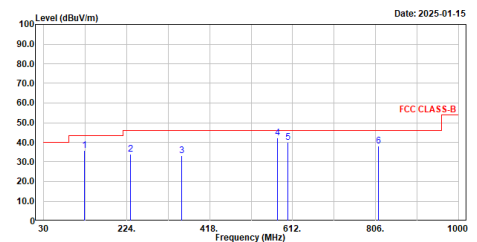

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	125.060	35.91	43.50	-7.59	61.70	-25.79	QP
2	233.700	33.83	46.00	-12.17	59.35	-25.52	QP
3	353.010	33.38	46.00	-12.62	55.28	-21.90	QP
4	576.110	42.10	46.00	-3.90	58.42	-16.32	QP
5	601.330	40.14	46.00	-5.86	55.58	-15.44	QP
6	812.790	38.16	46.00	-7.84	50.62	-12.46	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.