



QUICK QUIDE


model name: EF-B210G
support@pohopa.com

② Boot and connect

1st, Turn on both Main and Secondary speakers, they will be entering pairing status, you will hear voice: "Power on" - "Searching" - "Pairing connecting". You will see the LED indicator on Main speaker blinks in Blue, on Secondary speaker stays in Green, which means they are already paired.

2nd, When Main and Secondary speakers are paired, turn on the Bluetooth function on your Bluetooth device and search for EF-B210G(STEREO PAIRING). When found, select and pair. After hearing the voice "Bluetooth connected", music is ready to play from both speakers.

To avoid Bluetooth connection malfunction, please turn on both speakers and let them auto pair first, then connect EF-B210G(STEREO PAIRING) to your Bluetooth device.

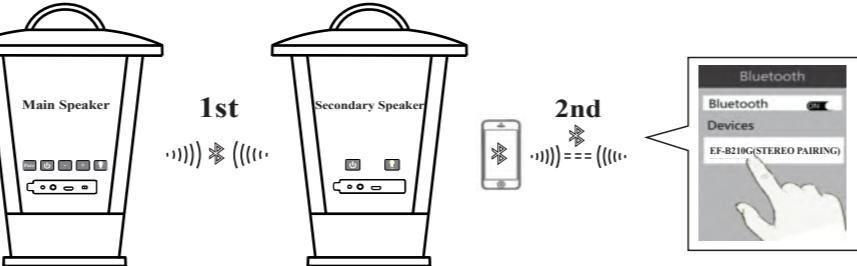


Kind reminder for your Pohopa EF-B210G(STEREO PAIRING) speakers **IMPORTANT! ! !**

1. To prevent battery life decrease, please disconnect power cord to speakers when fully charged, do not leave speakers plugged in all day long. Also, remember to turn off speakers when not in use.
2. The speaker EF-B210G(STEREO PAIRING) will be saved into the previous Bluetooth device it paired with for instant music playback. If you want the speaker connected to other Bluetooth devices, you will need to disconnect or choose "Forget This Device" from that previous device first.
3. When connecting, be close to the Main speaker for faster connection. At this time you can test how far your Bluetooth devices can be from the speaker(Main).
4. **If there is sound cutting out/breaking out or Bluetooth connection malfunction. Or the speaker auto powers off, please recharge the speakers, then restart them, they will work perfectly again.**
5. The Main speaker and Secondary speaker are attached to each other when paired. You can gain control the power off, LED lights on/off for both speakers just through one speaker. **This feature also makes it that during the process of music playing, if one speaker is powered off, the other one will shut down too, even if it still has power left. This doesn't mean the speaker can't hold a charge or the battery damaged.**

We recommend charging both speakers when your speakers have low battery.

① What's in the box

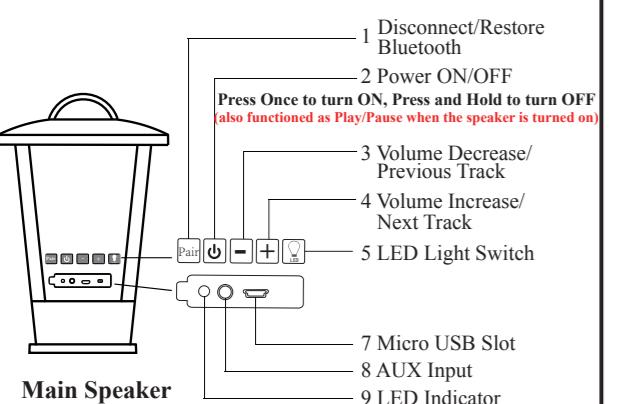

③ LED lights

For LED lights, we currently have two versions.

White lights only

Labeled as

For White lights, the LED lights function can be easily accessed by pressing the LED light control button to control it ON/OFF.

WHITE LIGHTS

White&Colored lights

Labeled as

For White&Colored lights, press the LED lights control button to switch the color.




The colored lights feature can only be activated when the speakers are playing music plus the volume of the music resource has to be up to 30% at least. The stronger the beat of the music, the better the effect of the sound responsive colored lights.

④ About distance

Bluetooth Distance(distance between Main speaker and Bluetooth device): 33ft(max)

Pairing Distance(distance between Main speaker and Secondary speaker): 66ft(max)

Please note that outdoor use distance may be shortened due to signal interference, which is normal.

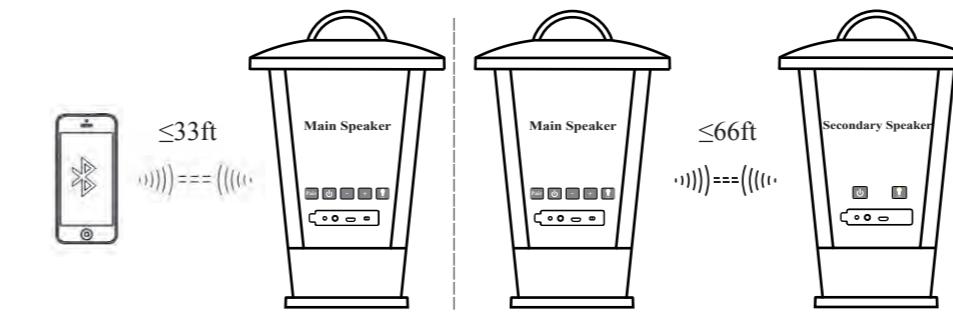

Reminder: If there is sound cutting out/breaking out due to the distance, please turn off both speakers and then turn on them again.

⑦ Charging

In any state, including the shutdown, you only need to use the micro usb charging cable to connect the speakers and your phone charger. The speaker is charging with the red light on, fully charged with red light off.

IMPORTANT! ! !

To prevent battery damage, please do not leave the speakers plugged in all day long, or the battery will get damaged gradually, this is a feature of rechargeable battery, not just our speakers, same goes to all the electronic products with rechargeable battery.

Actually, with 4400mah battery capacity, one single full charge supports continuous music streaming up to 15 hours. You can charge speakers when you don't use them, just remember to pull off the charging cord.

⑤ Music selection and volume adjustment




Press **-** this button for volume decrease, press and hold for previous track selection.

Press **+** this button for volume increase, press and hold for next track selection.

⑥ Best stereo sound effect

Best solution to enjoy stereo sound effect:

Just keep the distance between the Main speaker and Secondary speaker within 20ft; and the distance between speakers and listeners within 33ft. It is best to form an equilateral triangle between the three.

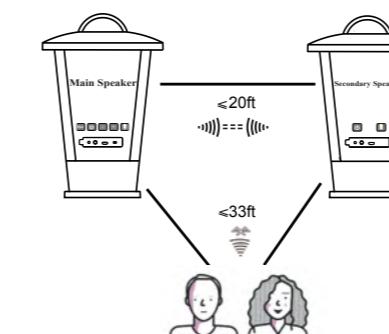

⑨ Parameter

Bluetooth Version: 4.2

Frequency: 2.402~2.480GHZ ISM band

Rated Power Output: 10W+10W

Frequency Response: 100HZ-18KHZ

S/N Ratio: 80dB

Power: Micro USB 5V 1A

Battery: 4.2V 4400mAh

Charging Hour: around 4.5 hours

Temperature and Humidity: 0°C to 45°C, 5% to 90% humidity

Operating Climate: -40°C to 60°C and 5% to 95% humidity for storage.

Product Size: 7.75 " *7 " *11.75 "

Net Weight: 2.54 lb

Pohopa speakers have one year warranty, for tech support and customer services, or any questions in the use, please don't hesitate to contact us with your Amazon order number via our customer support email address below, we will response within 12 hours.

support@pohopa.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.