

Womate

Womage

User Guide



Overview

Womate Features



- Womate is 3G wireless router, support maximum 7.2Mbps 3G data service;
- Womate App available at App Store for free installation, no need to jailbreak;
- When iPod Touch/iPad installed Womate App, iPod Touch/iPad have voice call and SMS capability;
- When iPhone installed Womate App, iPhone becomes dual SIM dual Standby phone;
- Womate App update aligning with iOS, support latest iPhone/iPod Touch/iPad devices.

For more information

Visit <http://www.womate3g.com> for more information about the product manual, troubleshooting, and other related references. The company reserves the right to make changes to the product manual without notice. To view or download the latest version, go to <http://www.womate3g.com> .

Womate Device Quick Start

Introduction



Power On/Off

- Power on or power off the Womate device.
- To power on the Womate device, press and hold the power button for 3 seconds.
- To power off the Womate device, press and hold the power button for 3 seconds.

WIFI On/Off

- Turn on or turn off WIFI of the Womate device.
- To turn on WIFI, press and hold the WIFI button for 3 seconds.
- To turn off WIFI, press and hold the WIFI button for 3 seconds.

System Resetting Hole

- When powered on, use a paperclip or similar tools to press and hold the resetting hole to reset Womate settings.

Womate Device Quick Start

Introduction

1 Power Status Light

- No color and light indicates "Standby" status.
- Stable red light indicates "Battery Charging" status.
- Flashing red light indicates "Low Power" status.

2 WIFI Status Light

- White light flashing every 3 seconds indicates "Standby" status.
- White light flashing at the data transmission speed indicates "WIFI Data Transmitting" status.
- No light indicates that WIFI is turned off.

3 3G Signal Status Light

- White light flashing every 3 seconds indicates "Standby" status.

4 Missed Calls Status Light

- Flashing white light indicates that there are missed calls or messages.

Power On/Off Status Light

- The four status lights flash from left to right when the Womate device is powered on.
- The four status lights flash from right to left when the Womate device is powered off.

Installing SIM Card

Open the rear cover of the Womate device from the upper right corner and insert the SIM card into the SIM card slot.

Charging Womate Battery

- Use the power adapter.
- Use the USB cable to connect the Womate device to a computer.

Womate App Quick Start

App Download and Installation 1

- Download and install from Apple App Store.



Q&A

Q: I encounter a failure in Womate app installation, or after a successful installation, I encounter an error exit when opening the Womate app?

A: Regarding the compatibility of different iOS versions, make sure that you are installing the latest version of Womate app. If not, delete the Womate app and download and install the latest version according to the method of '**App Download and Installation 2**'.

Womate App Quick Start

App Download and Installation 2

- Download and install Womate app from the Womate official website <http://www.womate3g.com>.

- (1) Download and install i-funbox either from the Womate official website or from <http://www.i-funbox.com>.
- (2) Start i-funbox and connect it to your iOS device. Click the  Install App icon and select **Womate.ipa** to install Womate app.



Q&A

Q: Why does i-funbox prompt that the iOS device cannot be found?

A: i-funbox must invoke part of iTunes' dynamic library. The pop-up message indicates that iTunes is not installed. You need to download and install iTunes first, and then restart i-funbox to install Wmoate.ipa.

Connecting App to Device

Connection Setting

- On the iOS device, click **Settings**.
- Click **WLAN**.
- Turn on **WLAN**.
- From the **Choose a Network** list, select **WOMATE-xxxxxx** (xxxxxx are 6 random letters), which is the **WIFI hot point** of the Womate device.



- In the pop-up window, enter the password for the Womate device's **WIFI hot point**. Then the Womate app can be successfully connected to the Womate device.
- The default password for the Womate device's **WIFI hot point** is **womate3g**.

Connecting App to Device

Q&A

Q: What if the password for the Womate device's WIFI hot point is not correct?

A: An "incorrect password" error may occur due to the compatibility of the iOS version and the Womate device's WIFI hot point. Entering the password for twice can solve this problem.

Q: What if I cannot successfully connect Womate app to Womate device?


A: Take the following actions if this problem occurs:

- Double press the Home key to locate the Womate app among the running applications.
- Press and hold the Womate app to close it, and press the Home key again to return to the standby interface of your iOS device.
- Restart the Womate app.
- If the previous steps do not work, restart your iOS device.

Using Womate App

Keypad

- Select the **Keypad** tab to enter the keypad interface.
- Enter the phone number and click **Call** to dial out.
- You can create a new contact for the input phone number and store it in the **All Contacts** list.

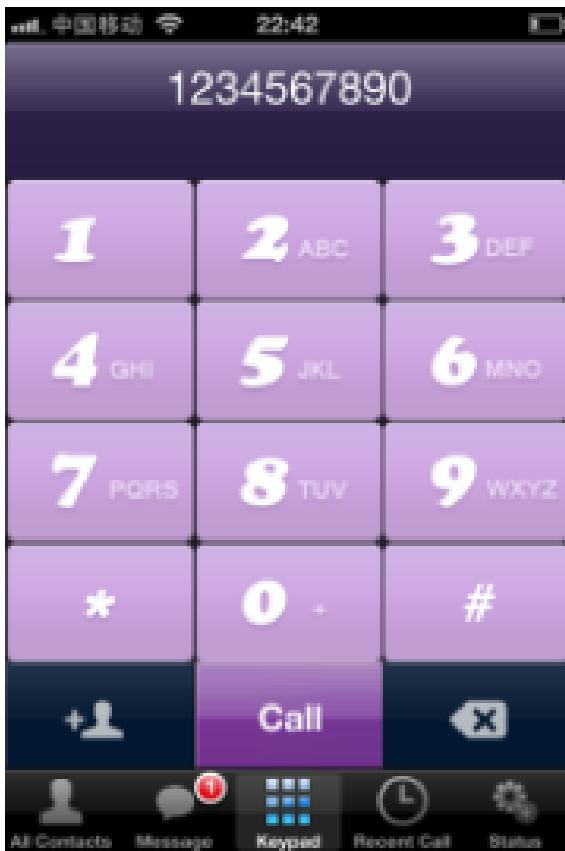

Using Womate App

Status

Check status

- Select the **Status** tab to check the status of Womate app features.
- The following status are available on the **Status** tab: **Switch OnOff, Battery, Signal, Network, WIFI, Mobile Data, Ring Tone, Message Tone, and Version.**


Changing WIFI SSID setting

- On the **Status** tab, click **WIFI**.
- In the pop-up window, enter the new **WIFI SSID**, the new password and the confirmed password.

Mobile Data

- Enable or disable the mobile data business through 3G in the Womate app.


Note: By default, **Mobile Data** is enabled.

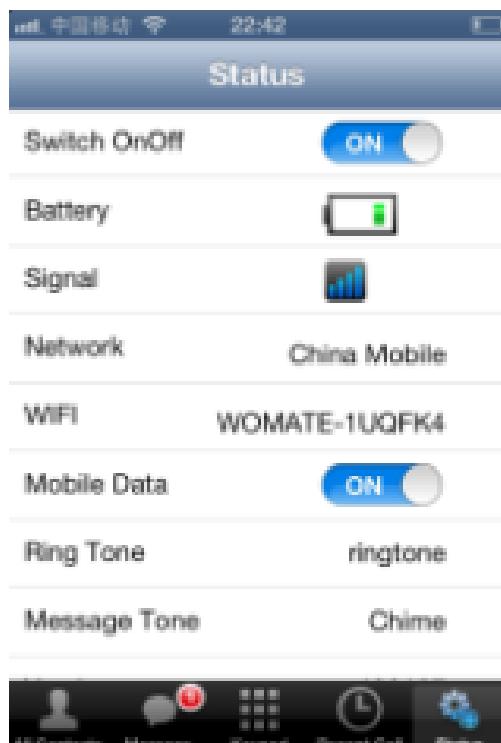

Using Womate App

All Contacts

- Select the **All Contacts** tab to check the contacts in your iOS device system.
- You can make changes to the contact information on the **All Contacts** tab.
- You can dial out using the **All Contacts** list.
- You can send messages using the **All Contacts** list.

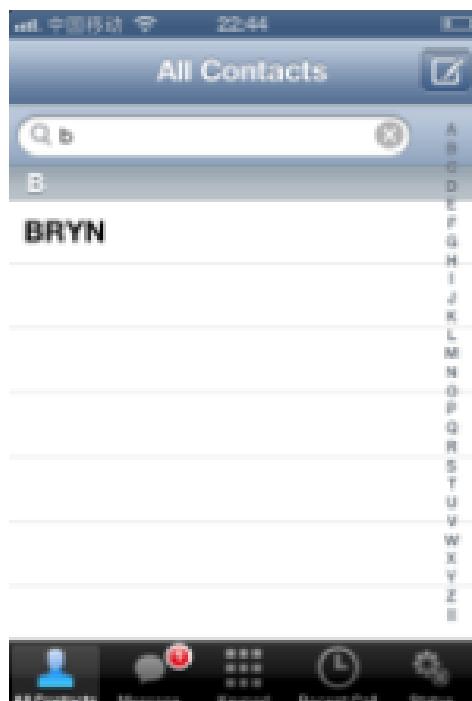

Note: The **All Contacts** list in the Womate app will be automatically synchronized with the **Contacts** list in your iOS device system. When you install the Womate app for the first time and you have a large number of contacts in your iOS device contact list, the synchronization will take a bit long time and the Womate app will respond at a bit slow speed

Using Womate App

Message


- Click the **Message** tab.
- To send a message, create the message in the text field and press **Send**.
- To forward a message, press and hold the existing message and select **Forward**.
- To delete a message, rub your finger on the message from left to right or right to left.
- To delete all messages for one contact, rub your finger across the contact on the **Message** interface and click **Delete**.



Using Womate App

Recent Call

- Click the **Recent Call** tab to check your recent call logs.
- Received calls are displayed in black.
- Missed calls are displayed in red.

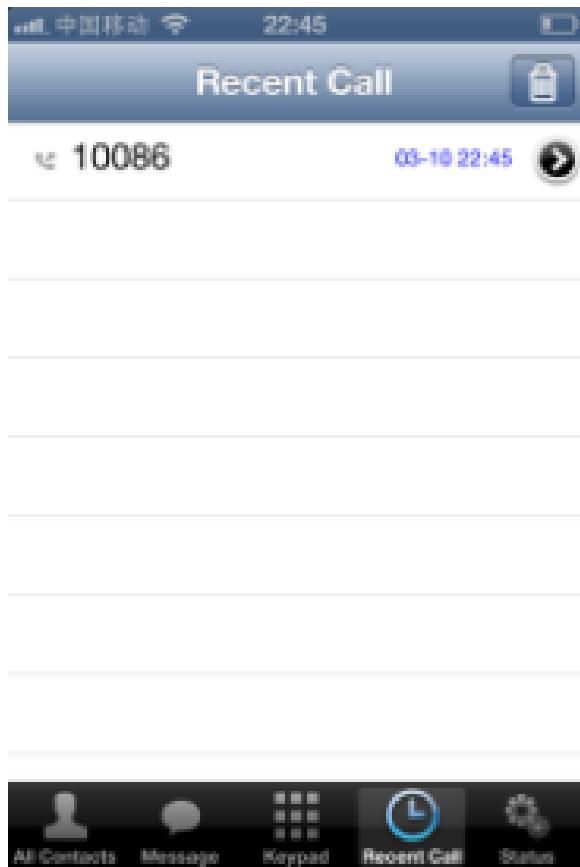

Womate as 3G Wireless Router


3G Wireless Router

Any device with WIFI, including iOS devices, Android phones, and laptops, can access the Internet through the Womate device.

Note: Womate can support at most 3 devices with WIFI at the same time.

For example, to connect an Android phone to Womate through WIFI, take the following actions:

- Select **Settings** on the phone interface.
- Click **WLAN** to check the available network.
- Click the Womate device's WIFI hot point **WOMATE-xxxxx**.
- In the pop-up window, enter the password for the Womate device's WIFI hot point. The default password is **womate3g**.

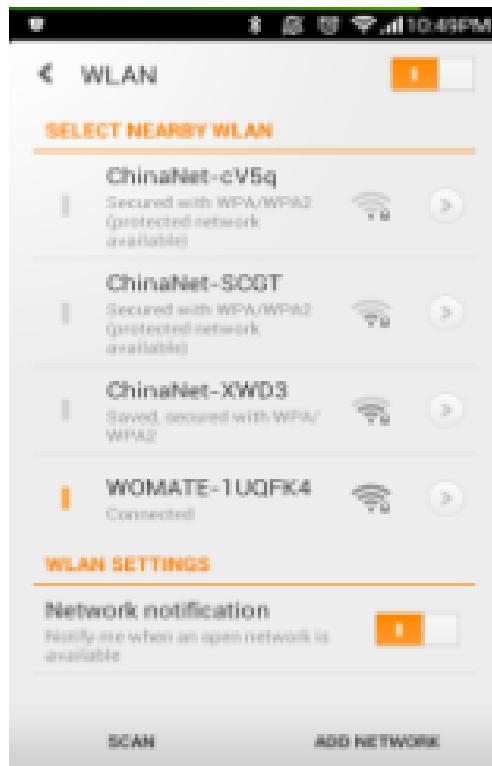

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
3. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The mobile device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body is 1.36W/kg.
4. This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 5mm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.