


24W / 28w / 36W / 40W non isolated app 2.4G power supply and remote control function description:

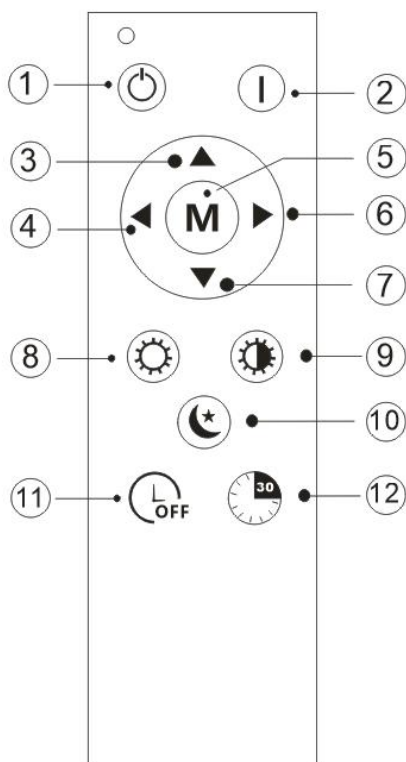

1、 Remote control key Description:

1. Turn on the light gradually (state before turning off, with memory function)

1-1) Remote control on-off memory: the AC power supply is not powered off, and the driver can remember the state before the last shutdown by switching with the remote control

1-2) power off memory: the AC power supply will be powered on for 5 seconds and then powered off. The drive memory will remember the state before the last power off. It will be powered on for less than 5 seconds. After power off for 10-15 seconds, the control chip will be powered off and reset and then powered on. The default is 4000K neutral light;

1-3) code matching: press and hold the lamp for 1 ~ 5 seconds after power on, and the lamp flashes quickly and slowly for several times, indicating that the code matching is successful;

2. Turn off the lights and fade out

2-1) code clearing: after the lamp is powered off for 5 seconds, it is powered on again. Press and hold it for 1 ~ 5 seconds, and the lamp changes quickly and slowly for several times, indicating that the code clearing is successful;

3. Brightness increase: low brightness increases to 100%, starting from 5% to 100%.

4. Color temperature adjustment: from cold color temperature to warm color temperature (the adjustment range of color temperature is 0 ~ 100%).

5. Mode switching: reading mode (4000K / 100% brightness) - leisure mode (3000K / 100% brightness) - working mode (6000K / 100% brightness). The power is equal at three color temperatures.

Note: the brightness and color temperature of the previous three modes can be adjusted at any time through the color temperature brightness adjustment key, but the three modes are a fixed cycle. Replace the silk screen icon with "m"

6. Color temperature adjustment: from warm color temperature to cold color

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that

interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The device has been evaluated to meet general RF exposure requirement, the device can be used in portable exposure condition without restriction

temperature (the adjustment range of color temperature is 100% ~ 0)

7. Brightness reduction: the high brightness is reduced to 5%, from 100% to 5%.

8. Full bright mode: 100% brightness

10. Night light mode (3000K / 5% brightness)

Note: directly switch the brightness to the night light mode, which is 3000K by default

11. Cancel the timing function: press this key, the light flashes slowly for 1 time, indicating that the timing function has been cancelled. Press the second time without response, and press the shutdown key to cancel the timing function;

12. Timed shutdown. [press once for 30 minutes (the light flashes once), (press once again for 1 hour (the light flashes twice))]

二、 Wall switch control

Wall switch:

1) Open and close quickly;

2) The first switch performs the last memory;

3) The default of the second switch is 100% full light 4000K;

4) The third switch defaults to 100% full light 3000K;

5) The fourth switch defaults to 100% full light 6000K.