




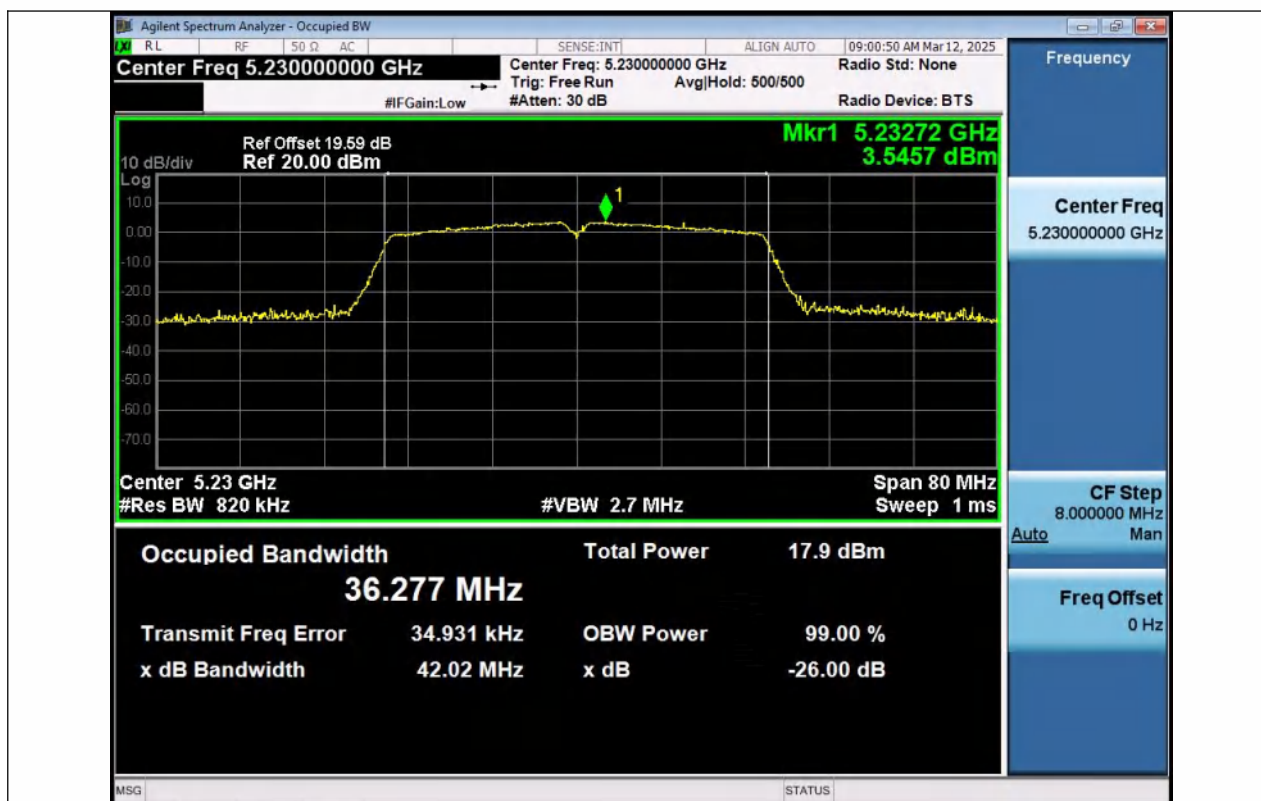


11N40MIMO-Ant1-5230

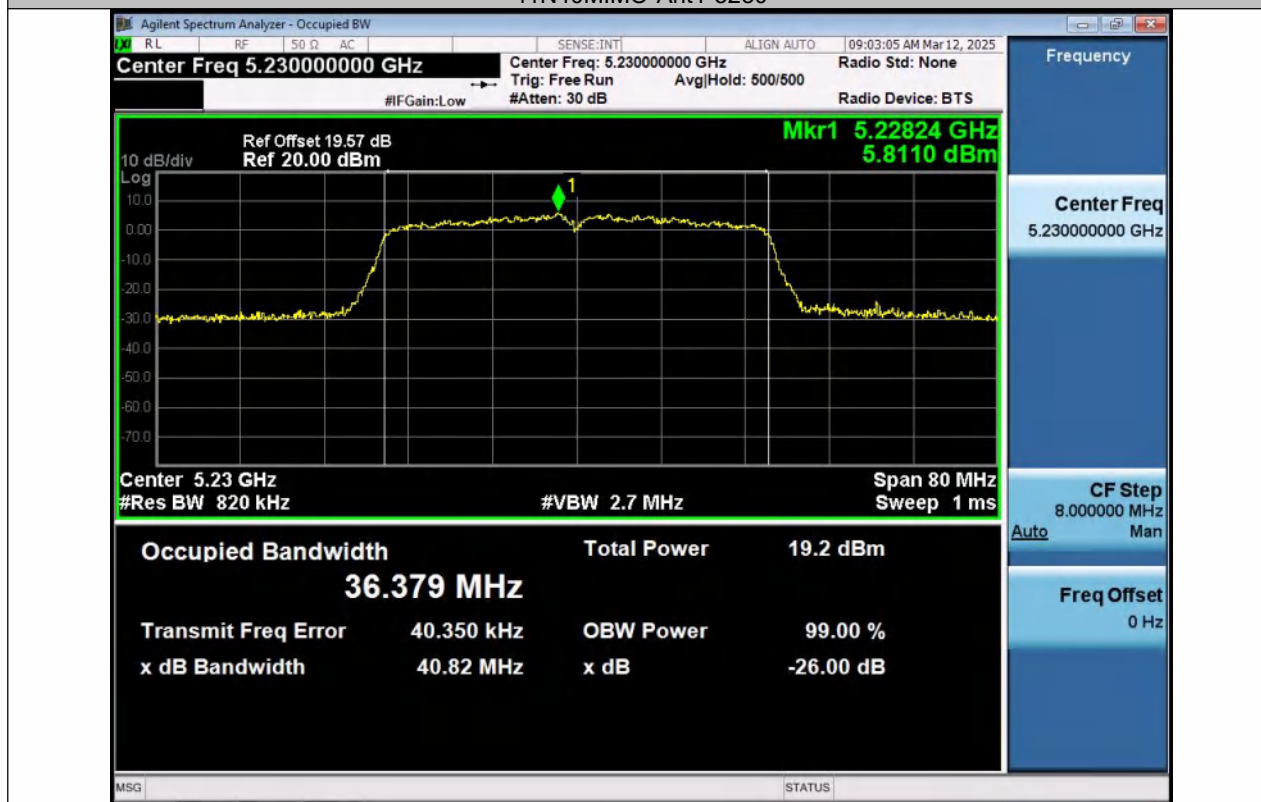


11N40MIMO-Ant2-5230

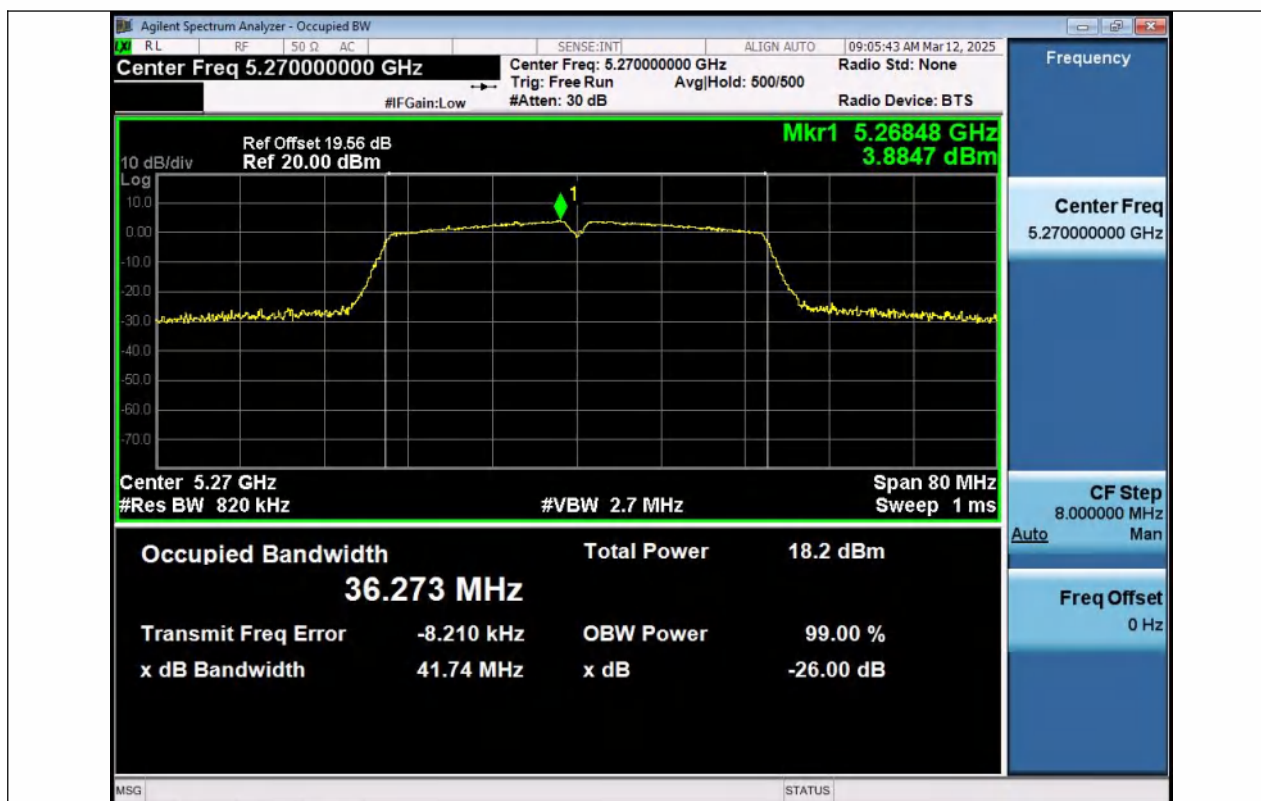


11N40MIMO-Ant1-5270

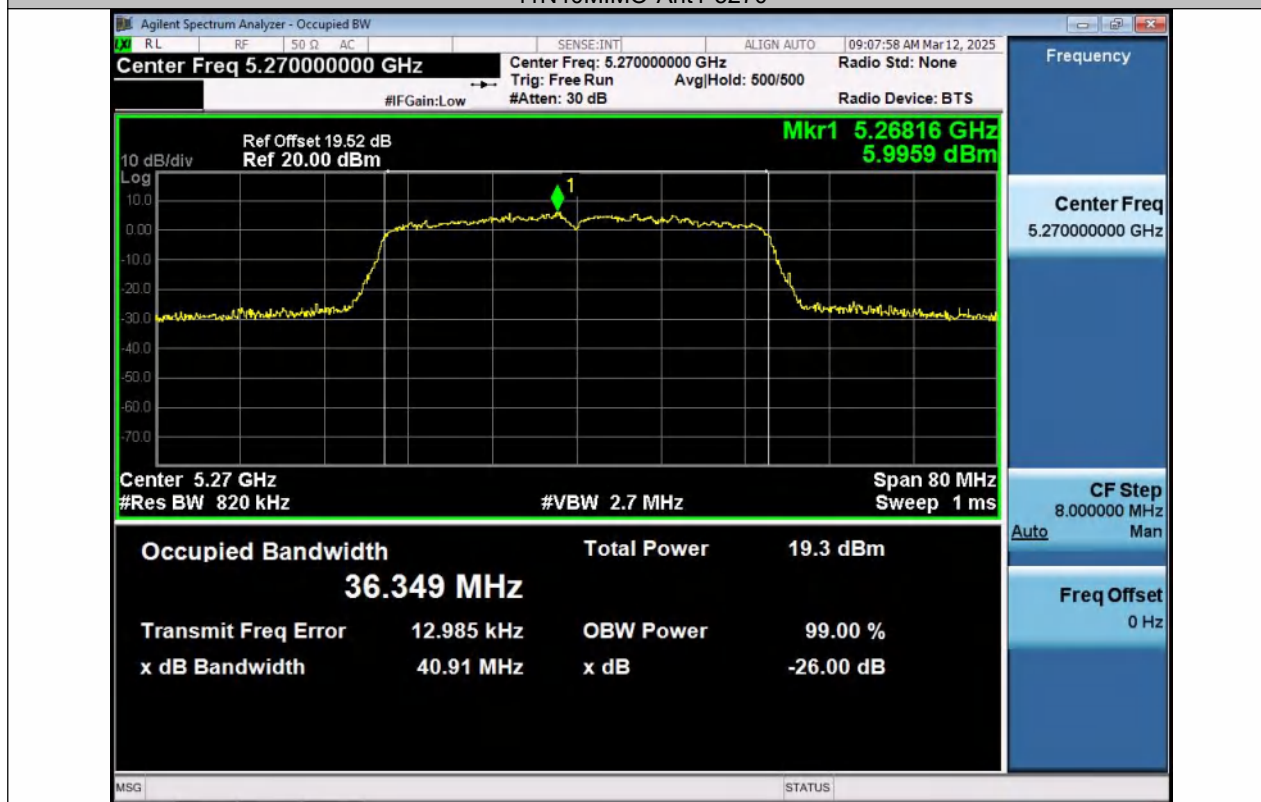


11N40MIMO-Ant2-5270

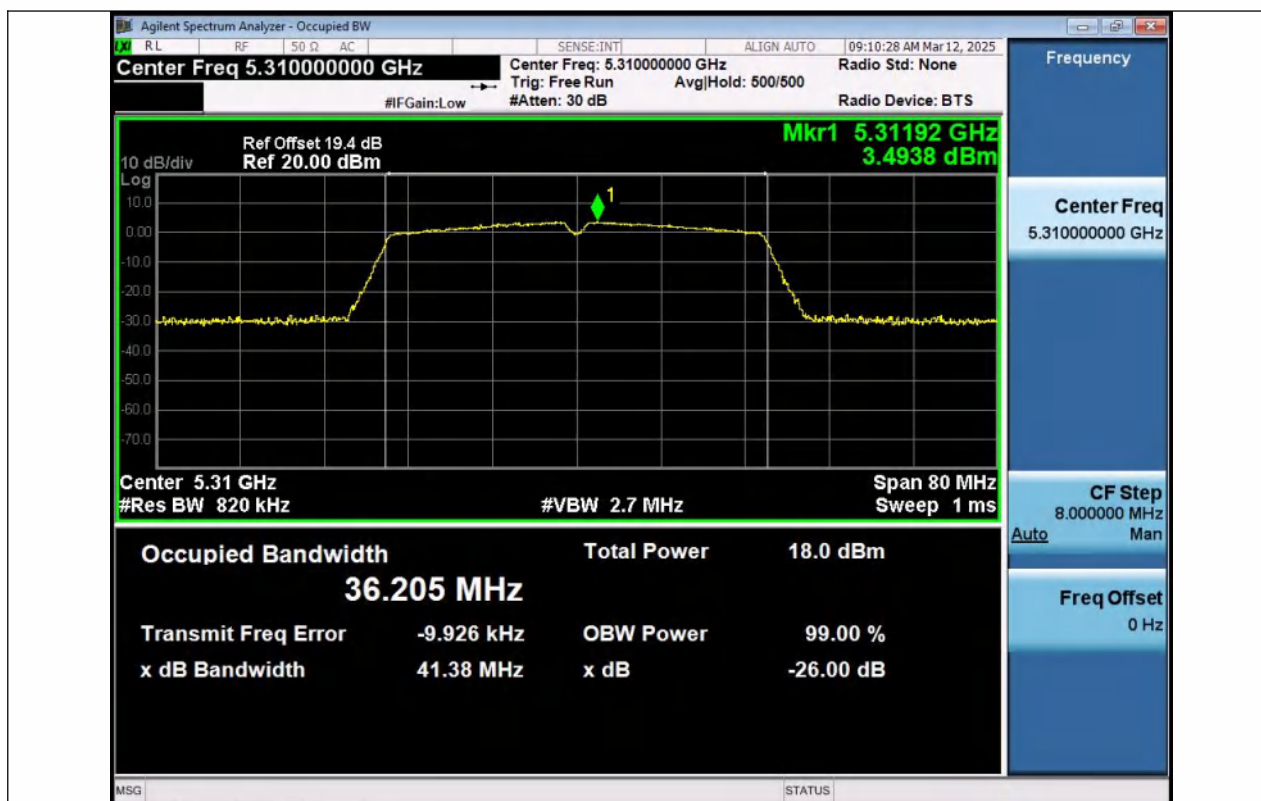


11N40MIMO-Ant1-5310

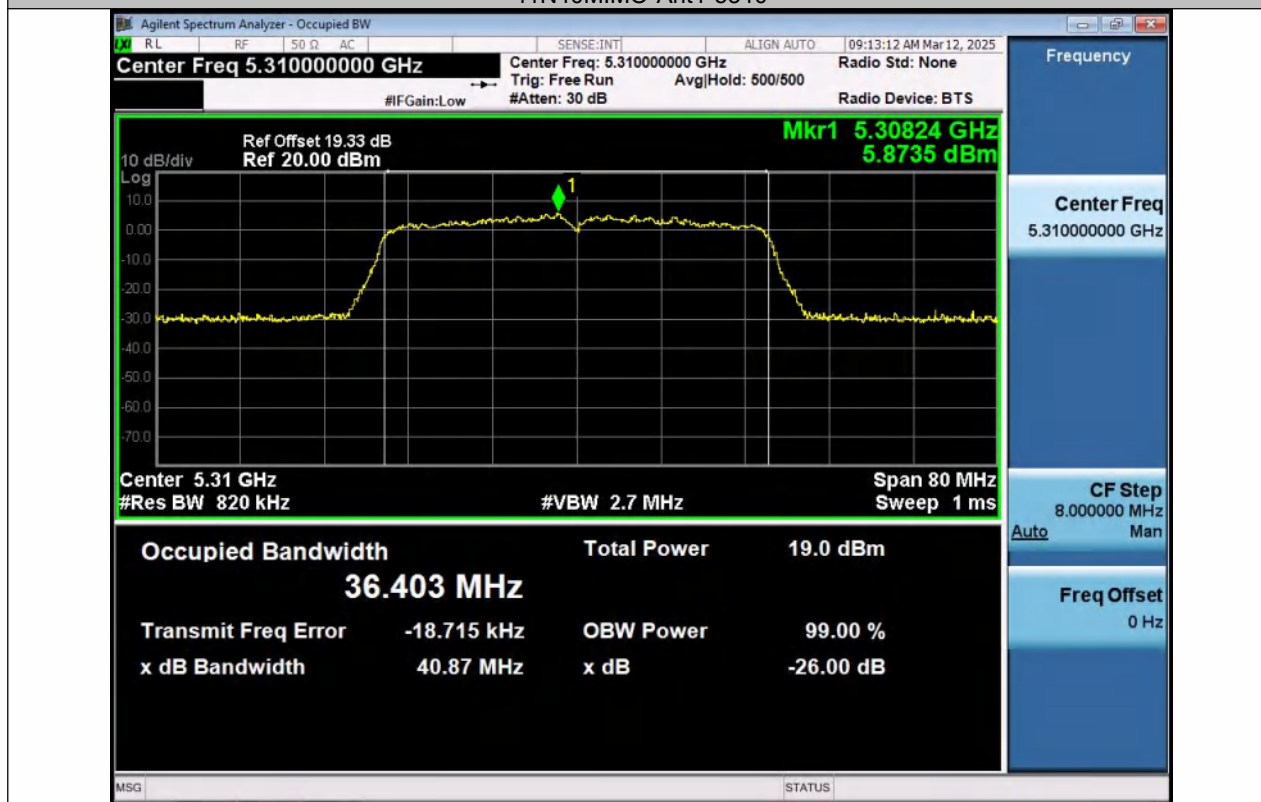


11N40MIMO-Ant2-5310

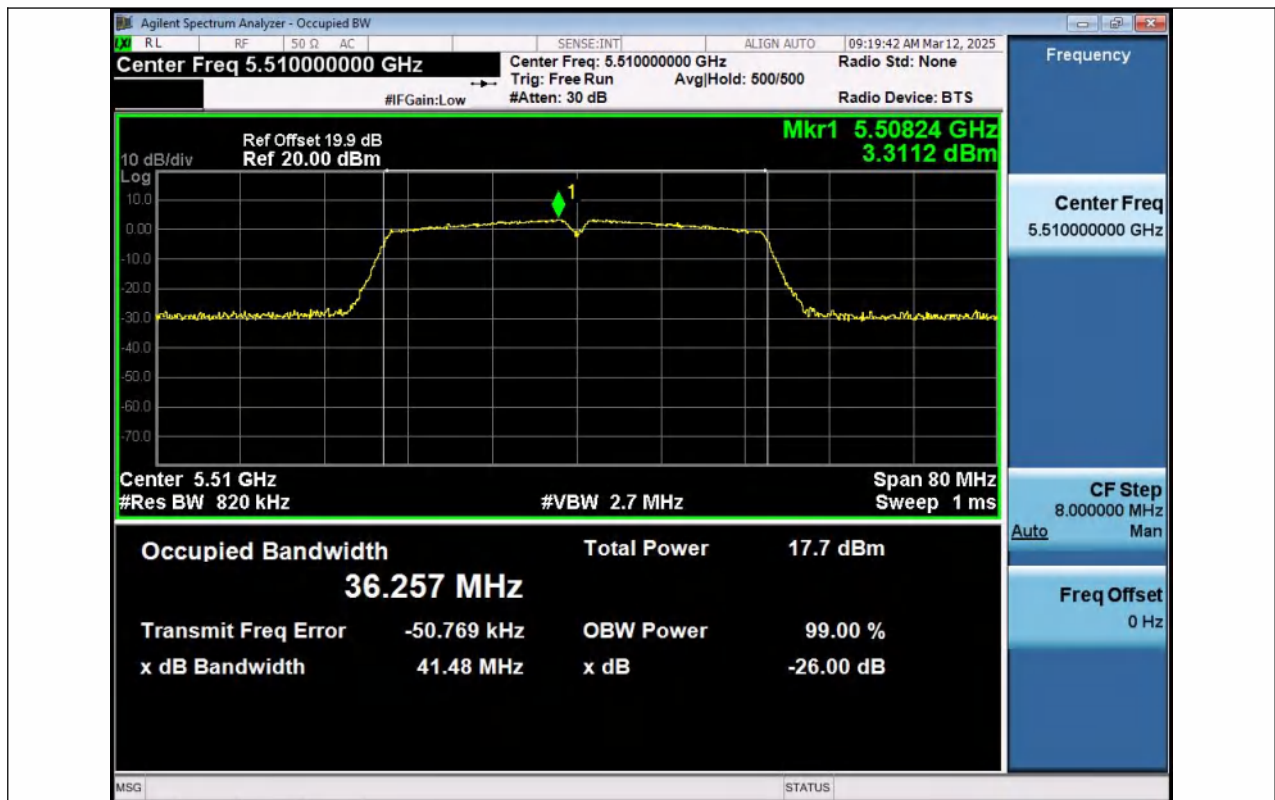


11N40MIMO-Ant1-5510

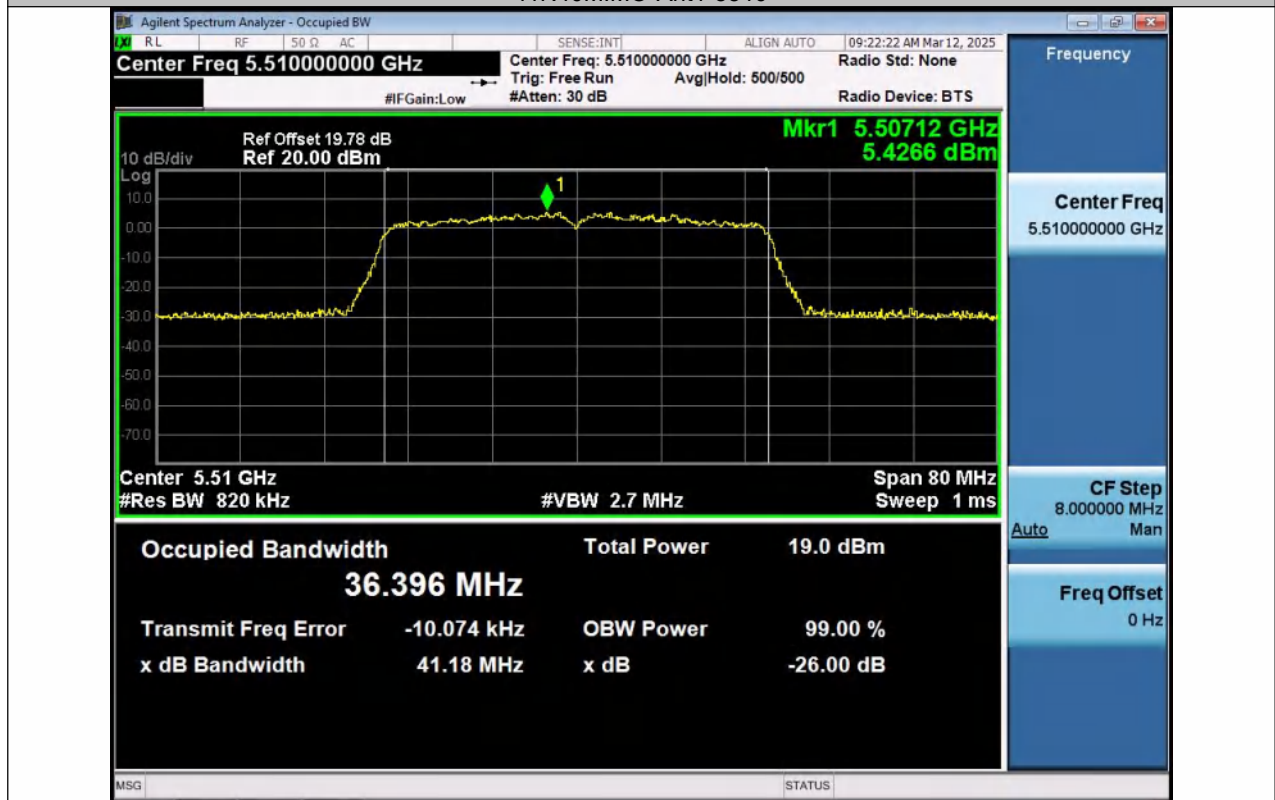


11N40MIMO-Ant2-5510

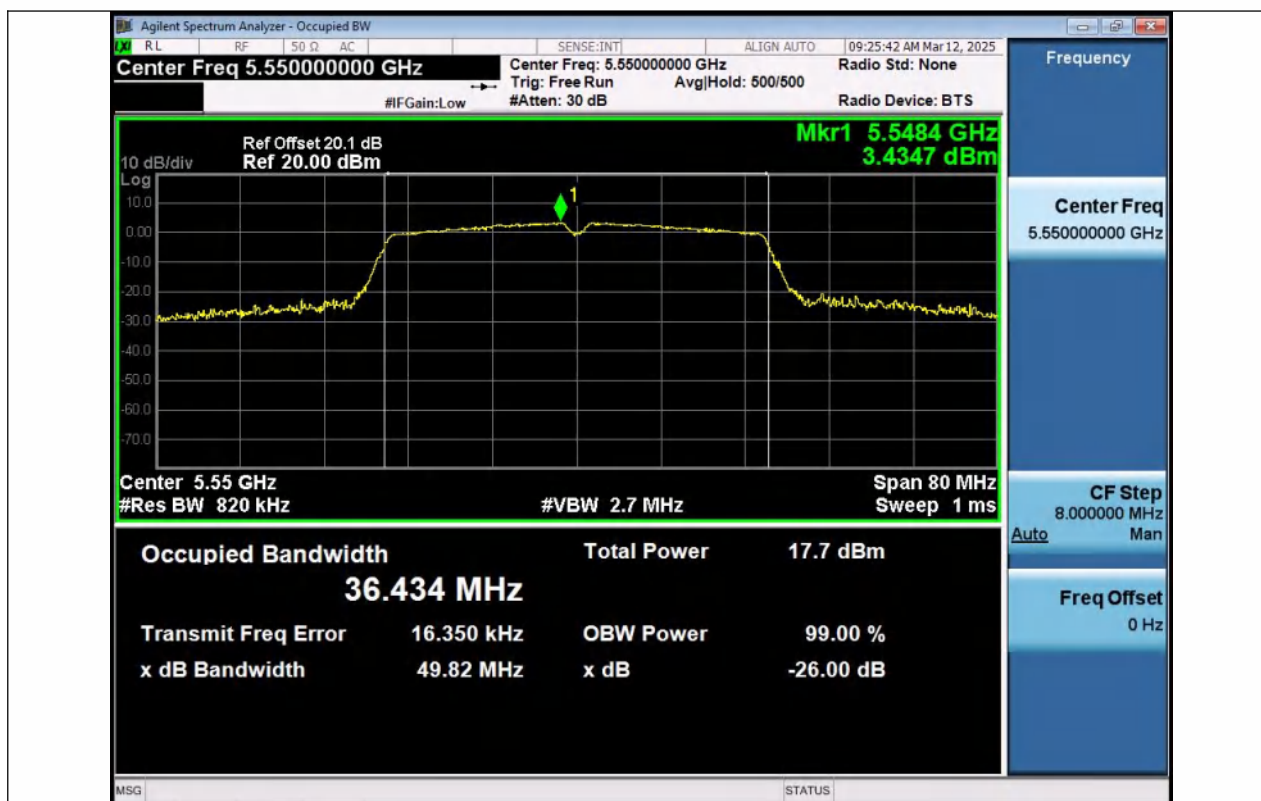


11N40MIMO-Ant1-5550

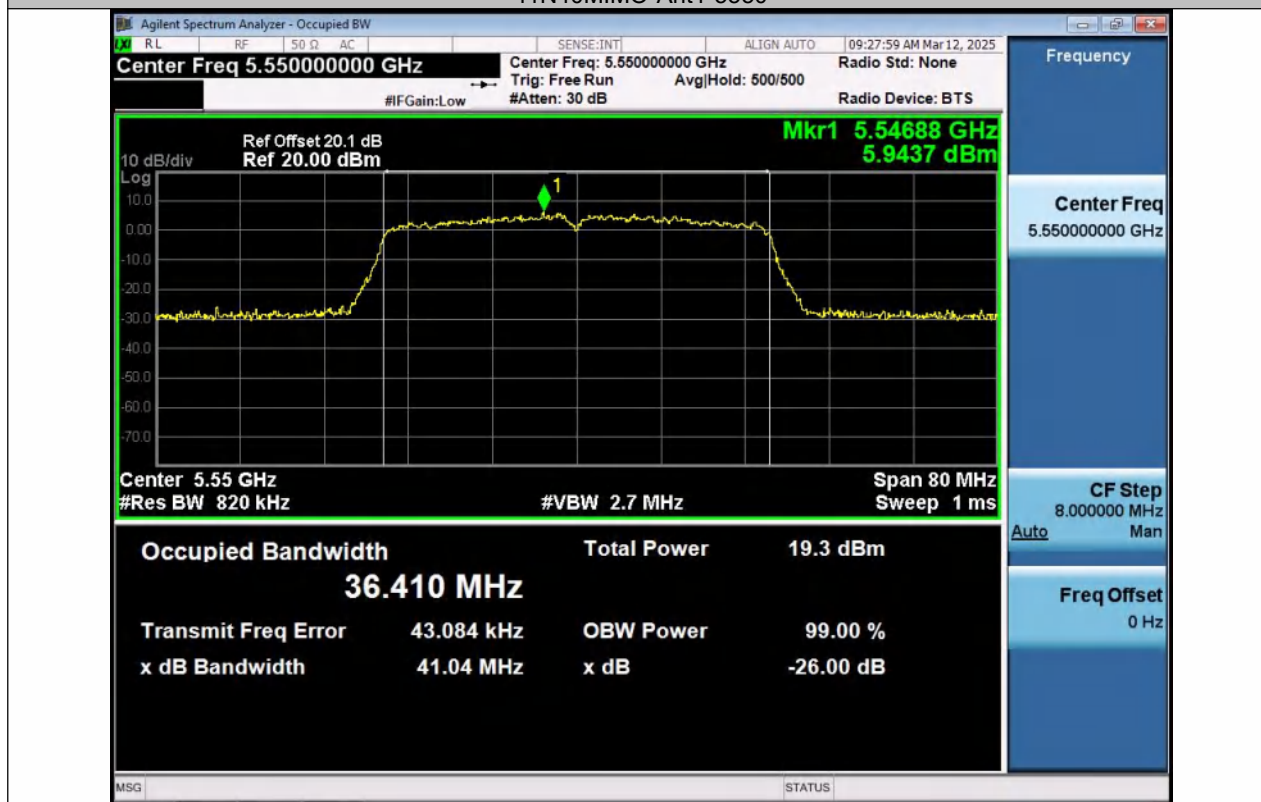


11N40MIMO-Ant2-5550




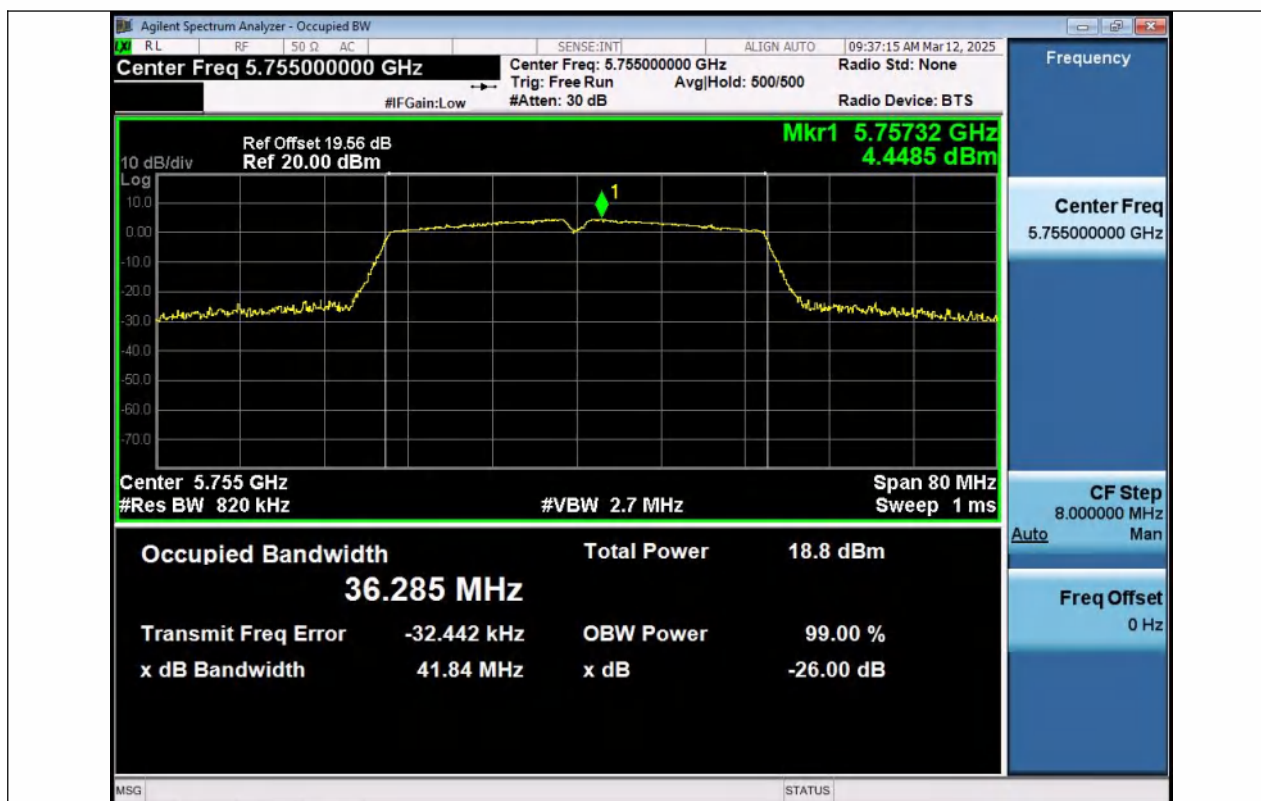


11N40MIMO-Ant1-5755

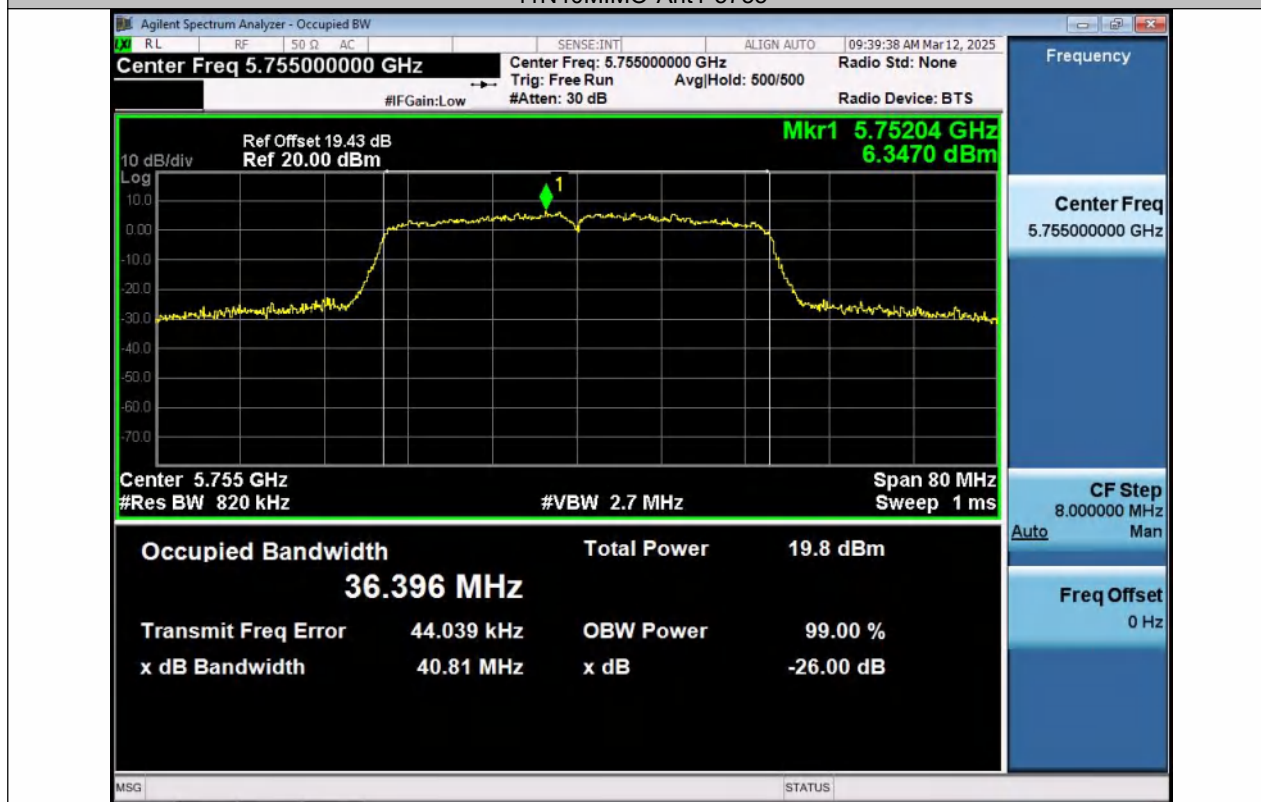


11N40MIMO-Ant2-5755

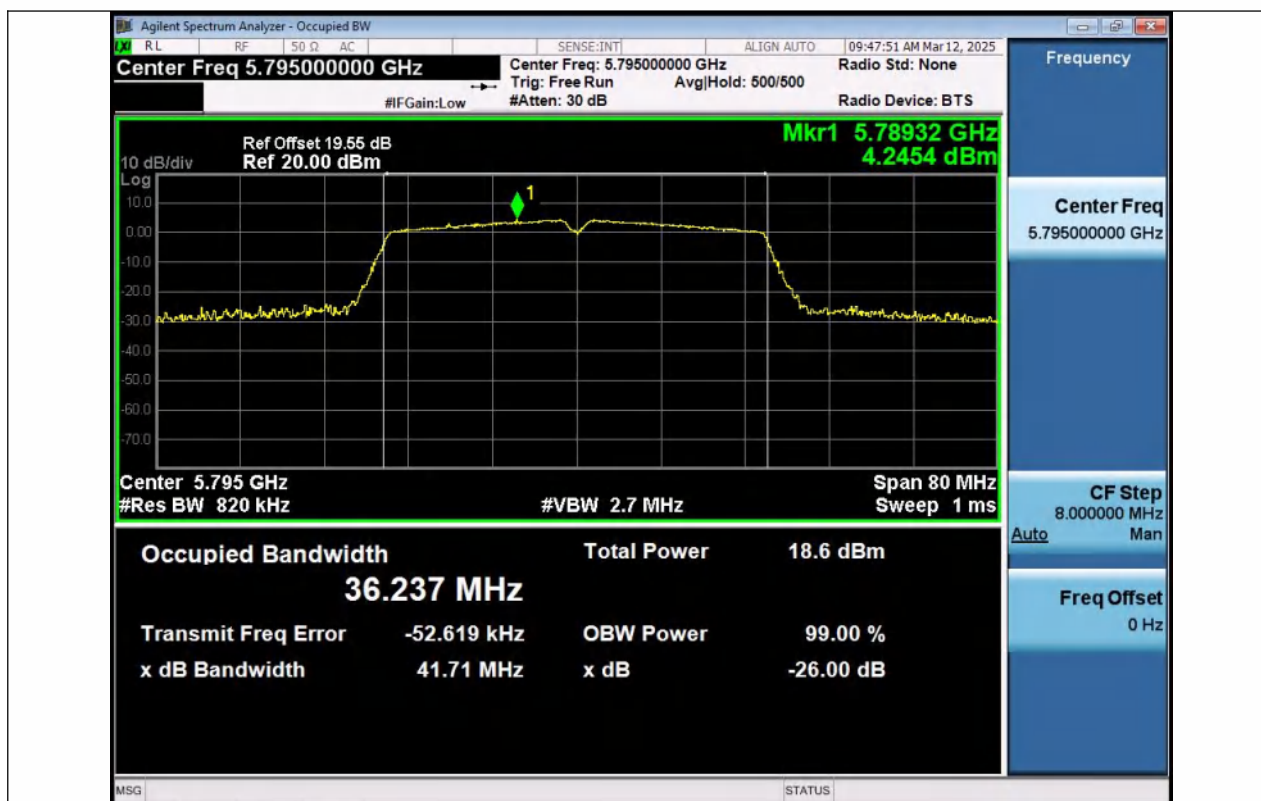


11N40MIMO-Ant1-5795

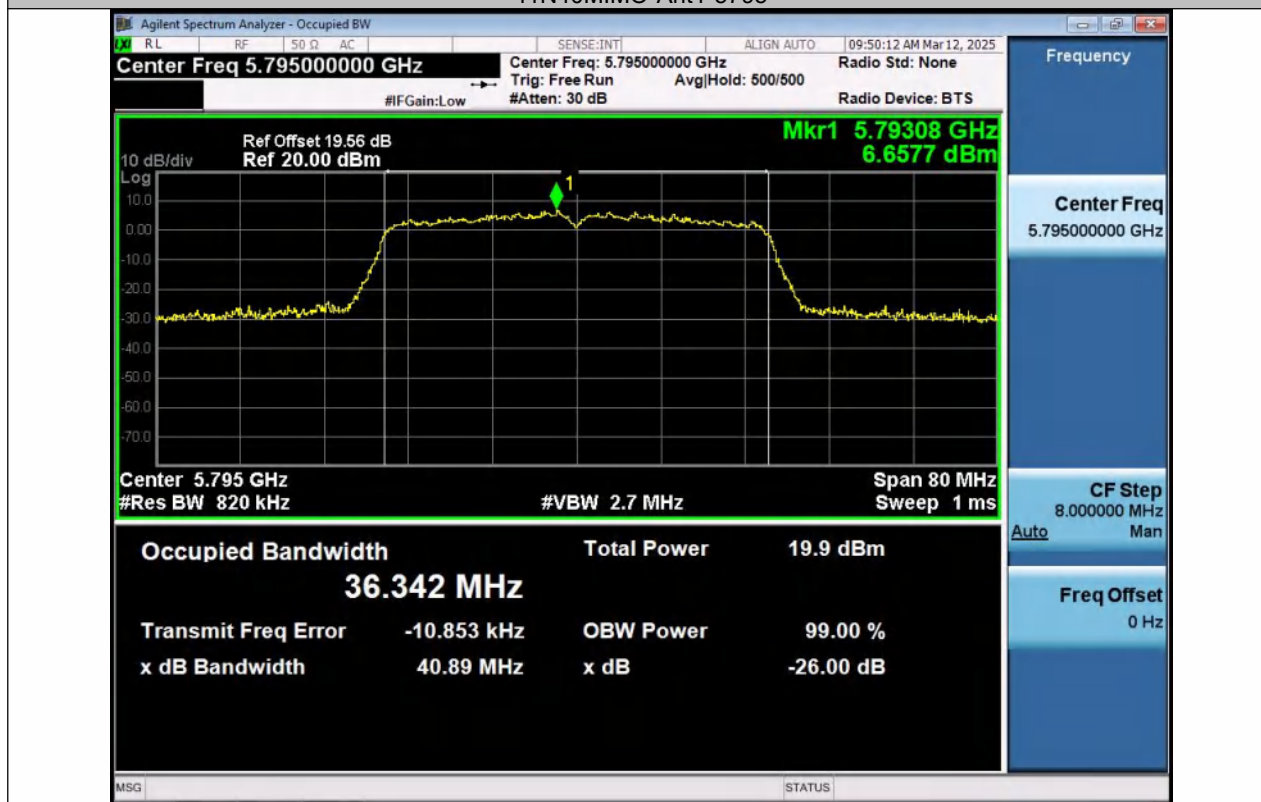


11N40MIMO-Ant2-5795

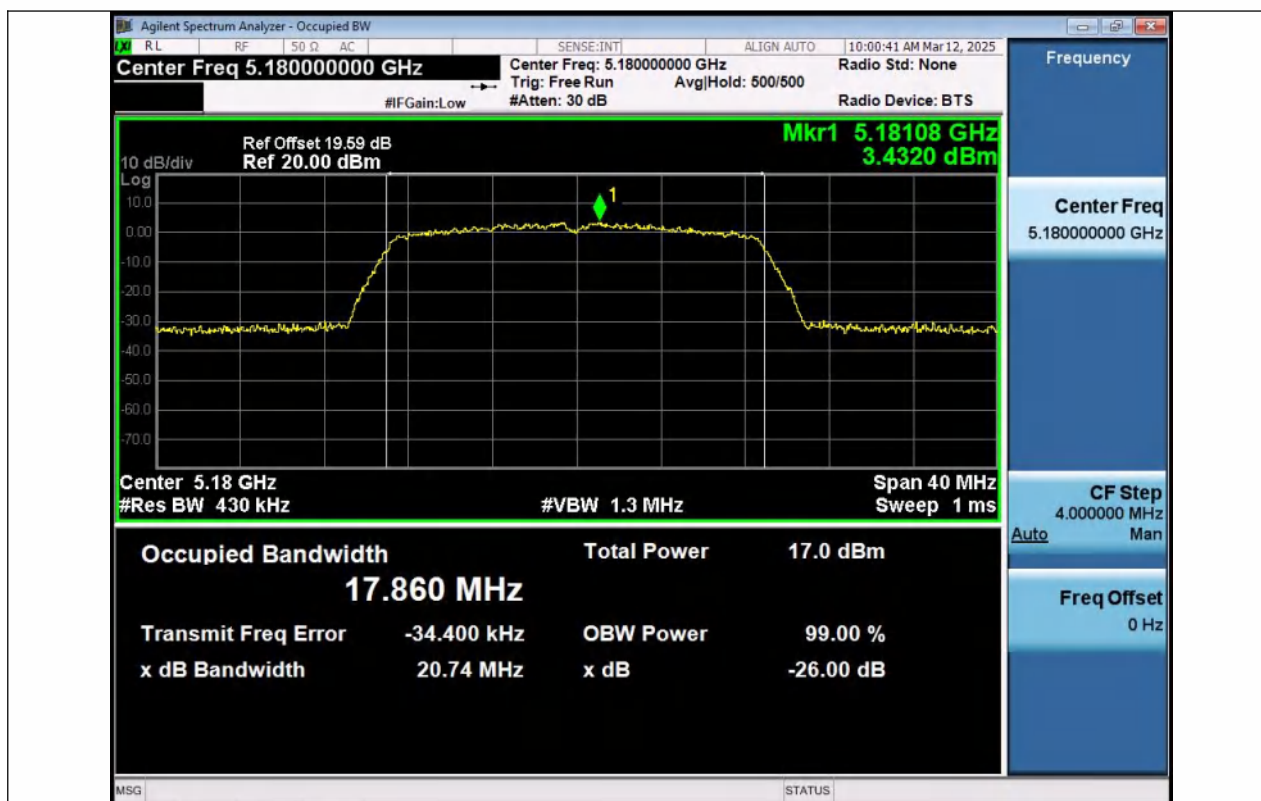


11AC20MIMO-Ant1-5180

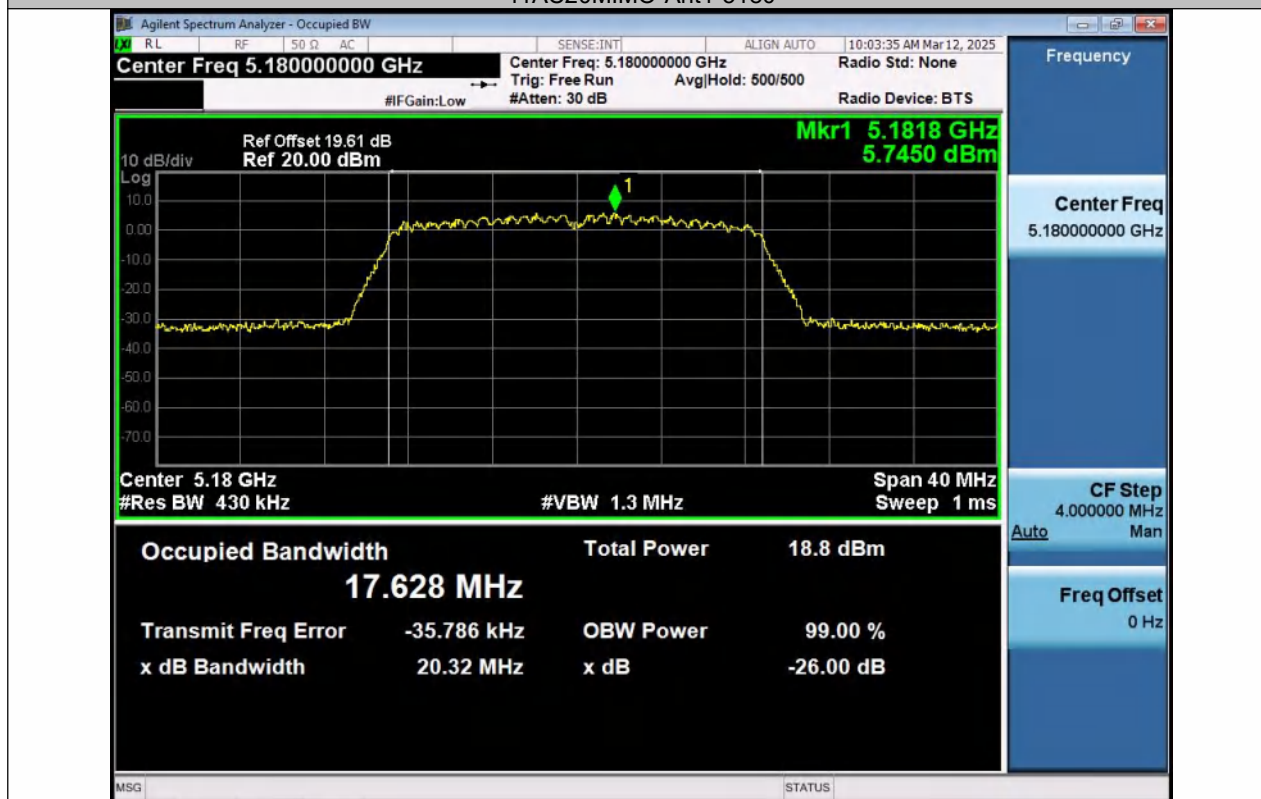


11AC20MIMO-Ant2-5180

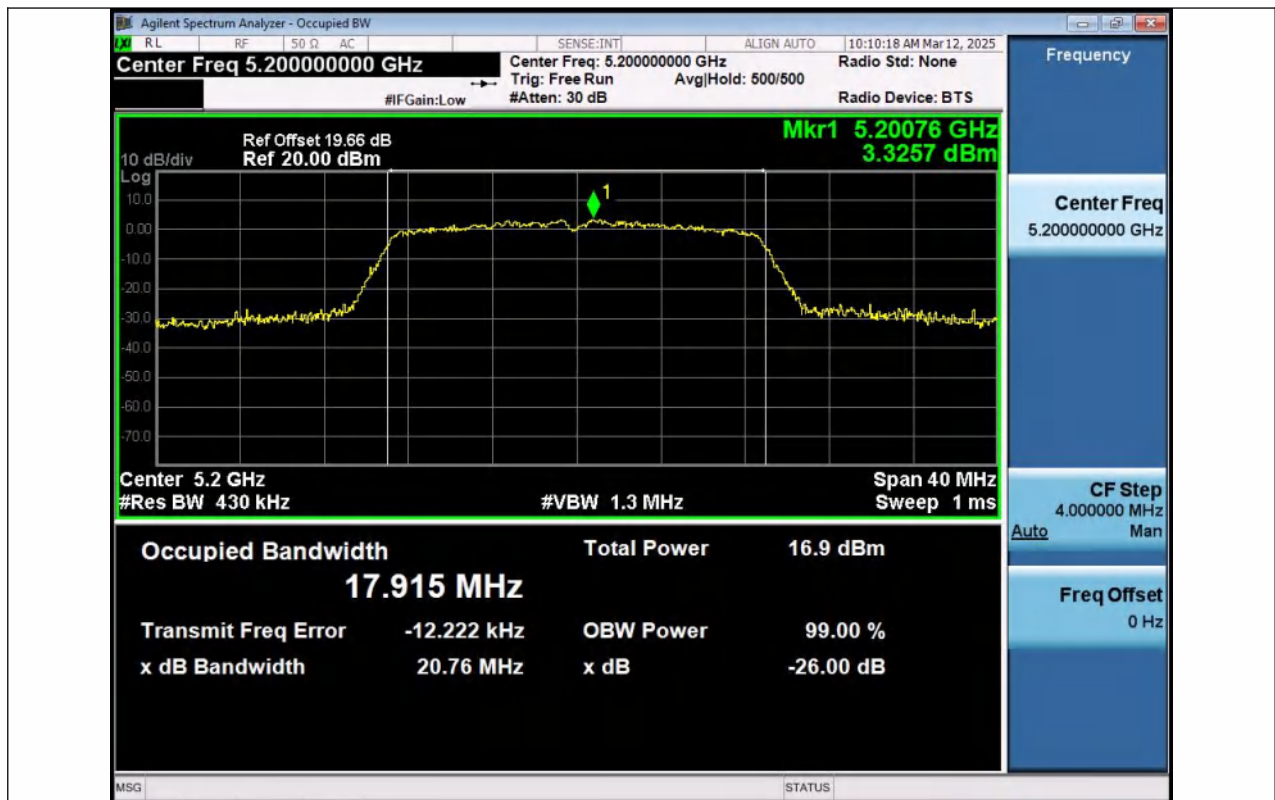


11AC20MIMO-Ant1-5200

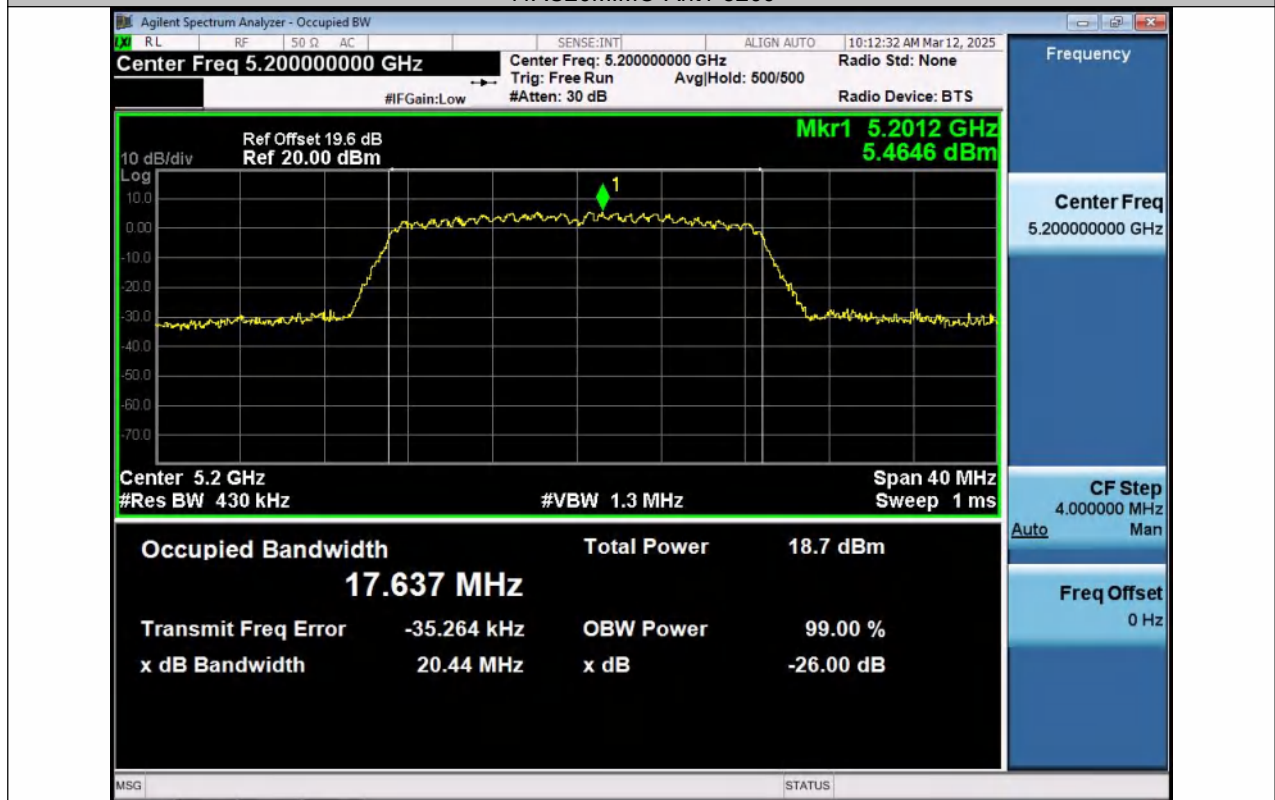


11AC20MIMO-Ant2-5200

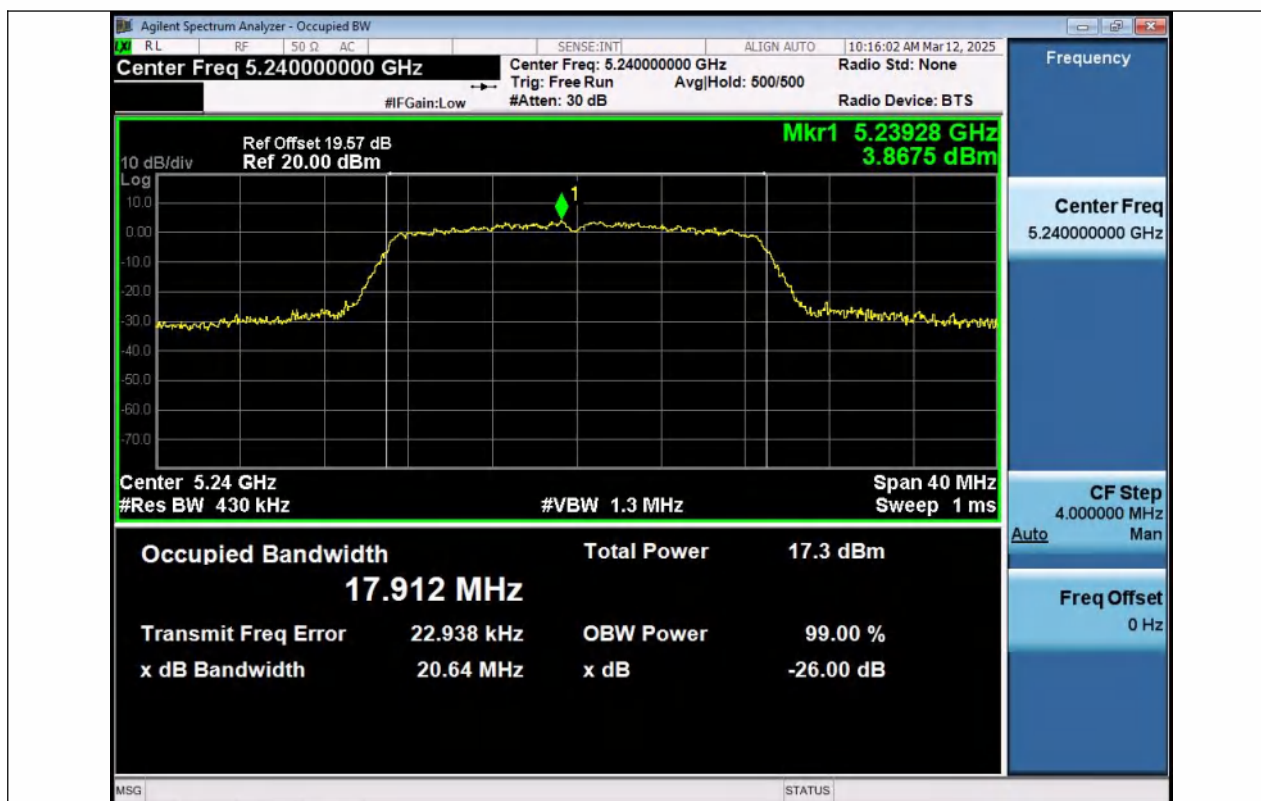


11AC20MIMO-Ant1-5240

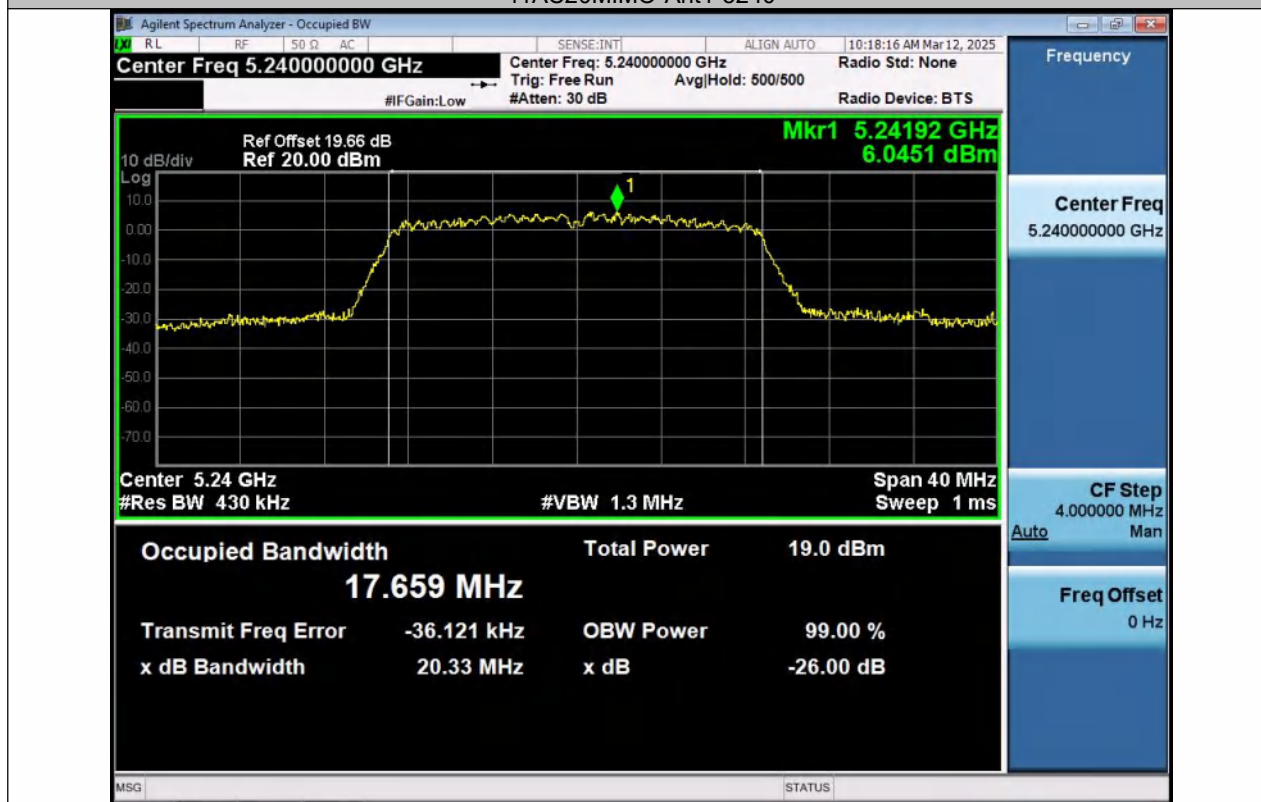


11AC20MIMO-Ant2-5240

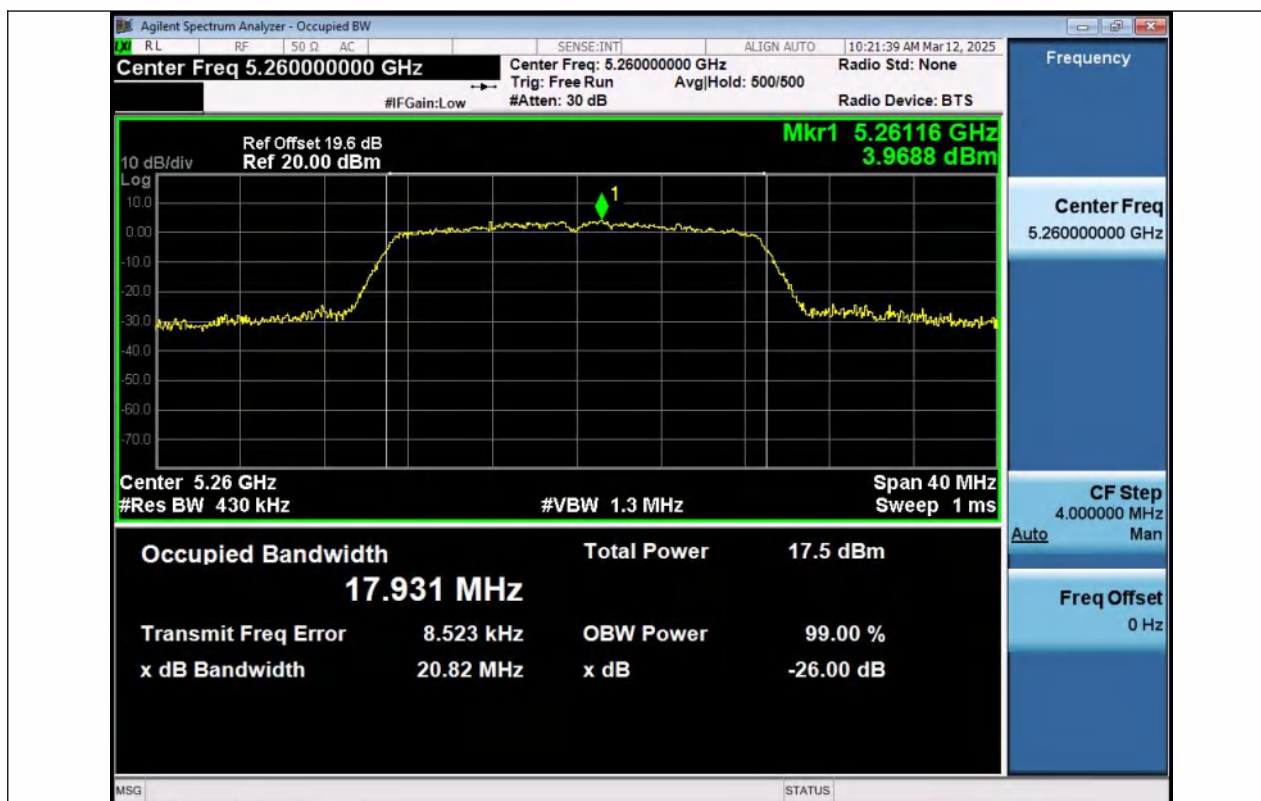


11AC20MIMO-Ant1-5260

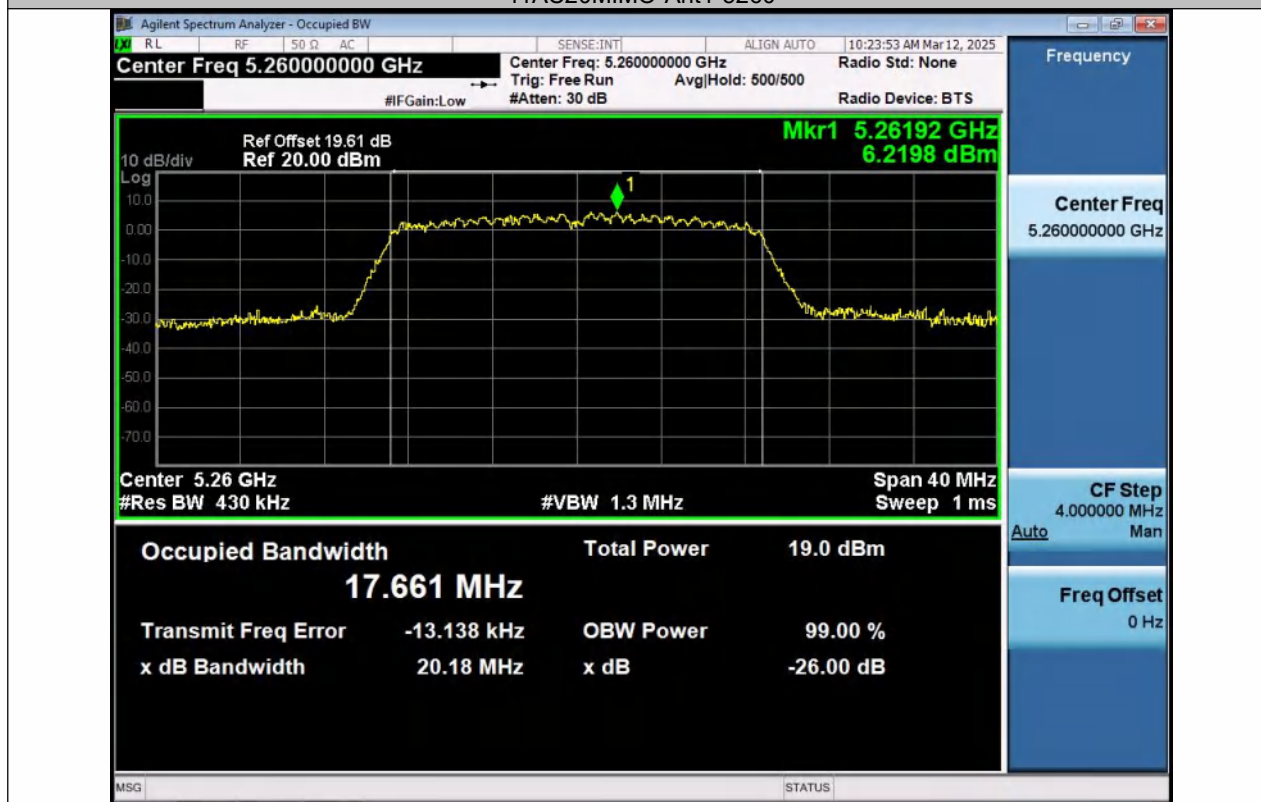


11AC20MIMO-Ant2-5260

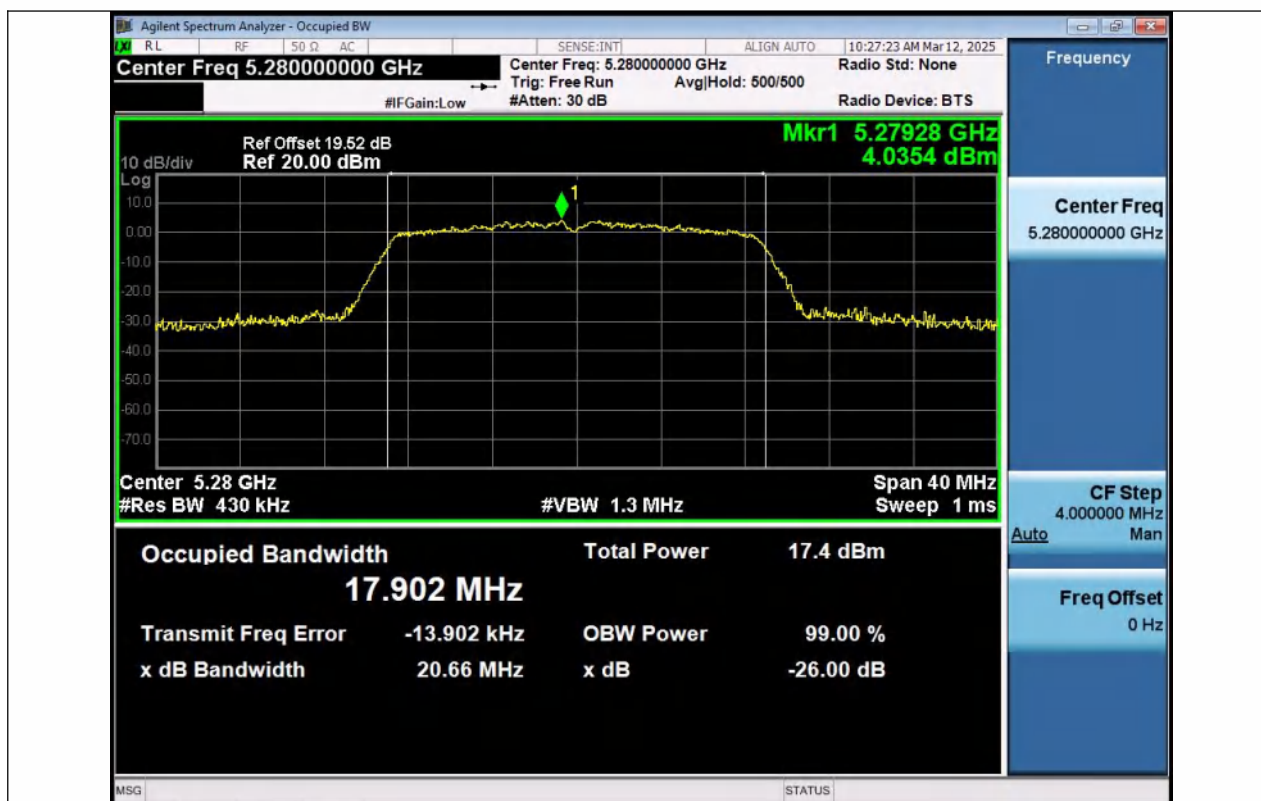


11AC20MIMO-Ant1-5280

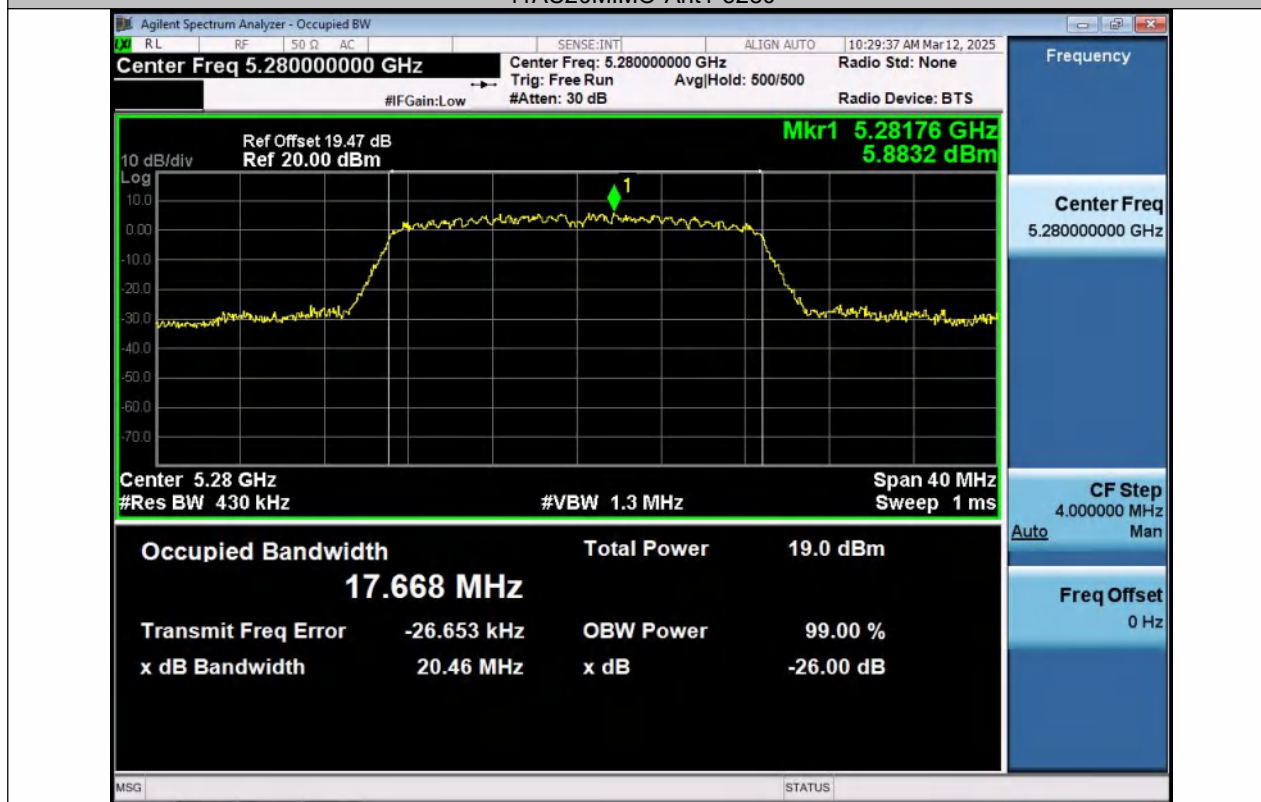


11AC20MIMO-Ant2-5280

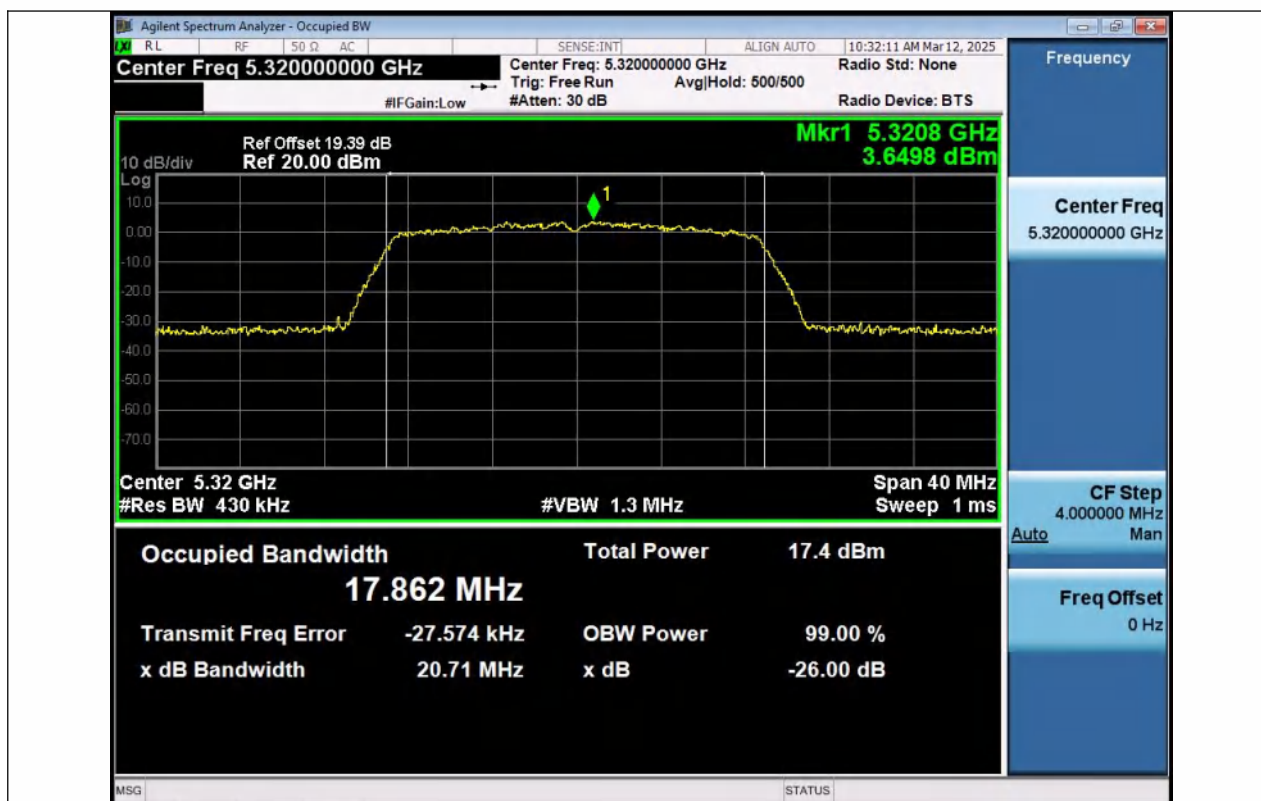


11AC20MIMO-Ant1-5320

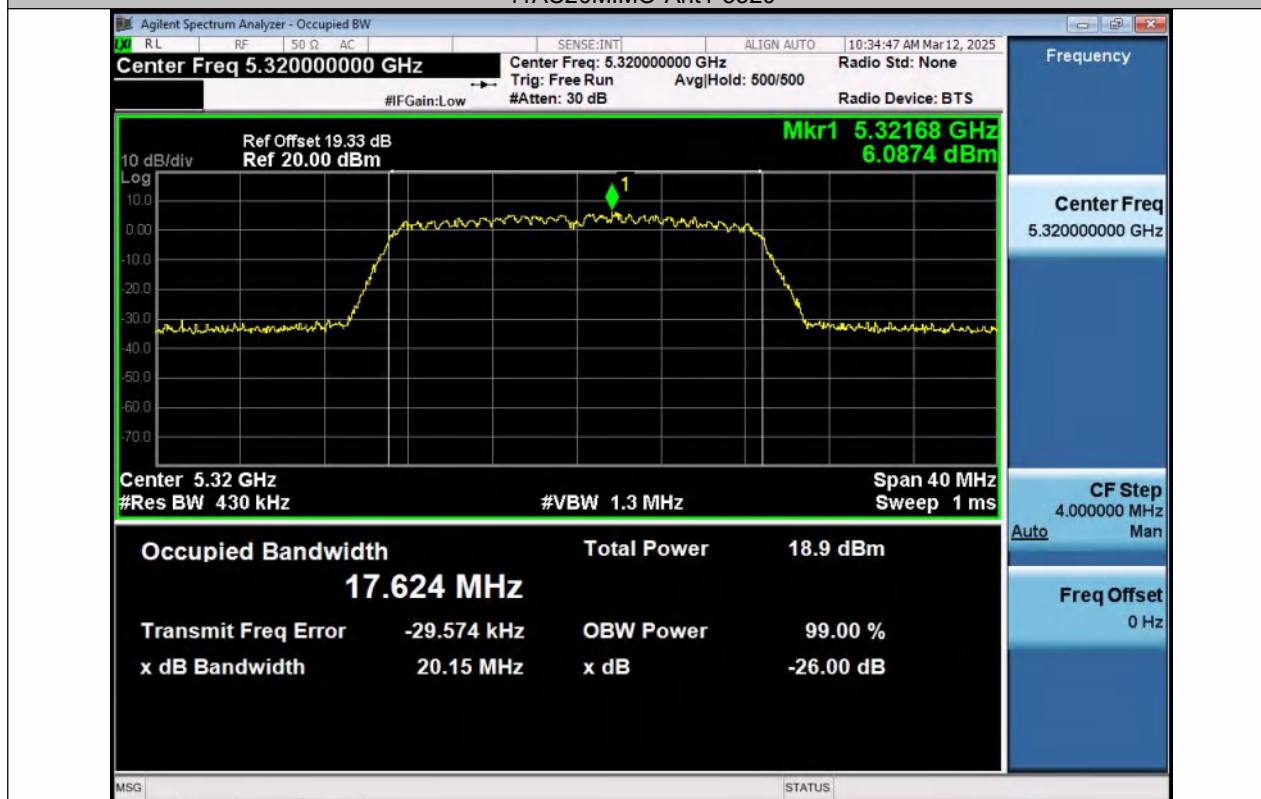


11AC20MIMO-Ant2-5320

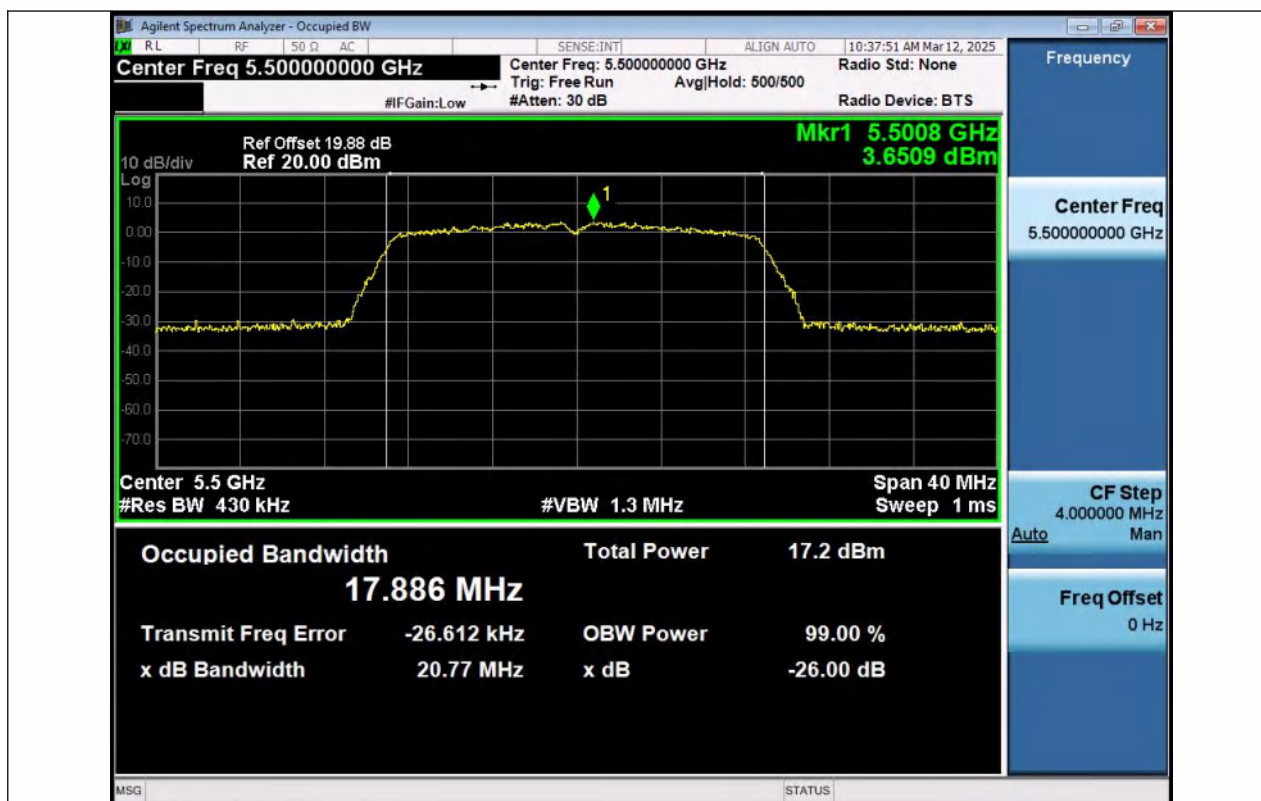


11AC20MIMO-Ant1-5500

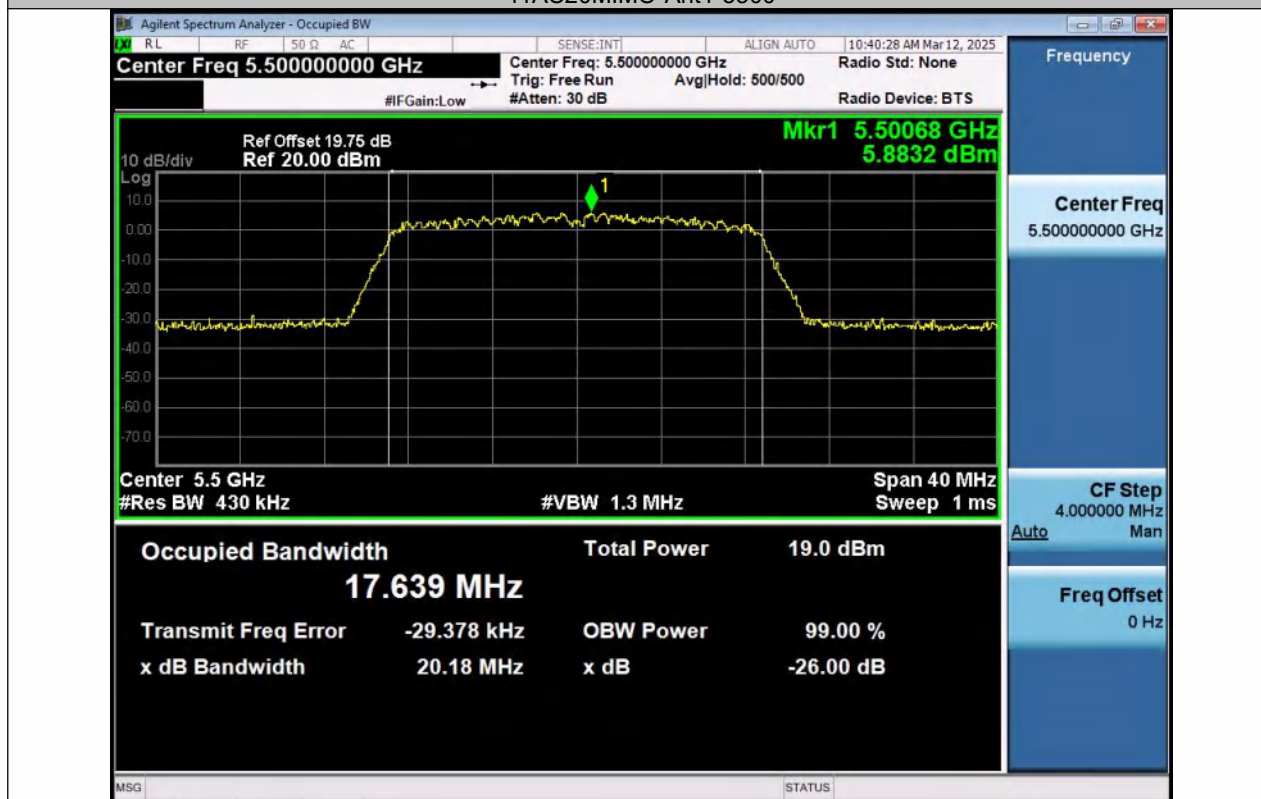


11AC20MIMO-Ant2-5500

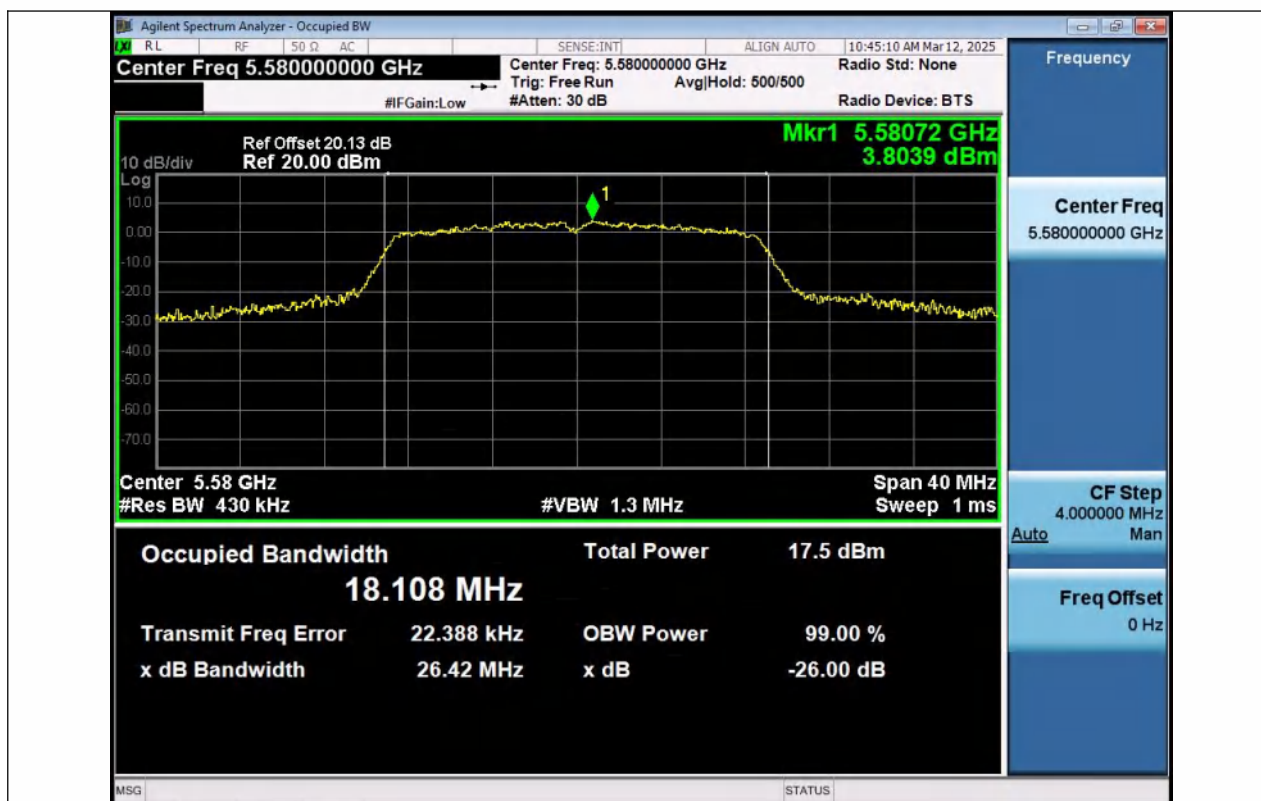


11AC20MIMO-Ant1-5580

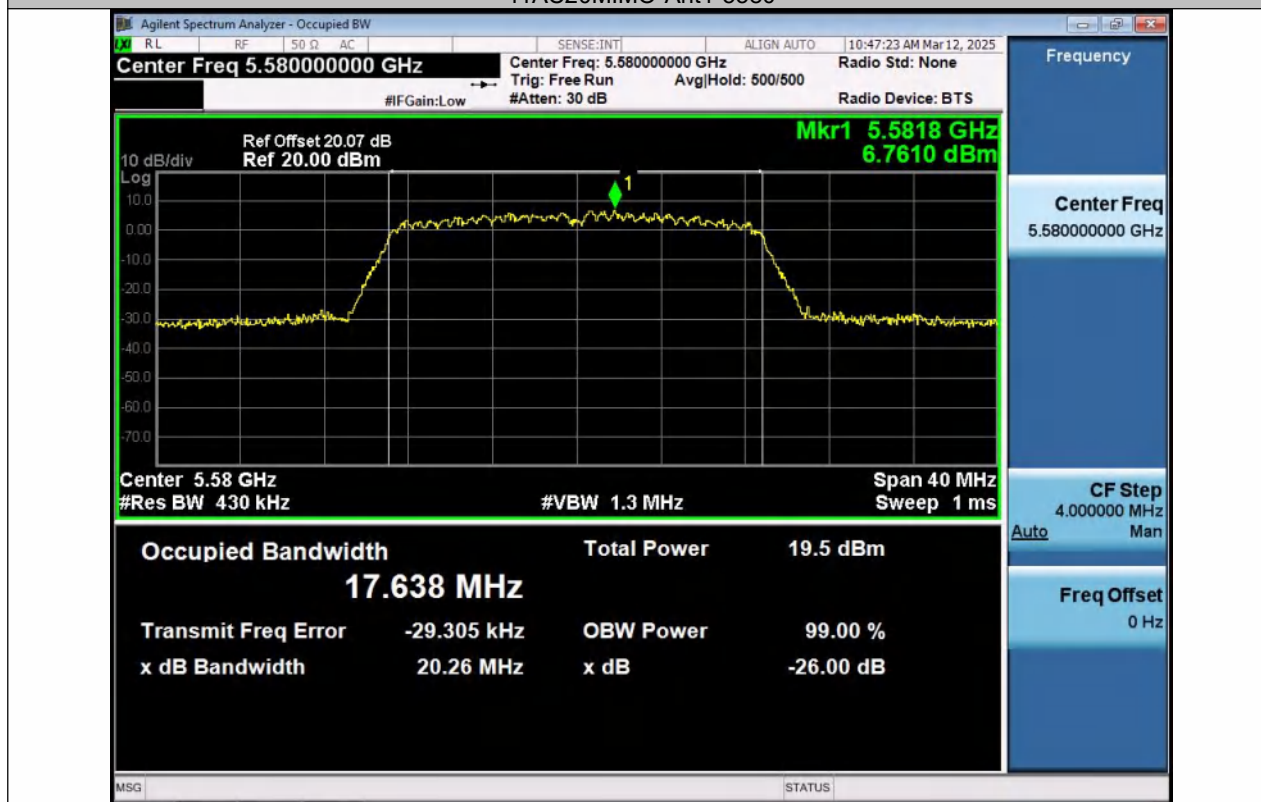


11AC20MIMO-Ant2-5580

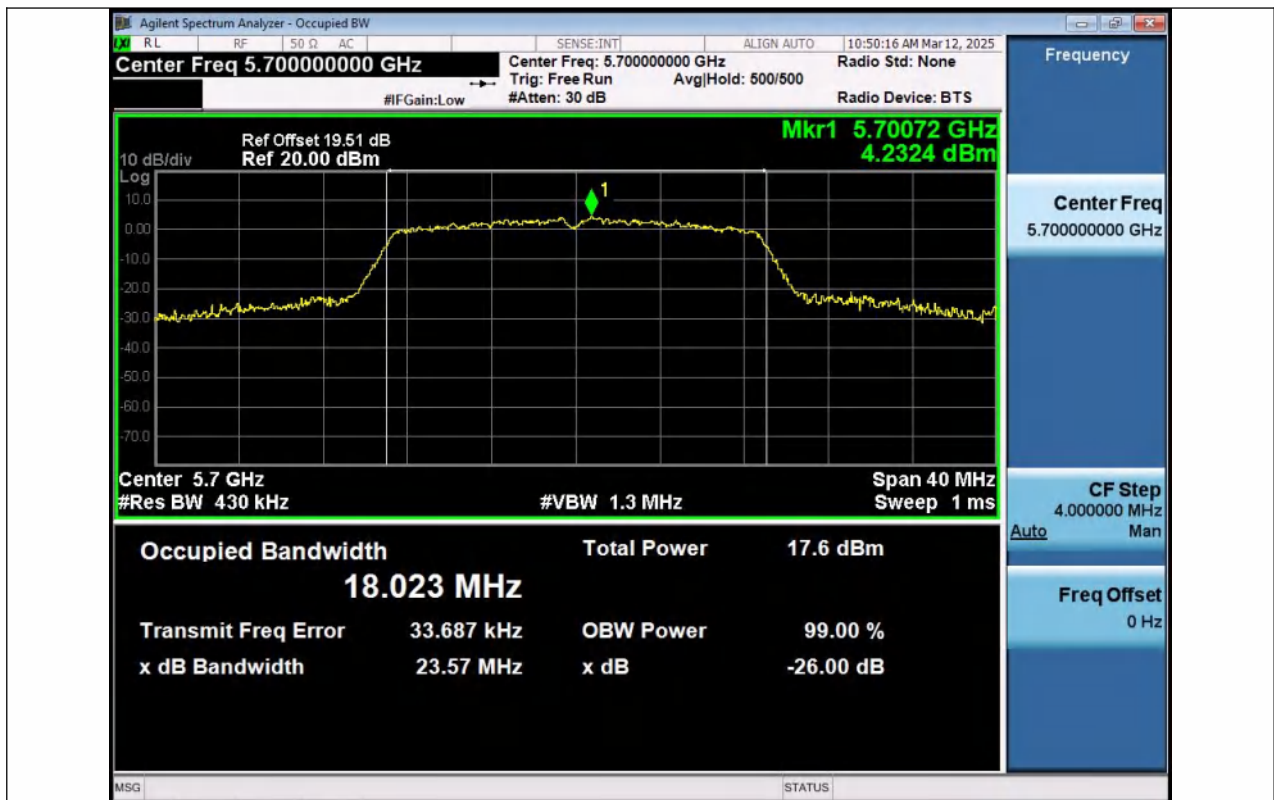


11AC20MIMO-Ant1-5700

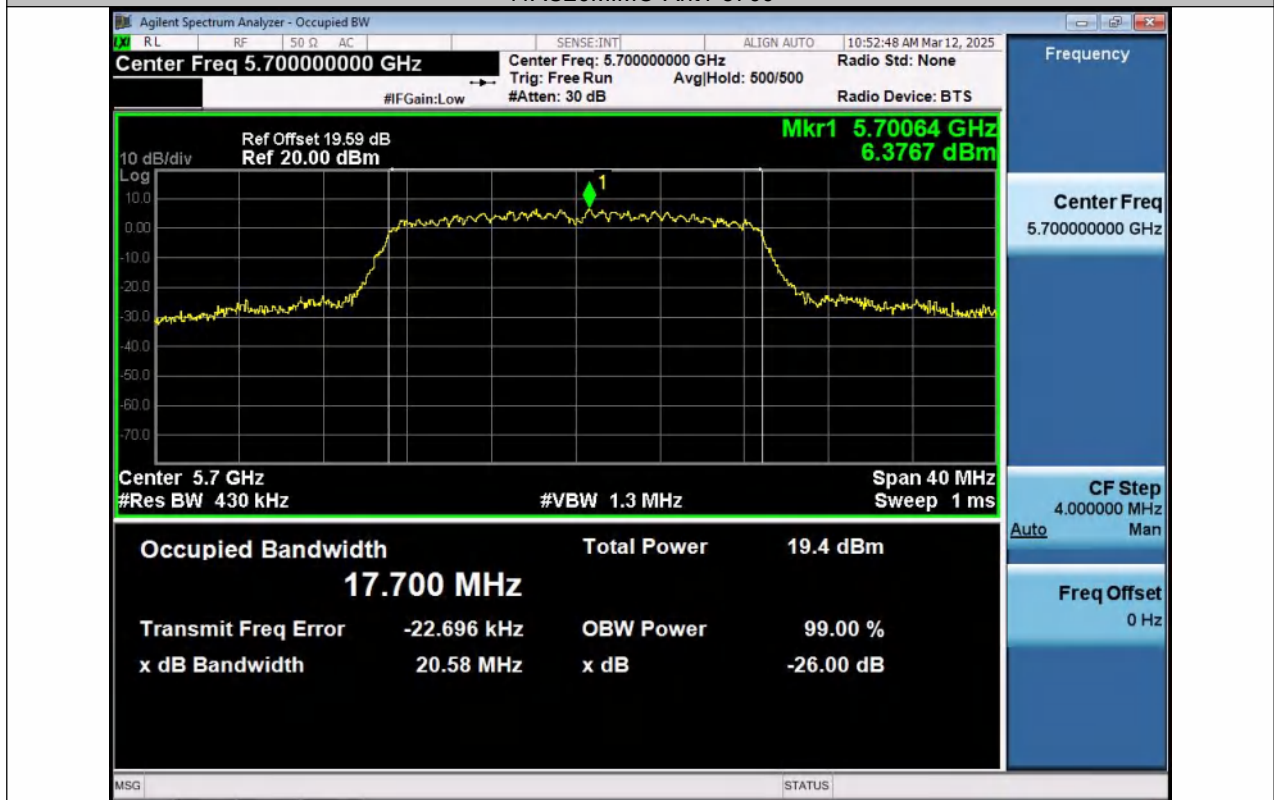



11AC20MIMO-Ant2-5700

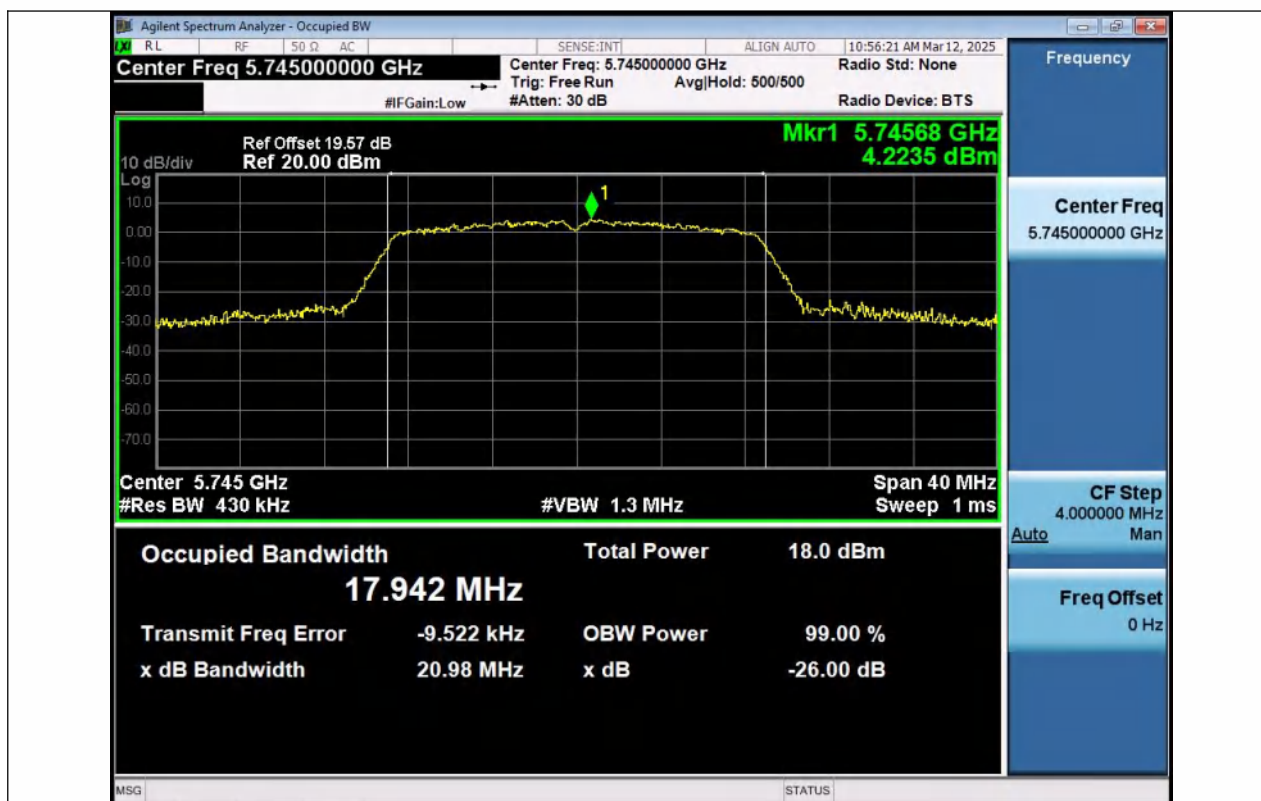


11AC20MIMO-Ant1-5745

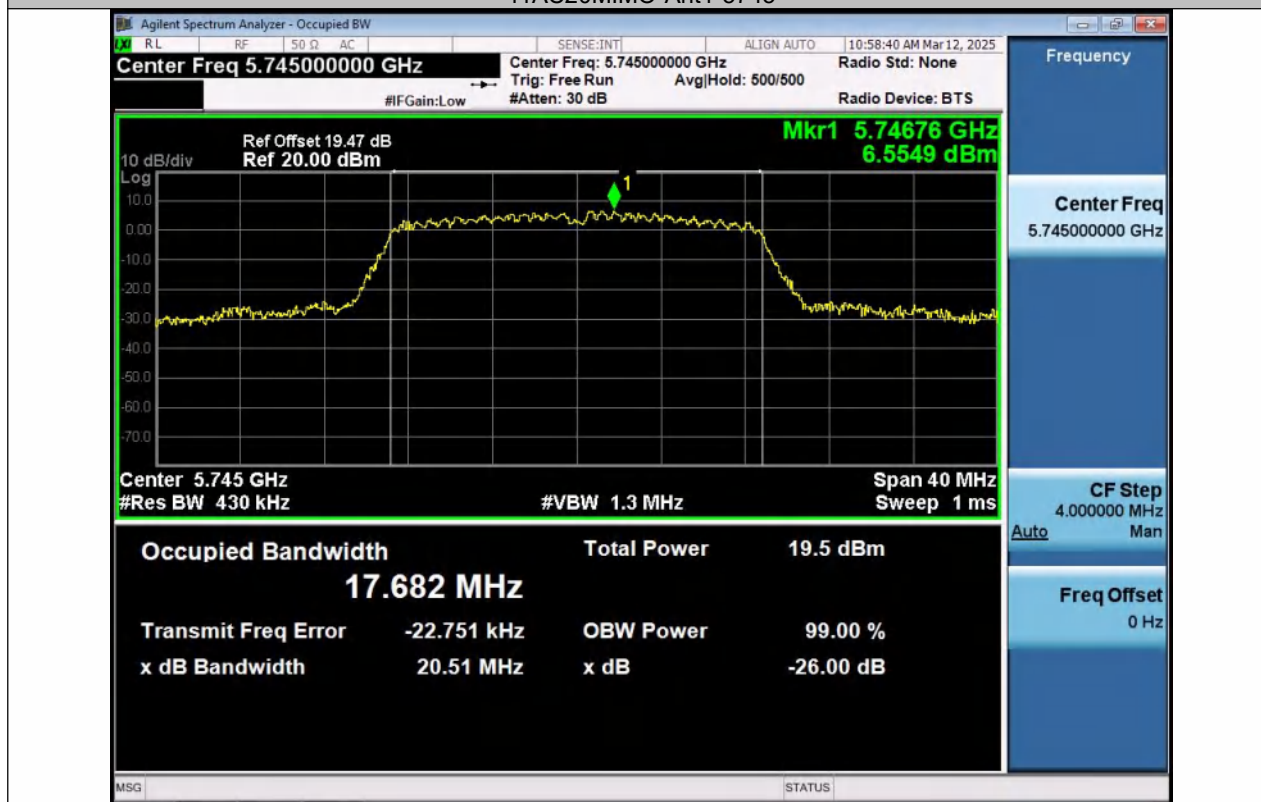


11AC20MIMO-Ant2-5745

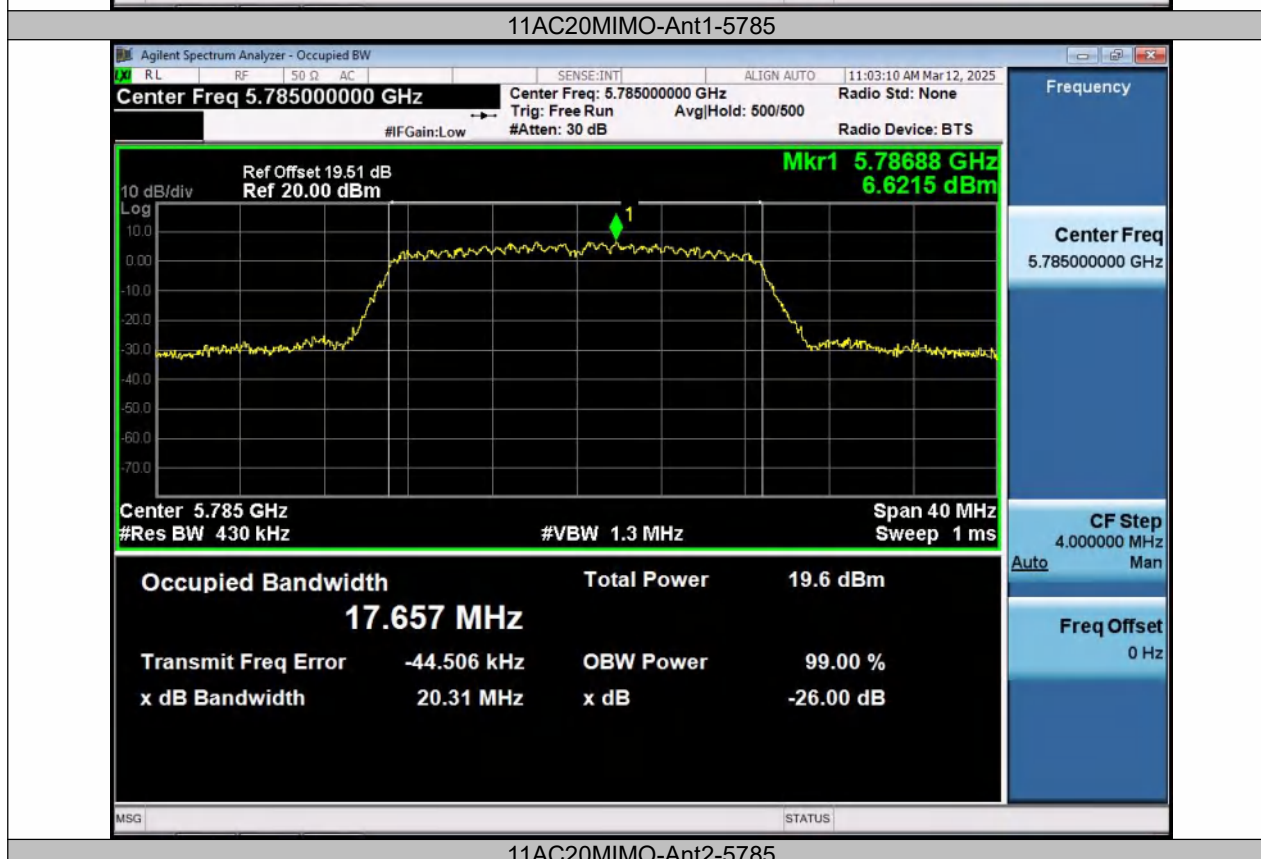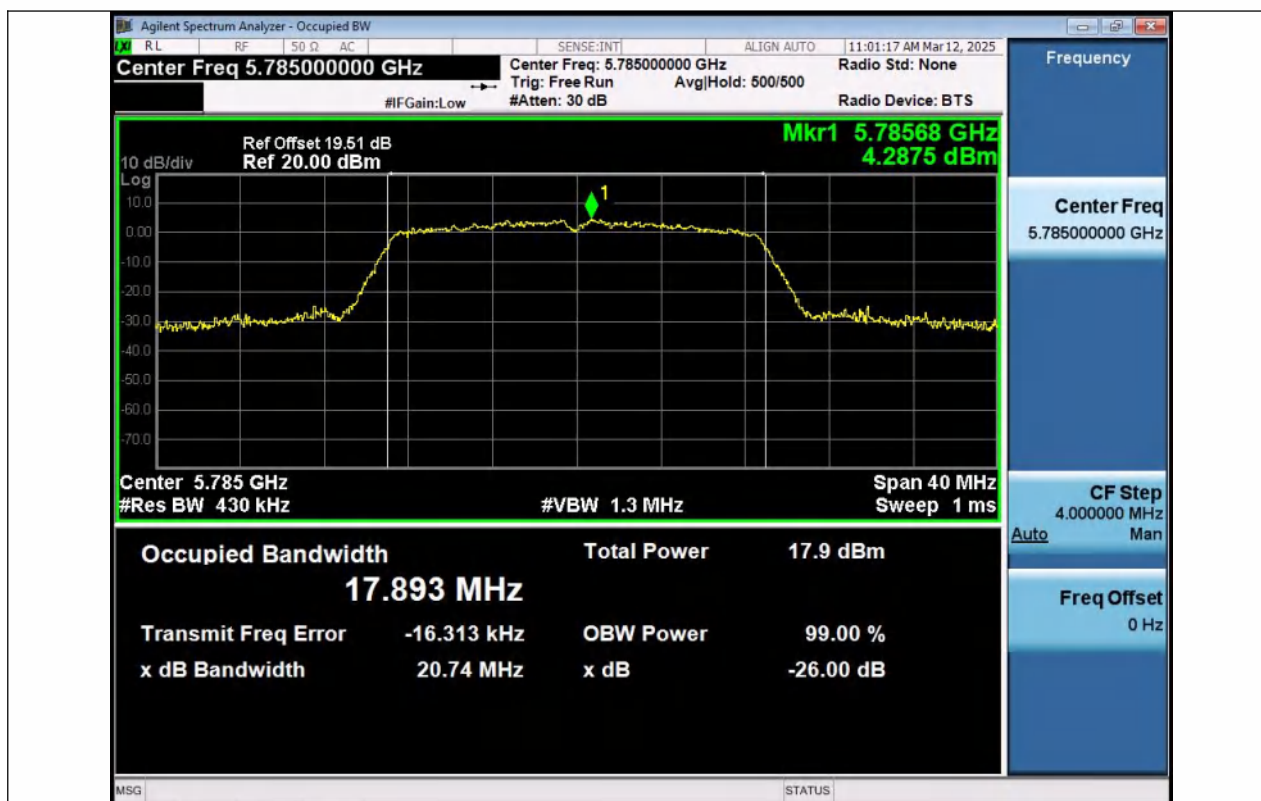


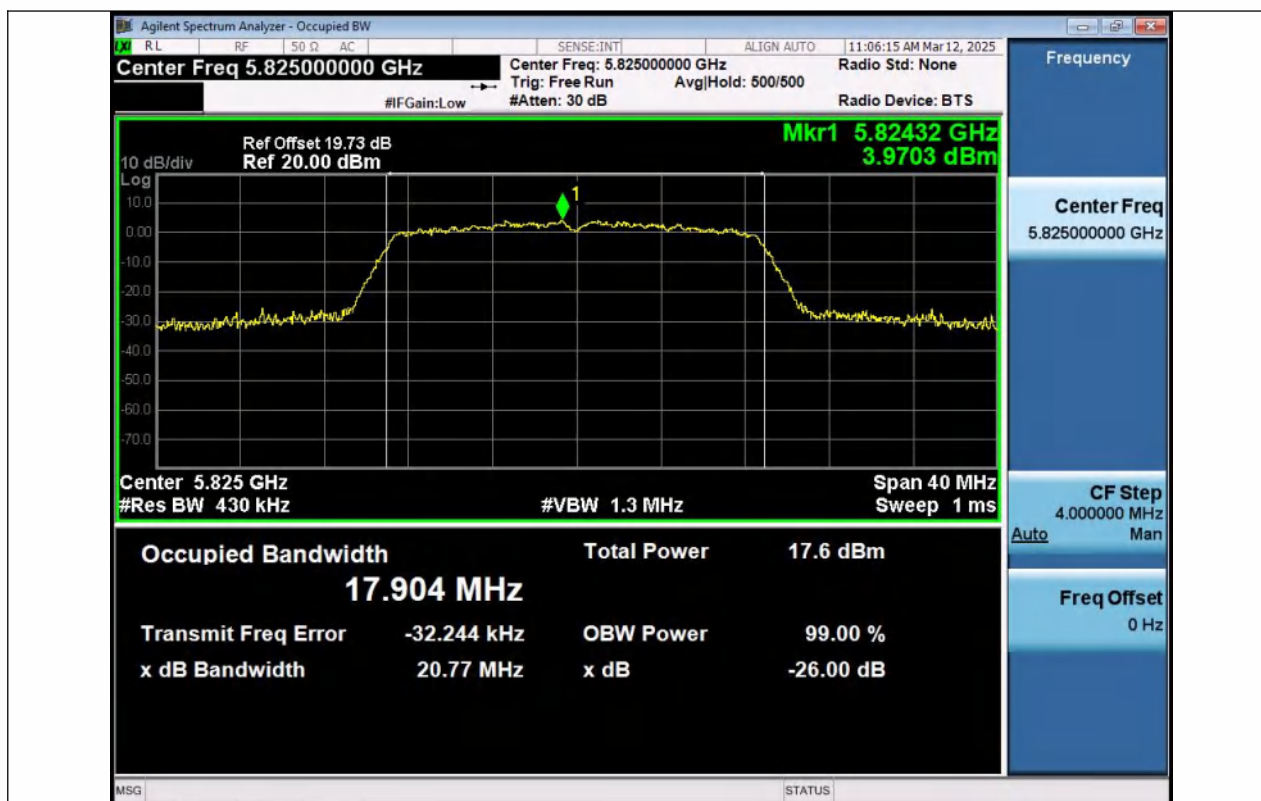


11AC20MIMO-Ant1-5825

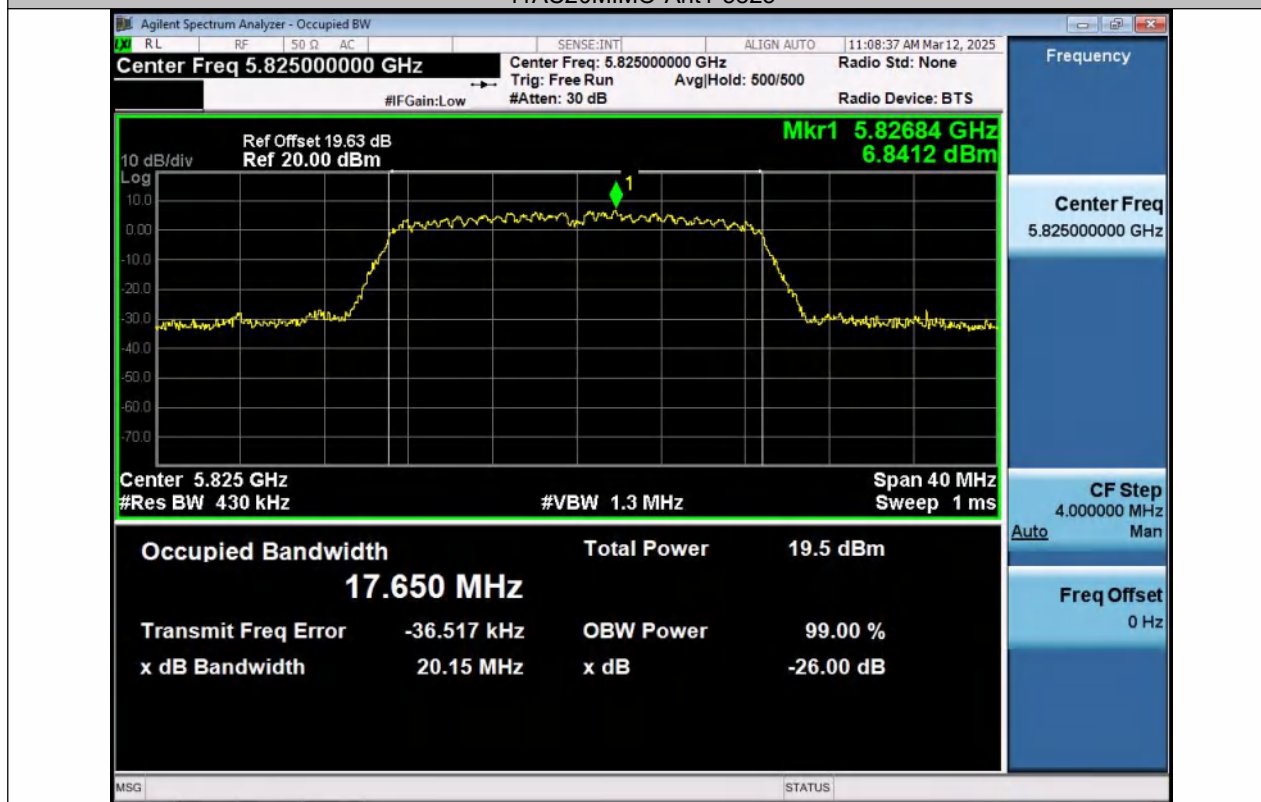


11AC20MIMO-Ant2-5825

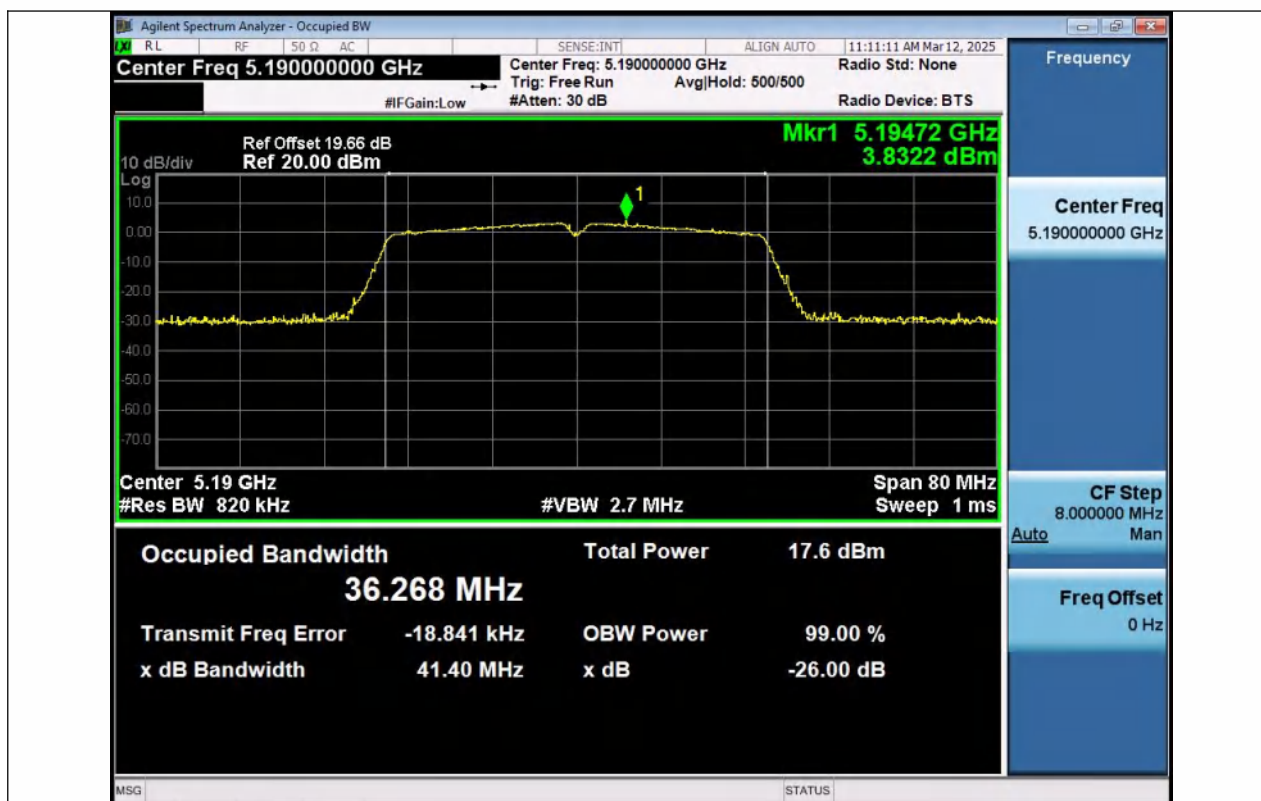


11AC40MIMO-Ant1-5190

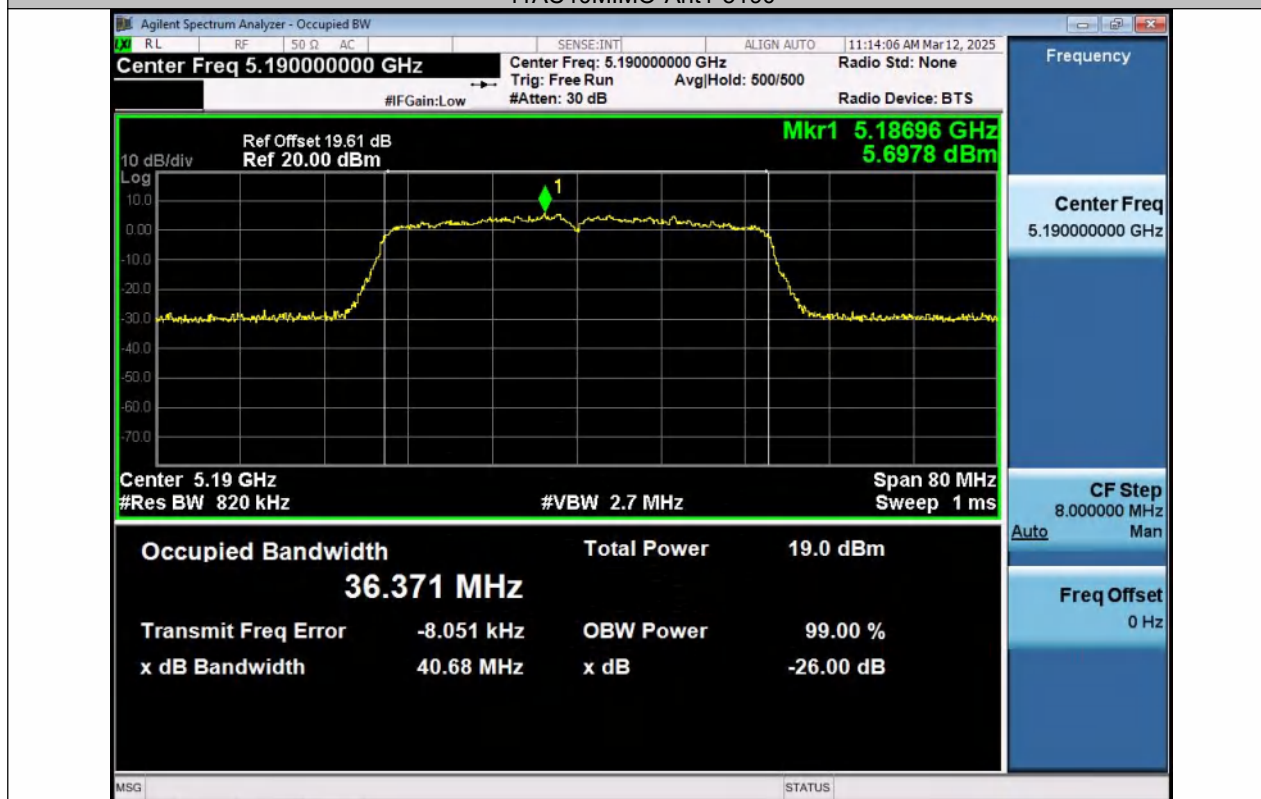


11AC40MIMO-Ant2-5190

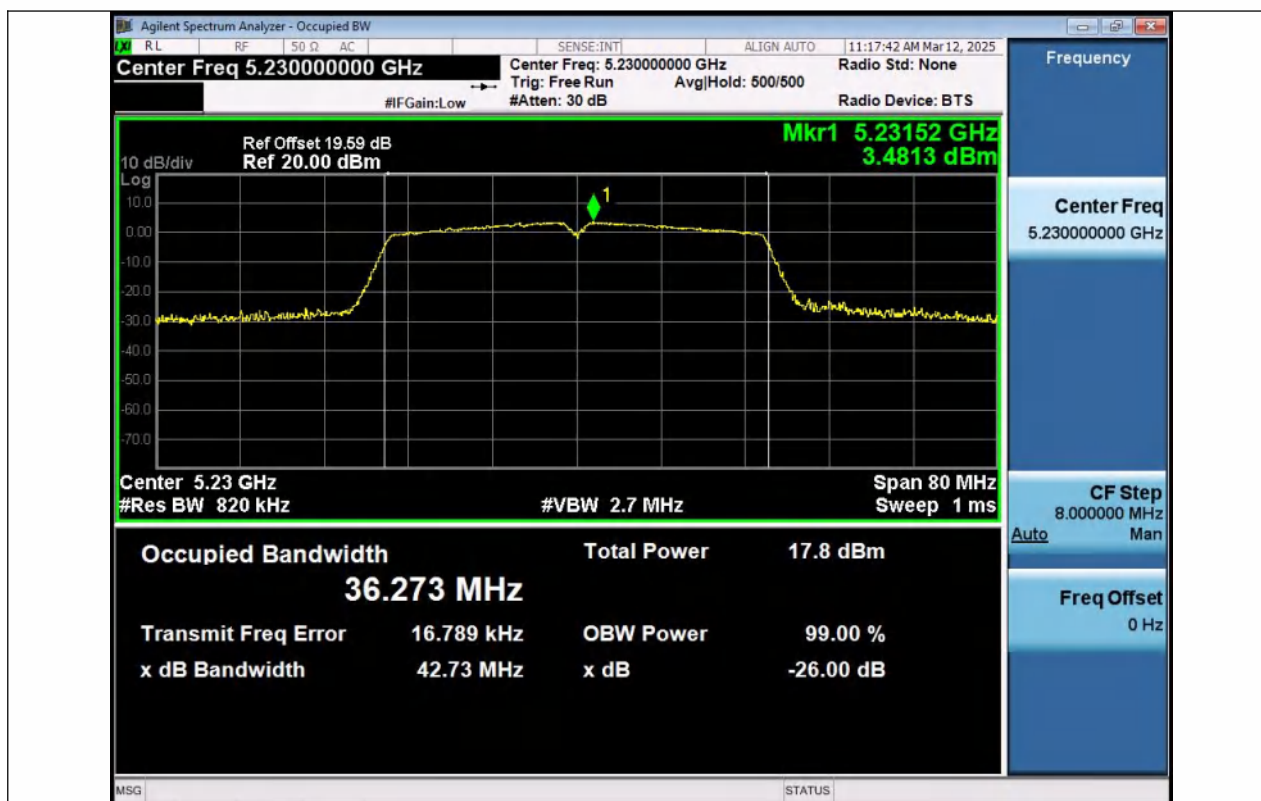


11AC40MIMO-Ant1-5230

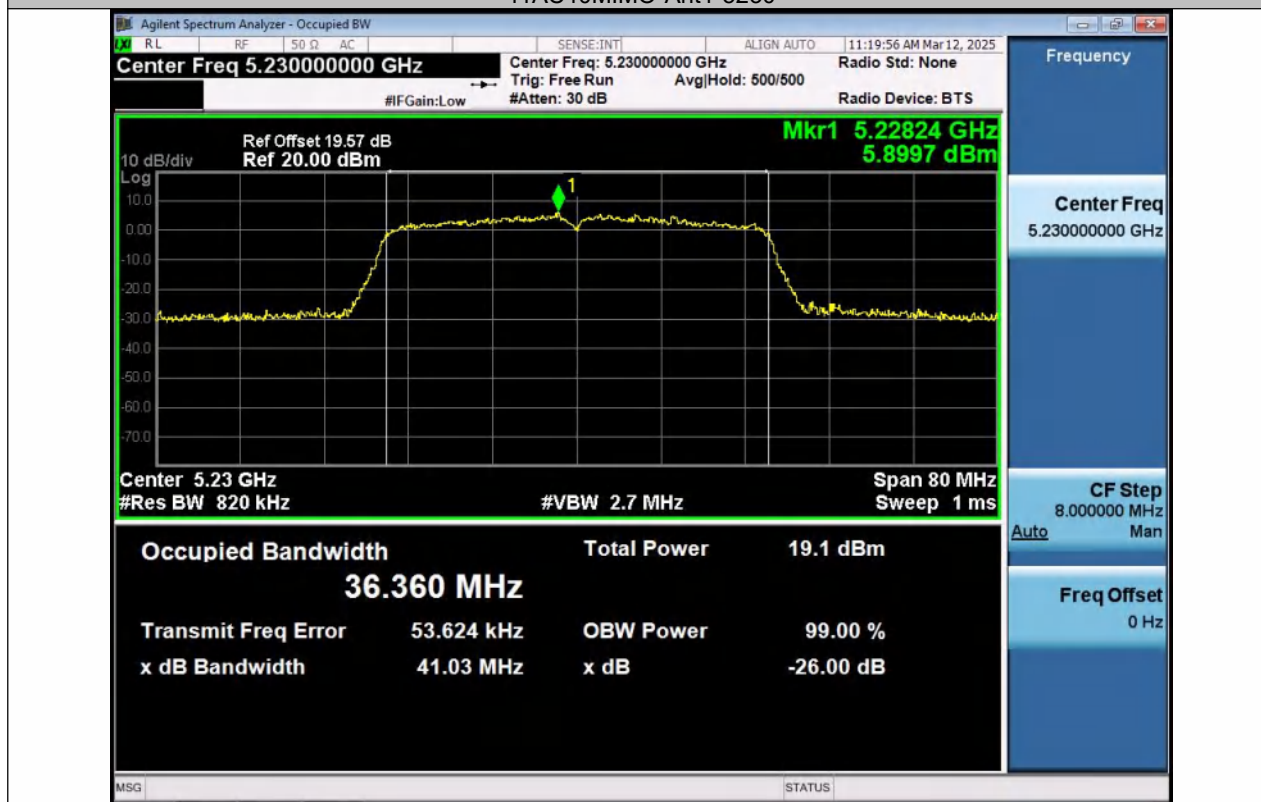


11AC40MIMO-Ant2-5230

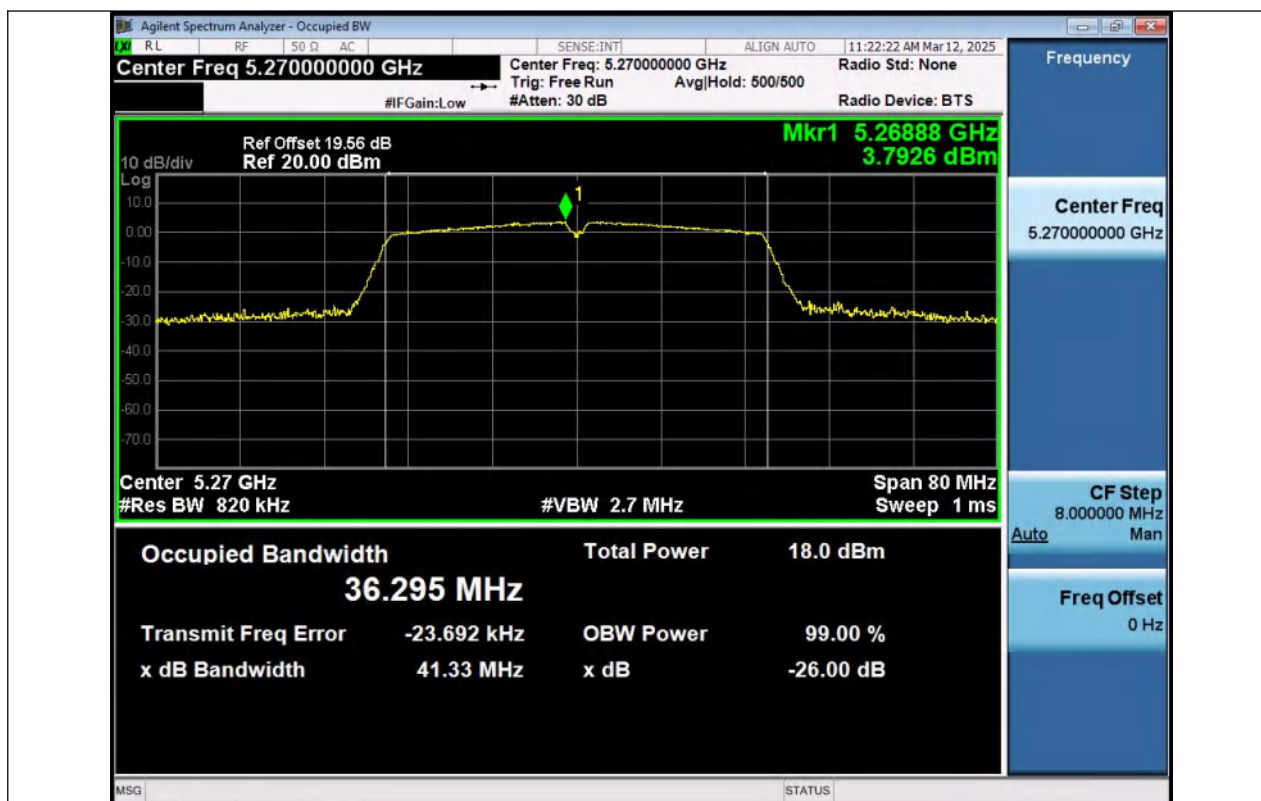


11AC40MIMO-Ant1-5270

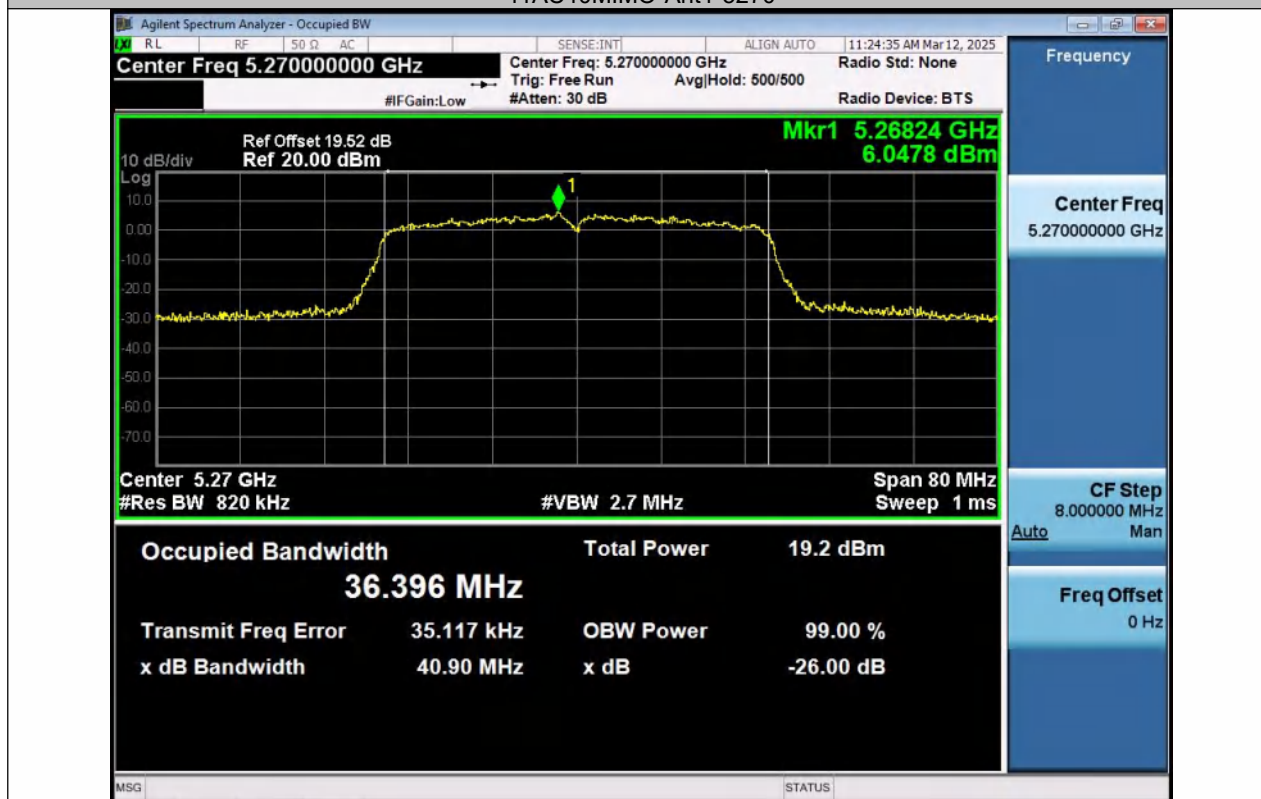


11AC40MIMO-Ant2-5270

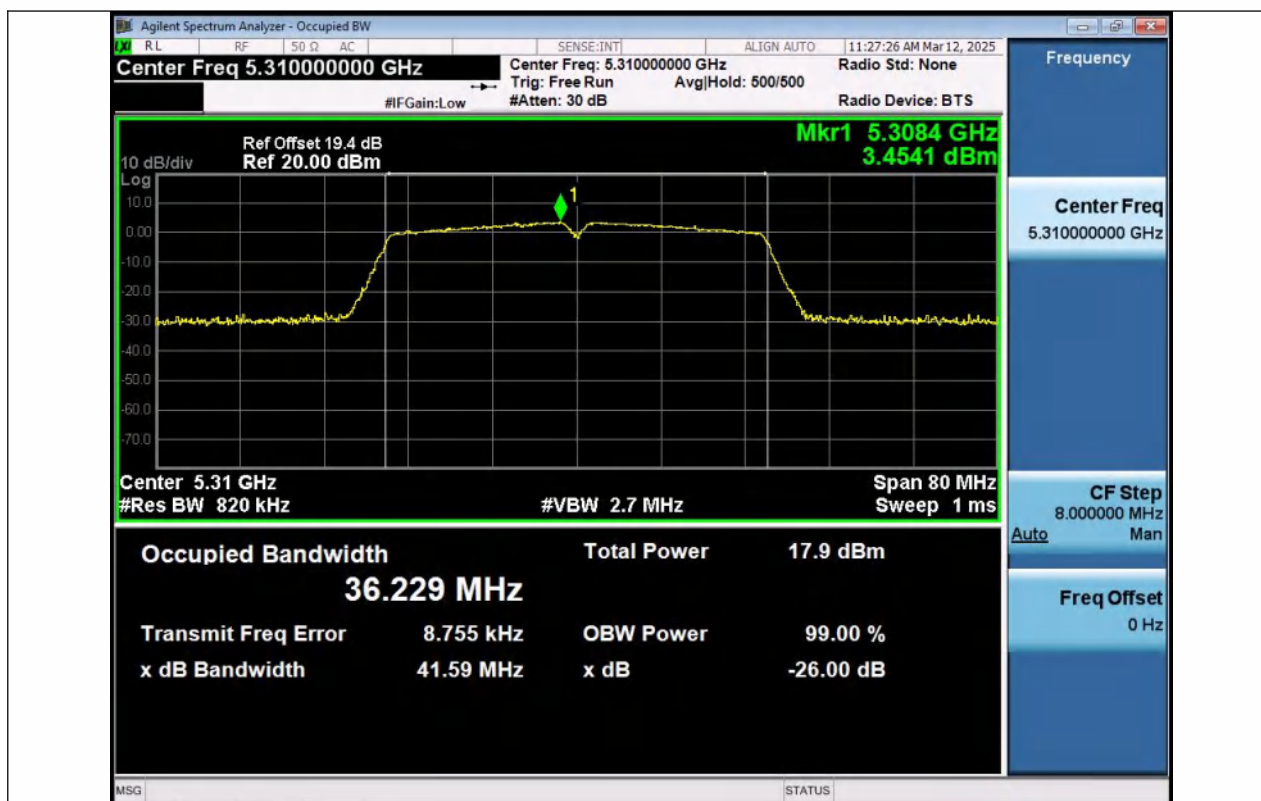


11AC40MIMO-Ant1-5310

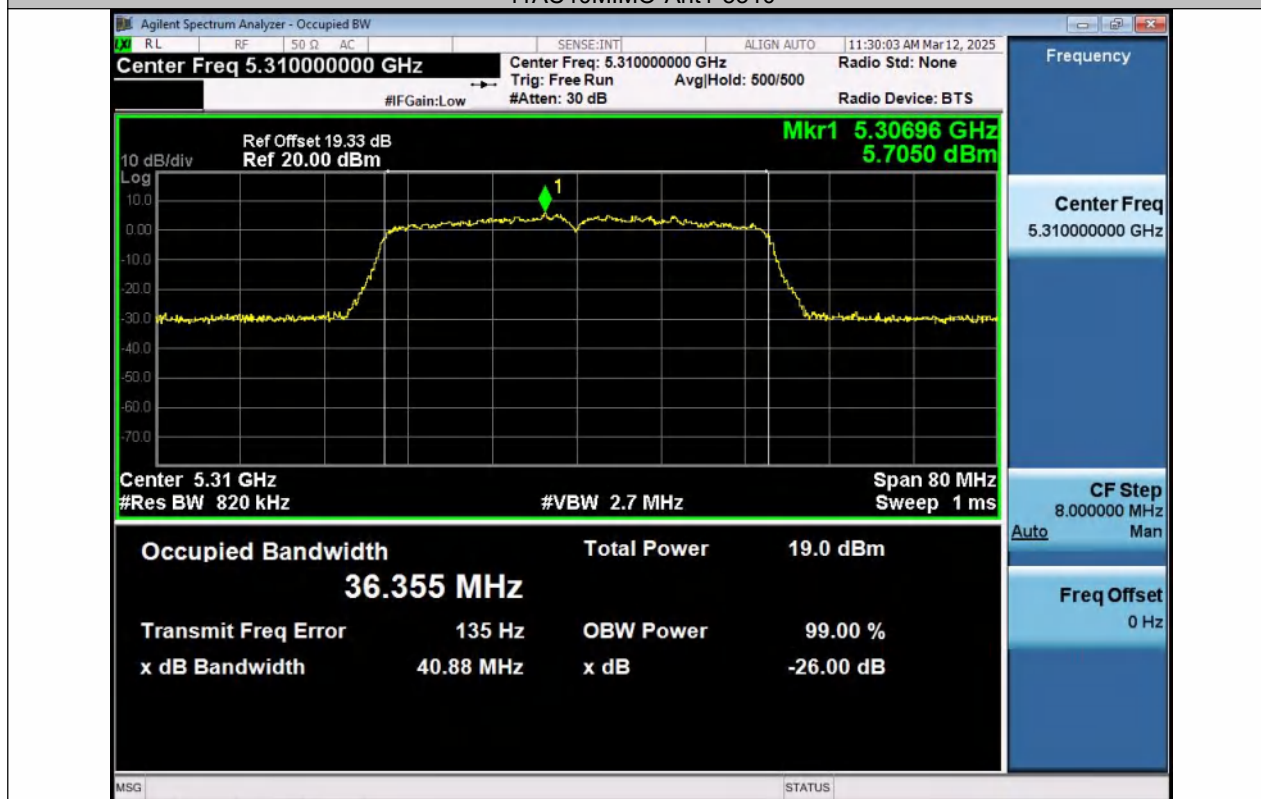

11AC40MIMO-Ant2-5310

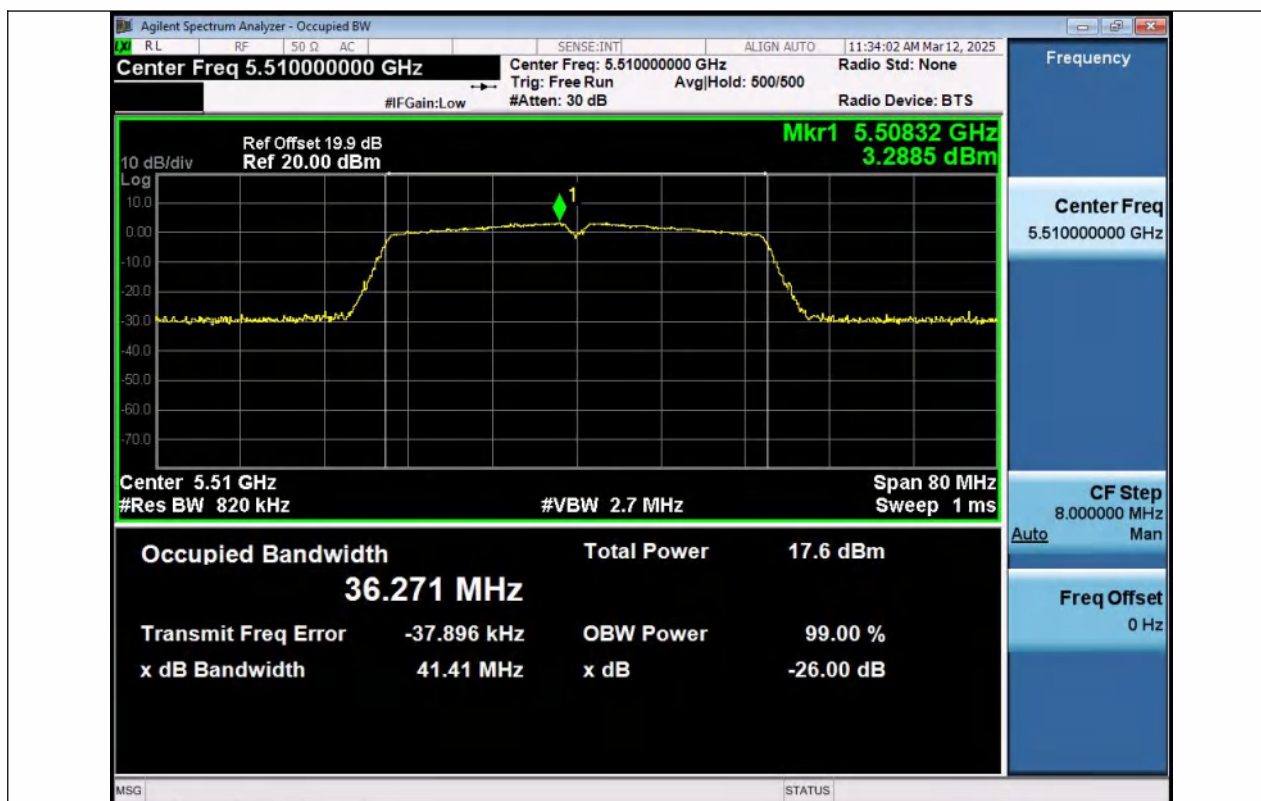


11AC40MIMO-Ant1-5510

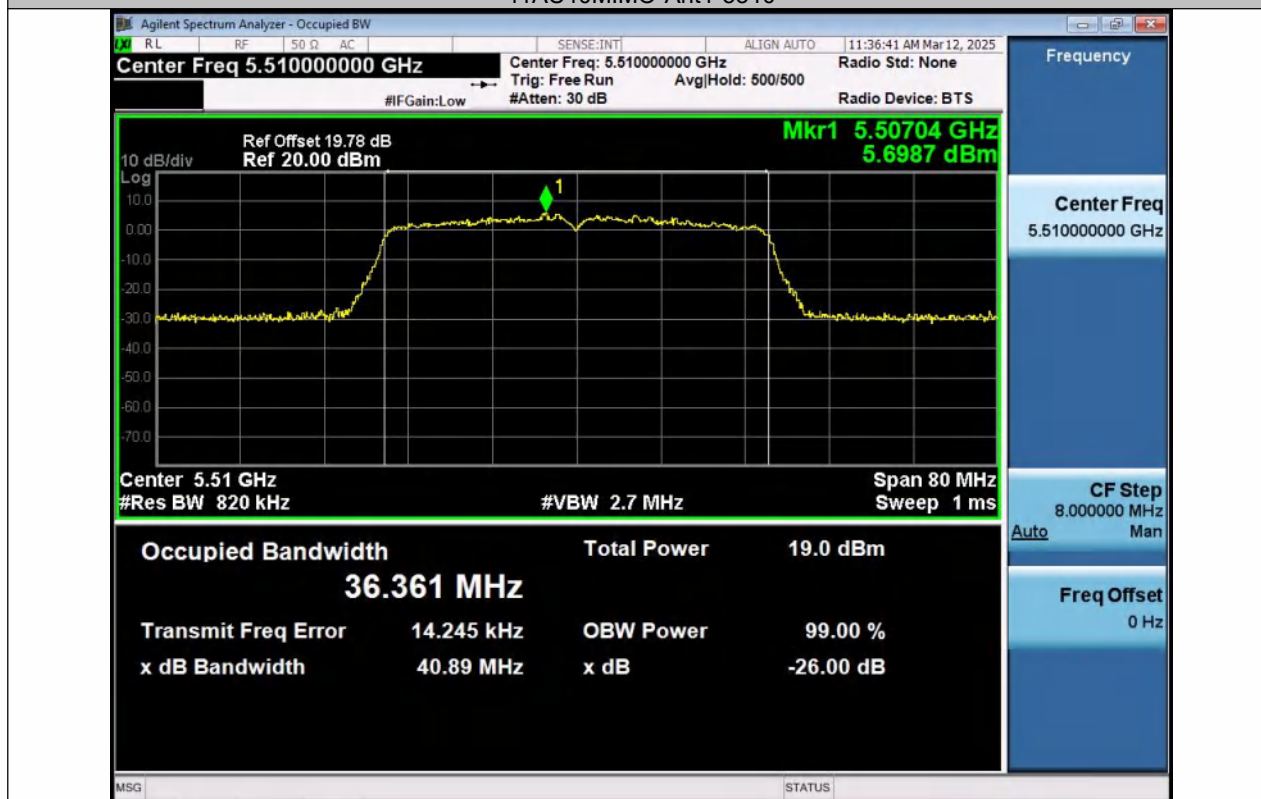


11AC40MIMO-Ant2-5510




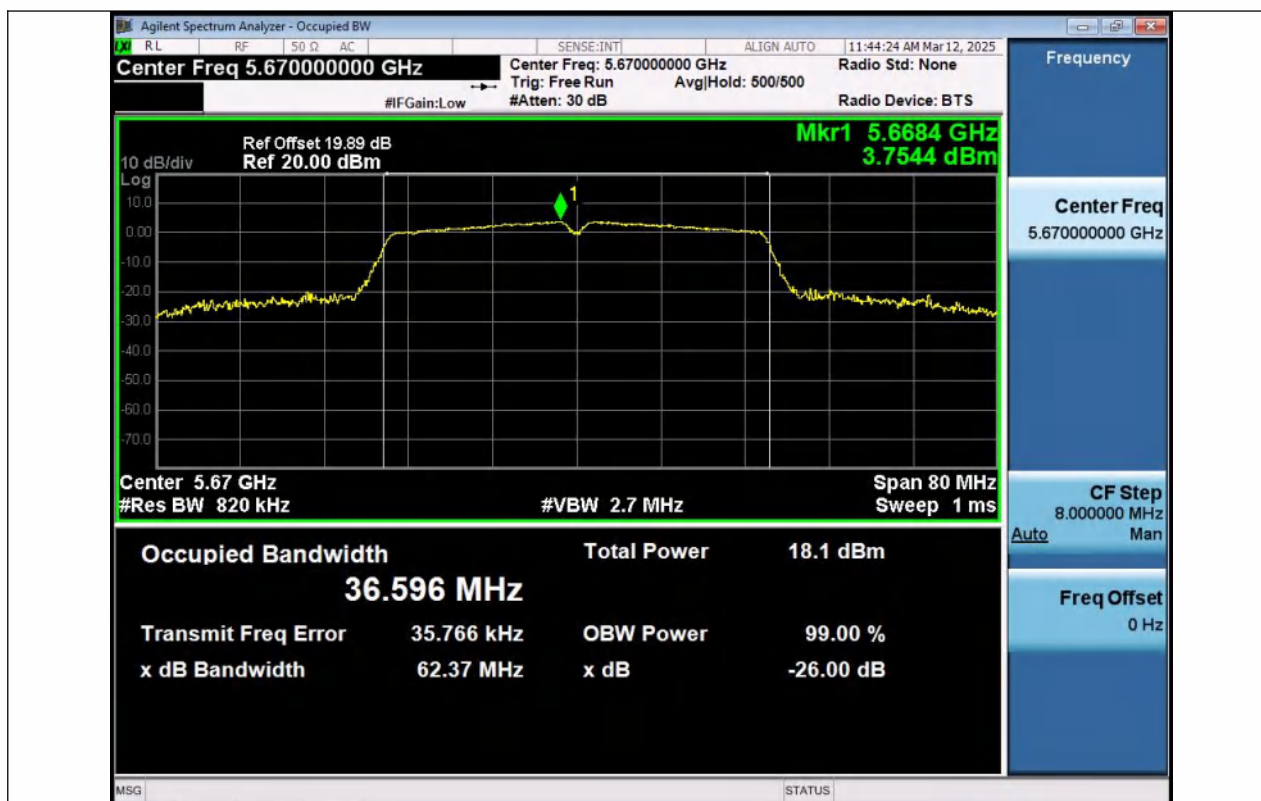


11AC40MIMO-Ant1-5670

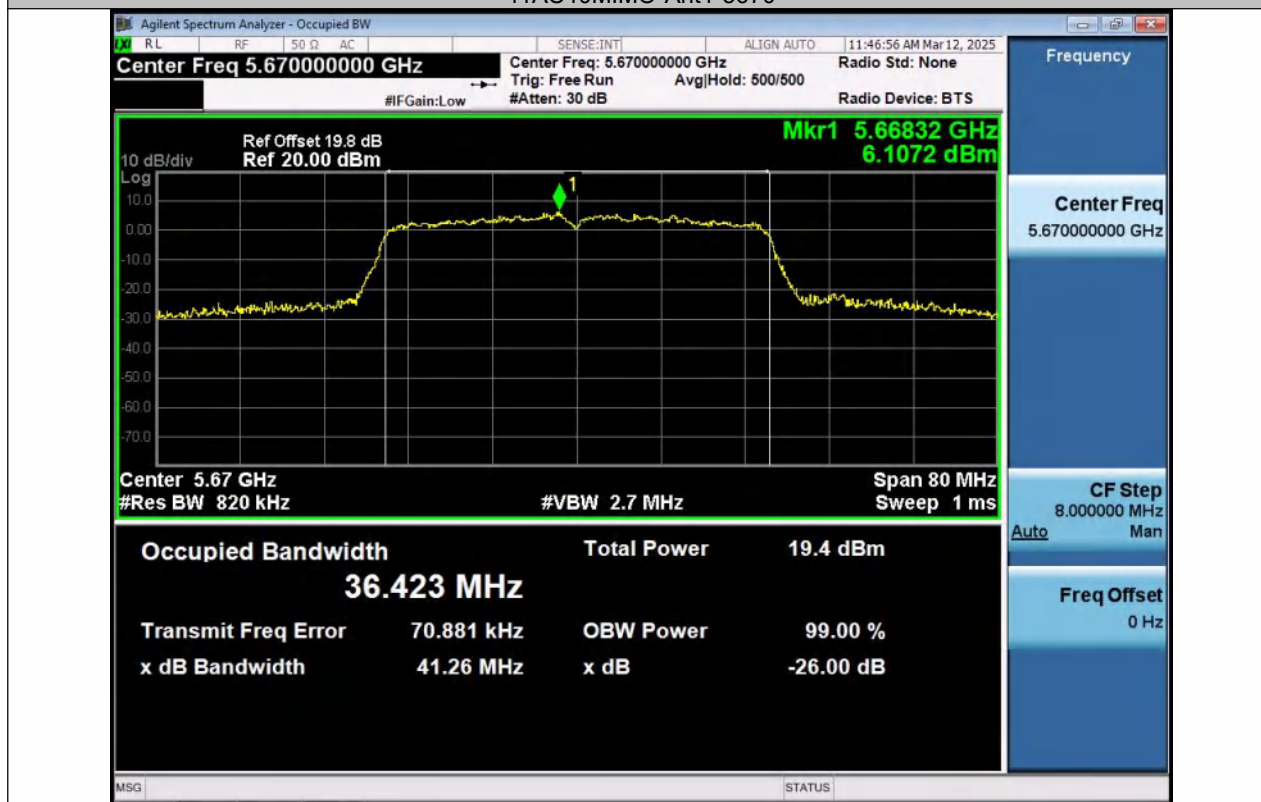


11AC40MIMO-Ant2-5670

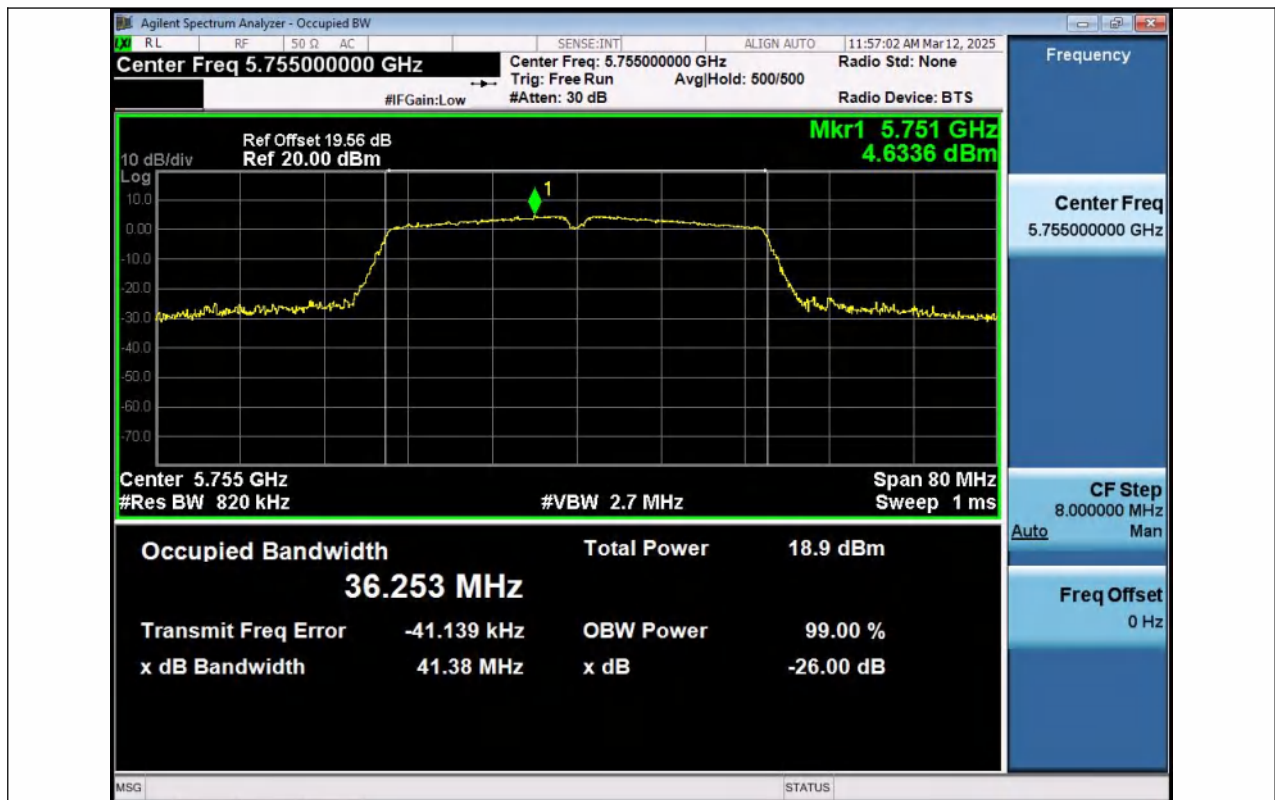


11AC40MIMO-Ant1-5755

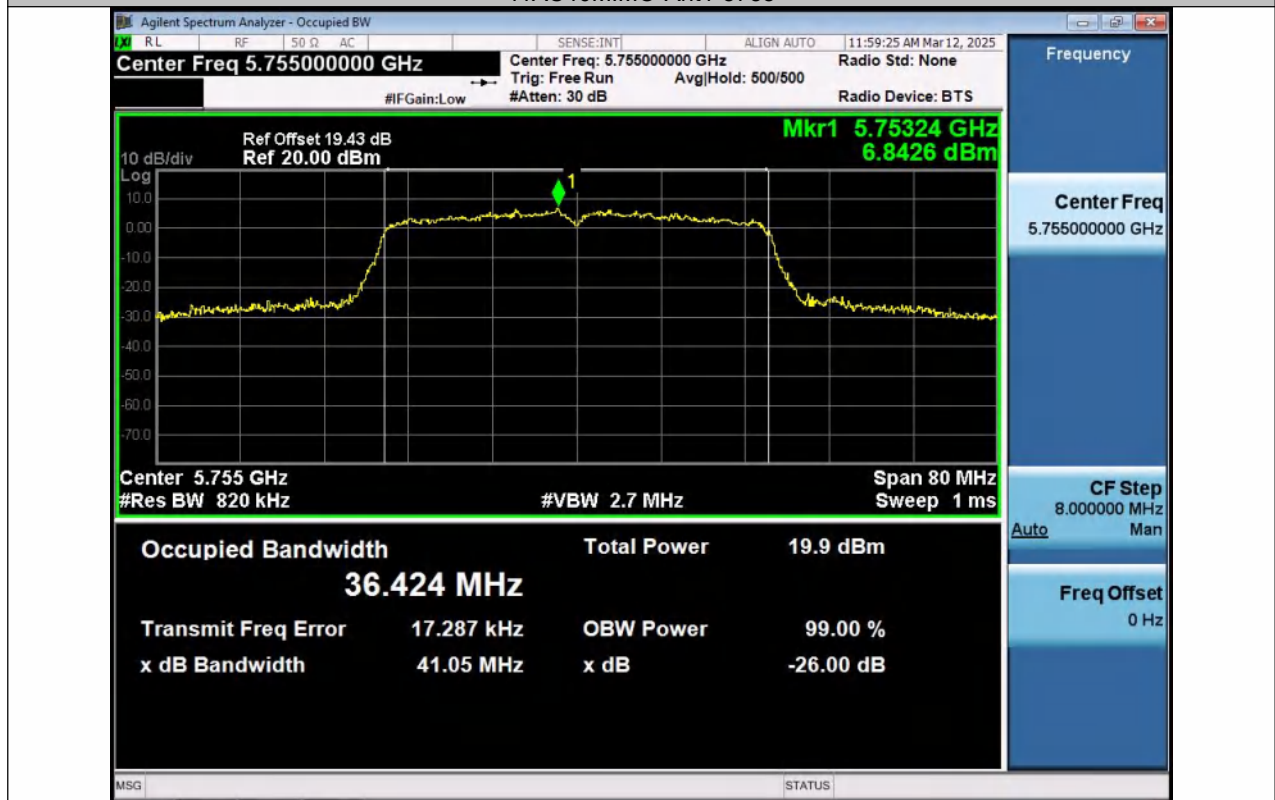


11AC40MIMO-Ant2-5755

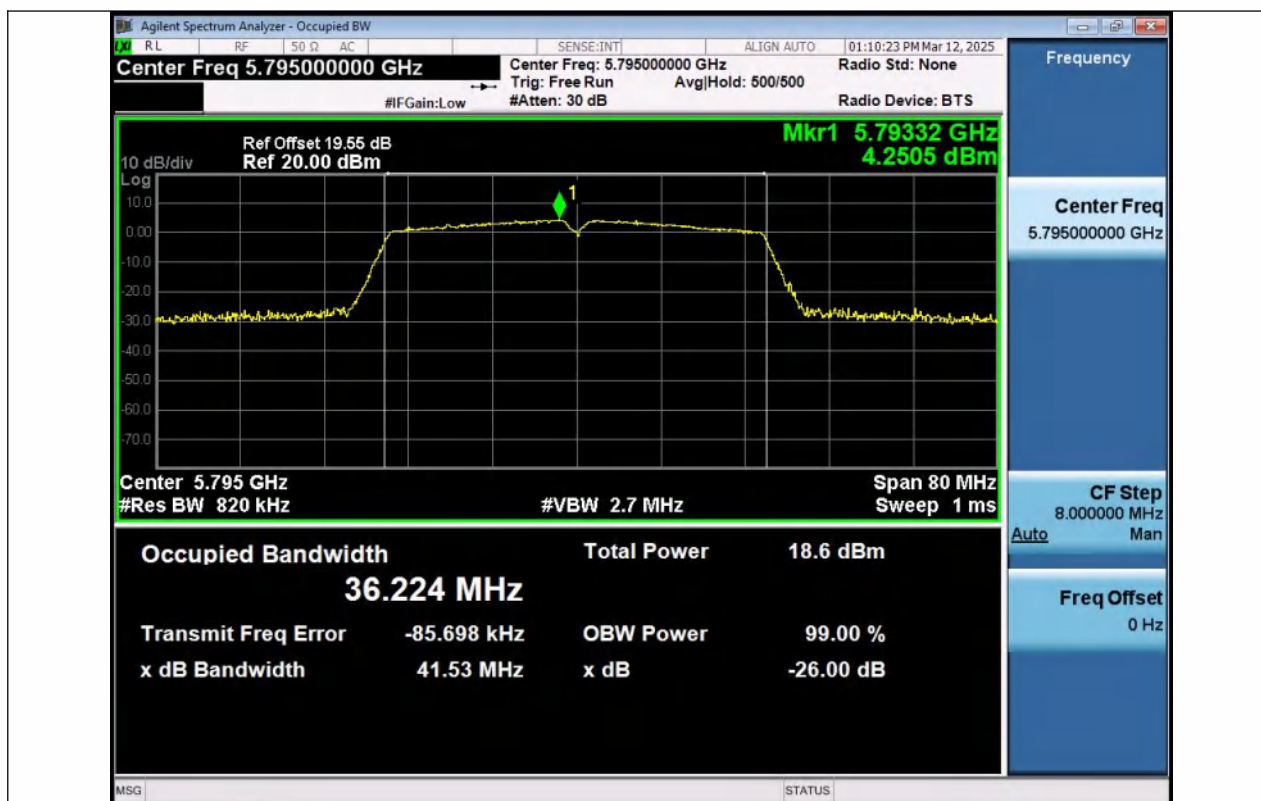


11AC40MIMO-Ant1-5795

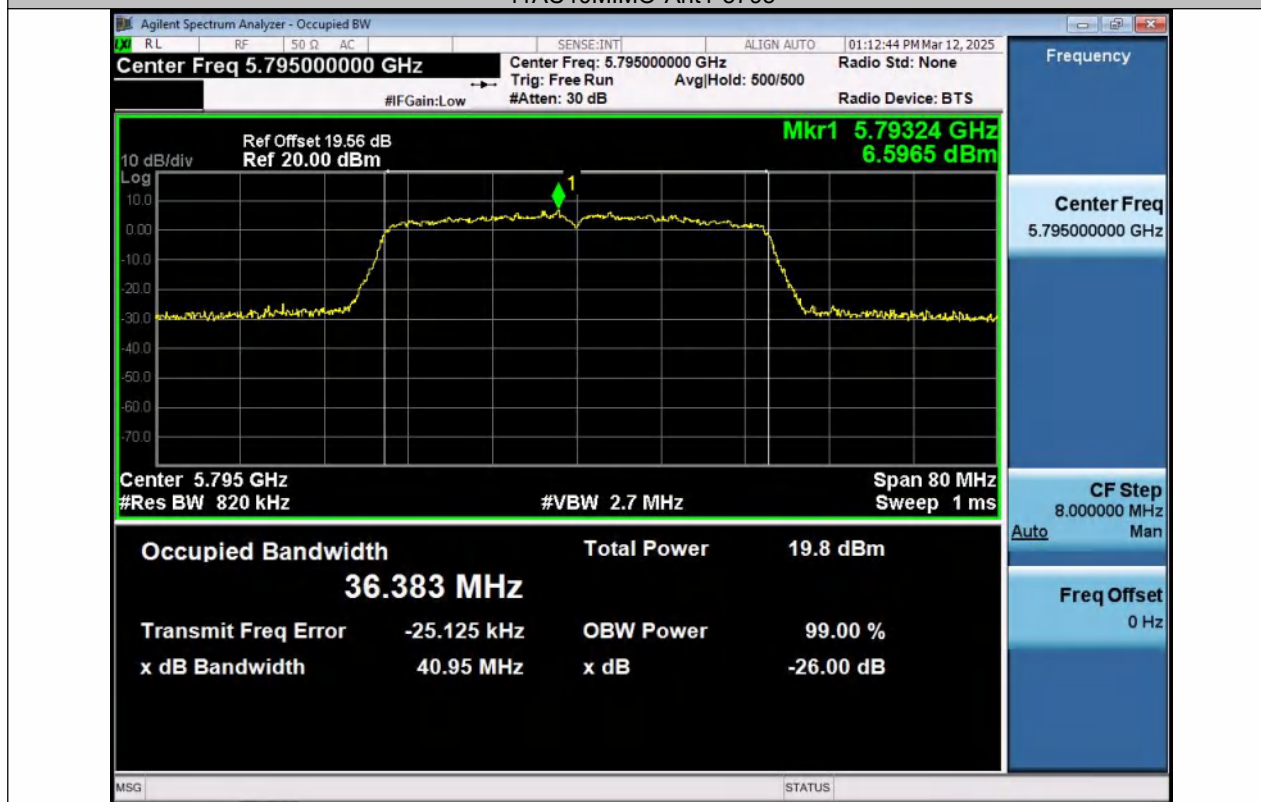


11AC40MIMO-Ant2-5795

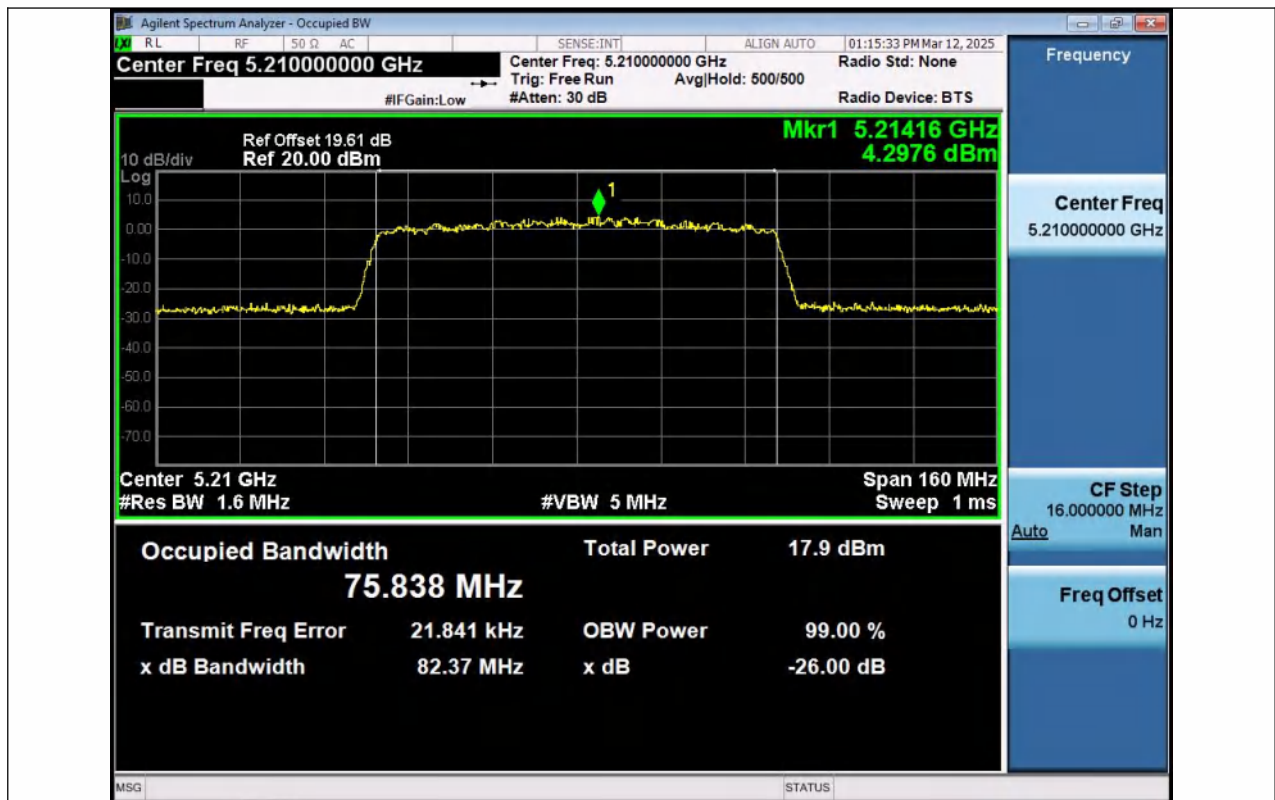


11AC80MIMO-Ant1-5210

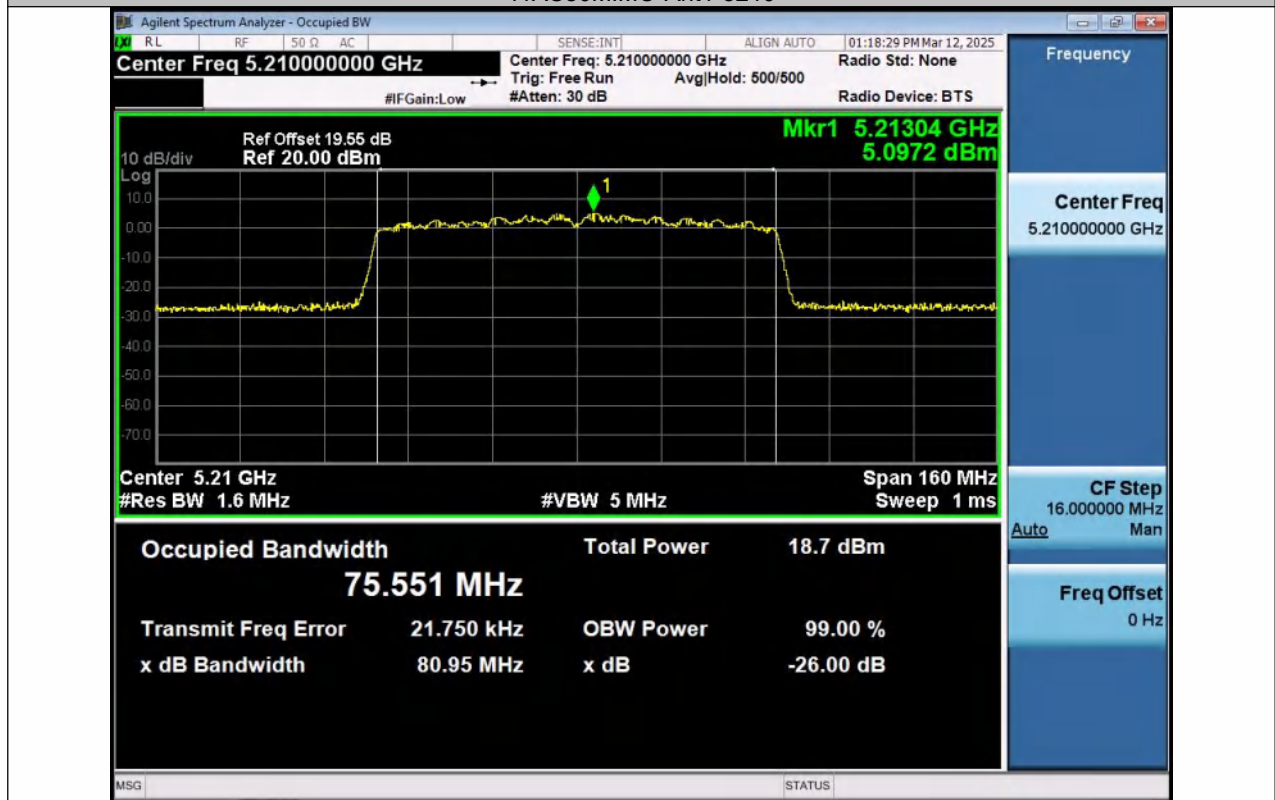


11AC80MIMO-Ant2-5210

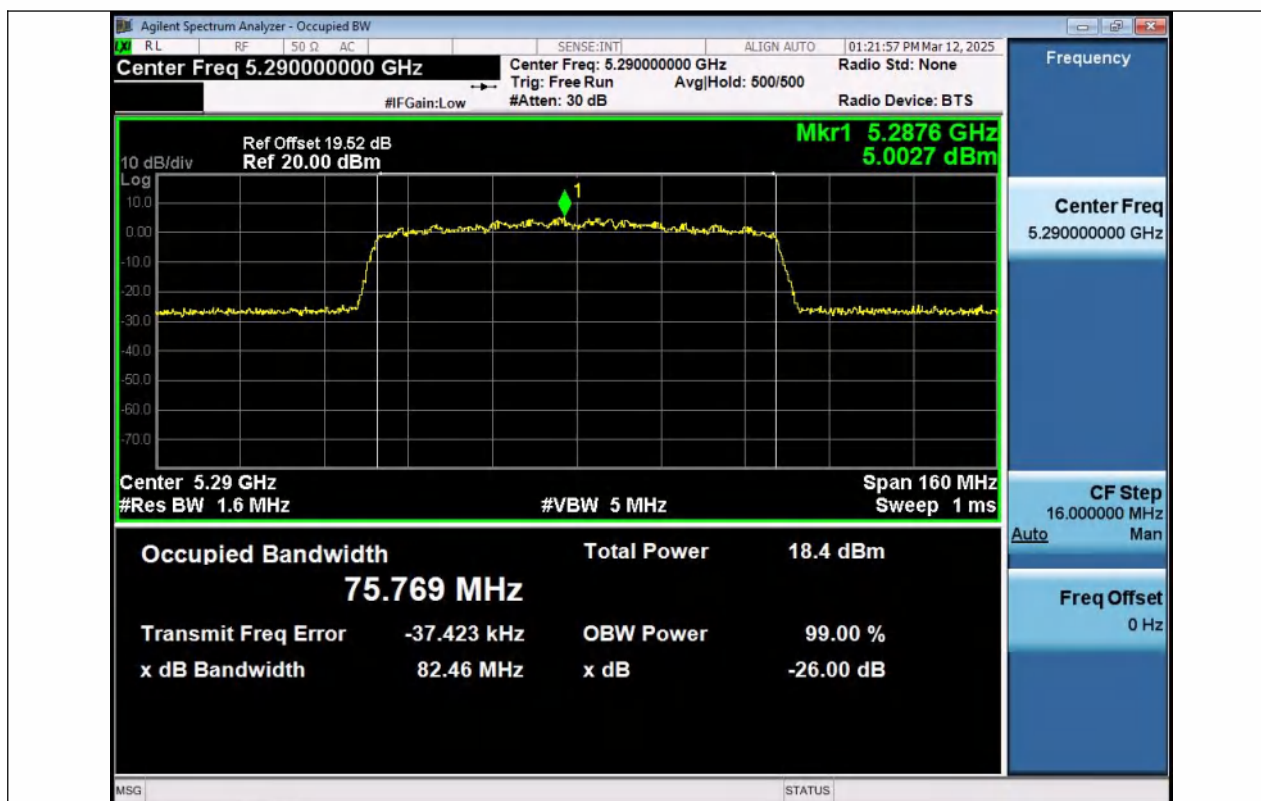


11AC80MIMO-Ant1-5290

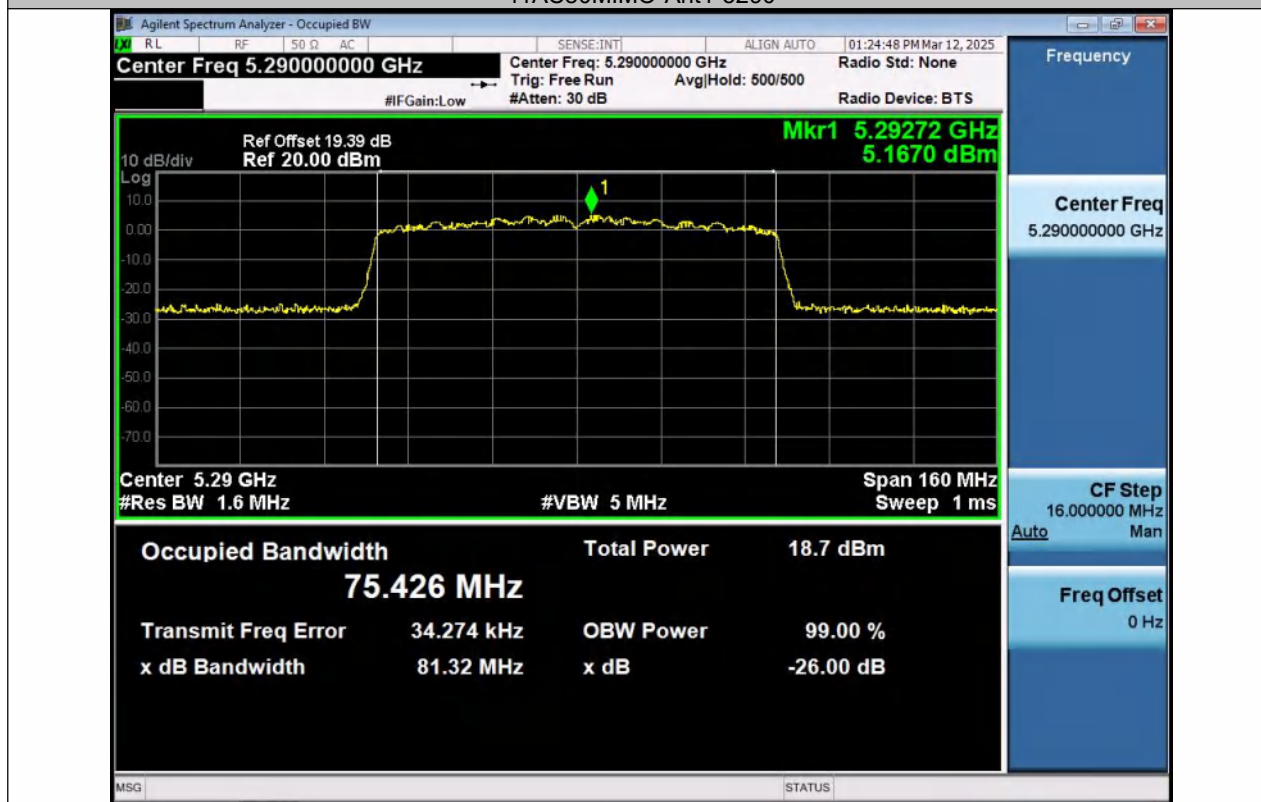


11AC80MIMO-Ant2-5290

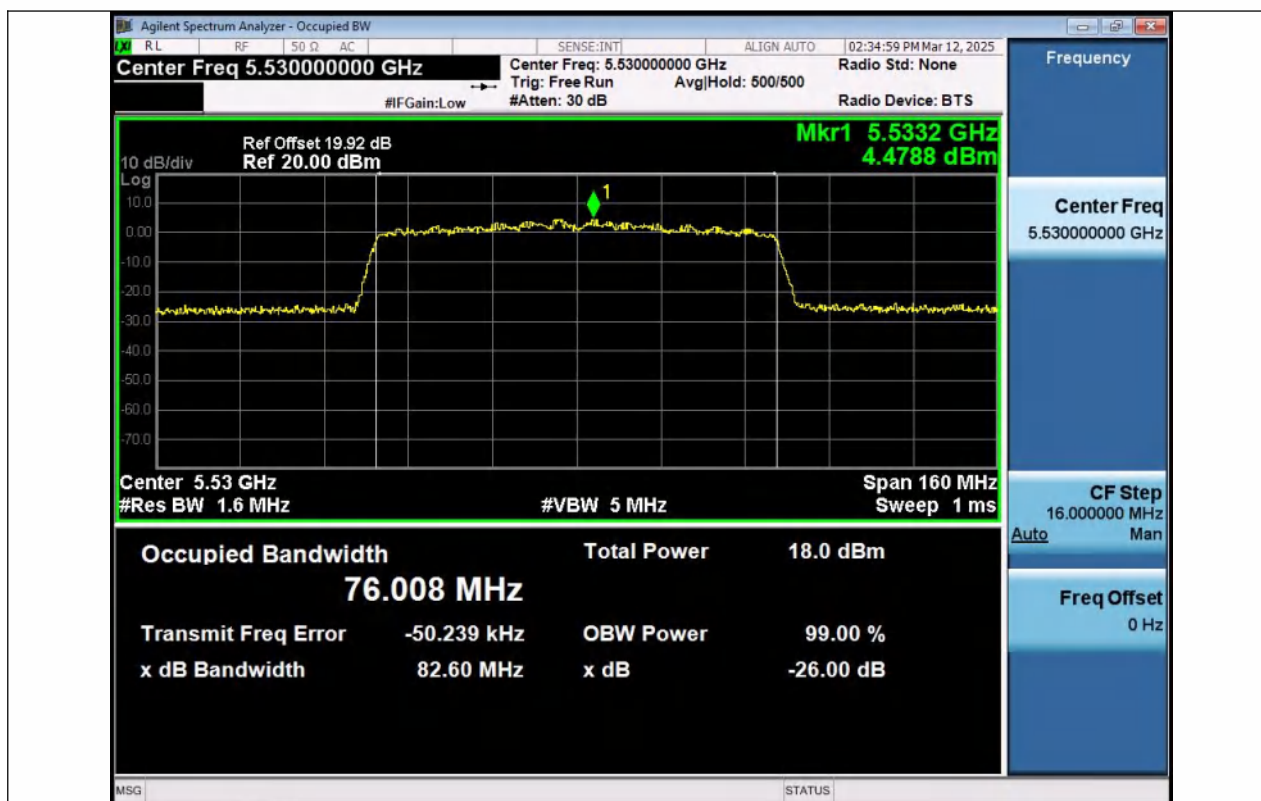


11AC80MIMO-Ant1-5530

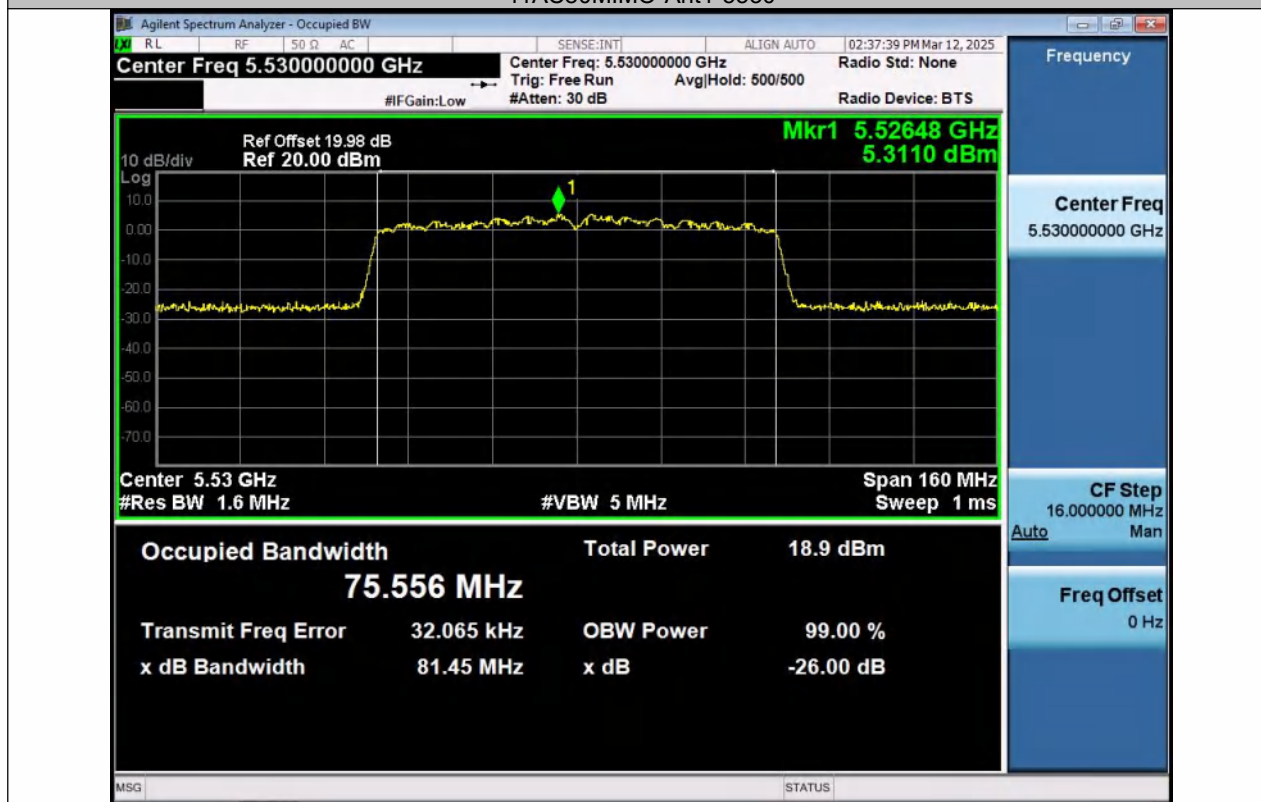


11AC80MIMO-Ant2-5530

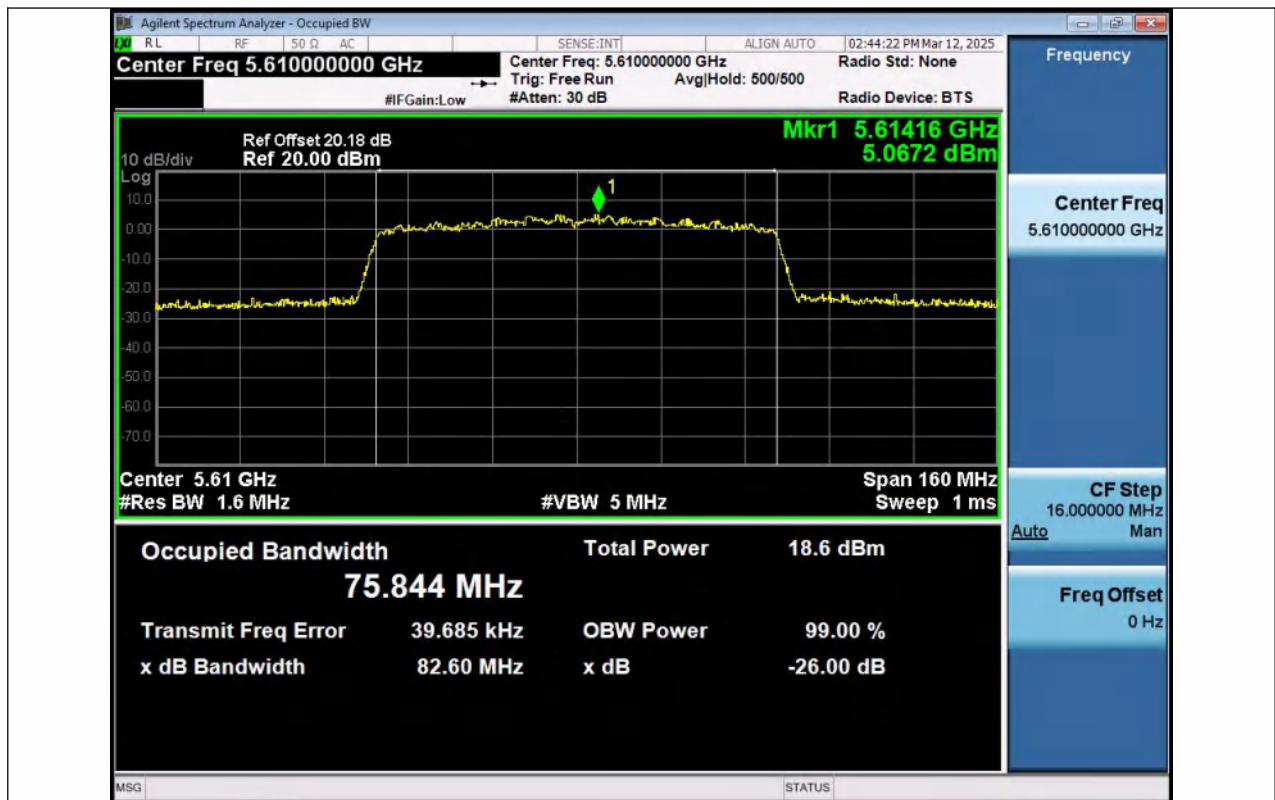


11AC80MIMO-Ant1-5610

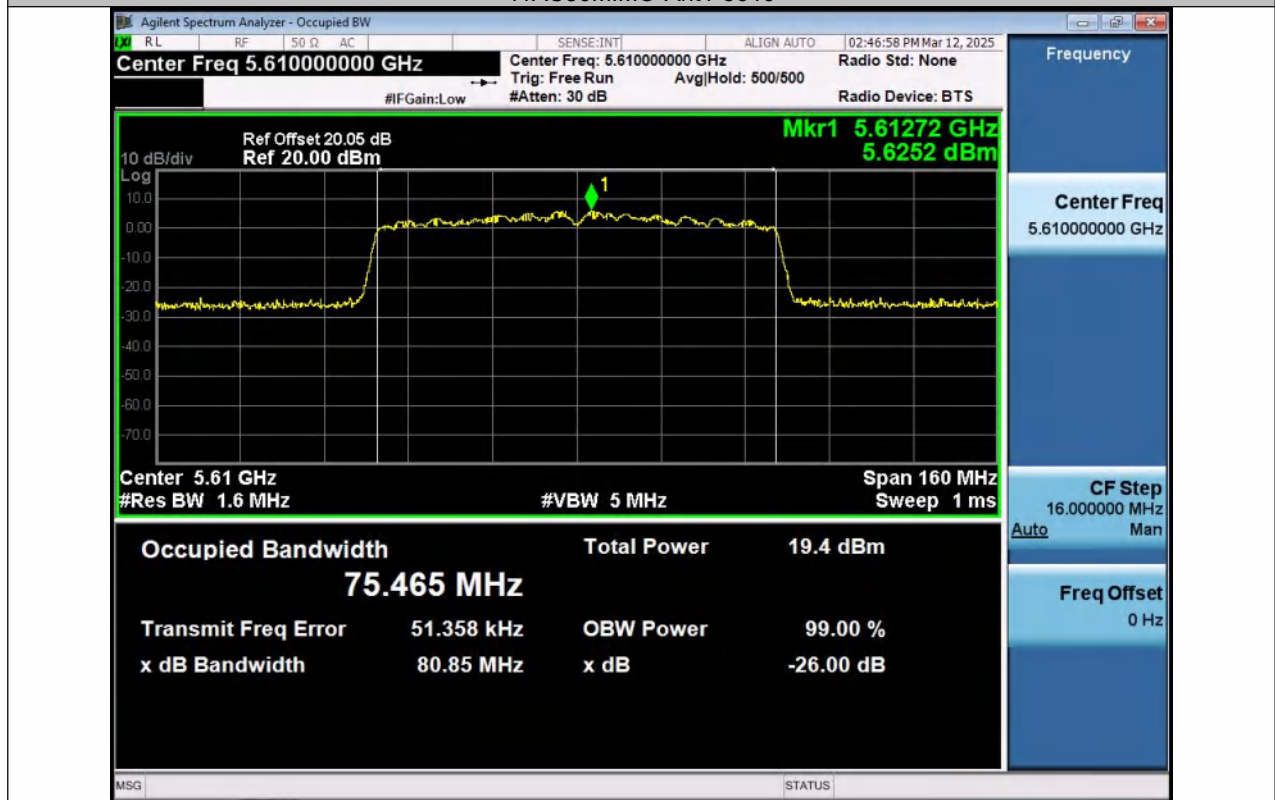

11AC80MIMO-Ant2-5610

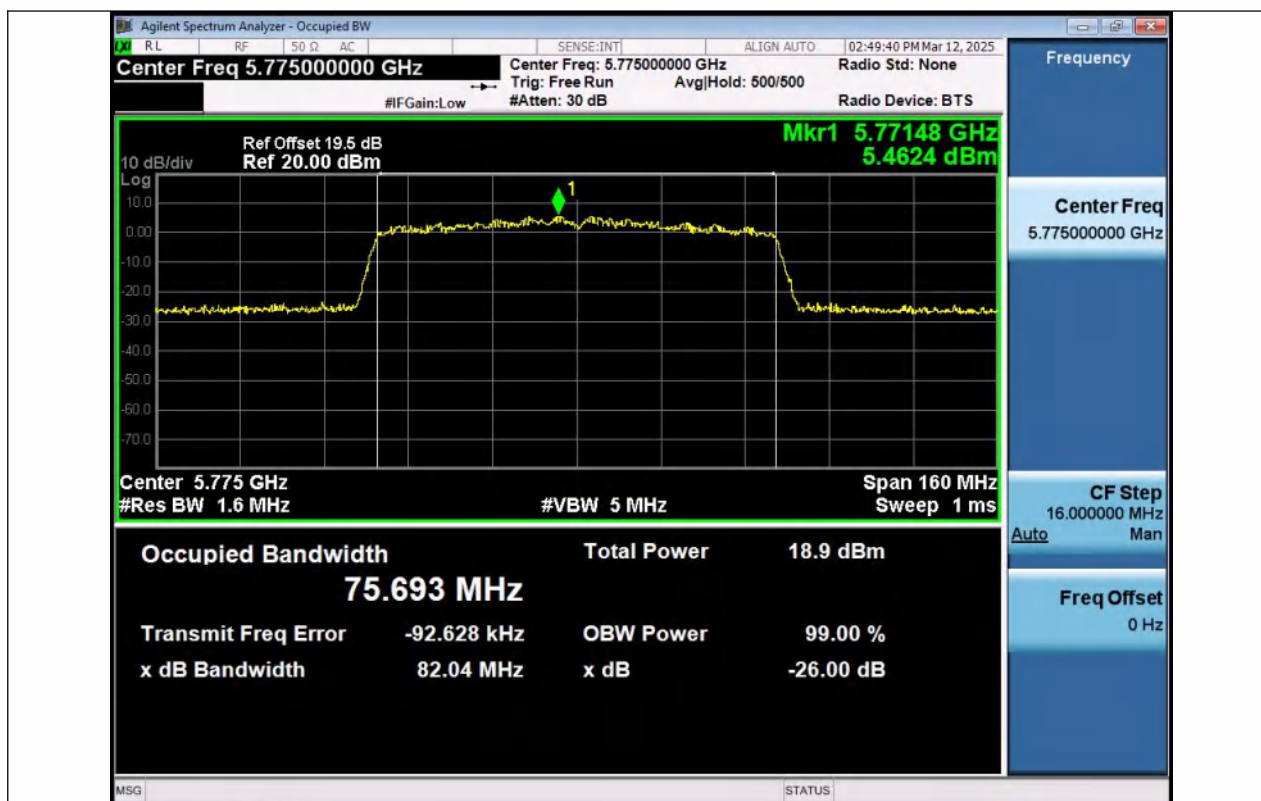

11AC80MIMO-Ant1-5775

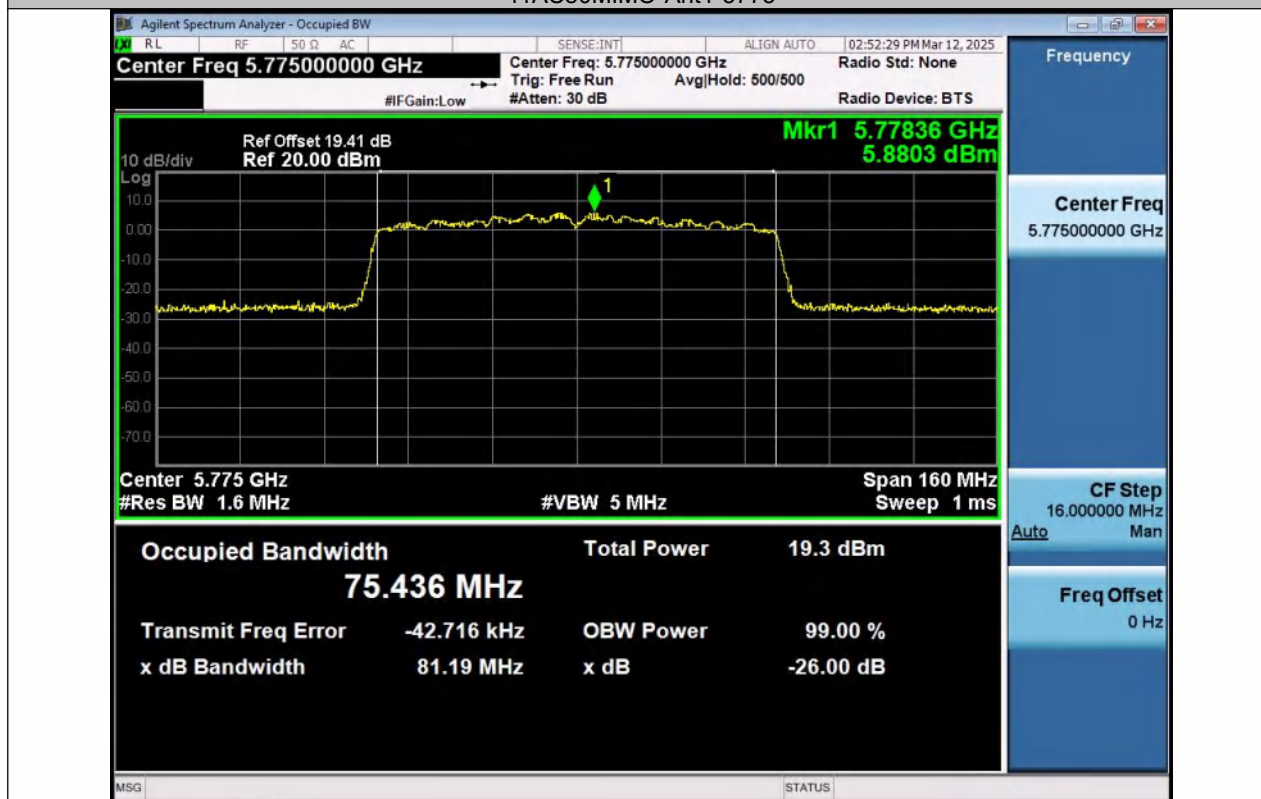

11AC80MIMO-Ant2-5775

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(E)
According to RSS 247, 6.2

8.2.2 Conformance Limit

FCC Limit:

■ For the band 5.15-5.25 GHz

(a)(1) (i) For an outdoor access point, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For client devices, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations

IC Limit:

■ Frequency band 5150-5250 MHz

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.

■ Frequency band 5250-5350 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

■ Frequency bands 5470-5600 MHz and 5650-5725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

■ Frequency band 5725-5850 MHz

The maximum conducted output power shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- The Transmitter output (antenna port) was connected to the power meter.
- Turn on the EUT and power meter and then record the power value.
- Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

Test Mode	Antenna	Frequency[MHz]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5180	95.86	0.18	10.38	≤23.98	3.10	13.48	---	PASS
11A	Ant2	5180	95.86	0.18	11.19	≤23.98	2.90	14.09	---	PASS
11A	Ant1	5200	95.86	0.18	10.31	≤23.98	3.10	13.41	---	PASS
11A	Ant2	5200	95.86	0.18	10.81	≤23.98	2.90	13.71	---	PASS
11A	Ant1	5240	95.86	0.18	10.75	≤23.98	3.10	13.85	---	PASS
11A	Ant2	5240	95.86	0.18	11.36	≤23.98	2.90	14.26	---	PASS
11A	Ant1	5260	95.86	0.18	11.02	≤23.98	3.10	14.12	---	PASS
11A	Ant2	5260	95.86	0.18	11.48	≤23.98	2.90	14.38	---	PASS
11A	Ant1	5280	95.86	0.18	11.05	≤23.98	3.10	14.15	---	PASS
11A	Ant2	5280	95.86	0.18	11.37	≤23.98	2.90	14.27	---	PASS
11A	Ant1	5320	95.86	0.18	10.85	≤23.98	3.10	13.95	---	PASS
11A	Ant2	5320	95.86	0.18	11.14	≤23.95	2.90	14.04	---	PASS
11A	Ant1	5500	95.86	0.18	10.60	≤23.98	3.20	13.80	---	PASS
11A	Ant2	5500	95.86	0.18	11.25	≤23.98	3.20	14.45	---	PASS
11A	Ant1	5580	95.86	0.18	10.82	≤23.98	3.20	14.02	---	PASS
11A	Ant2	5580	95.86	0.18	11.54	≤23.98	3.20	14.74	---	PASS
11A	Ant1	5700	95.86	0.18	11.06	≤23.98	3.20	14.26	---	PASS
11A	Ant2	5700	95.86	0.18	11.71	≤23.98	3.20	14.91	---	PASS
11A	Ant1	5745	95.86	0.18	11.55	≤30.00	3.10	14.65	---	PASS
11A	Ant2	5745	95.86	0.18	11.96	≤30.00	3.00	14.96	---	PASS
11A	Ant1	5785	95.86	0.18	11.33	≤30.00	3.10	14.43	---	PASS
11A	Ant2	5785	95.86	0.18	11.83	≤30.00	3.00	14.83	---	PASS
11A	Ant1	5825	95.86	0.18	11.16	≤30.00	3.10	14.26	---	PASS
11A	Ant2	5825	95.86	0.18	11.73	≤30.00	3.00	14.73	---	PASS
11N20MIM O	Ant1	5180	95.59	0.20	10.20	≤23.98	3.10	13.30	---	PASS
11N20MIM O	Ant2	5180	95.59	0.20	10.88	≤23.98	2.90	13.78	---	PASS
11N20MIM O	total	5180	---	---	13.56	≤23.98	3.10	16.66	---	PASS
11N20MIM O	Ant1	5200	95.59	0.20	10.05	≤23.98	3.10	13.15	---	PASS
11N20MIM O	Ant2	5200	95.59	0.20	10.85	≤23.98	2.90	13.75	---	PASS
11N20MIM O	total	5200	---	---	13.48	≤23.98	3.10	16.58	---	PASS
11N20MIM O	Ant1	5240	95.59	0.20	10.53	≤23.98	3.10	13.63	---	PASS
11N20MIM O	Ant2	5240	95.59	0.20	11.34	≤23.98	2.90	14.24	---	PASS
11N20MIM O	total	5240	---	---	13.96	≤23.98	3.10	17.06	---	PASS
11N20MIM O	Ant1	5260	95.59	0.20	10.88	≤23.98	3.10	13.98	---	PASS
11N20MIM O	Ant2	5260	95.59	0.20	11.45	≤23.98	2.90	14.35	---	PASS
11N20MIM O	total	5260	---	---	14.18	≤23.98	3.10	17.28	---	PASS
11N20MIM O	Ant1	5280	95.59	0.20	11.00	≤23.98	3.10	14.10	---	PASS
11N20MIM O	Ant2	5280	95.59	0.20	11.43	≤23.98	2.90	14.33	---	PASS
11N20MIM O	total	5280	---	---	14.23	≤23.98	3.10	17.33	---	PASS
11N20MIM O	Ant1	5320	95.59	0.20	10.84	≤23.98	3.10	13.94	---	PASS
11N20MIM O	Ant2	5320	95.59	0.20	11.28	≤23.98	2.90	14.18	---	PASS

11N20MIM O	total	5320	---	---	14.08	≤23.98	3.10	17.18	---	PASS
11N20MIM O	Ant1	5500	95.59	0.20	10.29	≤23.98	3.20	13.49	---	PASS
11N20MIM O	Ant2	5500	95.59	0.20	11.09	≤23.98	3.20	14.29	---	PASS
11N20MIM O	total	5500	---	---	13.72	≤23.98	3.20	16.92	---	PASS
11N20MIM O	Ant1	5580	95.59	0.20	10.57	≤23.98	3.20	13.77	---	PASS
11N20MIM O	Ant2	5580	95.59	0.20	11.45	≤23.98	3.20	14.65	---	PASS
11N20MIM O	total	5580	---	---	14.04	≤23.98	3.20	17.24	---	PASS
11N20MIM O	Ant1	5700	95.59	0.20	10.85	≤23.98	3.20	14.05	---	PASS
11N20MIM O	Ant2	5700	95.59	0.20	11.48	≤23.98	3.20	14.68	---	PASS
11N20MIM O	total	5700	---	---	14.19	≤23.98	3.20	17.39	---	PASS
11N20MIM O	Ant1	5745	95.59	0.20	11.53	≤30.00	3.10	14.63	---	PASS
11N20MIM O	Ant2	5745	95.59	0.20	11.93	≤30.00	3.00	14.93	---	PASS
11N20MIM O	total	5745	---	---	14.74	≤30.00	3.10	17.84	---	PASS
11N20MIM O	Ant1	5785	95.59	0.20	11.15	≤30.00	3.10	14.25	---	PASS
11N20MIM O	Ant2	5785	95.59	0.20	11.75	≤30.00	3.00	14.75	---	PASS
11N20MIM O	total	5785	---	---	14.47	≤30.00	3.10	17.57	---	PASS
11N20MIM O	Ant1	5825	95.59	0.20	10.89	≤30.00	3.10	13.99	---	PASS
11N20MIM O	Ant2	5825	95.59	0.20	11.61	≤30.00	3.00	14.61	---	PASS
11N20MIM O	total	5825	---	---	14.28	≤30.00	3.10	17.38	---	PASS
11N40MIM O	Ant1	5190	91.43	0.39	10.36	≤23.98	3.10	13.46	---	PASS
11N40MIM O	Ant2	5190	91.43	0.39	10.90	≤23.98	2.90	13.80	---	PASS
11N40MIM O	total	5190	---	---	13.65	≤23.98	3.10	16.75	---	PASS
11N40MIM O	Ant1	5230	91.43	0.39	10.64	≤23.98	3.10	13.74	---	PASS
11N40MIM O	Ant2	5230	91.43	0.39	11.18	≤23.98	2.90	14.08	---	PASS
11N40MIM O	total	5230	---	---	13.93	≤23.98	3.10	17.03	---	PASS
11N40MIM O	Ant1	5270	91.43	0.39	10.97	≤23.98	3.10	14.07	---	PASS
11N40MIM O	Ant2	5270	91.43	0.39	11.32	≤23.98	2.90	14.22	---	PASS
11N40MIM O	total	5270	---	---	14.16	≤23.98	3.10	17.26	---	PASS
11N40MIM O	Ant1	5310	91.43	0.39	10.80	≤23.98	3.10	13.90	---	PASS
11N40MIM O	Ant2	5310	91.43	0.39	11.06	≤23.98	2.90	13.96	---	PASS
11N40MIM O	total	5310	---	---	13.94	≤23.98	3.10	17.04	---	PASS

11N40MIM O	Ant1	5510	91.43	0.39	10.49	≤23.98	3.20	13.69	---	PASS
11N40MIM O	Ant2	5510	91.43	0.39	11.07	≤23.98	3.20	14.27	---	PASS
11N40MIM O	total	5510	---	---	13.80	≤23.98	3.20	17.00	---	PASS
11N40MIM O	Ant1	5550	91.43	0.39	10.52	≤23.98	3.20	13.72	---	PASS
11N40MIM O	Ant2	5550	91.43	0.39	11.33	≤23.98	3.20	14.53	---	PASS
11N40MIM O	total	5550	---	---	13.95	≤23.98	3.20	17.15	---	PASS
11N40MIM O	Ant1	5670	91.43	0.39	10.99	≤23.98	3.20	14.19	---	PASS
11N40MIM O	Ant2	5670	91.43	0.39	11.50	≤23.98	3.20	14.70	---	PASS
11N40MIM O	total	5670	---	---	14.26	≤23.98	3.20	17.46	---	PASS
11N40MIM O	Ant1	5755	91.43	0.39	11.63	≤30.00	3.10	14.73	---	PASS
11N40MIM O	Ant2	5755	91.43	0.39	11.80	≤30.00	3.00	14.80	---	PASS
11N40MIM O	total	5755	---	---	14.73	≤30.00	3.10	17.83	---	PASS
11N40MIM O	Ant1	5795	91.43	0.39	11.46	≤30.00	3.10	14.56	---	PASS
11N40MIM O	Ant2	5795	91.43	0.39	11.92	≤30.00	3.00	14.92	---	PASS
11N40MIM O	total	5795	---	---	14.71	≤30.00	3.10	17.81	---	PASS
11AC20MI MO	Ant1	5180	95.62	0.19	10.27	≤23.98	3.10	13.37	---	PASS
11AC20MI MO	Ant2	5180	95.62	0.19	10.96	≤23.98	2.90	13.86	---	PASS
11AC20MI MO	total	5180	---	---	13.64	≤23.98	3.10	16.74	---	PASS
11AC20MI MO	Ant1	5200	95.62	0.19	10.07	≤23.98	3.10	13.17	---	PASS
11AC20MI MO	Ant2	5200	95.62	0.19	10.95	≤23.98	2.90	13.85	---	PASS
11AC20MI MO	total	5200	---	---	13.54	≤23.98	3.10	16.64	---	PASS
11AC20MI MO	Ant1	5240	95.62	0.19	10.59	≤23.98	3.10	13.69	---	PASS
11AC20MI MO	Ant2	5240	95.62	0.19	11.29	≤23.98	2.90	14.19	---	PASS
11AC20MI MO	total	5240	---	---	13.96	≤23.98	3.10	17.06	---	PASS
11AC20MI MO	Ant1	5260	95.62	0.19	10.76	≤23.98	3.10	13.86	---	PASS
11AC20MI MO	Ant2	5260	95.62	0.19	11.35	≤23.98	2.90	14.25	---	PASS
11AC20MI MO	total	5260	---	---	14.08	≤23.98	3.10	17.18	---	PASS
11AC20MI MO	Ant1	5280	95.62	0.19	10.74	≤23.98	3.10	13.84	---	PASS
11AC20MI MO	Ant2	5280	95.62	0.19	11.28	≤23.98	2.90	14.18	---	PASS
11AC20MI MO	total	5280	---	---	14.03	≤23.98	3.10	17.13	---	PASS
11AC20MI MO	Ant1	5320	95.62	0.19	10.66	≤23.98	3.10	13.76	---	PASS

11AC20MI MO	Ant2	5320	95.62	0.19	11.05	≤23.98	2.90	13.95	---	PASS
11AC20MI MO	total	5320	---	---	13.87	≤23.98	3.10	16.97	---	PASS
11AC20MI MO	Ant1	5500	95.62	0.19	10.43	≤23.98	3.20	13.63	---	PASS
11AC20MI MO	Ant2	5500	95.62	0.19	11.25	≤23.98	3.20	14.45	---	PASS
11AC20MI MO	total	5500	---	---	13.87	≤23.98	3.20	17.07	---	PASS
11AC20MI MO	Ant1	5580	95.62	0.19	10.75	≤23.98	3.20	13.95	---	PASS
11AC20MI MO	Ant2	5580	95.62	0.19	11.69	≤23.98	3.20	14.89	---	PASS
11AC20MI MO	total	5580	---	---	14.26	≤23.98	3.20	17.46	---	PASS
11AC20MI MO	Ant1	5700	95.62	0.19	10.93	≤23.98	3.20	14.13	---	PASS
11AC20MI MO	Ant2	5700	95.62	0.19	11.68	≤23.98	3.20	14.88	---	PASS
11AC20MI MO	total	5700	---	---	14.33	≤23.98	3.20	17.53	---	PASS
11AC20MI MO	Ant1	5745	95.62	0.19	11.36	≤30.00	3.10	14.46	---	PASS
11AC20MI MO	Ant2	5745	95.62	0.19	11.78	≤30.00	3.00	14.78	---	PASS
11AC20MI MO	total	5745	---	---	14.59	≤30.00	3.10	17.69	---	PASS
11AC20MI MO	Ant1	5785	95.62	0.19	11.17	≤30.00	3.10	14.27	---	PASS
11AC20MI MO	Ant2	5785	95.62	0.19	11.84	≤30.00	3.00	14.84	---	PASS
11AC20MI MO	total	5785	---	---	14.53	≤30.00	3.10	17.63	---	PASS
11AC20MI MO	Ant1	5825	95.62	0.19	10.96	≤30.00	3.10	14.06	---	PASS
11AC20MI MO	Ant2	5825	95.62	0.19	11.72	≤30.00	3.00	14.72	---	PASS
11AC20MI MO	total	5825	---	---	14.37	≤30.00	3.10	17.47	---	PASS
11AC40MI MO	Ant1	5190	92.86	0.32	10.35	≤23.98	3.10	13.45	---	PASS
11AC40MI MO	Ant2	5190	92.86	0.32	10.94	≤23.98	2.90	13.84	---	PASS
11AC40MI MO	total	5190	---	---	13.67	≤23.98	3.10	16.77	---	PASS
11AC40MI MO	Ant1	5230	92.86	0.32	10.43	≤23.98	3.10	13.53	---	PASS
11AC40MI MO	Ant2	5230	91.55	0.38	11.11	≤23.98	2.90	14.01	---	PASS
11AC40MI MO	total	5230	---	---	13.79	≤23.98	3.10	16.89	---	PASS
11AC40MI MO	Ant1	5270	91.55	0.38	10.79	≤23.98	3.10	13.89	---	PASS
11AC40MI MO	Ant2	5270	91.55	0.38	11.18	≤23.98	2.90	14.08	---	PASS
11AC40MI MO	total	5270	---	---	14.00	≤23.98	3.10	17.10	---	PASS
11AC40MI MO	Ant1	5310	92.86	0.32	10.63	≤23.98	3.10	13.73	---	PASS
11AC40MI MO	Ant2	5310	91.55	0.38	10.96	≤23.98	2.90	13.86	---	PASS


11AC40MI MO	total	5310	---	---	13.81	≤23.98	3.10	16.91	---	PASS
11AC40MI MO	Ant1	5510	92.86	0.32	10.30	≤23.98	3.20	13.50	---	PASS
11AC40MI MO	Ant2	5510	92.86	0.32	10.97	≤23.98	3.20	14.17	---	PASS
11AC40MI MO	total	5510	---	---	13.66	≤23.98	3.20	16.86	---	PASS
11AC40MI MO	Ant1	5550	92.86	0.32	10.45	≤23.98	3.20	13.65	---	PASS
11AC40MI MO	Ant2	5550	91.55	0.38	11.38	≤23.98	3.20	14.58	---	PASS
11AC40MI MO	total	5550	---	---	13.95	≤23.98	3.20	17.15	---	PASS
11AC40MI MO	Ant1	5670	92.86	0.32	10.78	≤23.98	3.20	13.98	---	PASS
11AC40MI MO	Ant2	5670	91.55	0.38	11.36	≤23.98	3.20	14.56	---	PASS
11AC40MI MO	total	5670	---	---	14.09	≤23.98	3.20	17.29	---	PASS
11AC40MI MO	Ant1	5755	92.86	0.32	11.58	≤30.00	3.10	14.68	---	PASS
11AC40MI MO	Ant2	5755	92.86	0.32	11.84	≤30.00	3.00	14.84	---	PASS
11AC40MI MO	total	5755	---	---	14.72	≤30.00	3.10	17.82	---	PASS
11AC40MI MO	Ant1	5795	91.55	0.38	11.47	≤30.00	3.10	14.57	---	PASS
11AC40MI MO	Ant2	5795	91.55	0.38	11.94	≤30.00	3.00	14.94	---	PASS
11AC40MI MO	total	5795	---	---	14.72	≤30.00	3.10	17.82	---	PASS
11AC80MI MO	Ant1	5210	84.21	0.75	9.26	≤23.98	3.10	12.36	---	PASS
11AC80MI MO	Ant2	5210	84.21	0.75	9.89	≤23.98	2.90	12.79	---	PASS
11AC80MI MO	total	5210	---	---	12.60	≤23.98	3.10	15.70	---	PASS
11AC80MI MO	Ant1	5290	84.21	0.75	9.86	≤23.98	3.10	12.96	---	PASS
11AC80MI MO	Ant2	5290	84.21	0.75	9.96	≤23.98	2.90	12.86	---	PASS
11AC80MI MO	total	5290	---	---	12.92	≤23.98	3.10	16.02	---	PASS
11AC80MI MO	Ant1	5530	84.21	0.75	9.26	≤23.98	3.20	12.46	---	PASS
11AC80MI MO	Ant2	5530	84.21	0.75	10.11	≤23.98	3.20	13.31	---	PASS
11AC80MI MO	total	5530	---	---	12.72	≤23.98	3.20	15.92	---	PASS
11AC80MI MO	Ant1	5610	84.21	0.75	9.88	≤23.98	3.20	13.08	---	PASS
11AC80MI MO	Ant2	5610	84.21	0.75	10.48	≤23.98	3.20	13.68	---	PASS
11AC80MI MO	total	5610	---	---	13.20	≤23.98	3.20	16.40	---	PASS
11AC80MI MO	Ant1	5775	84.21	0.75	10.16	≤30.00	3.10	13.26	---	PASS
11AC80MI MO	Ant2	5775	84.21	0.75	10.52	≤30.00	3.00	13.52	---	PASS
11AC80MI MO	total	5775	---	---	13.35	≤30.00	3.10	16.45	---	PASS

Note: The Duty Cycle Factor is compensated in the graph.
EIRP = conducted power + directional gain






11A-Ant1-5180-PASS

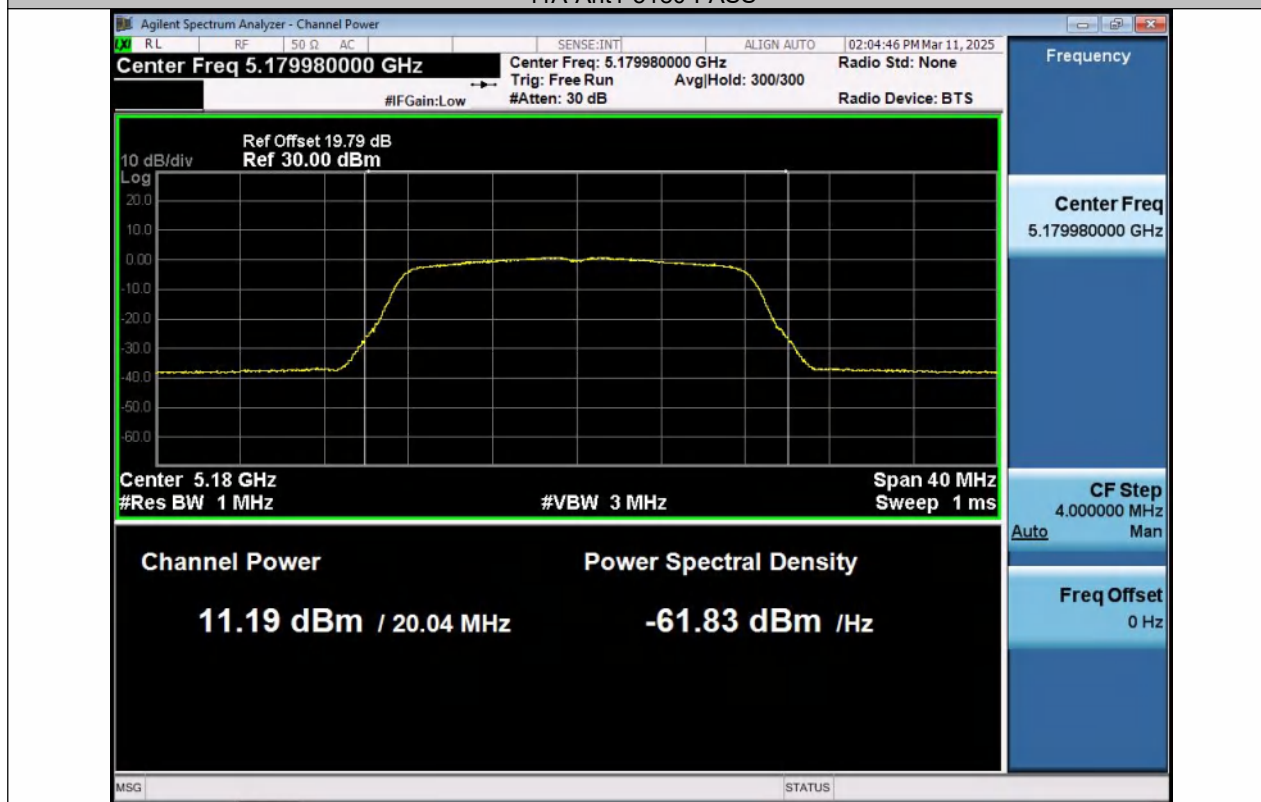

11A-Ant2-5180-PASS

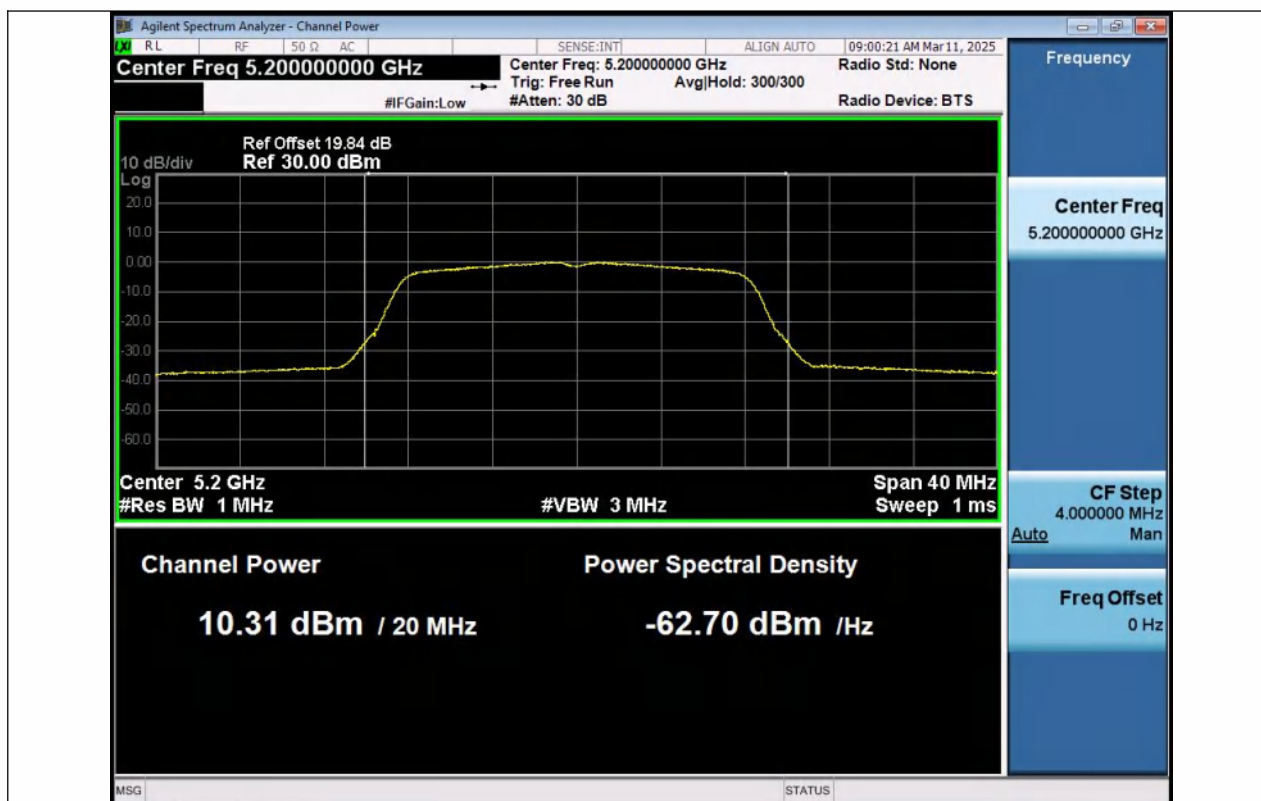


11A-Ant1-5200-PASS



11A-Ant2-5200-PASS




11A-Ant1-5240-PASS

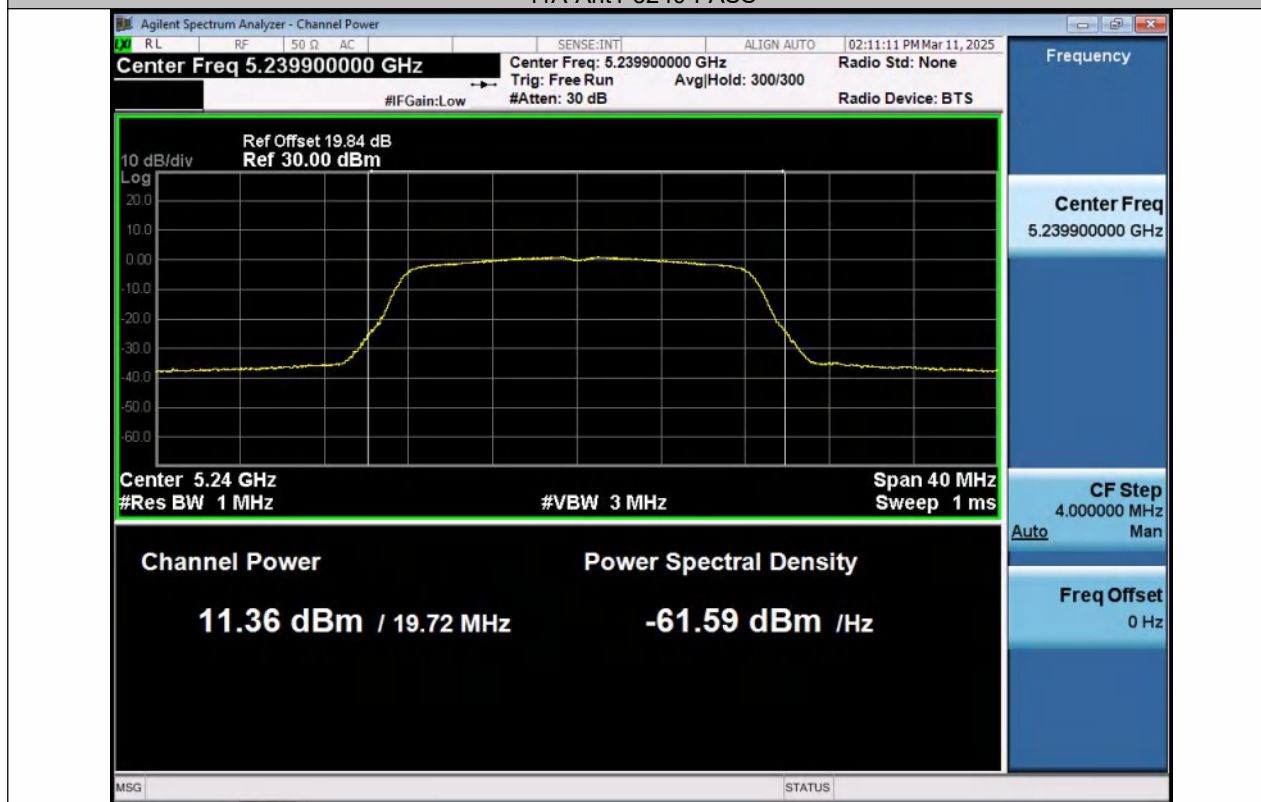

11A-Ant2-5240-PASS




11A-Ant1-5260-PASS

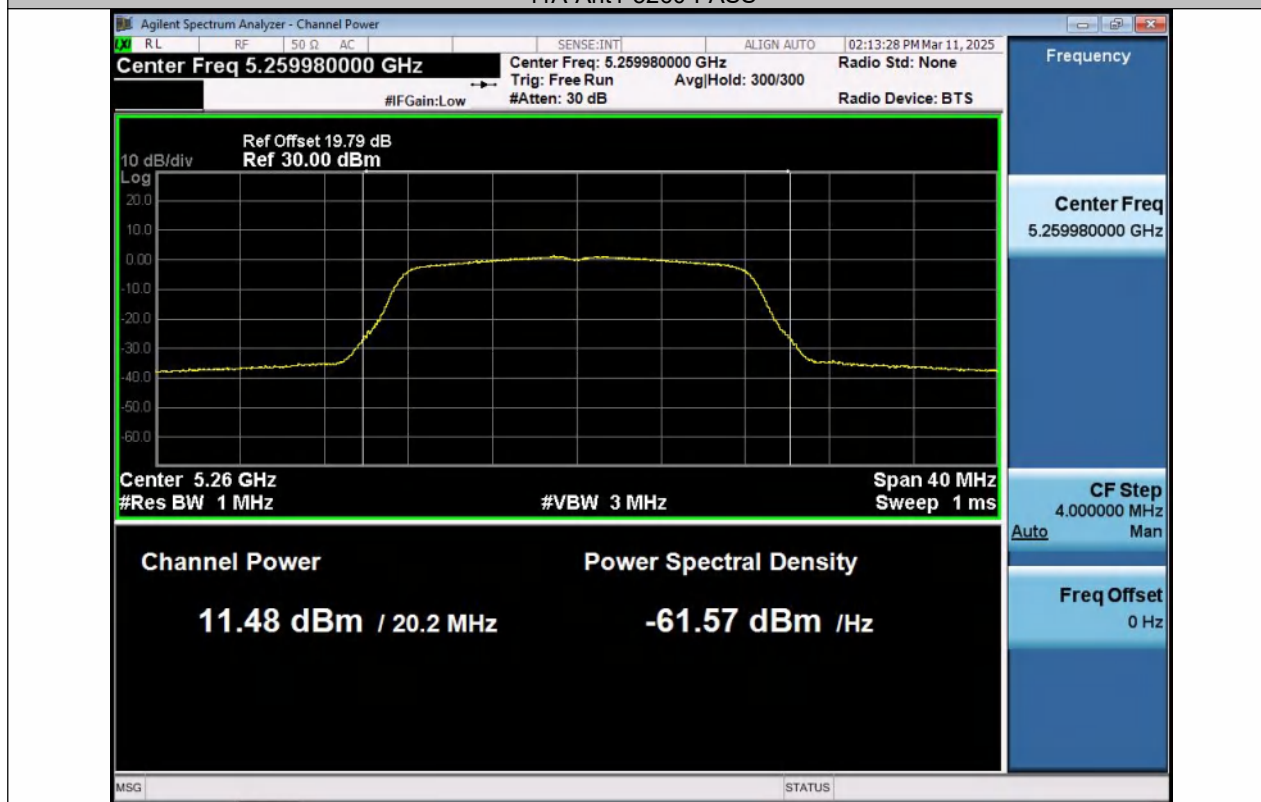

11A-Ant2-5260-PASS




11A-Ant1-5280-PASS

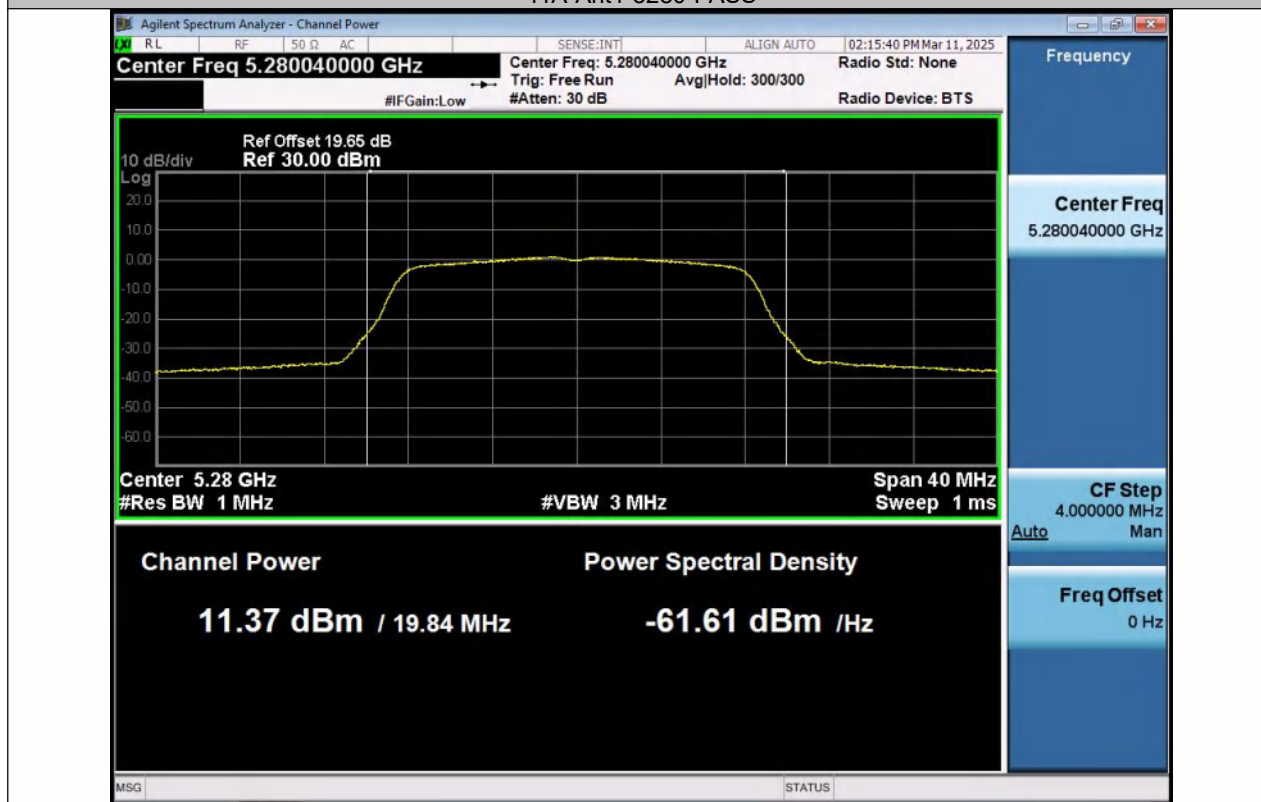

11A-Ant2-5280-PASS




11A-Ant1-5320-PASS

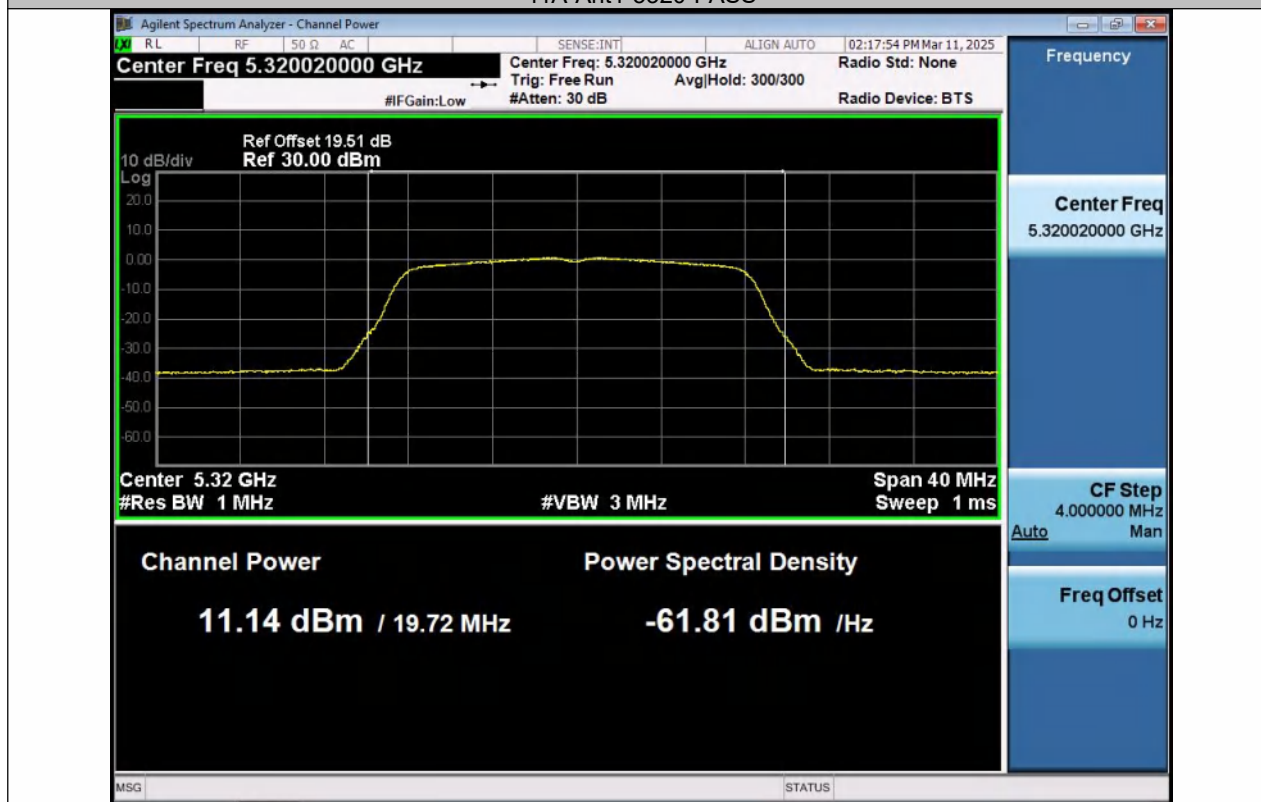

11A-Ant2-5320-PASS




11A-Ant1-5500-PASS

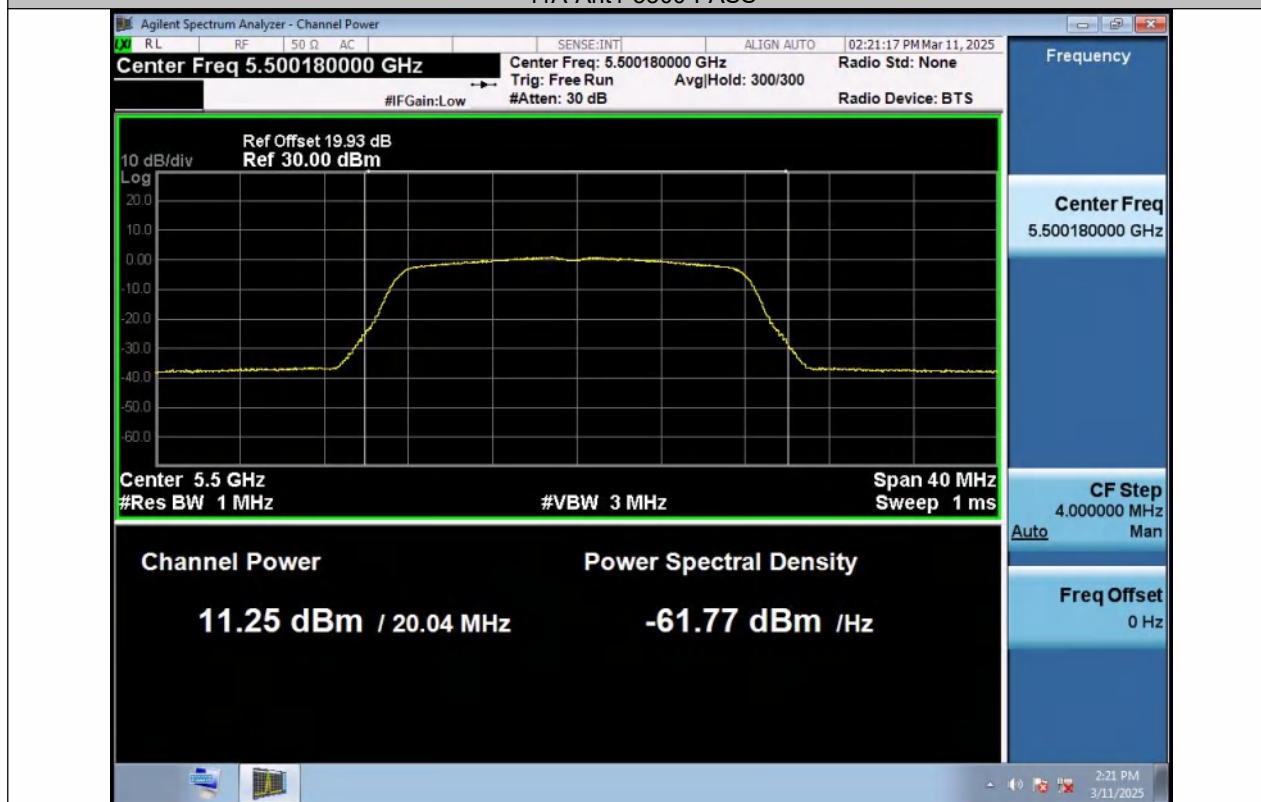


11A-Ant2-5500-PASS




11A-Ant1-5580-PASS

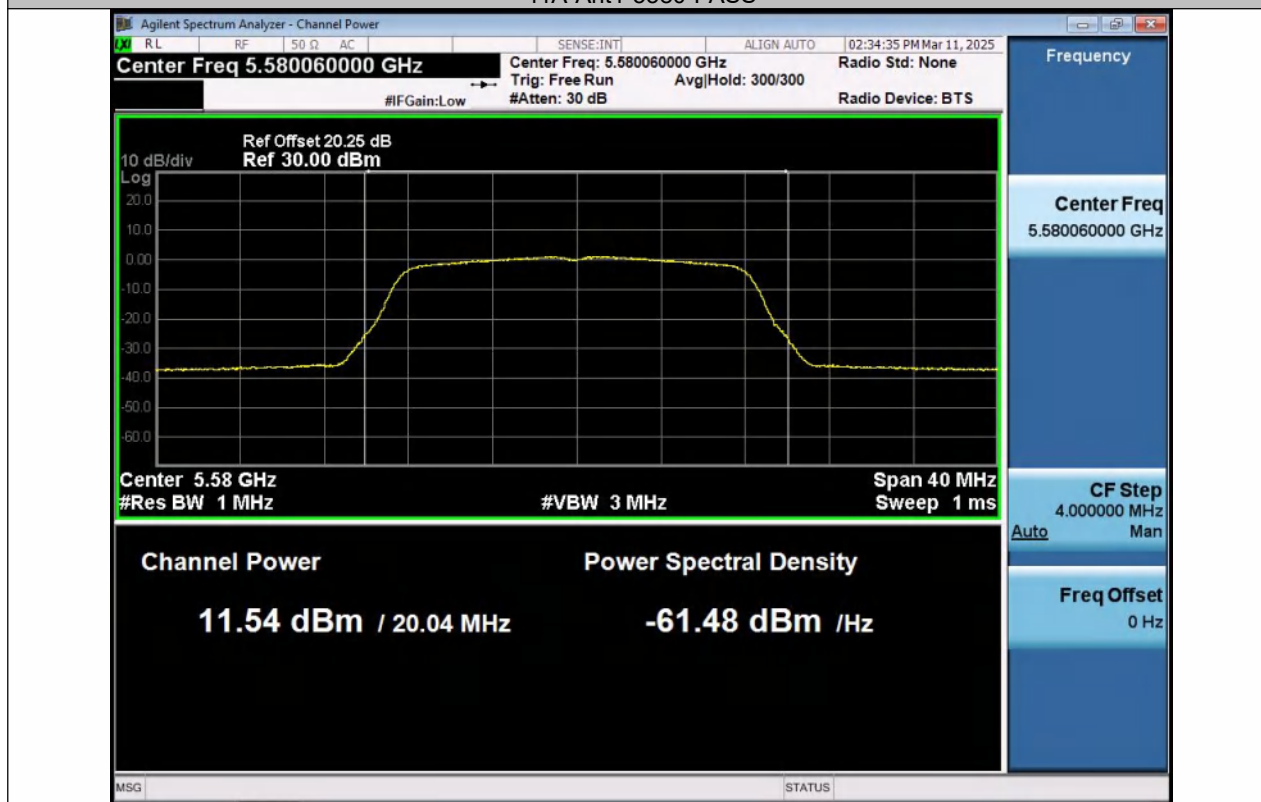

11A-Ant2-5580-PASS

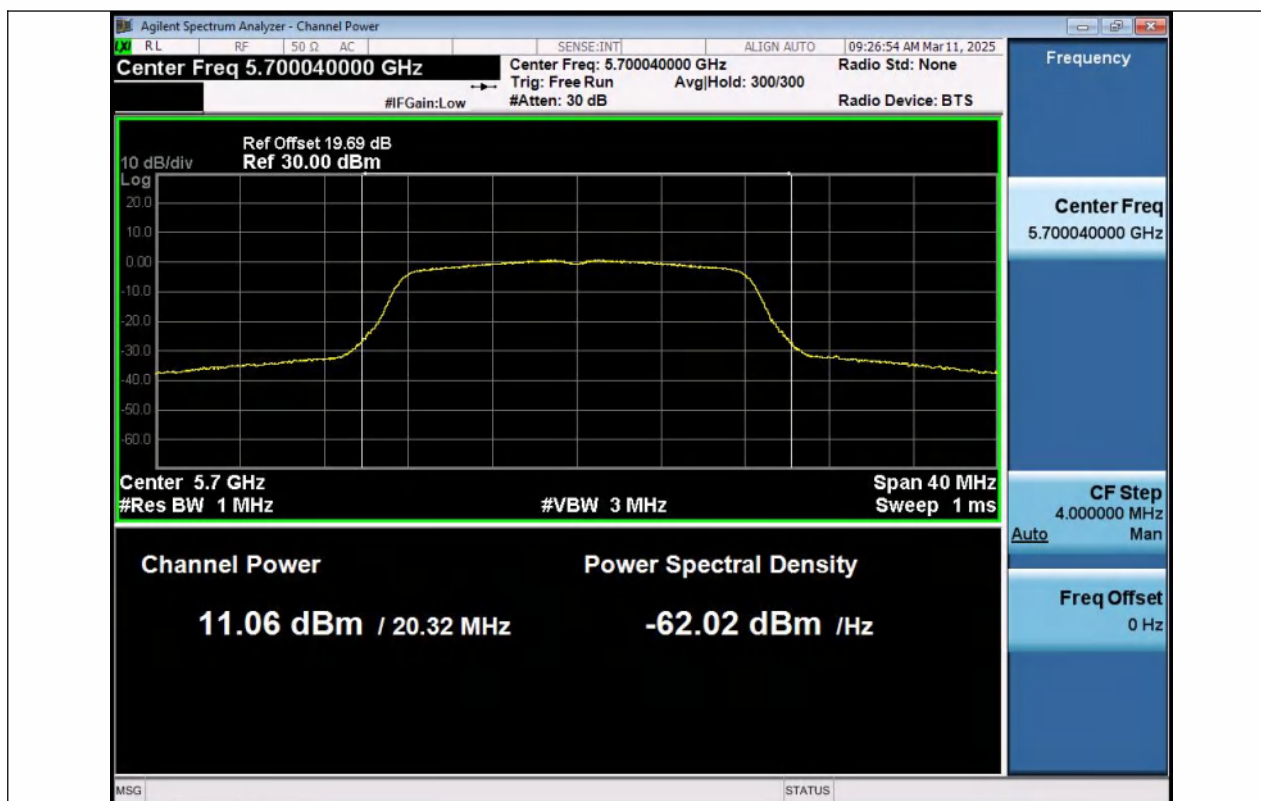

11A-Ant1-5700-PASS

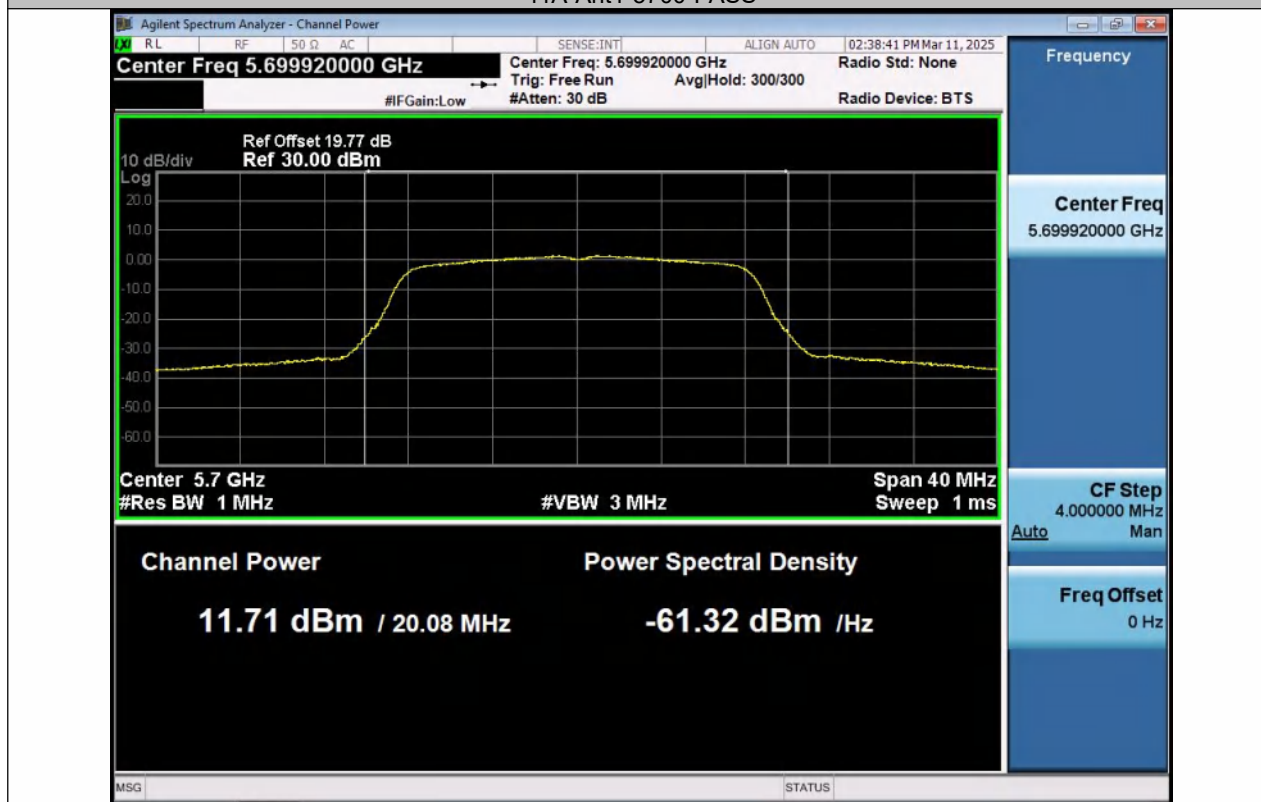

11A-Ant2-5700-PASS