

RF TEST REPORT

Test item : Industrial PDA
Model No. : BIP-1500
Order No. : 1202-00288
Date of receipt : 2012-02-24
Test duration : 2012-03-22 ~ 2012-04-03
Date of issue : 2012-04-09
Use of report : Original Grant


Applicant : Bluebird Soft Inc.
558-5, Sinsa-dong, Kangnam-gu, Seoul, Korea

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : §22(H), §24(E)
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:


Engineer
S.K.Ryu

Witnessed by:

N/A

Reviewed by:


Technical Director
Harvey Sung

Test Report Version

Test Report No.	Date	Description
DRTFCC1204-0172	Apr. 09, 2012	Final version for approval

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. TEST MODE & EUT POSITION	5
2.2. EUT DESCRIPTION.....	5
2.3. MEASURING INSTRUMENT CALIBRATION	5
2.4. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 ERP & EIRP	6
3.2 PEAK TO AVERAGE RATIO	7
3.3 OCCUPIED BANDWIDTH.....	8
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	9
3.5 RADIATED SPURIOUS EMISSIONS	10
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT.....	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
7.1 CONDUCTED OUTPUT POWER	15
7.2 PEAK TO AVERAGE RATIO	16
7.3 OCCUPIED BANDWIDTH	16
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	16
7.5 BAND EDGE.....	16
7.6 EFFECTIVE RADIATED POWER(GSM850/ WCDMA850)	17
7.7 EQUIVALENT ISOTROPIC RADIATED POWER(GSM1900/ WCDMA1900) ...	21
7.8 RADIATED SPURIOUS EMISSIONS	25
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)	25
7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)	29
7.8.3 RADIATED SPURIOUS EMISSIONS (GSM1900)	33
7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)	37
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	41
7.9.1 FREQUENCY STABILITY (GSM850)	41
7.9.2 FREQUENCY STABILITY (WCDMA850)	42
7.9.3 FREQUENCY STABILITY (GSM1900)	43
7.9.4 FREQUENCY STABILITY (WCDMA1900)	44
8. TEST PLOTS.....	45
8.1 Peak to Average Ratio	45
8.2 Occupied Bandwidth 99 % Bandwidth	47
8.3 Spurious Emissions at Antenna Terminal	59
8.4 Band Edge	77

1. GENERAL INFORMATION

Applicant Name: Bluebird Soft Inc.

Address: 558-5, Sinsa-dong, Kangnam-gu, Seoul, Korea

FCC ID : SS4BIP1500

FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)

EUT Type : Industrial PDA

Model Name : BIP-1500

Add Model Name : N/A

Supplying power : Standard Battery
- Type: Li-Ion Battery
- Rating: DC 7.4V & 2000mAh

Antenna Information : Internal Antenna
- Type: Built-In type

Tx Frequency : GSM850: 824.2 ~ 848.8 MHz
GSM1900: 1850.2 ~ 1909.8 MHz
EDGE850: 824.2 ~ 848.8 MHz
EDGE1900: 1850.2 ~ 1909.8 MHz
WCDMA850: 826.4 ~ 846.6 MHz
WCDMA1900: 1852.4 ~ 1907.6 MHz

Rx Frequency : GSM850: 869.2 ~ 893.8 MHz
GSM1900: 1930.2 ~ 1989.8 MHz
EDGE850: 869.2 ~ 893.8 MHz
EDGE1900: 1930.2 ~ 1989.8 MHz
WCDMA850: 871.4 ~ 891.6 MHz
WCDMA1900: 1932.4 ~ 1987.6 MHz

Max. RF Output Power : GSM850: 0.993W ERP(29.97dBm)
GSM1900: 0.804W EIRP(29.05dBm)
EDGE850: 0.583W ERP(27.66dBm)
EDGE1900: 0.504W EIRP(27.02dBm)
WCDMA850: 0.141W ERP(21.50dBm)
WCDMA1900: 0.195W EIRP(22.89dBm)

Emission Designator(s) : GSM850: 246KGXW
GSM1900: 247KGXW
EDGE850: 244KG7W
EDGE1900: 246KG7W
WCDMA850: 4M17F9W
WCDMA1900: 4M19F9W

2. INTRODUCTION

2.1. TEST CASES

Test Case 1 (Basic Test Case)	EUT + PINPAD (13.56MHz RFID)
Test Case 2 (Additional Test Case)	EUT + Finger scan
Test Case 3 (Additional Test Case)	EUT + Payment
Test Case 4 (Additional Test Case)	EUT + Battery Cover

This EUT has 4 optional external modules so above 4 test cases were tested for compliance.

2.2. EUT DESCRIPTION

The Equipment Under Test(EUT) supports a dual band(Cellular/PCS) with GSM/GPRS/EDGE, WCDMA, Bluetooth and 802.11b/g, RFID

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. TEST FACILITY


The 3&10M test site and conducted measurement facility used to collect the radiated data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.

- 3&10M test site registration Number: 678747

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

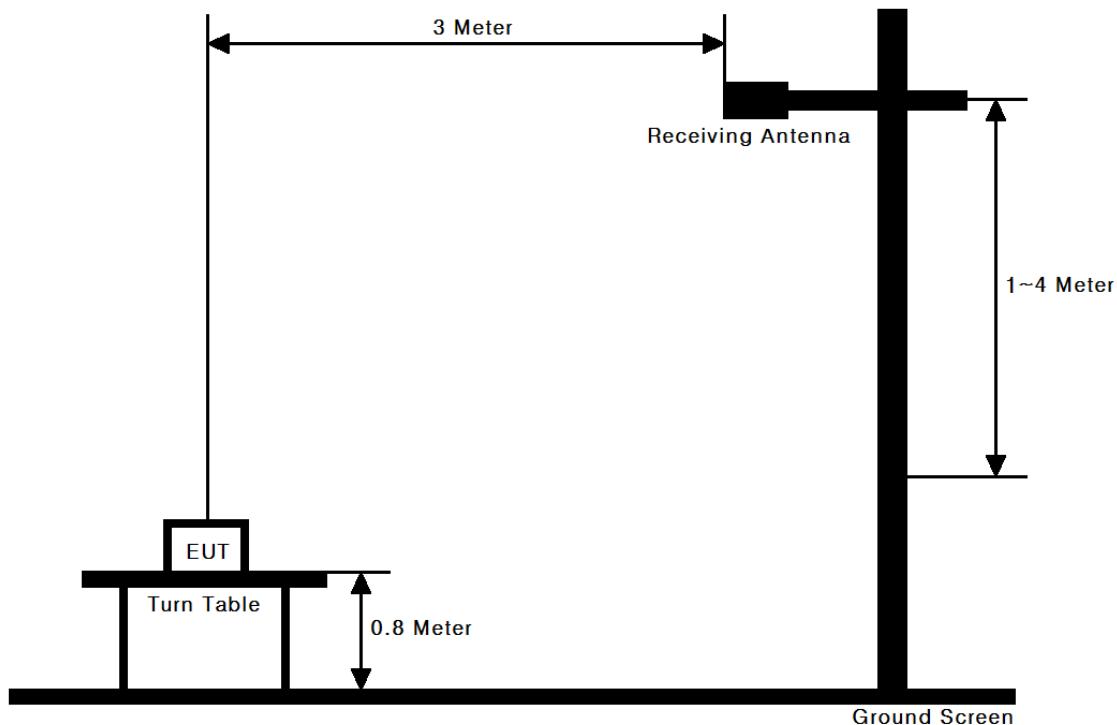

Test Procedure

These measurements were performed at 3&10m test site. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.


3.2 PEAK TO AVERAGE RATIO

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

3.3 OCCUPIED BANDWIDTH.

Test set-up

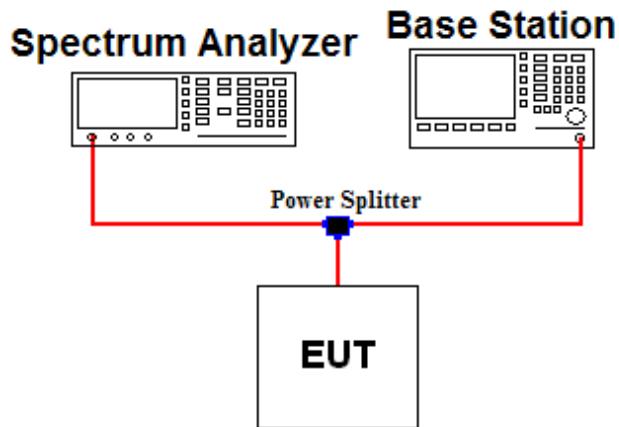


Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

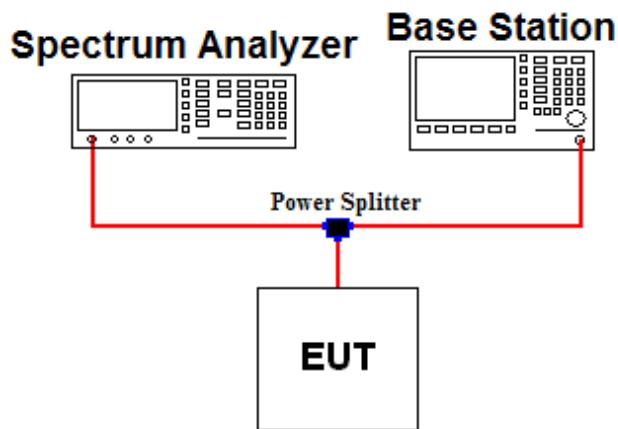

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with -13dBm limit [$43+10\log(P)$], in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block.


A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Band Edge Requirement

In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

3.5 RADIATED SPURIOUS EMISSIONS

Test Set-up

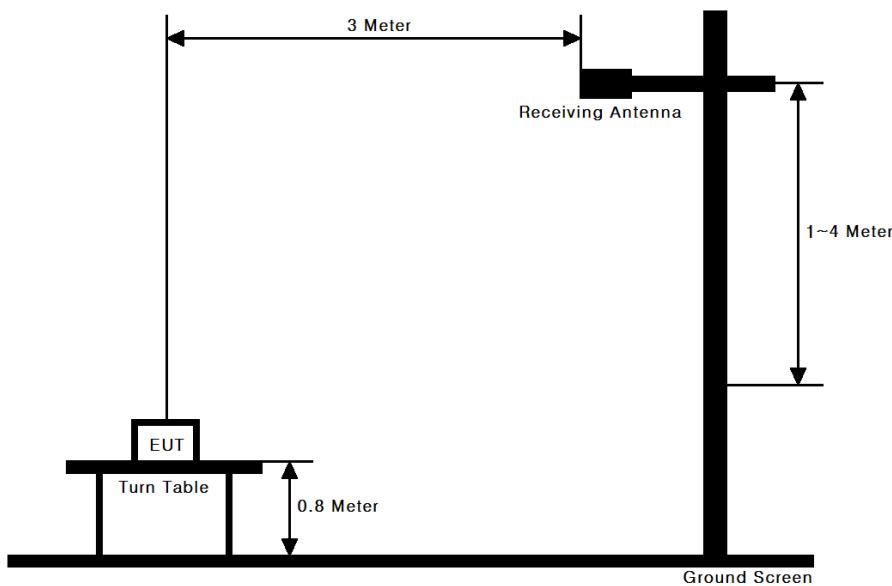

Test Procedure

This measurement was performed at 3meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

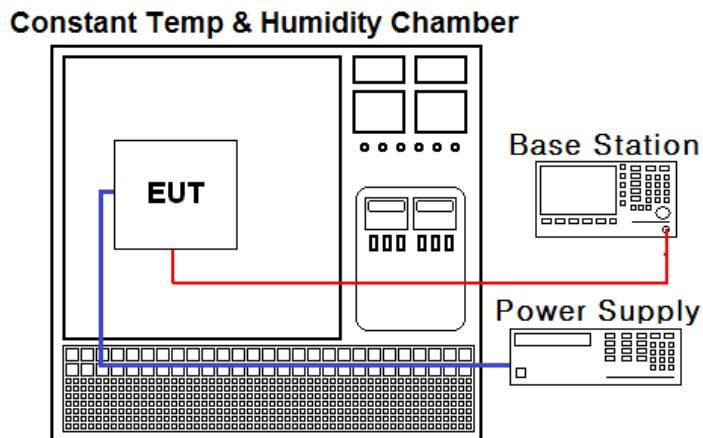

Test Procedure

The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30 °C to +50 °C using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification - the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\% (\pm 2.5\ ppm)$ of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature.
(25°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	11/09/30	12/09/30	MY45304199
Spectrum Analyzer	Agilent	N9020A	12/01/09	13/01/09	MY49100833
Power Splitter	Anritsu	K241B	11/09/30	12/09/30	020611
TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	11/09/30	12/09/30	30604493/021031
Digital Multimeter	H.P	34401A	12/03/05	13/03/05	3146A13475, US36122178
Signal Generator	Rohde Schwarz	SMR20	12/03/05	13/03/05	101251
Vector Signal Generator	Rohde Schwarz	SMJ100A	12/01/09	13/01/09	100148
8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	12/03/05	13/03/05	GB43461134
Thermo hygrometer	BODYCOM	BJ5478	12/01/13	13/01/13	090205-2
DC Power Supply	HP	6622A	12/03/05	13/03/05	3448A03760
High-pass filter	Wainwright	WHNX2.1	11/09/30	12/09/30	1
High-Pass Filter	Wainwright	D82346	11/09/30	12/09/30	9
Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
HORN ANT	ETS	3115	11/09/06	12/09/06	21097
HORN ANT	ETS	3115	12/02/20	13/02/20	6419
HORN ANT	Schwarzbeck	BBHA9120A	10/04/13	12/04/13	322
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2116
Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2117
Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2261
Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2262
Attenuator (3dB)	WEINSCHEL	56-3	11/09/30	12/09/30	Y2342
Attenuator (10dB)	WEINSCHEL	23-10-34	11/09/30	12/09/30	BP4386
Attenuator (10dB)	WEINSCHEL	31696	11/09/30	12/09/30	446
Amplifier (30dB)	Agilent	8449B	12/03/05	13/03/05	3008A01590
Amplifier	EMPOWER	BBS3Q7ELU	11/09/30	12/09/30	1020
BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A	10/07/07	12/07/07	590
Amplifier (25dB)	Agilent	8447D	12/03/05	13/03/05	2944A10144

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Parameter	Status Note 1
2.1046	Conducted Output Power	C
22.913(a) 24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	C
22.917(a) 24.238(a) 2.1049	Occupied Bandwidth	C
22.917(a) 24.238(a) 2.1051	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	C
24.232(d)	Peak to Average Ratio	C
22.917(a) 24.238(a) 2.1053	Radiated Spurious and Harmonic Emissions	C
22.355 24.235 2.1055	Frequency Stability	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable		

The sample was tested according to the following specification:
ANSI/TIA/EIA-603-C-2004

6. SAMPLE CALCULATION

A. Emission Designator

GSM850 Emission Designator

Emission Designator = **246KGXW**

GSM OBW = 246.34kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

GSM1900 Emission Designator

Emission Designator = **247KGXW**

GSM OBW = 247.23kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE850 Emission Designator

Emission Designator = **244KG7W**

GSM OBW = 244.38kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

EDGE1900 Emission Designator

Emission Designator = **246KG7W**

GSM OBW = 245.63 kHz

(Measured at the 99.75% power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M17F9W**

WCDMA OBW = 4.1656MHz

(Measured at the 99.75% power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

WCDMA1900 Emission Designator

Emission Designator = **4M19F9W**

WCDMA OBW = 4.1861MHz

(Measured at the 99.75% power bandwidth)

F = Frequency Modulation


9 = Composite Digital Information

W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

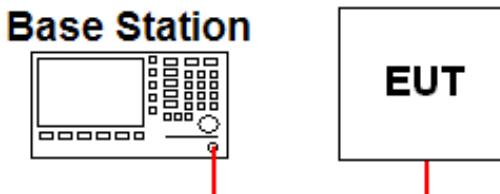

- GSM / GPRS / EDGE

Band	Channel	Test Result(dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.5	32.4	29.8	N/A	N/A	26.7	24.4	N/A	N/A
	190	32.3	32.3	30.1	N/A	N/A	27.0	24.5	N/A	N/A
	251	32.4	32.3	30.2	N/A	N/A	26.9	24.4	N/A	N/A
PCS	512	28.6	28.4	26.9	N/A	N/A	24.8	22.9	N/A	N/A
	661	28.4	28.3	26.3	N/A	N/A	24.8	22.8	N/A	N/A
	810	28.4	28.3	26.3	N/A	N/A	24.6	22.7	N/A	N/A

The output power was measured using the Agilent E5515C

- WCDMA

3GPP Release Version	Mode		Power (dBm)			MPR	B _c	β _d	B _c /β _d	Sub-Test
	Channel		4132	4183	4233					
99	WCDMA	RMC	24.25	23.98	24.19	-	-	-	-	-
		ARM	24.21	23.95	24.11					
5	HSDPA (Cellular)		24.21	23.93	24.09	0	2/15	15/15	2/15	1
5			24.20	23.92	24.07	0	12/15	15/15	12/15	2
5			23.77	23.39	23.59	0.5	15/15	8/15	15/8	3
5			23.75	23.40	23.55	0.5	15/15	4/15	15/4	4
-	Channel		9262	9400	9538	-	-	-	-	-
99	WCDMA	RMC	22.57	22.49	22.41	-	-	-	-	-
		ARM	22.55	22.48	22.40					
5	HSDPA (PCS)		22.53	22.45	22.39	0	2/15	15/15	2/15	1
5			22.51	22.41	22.38	0	12/15	15/15	12/15	2
5			21.98	21.91	21.88	0.5	15/15	8/15	15/8	3
5			21.91	21.89	21.88	0.5	15/15	4/15	15/4	4

The output power was measured using the Agilent E5515C

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

7.3 OCCUPIED BANDWIDTH

Band	Channel	Test Result(KHz)
GSM850	128	246.34
	190	243.54
	251	244.32
GSM1900	512	247.23
	661	246.17
	810	246.41
EDGE850	128	244.38
	190	241.94
	251	242.40
EDGE1900	512	245.63
	661	243.92
	810	242.42
WCDMA850	4132	4161.70
	4183	4165.60
	4233	4163.00
WCDMA1900	9262	4173.90
	9400	4182.00
	9538	4186.10

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.2

7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

7.5 BAND EDGE

- Plots of the EUT's Band Edge are shown in Clause 8.4

7.6 EFFECTIVE RADIATED POWER(GSM850/ WCDMA850)

- Test Case 1

- GSM850 data

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 5						
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply
128	Y	-7.02	V	29.49	-1.08	28.41	0.693	DC 7.4V
190	Y	-7.11	V	28.66	-1.09	27.57	0.571	DC 7.4V
251	Y	-6.17	V	31.07	-1.10	29.97	0.993	DC 7.4V
251	Y	-8.48	V	28.76	-1.10	27.66	0.583	DC 7.4V
								EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	TEST CONDITIONS						
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply
4132	Y	-14.99	V	22.40	-1.09	21.31	0.135	DC 7.4V
4183	Y	-13.25	V	22.59	-1.09	21.50	0.141	DC 7.4V
4233	Y	-14.12	V	21.22	-1.10	20.12	0.103	DC 7.4V
								-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2**- GSM850 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 5						Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	
128	Y	-7.26	V	29.25	-1.08	28.17	0.656	DC 7.4V GSM
190	Y	-7.16	V	28.61	-1.09	27.52	0.565	DC 7.4V GSM
251	Y	-6.19	V	31.05	-1.10	29.95	0.989	DC 7.4V GSM
251	Y	-8.55	V	28.69	-1.10	27.59	0.574	DC 7.4V EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	TEST CONDITIONS							Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	
4132	Y	-14.98	V	22.41	-1.09	21.32	0.136	DC 7.4V	-
4183	Y	-13.27	V	22.57	-1.09	21.48	0.141	DC 7.4V	-
4233	Y	-14.22	V	21.12	-1.10	20.02	0.100	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3**- GSM850 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 5						Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	
128	Y	-7.24	V	29.27	-1.08	28.19	0.659	DC 7.4V GSM
190	Y	-7.11	V	28.66	-1.09	27.57	0.571	DC 7.4V GSM
251	Y	-6.23	V	31.01	-1.10	29.91	0.979	DC 7.4V GSM
251	Y	-8.51	V	28.73	-1.10	27.63	0.579	DC 7.4V EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	TEST CONDITIONS							Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	
4132	Y	-14.92	V	22.47	-1.09	21.38	0.137	DC 7.4V	-
4183	Y	-13.28	V	22.56	-1.09	21.47	0.140	DC 7.4V	-
4233	Y	-14.28	V	21.06	-1.10	19.96	0.099	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4**- GSM850 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 5						Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	
128	Y	-7.30	V	29.21	-1.08	28.13	0.650	DC 7.4V GSM
190	Y	-7.16	V	28.61	-1.09	27.52	0.565	DC 7.4V GSM
251	Y	-6.31	V	30.93	-1.10	29.83	0.962	DC 7.4V GSM
251	Y	-8.61	V	28.63	-1.10	27.53	0.566	DC 7.4V EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	TEST CONDITIONS							Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	
4132	Y	-14.96	V	22.43	-1.09	21.34	0.136	DC 7.4V	-
4183	Y	-13.38	V	22.46	-1.09	21.37	0.137	DC 7.4V	-
4233	Y	-14.34	V	21.00	-1.10	19.90	0.098	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7 EQUIVALENT ISOTROPIC RADIATED POWER(GSM1900/ WCDMA1900)

- Test Case 1

- GSM1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 0						
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply
512	Y	-9.72	V	19.99	8.59	28.58	0.721	DC 7.4V
661	Y	-9.73	V	20.37	8.68	29.05	0.804	DC 7.4V
810	Y	-10.14	V	19.51	8.77	28.28	0.673	DC 7.4V
661	Y	-12.76	V	17.34	9.68	27.02	0.504	DC 7.4V
								EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS						
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply
9262	Y	-16.52	V	13.19	8.59	21.78	0.151	DC 7.4V
9400	Y	-15.89	V	14.21	8.68	22.89	0.195	DC 7.4V
9538	Y	-16.54	V	13.11	8.77	21.88	0.154	DC 7.4V
								-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2**- GSM1900 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 0						Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	
512	Y	-9.77	V	19.94	8.59	28.53	0.713	DC 7.4V GSM
661	Y	-9.74	V	20.36	8.68	29.04	0.802	DC 7.4V GSM
810	Y	-10.24	V	19.41	8.77	28.18	0.658	DC 7.4V GSM
661	Y	-12.78	V	17.32	9.68	27.00	0.501	DC 7.4V EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS							Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	
9262	Y	-16.55	V	13.16	8.59	21.75	0.150	DC 7.4V	-
9400	Y	-15.97	V	14.13	8.68	22.81	0.191	DC 7.4V	-
9538	Y	-16.54	V	13.11	8.77	21.88	0.154	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3**- GSM1900 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 0						Power Supply	Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)		
512	Y	-9.72	V	19.99	8.59	28.58	0.721	DC 7.4V	GSM
661	Y	-9.77	V	20.33	8.68	29.01	0.796	DC 7.4V	GSM
810	Y	-10.35	V	19.30	8.77	28.07	0.641	DC 7.4V	GSM
661	Y	-12.77	V	17.33	9.68	27.01	0.502	DC 7.4V	EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note.
9262	Y	-16.54	V	13.17	8.59	21.76	0.150	DC 7.4V	-
9400	Y	-15.94	V	14.16	8.68	22.84	0.192	DC 7.4V	-
9538	Y	-16.44	V	13.21	8.77	21.98	0.158	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4**- GSM1900 data**

CH.	EUT Position (Axis)	TEST CONDITIONS Power Step: 0						Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	
512	Y	-9.77	V	19.94	8.59	28.53	0.713	DC 7.4V GSM
661	Y	-9.78	V	20.32	8.68	29.00	0.794	DC 7.4V GSM
810	Y	-10.45	V	19.20	8.77	27.97	0.627	DC 7.4V GSM
661	Y	-12.87	V	17.23	9.68	26.91	0.491	DC 7.4V EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS							Note.
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	
9262	Y	-16.45	V	13.26	8.59	21.85	0.153	DC 7.4V	-
9400	Y	-15.96	V	14.14	8.68	22.82	0.191	DC 7.4V	-
9538	Y	-16.49	V	13.16	8.77	21.93	0.156	DC 7.4V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8 RADIATED SPURIOUS EMISSIONS

7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- Test Case 1

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
128 (0.693W)	1648.40	Y	V	-57.51	5.83	-51.68	80.09	41.41
	2472.60	Y	V	-24.92	7.68	-17.24	45.65	
	3296.80	Y	V	-45.71	8.72	-36.99	65.40	
	4121.00	Y	V	-44.89	9.24	-35.65	64.06	
190 (0.571W)	1673.20	Y	V	-50.36	5.90	-44.46	72.03	40.57
	2509.80	Y	V	-26.12	7.75	-18.37	45.94	
	3346.40	Y	V	-46.18	8.75	-37.43	65.00	
	4183.00	Y	V	-46.63	9.26	-37.37	64.94	
251 (0.993W)	1697.60	Y	V	-35.03	5.98	-29.05	59.02	42.97
	2546.40	Y	V	-24.60	7.82	-16.78	46.75	
	3395.20	Y	V	-41.03	8.79	-32.24	62.21	
	4244.00	Y	V	-35.76	9.28	-26.48	56.45	
	5092.80	Y	V	-43.21	9.42	-33.79	63.76	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
128 (0.656W)	1648.40	Y	V	-57.77	5.83	-51.94	80.11	41.17
	2472.60	Y	V	-25.26	7.68	-17.58	45.75	
	3296.80	Y	V	-45.97	8.72	-37.25	65.42	
	4121.00	Y	V	-45.10	9.24	-35.86	64.03	
190 (0.565W)	1673.20	Y	V	-50.76	5.90	-44.86	72.38	40.52
	2509.80	Y	V	-26.96	7.75	-19.21	46.73	
	3346.40	Y	V	-46.65	8.75	-37.90	65.42	
	4183.00	Y	V	-47.22	9.26	-37.96	65.48	
251 (0.989W)	1697.60	Y	V	-36.14	5.98	-30.16	60.11	42.95
	2546.40	Y	V	-25.37	7.82	-17.55	47.50	
	3395.20	Y	V	-41.17	8.79	-32.38	62.33	
	4244.00	Y	V	-36.23	9.28	-26.95	56.90	
	5092.80	Y	V	-43.46	9.42	-34.04	63.99	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
128 (0.659W)	1648.40	Y	V	-57.43	5.83	-51.60	79.79	41.19
	2472.60	Y	V	-25.28	7.68	-17.60	45.79	
	3296.80	Y	V	-45.67	8.72	-36.95	65.14	
	4121.00	Y	V	-44.68	9.24	-35.44	63.63	
190 (0.571W)	1673.20	Y	V	-51.66	5.90	-45.76	73.33	40.57
	2509.80	Y	V	-26.62	7.75	-18.87	46.44	
	3346.40	Y	V	-46.61	8.75	-37.86	65.43	
	4183.00	Y	V	-46.98	9.26	-37.72	65.29	
251 (0.979W)	1697.60	Y	V	-36.60	5.98	-30.62	60.53	42.91
	2546.40	Y	V	-25.06	7.82	-17.24	47.15	
	3395.20	Y	V	-41.42	8.79	-32.63	62.54	
	4244.00	Y	V	-36.32	9.28	-27.04	56.95	
	5092.80	Y	V	-43.87	9.42	-34.45	64.36	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
128 (0.650W)	1648.40	Y	V	-57.47	5.83	-51.64	79.77	41.13
	2472.60	Y	V	-25.34	7.68	-17.66	45.79	
	3296.80	Y	V	-44.67	8.72	-35.95	64.08	
	4121.00	Y	V	-44.42	9.24	-35.18	63.31	
190 (0.565W)	1673.20	Y	V	-51.37	5.90	-45.47	72.99	40.52
	2509.80	Y	V	-26.76	7.75	-19.01	46.53	
	3346.40	Y	V	-45.62	8.75	-36.87	64.39	
	4183.00	Y	V	-46.56	9.26	-37.30	64.82	
251 (0.962W)	1697.60	Y	V	-36.93	5.98	-30.95	60.78	42.83
	2546.40	Y	V	-25.19	7.82	-17.37	47.20	
	3395.20	Y	V	-41.82	8.79	-33.03	62.86	
	4244.00	Y	V	-36.33	9.28	-27.05	56.88	
	5092.80	Y	V	-43.58	9.42	-34.16	63.99	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)**- Test Case 1**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
4132 (0.135W)	1652.80	Y	V	-49.47	5.83	-43.64	64.95	34.31
	2479.20	Y	V	-43.96	7.68	-36.28	57.59	
	-	-	-	-	-	-	-	
4183 (0.141W)	1672.80	Y	V	-50.78	5.90	-44.88	66.38	34.50
	2509.20	Y	V	-43.46	7.75	-35.71	57.21	
	-	-	-	-	-	-	-	
4233 (0.103W)	1693.20	Y	V	-49.83	5.98	-43.85	63.97	33.12
	2539.80	Y	V	-44.05	7.82	-36.23	56.35	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
4132 (0.136W)	1652.80	Y	V	-49.94	5.83	-44.11	65.43	34.32
	2479.20	Y	V	-43.85	7.68	-36.17	57.49	
	-	-	-	-	-	-	-	
4183 (0.141W)	1672.80	Y	V	-50.49	5.90	-44.59	65.89	34.48
	2509.20	Y	V	-41.97	7.75	-34.22	55.52	
	-	-	-	-	-	-	-	
4233 (0.100W)	1693.20	Y	V	-50.15	5.98	-44.17	64.19	33.02
	2539.80	Y	V	-44.51	7.82	-36.69	56.71	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
4132 (0.137W)	1652.80	Y	V	-51.14	5.83	-45.31	66.79	34.38
	2479.20	Y	V	-43.85	7.68	-36.17	57.65	
	-	-	-	-	-	-	-	
4183 (0.140W)	1672.80	Y	V	-50.73	5.90	-44.83	66.30	34.47
	2509.20	Y	V	-41.62	7.75	-33.87	55.34	
	-	-	-	-	-	-	-	
4233 (0.099W)	1693.20	Y	V	-50.04	5.98	-44.06	64.02	32.96
	2539.80	Y	V	-44.03	7.82	-36.21	56.17	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
4132 (0.136W)	1652.80	Y	V	-51.43	5.83	-45.60	67.05	34.34
	2479.20	Y	V	-43.94	7.68	-36.26	57.71	
	-	-	-	-	-	-	-	
4183 (0.137W)	1672.80	Y	V	-51.36	5.90	-45.46	66.76	34.37
	2509.20	Y	V	-41.47	7.75	-33.72	55.02	
	-	-	-	-	-	-	-	
4233 (0.098W)	1693.20	Y	V	-50.30	5.98	-44.32	64.22	32.90
	2539.80	Y	V	-43.72	7.82	-35.90	55.80	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.3 RADIATED SPURIOUS EMISSIONS (GSM1900)**- Test Case 1**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
512 (0.721W)	3700.40	Y	V	-41.71	11.53	-30.18	58.76	41.58
	5550.60	Y	V	-38.34	11.44	-26.90	55.48	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.804W)	3760.00	Y	V	-45.72	11.51	-34.21	63.26	42.05
	5640.00	Y	V	-36.26	11.61	-24.65	53.70	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (0.673W)	3819.60	Y	V	-43.59	11.48	-32.11	60.39	41.28
	5729.40	Y	V	-34.41	11.24	-23.17	51.45	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
512 (0.713W)	3700.40	Y	V	-41.71	11.53	-30.18	58.71	41.53
	5550.60	Y	V	-38.58	11.44	-27.14	55.67	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.802W)	3760.00	Y	V	-46.44	11.51	-34.93	63.97	42.04
	5640.00	Y	V	-36.02	11.61	-24.41	53.45	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (0.658W)	3819.60	Y	V	-43.60	11.48	-32.12	60.30	41.18
	5729.40	Y	V	-34.55	11.24	-23.31	51.49	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
512 (0.721W)	3700.40	Y	V	-41.08	11.53	-29.55	58.13	41.58
	5550.60	Y	V	-38.63	11.44	-27.19	55.77	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.796W)	3760.00	Y	V	-45.86	11.51	-34.35	63.36	42.01
	5640.00	Y	V	-35.45	11.61	-23.84	52.85	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (0.641W)	3819.60	Y	V	-43.19	11.48	-31.71	59.78	41.07
	5729.40	Y	V	-34.40	11.24	-23.16	51.23	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
512 (0.713W)	3700.40	Y	V	-40.73	11.53	-29.20	57.73	41.53
	5550.60	Y	V	-37.58	11.44	-26.14	54.67	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.794W)	3760.00	Y	V	-44.85	11.51	-33.34	62.34	42.00
	5640.00	Y	V	-35.41	11.61	-23.80	52.80	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (0.627W)	3819.60	Y	V	-43.29	11.48	-31.81	59.78	40.97
	5729.40	Y	V	-34.15	11.24	-22.91	50.88	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)**- Test Case 1**

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
9262 (0.151W)	3704.80	Y	V	-46.60	9.67	-36.93	58.71	34.49
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.195W)	3760.00	Y	V	-46.19	9.68	-36.51	59.40	36.16
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.154W)	3815.20	Y	V	-46.41	9.68	-36.73	58.61	34.88
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 2

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
9262 (0.150W)	3704.80	Y	V	-46.69	9.67	-37.02	58.77	34.49
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.191W)	3760.00	Y	V	-46.23	9.68	-36.55	59.36	36.16
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.154W)	3815.20	Y	V	-46.53	9.68	-36.85	58.73	34.88
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 3

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
9262 (0.150W)	3704.80	Y	V	-46.90	9.67	-37.23	58.99	34.49
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.192W)	3760.00	Y	V	-46.48	9.68	-36.80	59.64	36.16
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.158W)	3815.20	Y	V	-46.38	9.68	-36.70	58.68	34.98
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

- Test Case 4

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
9262 (0.153W)	3704.80	Y	V	-46.30	9.67	-36.63	58.48	34.49
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.191W)	3760.00	Y	V	-47.22	9.68	-37.54	60.36	36.16
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.156W)	3815.20	Y	V	-46.16	9.68	-36.48	58.41	34.93
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.9.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,599,976 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	7.400	+25(Ref)	836,599,976	0.000	0.00000000
100%		-30	836,599,957	-0.023	-0.00000227
100%		-20	836,599,976	0.000	0.00000000
100%		-10	836,599,983	0.008	0.00000084
100%		0	836,599,977	0.001	0.00000012
100%		+10	836,599,970	-0.007	-0.00000072
100%		+20	836,599,981	0.006	0.00000060
100%		+30	836,599,988	0.014	0.00000143
100%		+40	836,599,987	0.013	0.00000131
100%		+50	836,599,986	0.012	0.00000120
115%	8.510	+25	836,599,969	-0.008	-0.00000084
BATT.ENDPOINT	5.800	+25	836,599,977	0.001	0.00000012

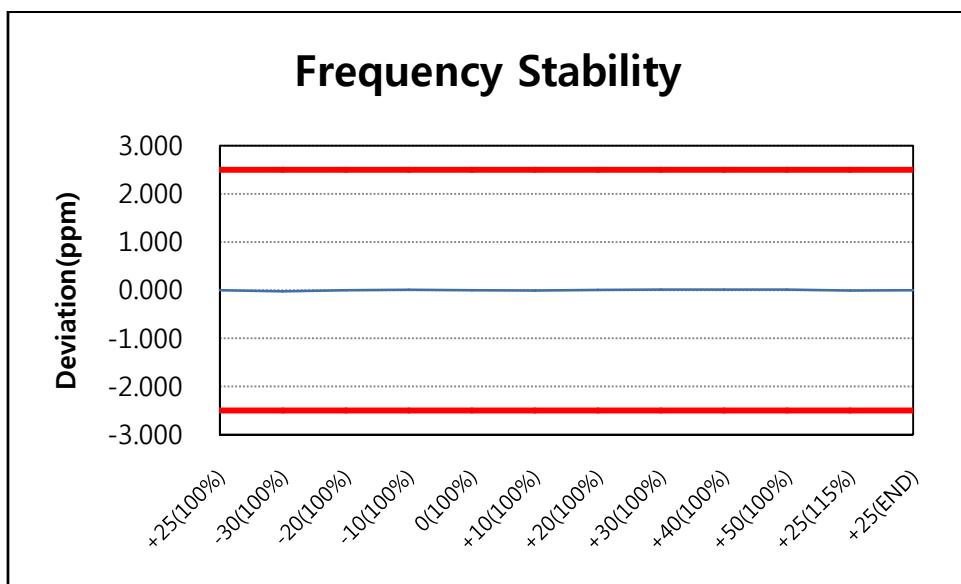

7.9.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,599,983 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	7.400	+25(Ref)	836,599,983	0.000	0.000000000
100%		-30	836,599,975	-0.010	-0.000000096
100%		-20	836,599,975	-0.010	-0.000000096
100%		-10	836,599,977	-0.007	-0.000000072
100%		0	836,599,976	-0.008	-0.000000084
100%		+10	836,599,978	-0.006	-0.000000060
100%		+20	836,599,978	-0.006	-0.000000060
100%		+30	836,599,984	0.001	0.00000012
100%		+40	836,599,980	-0.004	-0.000000036
100%		+50	836,599,977	-0.007	-0.000000072
115%	8.510	+25	836,599,984	0.001	0.00000012
BATT.ENDPOINT	5.800	+25	836,599,981	-0.002	-0.00000024

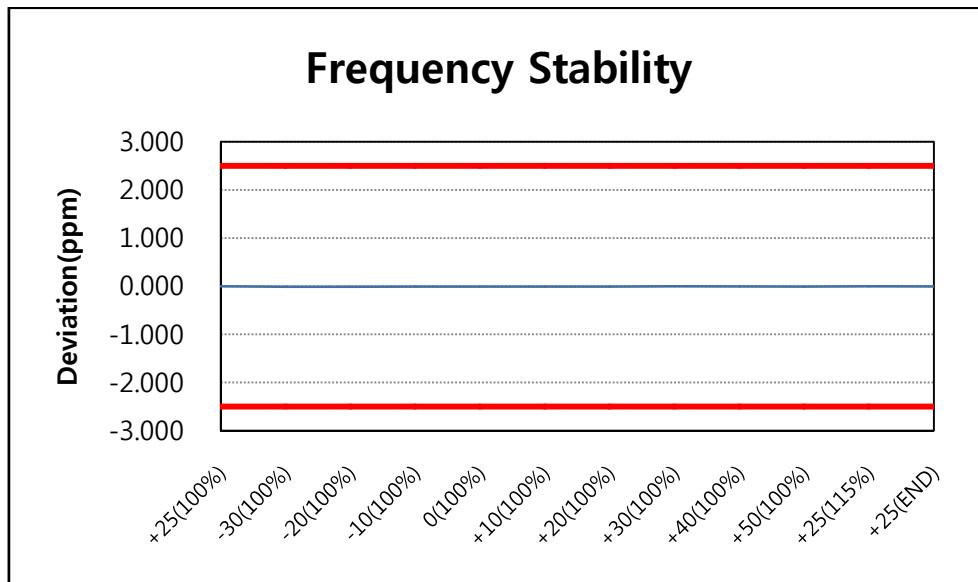

7.9.3 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1,879,999,968 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	7.400	+25(Ref)	1,879,999,968	0.000	0.000000000
100%		-30	1,879,999,961	-0.004	-0.00000037
100%		-20	1,880,000,012	0.023	0.00000234
100%		-10	1,880,000,017	0.026	0.00000261
100%		0	1,880,000,026	0.031	0.00000309
100%		+10	1,880,000,027	0.031	0.00000314
100%		+20	1,879,999,966	-0.001	-0.00000011
100%		+30	1,879,999,966	-0.001	-0.00000011
100%		+40	1,879,999,982	0.007	0.00000074
100%		+50	1,879,999,969	0.001	0.00000005
115%	8.510	+25	1,879,999,980	0.006	0.00000064
BATT.ENDPOINT	5.800	+25	1,879,999,985	0.009	0.00000090

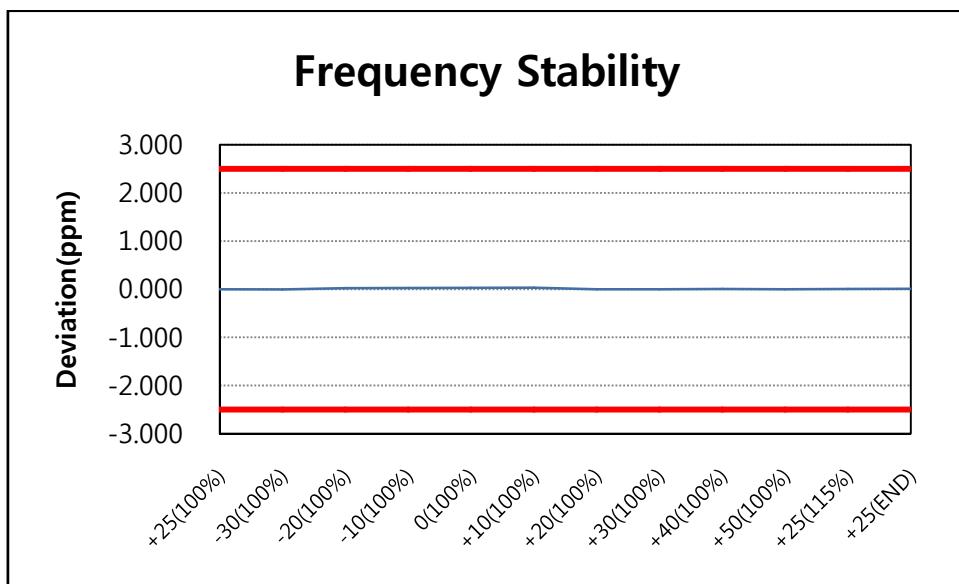

7.9.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,880,000,040 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	7.400	+25(Ref)	1,880,000,040	0.000	0.000000000
100%		-30	1,879,999,965	-0.040	-0.00000399
100%		-20	1,879,999,974	-0.035	-0.00000351
100%		-10	1,879,999,961	-0.042	-0.00000420
100%		0	1,879,999,960	-0.043	-0.00000426
100%		+10	1,880,000,027	-0.007	-0.00000069
100%		+20	1,880,000,030	-0.005	-0.00000053
100%		+30	1,880,000,045	0.003	0.00000027
100%		+40	1,880,000,033	-0.004	-0.00000037
100%		+50	1,880,000,034	-0.003	-0.00000032
115%	8.510	+25	1,880,000,042	0.001	0.00000011
BATT.ENDPOINT	5.800	+25	1,880,000,045	0.003	0.00000027

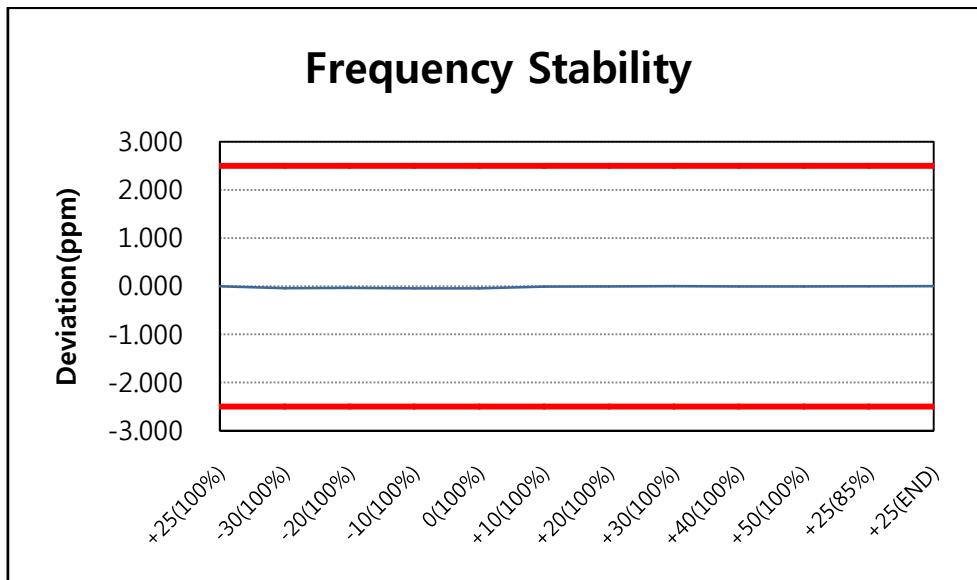

8. TEST PLOTS

8.1 Peak to Average Ratio

GSM1900 & Channel: 661

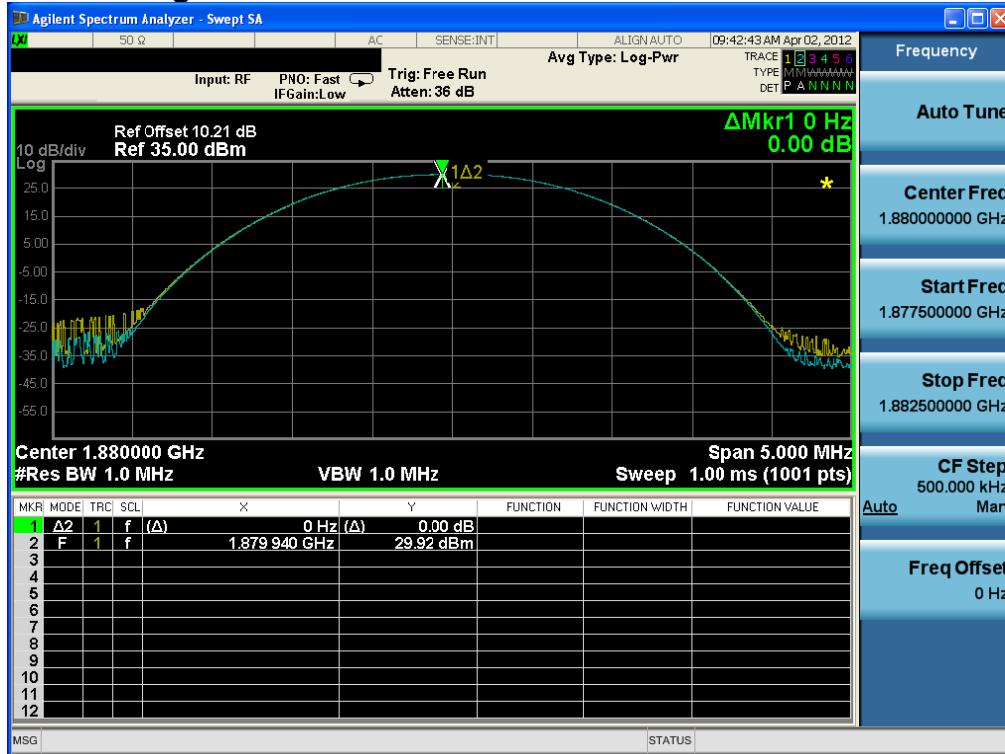

EDGE1900 & Channel: 661



WCDMA1900 & Channel: 9400




**8.2 Occupied Bandwidth 99 %
Bandwidth**


GSM850 & Channel: 128




GSM850 & Channel: 190

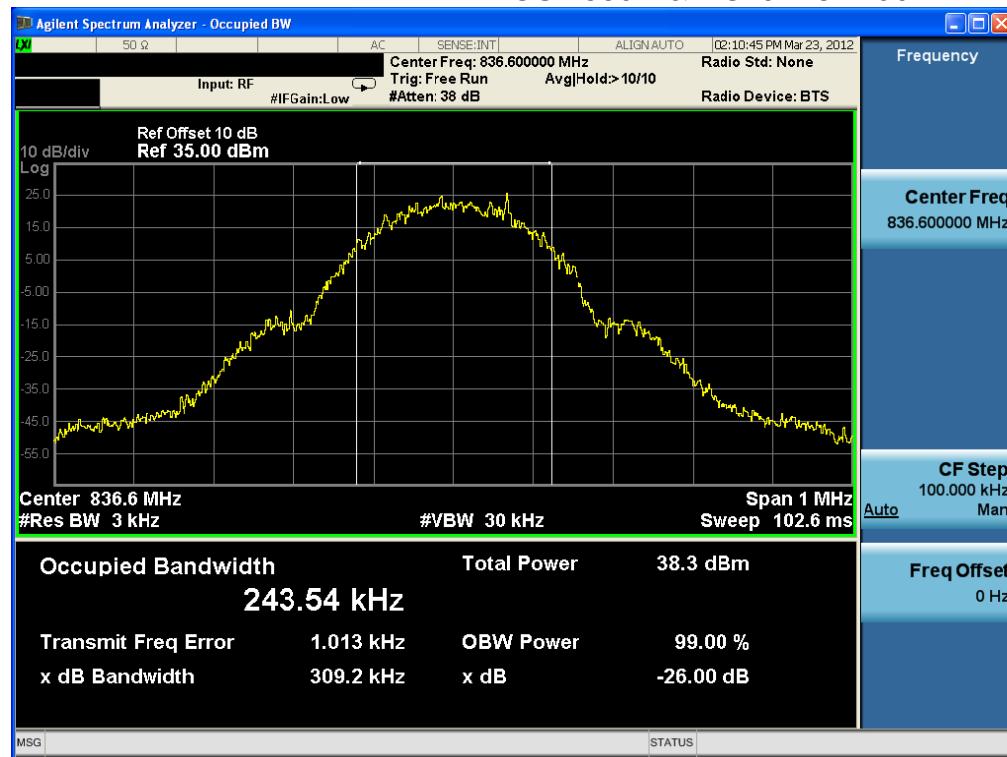


GSM850 & Channel: 251

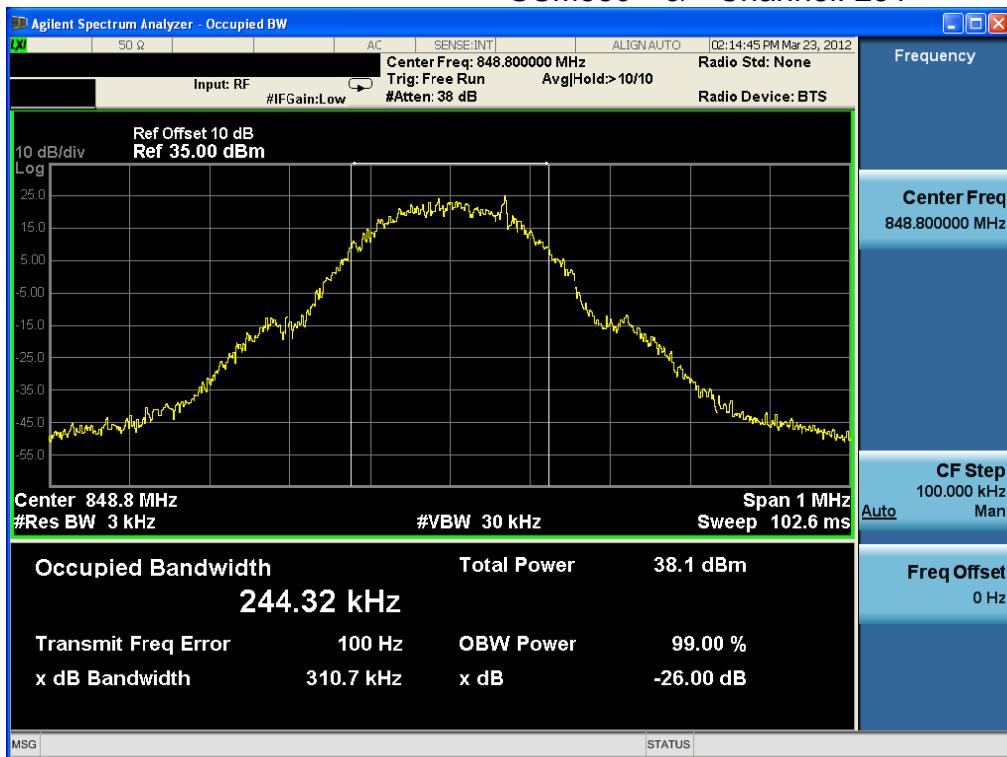

EDGE 850 & Channel: 128

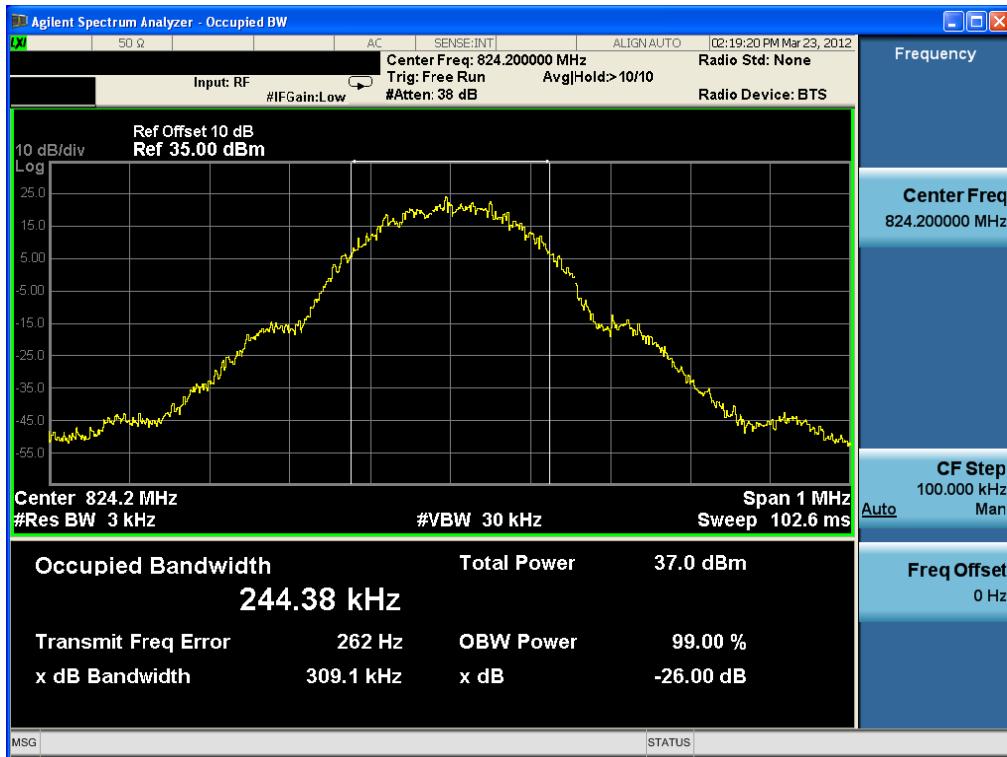


EDGE 850 & Channel: 190

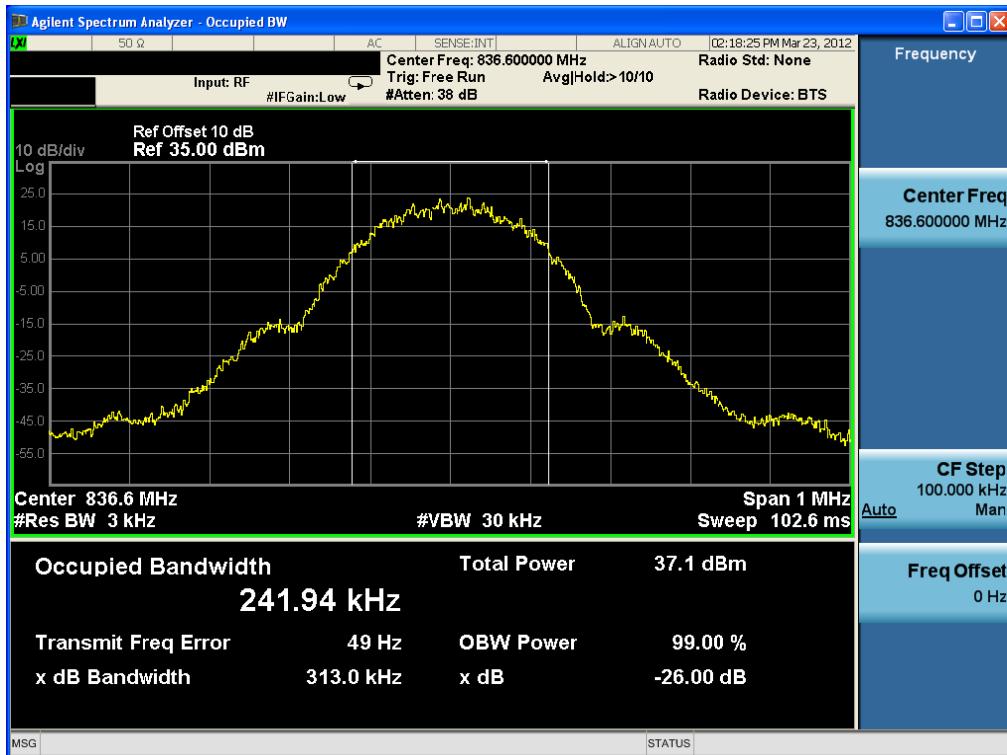

EDGE 850 & Channel: 251




WCDMA850 & Channel: 4132

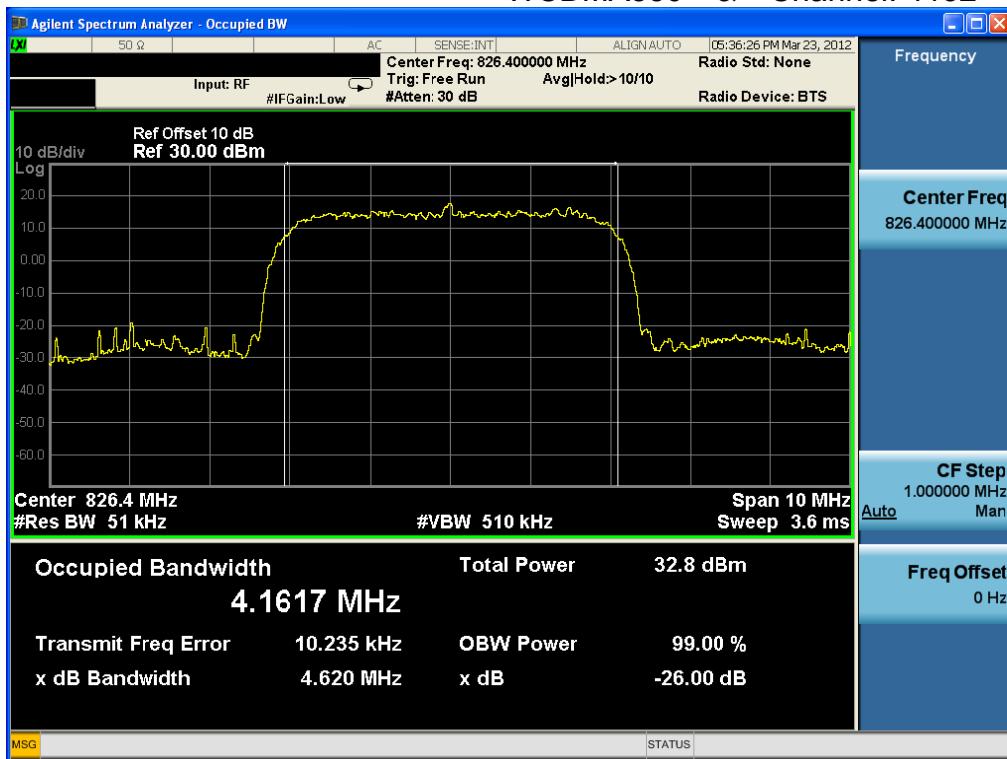


WCDMA850 & Channel: 4183




WCDMA850 & Channel: 4233

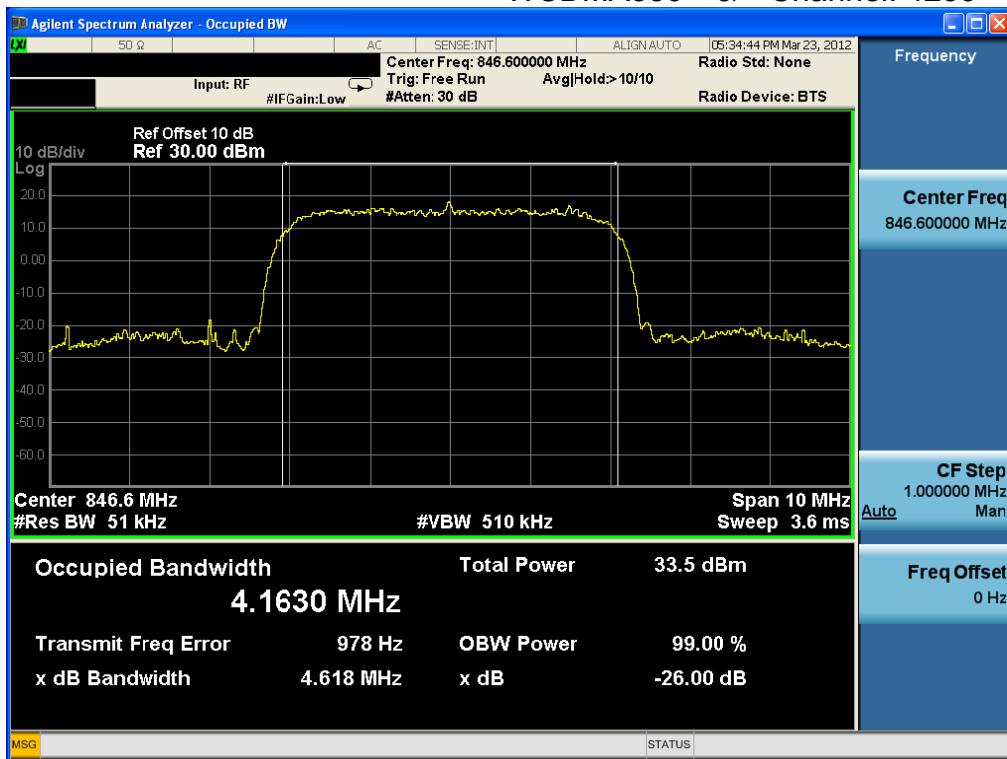

GSM 1900 & Channel: 512

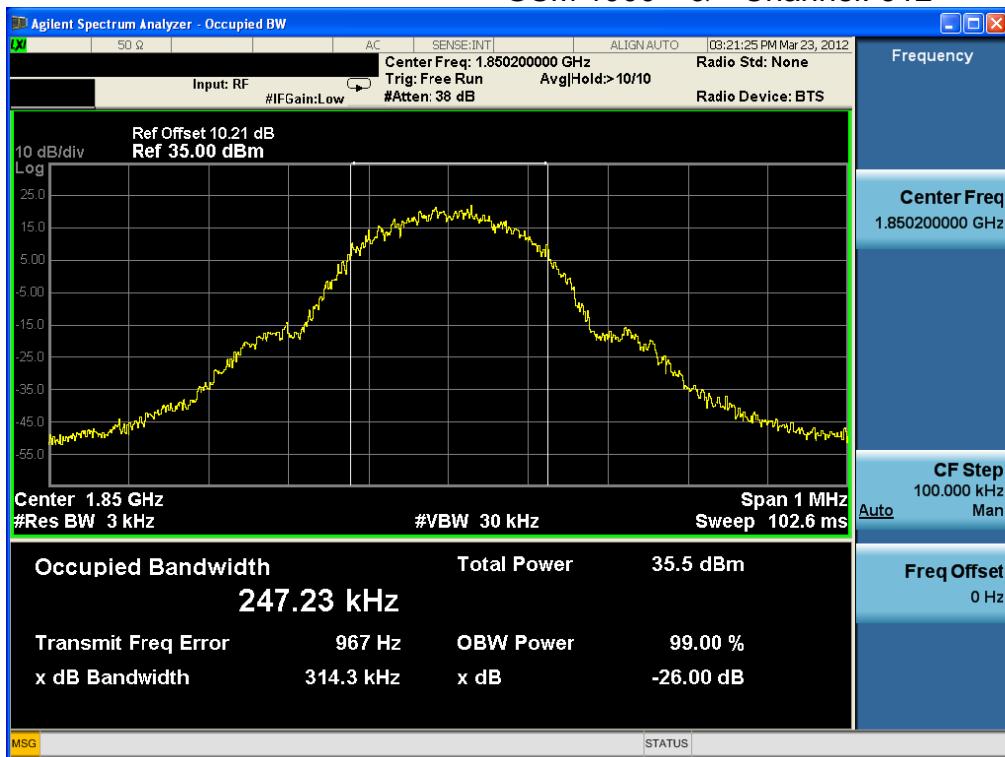


GSM 1900 & Channel: 661

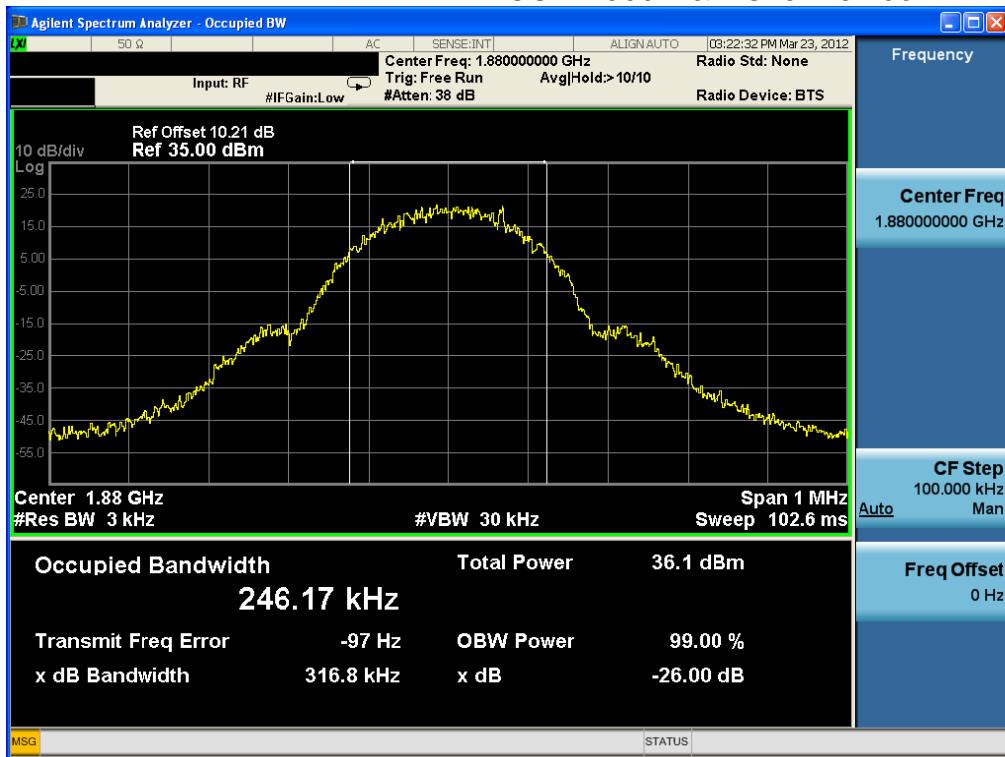


GSM 1900 & Channel: 810



EDGE 1900 & Channel: 512

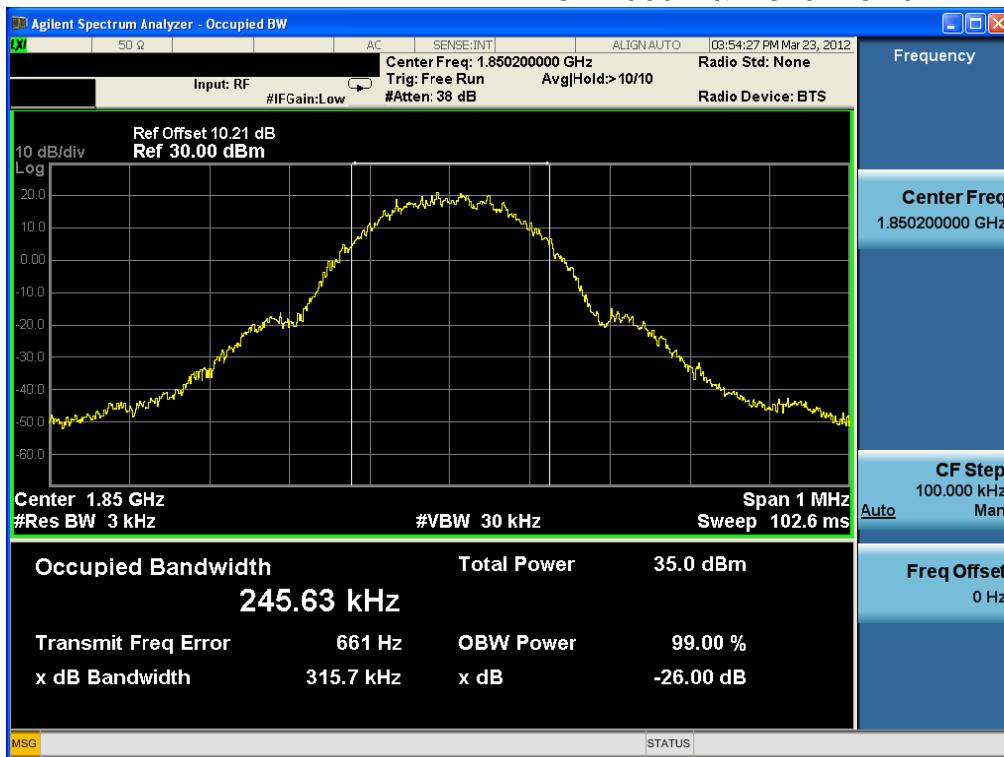


EDGE 1900 & Channel: 661

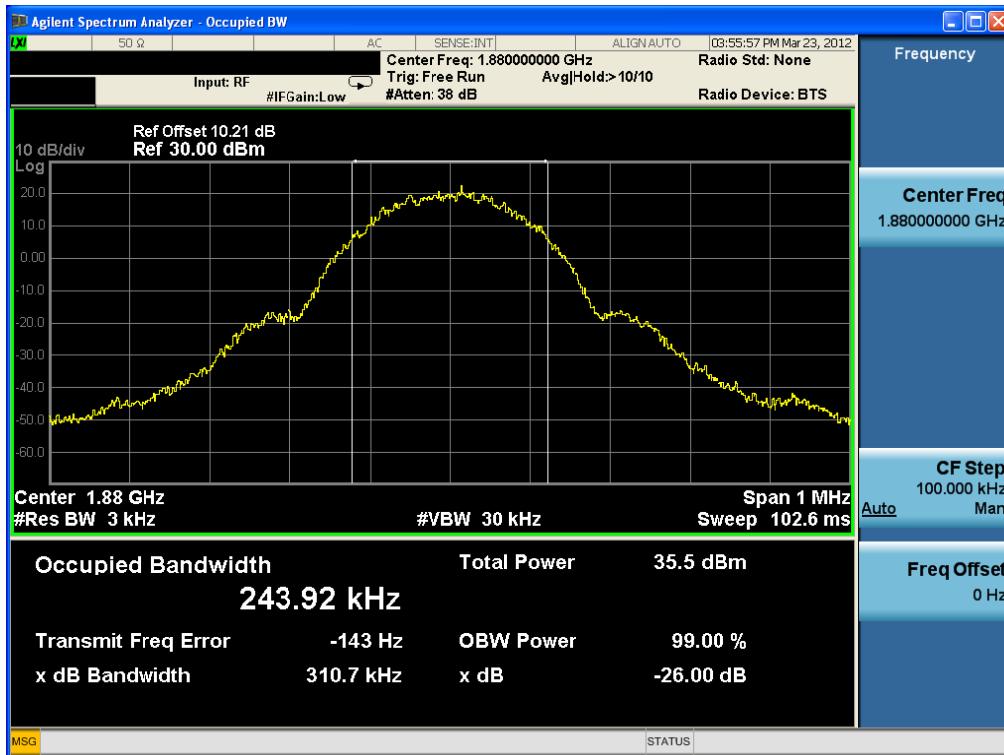


EDGE 1900 & Channel: 810



WCDMA1900 & Channel: 9262

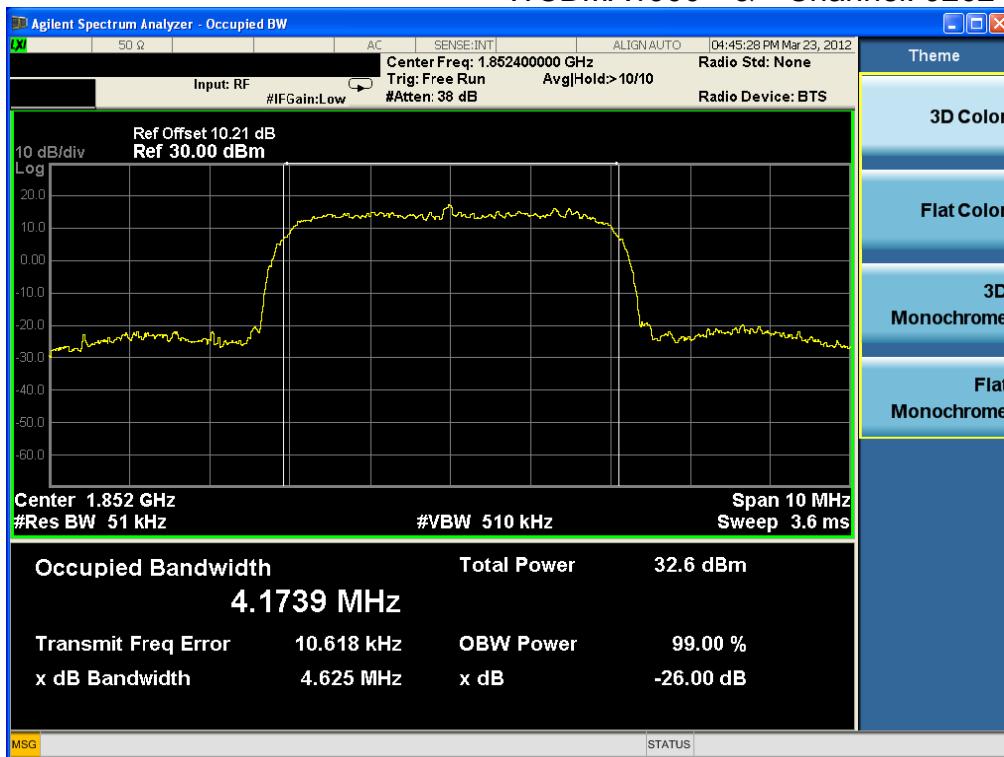

WCDMA1900 & Channel: 9400

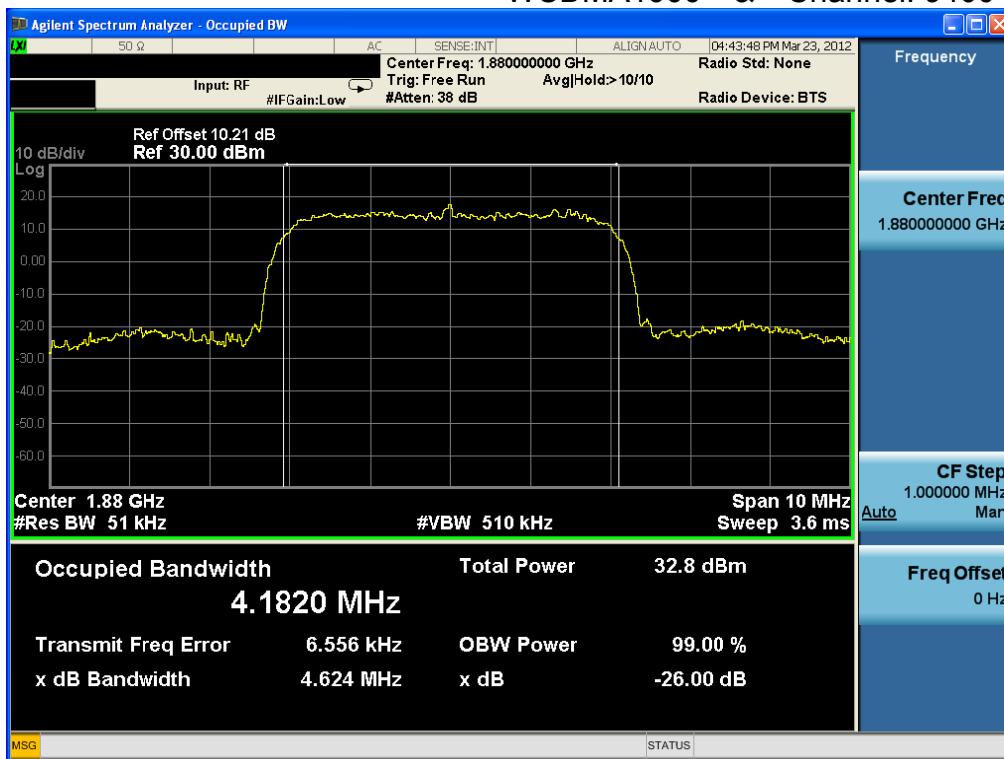


WCDMA1900 & Channel: 9538




8.3 Spurious Emissions at Antenna Terminal


GSM850 & Channel: 128

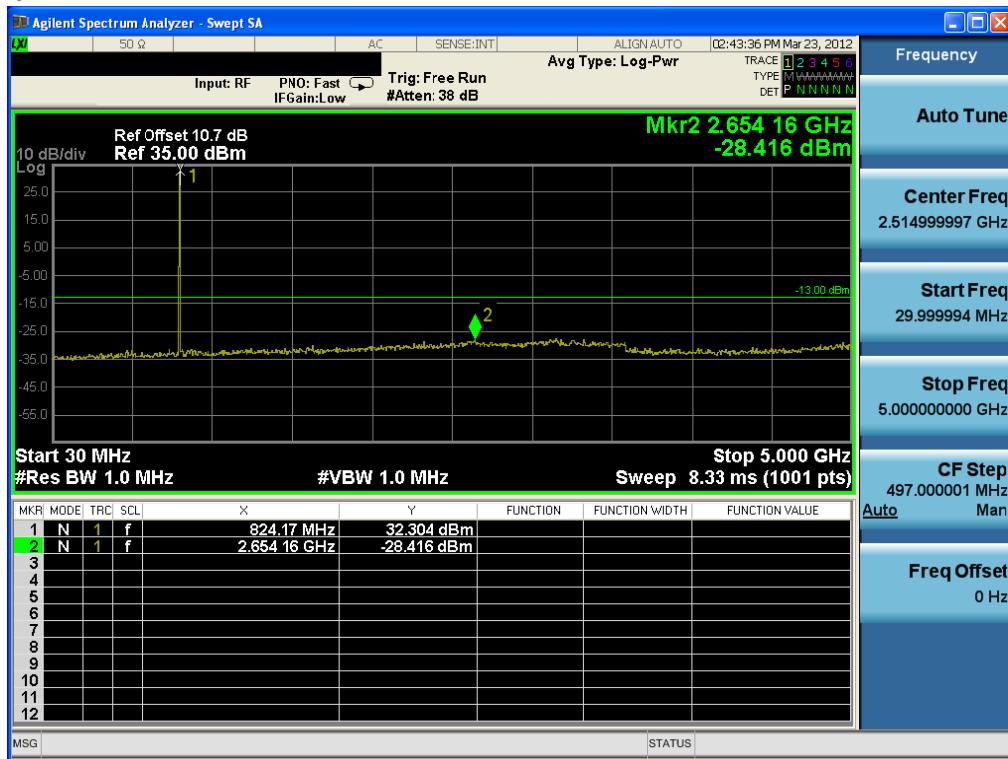


GSM850 & Channel: 128

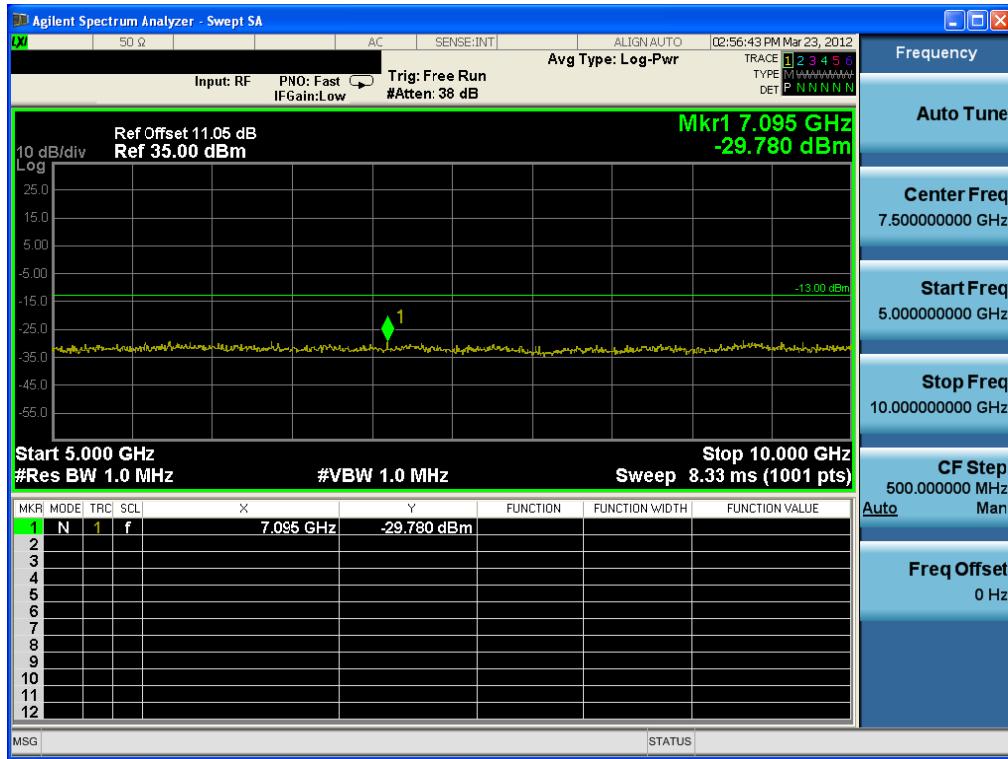


GSM850 & Channel: 190

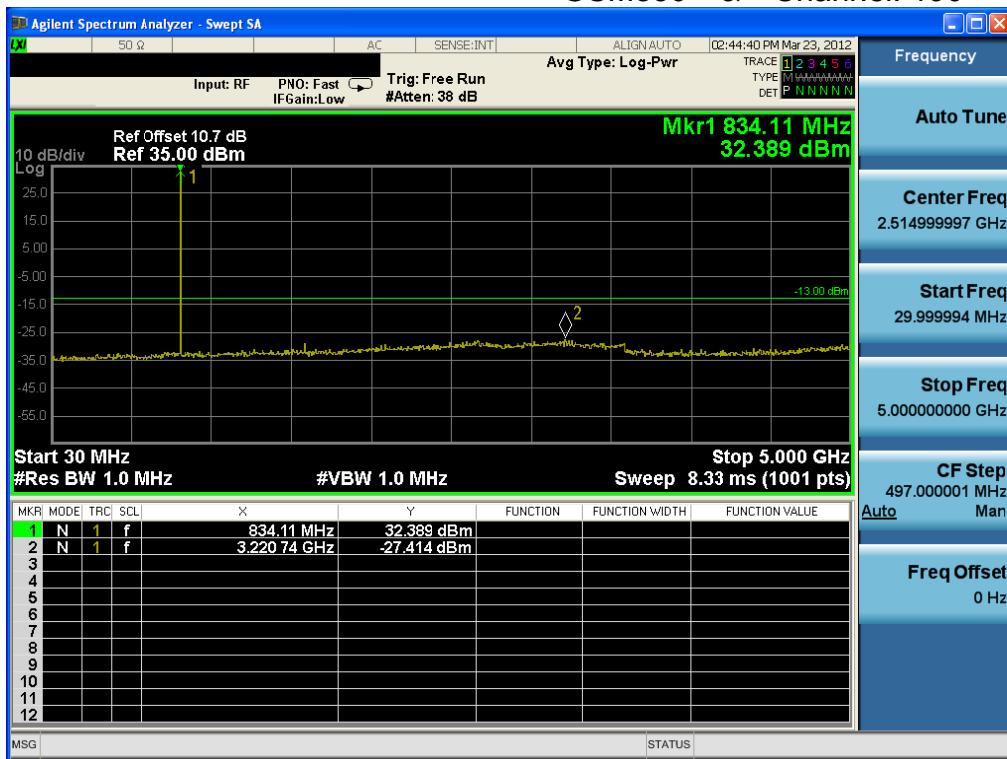


GSM850 & Channel: 190

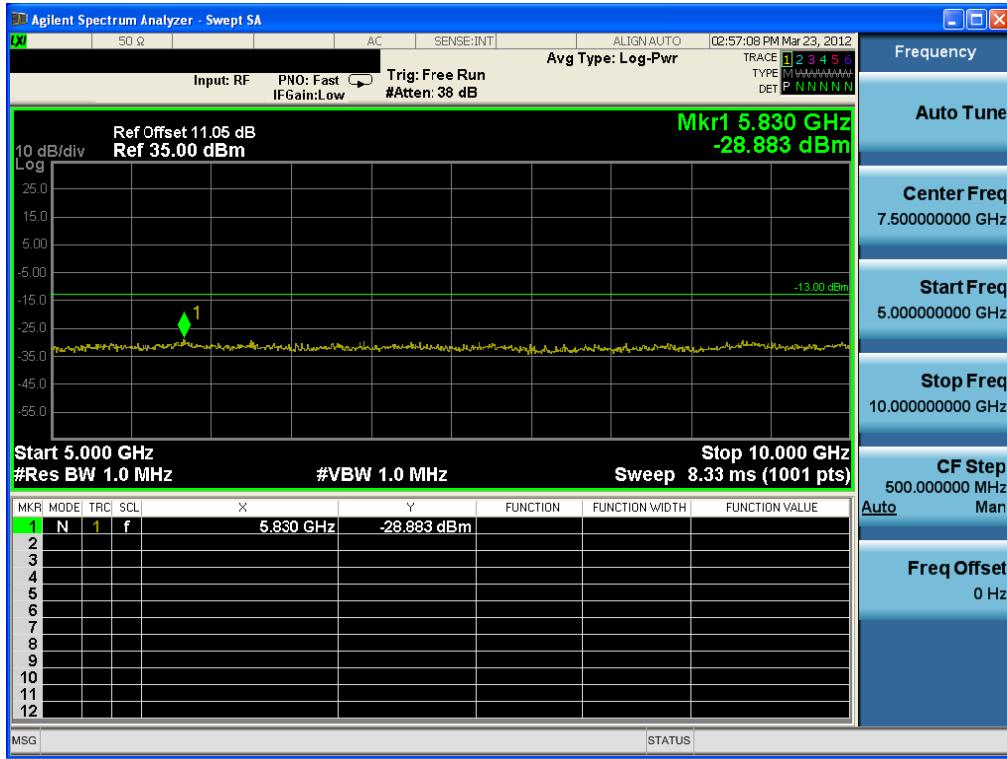


GSM850 & Channel: 251

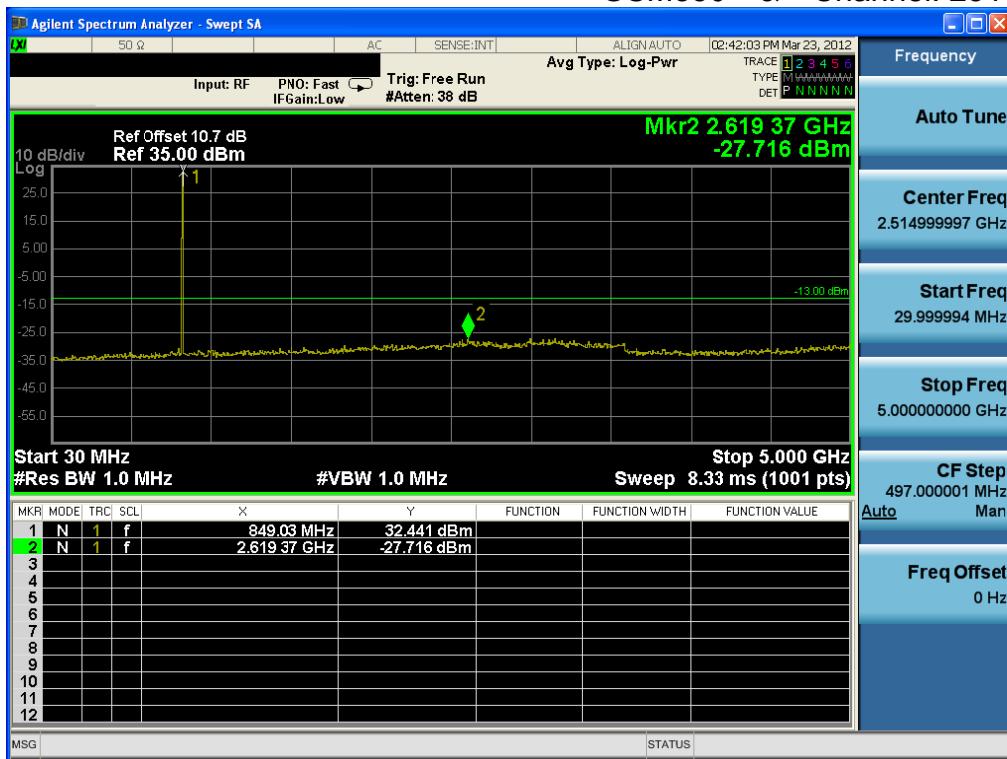


GSM850 & Channel: 251

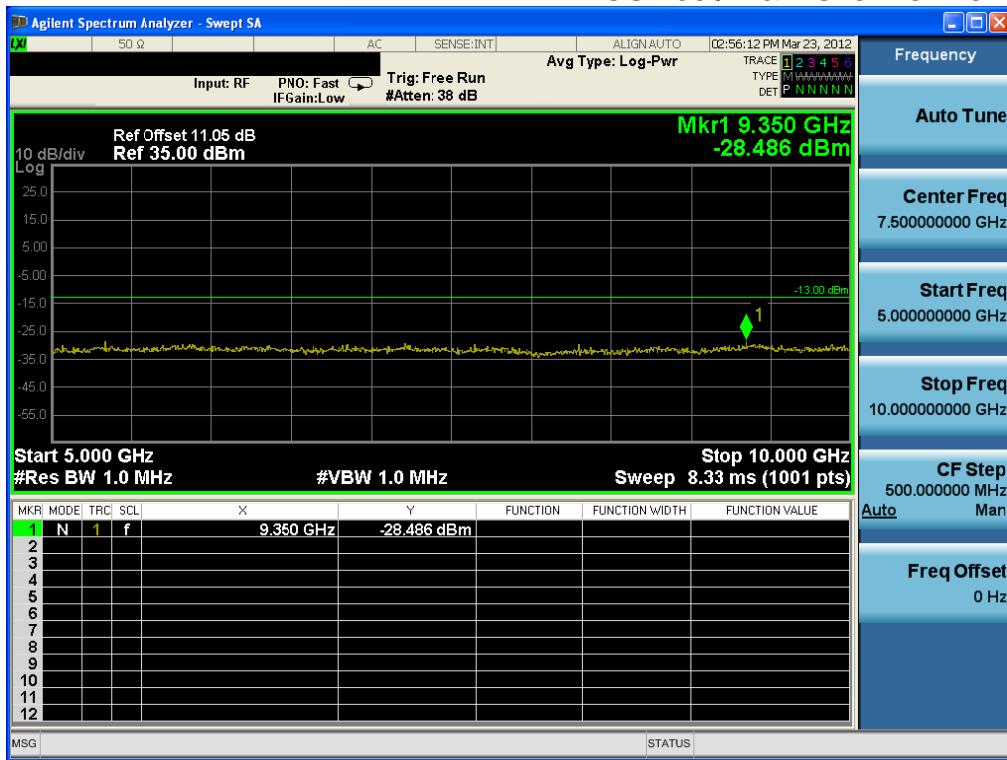


WCDMA850 & Channel: 4132

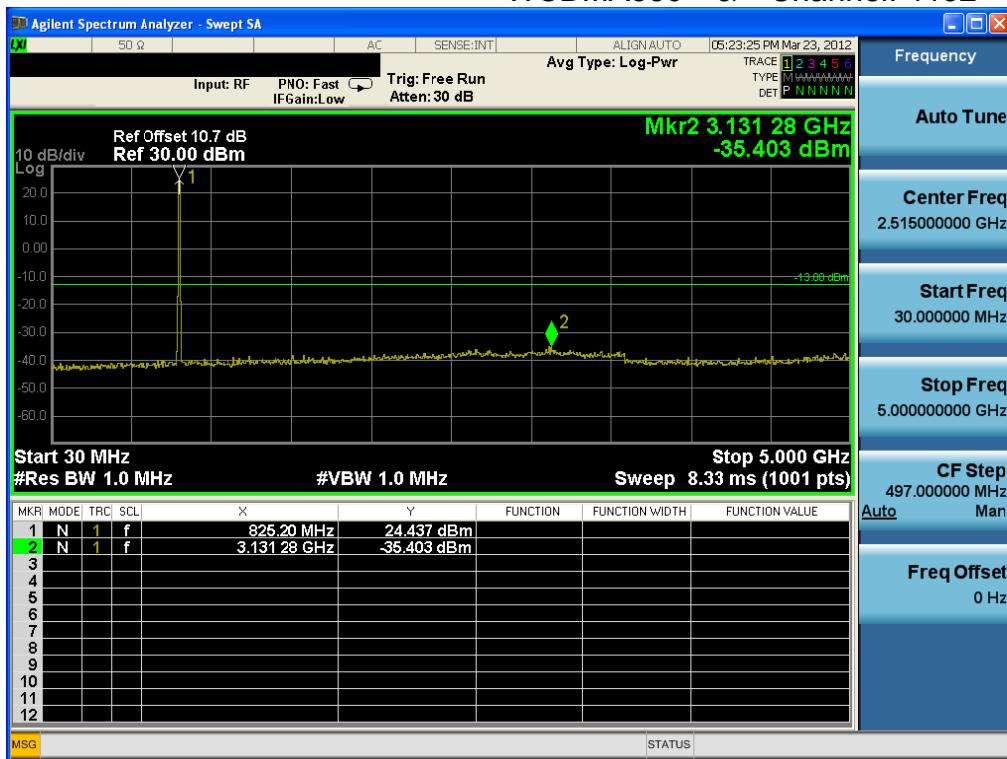


WCDMA850 & Channel: 4132

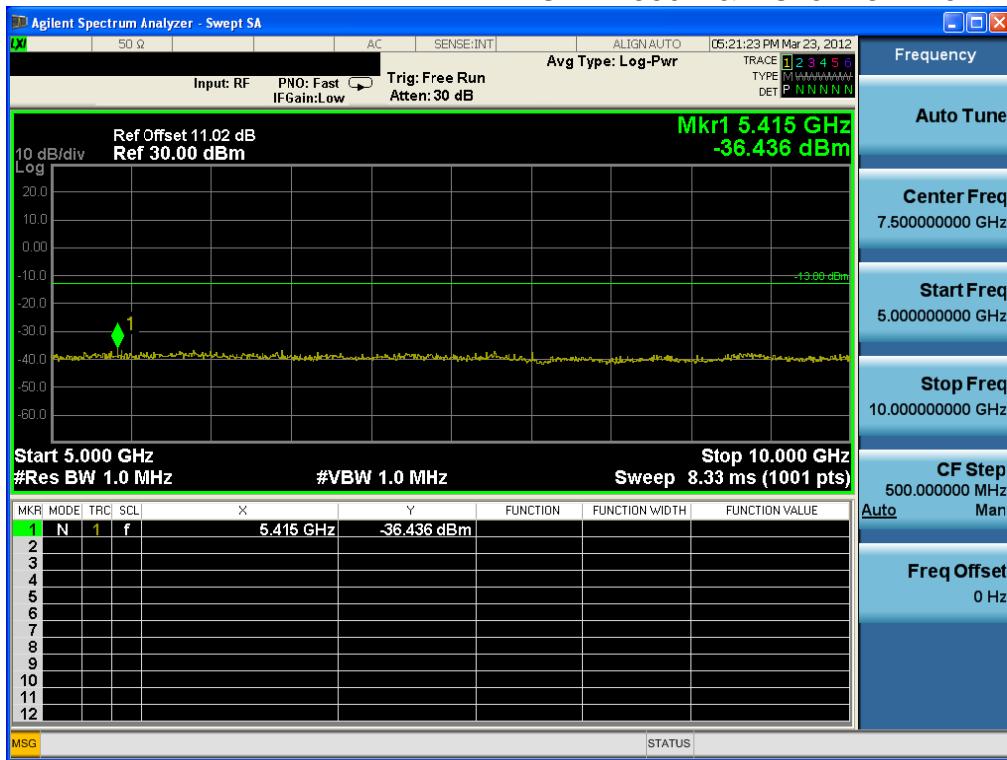


WCDMA850 & Channel: 4183

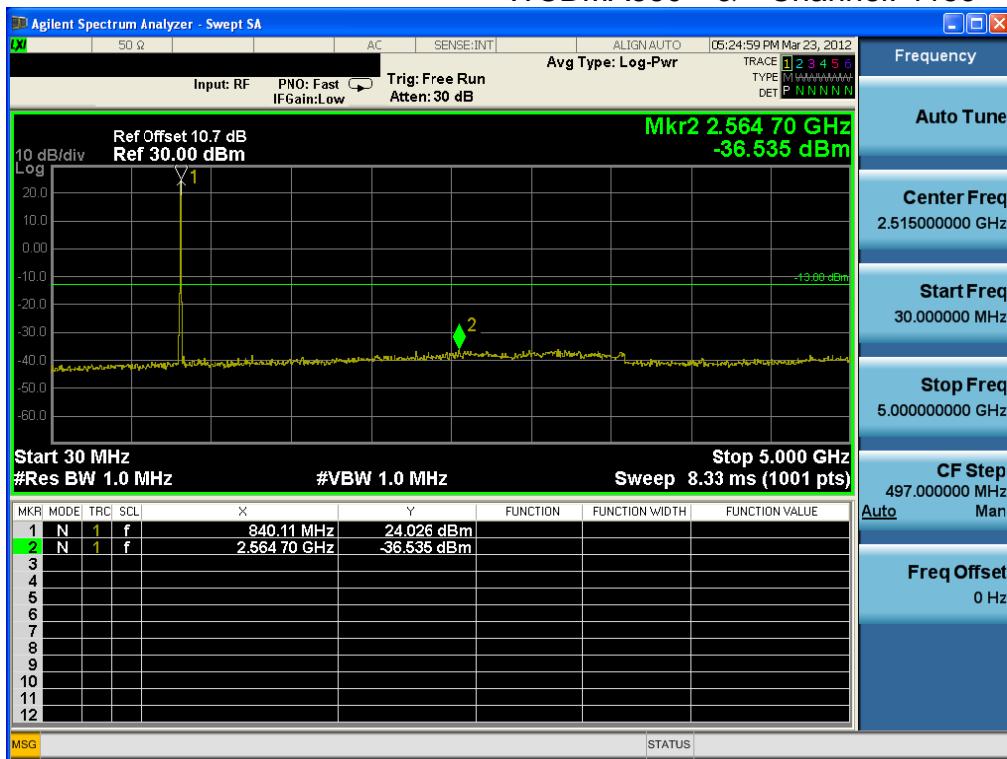


WCDMA850 & Channel: 4183

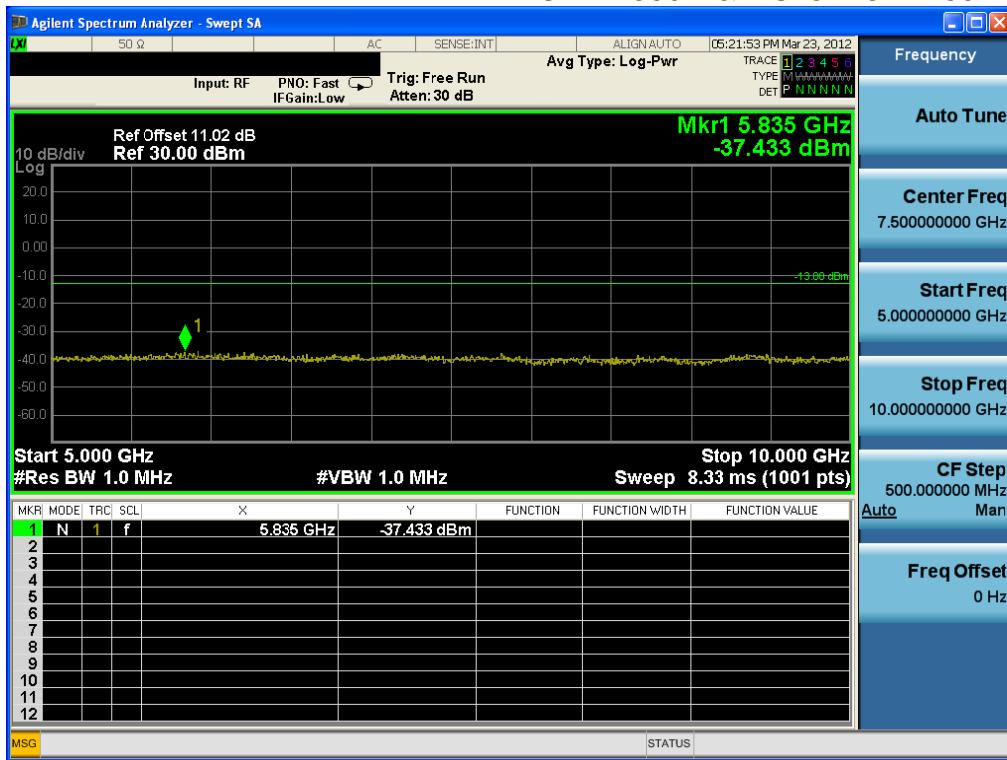


WCDMA850 & Channel: 4233

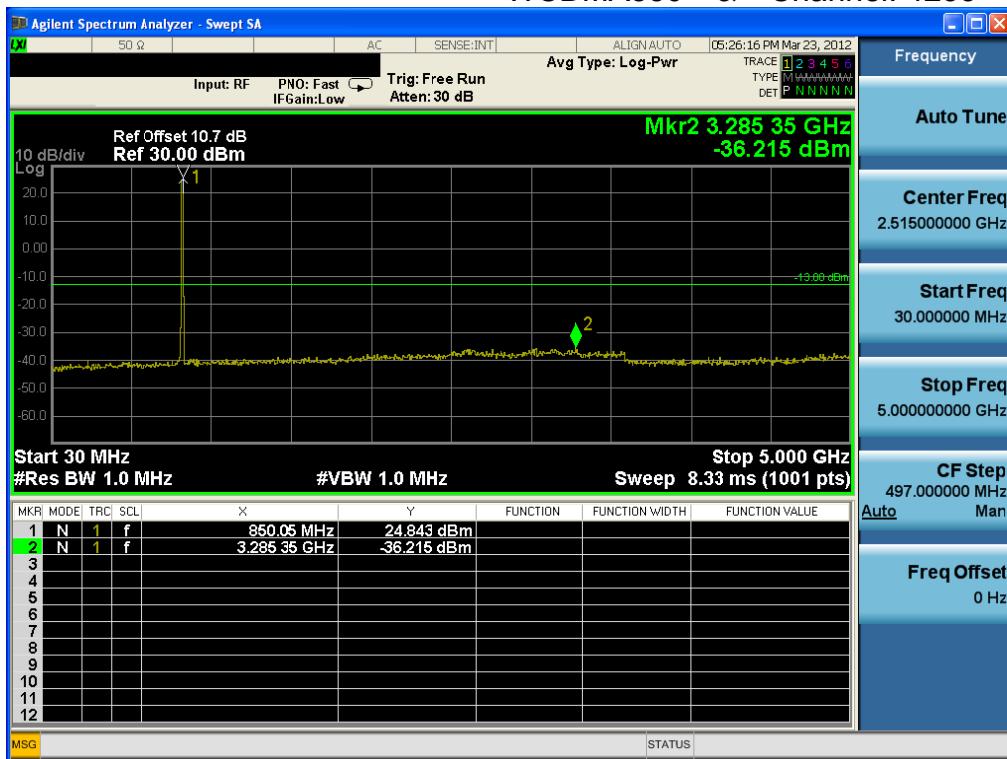


WCDMA850 & Channel: 4233

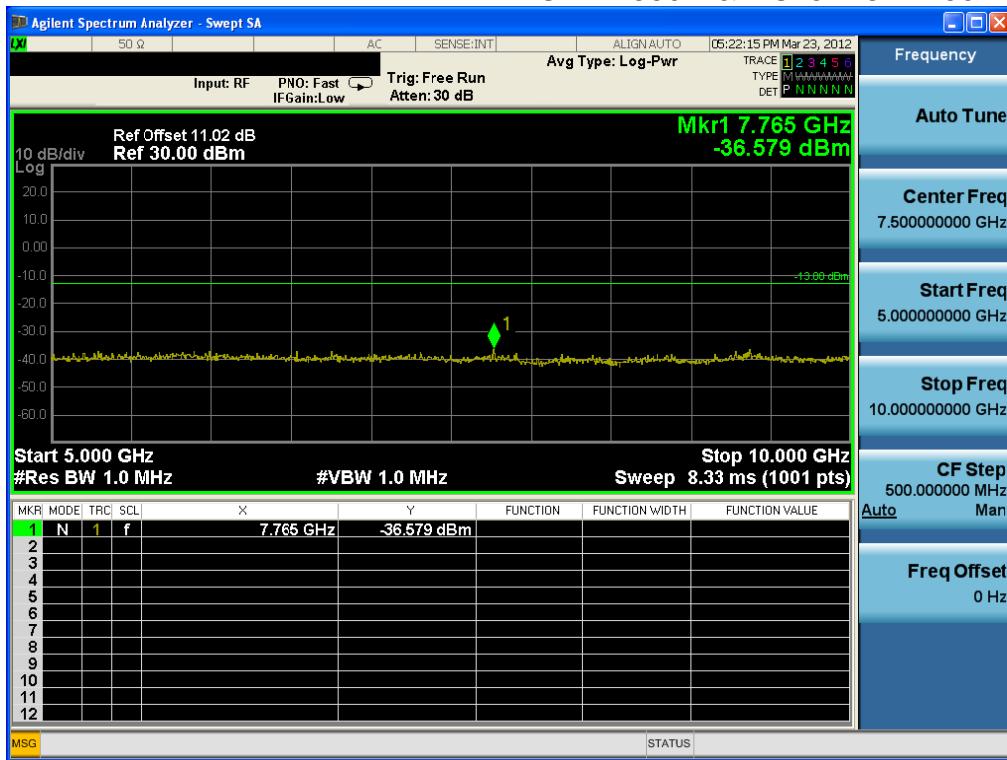


PCS1900 & Channel: 512

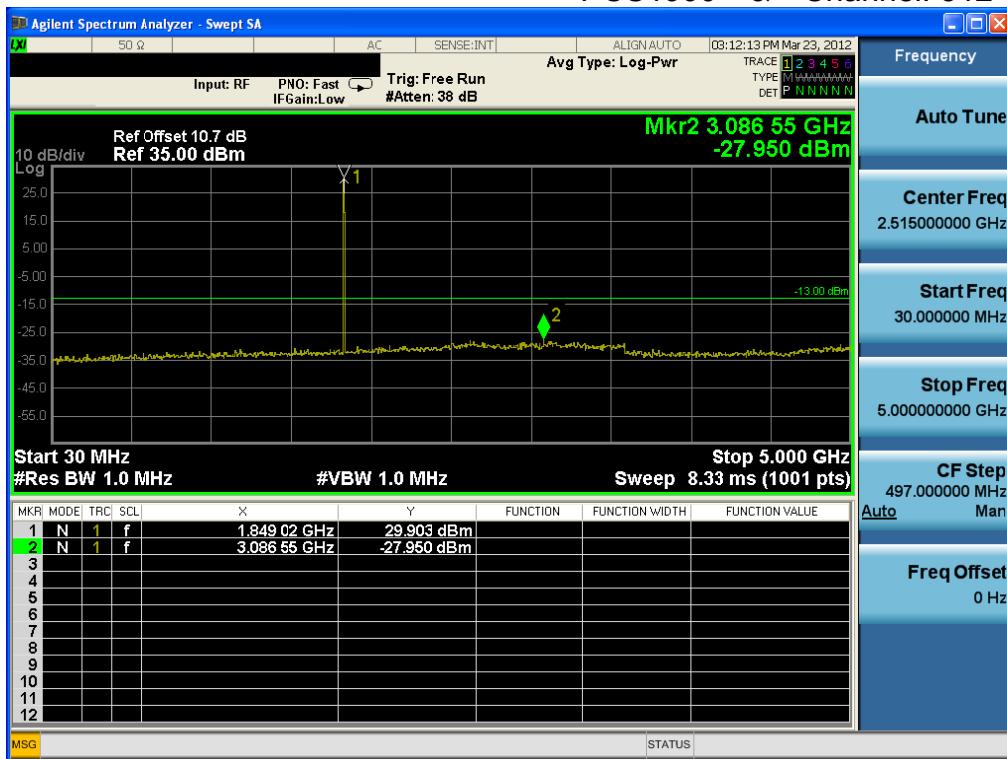


PCS1900 & Channel: 512

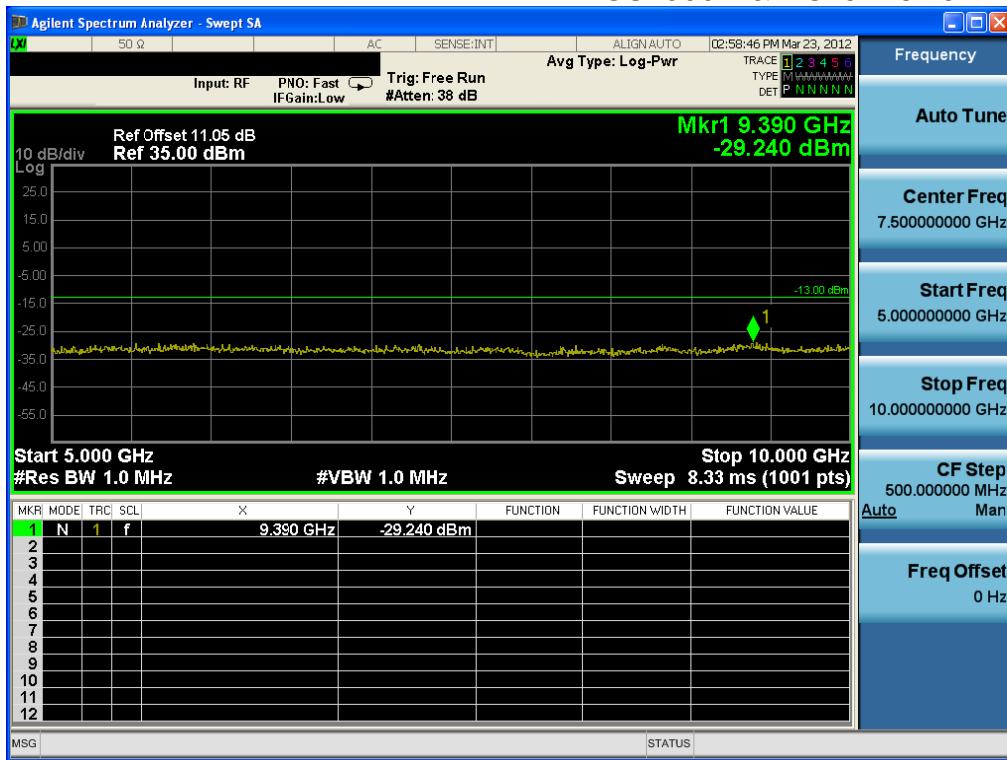


PCS1900 & Channel: 512

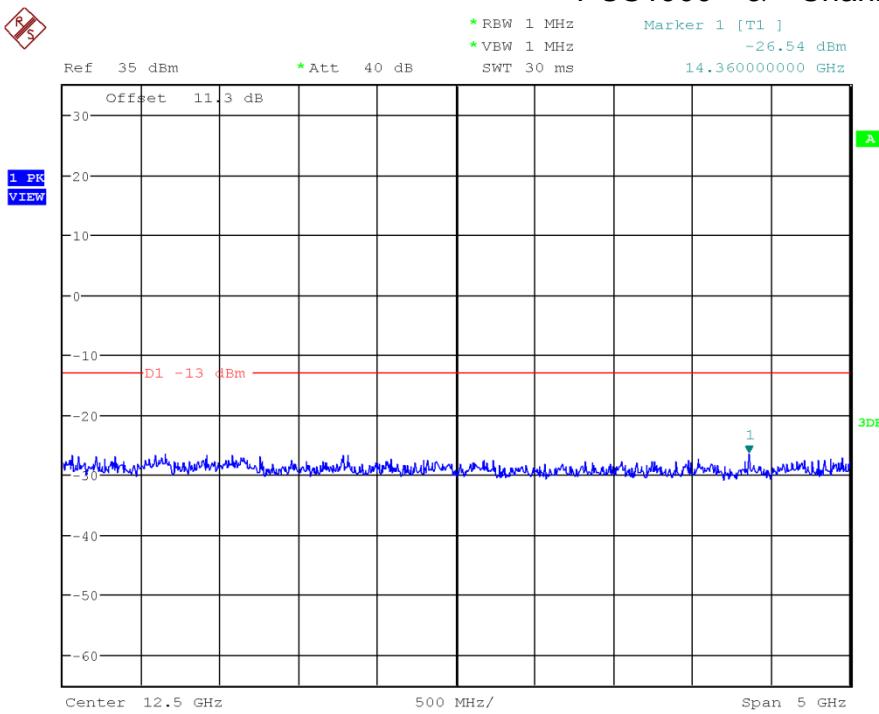


PCS1900 & Channel: 512

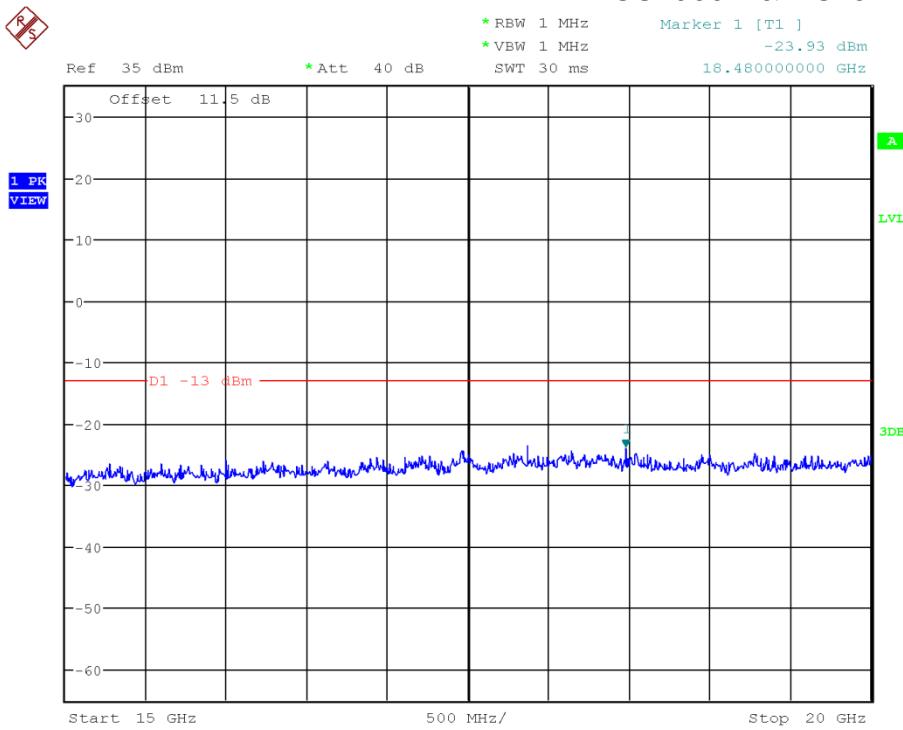


PCS1900 & Channel: 661

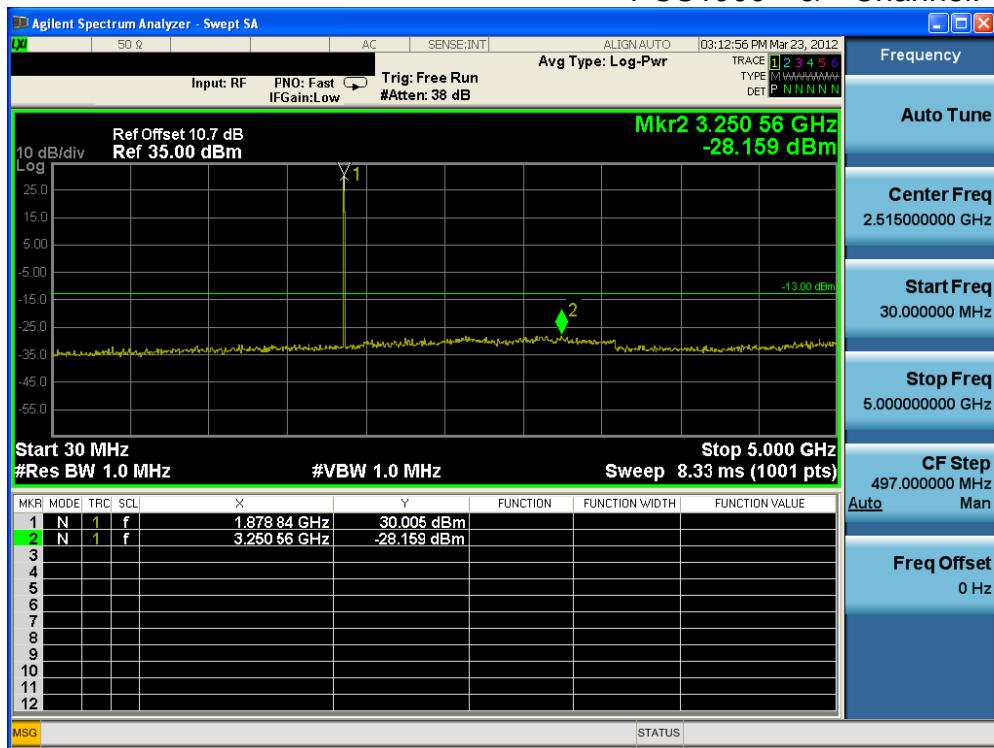


PCS1900 & Channel: 661

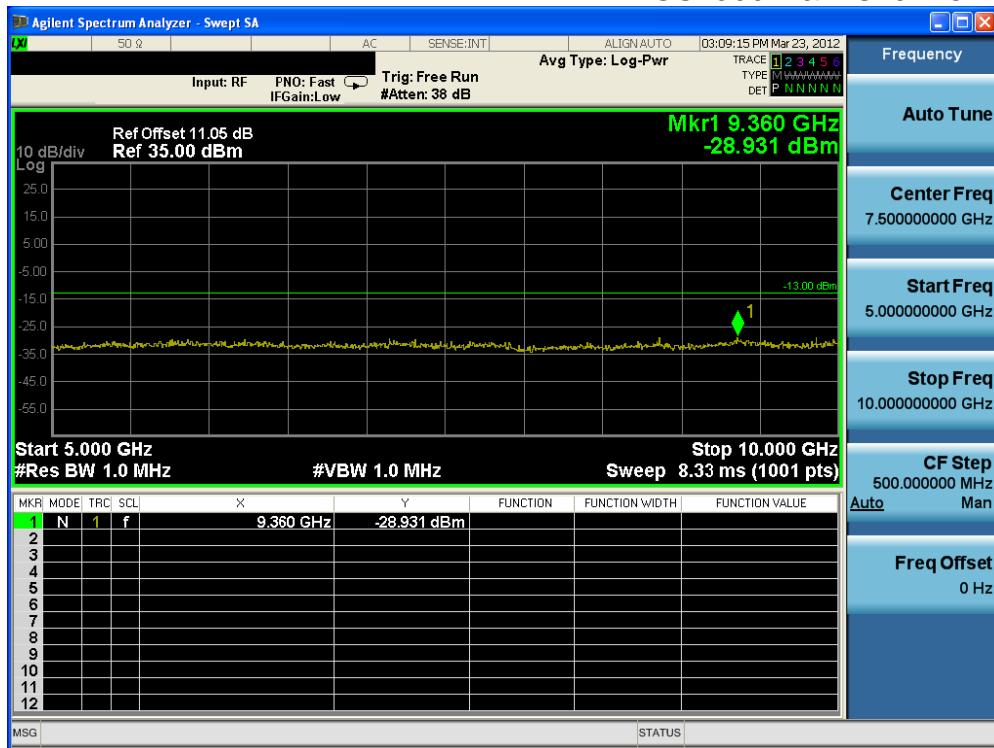


PCS1900 & Channel: 661

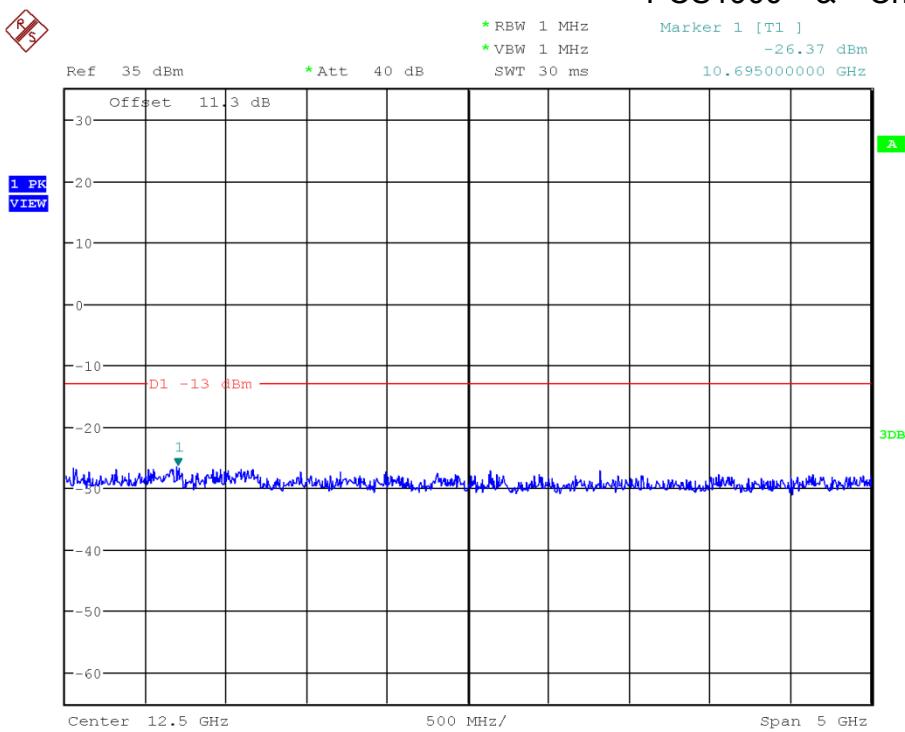


PCS1900 & Channel: 661

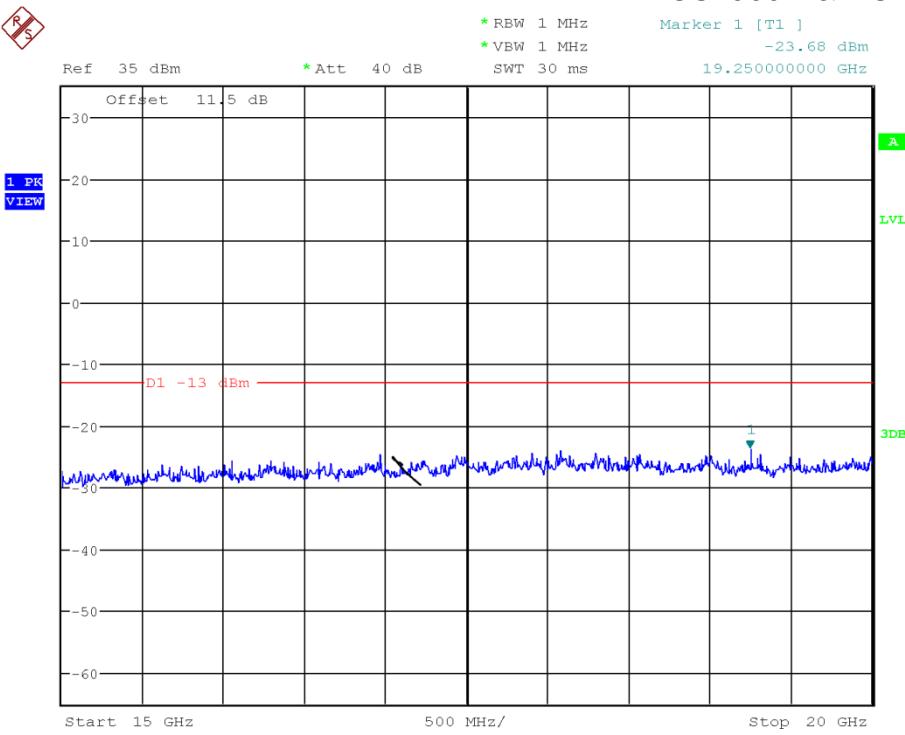


PCS1900 & Channel: 810

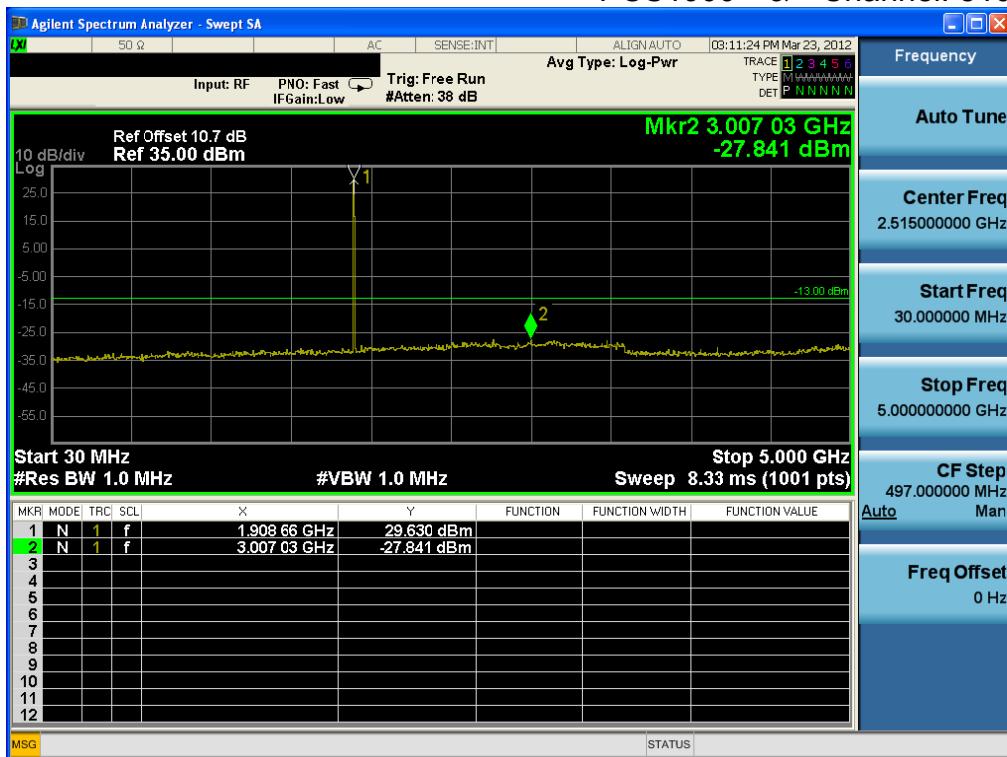


PCS1900 & Channel: 810

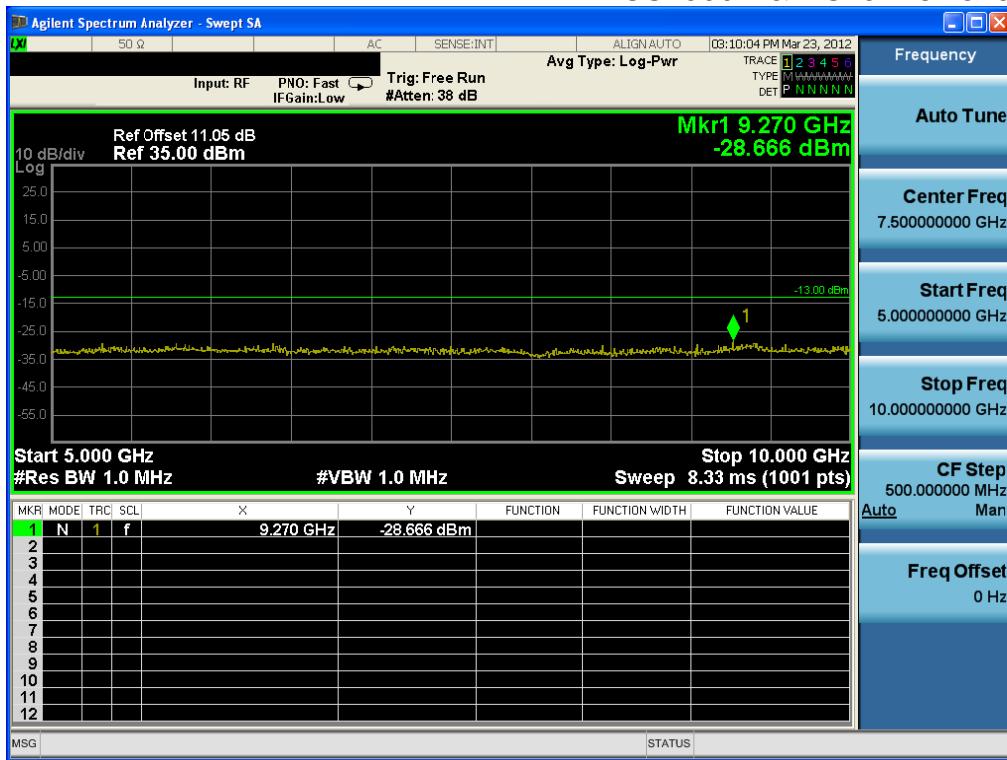


PCS1900 & Channel: 810

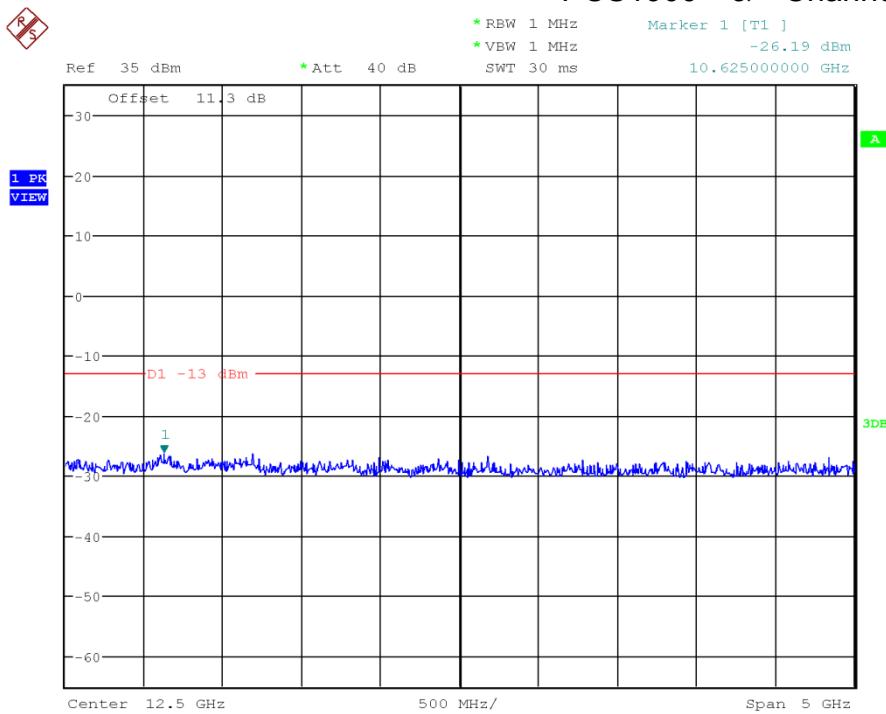


PCS1900 & Channel: 810

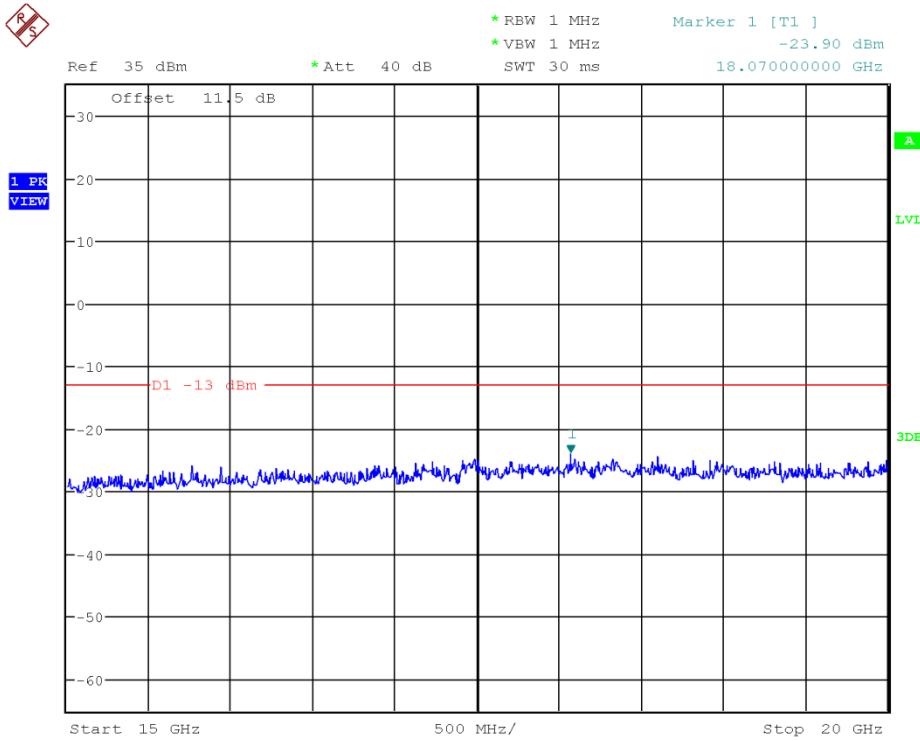


WCDMA1900 & Channel: 9262

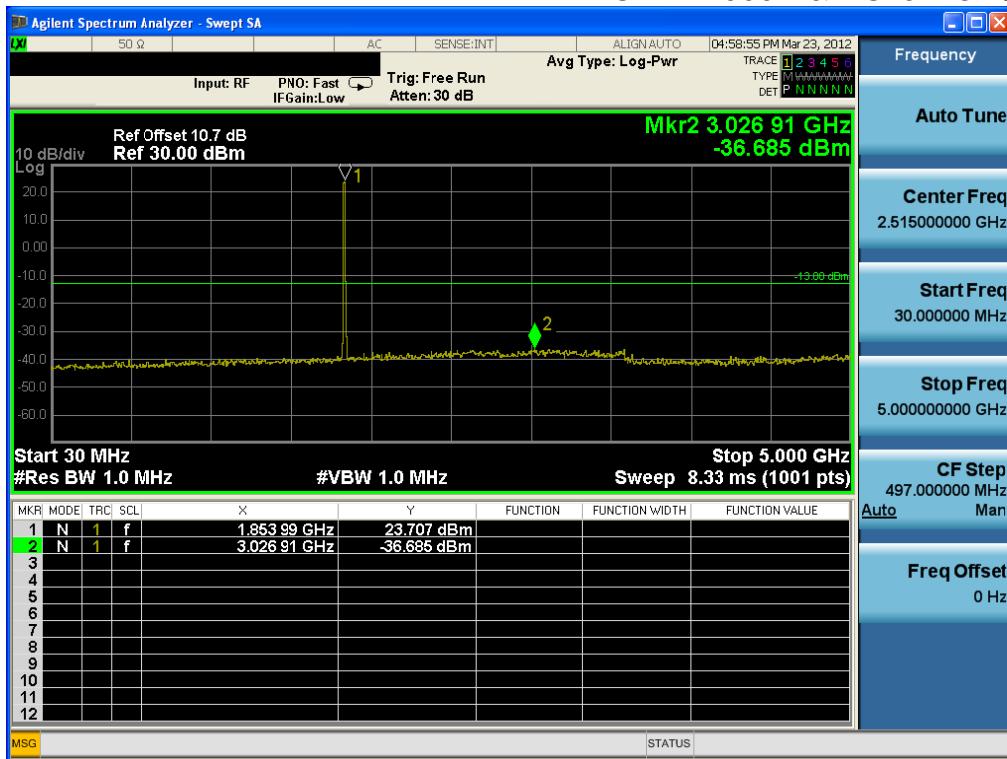


WCDMA1900 & Channel: 9262

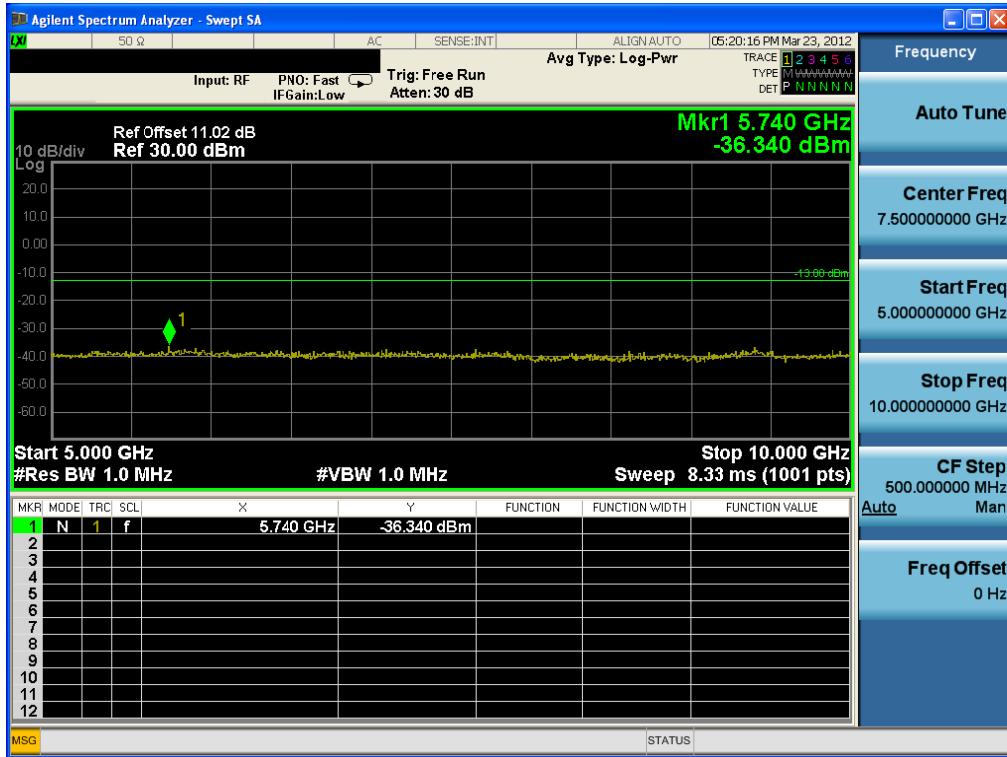


WCDMA1900 & Channel: 9262

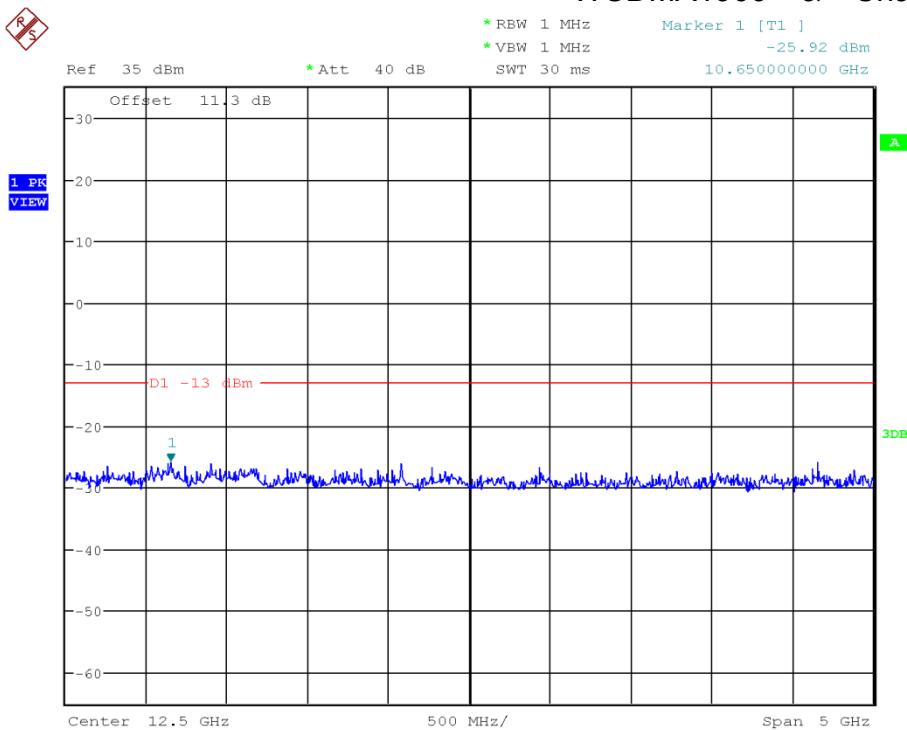


WCDMA1900 & Channel: 9262

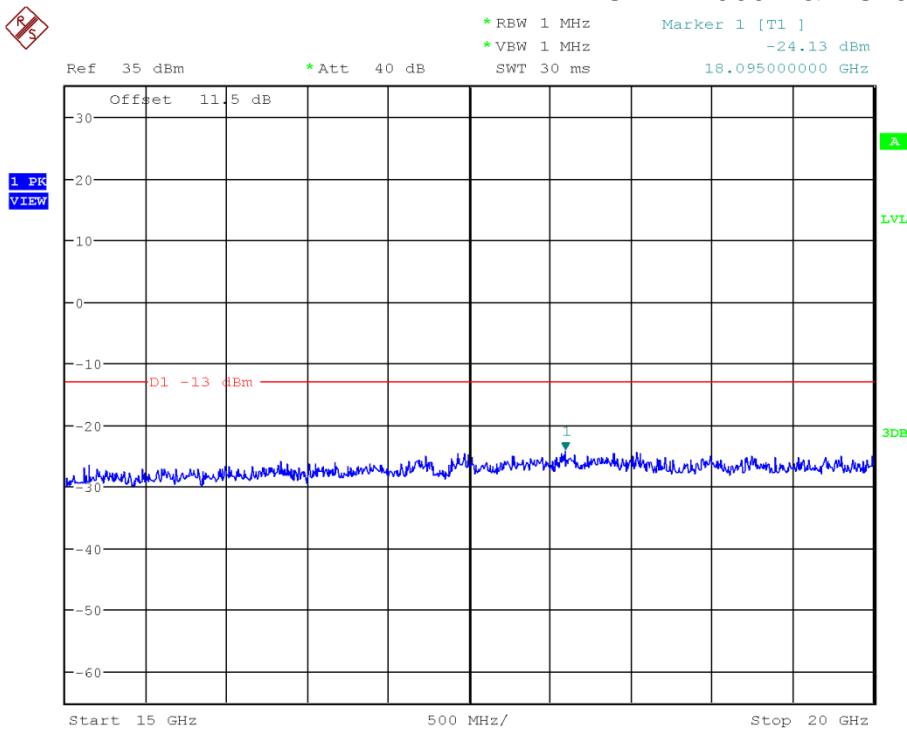


WCDMA1900 & Channel: 9400

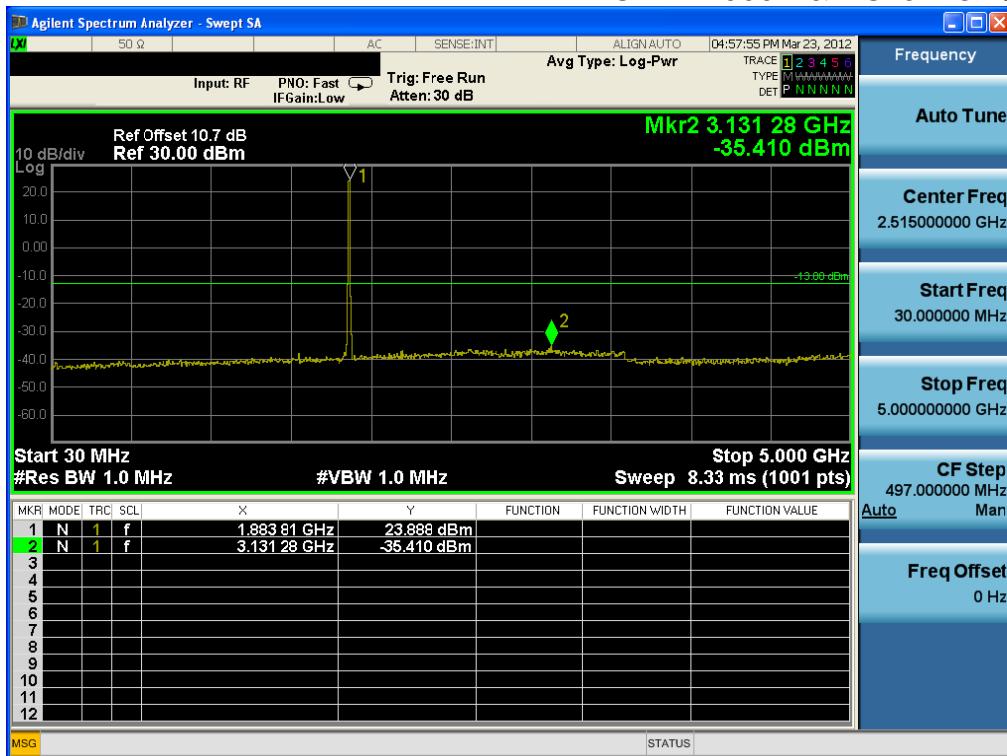


WCDMA1900 & Channel: 9400

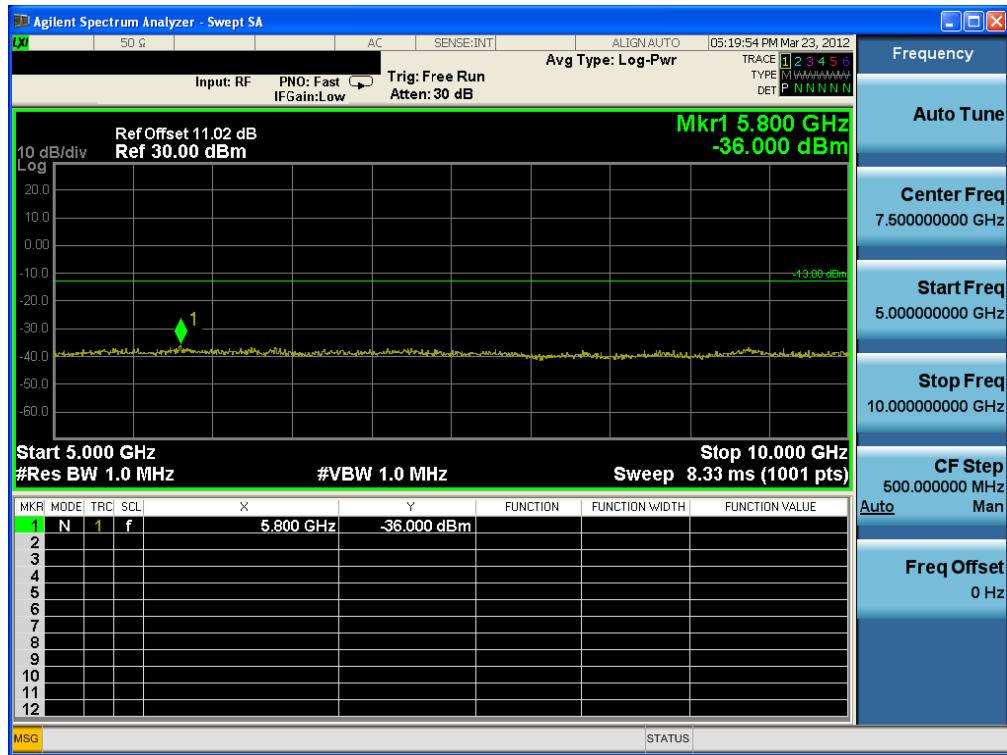


WCDMA1900 & Channel: 9400

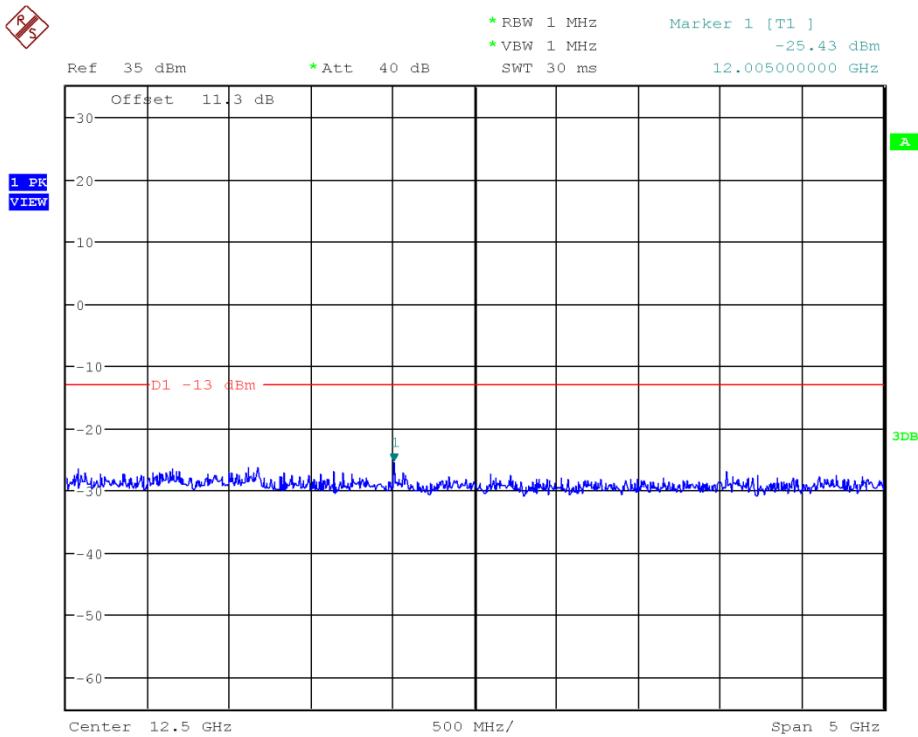


WCDMA1900 & Channel: 9400

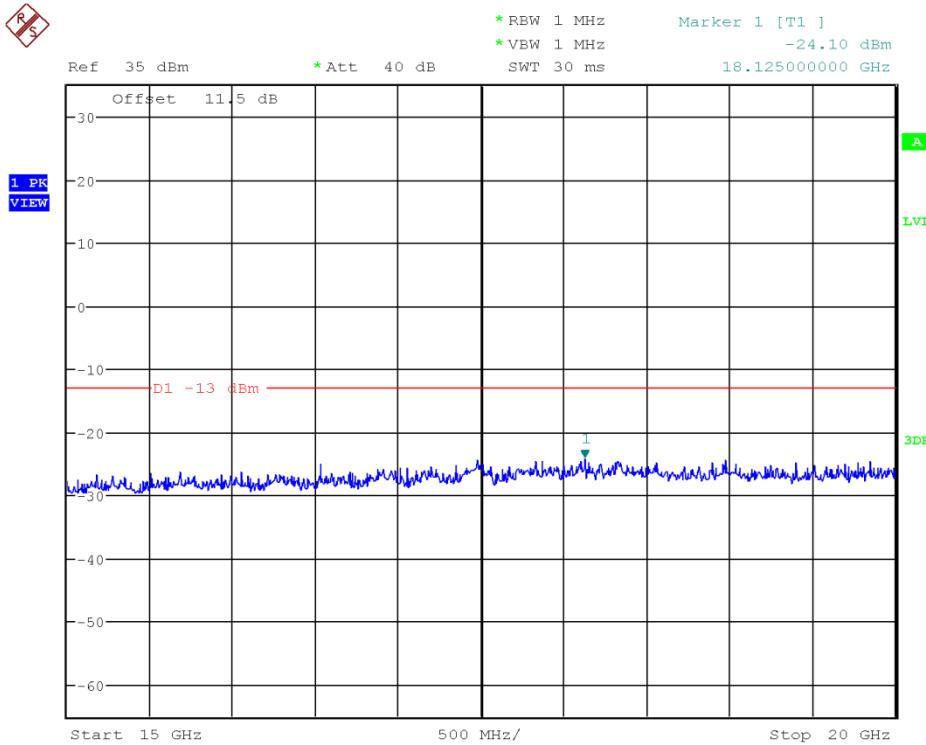


WCDMA1900 & Channel: 9538

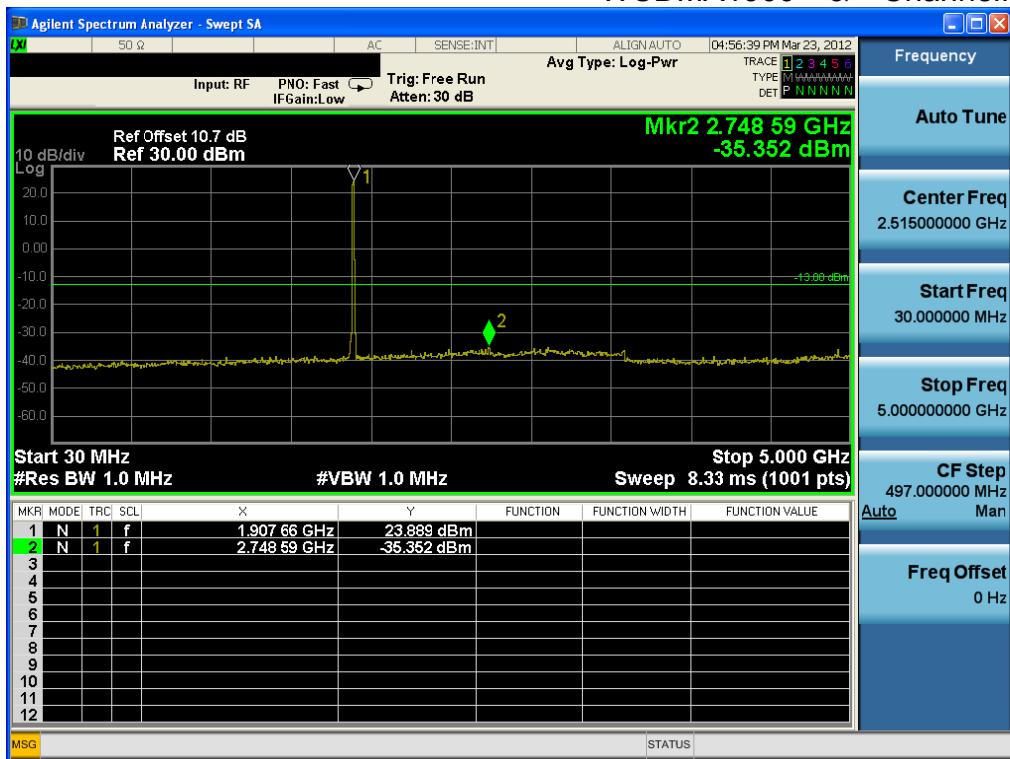


WCDMA1900 & Channel: 9538

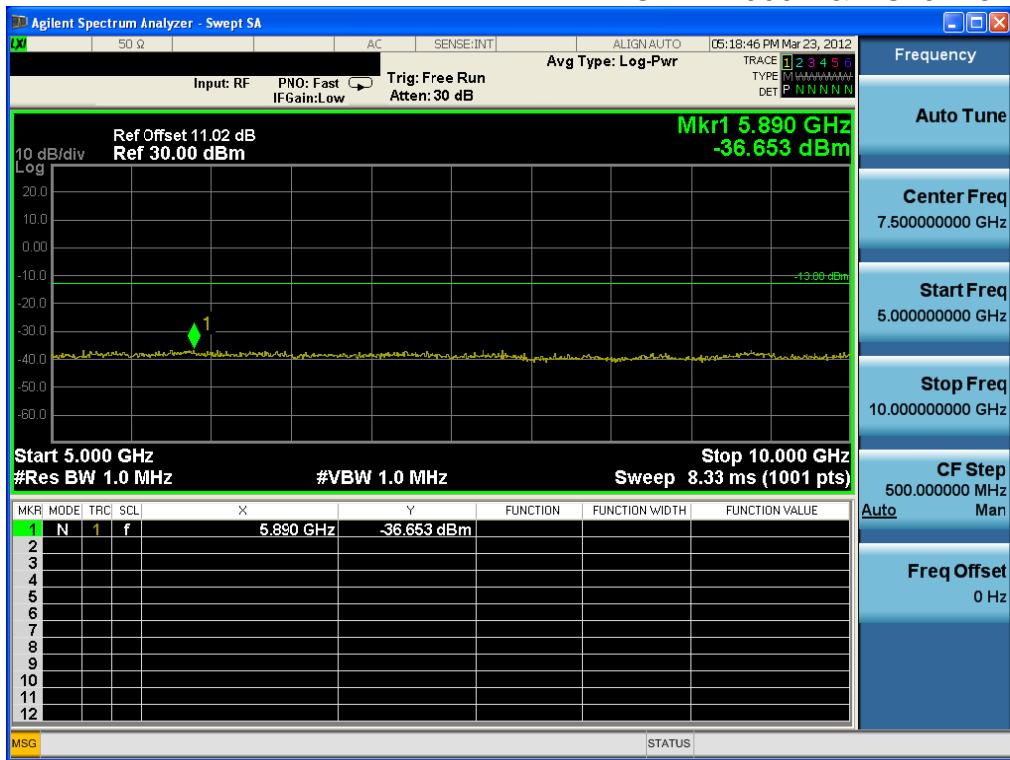

WCDMA1900 & Channel: 9538

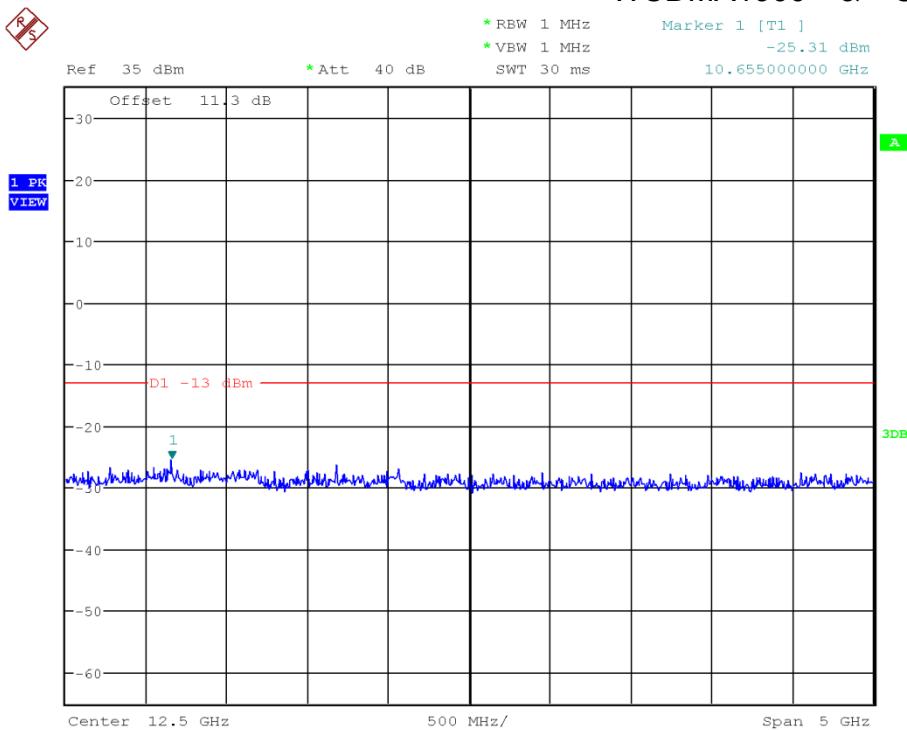

WCDMA1900 & Channel: 9538

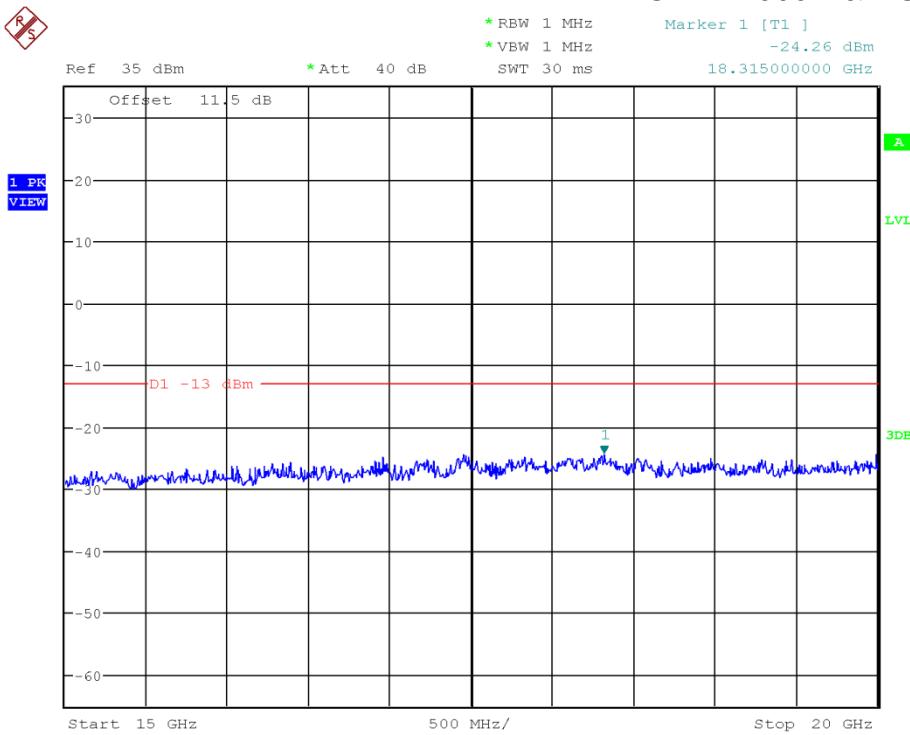


8.4 Band Edge


GSM850 & Channel: 128



GSM850 & Channel: 251

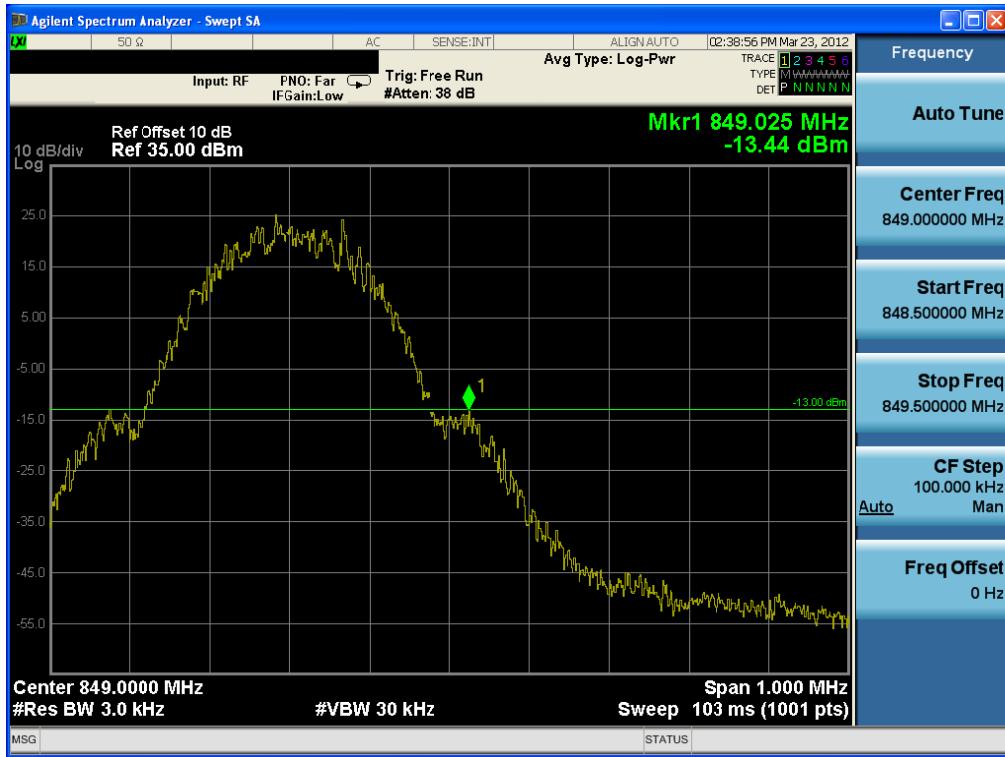

WCDMA850 & Channel: 4132

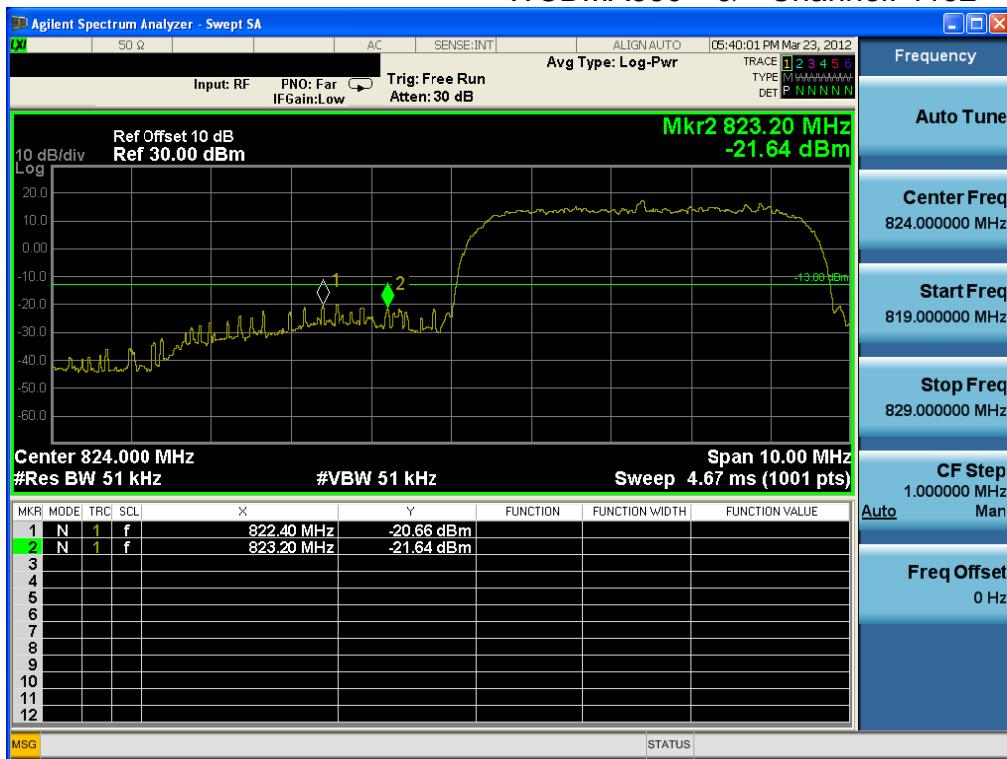

WCDMA850 & Channel: 4132



WCDMA850 & Channel: 4233




WCDMA850 & Channel: 4233



PCS1900 & Channel: 512




PCS1900 & Channel: 810

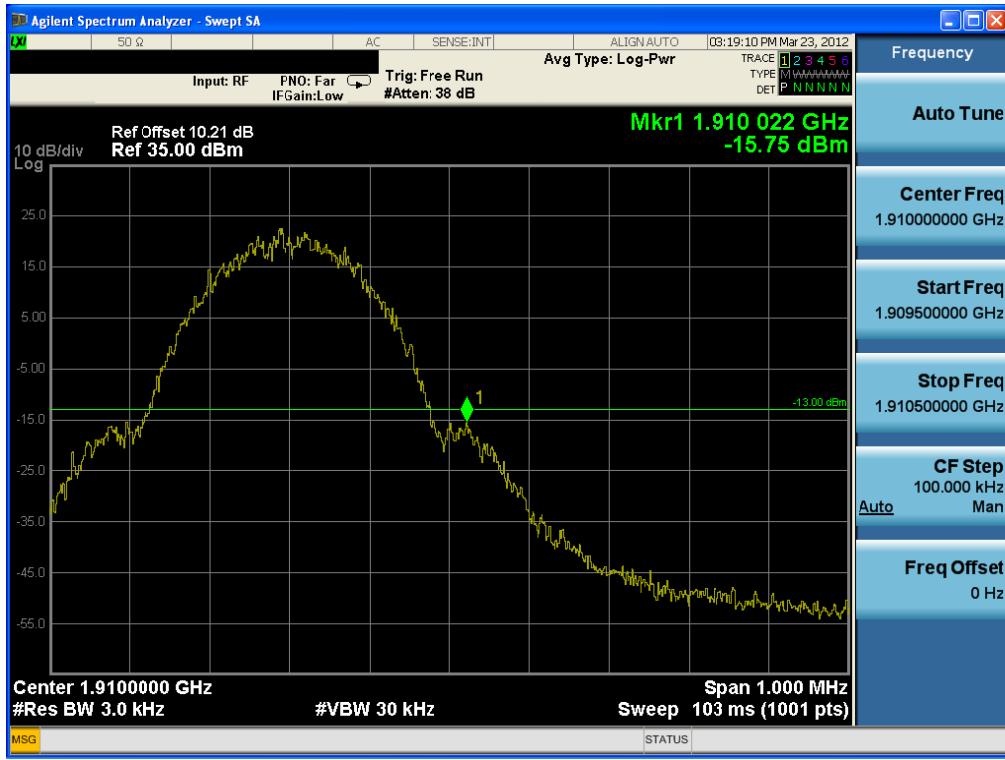

WCDMA1900 & Channel: 9262



WCDMA1900 & Channel: 9262

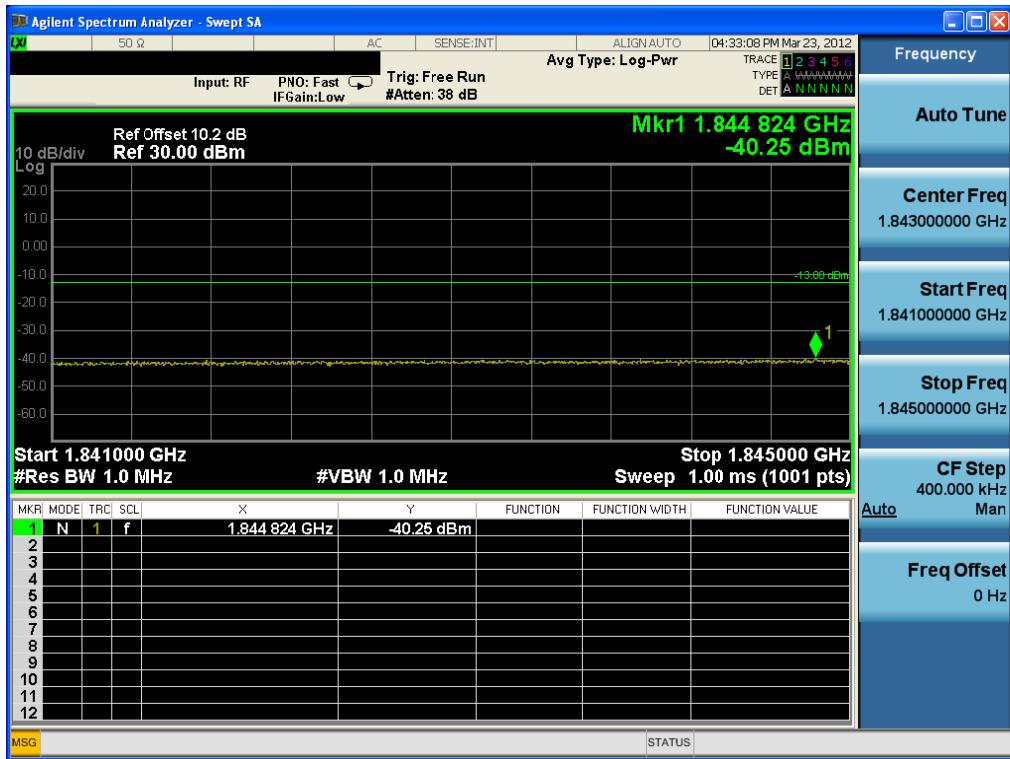

WCDMA1900 & Channel: 9538



WCDMA1900 & Channel: 9538

