

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1710-0229

2. Customer

• Name : BLUEBIRD INC.

• Address (FCC) : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul South Korea

Address (IC) : (Dogok-dong, SEI Tower13,14)39, Eonjuro30-gil, Gangnam-gu Seoul 06292
Korea (Republic Of)

3. Use of Report : FCC & IC Original Grant

4. Product Name / Model Name : Printer intergrated Tablet / PT550

FCC ID : SS4PT550 / IC : 22515-PT550


5. Test Method Used : KDB971168 D01v02r02, ANSI/TIA-603-E-2016

Test Specification : §2, §22(H), §24(E)

6. Date of Test : 2017.06.26 ~ 2017.08.29

7. Testing Environment : Refer to appended test report.

8. Test Result : Refer to attached test result.

Affirmation	Tested by	Technical Manager
	Name : JaeHyeok Bang 	Name : GeunKi Son  (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 10 . 26 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1710-0229	Oct. 26, 2017	Initial issue

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION	5
2.2. EUT CAPABILITIES.....	5
2.3. TESTING ENVIRONMENT	5
2.4. MEASURING INSTRUMENT CALIBRATION	5
2.5. MEASUREMENT UNCERTAINTY	5
2.6. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	6
3.2 PEAK TO AVERAGE RATIO	8
3.3 OCCUPIED BANDWIDTH.	10
3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL.	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.6 RADIATED SPURIOUS EMISSIONS	13
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	14
4. LIST OF TEST EQUIPMENT	15
5. SUMMARY OF TEST RESULTS.....	16
6. EMISSION DESIGNATOR AND SAMPLE CALCULATION....	17
7. TEST DATA	19
7.1 Conducted OUTPUT POWER	19
7.2 PEAK TO AVERAGE RATIO	21
7.3 OCCUPIED BANDWIDTH	21
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	21
7.5 BAND EDGE	21
7.6 EFFECTIVE RADIATED POWER.....	22
7.7 EQUIVALENT ISOTROPIC RADIATED POWER.....	23
7.8 RADIATED SPURIOUS EMISSIONS	24
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	30
7.9.1 FREQUENCY STABILITY (GPRS850)	30
7.9.2 FREQUENCY STABILITY (WCDMA850)	31
7.9.3 FREQUENCY STABILITY (GPRS1900)	32
7.9.4 FREQUENCY STABILITY (WCDMA1900)	33
8. TEST PLOTS	34
8.1 Peak to Average Ratio	34
8.2 Occupied Bandwidth (99 % Bandwidth).....	37
8.3 Spurious Emissions at Antenna Terminal.....	53
8.4 Band Edge	68

1. GENERAL INFORMATION

Applicant Name : BLUEBIRD INC.
Address (FCC) : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul South Korea
Address (IC) : (Dogok-dong, SEI Tower13,14)39, Eonjuro30-gil, Gangnam-gu Seoul 06292 Korea (Republic Of)
FCC ID : SS4PT550
IC : 22515-PT550
FCC Classification : PCS Licensed Transmitter (PCB)
EUT : Printer intergrated Tablet
Model Name : PT550
Add Model Name : NA
Supplying power : DC 9.0 V
Hardware version : Rev0.2
Software version : R 1.0
Antenna Type : Built-in type

Mode	Tx Frequency (MHz)	Emission Designator	ERP (Max. Power)		EIRP (Max. Power)	
			dBm	W	dBm	W
GPRS850	824.2 ~ 848.8	275KGXW	31.18	1.312	33.33	2.153
EDGE850	824.2 ~ 848.8	249KG7W	28.92	0.780	31.07	1.279
WCDMA850	826.4 ~ 846.6	4M16F9W	19.96	0.099	22.11	0.163
HSUPA850	826.4 ~ 846.6	4M15F9W	18.79	0.076	20.94	0.124
GPRS1900	1850.2 ~ 1909.8	249KGXW	-	-	29.66	0.925
EDGE1900	1850.2 ~ 1909.8	246KG7W	-	-	29.78	0.951
WCDMA1900	1852.4 ~ 1907.6	4M19F9W	-	-	27.26	0.532
HSUPA1900	1852.4 ~ 1907.6	4M20F9W	-	-	26.84	0.483

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports GPRS/WCDMA/LTE Phone with Bluetooth, WLAN.

2.2. EUT CAPABILITIES

This ETU contains the following capabilities:

850/1900 GPRS/EDGE, 850/1900 WCDMA/HSUPA, Multi-band LTE, 802.11b/g/n WLAN(2.4GHz), Bluetooth(BDR, EDR, LE)

2.3. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +25 °C
▪ Relative Humidity	41 % ~ 45 %

2.4. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
<i>Radiated Disturbance (Below 1 GHz)</i>	± 5.1 dB (The confidence level is about 95 %, $k = 2$)
<i>Radiated Disturbance (1 GHz ~ 18 GHz)</i>	± 5.4 dB (The confidence level is about 95 %, $k = 2$)
<i>Radiated Disturbance (Above 18 GHz)</i>	± 5.3 dB (The confidence level is about 95 %, $k = 2$)


2.6. TEST FACILITY

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The site is constructed in conformance with the requirements.		
- FCC MRA Accredited Test Firm No. : KR0034		
- IC Test site No. : 5740A-3		
www.dtnet.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

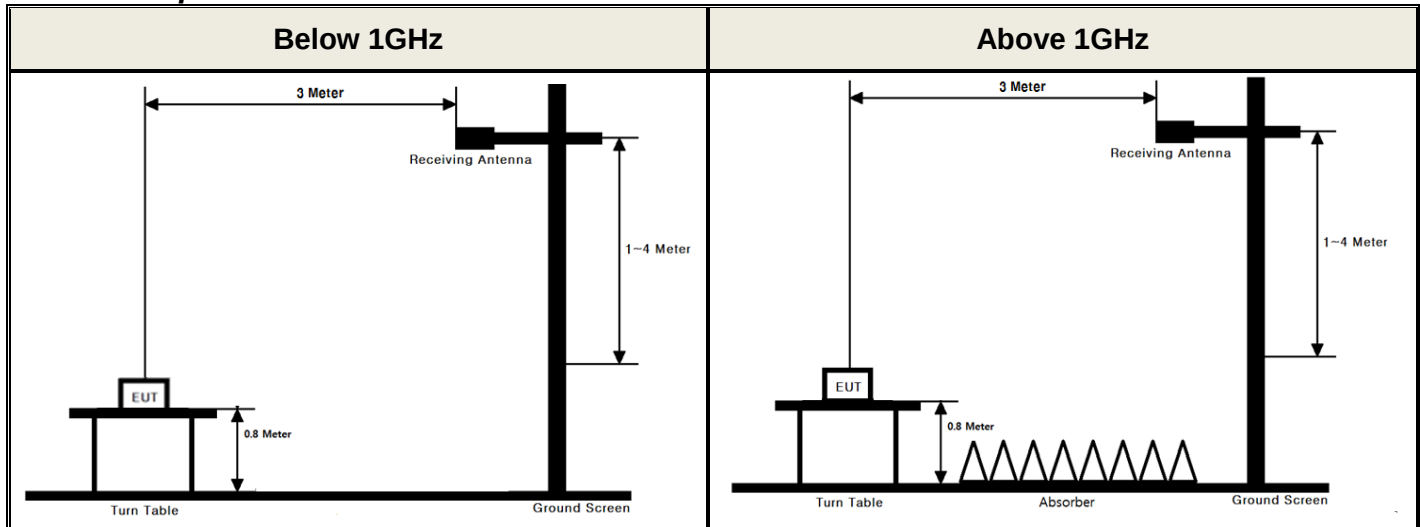

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v02r02 - Section 5.2.1

Test setting

1. Set span to at least 1.5 times the OBW.
 2. Set RBW = 1-5 % of the OBW, not to exceed 1 MHz.
 3. Set VBW $\geq 3 \times$ RBW.
 4. Set number of points in sweep $\geq 2 \times$ span / RBW.
 5. Sweep time = auto couple.
 6. Detector = RMS (power averaging).
 7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle ≥ 98 %), then set the trigger to free run.
 8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle < 98 %), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep.
- Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
 10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For measurements above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 PEAK TO AVERAGE RATIO

Test set-up

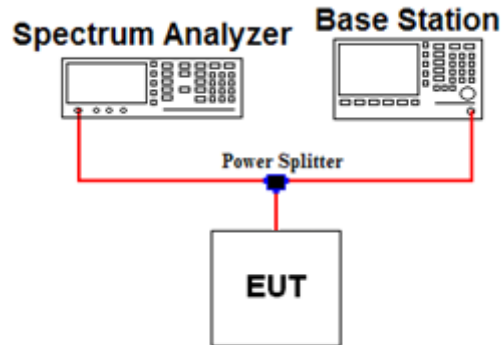

Test Procedure

- KDB971168 D01v02r02 - Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.

Test setting

The spectrum Analyzer`s CCDF measurement function is enabled.

1. Set resolution/measurement bandwidth $\geq$ signal`s occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %

■ Alternate Procedure

- KDB971168 D01v02r02 - Section 5.7.2

Use one of the measurement procedures of the peak power and record as P_{Pk} .

Use one of the measurement procedures of the average power and record as P_{Avg} .

Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

- Peak Power Measurement


1. Set the RBW $\geq$ OBW
2. Set VBW $\geq 3 \times$ RBW
3. Set span $\geq 2 \times$ RBW
4. Sweep time = auto couple
5. Detector = peak
6. Ensure that the number of measurement points $\geq$ span/RBW.
7. Trace mode = max hold
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the peak amplitude level.

- Average Power Measurement

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time = auto-couple.
6. Detector = RMS (power averaging).
7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep.
Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

3.3 OCCUPIED BANDWIDTH.

Test set-up

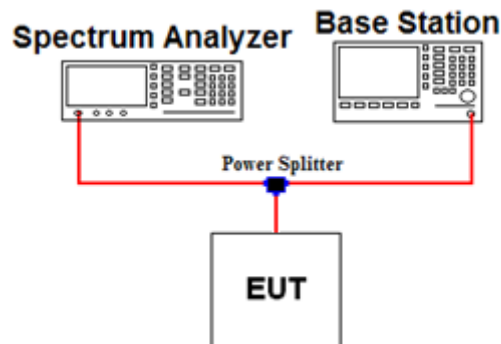

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
824.2	6.34	1850.2	6.38
826.4	6.34	1852.4	6.38
836.6	6.31	1880.0	6.51
846.6	6.33	1907.6	6.58
848.8	6.29	1909.8	6.59
-	-	-	-

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.

Test Procedure

- KDB971168 D01v02r02 - Section 4.2


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 \sim 5 \%$ of the expected OBW & $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL.

Test set-up

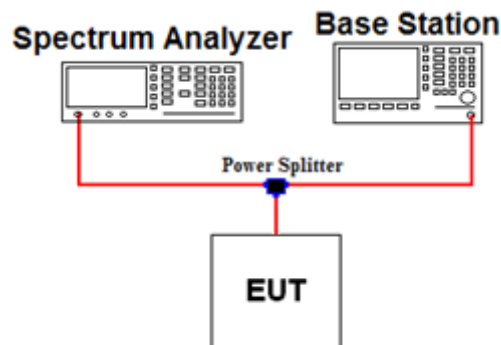

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
823.0	6.33	1849.0	6.39
824.0	6.34	1850.0	6.37
849.0	6.28	1910.0	6.59
850.0	6.28	1911.0	6.59
-	-	-	-

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.

Test Procedure

- KDB971168 D01v02r02 - Section 6

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all modulations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, where P is the transmitter power in Watts.

Test setting


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1 % of the emission
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point $\geq 2 \times$ span / RBW
8. The trace was allowed to stabilize

Note 1: In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of **at least one percent** of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

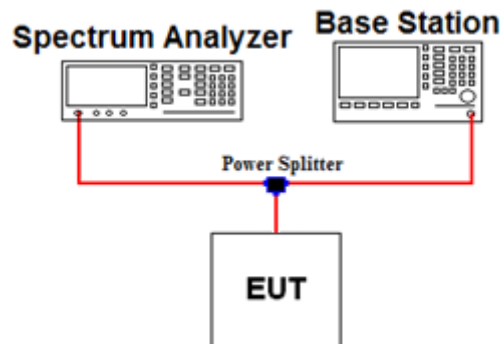

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
10000.0	6.92	20000.0	7.16
-	-	-	-

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.

Test Procedure

- KDB971168 D01v02r02 - Section 6

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB , where P is the transmitter power in Watts.


Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24.

3.6 RADIATED SPURIOUS EMISSIONS

Test Set-up

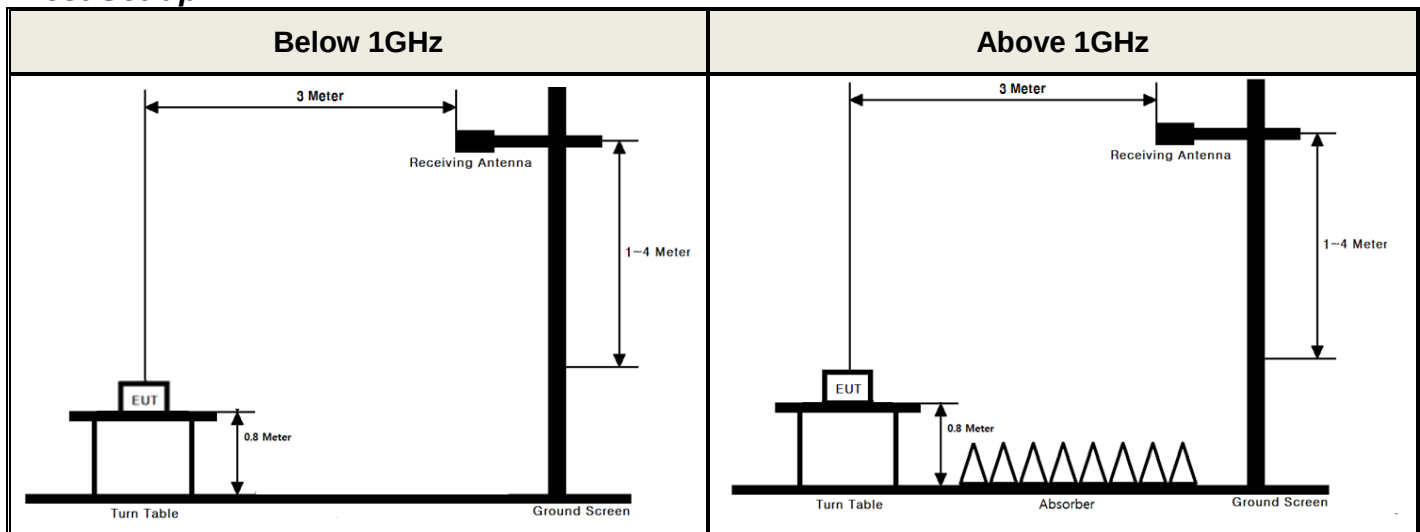

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v02r02 - Section 5.8

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated spurious emission measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated spurious emission measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

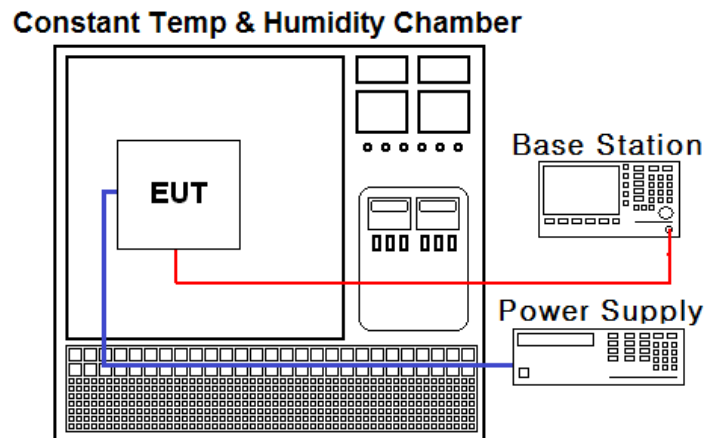

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v02r02 - Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from - 30 °C to + 50 °C in 10 °C increments using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	16/10/11	17/10/11	MY46471251
Spectrum Analyzer	Agilent Technologies	N9020A	17/01/11	18/01/11	MY50200828
DC Power Supply	Agilent Technologies	66332A	16/09/08	17/09/08	GB42110550
Multimeter	FLUKE	17B	17/04/12	18/04/12	26030065WS
Power Splitter	Anritsu	K241B	17/01/11	18/01/11	016681
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	17/01/25	18/01/25	SJ-TH-S50120203
Thermohygrometer	BODYCOM	BJ5478	17/04/11	18/04/11	120612-1
Radio Communication Analyzer	Agilent Technologies	E5515C	16/09/09	17/09/09	GB41321164
Signal Generator	R&S	SMBV100A	17/01/04	18/01/04	255571
Signal Generator	R&S	SMF100A	17/04/21	18/04/21	102341
Loop Antenna	Schwarzbeck	FMZB1513	16/04/22	18/04/22	1513-128
Bilog Antenna	Schwarzbeck	VULB9160	16/11/11	18/11/11	3151
Dipole Antenna	Schwarzbeck	VHA9103	17/03/14	19/03/14	2116
Dipole Antenna	Schwarzbeck	VHA9103	16/04/15	18/04/15	2117
Dipole Antenna	Schwarzbeck	UHA9105	17/03/14	19/03/14	2261
Dipole Antenna	Schwarzbeck	UHA9105	16/04/15	18/04/15	2262
HORN ANT	ETS-LINDGREN	3117	16/02/26	18/02/26	00152145
HORN ANT	ETS-LINDGREN	3117	16/05/03	18/05/03	00140394
HORN ANT	A.H.Systems	SAS-574	17/04/25	19/04/25	154
HORN ANT	A.H.Systems	SAS-574	15/09/03	17/09/03	155
Amplifier	EMPOWER	BBS3Q7ELU	16/09/08	17/09/08	1020
PreAmplifier	tsj	MLA-010K01-B01-27	17/03/06	18/03/06	1844539
Amplifier	Agilent	8449B	16/10/19	17/10/19	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	16/09/09	17/09/09	7
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	16/09/09	17/09/09	3
High-pass Filter	Wainwright Instruments	WHNX6-6320-8000-26500-40CC	16/09/13	17/09/13	1

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Parameter	Status Note 1
2.1046	RSS-132 [5.4] RSS-133 [6.4]	Conducted Output Power	C
22.913(a) 24.232(c)	RSS-132 [5.4] RSS-133 [6.4]	Effective Radiated Power Equivalent Isotropic Radiated Power	C
22.917(a) 24.238(a) 2.1049	RSS-Gen [6.6]	Occupied Bandwidth	C
22.917(a) 24.238(a) 2.1051	RSS-132 [5.5] RSS-133 [6.5]	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	C
24.232(d)	RSS-132 [5.4] RSS-133 [6.4]	Peak to Average Ratio	C
22.917(a) 24.238(a) 2.1053	RSS-132 [5.5] RSS-133 [6.5]	Radiated Spurious and Harmonic Emissions	C
22.355 24.235 2.1055	RSS-132 [5.3] RSS-133 [6.3]	Frequency Stability	C
Note 1: C =Comply NC =Not Comply NT =Not Tested NA =Not Applicable			

6. EMISSION DESIGNATOR AND SAMPLE CALCULATION

A. Emission Designator

GPRS850 Emission Designator

Emission Designator = **275KGXW**

GPRS OBW = 274.60 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

GPRS1900 Emission Designator

Emission Designator = **249KGXW**

GPRS OBW = 249.22 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE850 Emission Designator

Emission Designator = **249KG7W**

EDGE OBW = 249.00 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

EDGE1900 Emission Designator

Emission Designator = **246KG7W**

EDGE OBW = 246.15 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M16F9W**

WCDMA OBW = 4.1560 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

WCDMA1900 Emission Designator

Emission Designator = **4M19F9W**

WCDMA OBW = 4.1945 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA850 Emission Designator

Emission Designator = **4M15F9W**

HSUPA OBW = 4.1474 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA1900 Emission Designator

Emission Designator = **4M20F9W**

HSUPA OBW = 4.1963 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

B. For substitution method

MODE	Channel	Freq.(MHz)	Spectrum Reading Value (dBm)	EUT Axis	Ant Pol (H/V)	Level (dBm) @ Ant Terminal	TX Ant Gain (dBi)	Result	
								(dBm)	(W)
GPRS1900	810	1909.8	-18.43	Y	H	25.02	4.76	29.78	0.951


ERP or EIRP = Level @ Ant Terminal LEVEL(dBm) + Tx Ant. Gain

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with substituted antenna gain is the rating of ERP, EIRP or Radiated spurious emission.

7. TEST DATA

7.1 Conducted OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

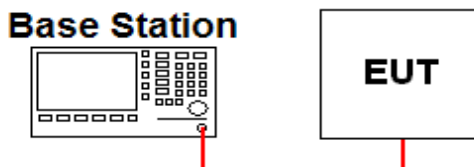

The output power was measured using the Agilent E5515C

▪ GPRS/EDGE

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		GSM Voice	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	-	33.01	32.83	32.67	32.86	27.90	27.88	27.60	27.36
	190	-	33.36	33.25	33.06	32.93	27.86	27.72	27.72	27.62
	251	-	33.07	32.95	33.02	32.90	28.03	27.87	27.87	27.91
PCS	512	-	28.94	28.72	28.73	28.42	25.06	25.64	25.13	25.19
	661	-	29.26	29.21	29.13	28.86	25.21	25.06	25.01	25.16
	810	-	29.36	29.26	29.19	29.02	25.86	25.88	25.96	25.46

▪ GPRS/EDGE

Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		GSM Voice	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	-	23.98	26.81	28.41	29.85	18.87	21.86	23.34	24.35
	190	-	24.33	27.23	28.80	29.92	18.83	21.70	23.46	24.61
	251	-	24.04	26.93	28.76	29.89	19.00	21.85	23.61	24.90
PCS	512	-	19.91	22.70	24.47	25.41	16.03	19.62	20.87	22.18
	661	-	20.23	23.19	24.87	25.85	16.18	19.04	20.75	22.15
	810	-	20.33	23.24	24.93	26.01	16.83	19.86	21.70	22.45

Note: Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots

▪ WCDMA

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.24	23.19	23.16	23.19	22.97	23.33	-
99		12.2 kbps AMR	-	-	-	-	-	-	-
5	HSDPA	Subtest 1	21.93	21.93	21.87	22.29	22.14	22.57	0
5		Subtest 2	21.96	21.92	21.90	22.34	22.15	22.49	0
5		Subtest 3	21.44	21.37	21.32	21.85	21.65	22.05	0.5
5		Subtest 4	21.41	21.41	21.37	21.84	21.65	22.02	0.5
6	HSUPA	Subtest 1	21.44	21.69	21.85	21.82	21.86	22.02	0
6		Subtest 2	20.86	20.65	20.52	21.35	20.68	21.00	2
6		Subtest 3	20.56	20.06	20.20	21.01	20.28	21.29	1
6		Subtest 4	21.09	21.37	21.47	21.91	21.64	21.79	2
6		Subtest 5	22.05	22.02	21.98	22.39	22.19	22.51	0

*This device was not supported the voice call.

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

7.3 OCCUPIED BANDWIDTH

Mode	Channel	Frequency(MHz)	Test Result (kHz)
GPRS850	128	824.2	274.60
	190	836.6	248.84
	251	848.8	246.34
EDGE850	128	824.2	249.00
	190	836.6	247.42
	251	848.8	248.91
GPRS1900	512	1850.2	249.22
	661	1880.0	245.79
	810	1909.8	242.68
EDGE1900	512	1850.2	242.71
	661	1880.0	245.70
	810	1909.8	246.15
WCDMA850	4132	826.4	4114.20
	4183	836.6	4129.80
	4233	846.6	4156.00
HSUPA850	4132	826.4	4143.50
	4183	836.6	4136.20
	4233	846.6	4147.40
WCDMA1900	9262	1852.4	4167.40
	9400	1880.0	4186.00
	9538	1907.6	4194.50
HSUPA1900	9262	1852.4	4189.30
	9400	1880.0	4176.00
	9538	1907.6	4196.30

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.2

7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

7.5 BAND EDGE

- Plots of the EUT's Band Edge are shown in Clause 8.4

7.6 EFFECTIVE RADIATED POWER

- GPRS850 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Note.
GPRS850	128	824.2	H	29.95	1.23	31.18	1.312	1TX
GPRS850	190	836.6	H	28.42	1.22	29.64	0.920	1TX
GPRS850	251	848.8	H	28.69	1.21	29.90	0.977	1TX
GPRS850	128	824.2	H	29.25	1.23	30.48	1.117	4TX
EDGE850	128	824.2	H	27.69	1.23	28.92	0.780	1TX

- GPRS850 data

Mode	CH	Frequency (MHz)	Calculated frame ERP ^{Note1} (dBm)	Note.
GPRS850	128	824.2	22.15	1TX
GPRS850	190	836.6	20.61	1TX
GPRS850	251	848.8	20.87	1TX
GPRS850	128	824.2	27.47	4TX
EDGE850	128	824.2	19.89	1TX

Note1: The Frame-ERP was calculated from the measured burst-ERP power by converting the slot powers into linear units and calculating the energy over 8 timeslots

- WCDMA850 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Note.
WCDMA850	4132	826.4	V	18.73	1.23	19.96	0.099	-
WCDMA850	4183	836.6	V	16.71	1.22	17.93	0.062	-
WCDMA850	4233	846.6	V	17.46	1.21	18.67	0.074	-

- HSUPA850 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Note.
HSUPA850	4132	826.4	V	17.56	1.23	18.79	0.076	-
HSUPA850	4183	836.6	V	15.72	1.22	16.94	0.049	-
HSUPA850	4233	846.6	V	16.57	1.21	17.78	0.060	-

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above.

7.7 EQUIVALENT ISOTROPIC RADIATED POWER

- GPRS1900 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Note.
GPRS1900	512	1850.2	V	24.57	5.07	29.64	0.920	1TX
GPRS1900	661	1880.0	V	24.68	4.92	29.60	0.912	1TX
GPRS1900	810	1909.8	H	24.90	4.76	29.66	0.925	1TX
GPRS1900	810	1909.8	H	24.71	4.76	29.47	0.885	4TX
EDGE1900	810	1909.8	H	25.02	4.76	29.78	0.951	1TX

- GPRS1900 data

Mode	CH	Frequency (MHz)	Calculated frame EIRP ^{Note1} (dBm)	Note.
GPRS1900	512	1850.2	20.61	1TX
GPRS1900	661	1880.0	20.57	1TX
GPRS1900	810	1909.8	20.63	1TX
GPRS1900	810	1909.8	26.46	4TX
EDGE1900	810	1909.8	20.75	1TX

Note1: The Frame-EIRP was calculated from the measured burst-EIRP power by converting the slot powers into linear units and calculating the energy over 8 timeslots

- WCDMA1900 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Note.
WCDMA1900	9262	1852.4	V	20.30	5.06	25.36	0.344	-
WCDMA1900	9400	1880.0	H	22.34	4.92	27.26	0.532	-
WCDMA1900	9538	1907.6	H	20.12	4.77	24.89	0.308	-

- HSUPA1900 data

Mode	CH	Frequency (MHz)	Ant. Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Note.
HSUPA 1900	9262	1852.4	H	20.06	5.06	25.12	0.325	-
HSUPA 1900	9400	1880.0	H	21.92	4.92	26.84	0.483	-
HSUPA1900	9538	1907.6	H	19.64	4.77	24.41	0.276	-

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above.

7.8 RADIATED SPURIOUS EMISSIONS

- GPRS850 data

Channel (ERP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
128 (1.312 W)	824.2	1648.42	H	-35.03	3.77	-31.26	62.44	44.18
		2472.77	H	-47.20	4.05	-43.15	74.33	
		3296.92	H	-47.88	5.74	-42.14	73.32	
		4121.12	H	-33.51	7.16	-26.35	57.53	
		5769.80	H	-46.54	8.80	-37.74	68.92	
		6593.88	V	-48.25	9.16	-39.09	70.27	
		7417.68	H	-48.80	9.90	-38.90	70.08	
190 (0.920 W)	836.6	1673.19	H	-39.95	3.78	-36.17	65.81	42.64
		2509.95	V	-49.41	4.04	-45.37	75.01	
		3346.51	H	-49.17	5.87	-43.30	72.94	
		4183.14	H	-34.96	7.22	-27.74	57.38	
		5019.91	H	-42.82	7.99	-34.83	64.47	
		6693.11	V	-48.48	9.20	-39.28	68.92	
		7529.88	H	-49.93	10.12	-39.81	69.45	
251 (0.977 W)	848.8	1697.67	H	-44.42	3.79	-40.63	70.53	42.90
		2546.19	H	-49.60	4.06	-45.54	75.44	
		3394.90	H	-49.97	6.00	-43.97	73.87	
		4244.04	H	-36.820	7.20	-29.62	59.52	
		5093.08	H	-43.190	8.12	-35.07	64.97	
		6790.36	H	-48.86	9.32	-39.54	69.44	
		7638.71	H	-50.38	10.24	-40.14	70.04	

- Limit Calculation= $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above.

- WCDMA850 data

Channel (ERP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.099 W)	824.6	1650.24	H	-53.65	3.78	-49.87	69.83	32.96
		2479.61	V	-58.22	4.05	-54.17	74.13	
		3300.87	V	-52.22	5.75	-46.47	66.43	
		4134.30	H	-50.88	7.17	-43.71	63.67	
4183 (0.062 W)	836.6	1675.51	H	-59.16	3.78	-55.38	73.31	30.93
		2512.64	V	-65.44	4.05	-61.39	79.32	
		3351.12	V	-50.38	5.88	-44.50	62.43	
		4188.22	H	-52.27	7.23	-45.04	62.97	
4233 (0.074 W)	846.6	1690.64	H	-59.72	3.79	-55.93	74.60	31.67
		2541.79	V	-65.76	4.06	-61.70	80.37	
		3381.57	V	-50.87	5.96	-44.91	63.58	
		4238.73	V	-51.10	7.21	-43.89	62.56	

- Limit Calculation= $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above

- HSUPA850 data

Channel (ERP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.076 W)	824.6	1650.36	H	-52.19	3.78	-48.41	67.20	31.79
		2479.32	V	-57.89	4.05	-53.84	72.63	
		3306.65	V	-51.98	5.77	-46.21	65.00	
		4136.88	H	-50.65	7.18	-43.47	62.26	
4183 (0.049 W)	836.6	1675.32	H	-59.01	3.78	-55.23	72.17	29.94
		2512.32	V	-65.36	4.04	-61.32	78.26	
		3350.89	V	-50.20	5.88	-44.32	61.26	
		4188.13	V	-51.21	7.23	-43.98	60.92	
4233 (0.060 W)	846.6	1691.32	H	-59.63	3.79	-55.84	73.62	30.78
		2542.32	V	-65.65	4.06	-61.59	79.37	
		3381.58	V	-50.51	5.96	-44.55	62.33	
		4238.23	V	-50.68	7.21	-43.47	61.25	

- Limit Calculation= $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above

- GPRS1900 data

Channel (EIRP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
512 (0.920 W)	1850.2	3702.45	H	-39.78	8.49	-31.29	60.93	42.64
		3706.29	V	-38.33	8.49	-29.84	59.48	
		5554.95	H	-47.76	10.67	-37.09	66.73	
		5561.32	V	-47.91	10.67	-37.24	66.88	
661 (0.912 W)	1880.0	3757.71	H	-40.69	8.51	-32.18	61.78	42.60
		3757.57	V	-38.07	8.51	-29.56	59.16	
		5726.53	H	-45.33	10.89	-34.44	64.04	
		5719.00	V	-44.24	10.88	-33.36	62.96	
810 (0.951 W)	1909.8	3812.79	H	-42.19	8.55	-33.64	63.42	42.78
		3812.80	V	-40.38	8.55	-31.83	61.61	
		5636.39	H	-45.40	10.75	-34.65	64.43	
		5642.23	V	-45.64	10.76	-34.88	64.66	

- Limit Calculation= $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above

- WCDMA1900 data

Channel (EIRP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.344 W)	1852.4	3700.54	V	-35.26	8.49	-26.77	52.13	38.36
		5550.34	V	-47.84	10.67	-37.17	62.53	
		7400.96	V	-49.37	12.01	-37.36	62.72	
		9251.24	H	-47.80	13.36	-34.44	59.80	
9400 (0.532 W)	1880.0	3759.99	V	-36.03	8.51	-27.52	54.78	40.26
		5640.28	V	-46.76	10.75	-36.01	63.27	
		7520.01	V	-50.16	12.25	-37.91	65.17	
		9400.21	H	-48.25	13.49	-34.76	62.02	
9538 (0.308 W)	1907.6	3819.76	V	-35.16	8.55	-26.61	51.50	37.89
		5729.58	V	-48.59	10.89	-37.70	62.59	
		7639.29	H	-50.61	12.39	-38.22	63.11	
		9548.95	H	-48.590	13.38	-35.21	60.10	

- Limit Calculation= $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported in the table above

- HSUPA1900 data

Channel (EIRP)	Tx Freq. (MHz)	Freq. (MHz)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.325 W)	1852.4	3700.86	V	-35.22	8.49	-26.73	51.85	38.12
		5550.24	V	-47.77	10.67	-37.10	62.22	
		7400.86	V	-49.04	12.01	-37.03	62.15	
		9250.89	H	-47.88	13.36	-34.52	59.64	
9400 (0.483 W)	1880.0	3460.13	V	-35.85	8.37	-27.48	54.32	39.84
		5640.39	V	-46.64	10.75	-35.89	62.73	
		7519.92	V	-50.12	12.25	-37.87	64.71	
		9400.56	H	-48.01	13.49	-34.52	61.36	
9538 (0.276 W)	1907.6	3819.53	V	-35.12	8.55	-26.57	50.98	37.41
		5729.86	V	-48.54	10.89	-37.65	62.06	
		7639.36	H	-50.54	12.39	-38.15	62.56	
		9548.86	H	-48.57	13.38	-35.19	59.60	

- Limit Calculation= $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported.

The GSM mode of power control level is set to "0" in PCS band and "5" in cellular band.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported in the table above

7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.9.1 FREQUENCY STABILITY (GPRS850)

OPERATING FREQUENCY : 836,600,000 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 9.0 V DC
 DEVIATION LIMIT : $\pm 0.00025\%$ or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	9.00	+20(Ref)	836,599,978	-0.026	-0.00000263
100%		-30	836,599,979	-0.025	-0.00000251
100%		-20	836,599,975	-0.030	-0.00000299
100%		-10	836,599,980	-0.024	-0.00000239
100%		0	836,599,980	-0.024	-0.00000239
100%		+10	836,599,979	-0.025	-0.00000251
100%		+20	836,599,978	-0.026	-0.00000263
100%		+30	836,599,981	-0.023	-0.00000227
100%		+40	836,599,975	-0.030	-0.00000299
100%		+50	836,599,980	-0.024	-0.00000239
115%	10.35	+20	836,599,978	-0.026	-0.00000263
BATT.ENDPOINT	8.40	+20	836,599,981	-0.023	-0.00000227

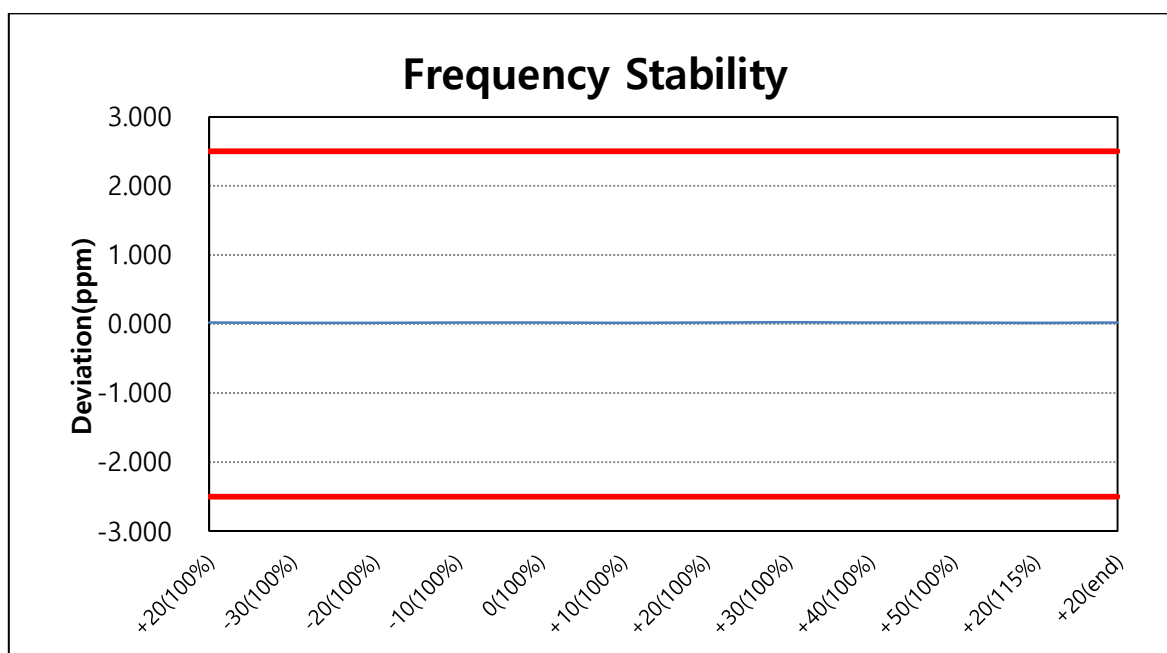

7.9.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,600,000 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 9.0 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	9.00	+20(Ref)	836,599,983	-0.020	-0.00000203
100%		-30	836,599,982	-0.022	-0.00000215
100%		-20	836,599,981	-0.023	-0.00000227
100%		-10	836,599,979	-0.025	-0.00000251
100%		0	836,599,980	-0.024	-0.00000239
100%		+10	836,599,980	-0.024	-0.00000239
100%		+20	836,599,983	-0.020	-0.00000203
100%		+30	836,599,981	-0.023	-0.00000227
100%		+40	836,599,981	-0.023	-0.00000227
100%		+50	836,599,980	-0.024	-0.00000239
115%	10.35	+20	836,599,980	-0.024	-0.00000239
BATT.ENDPOINT	8.40	+20	836,599,982	-0.022	-0.00000215

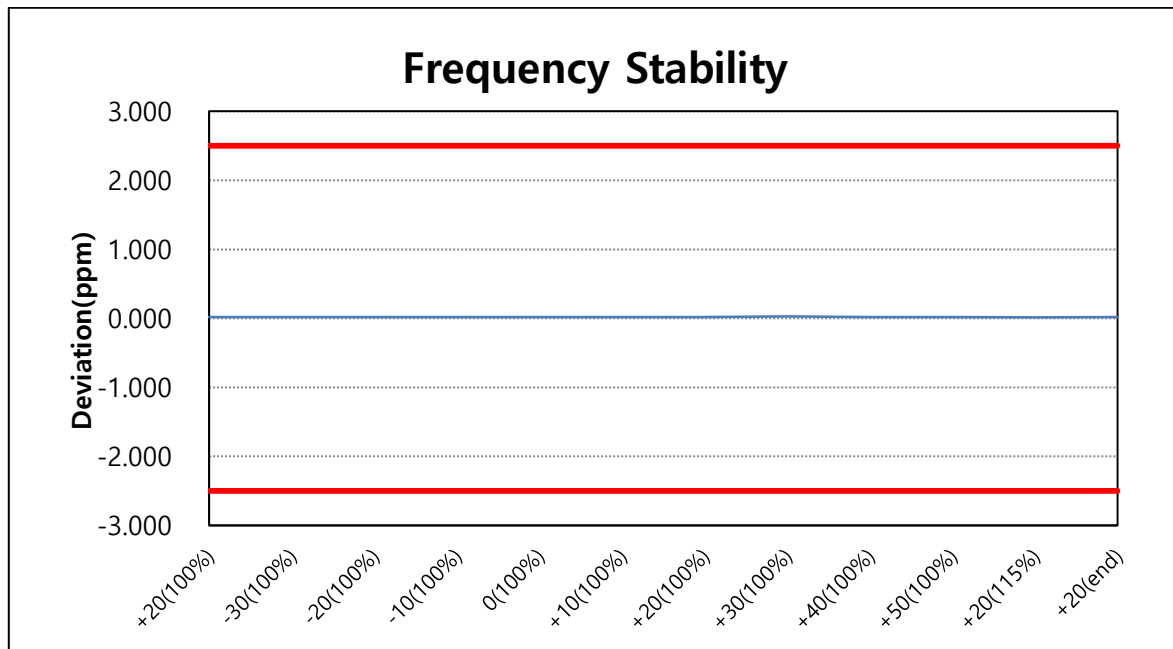

7.9.3 FREQUENCY STABILITY (GPRS1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 9.0 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	9.00	+20(Ref)	1,879,999,977	-0.012	-0.00000122
100%		-30	1,879,999,981	-0.010	-0.00000101
100%		-20	1,879,999,976	-0.013	-0.00000128
100%		-10	1,879,999,982	-0.010	-0.00000096
100%		0	1,879,999,979	-0.011	-0.00000112
100%		+10	1,879,999,979	-0.011	-0.00000112
100%		+20	1,879,999,977	-0.012	-0.00000122
100%		+30	1,879,999,981	-0.010	-0.00000101
100%		+40	1,879,999,980	-0.011	-0.00000106
100%		+50	1,879,999,979	-0.011	-0.00000112
115%	10.35	+20	1,879,999,979	-0.011	-0.00000112
BATT.ENDPOINT	3.20	+20	1,879,999,980	-0.011	-0.00000106

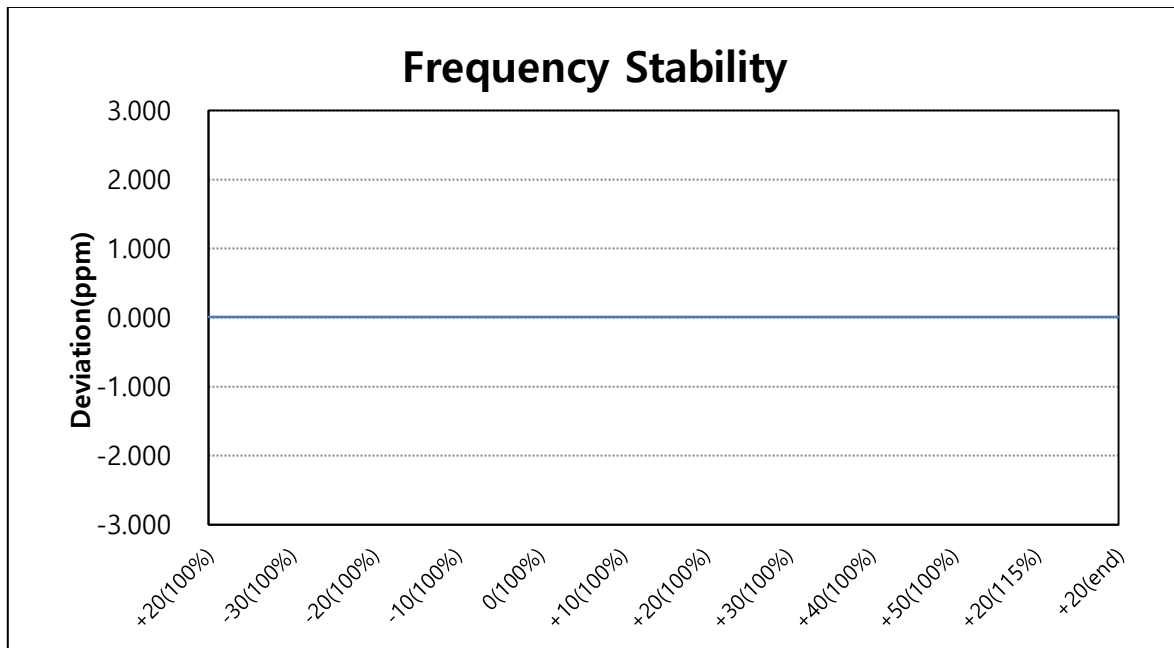


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.9.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 9.0 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	9.00	+ 25(Ref)	1,879,999,978	-0.012	-0.00000117
100%		- 30	1,879,999,976	-0.013	-0.00000128
100%		- 20	1,879,999,978	-0.012	-0.00000117
100%		- 10	1,879,999,977	-0.012	-0.00000122
100%		0	1,879,999,972	-0.015	-0.00000149
100%		+ 10	1,879,999,978	-0.012	-0.00000117
100%		+ 20	1,879,999,978	-0.012	-0.00000117
100%		+ 30	1,879,999,981	-0.010	-0.00000101
100%		+ 40	1,879,999,979	-0.011	-0.00000112
100%		+ 50	1,879,999,981	-0.010	-0.00000101
115%	10.35	+ 25	1,879,999,975	-0.013	-0.00000133
BATT.ENDPOINT	8.40	+ 25	1,879,999,979	-0.011	-0.00000112

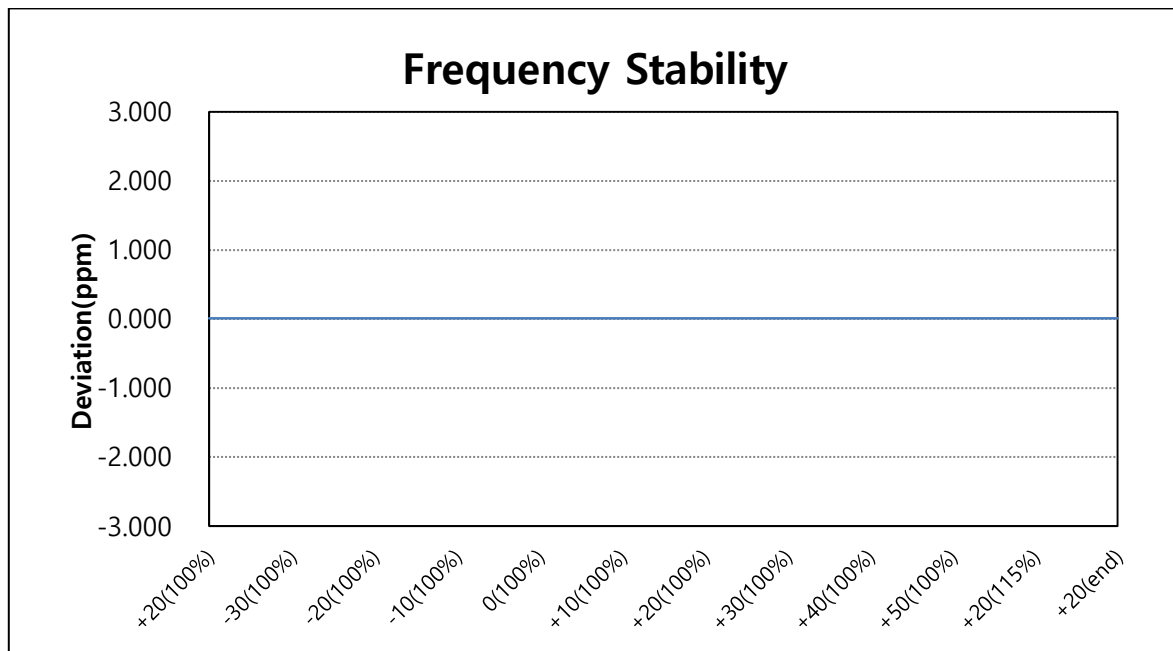


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.


8. TEST PLOTS

8.1 Peak to Average Ratio

-P_{pk} (dBm) GPRS1900 & Channel: 661

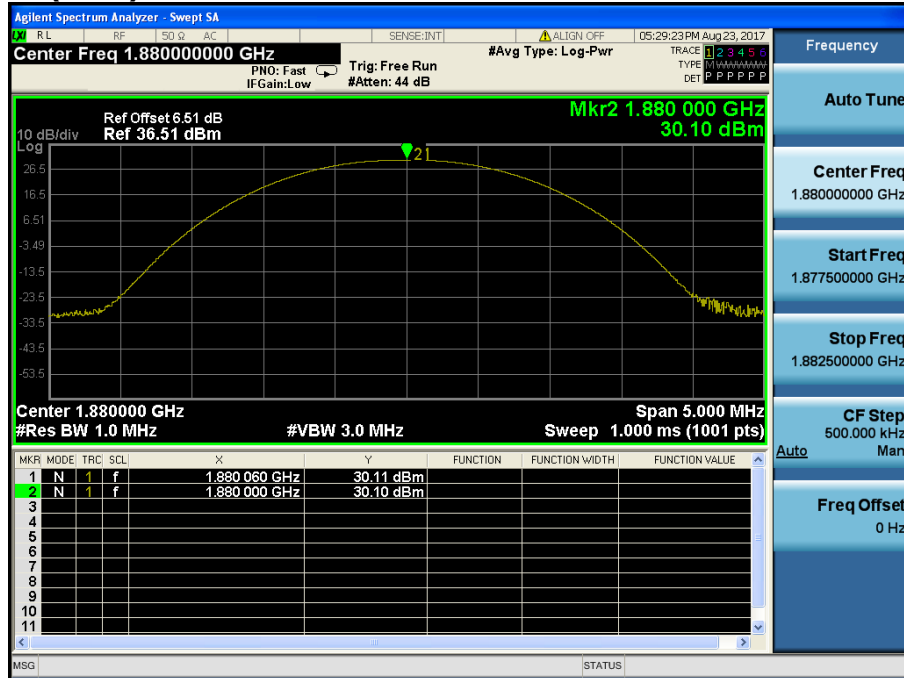


-P_{avg} (dBm) GPRS1900 & Channel: 661

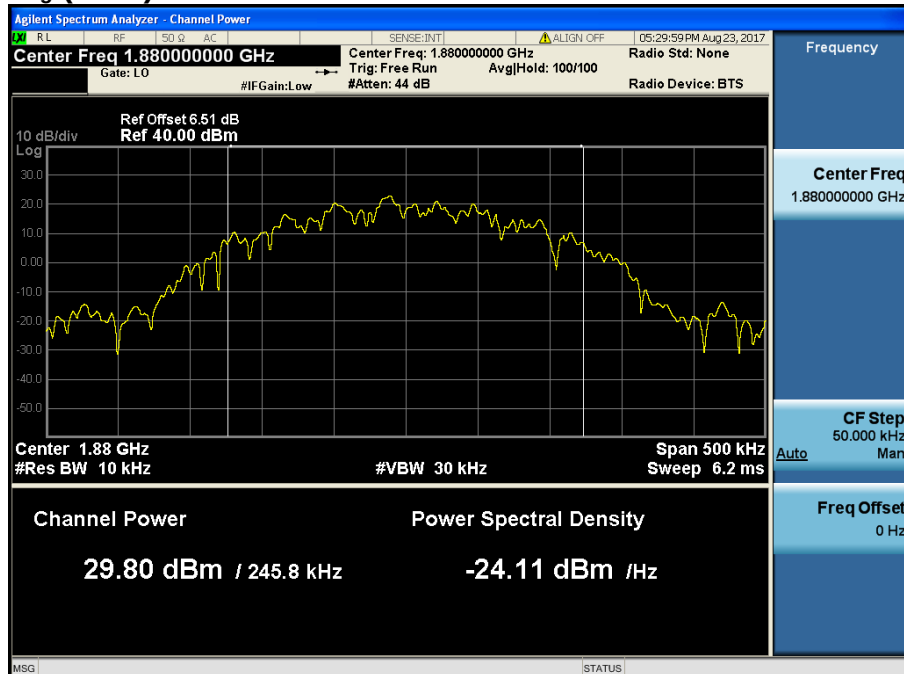


$$\text{PAPR (dB)} = P_{\text{pk}} \text{ (dBm)} - P_{\text{avg}} \text{ (dBm)} = 30.10 \text{ dBm} - 29.80 \text{ dBm} = 0.30 \text{ dB}$$

-P_{pk} (dBm) EDGE1900 & Channel: 661

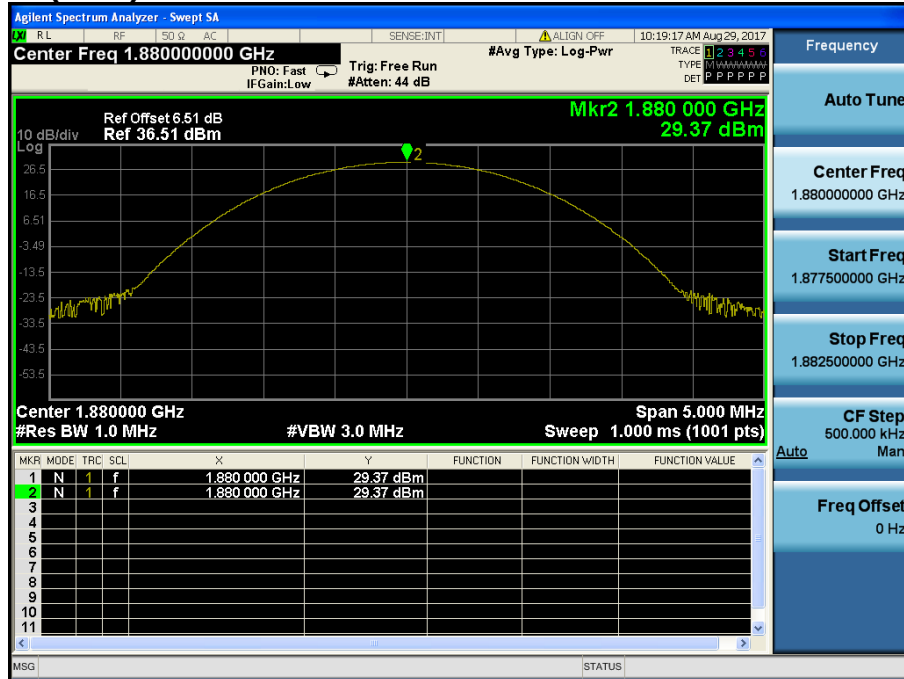


-P_{avg} (dBm) EDGE1900 & Channel: 661

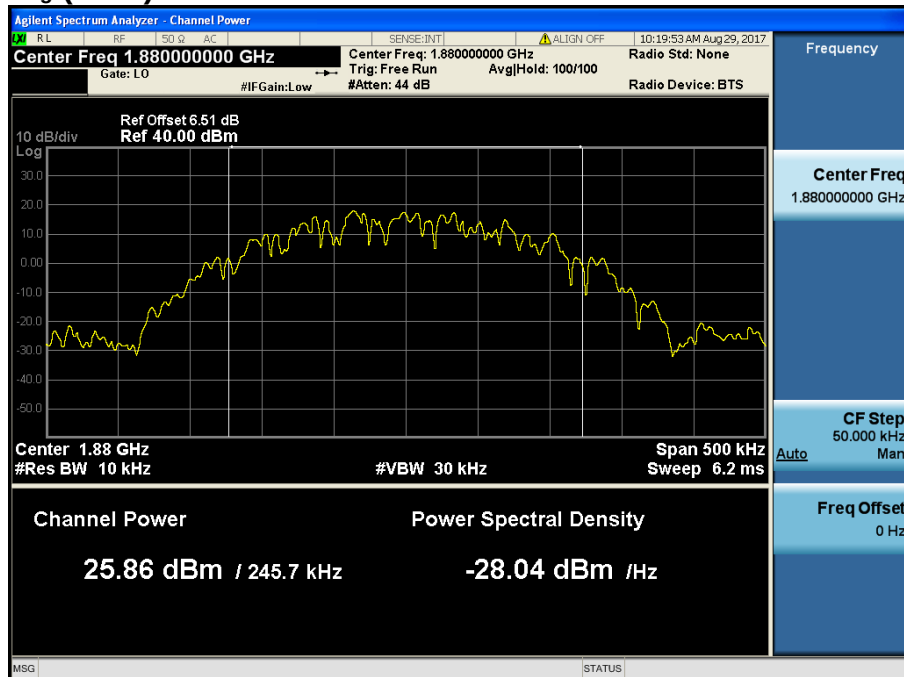


$$\text{PAPR (dB)} = P_{pk} \text{ (dBm)} - P_{avg} \text{ (dBm)} = 29.37 \text{ dBm} - 25.86 \text{ dBm} = 3.51 \text{ dB}$$

WCDMA1900 & Channel: 9400

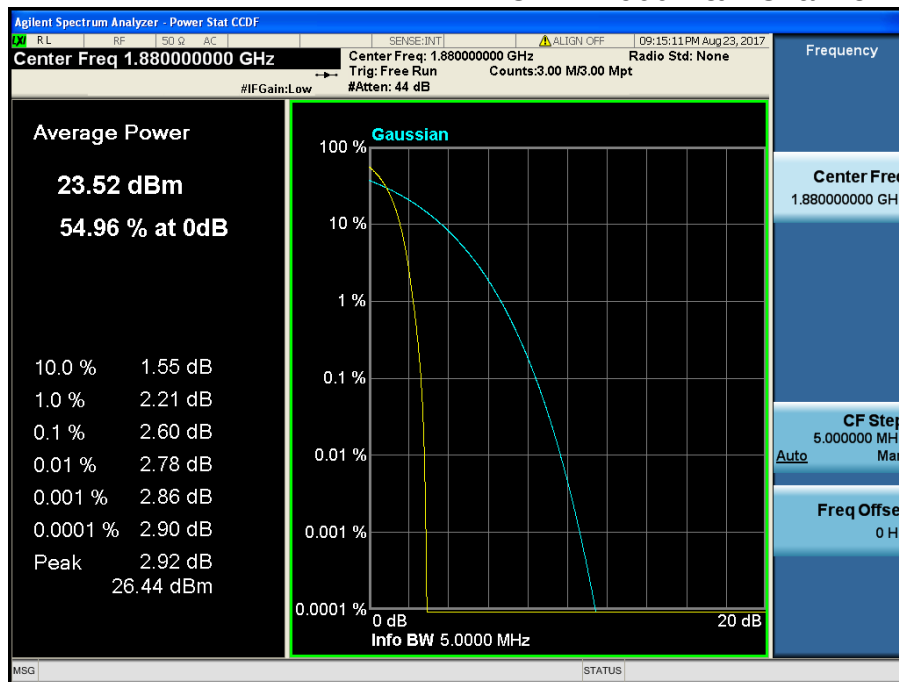


HSUPA1900 & Channel: 9400

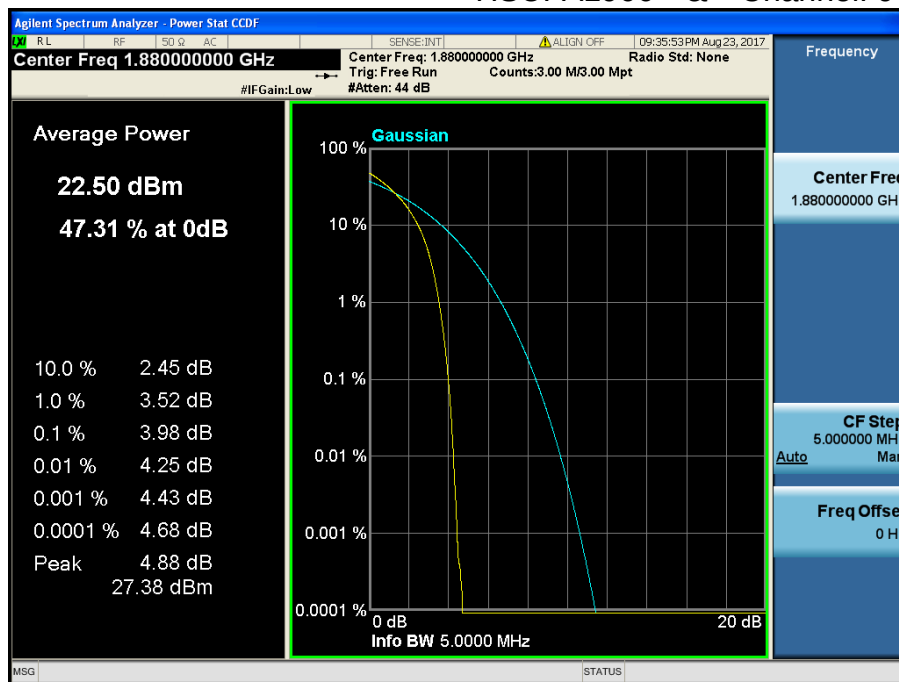


8.2 Occupied Bandwidth (99 % Bandwidth)


GPRS850 & Channel: 128

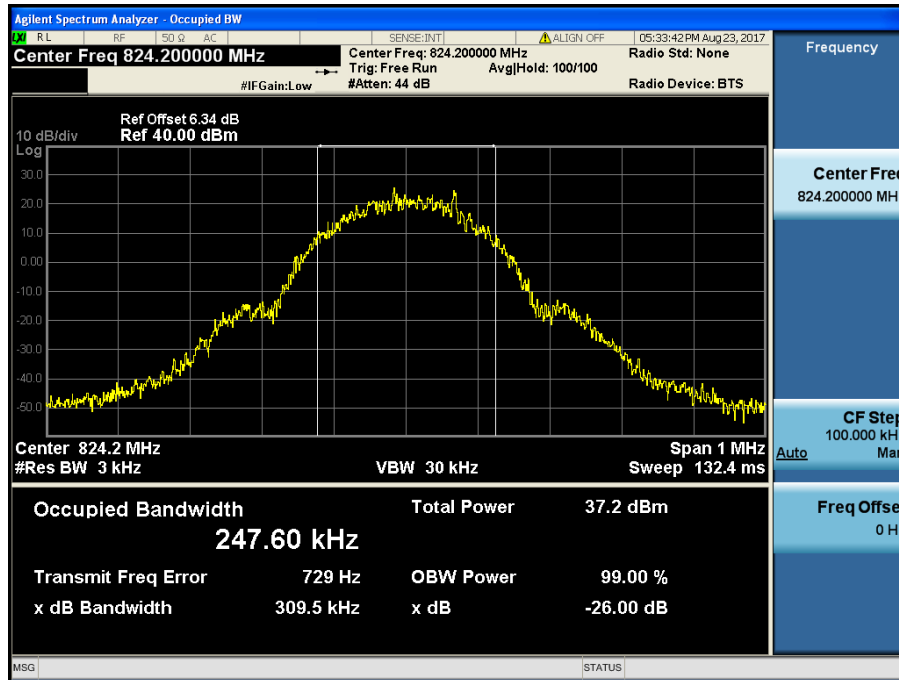


GPRS850 & Channel: 190

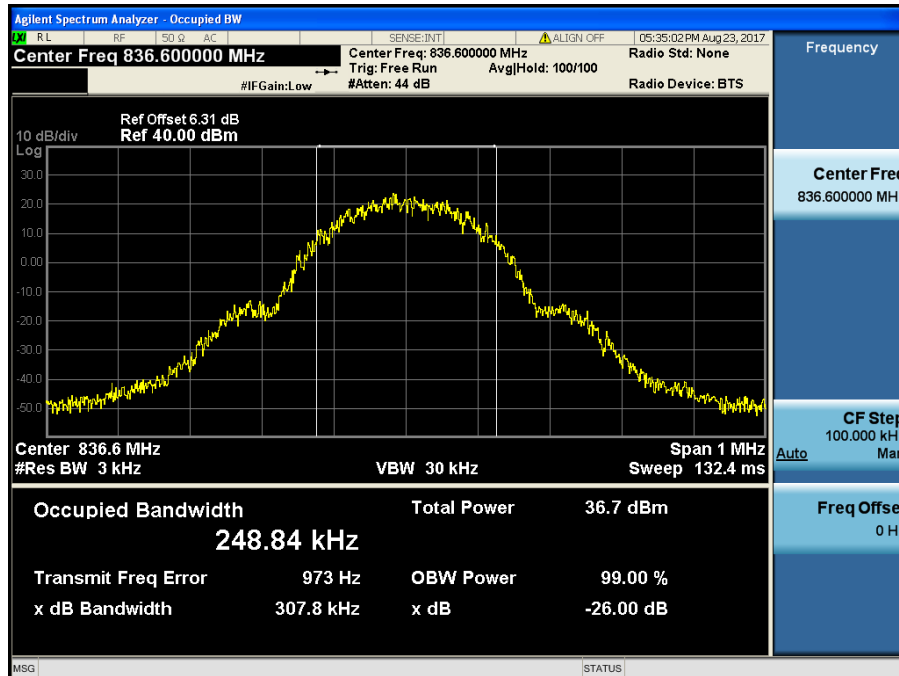


GPRS850 & Channel: 251

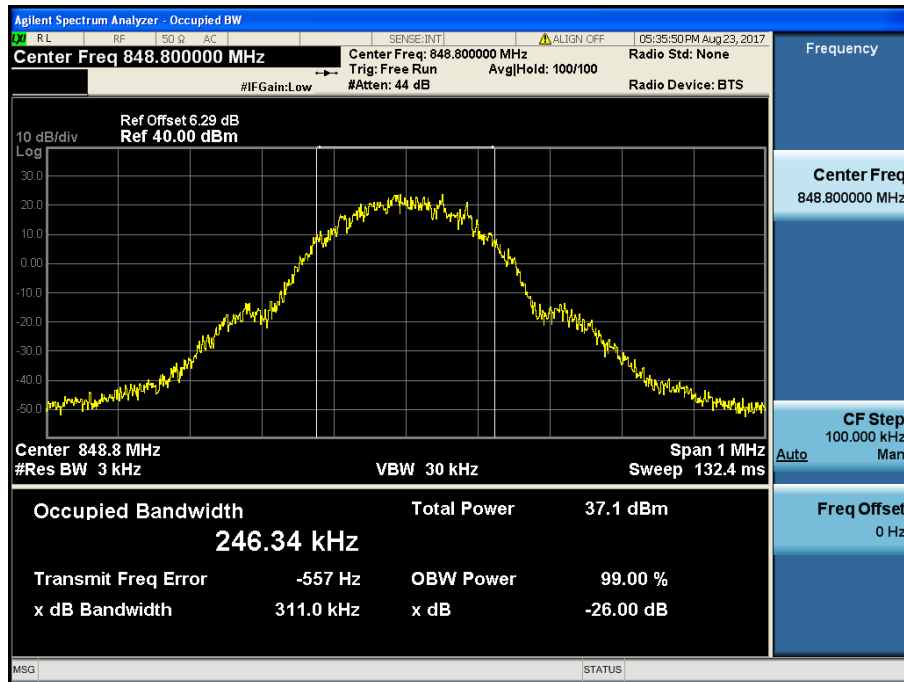


EDGE850 & Channel: 128

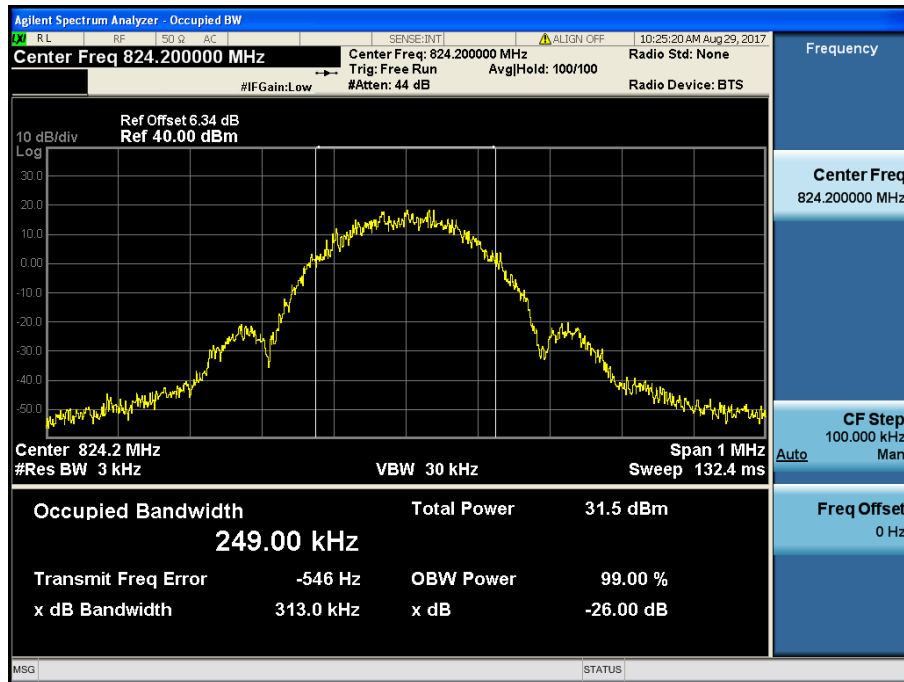


EDGE850 & Channel: 190

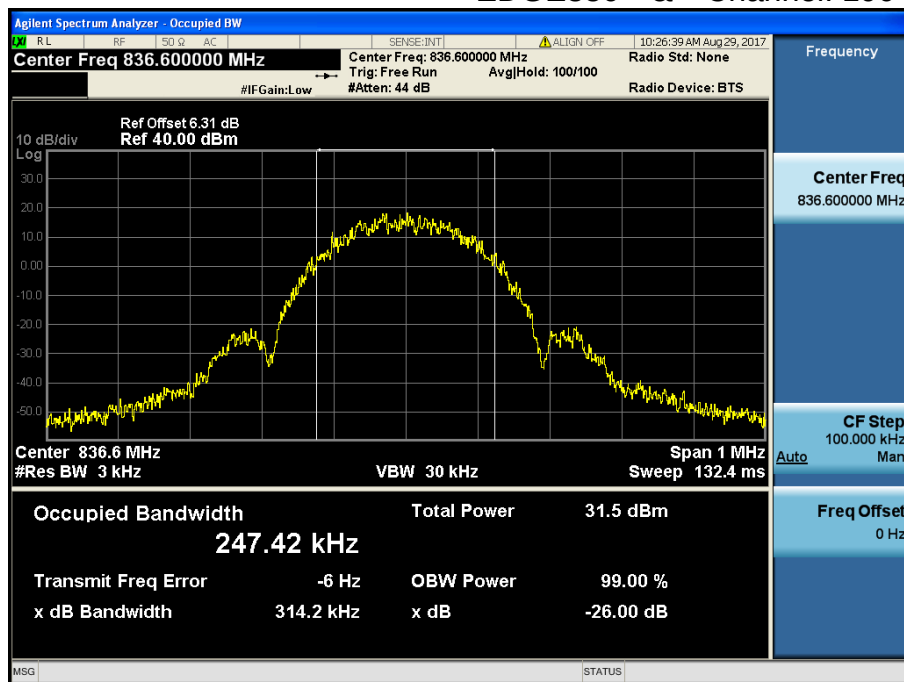


EDGE850 & Channel: 251

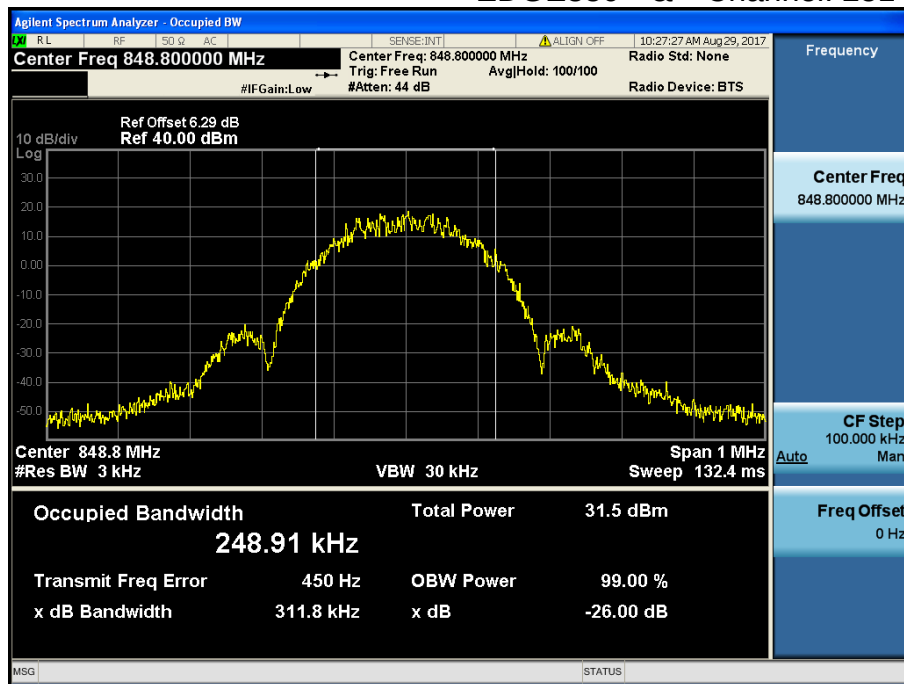


GPRS1900 & Channel: 512

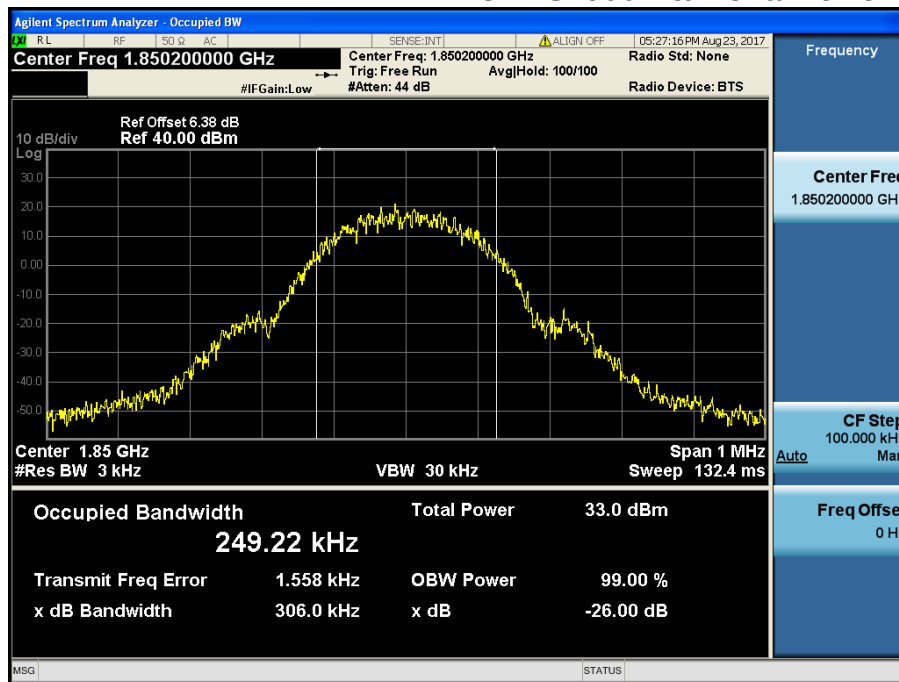


GPRS1900 & Channel: 661

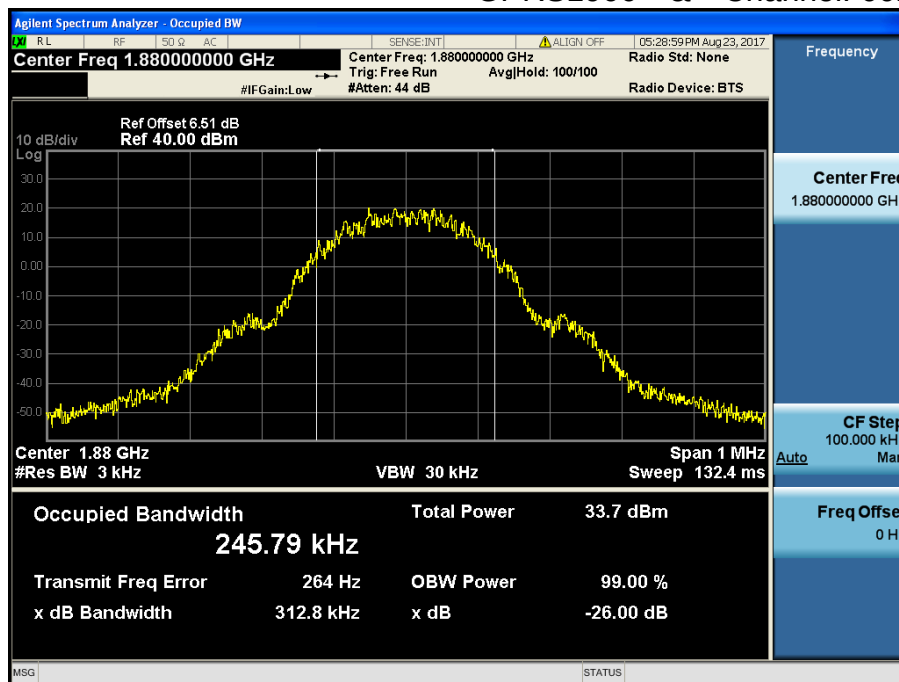


GPRS1900 & Channel: 810

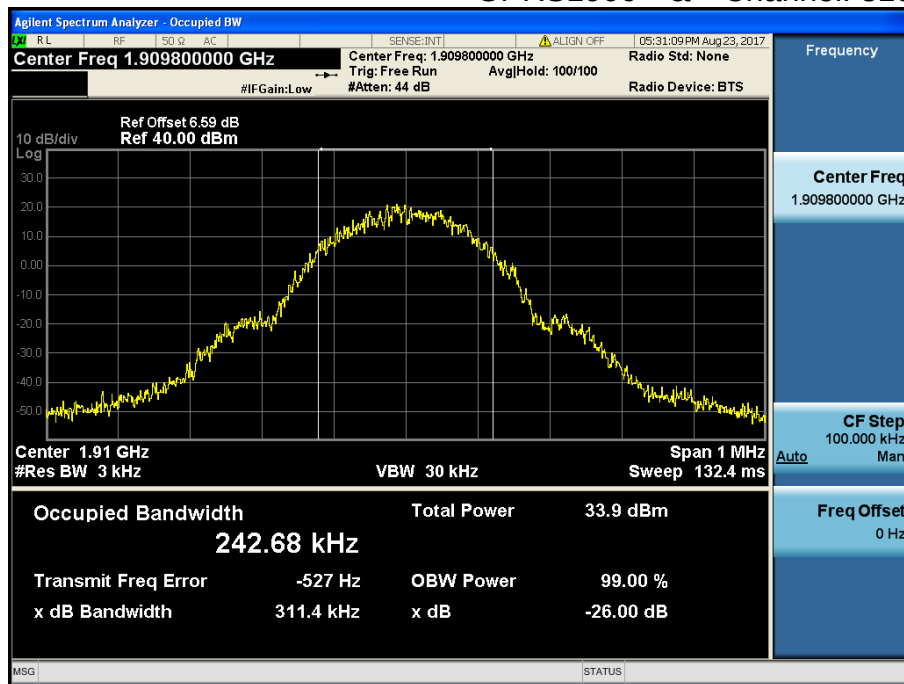


EDGE1900 & Channel: 512

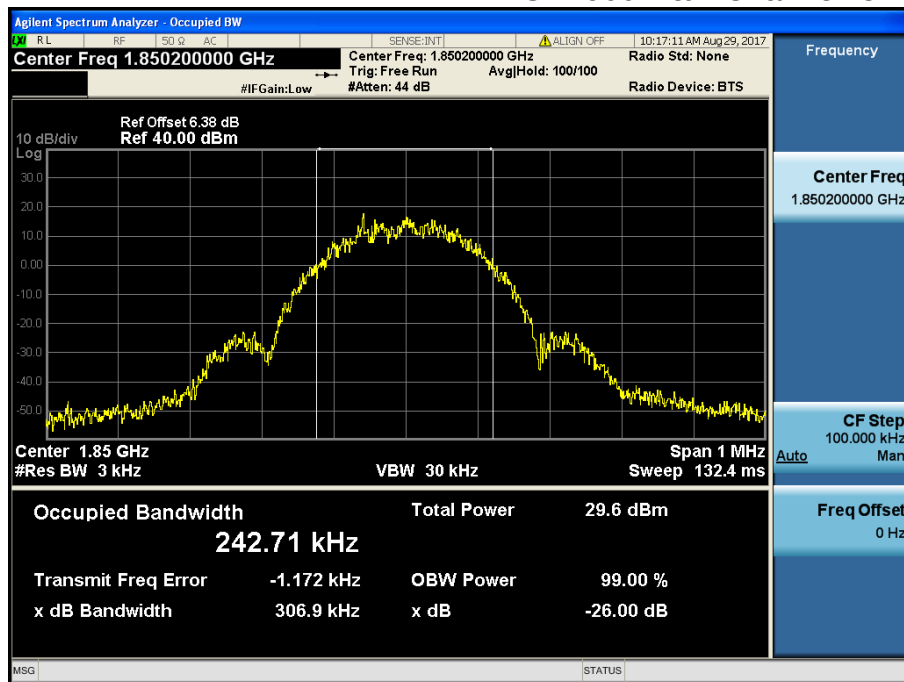


EDGE1900 & Channel: 661

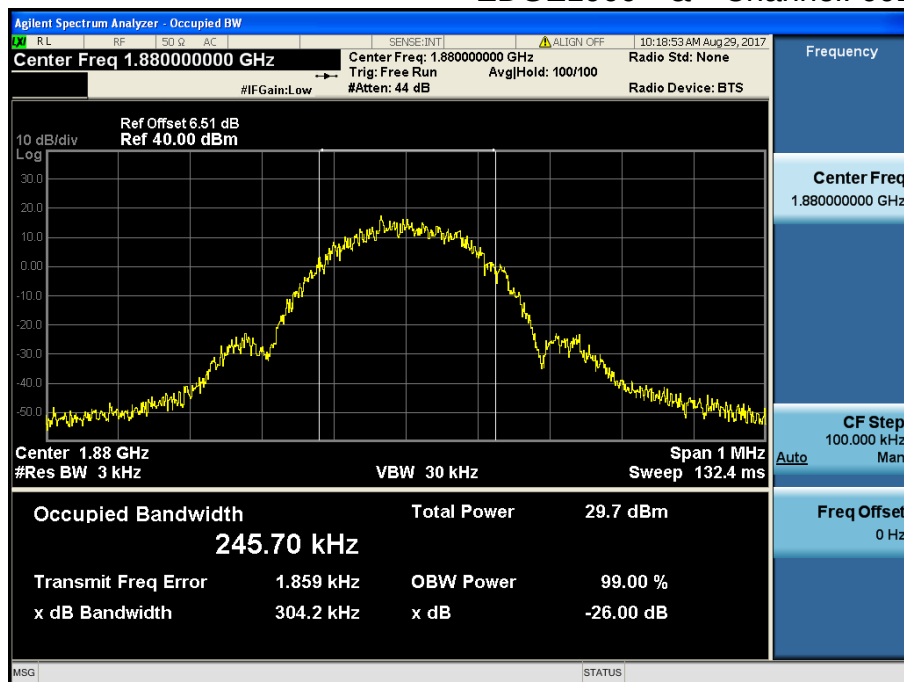


EDGE1900 & Channel: 810

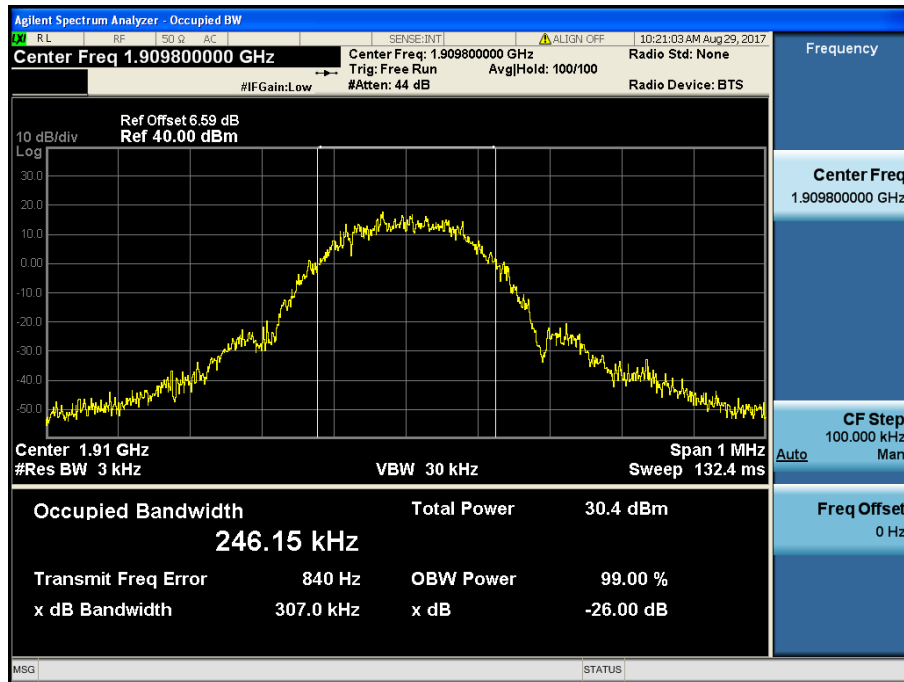


WCDMA850 & Channel: 4132

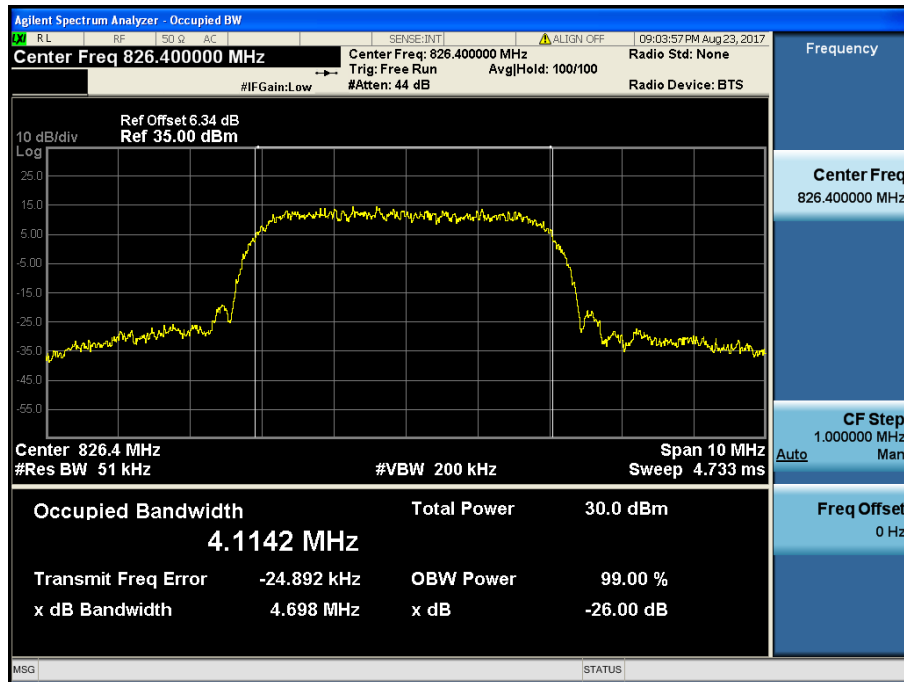


WCDMA850 & Channel: 4183

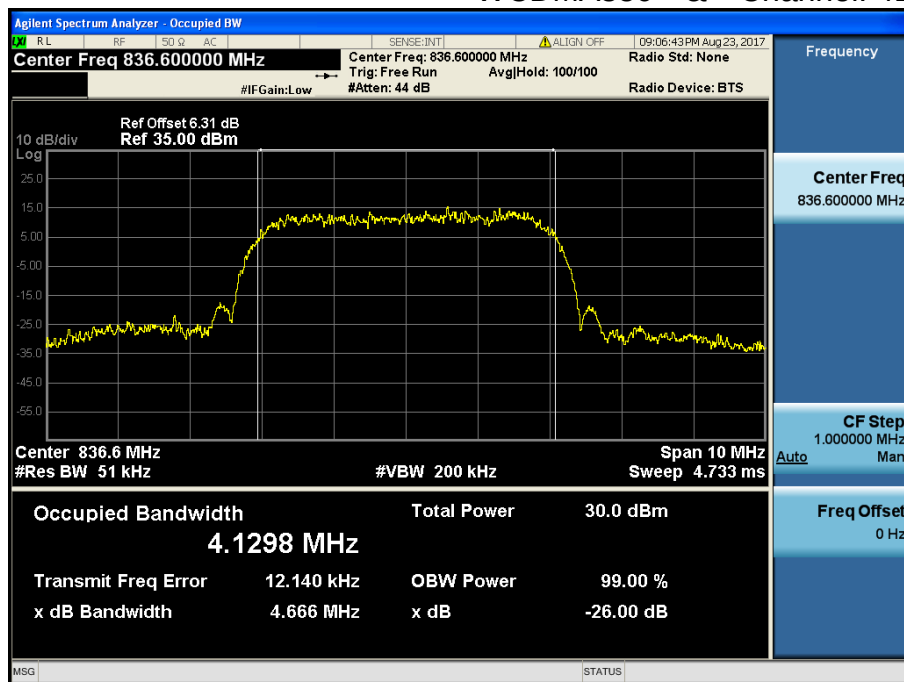


WCDMA850 & Channel: 4233

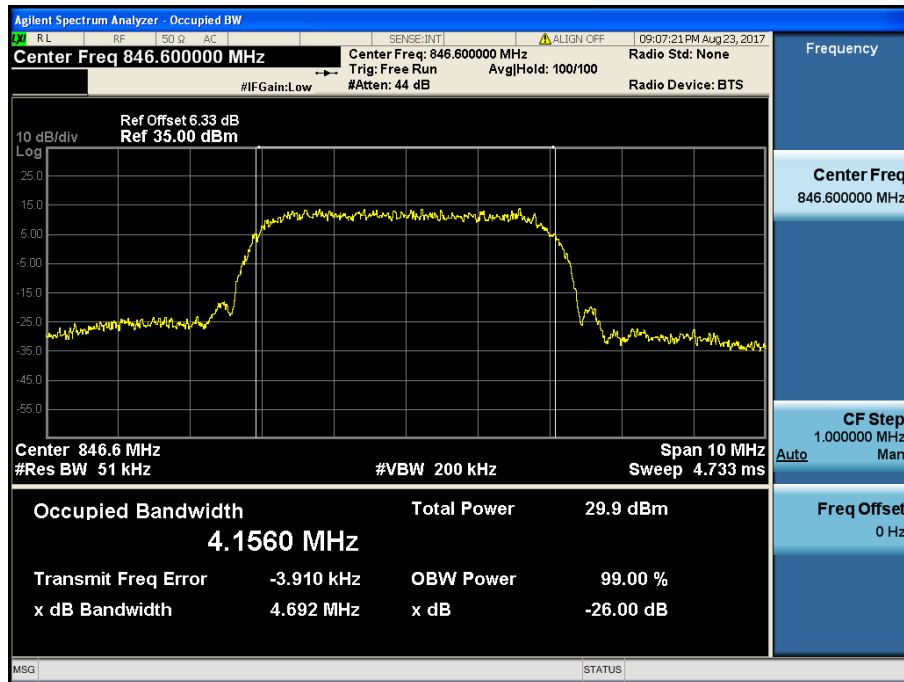


HSUPA850 & Channel: 4132

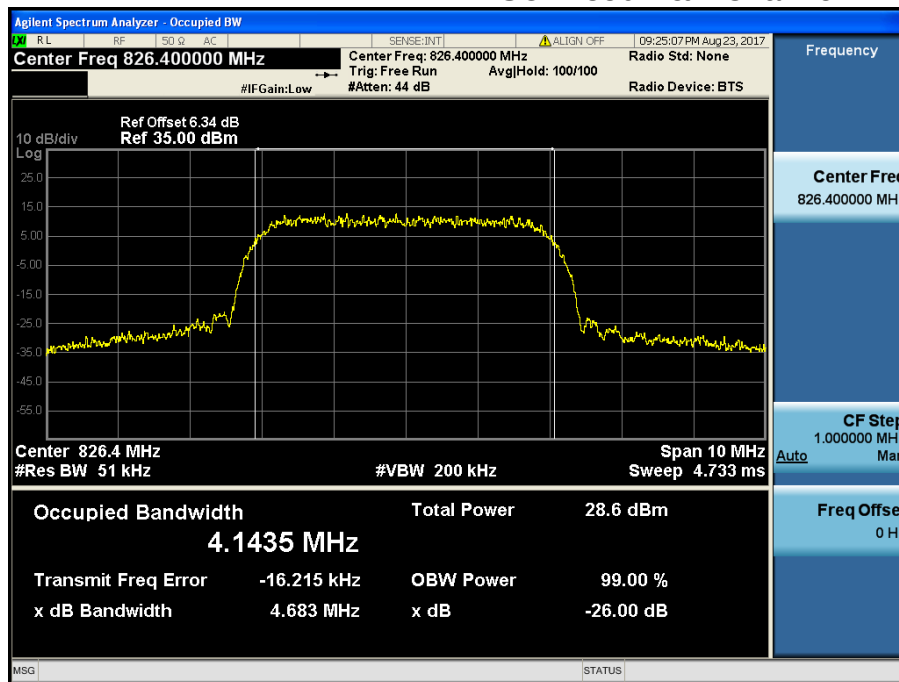


HSUPA850 & Channel: 4183

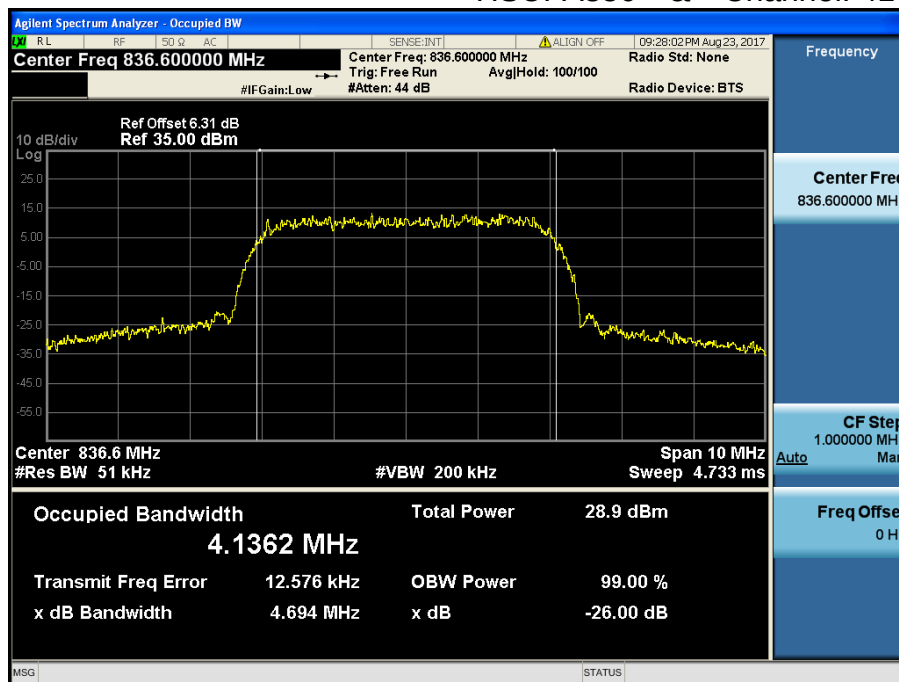


HSUPA850 & Channel: 4233

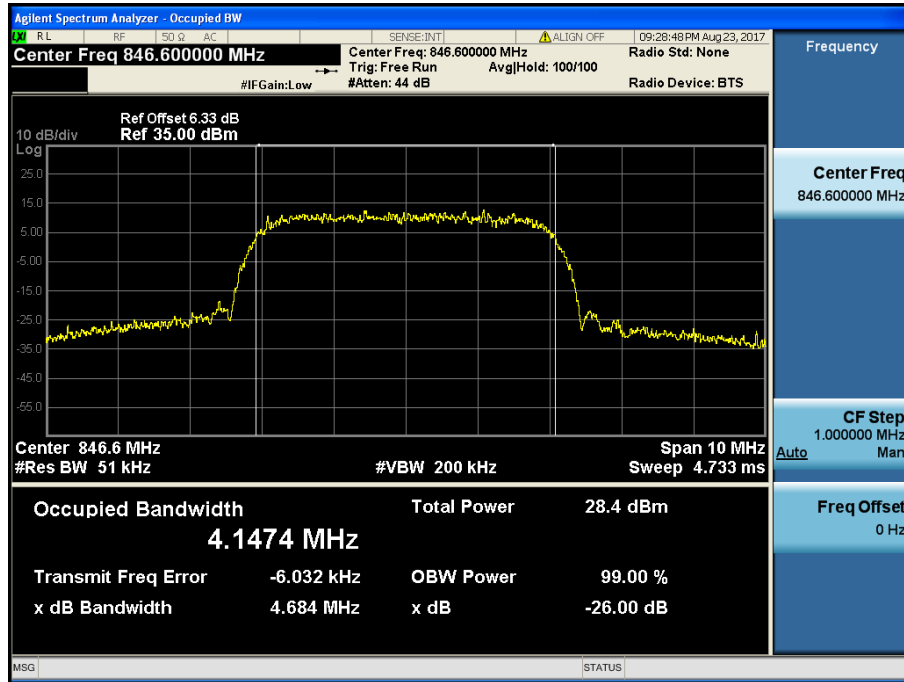


WCDMA1900 & Channel: 9262

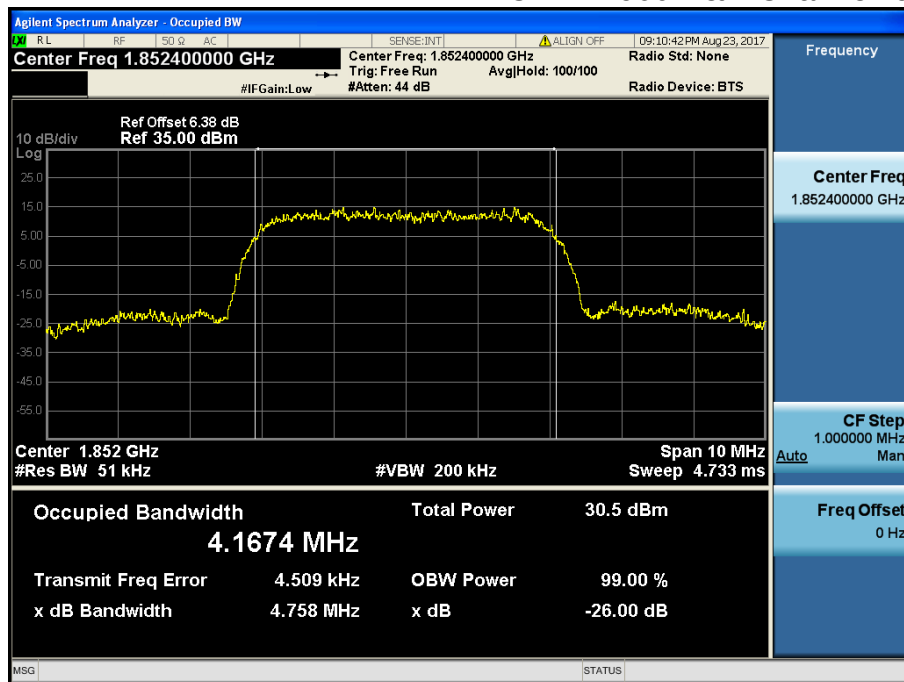


WCDMA1900 & Channel: 9400

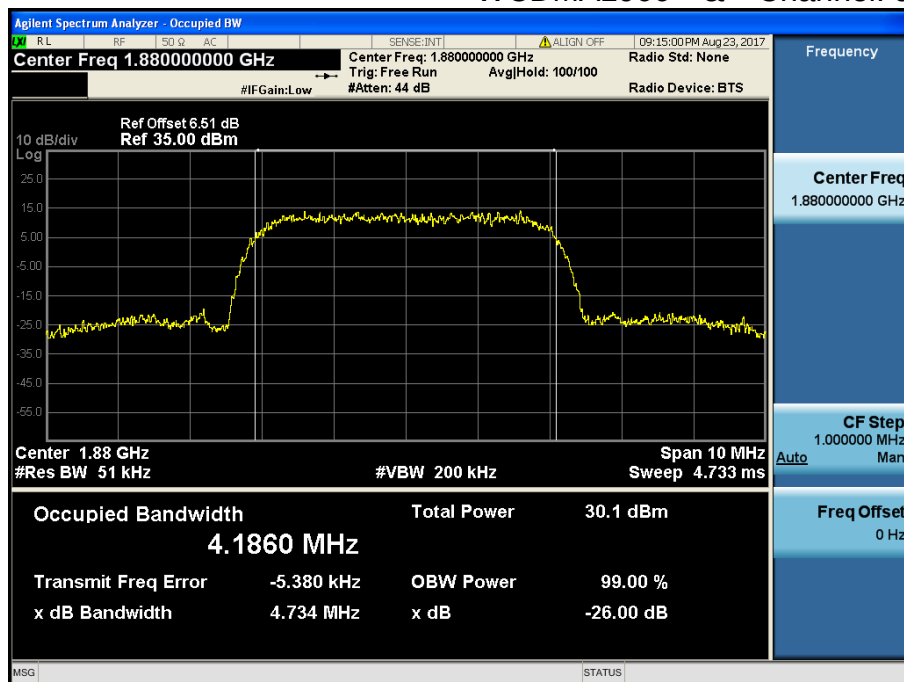


WCDMA1900 & Channel: 9538

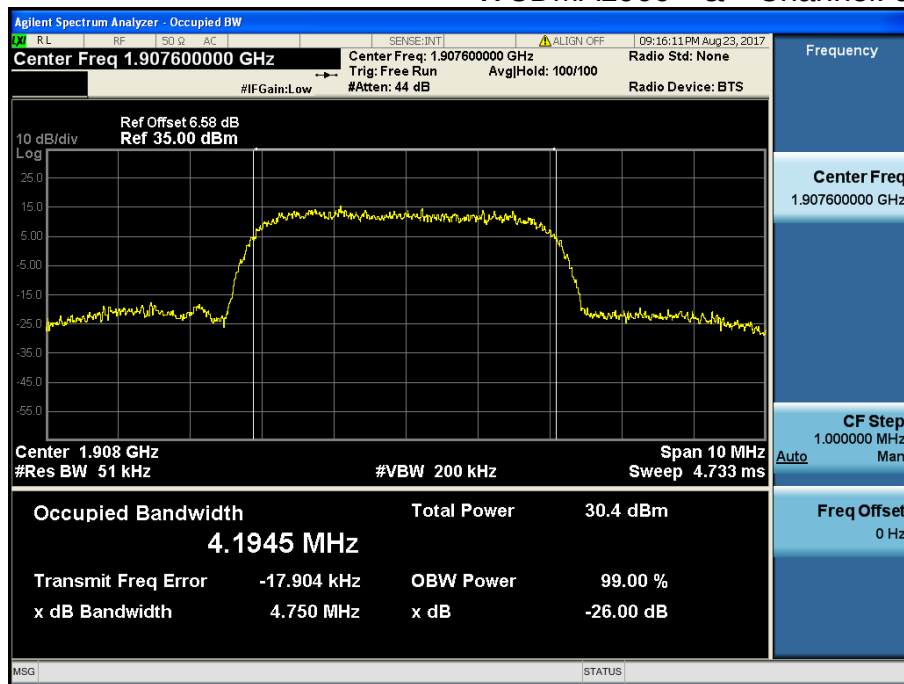


HSUPA1900 & Channel: 9262

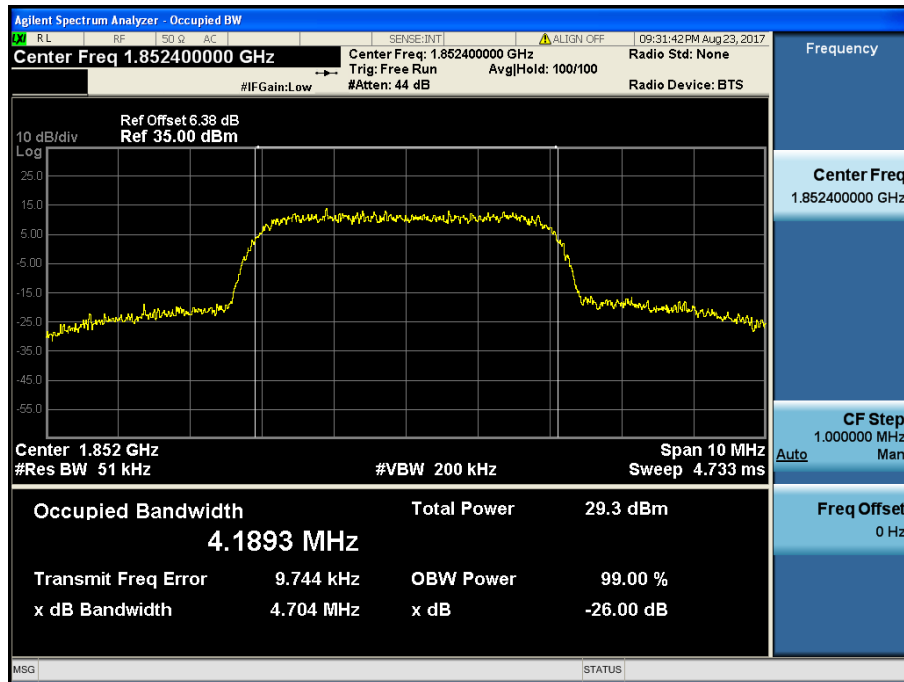

HSUPA1900 & Channel: 9400

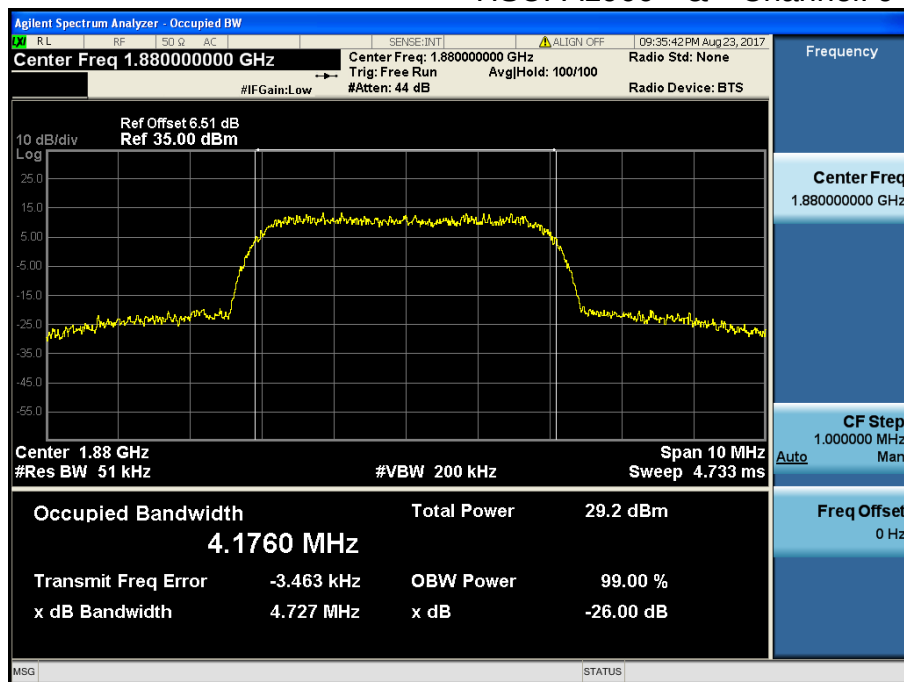


HSUPA1900 & Channel: 9538

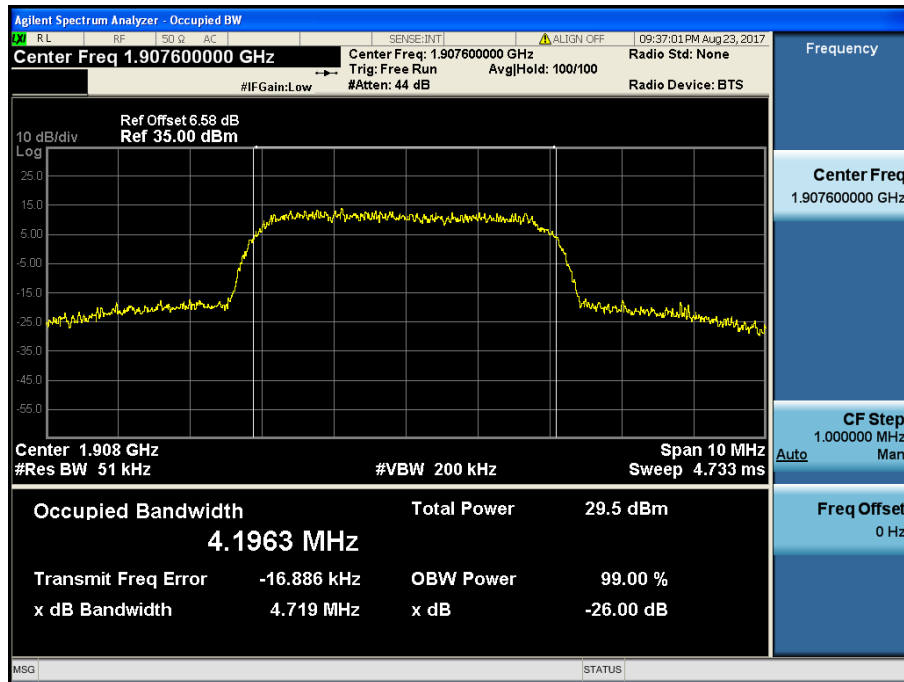


8.3 Spurious Emissions at Antenna Terminal


GPRS850 & Channel: 128

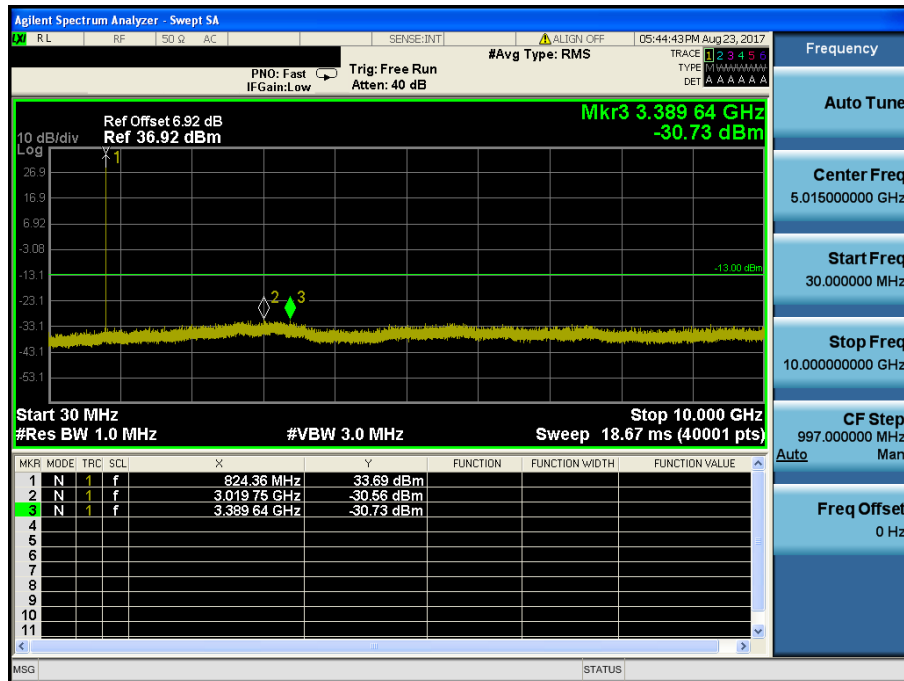


GPRS850 & Channel: 190

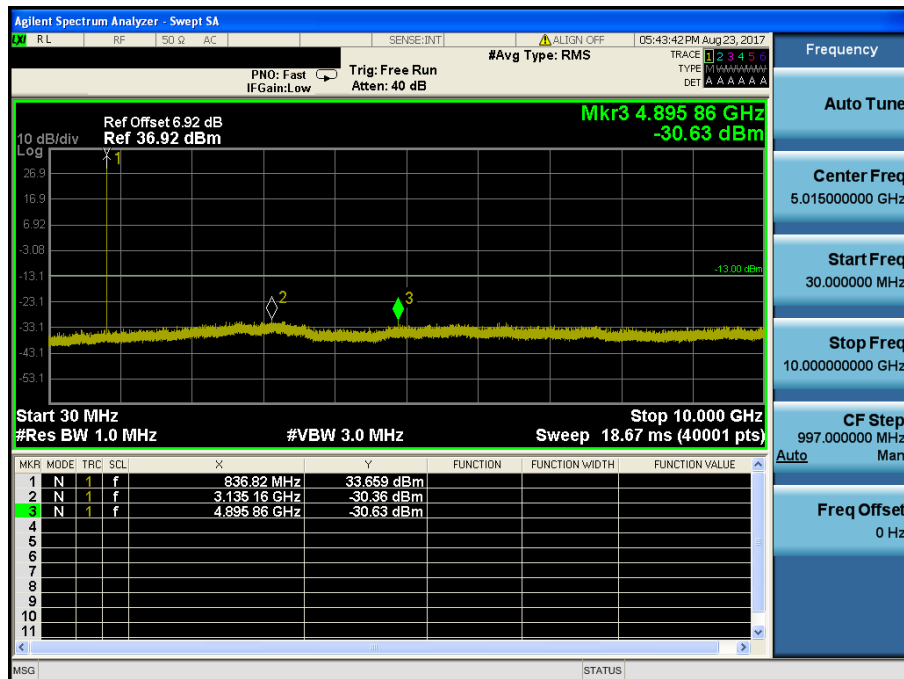


GPRS850 & Channel: 251

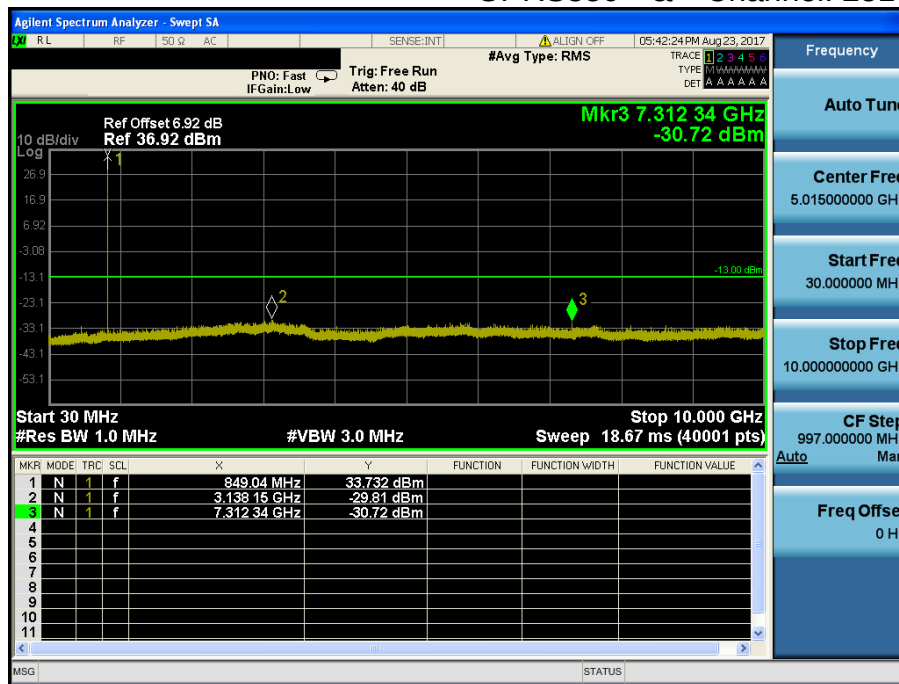


GPRS1900 & Channel: 512

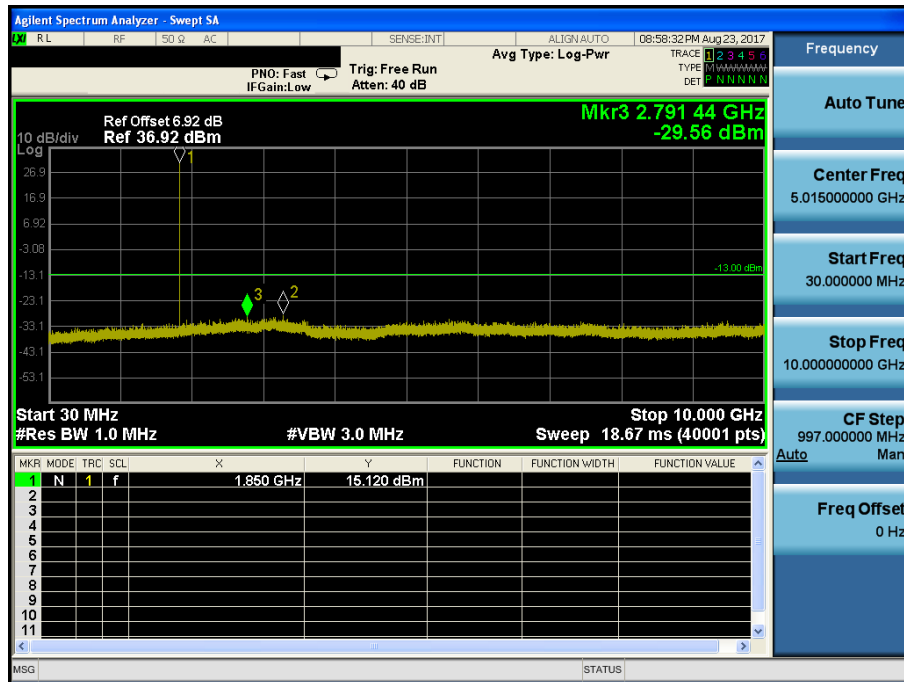


GPRS1900 & Channel: 512

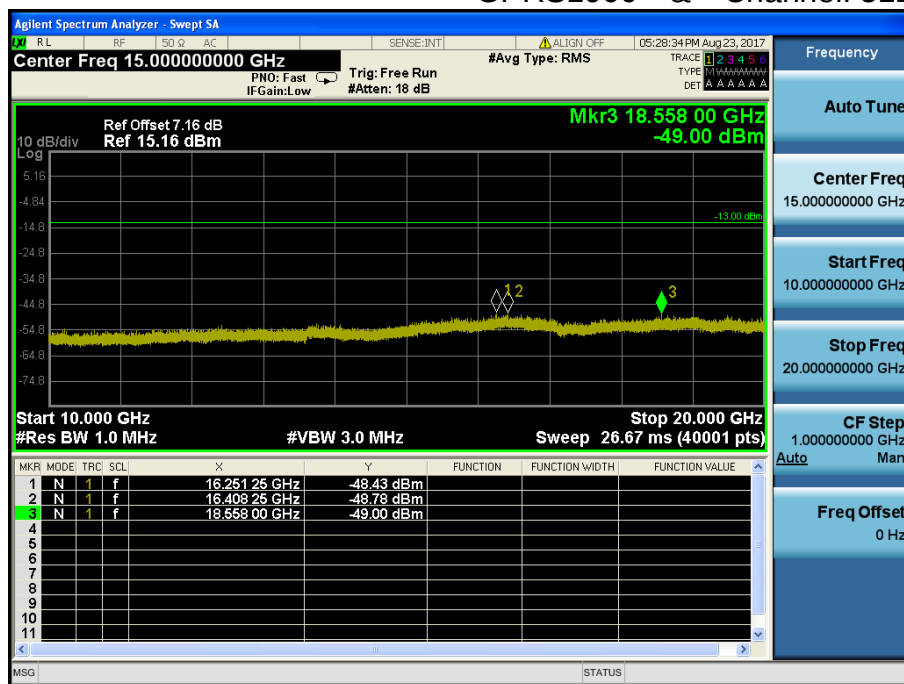


GPRS1900 & Channel: 661

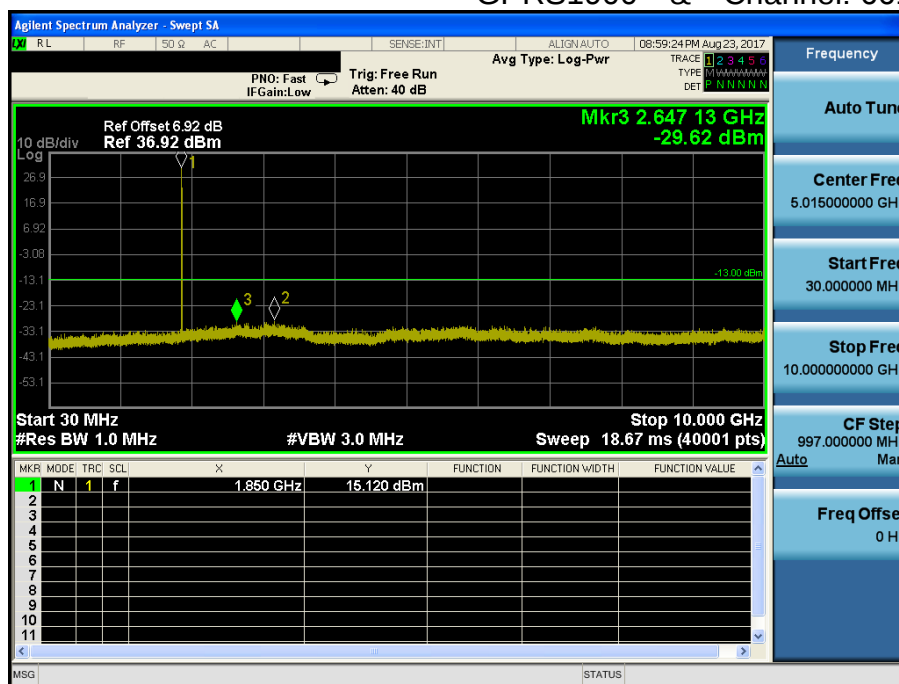


GPRS1900 & Channel: 661

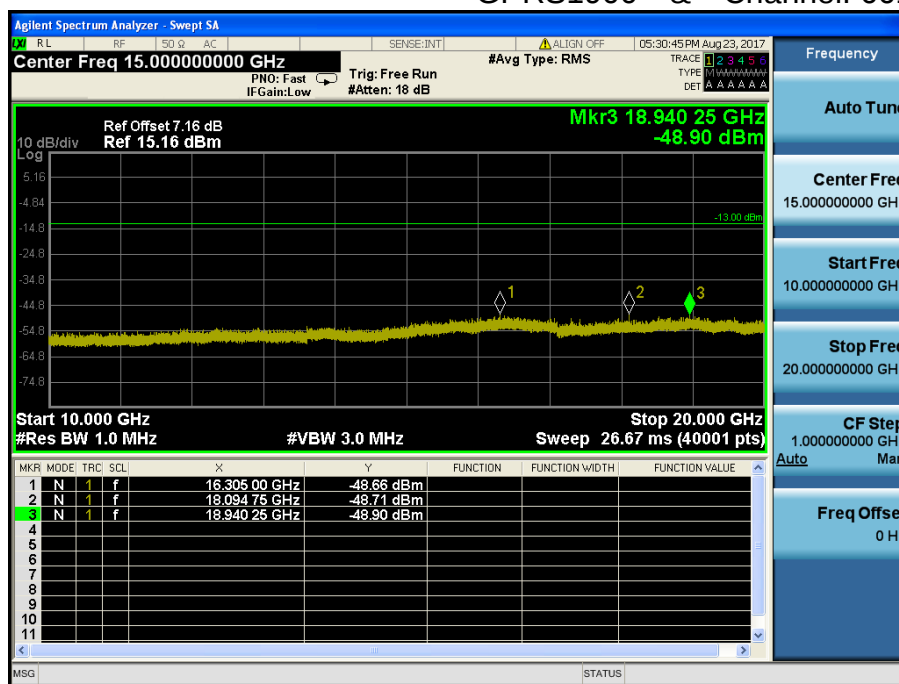


GPRS1900 & Channel: 810

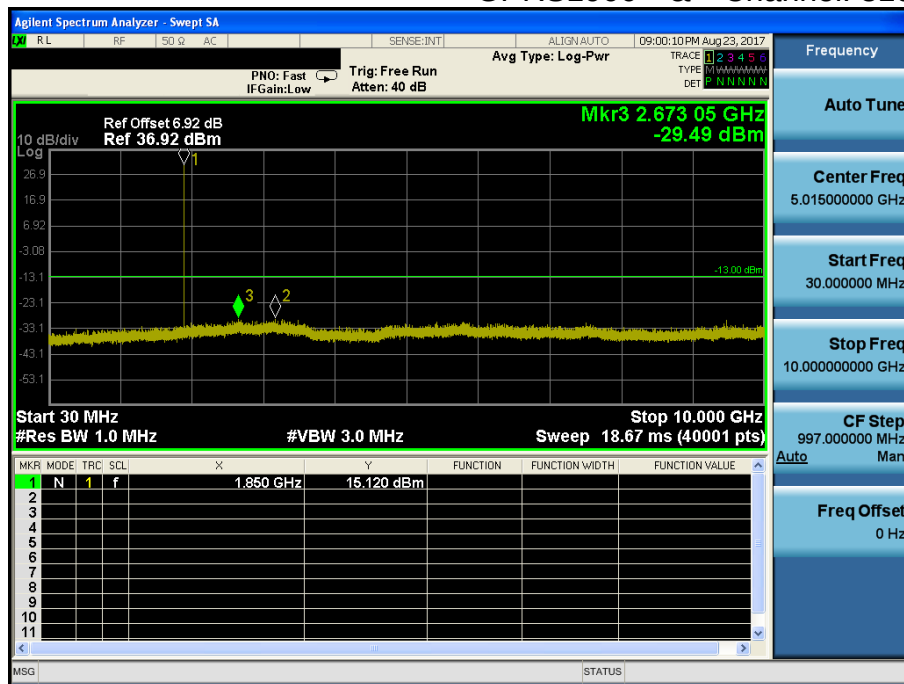


GPRS1900 & Channel: 810

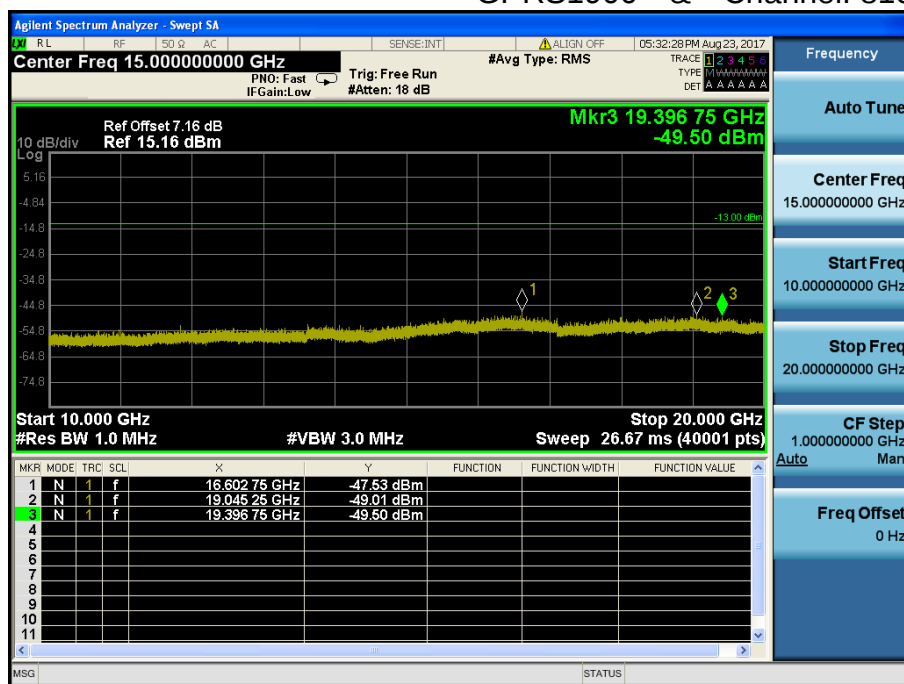


WCDMA850 & Channel: 4132

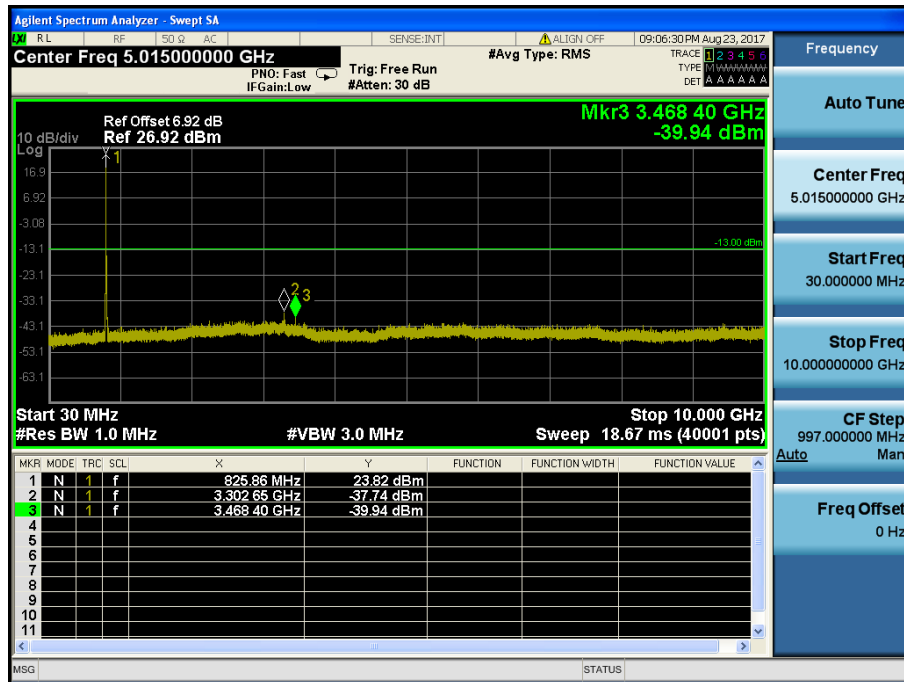


WCDMA850 & Channel: 4183

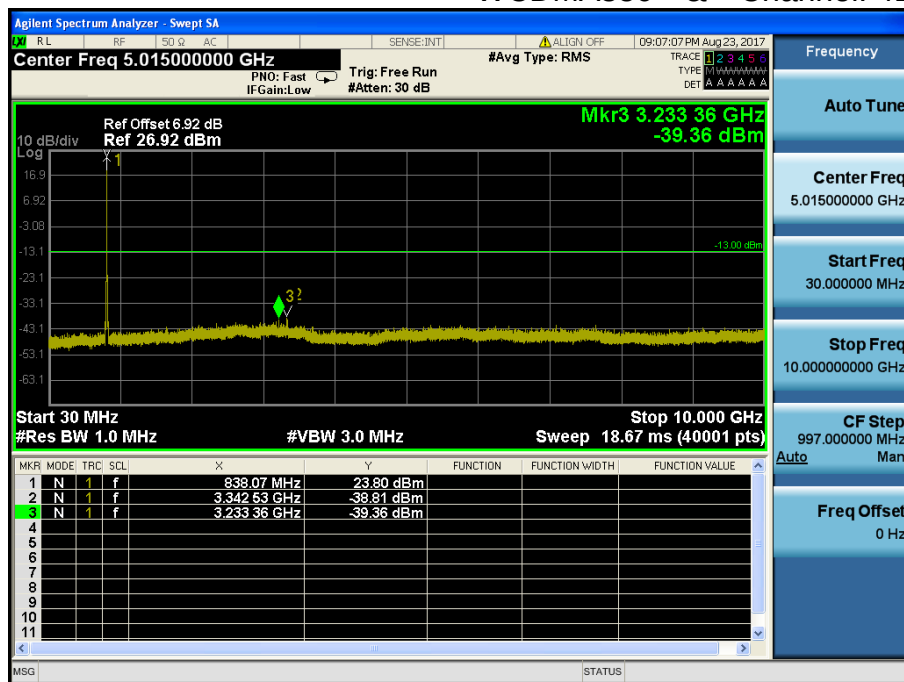


WCDMA850 & Channel: 4233

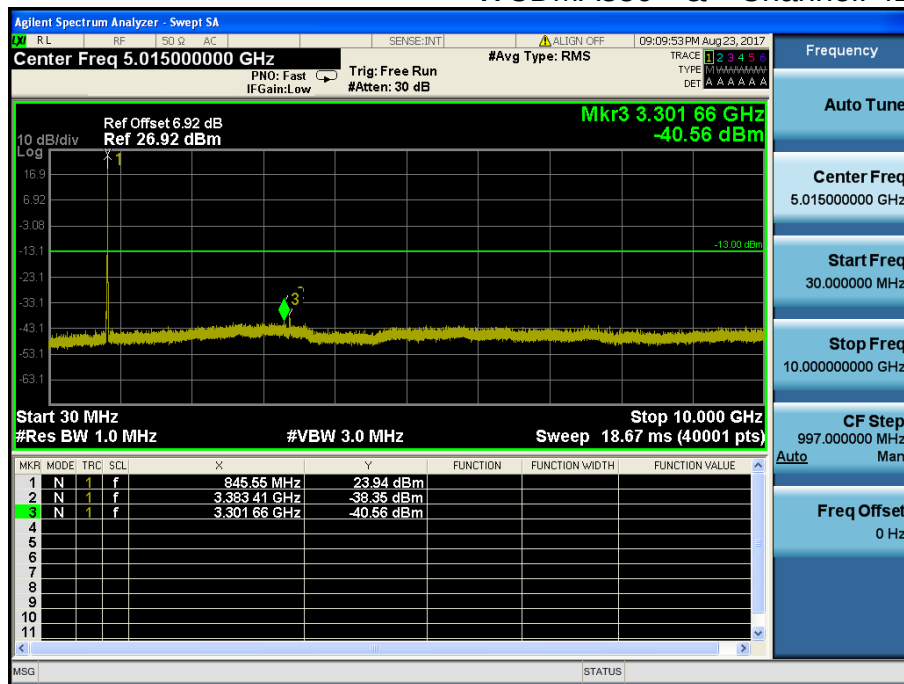


HSUPA850 & Channel: 4132

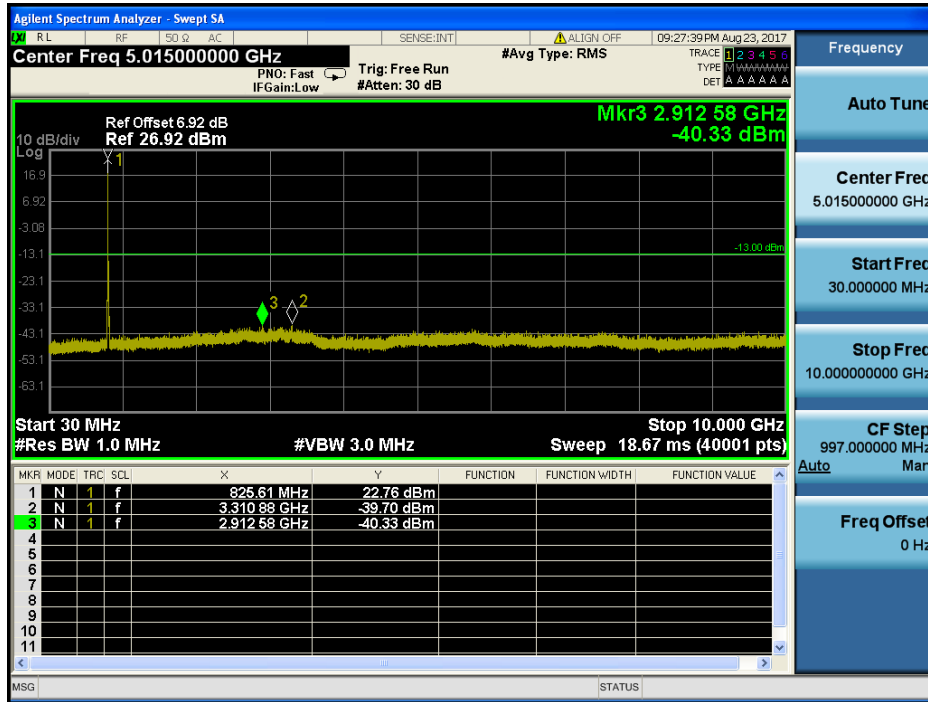


HSUPA850 & Channel: 4183

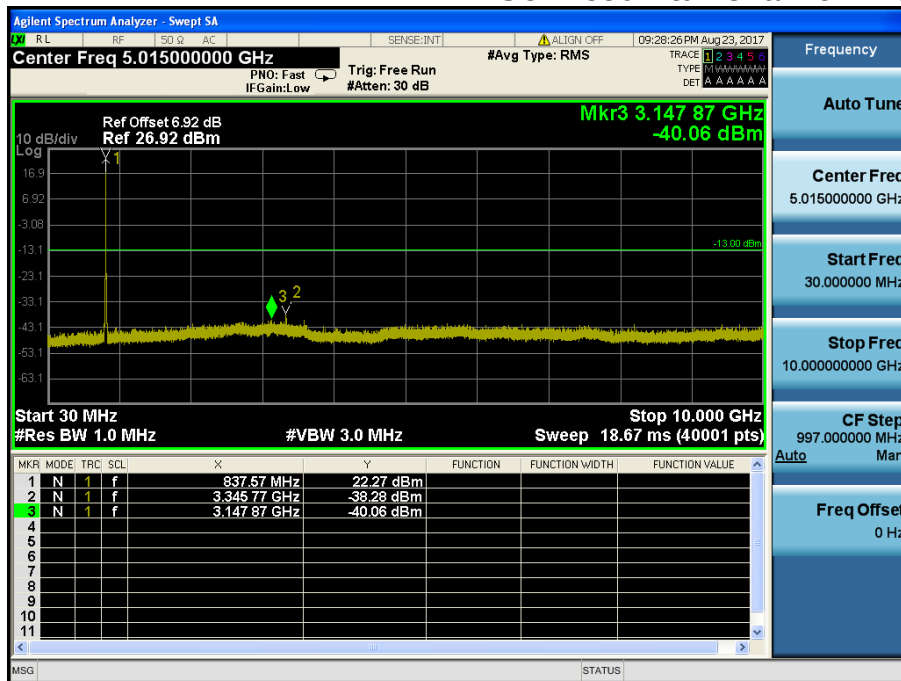


HSUPA850 & Channel: 4233

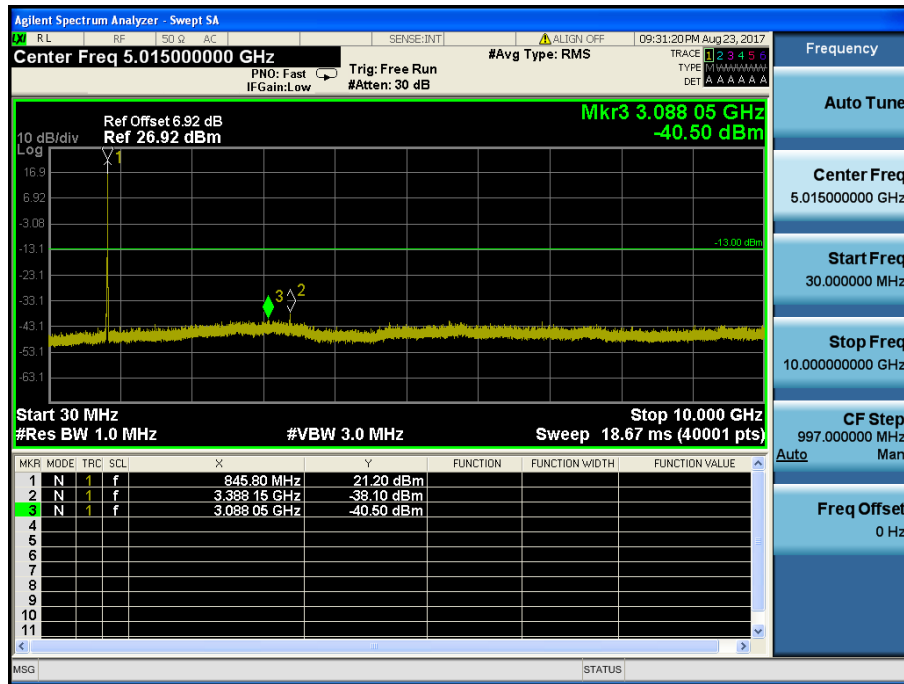


WCDMA1900 & Channel: 9262

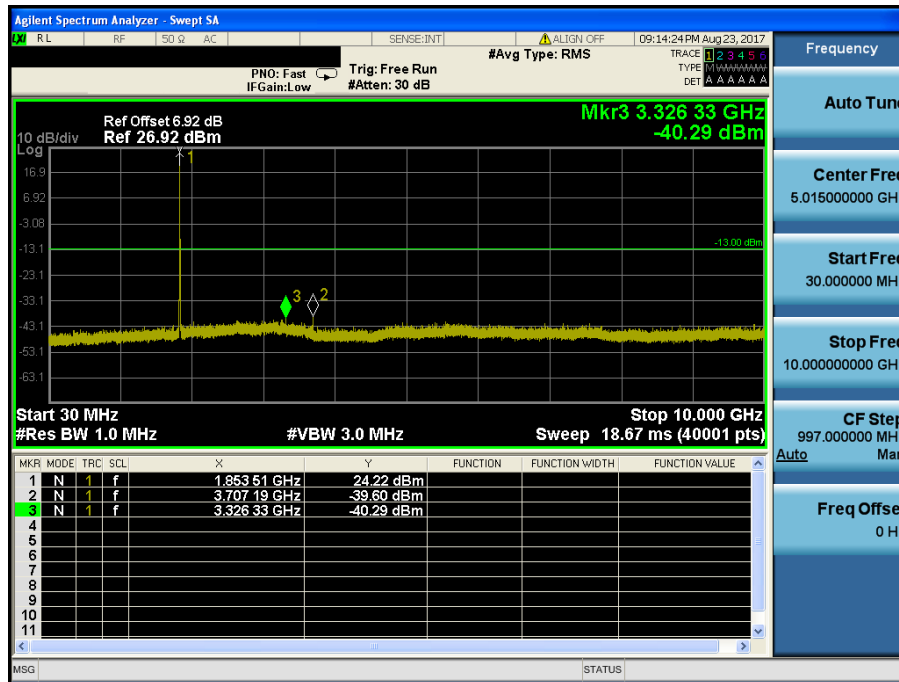


WCDMA1900 & Channel: 9262

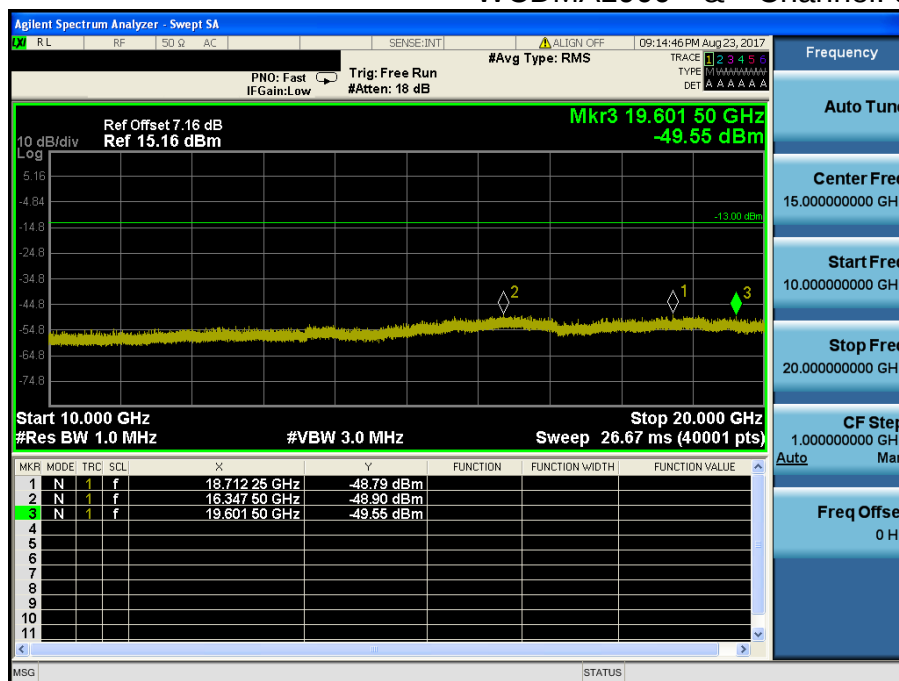


WCDMA1900 & Channel: 9400

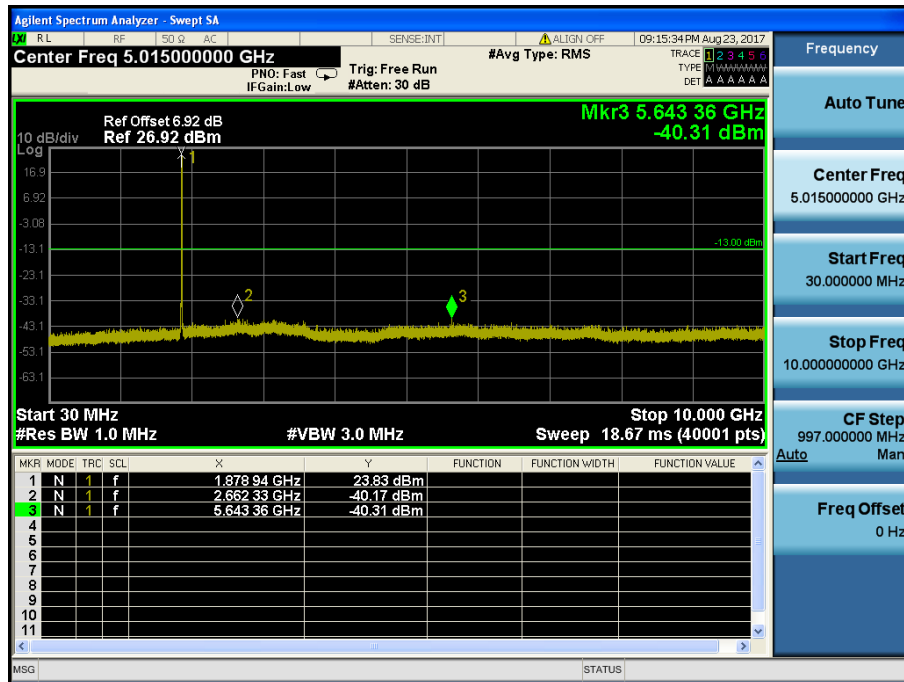


WCDMA1900 & Channel: 9400

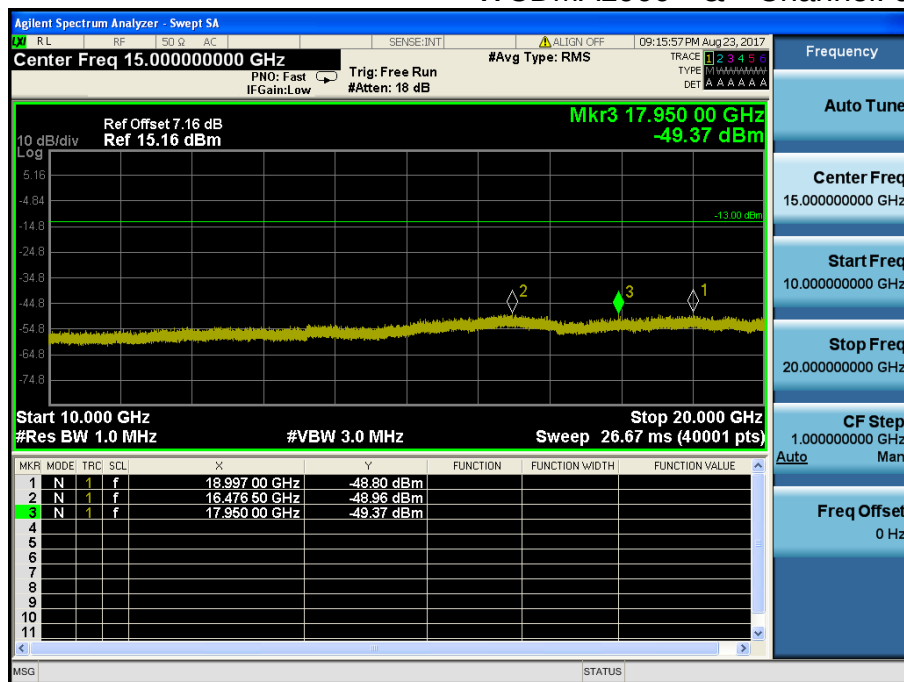


WCDMA1900 & Channel: 9538

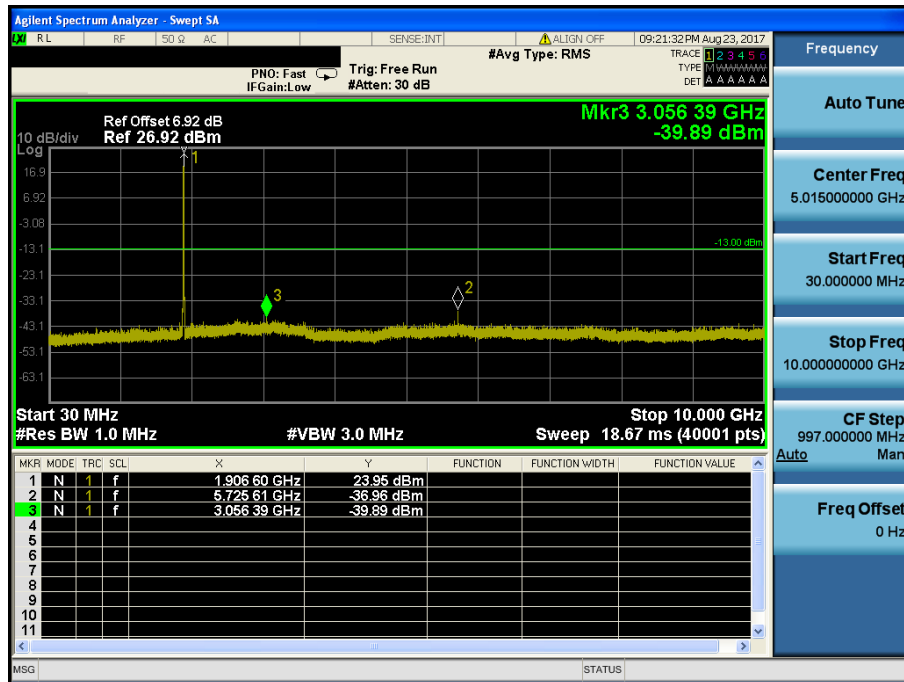


WCDMA1900 & Channel: 9538

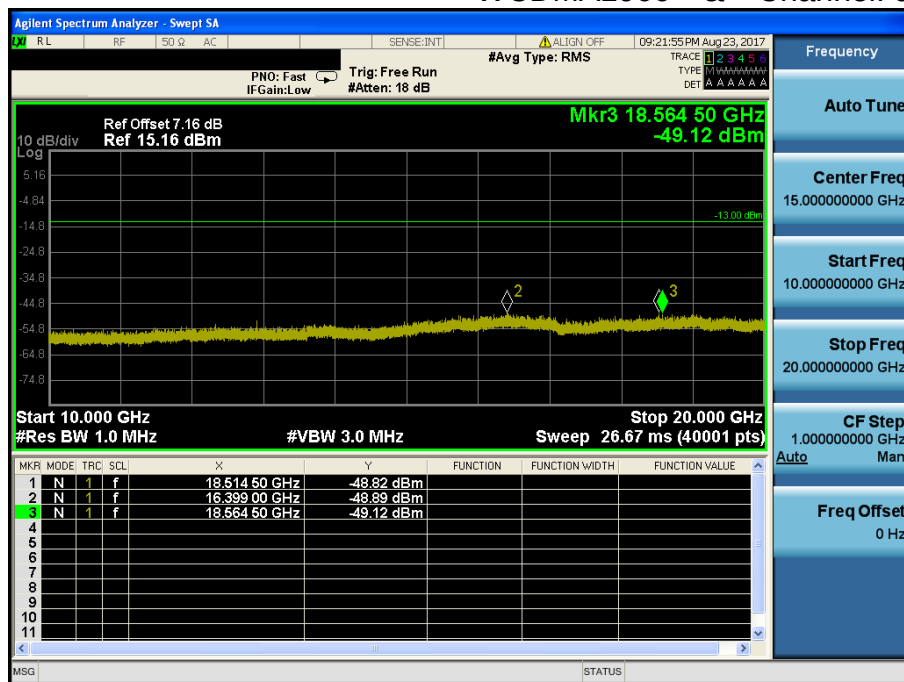


HSUPA1900 & Channel: 9262

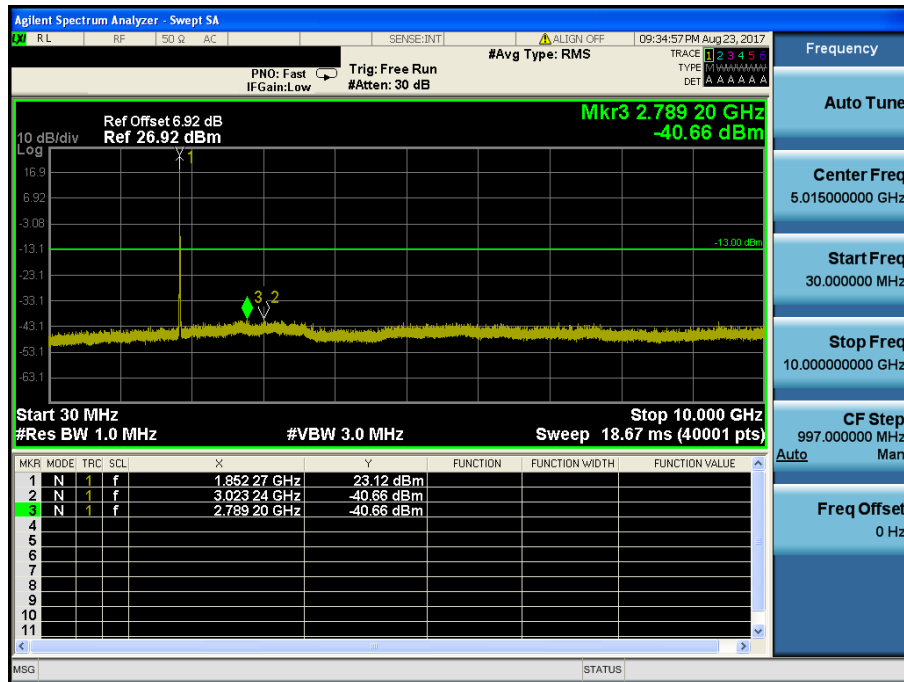


HSUPA 1900 & Channel: 9262

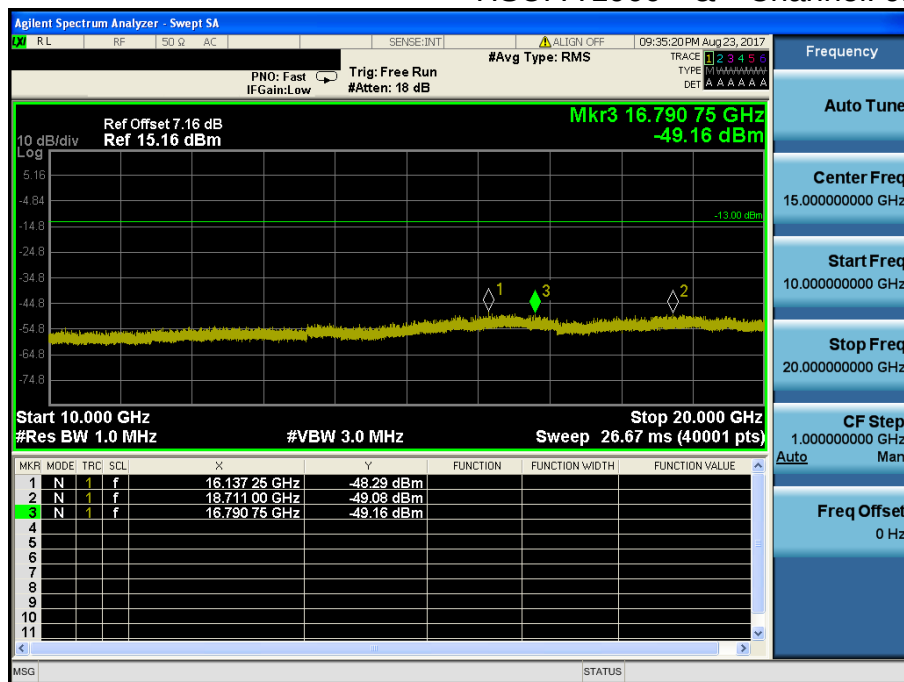


HSUPA1900 & Channel: 9400

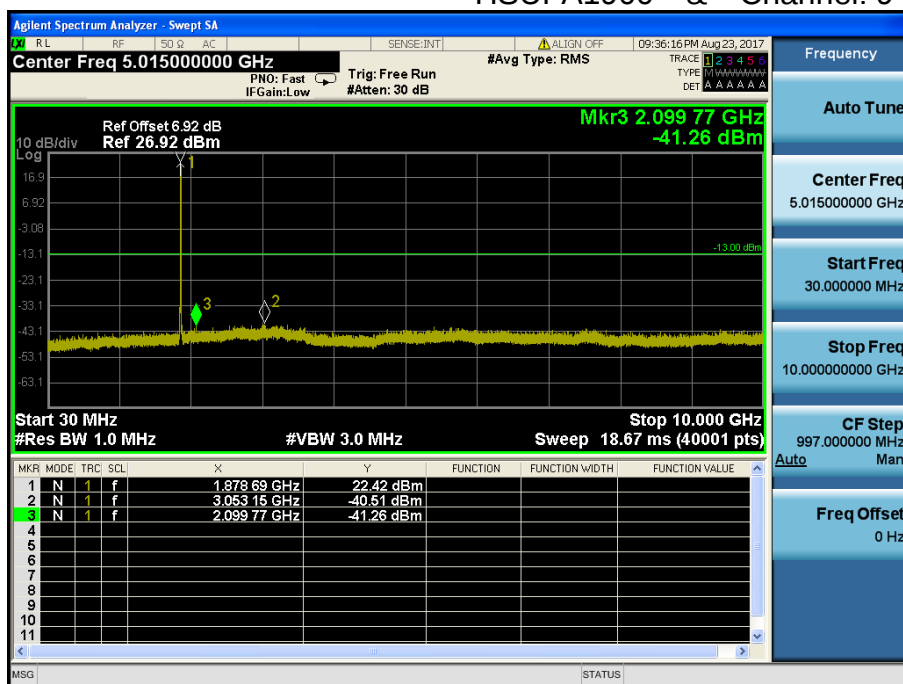


HSUPA1900 & Channel: 9400

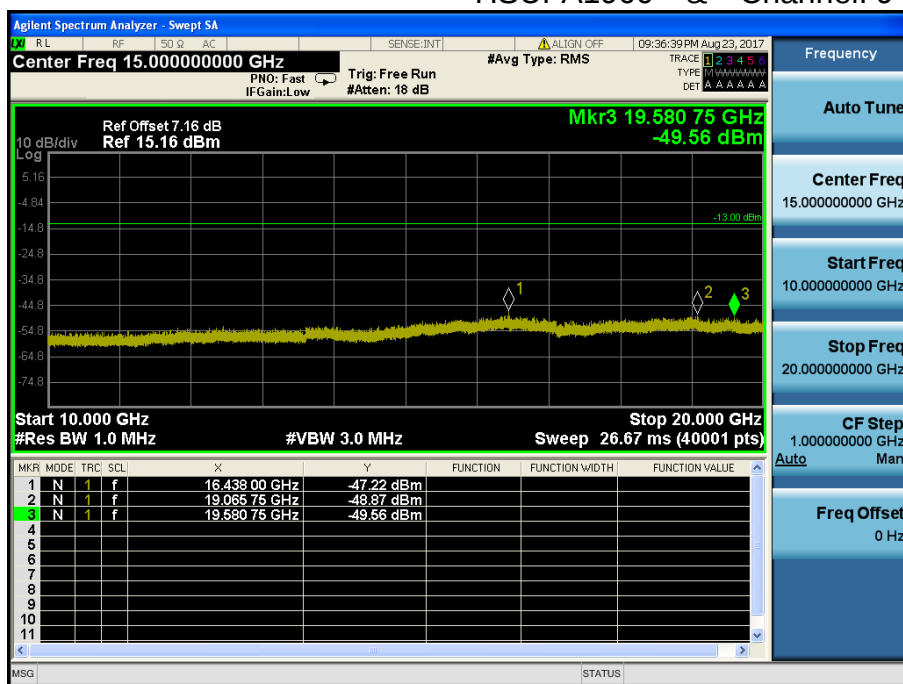

HSUPA1900 & Channel: 9538

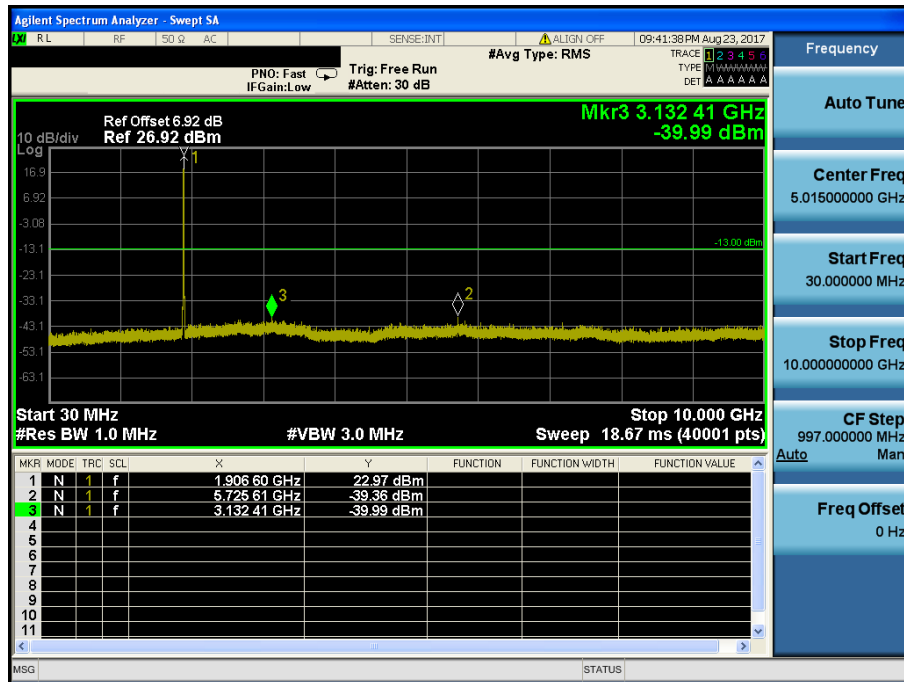


HSUPA1900 & Channel: 9538

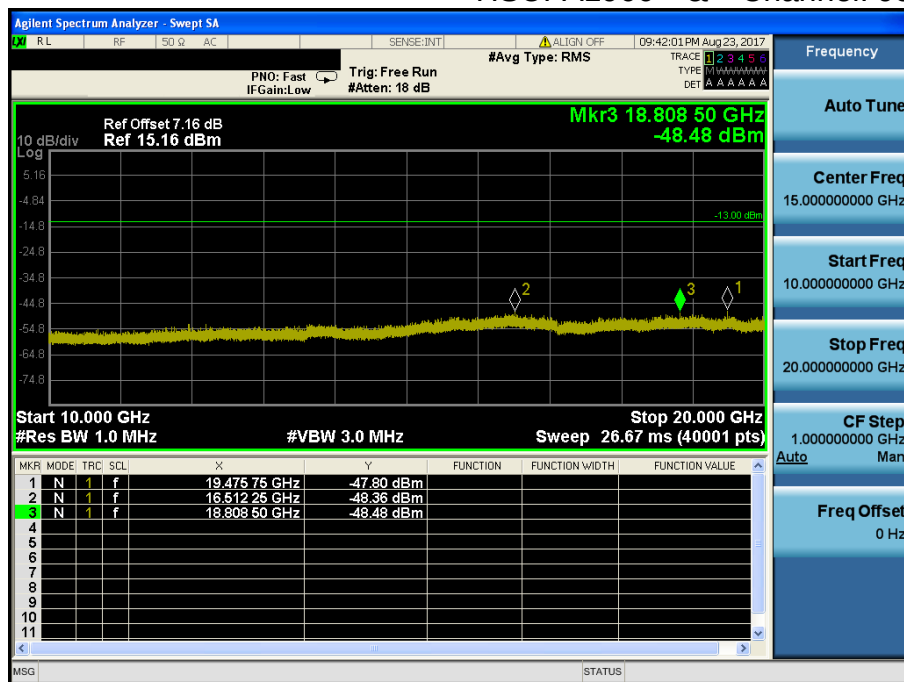


8.4 Band Edge


GPRS850 & Channel: 128

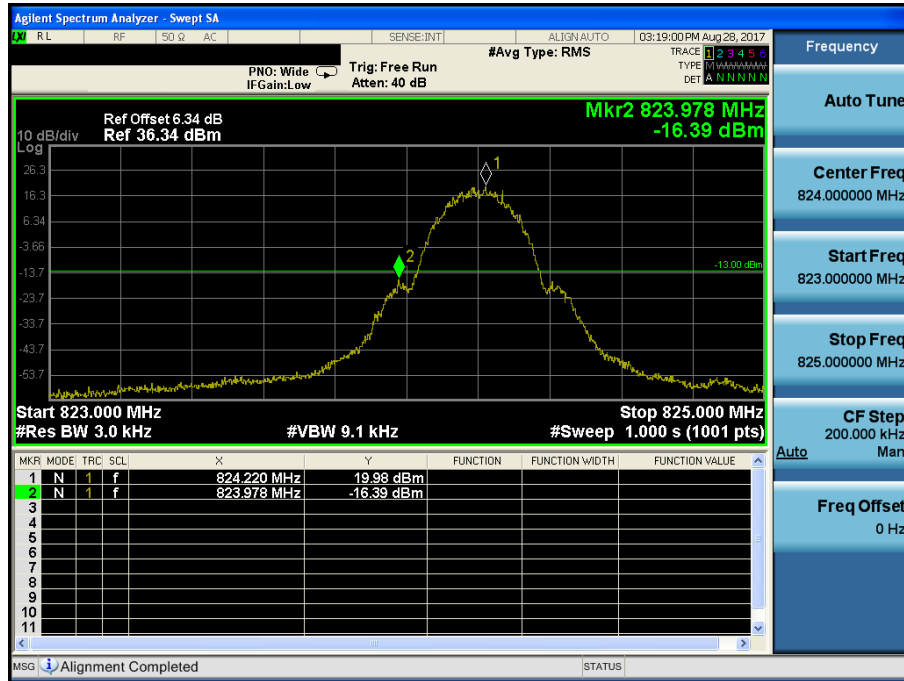


GPRS850 & Channel: 128

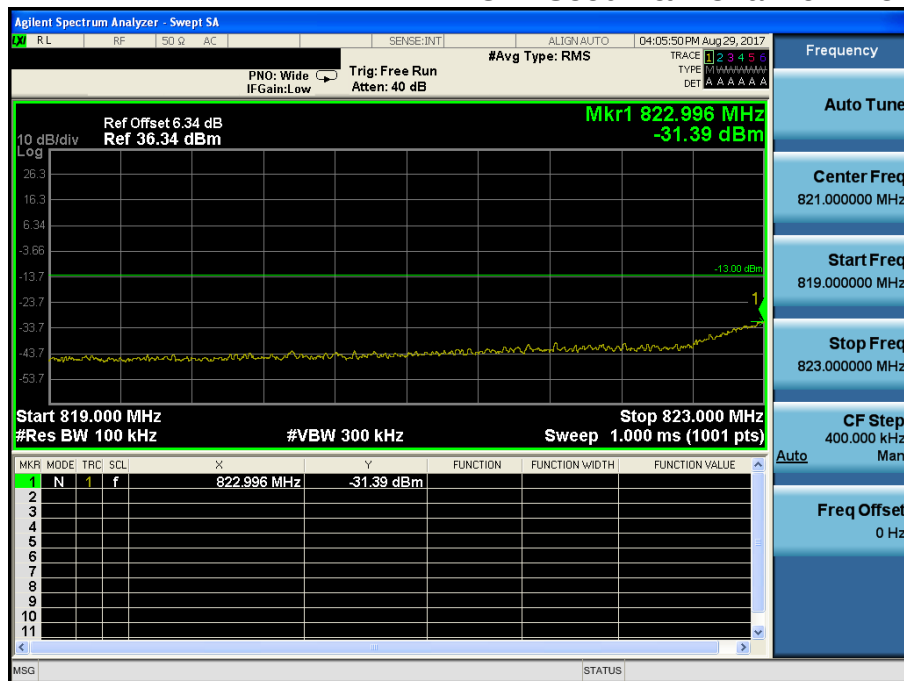


GPRS850 & Channel: 251

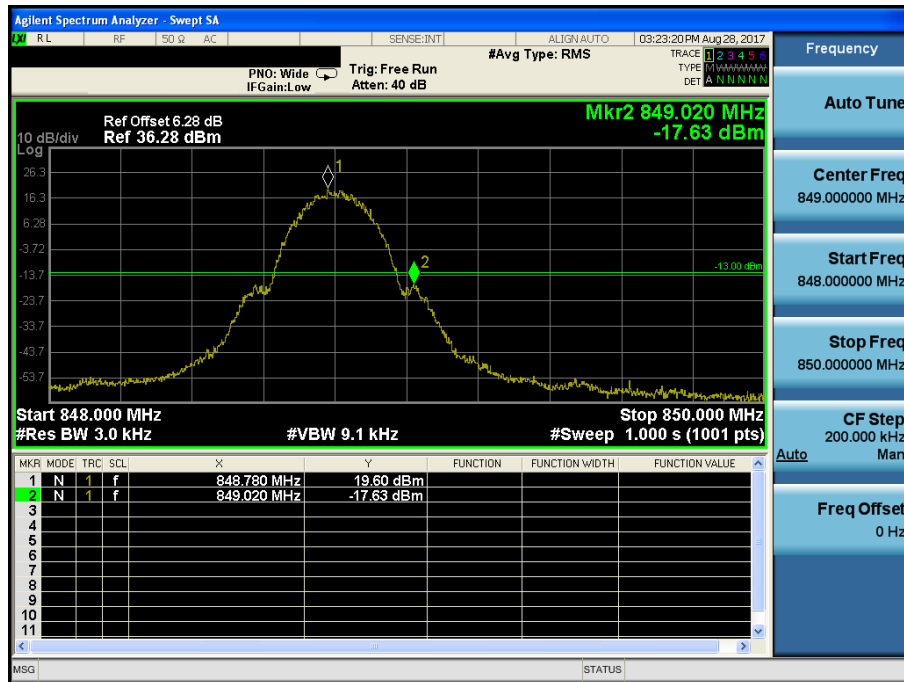

GPRS850 & Channel: 251

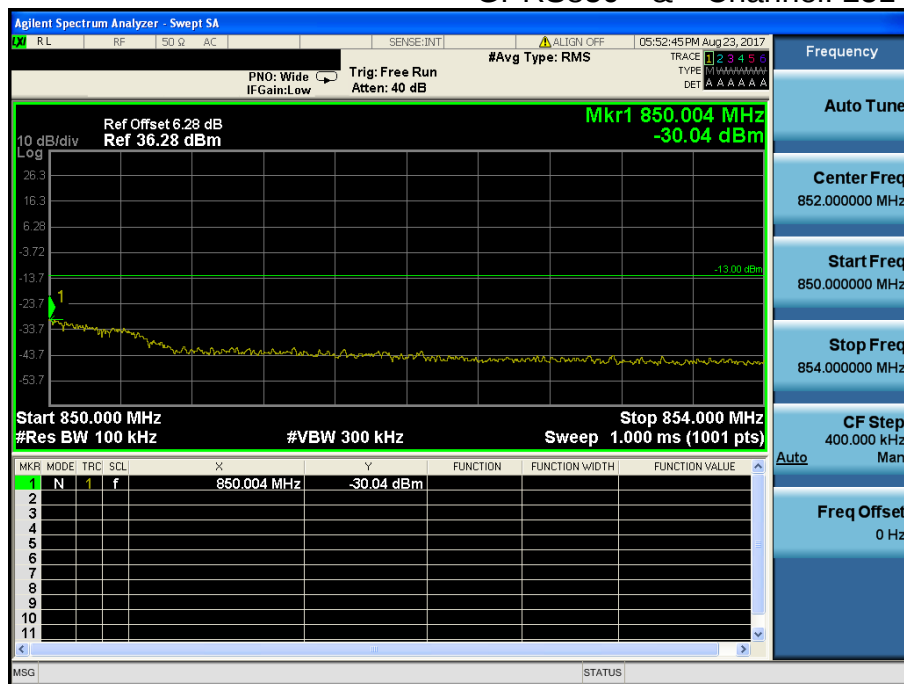


EDGE850 & Channel: 128

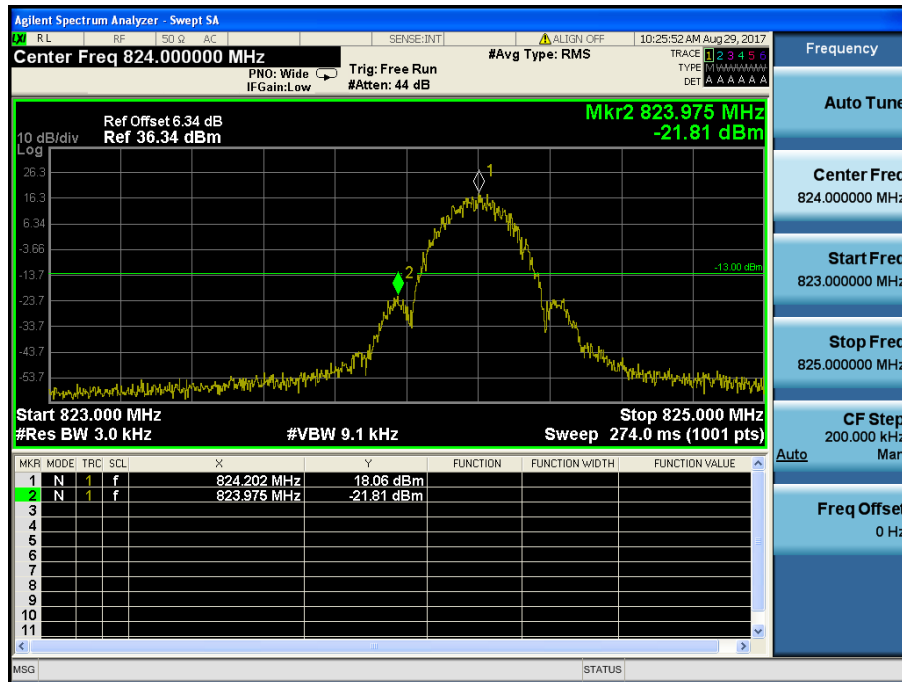

EDGE850 & Channel: 128




EDGE850 & Channel: 251

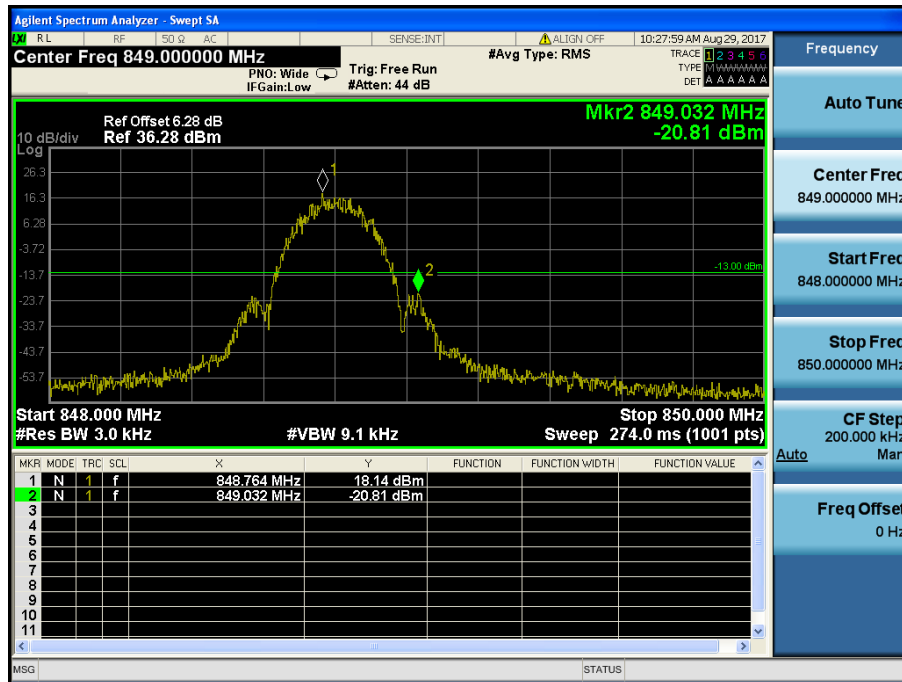


EDGE850 & Channel: 251




GPRS1900 & Channel: 512

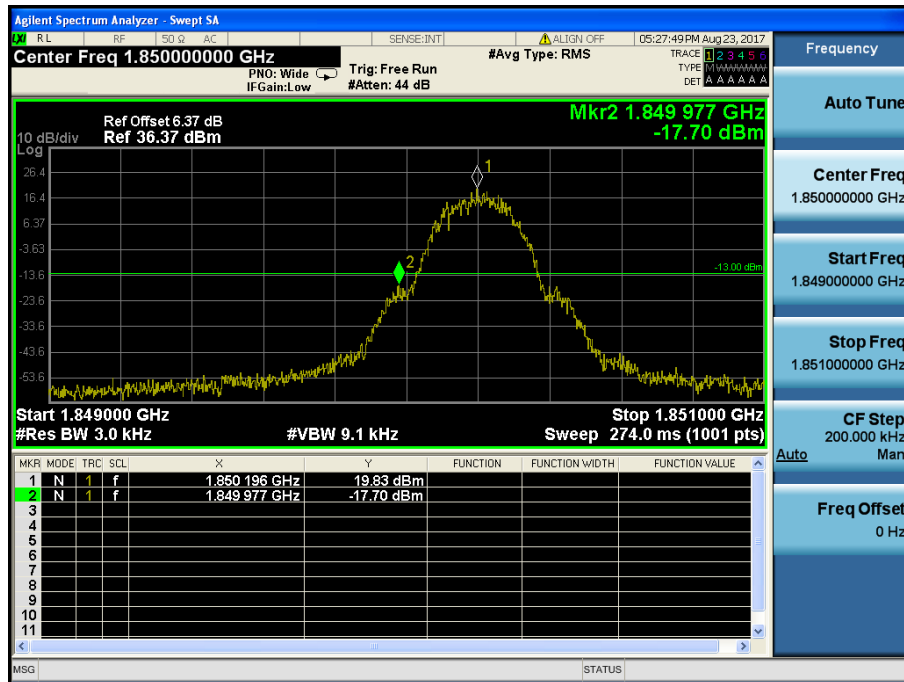


GPRS1900 & Channel: 810

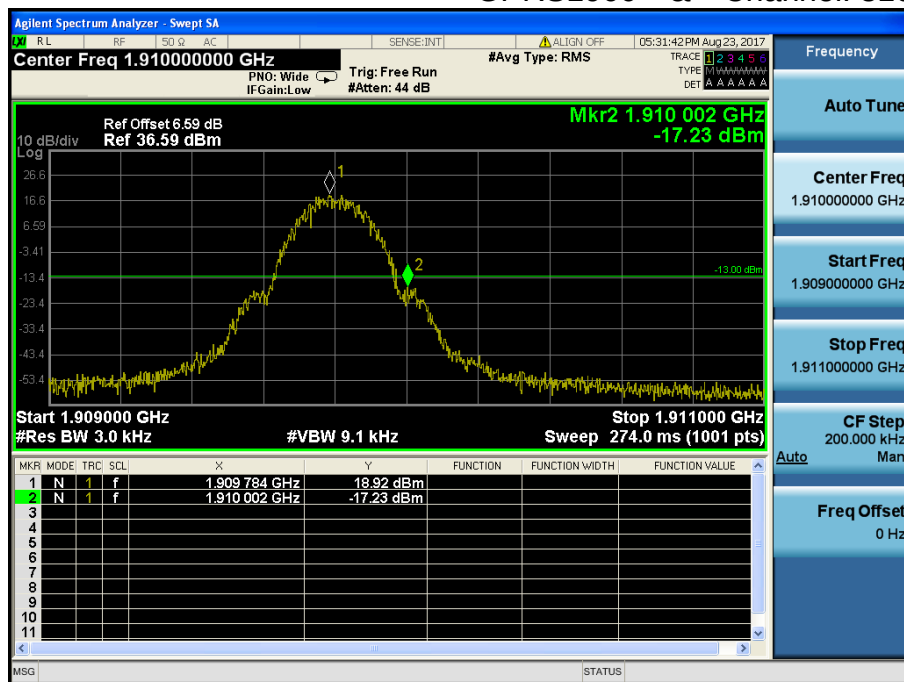


EDGE1900 & Channel: 512

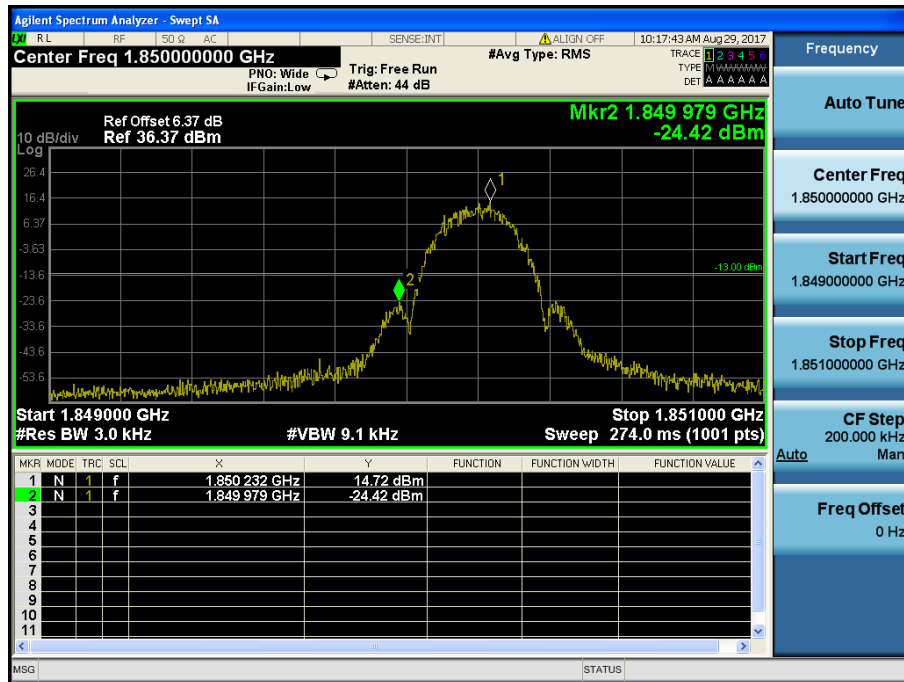


EDGE1900 & Channel: 810

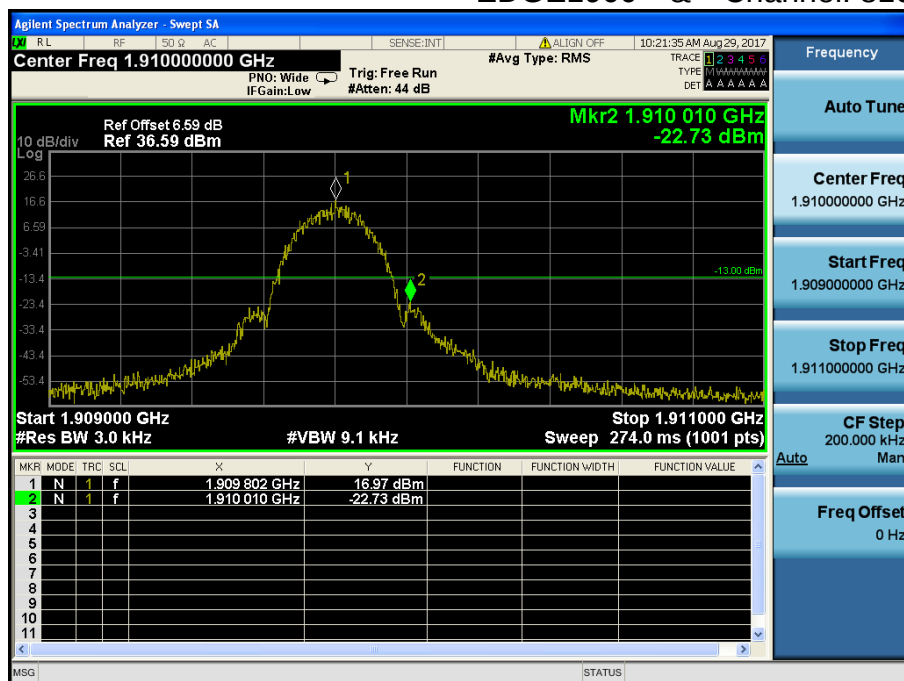

WCDMA850 & Channel: 4132

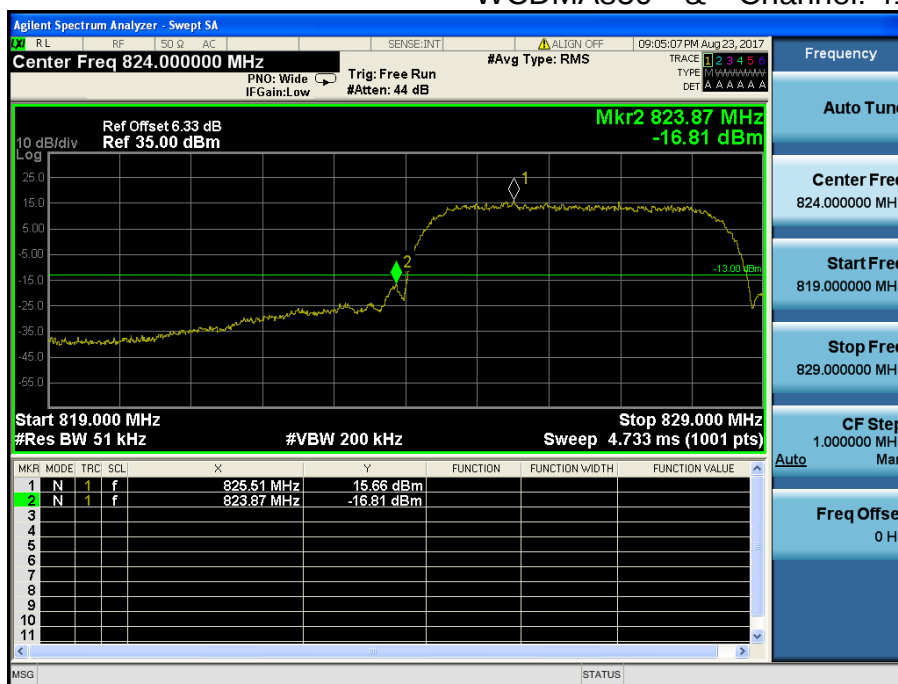


WCDMA850 & Channel: 4132

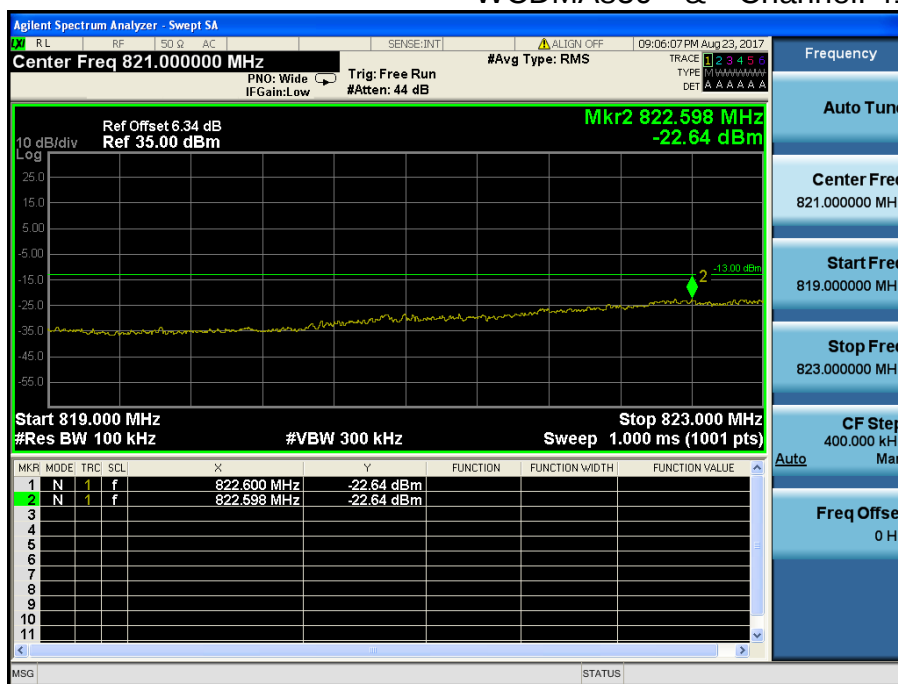

WCDMA850 & Channel: 4233




WCDMA850 & Channel: 4233

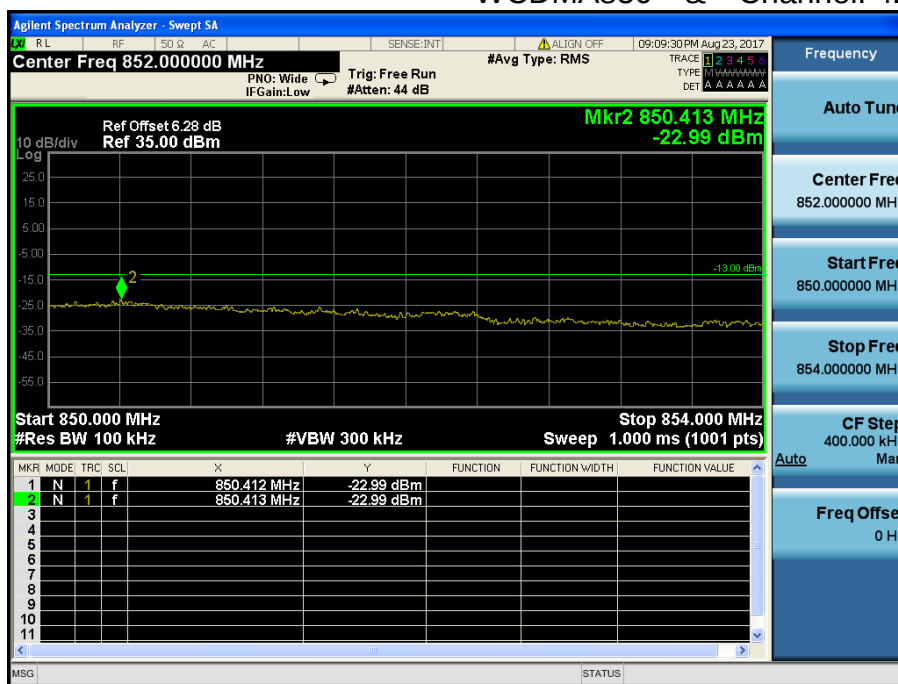

HSUPA850& Channel: 4132




HSUPA850 & Channel: 4132

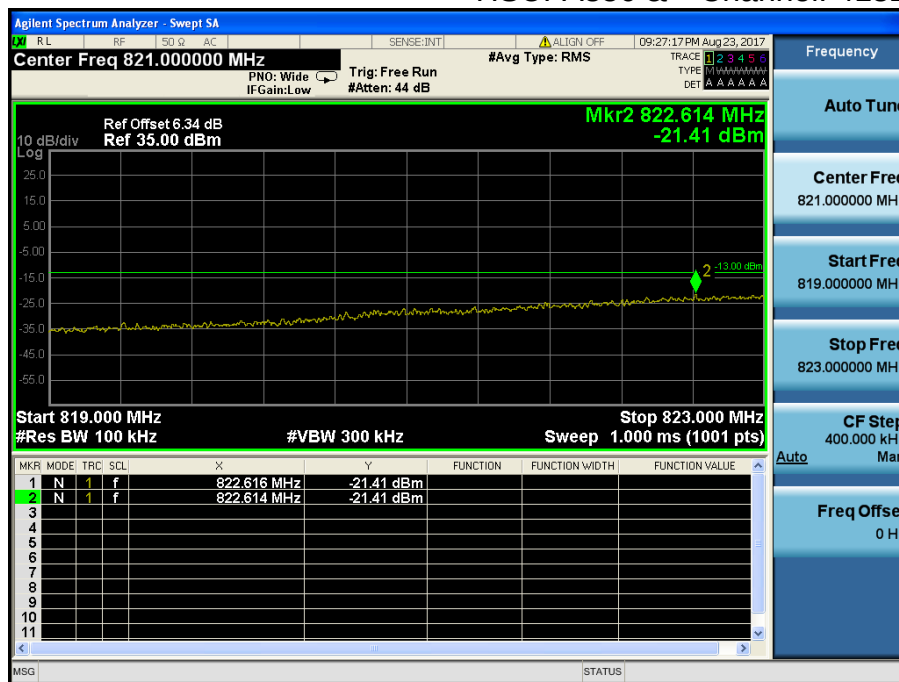


HSUPA850 & Channel: 4233



HSUPA850 & Channel: 4233

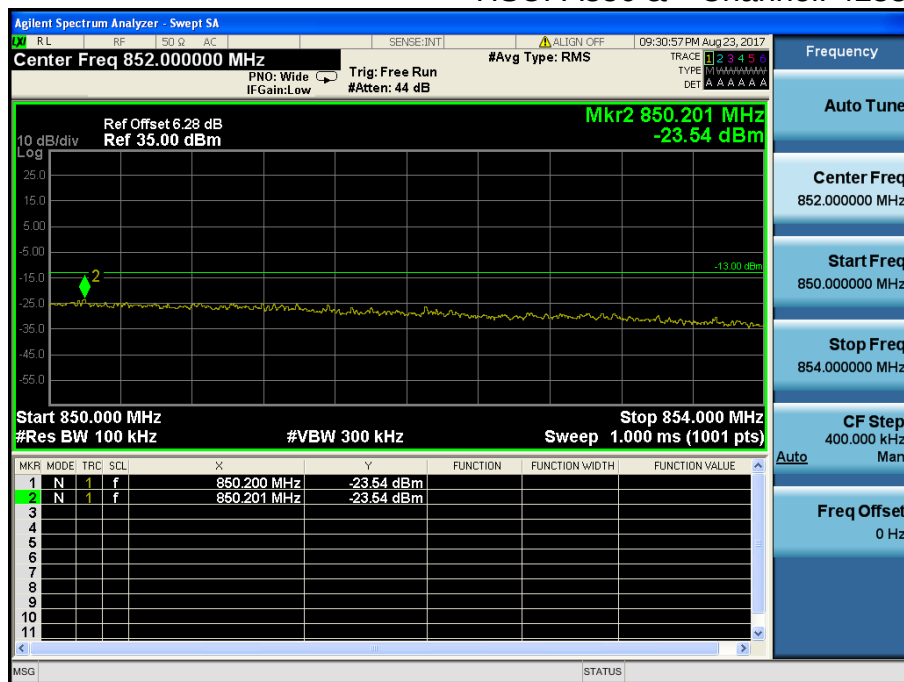

WCDMA1900 & Channel: 9262

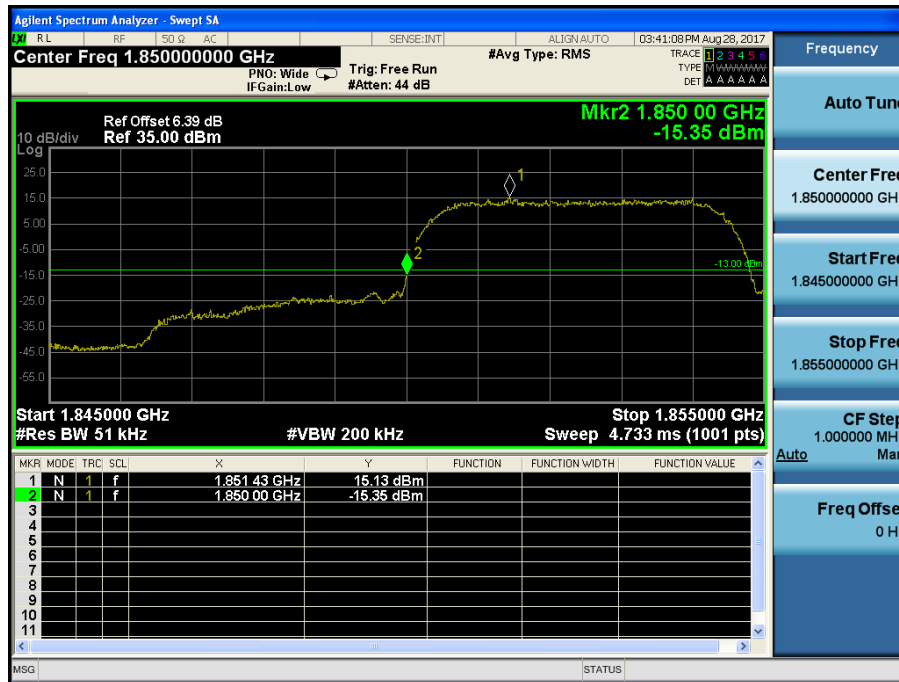

WCDMA1900 & Channel: 9262




WCDMA1900 & Channel: 9538



WCDMA1900 & Channel: 9538



HSUPA1900 & Channel: 9262

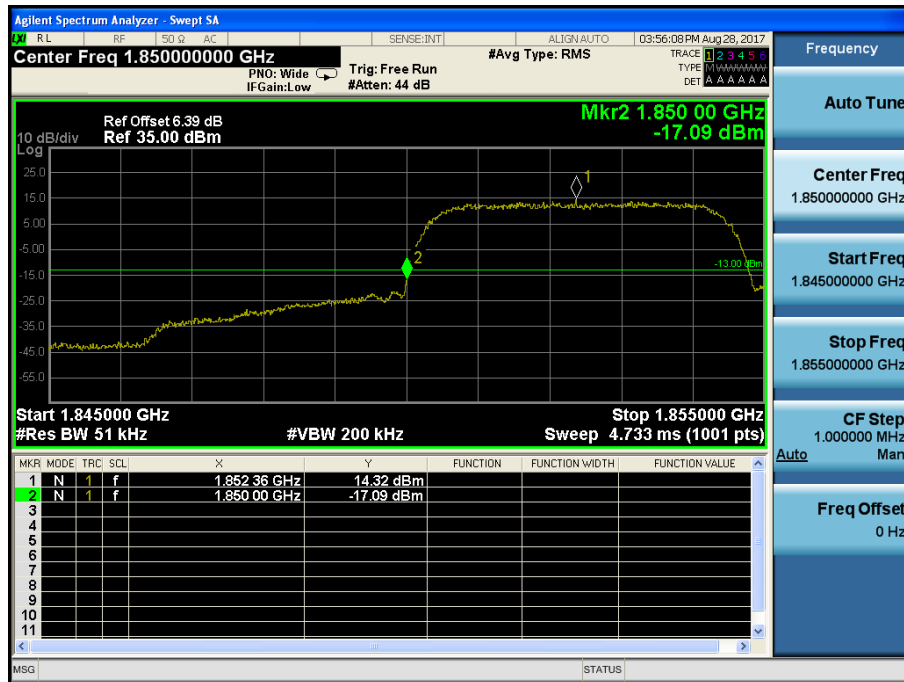

HSUPA1900 & Channel: 9262



HSUPA1900 & Channel: 9538



HSUPA1900 & Channel: 9538

