



Quick Start

Thanks for the purchase of the DESMA Bluetooth handfree.


Before placing calls with the Bluetooth handfree, you need to pair your handfree and phone firstly to build up the connection for operation.

⦿ Before the first time use, remember to fully charge the battery in around 5 hours.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Notice: Any changes or modification not expressly approved by the party responsible could void the user's authority to operate the device.





Views, Dimensions and Buttons

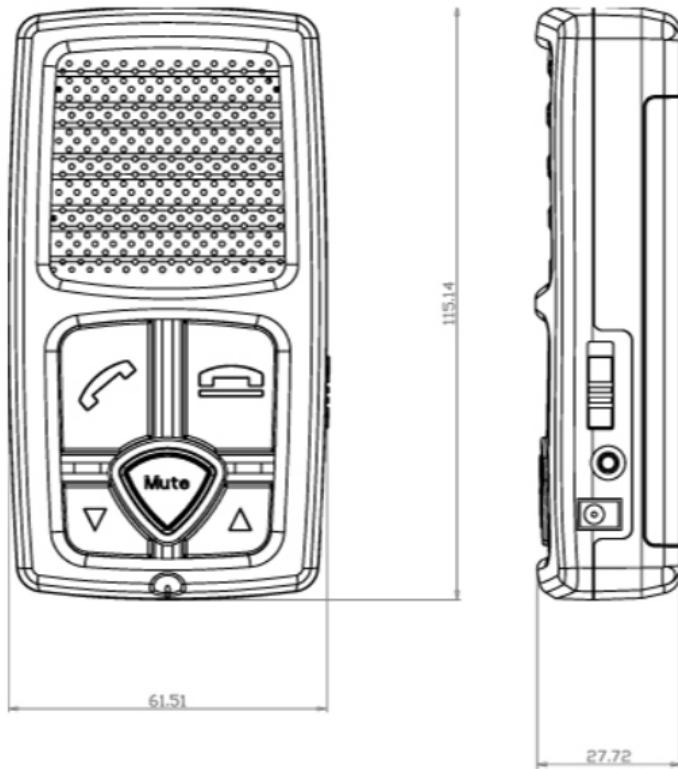



Desma Bluetooth Handfree Quick Start Guide

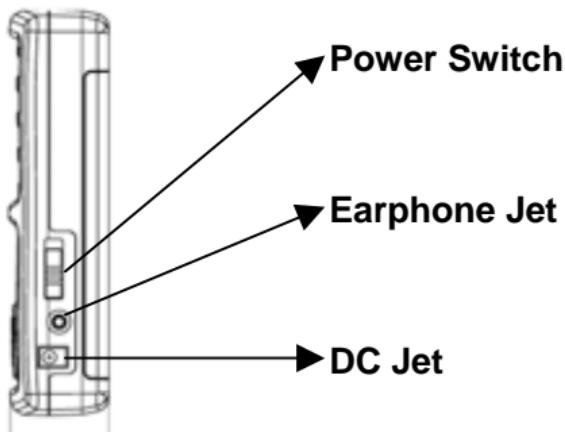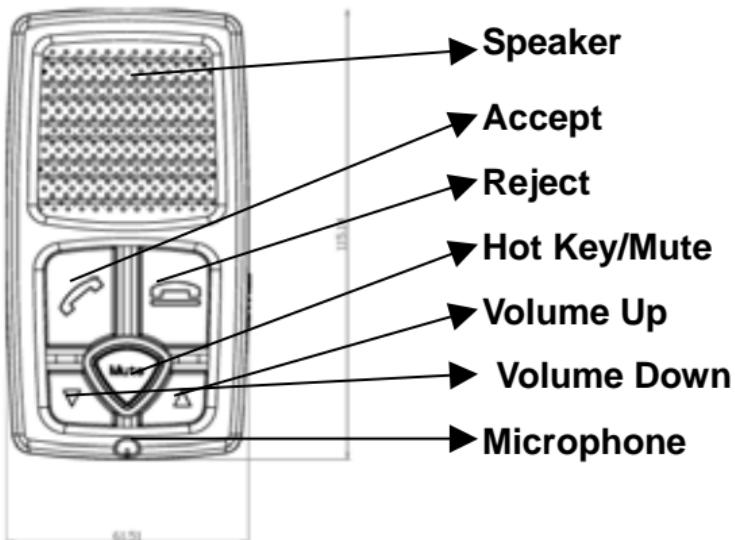



PAIRING YOUR HANDFREE AND CELLULAR PHONE

You will only need to complete these steps the first time you use the handfree with a Bluetooth phone.

You only need to pair with your mobile phone in first use.

1. Take the handfree and mobile phone in close proximity.
2. Turn on the handfree, all indicators shall be lighting. Device will go into stand by mode.
3. Press the Hot key sequentially, you will hear a tone than blue and white LED flashing interval. At this moment, the handfree is into pairing mode.
4. Perform a device discovery(or scan) from the mobile phone. For details about device discovery consult your phone's user guide.
5. Enter the pass key “1234” to pair the handfree with the phone (pairing is successful when the headset blue and white light extinguishing and hear one tone from handfree)
6. Link your handfree to mobile phone to establish the audio connection. You can now place and receive call directly on your handfree.



7. If your mobile phone can't accept pairing or finish pairing but no sound happened, it means your mobile phone only accept "Handfree" mode, please refer pairing procedures and change the service mode into handfree mode by press Hot key one time.

REGULAR OPERATION

● After a successful pairing, you may change Handfree status by following instruction upon your need.

Make a phone call using the phone key pad

You can use the phone as usual to dial a number. The tones and audio signals are automatically transferred to your handfree and white LED will be lighted to support you handle it.

Make a phone call using voice activation

Some phones allow you to use voice-dialing feature. The voice dial function must be activated and voice tags already recorded. Please refer to the phone user guide for instructions on storing voice tags.

1. Press the Accept button one time, a tone prompts you to say the name of the person you wish to call as entered in the phonebook.



2. Call out the voice tag name, the phone will automatically place the call.

Make a phone call using the redial function

Press Accept button 2 second to redial the number.

Hand up a phone call from the headset

To hand up a call, press the Reject button.

Reject a call

When ring tone still in calling, press Reject button.

Receiving a call

A ring tone will sound in your handfree. Device will answer all phone calls automatically, or you can press the Accept button to answer.

Transferring a call

Transfer a call between handfree and your phone. Please press volume up and down together to transfer phone call.

Sometimes it must be initiated by the phone. Please refer your phone's user guide.

Disconnecting your Bluetooth link

To terminate the Bluetooth connection between the handfree and your phone, turn the handfree off.



Volume control

Adjust the volume up: during conversation, press volume up.

Adjust the volume down: during conversation, press volume down.

Mute: during conversation, press Mute button.

It will disable the microphone, so the people on other side will not hear your voice.

Back to conversation: In mute mode, press Mute button.

Rehabilitate the conversation into normal status.

When the minimum/maximum volume is reached, a beep sound will be alarmed.



FUNCTION TABLE

FUNCTION	KEYSTROKE	DEVICE STATUS
Power On	Power Switch	
Power Off	Power Switch	
Recharging	DC jet	
Pairing	Hot key 2 Sec	Stand by Mode
Change pairing mode	Hot key	Pairing Mode Headset - > Handfree - >
Break pairing mode	Reject	Pairing Mode
Answer the phone	Accept	Incoming telegram
Answer the phone	Hotkey	Incoming telegram
Reject the phone	Reject	Incoming telegram
Hand up	Reject	Voice connection
Mute	Mute	Voice connection
Back to Conversation	Mute	Mute Mode
Volume Up	Volume UP	All Mode
Volume Down	Volume Down	All Mode
Voice Dialing	Accept	Stand by mode
Last Dialing	Accept 2 Sec	Stand by mode
Transfer Phone Call	Volume Up+Down	Voice connection



INDICATOR CHART

STATUS	INDICATORS	TIME SLOT
Power On	Blue/Red/White	Light 5 Sec
Power Off	X	
Pairing Mode	Blue/White twinkle	1 Sec
Stand by Mode	Blue twinkle	2 Sec
Connection Mode	Blue twinkle	1 Sec
Voice Connection Mode	Blue twinkle	0.5 Sec
Power Low	Blue will follow the status Red twinkle	0.5 Sec
Recharging	Blue will follow the status Red Light	

Back Light (White LED) Operation moment

- a. Pairing mode twinkle
- b. Voice connection
- c. Touch the keypad
- d. Incoming telegram
- e. Power On

Back Light (White LED) Stop point

- a. No command in 5 second
- b. After voice connection 5 second
- c. After ring tone break off 5 second
- d. After power on 5 second



Hot Key Function and Operation moment

Stand by Mode: Press 2 Sec for into pairing mode

Pairing Mode: Change service mode

Voice Connection: Mute

Mute Mode: Back to conversation